



US007525134B2

(12) **United States Patent**
Rhodes et al.

(10) **Patent No.:** **US 7,525,134 B2**
(45) **Date of Patent:** **Apr. 28, 2009**

(54) **CMOS IMAGER PIXEL DESIGNS**

(75) Inventors: **Howard Rhodes**, Boise, ID (US); **Jeff McKee**, Meridian, ID (US)

(73) Assignee: **Micron Technology, Inc.**, Boise, ID (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/488,845**

(22) Filed: **Jul. 19, 2006**

(65) **Prior Publication Data**

US 2006/0273352 A1 Dec. 7, 2006

Related U.S. Application Data

(62) Division of application No. 11/165,490, filed on Jun. 24, 2005, now Pat. No. 7,102,180, which is a division of application No. 10/303,897, filed on Nov. 26, 2002, now Pat. No. 6,960,796.

(51) **Int. Cl.**

H01L 27/148 (2006.01)

H01L 29/768 (2006.01)

(52) **U.S. Cl.** **257/222; 257/223; 257/225**

(58) **Field of Classification Search** **257/222, 257/223, 225**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,532,549 A * 7/1985 Ozaki et al. 348/304

4,886,977 A *	12/1989	Gofuku et al.	250/208.1
5,461,425 A	10/1995	Fowler et al.	
5,841,159 A	11/1998	Lee et al.	
5,898,209 A	4/1999	Takakura	
5,965,875 A	10/1999	Merrill	
6,150,683 A	11/2000	Merrill et al.	
6,204,524 B1	3/2001	Rhodes	
6,262,703 B1	7/2001	Perner	
6,300,662 B1	10/2001	Doyle et al.	
6,310,366 B1	10/2001	Rhodes et al.	
6,326,652 B1	12/2001	Rhodes	
6,429,470 B1	8/2002	Rhodes	
6,741,283 B1	5/2004	Merrill et al.	
6,744,084 B2	6/2004	Fossum	
2001/0006238 A1	7/2001	Han et al.	
2001/0015831 A1	8/2001	Lauxtermann et al.	

OTHER PUBLICATIONS

Watanabe et al., Hemispherical Grained Si Formation . . . Capacitor, Jul. 1995, IEEE Transactions on Electron Devices, vol. 42, pp. 1252-1253.

* cited by examiner



Primary Examiner—Monica Lewis

(74) *Attorney, Agent, or Firm*—Dickstein Shapiro LLP

(57) **ABSTRACT**

A charge storage capacitor which is connected to various light sensitive and/or electrical elements of a CMOS imager, as well as methods of formation, are disclosed. The charge storage capacitor may be formed entirely over a field oxide region of the CMOS imager, entirely over an active area of a pixel sensor cell, or partially over a field oxide region and partially over an active pixel area of a pixel sensor cell.

19 Claims, 10 Drawing Sheets

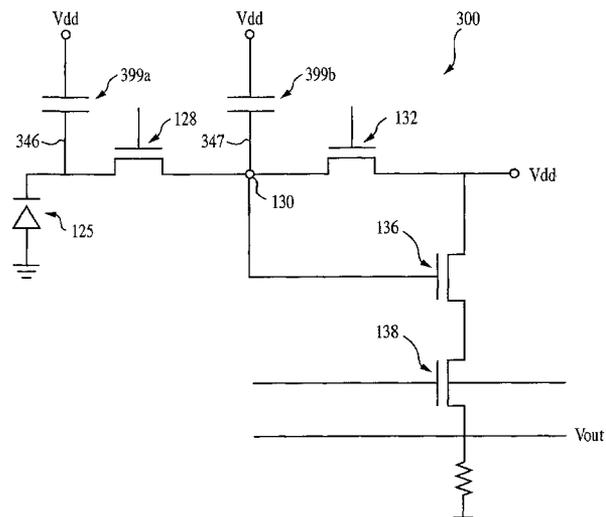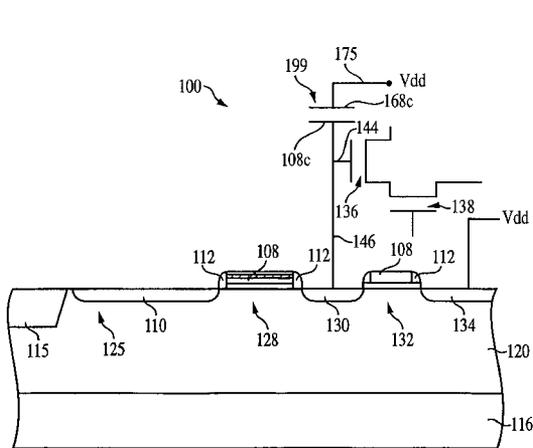

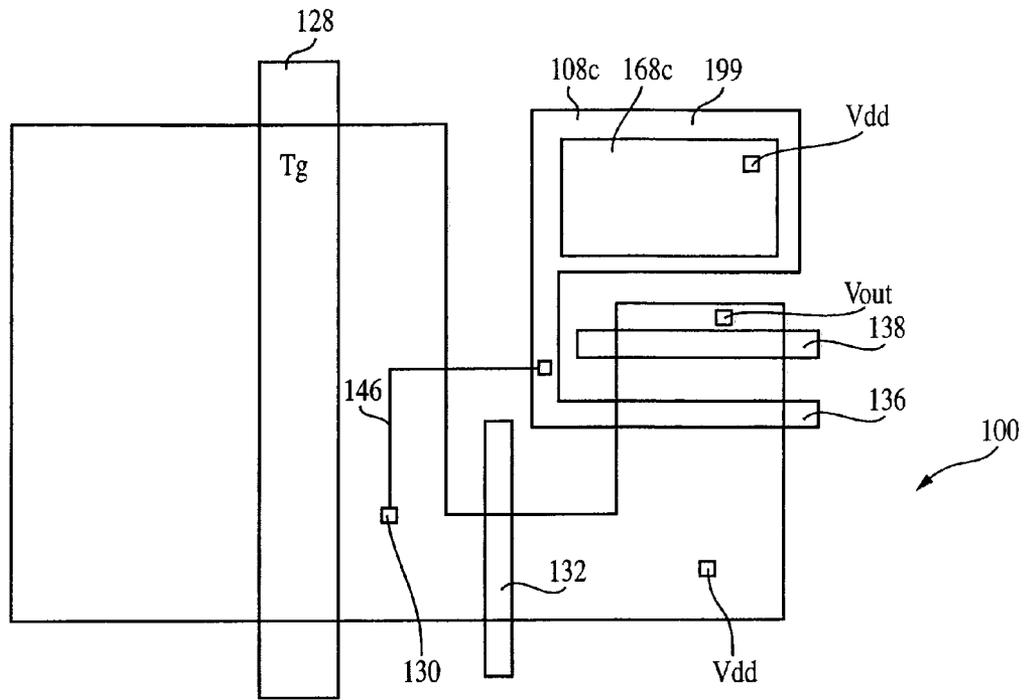


FIG. 3

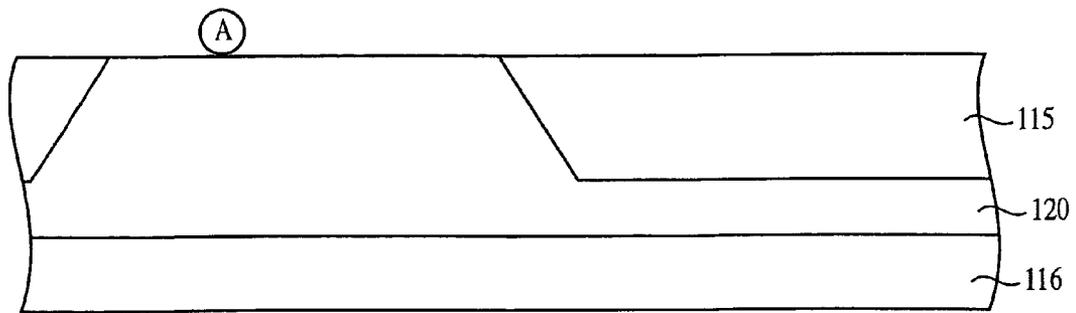


FIG. 4

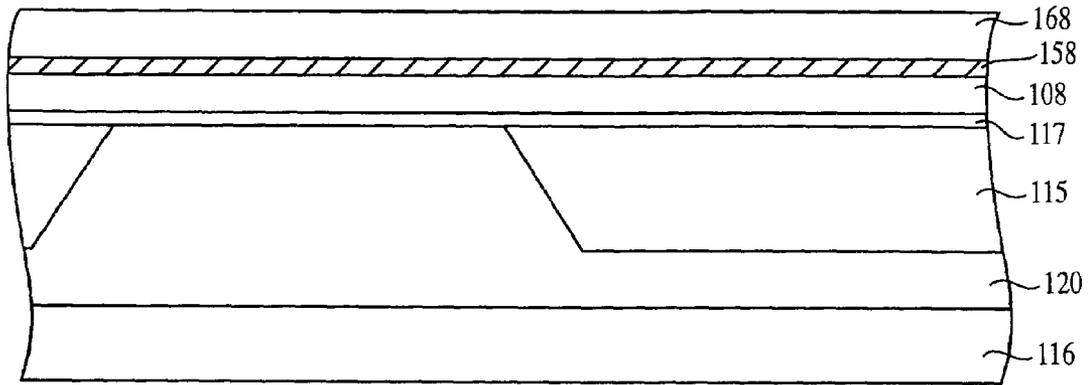


FIG. 5

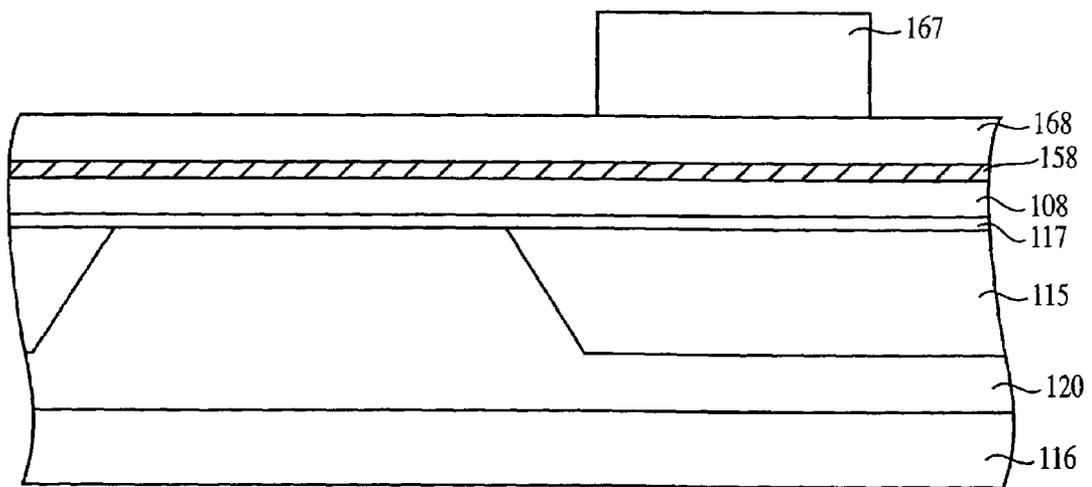


FIG. 6

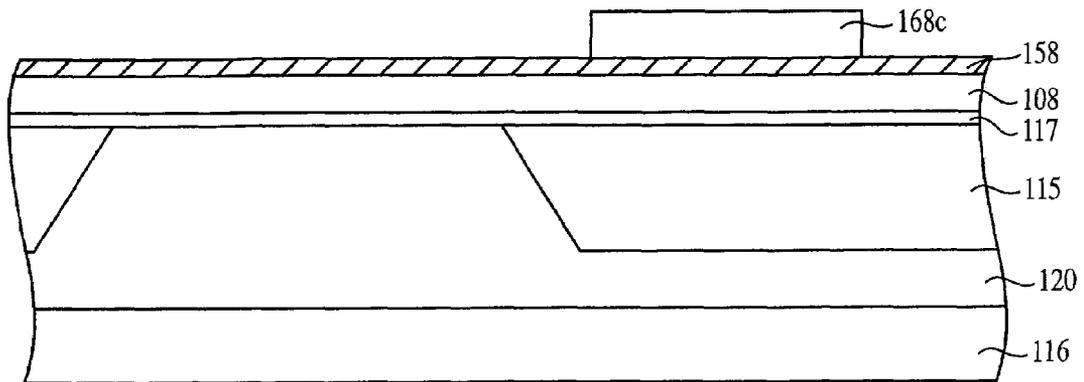


FIG. 7

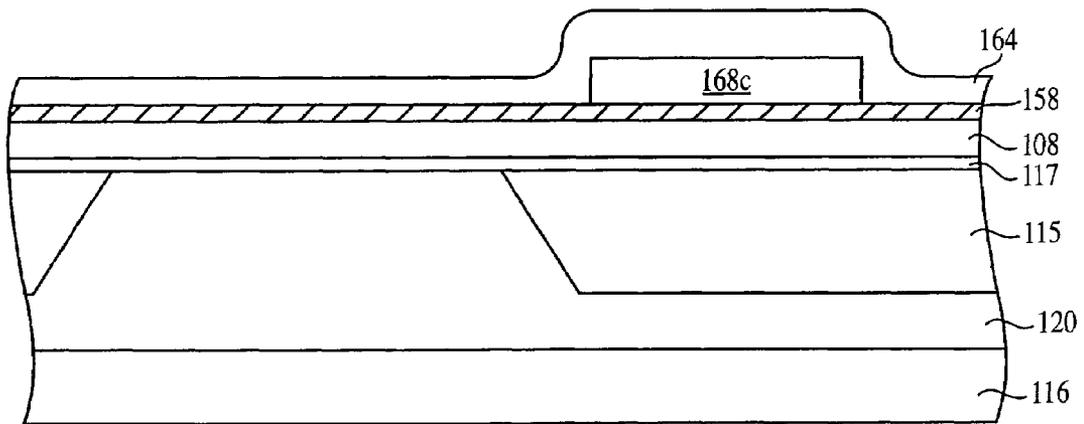


FIG. 8

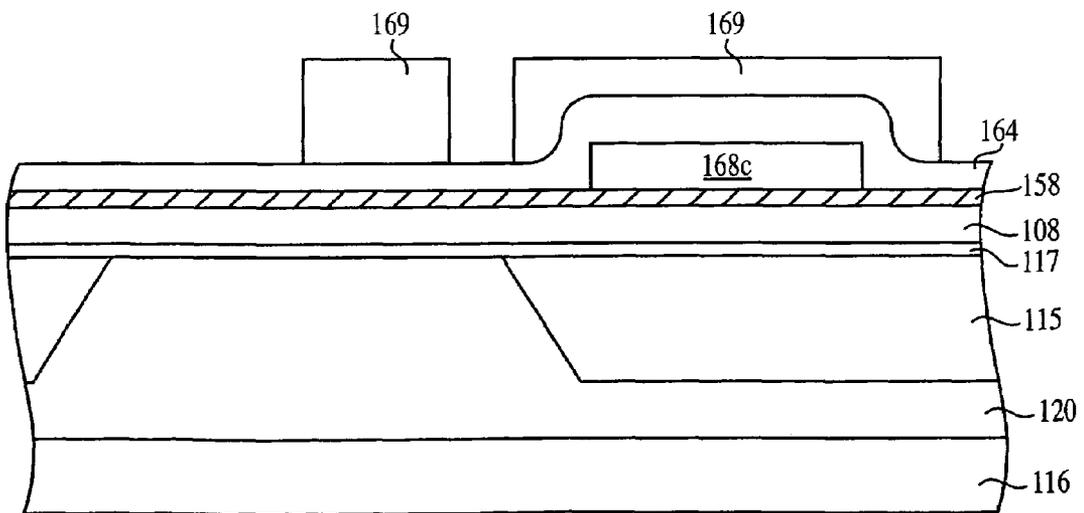


FIG. 9

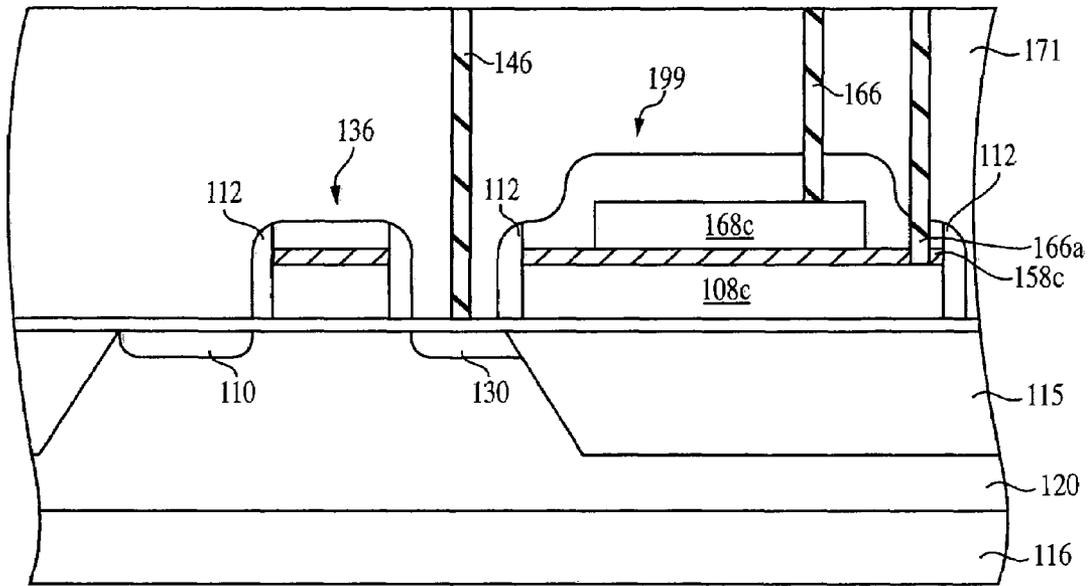


FIG. 10

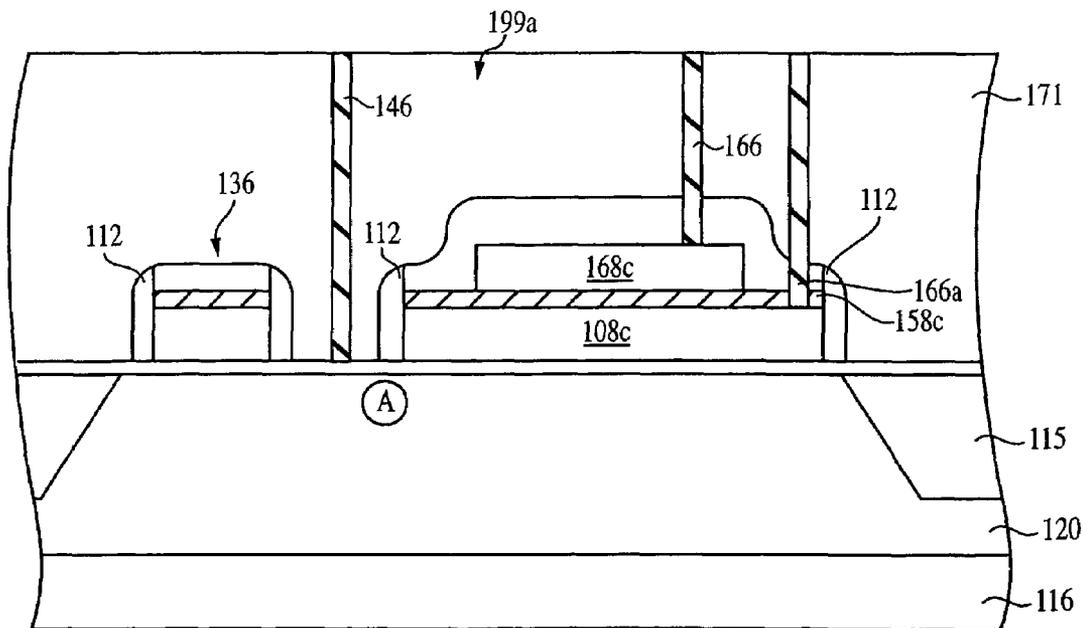


FIG. 11

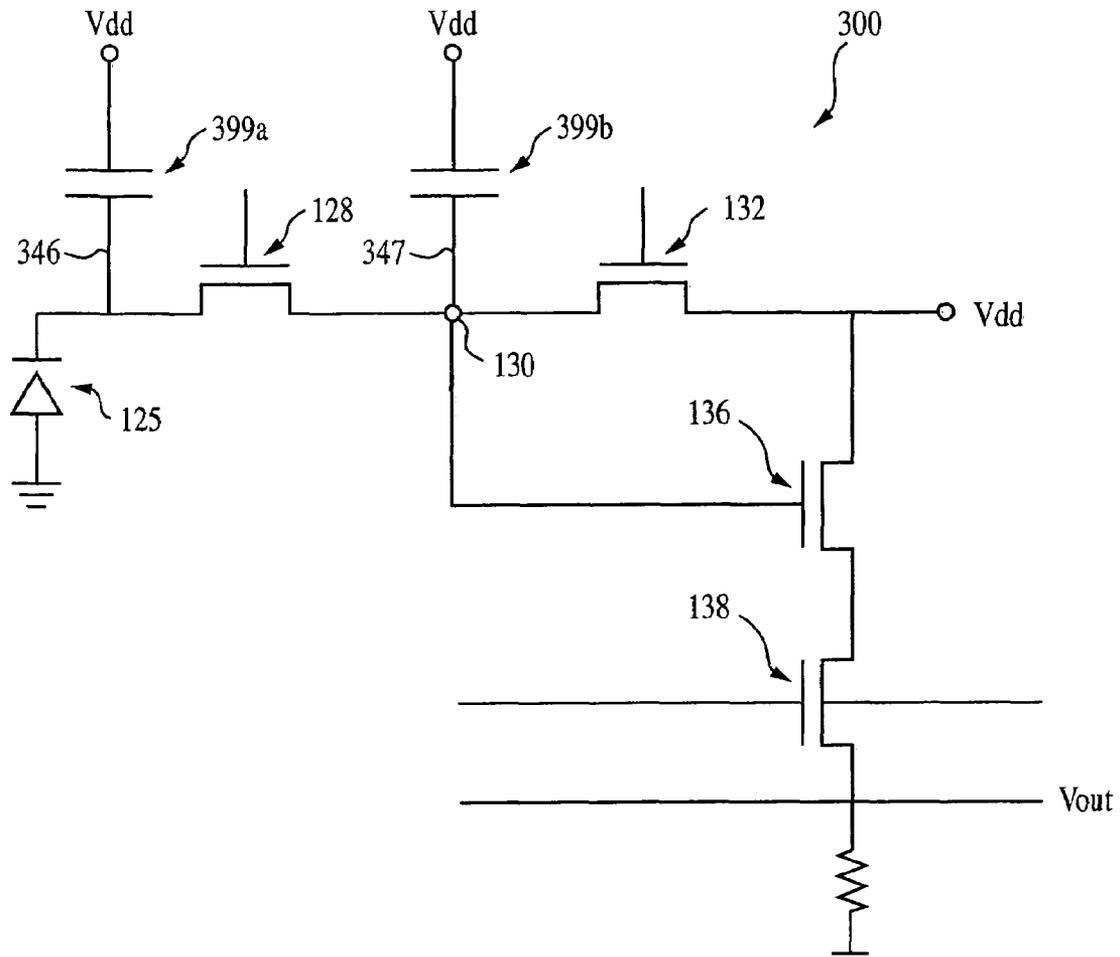


FIG. 14

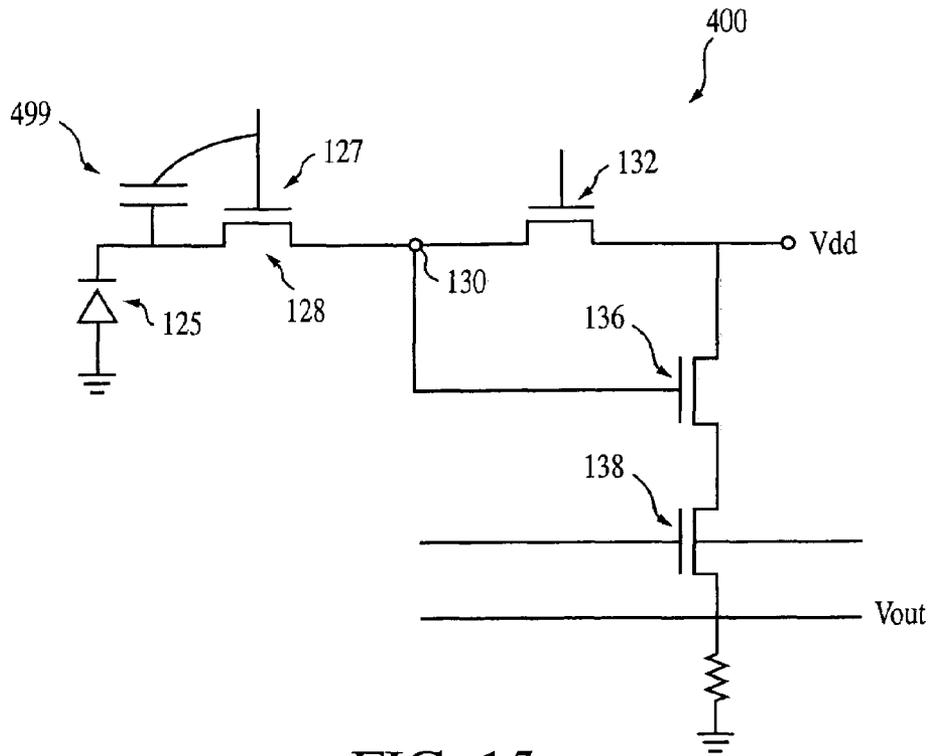


FIG. 15

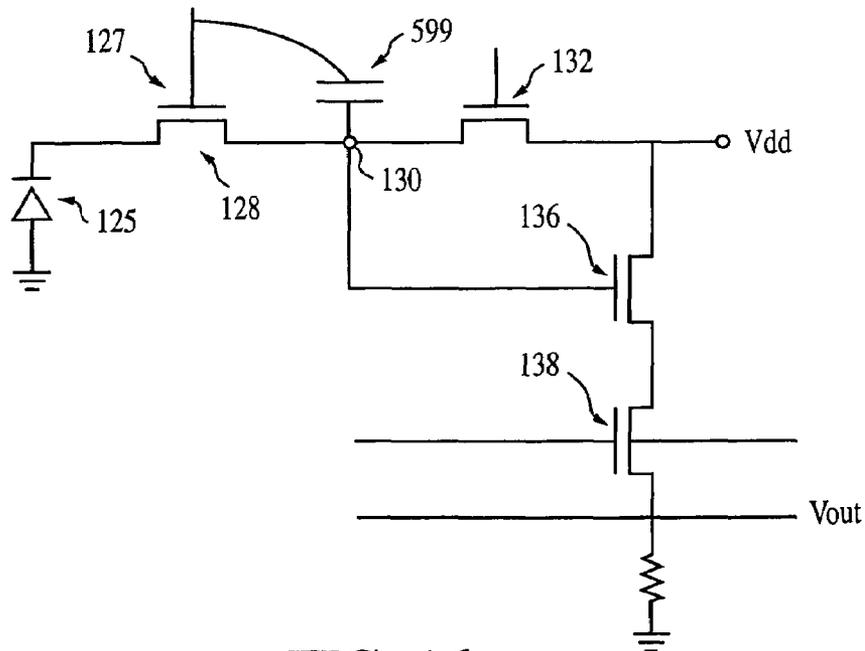


FIG. 16

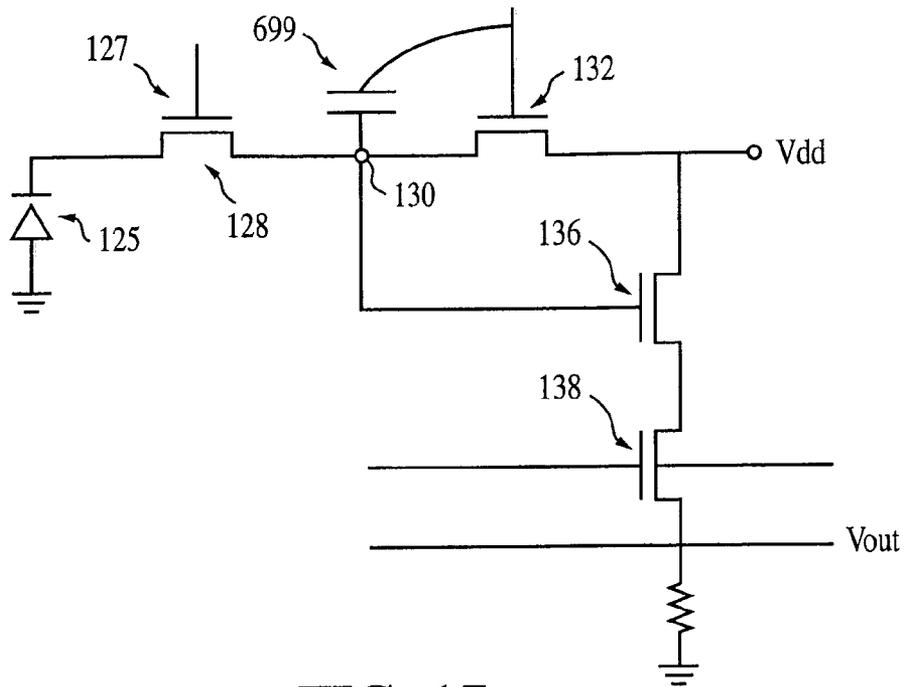


FIG. 17

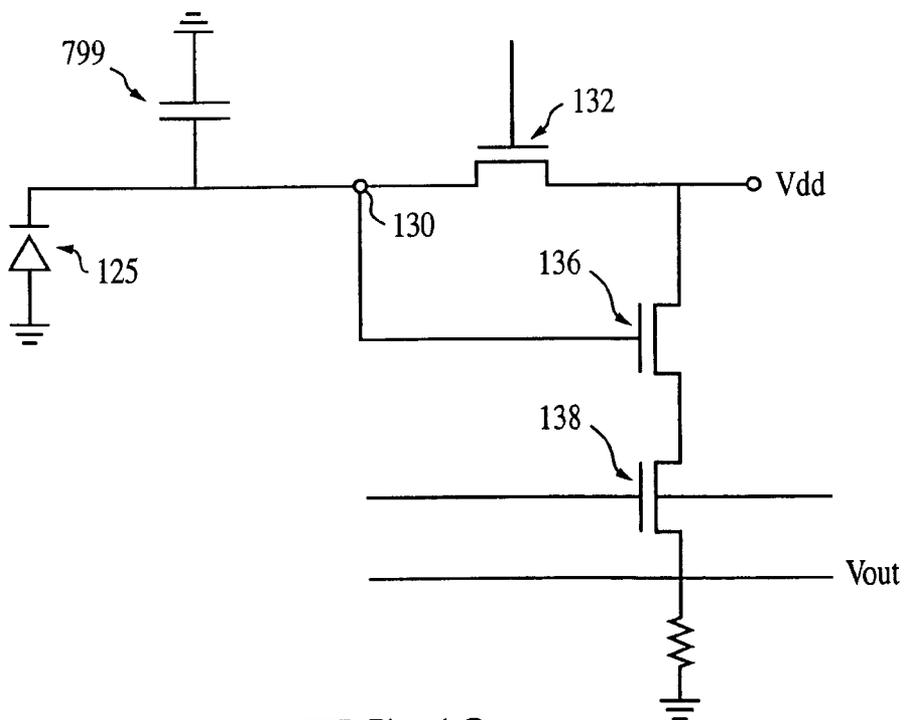


FIG. 18

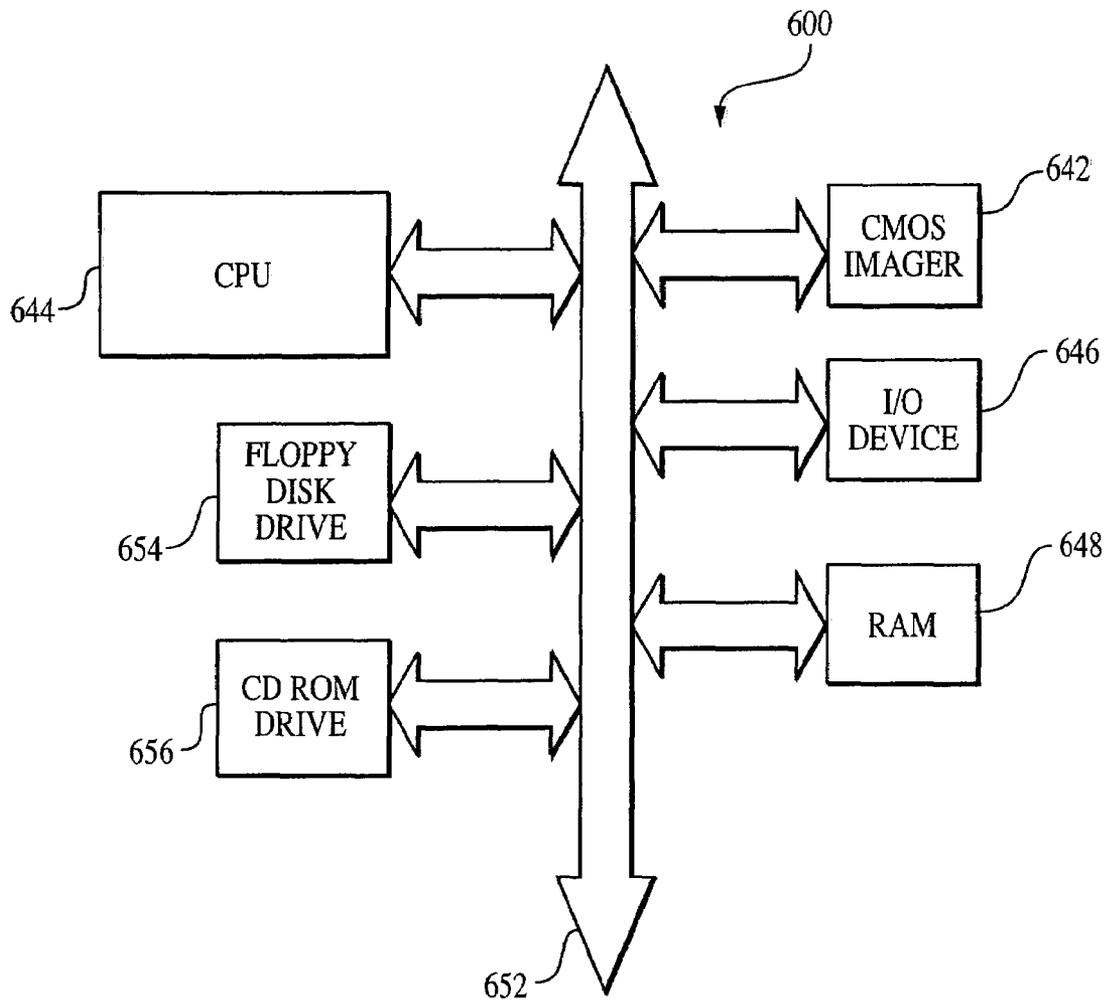


FIG. 19

CMOS IMAGER PIXEL DESIGNS**CROSS REFERENCE TO RELATED APPLICATIONS**

The present application is a divisional of U.S. application Ser. No. 11/165,490, filed Jun. 24, 2005 now U.S. Pat. No. 7,102,180, which in turn is a divisional of U.S. application Ser. No. 10/303,897, filed Nov. 26, 2002 (now U.S. Pat. No. 6,960,796, issued Nov. 1, 2005), the disclosures of which are herewith incorporated by reference in their entirety.

FIELD OF THE INVENTION

The present invention relates to improved semiconductor imaging devices and, in particular, to a CMOS imager employing a storage capacitor in the pixel sensor cell.

BACKGROUND OF THE INVENTION

CMOS imagers have been increasingly used as low cost imaging devices. A fully compatible CMOS sensor technology enabling a higher level of integration of an image array with associated processing circuits is beneficial in many digital imaging applications such as, for example, cameras, scanners, machine vision systems, vehicle navigation systems, video telephones, computer input devices, surveillance systems, auto focus systems and star trackers, among many others.

In a conventional CMOS imager, the active elements of a pixel cell perform the necessary functions of: (1) photon to charge conversion; (2) accumulation of image charge; (3) transfer of charge to a floating diffusion node accompanied by charge amplification; (4) resetting the floating diffusion node to a known state before the transfer of charge to it; (5) selection of a pixel for readout; and (6) output and amplification of a signal representing pixel charge. Photo charge may be amplified when it moves from the initial charge accumulation region to the floating diffusion node. The charge at the floating diffusion node is typically converted to a pixel output voltage by a source follower output transistor. The photosensitive element of a CMOS imager pixel is typically either a depleted p-n junction photodiode or a field induced depletion region beneath a photogate.

Exemplary CMOS imaging circuits as well as detailed descriptions of the functions of various CMOS elements of an imaging circuit are described, for example, in U.S. Pat. No. 6,204,524 to Rhodes, U.S. Pat. No. 6,310,366 to Rhodes et al. and U.S. Pat. No. 6,326,652 to Rhodes, the disclosure of which are incorporated by reference herein.

Since prior CMOS imagers suffer from poor signal to noise ratios and poor dynamic range as a result of the inability to fully collect and store the electric charge collected by the photosensitive area, storage capacitors have been proposed for use in connection with the light sensitive node of a CMOS pixel sensor cell to improve collected charge storage. For example, U.S. Pat. No. 6,204,524 to Rhodes describes in detail the formation of planar and trench storage capacitors electrically connected in parallel to the light sensitive node of a CMOS pixel sensor cell and formed partially over the field oxide region and partially over the active pixel region.

Applicants of the present invention have discovered that storage capacitors may also provide useful results when electrically connected to other light sensitive and/or electrical elements of the pixel sensor cell, such as transistor gates or floating diffusion regions, for example, to affect the operation and characteristics of such various light sensitive and/or elec-

trical elements. Capacitors connected to such various light sensitive and/or electrical elements of the pixel sensor cell help amplify the signal of an imager transistor, increase the storage capacitance of a photosite, or provide a low noise decoupling capacitor. Such capacitors may be formed entirely over the active area of the pixel sensor cell, or entirely over the field oxide area, or over both the active area and the field oxide area.

SUMMARY OF THE INVENTION

The present invention provides CMOS imagers having storage capacitors electrically connected to various light sensitive and/or electrical elements of a pixel sensor cell of a CMOS imager, to affect the operation and characteristics of such various light sensitive and/or electrical elements, add charge storage capability to the pixel sensor cell, independently set charge amplification, and improve the lag and scalability of pixel cells.

According to one embodiment of the present invention, a charge storage capacitor is formed electrically connected to a floating diffusion region of a pixel sensor cell and to an AC ground. The charge storage capacitor may be formed entirely overlying the field oxide region isolating a pixel sensor cell, or entirely overlying the active area of the imager, or partially over the field oxide area and partially over the active area.

According to another embodiment of the present invention, a charge storage capacitor is formed electrically connected to and in parallel with a gate of a CMOS imager transistor, for example, a charge transfer transistor, to tailor the voltage pulses to the transfer gate and the charge transfer characteristics of the transistor. The charge storage capacitor may be formed entirely overlying the field oxide region, or entirely overlying the active area of the pixel sensor cell, or partially over the field oxide area and partially over the active area.

In yet another embodiment of the present invention, a plurality of storage capacitors are formed over a field oxide region isolating a pixel sensor cell, and further connected to various light sensitive or electrical elements of the imager, for example, one storage capacitor may be connected to a floating diffusion region and another storage capacitor may be connected to a charge collection region. Again, each of the charge storage capacitors may be formed entirely overlying the field oxide region, or entirely overlying the active area of a pixel sensor cell, or partially over the field oxide area and partially over the active area.

Other embodiments provide a capacitor at one or more other connection locations of a pixel sensor cell, which can be formed entirely over a field oxide area, entirely over an active pixel area, or over a portion of a field oxide area and an active pixel area.

Also provided are methods of forming the CMOS imagers containing charge storage capacitors formed entirely over a field oxide area, entirely over an active pixel area, or only over a portion of an active pixel area.

Additional advantages and features of the present invention will be apparent from the following detailed description and drawings which illustrate preferred embodiments of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a pixel sensor cell fabricated in accordance with a first embodiment of the present invention.

FIG. 2 is another part schematic part cross-sectional substrate view of the pixel sensor cell of FIG. 1.

FIG. 3 is a top planar view of the pixel sensor cell of FIG. 1.

FIG. 4 illustrates a cross-sectional view of a pixel sensor cell of according to an embodiment of the present invention and at an initial stage of processing.

FIG. 5 illustrates a cross-sectional view of the pixel sensor cell of FIG. 4 at a stage of processing subsequent to that shown in FIG. 4.

FIG. 6 illustrates a cross-sectional view of the pixel sensor cell of FIG. 4 at a stage of processing subsequent to that shown in FIG. 5.

FIG. 7 illustrates a cross-sectional view of the pixel sensor cell of FIG. 4 at a stage of processing subsequent to that shown in FIG. 6.

FIG. 8 illustrates a cross-sectional view of the pixel sensor cell of FIG. 4 at a stage of processing subsequent to that shown in FIG. 7.

FIG. 9 illustrates a cross-sectional view of the pixel sensor cell of FIG. 4 at a stage of processing subsequent to that shown in FIG. 8.

FIG. 10 illustrates a cross-sectional view of the pixel sensor cell of FIG. 4 at a stage of processing subsequent to that shown in FIG. 9.

FIG. 11 illustrates a cross-sectional view of a pixel sensor cell fabricated according to another embodiment of the present invention.

FIG. 12 is a schematic diagram of a pixel sensor cell fabricated in accordance with a second embodiment of the present invention.

FIG. 13 is a top planar view of the pixel sensor cell of FIG. 12.

FIG. 14 is a schematic diagram of a pixel sensor cell fabricated in accordance with a third embodiment of the present invention.

FIG. 15 is a schematic diagram of a pixel sensor cell fabricated in accordance with a fourth embodiment of the present invention.

FIG. 16 is a schematic diagram of a pixel sensor cell fabricated in accordance with a fifth embodiment of the present invention.

FIG. 17 is a schematic diagram of a pixel sensor cell fabricated in accordance with a sixth embodiment of the present invention.

FIG. 18 is a schematic diagram of a pixel sensor cell fabricated in accordance with a seventh embodiment of the present invention.

FIG. 19 is an illustration of a processing system utilizing the pixel sensor cells of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

In the following detailed description, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration specific embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized, and that structural, logical and electrical changes may be made without departing from the spirit and scope of the present invention.

The terms “wafer” and “substrate” are to be understood as a semiconductor-based material including silicon-on-insulator (SOI) or silicon-on-sapphire (SOS) technology, doped and undoped semiconductors, epitaxial layers of silicon supported by a base semiconductor foundation, and other semiconductor structures. Furthermore, when reference is made to a “wafer” or “substrate” in the following description, previ-

ous process steps may have been utilized to form regions or junctions in the base semiconductor structure or foundation. In addition, the semiconductor need not be silicon-based, but could be based on silicon-germanium, germanium, or gallium arsenide.

The term “pixel” refers to a picture element unit cell containing a photosensor and transistors for converting light radiation to an electrical signal. For purposes of illustration, a representative pixel is illustrated in the figures and description herein and, typically, fabrication of all pixels in an imager will proceed simultaneously in a similar fashion.

Referring now to the drawings, where like elements are designated by like reference numerals, FIGS. 1-10 illustrate a first exemplary embodiment of the invention. A pixel sensor cell 100 (FIGS. 1-3 and 10) is illustrated having a storage capacitor 199 (FIGS. 1-3 and 10) overlying field oxide region 115 and electrically connected to a floating diffusion region 130 and to AC ground. As explained in more detail below, the storage capacitor 199 is formed so that it does not block any light sensitive areas of the imager. In addition and as illustrated in FIG. 3, for example, the storage capacitor 199 is formed overlying the field oxide region 115 entirely, without blocking the floating diffusion region 130. However, the storage capacitor 199 may be also formed entirely over the active area, or only partially over the field oxide area and partially over the active area, as desired.

It should be noted that, although the invention will be described below in connection with use in a four-transistor (4T) pixel cell, the invention also has applicability to all CMOS imagers including but not limited to a three-transistor (3T) cell, which differs from the 4T cell in the omission of a charge transfer transistor described below. Accordingly, an embodiment showing use of the invention in a 3T pixel cell is also discussed below.

FIGS. 1 and 2 are schematic illustrations of the pixel sensor cell 100 showing a four-transistor (4T) cell with the storage capacitor 199 electrically connected in parallel with floating diffusion region 130. For a better understanding of the present invention, FIG. 3 illustrates a top view of the pixel sensor cell 100 of FIGS. 9 and 6, depicting the storage capacitor 199 electrically connected to the floating diffusion region 130. The four transistors illustrated in FIGS. 1-3 can be identified by their gates, that is transfer transistor gate 128, reset transistor gate 132, source follower transistor gate 136 and row select transistor gate 138. This way, the storage capacitor 199 stores charge on the floating diffusion 130 and contributes to setting the charge to voltage amplification of the sensor.

FIG. 2 is a more detailed illustration of the transfer transistor having gate 128 and of the reset transistor having gate 132 of FIG. 1 as well as of photodiode 125 electrically connected to gate 128 of the transfer transistor. As shown in FIG. 2, the pixel sensor cell 100 of the first embodiment is formed in a substrate 116 having a doped layer 120 of a first conductivity type, which for exemplary purposes is treated as a p-type substrate. A field oxide region 115, which serves to surround and isolate the pixel sensor cell 100, may be formed before the formation of the storage capacitor 199. The field oxide region 115 is formed by any known technique such as thermal oxidation of the underlying silicon in a LOCOS process, or by etching trenches and filling them with oxide in an STI process.

The doped layer 120 of FIG. 2 is provided with three doped regions 110, 130 and 134, which are doped to a second conductivity type, which for exemplary purposes is treated as n-type. The first doped region 110 is the doped region that forms the photodiode 125. The second doped region 130 is the floating diffusion region, sometimes also referred to as a

floating diffusion node. The third doped region **134** is the drain of the reset transistor **131** and is also connected to voltage source V_{dd} .

The floating diffusion region **130** is connected to the source follower transistor **136** by a contact line **144** (FIG. 2) which is typically a metal contact line. The floating diffusion region **130** is also connected to bottom electrode **108c** of the storage capacitor **199** by contact line **146** (FIG. 2), which, as described below, is preferably a metal contact line. In the preferred embodiment, the material forming the source follower gate **136**, typically formed of poly, poly/WSix, poly-TiSi₂ or poly/WNx/W, acts as the source follower gate when over active area. When the material forming the source follower gate **136** extends over the field oxide area, it acts as the bottom electrode **108c**. Dielectric **158c**, which is typically formed of an oxide such as SiO₂, Al₂O₃ or Ta₂O₅, a nitride, or an oxide/nitride combination, overlies the bottom electrode **108c**. As described in detail below, top capacitor electrode **168c** overlies the dielectric **158c** and is connected through a contact and a metal line **175** to AC ground, which can be a DC ground or a DC supply voltage, V_{dd} .

The source follower transistor **136** outputs a signal proportional to the charge accumulated in the floating diffusion region **130** to a readout circuit **60** when the row select transistor **138** is turned on. While the source follower transistor **136** and row select transistor **138** are illustrated in FIG. 2 in circuit form above substrate **120**, it should be understood that these transistors are typically formed in substrate **120** in a similar fashion to transistors **128** and **132**, as shown in FIG. 3.

The storage capacitor **199** of the pixel sensor cell **100** of FIGS. 1-3 is fabricated by a process described as follows and illustrated in FIGS. 4-10. Referring now to FIG. 4, a substrate **116**, which may be any of the types of substrates described above, is doped to form a doped substrate layer **120** of a first conductivity type, which for exemplary purposes will be described as p-type. Any suitable doping process may be used, such as ion implantation. Further, the invention has equal application to other semiconductor substrates, for example, silicon-germanium, germanium, silicon-on-insulator, silicon-on-sapphire, or gallium-arsenide substrates, among others. Also illustrated in FIG. 4 is field oxide region **115**, which surrounds and isolates active area A (FIG. 4) of the later formed pixel sensor cell **100**. The field oxide region **115** may be formed by well-known LOCOS or STI processes.

Referring now to FIG. 5, an insulating layer **117** is formed over the substrate **116** and the field oxide region **115** by thermal growth or chemical vapor deposition, or other suitable means. The insulating layer **117** may be formed of silicon dioxide, silicon nitride, or other suitable insulating material, and to a thickness of approximately 2 to 100 nm. As shown in FIG. 5, the insulating layer **117** completely covers the substrate **116**.

Subsequent to the formation of the insulating layer **117**, a first conductive layer **108**, a dielectric layer **158** and a second conductive layer **168** are sequentially formed over the insulating layer **117**, as also illustrated in FIG. 5. The first conductive layer **108**, which will simultaneously form a first or bottom electrode **108c** of the storage capacitor **199** and a gate of the source follower transistor **136**, may be formed of any conductive material. Non-limiting examples of materials that may be used to form the first conductive layer **108** are doped polycrystalline silicon (referred to herein as polysilicon or poly), poly/WSix, polyTiSi₂, poly/WNx/W, among others. The first conductive layer may be also formed of doped polycrystalline silicon in combination with tungsten nitride (WNx) or tungsten silicon (WSix), or a combination of tungsten nitride and tungsten in addition to polysilicon. The first

conductive layer **108** may be formed over the insulating layer **117** by CVD, LPCVD, PECVD, MOCVD, sputtering (PVD) or other suitable deposition techniques.

The dielectric layer **158** (FIG. 5) may be formed over the first conductive layer **108** by various known methods, such as chemical vapor deposition (CVD), rapid thermal nitridation (RTN) processing, or the like. The term "dielectric" or "insulator" as used in this application shall be understood to mean any solid material that can sustain an electrical field for use in the capacitor of an integrated circuit device containing a capacitor. The dielectric layer **158** may be formed of any insulating material, for example, oxides such as silicon oxide or TEOS, nitrides such as silicon nitride, ONO, NO (nitride oxide) or ON (oxide nitride), high-k dielectrics such as Ta₂O₅, Al₂O₃ or BST, ferroelectrics, or the like. The preferred dielectric layer is a nitride layer which can be formed by a CVD method.

The second conductive layer **168**, which will form a second electrode **168c** of the storage capacitor **199**, is patterned and formed over the dielectric layer **158**. In addition, the second conductive layer **168** may be formed of the same or different conductive materials from those used for the first conductive layer **108**. Non-limiting examples of materials that may be used to form the second conductive layer **168** are doped polycrystalline silicon (referred to herein as polysilicon or poly), platinum, tungsten, TiN, refractory metals, RuO₂, Ir, IrO₂, Rh, RhO_x, and alloys, such as Pt—Ru or Pt—Rh. The second conductive layer **168** may be also formed of poly/WSix, poly/WNx/W or polyTiSi₂. The second conductive layer **168** may be formed over the dielectric layer **158** by CVD, LPCVD, PECVD, MOCVD, sputtering (PVD) or other suitable deposition techniques. Preferably, both the first and second conductive layers are formed of doped polysilicon with a nitride dielectric layer **158** formed between the two conductive layers **108**, **168**.

Next, the structure of FIG. 5 is patterned using a first photoresist layer **167** (FIG. 6) formed over the second conductive layer **168** to a thickness of about 1,000 Angstroms to about 20,000 Angstroms. The first photoresist layer **167** (FIG. 6) is patterned with a mask (not shown) and the second conductive layer **168** is etched to obtain a second capacitor electrode **168c** formed over the field oxide region **115**, as illustrated in FIG. 7. Subsequent to the formation of the second capacitor electrode **168c**, the first photoresist layer **167** is removed by conventional techniques, such as oxygen plasma

An insulating layer **164** is then deposited over the second capacitor electrode **168c** and the dielectric layer **158**, as shown in FIG. 8. The insulating layer **164** may be any insulating material, such as silicon oxide, silicon dioxide, silicon nitride, USG, BPSG, PSG or BSG, or the like.

Referring now to FIG. 9, a second photoresist layer **169** is formed over the insulating layer **164** to a thickness of about 1,000 Angstroms to about 20,000 Angstroms. The second photoresist layer **169** (FIG. 9) is patterned with a mask (not shown) and the insulating layer **164**, the dielectric layer **158** and the first conductive layer **108** are etched through the patterned photoresist to simultaneously obtain source follower gate stack **136** and completed storage capacitor **199**, as shown in FIG. 10. The gate stack **136** is located over the active area of the pixel cell and the storage capacitor **199** is located over the field oxide region **115**. The gate stack **128** comprises conductive layer **108g** formed preferably of polysilicon, gate dielectric layer **158g** and insulating layer **164**. The storage capacitor **199** (FIG. 10) comprises first capacitor electrode **108c**, dielectric **158c** and the second capacitor electrode **168c**. Spacers **112** are then formed on the sides of source

follower gate stack **136** and of the capacitor **199**. Ion implantations are conducted to set transistor voltages, create conductive diffusions and implant the photodiode. Insulating oxide **171** (FIG. **10**) is then deposited and planarized.

Holes are then etched and contacts **146**, **166** and **166a** (FIG. **10**) are formed through the planarized insulating oxide **171**. Contacts **146**, **166** and **166a** are formed by applying a photoresist and a mask (not shown) over the planarized oxide layer **171** so that photolithographic techniques could define the areas to be etched out to form the holes for the contacts **146**, **166**, **166a** to the desired electrical circuit. This etching may be done at the same time as the etching for the contact holes for the photogate and reset gate, as described below. The contacts **146**, **166**, **166a** may be filled by depositing therein a conductive material, such as doped polysilicon, or a metal such as titanium/titanium nitride/tungsten or TiSi₂/TiN/W. As set forth above, the storage capacitor **199** may be formed over any field oxide region of the pixel cell **100**.

After the patterning of the storage capacitor **199** and of the gate stack **136** of the source follower transistor, gate stack **132** (FIG. **2**) of the reset transistor and gate stack **138** of the row select transistor are now formed. Although, for simplicity, the above embodiment has been described with reference to the formation of the gate stack **136** and the formation of the storage capacitor **199**, the invention is not limited to this embodiment. Accordingly, the present invention also contemplates the formation of the storage capacitor **199**, and all transistor gates **128**, **132**, **136** and **138** in the array and all necessary elements in the periphery support circuits.

The processing steps for the fabrication of the reset transistor gate **132**, transfer transistor gate **128** and photodiode **125** will not be described in detail below, as they are known in the art. Insulating sidewall spacers **112** (FIG. **2**) are also formed on the sides of all gate stacks **128**, **132**, **136**, **138** and the capacitor stack **199**. These sidewalls may be formed of, for example, silicon dioxide, silicon nitride, or ONO. While these gate stacks may be formed before or after the process of the photodiode **125**, for exemplary purposes and for convenience the photodiode formation has been described as occurring after transistor gate stack formation.

After the formation of the insulating sidewall spacers **112**, doped regions **110**, **130** and **134** are then formed in the doped layer **120**. Any suitable doping process may be used, such as ion implantation. A resist and mask (not shown) are used to shield areas of the layer **120** that are not to be doped. Three doped regions are formed in this step: doped region **110** which serves as the photodiode area; doped region **130** which is floating diffusion region **130** (which connects to the storage capacitor **199** by contact **146** and to the source follower transistor **136** by metal **144** as shown in FIGS. **1-2**); and doped region **134** which is a drain region.

As noted earlier, the doped regions **110**, **130** and **134** are doped to a second conductivity type, which for exemplary purposes will be considered to be n-type. Several masks may be used to implant the regions **110**, **130** and **134** to the same or different doping concentrations. Preferably, the doped regions **110**, **130** and **134** are heavily n-doped with arsenic, antimony or phosphorous at a dopant concentration level of from about 1×10^{15} ions/cm² to about 1×10^{16} ions/cm². Preferably, the doped region **110** is a lightly n-type doped region of phosphorous at a dopant concentration of 1×10^{12} ions/cm² to about 1×10^{14} ions/cm².

The photosensor cell **100** is essentially complete at this stage, and conventional processing methods may now be used to form wiring to connect gate lines and other connections in the pixel cell. Accordingly, the entire surface of the substrate **116** is metallized to provide contacts to the floating diffusion,

reset gate, transfer gate, Vdd and capacitor. Conventional multiple layers of conductors and insulators may also be used to interconnect the photosensor cell structures.

It should be understood that fabrication of the FIG. **1** structure is not limited to the methods described with reference to the attached figures. For example, the doped regions **110**, **130** and **134** may be formed in the doped layer **120** before the gates **128** and **132** are formed over the substrate. Additionally, the gates **128**, **132**, **136** and **138** may be formed before the storage capacitor **199**.

In addition, although the above embodiment was described with reference to the formation of the reset transistor **132**, transfer gate transistor **128**, and row select transistor **138** subsequent to the formation of the storage capacitor **199**, it must be understood that the invention also contemplates the formation of these transistors prior to the formation of the storage capacitor **199**.

Although the above embodiment was described with reference to the formation of the storage capacitor **199** entirely overlying the field oxide region **115**, the invention also contemplates the formation of a storage capacitor formed entirely overlying an active area of a pixel sensor cell. For example, FIG. **11** illustrates storage capacitor **199a** formed entirely over the active area A of the pixel sensor cell **100**.

The structure of a pixel cell **200** of a second embodiment of the present invention is illustrated with reference to FIGS. **12-13**. It should be understood that similar reference numbers correspond to similar elements as previously described with reference to FIGS. **1-11**. The structure of FIG. **12** differs from the above-described embodiment in that storage capacitor **299** is formed in contact with the photodiode region **125** or **110**, and not with the floating diffusion region **130**, as in the previous embodiment.

The processing of the second embodiment is similar to the processing described above with reference to FIGS. **4-11**, except that metal contact **246** (FIG. **13**) connects an electrode of the storage capacitor **299** to the photodiode region **110** and not to the floating diffusion region **130**, as in the above-described embodiment. Again, the storage capacitor **299** may be formed entirely or only partially over the field oxide region **115**, as well as entirely or only partially over the active area of the pixel sensor cell. If the storage capacitor **299** is formed entirely over the field oxide region **115**, the advantage is that the storage capacitor **299** improves the charge storage capacity of the imager without reducing the size of the photosensitive area.

FIG. **14** illustrates yet another embodiment of the present invention according to which two different storage capacitors are connected to two different elements of pixel sensor cell **300**. For example, FIG. **14** depicts storage capacitor **399a**, which is connected to the photodiode **125**, and storage capacitor **399b**, which is connected to the floating diffusion region **130**. Both storage capacitors **399a**, **399b** of pixel sensor cell **300** (FIG. **14**) may be formed totally overlying the field oxide region **115**, without reducing the photosensitive area of the pixel cell, or only partially over the field oxide region **115**. Storage capacitors **399a**, **399b** of pixel sensor cell **300** (FIG. **14**) may be also formed totally overlying the photosensitive area of the pixel cell, or only partially over the active area. The processing for the formation of the storage capacitors **399a**, **399b** of pixel sensor cell **300** of FIG. **14** are similar to the processing steps described above with reference to FIGS. **4-11**, except that two capacitors (and not one capacitor) are formed over the field oxide region. In addition, contact **346** (FIG. **14**) and contact **347** (FIG. **14**) connect each of the lower electrode of the storage capacitors **399a**, **399b** to the photodiode region **125** or **110** and to the floating diffusion region

130, respectively. Preferably, contacts 346, 347 are formed of a conductive material, such as doped polysilicon, or a metal such as titanium/titanium nitride/tungsten. Photolithographic techniques are used to define the areas to be etched out to form the holes for the contacts 346, 347 wherein the conductive material is subsequently depositing therein.

Although FIG. 14 illustrates only two storage capacitors 399a, 399b, it must be understood that the present invention is not limited to this embodiment. Accordingly, the invention contemplates the formation of a plurality of such storage capacitors which are formed entirely or only partially over the field oxide region, and which are further connected to various light sensitive and/or electrical elements of the pixel sensor cell.

FIGS. 15-17 illustrate additional embodiments of the present invention, according to which a storage capacitor is connected not to an AC ground source, as in the previous embodiments, but rather to a gate of one of the four transistors of the 4T cell. For example, FIG. 15 illustrates storage capacitor 499 of a pixel sensor cell 400 formed entirely or partially over the field oxide region 115, and connected to both the photodiode 125 and to the gate stack 127 of the transfer transistor 128. In another exemplary embodiment, FIG. 16 depicts storage capacitor 599 formed over the field oxide region 115 and also connected to both the floating diffusion region 130 and to the gate stack 127 of the transfer transistor 128. According to yet another exemplary embodiment, storage capacitor 699 of FIG. 17 is formed over the field oxide region 115 and is further connected to both the floating diffusion region 130 and to a gate of the reset transistor 132.

In each of the embodiments depicted in FIGS. 15-17, the processing steps for the fabrication of the storage capacitors 499, 599 and 699 are similar to the processing steps described above with reference to FIGS. 4-11, except that the upper electrode of each of the storage capacitors 499, 599 and 699 is connected not to a ground potential, as in the first embodiment, but rather to another element of the CMOS imager, for example, a gate of one of the four transistors of the pixel sensor cell, as described above.

FIG. 18 illustrates yet another embodiment of the present invention, according to which a storage capacitor 799 is formed over the field oxide region 115 as part of a three-transistor (3T) cell and not a four-transistor (4T) cell, as previously described with reference to FIG. 12, for example. The only difference between the structure of FIG. 18 and that of FIG. 12 is that the structure of FIG. 12 contains an additional fourth transistor, that is transfer transistor 128. Thus, storage capacitor 799 of FIG. 18 may be also formed entirely or only partially over the field oxide region 115 and connected to the photodiode 125 and the floating diffusion region 130. The processing steps for the fabrication of the storage capacitor 799 are similar to the processing steps described above with reference to FIGS. 4-11, except that the storage capacitor 799 is formed by itself over the field oxide region, and not simultaneously with the source follower gate of the source follower transistor.

A typical processor based system, which includes a CMOS image sensor according to the invention is illustrated generally at 642 in FIG. 19. A processor based system is exemplary of a system having digital circuits which could include CMOS image sensors. Without being limiting, such a system could include a computer system, camera system, scanner, machine vision, vehicle navigation, video phone, surveillance system, auto focus system, star tracker system, motion detection system, image stabilization system and data compression system for high-definition television, all of which can utilize the present invention.

A processor based system, such as a computer system, for example generally comprises a central processing unit (CPU) 644, for example, a microprocessor, that communicates with an input/output (I/O) device 646 over a bus 652. The CMOS image sensor 642 also communicates with the system over bus 652. The computer system 600 also includes random access memory (RAM) 648, and, in the case of a computer system may include peripheral devices such as a floppy disk drive 654, and a compact disk (CD) ROM drive 656 or a flash memory card which also communicate with CPU 644 over the bus 652. It may also be desirable to integrate the processor 654, CMOS image sensor 642 and memory 648 on a single IC chip.

The above description and drawings are only to be considered illustrative of exemplary embodiments, which achieve the features and advantages of the invention. Modification and substitutions to specific process conditions and structures can be made without departing from the spirit and scope of the invention. Accordingly, the invention is not to be considered as being limited by the foregoing description and drawings, but is only limited by the scope of the appended claims.

It should be noted again that, although the invention has been described with specific reference to CMOS imaging circuits having a photodiode and a floating diffusion region, the invention has broader applicability and may be used in any CMOS imaging apparatus. The CMOS imaging sensor could have a photosensor consisting of a photodiode, a photogate, or a photoconductor to name just three possibilities. The CMOS imaging sensor may also include additional transistors and/or transistor elements, such as a global shutter transistor, for example. While the above-described embodiments illustrate a capacitor in a CMOS imager connecting (i) a diffusion region to an AC ground and (ii) a transistor gate to a diffusion region, the invention is not limited to the above-described embodiments. Accordingly, the present invention also contemplates a capacitor connecting the gates of two transistors, or a capacitor connecting a gate to a DC voltage, or a capacitor connecting a gate to an AC voltage, or a capacitor connecting a diffusion region to a DC voltage, or a capacitor connecting a diffusion region to an AC voltage, or a capacitor connecting two diffusion regions.

Also, although exemplary capacitor structures have been described and illustrated, many variations in capacitor structures could be made. Similarly, the processes described above are only exemplary of many that could be used to produce the invention. For example, although the invention has been described above with reference to the formation of planar capacitors, such as storage capacitor 199, for example, the invention has also application to other capacitor structures, for example, trench capacitors, stacked capacitors, metal capacitors, container capacitors, HSG capacitors, among others.

Accordingly, the above description and accompanying drawings are only illustrative of exemplary embodiments that can achieve the features and advantages of the present invention. It is not intended that the invention be limited to the embodiments shown and described in detail herein. The invention is limited only by the scope of the following claims.

The invention claimed is:

1. A photosensor for use in an imaging device, said photosensor comprising:

- a field oxide region formed in a substrate;
- a doped layer of a first conductivity type formed in said substrate and adjacent said field oxide region;
- a photodiode having a charge collection region formed in said doped layer;

11

- a first storage capacitor formed over said substrate, said first storage capacitor being electrically and directly connected to said photodiode by an electrical contact, said first storage capacitor being formed at least partially over at least one of said field oxide region and an active area of said photo sensor;
- a floating diffusion region for receiving charge from said charge collection region; and
- a second storage capacitor being electrically and directly connected to said floating diffusion region.
2. The photosensor according to claim 1, wherein said first and second capacitors are independently selected from the group consisting of a trench capacitor, a stacked capacitor, a metal capacitor, an HSG capacitor, a container capacitor and a flat plate capacitor.
3. The photosensor according to claim 1, wherein said first capacitor is a flat capacitor including a first electrode, a second electrode and a dielectric layer between said first and second electrodes.
4. The photosensor according to claim 1, wherein said second capacitor is a flat capacitor including a first electrode, a second electrode and a dielectric layer between said first and second electrodes.
5. The photo sensor according to claim 1, wherein said first conductivity type is p-type, and said second conductivity type is n-type.
6. The photosensor according to claim 1 further comprising a reset transistor.
7. The photosensor according to claim 6, wherein at least an electrode of said first and second storage capacitors is further connected to a gate of said reset transistor.
8. The photosensor according to claim 1 further comprising a source follower transistor for outputting charge accumu-

12

- lated in said floating diffusion region which has been transferred to said floating diffusion region, wherein the gate of said source follower transistor is formed adjacent said floating diffusion region.
9. The photo sensor according to claim 8, wherein at least an electrode of said first and second storage capacitors is further connected to the gate of said source follower transistor.
10. The photosensor according to claim 1 further comprising a row select transistor.
11. The photosensor according to claim 10, wherein at least an electrode of said first and second storage capacitors is further connected to a gate of said row select transistor.
12. The photosensor according to claim 1 further comprising a global shutter transistor.
13. The photosensor according to claim 12, wherein at least an electrode of said first and second storage capacitors is further connected to a gate of said global shutter transistor.
14. The photosensor according to claim 1, wherein at least an electrode of said first and second storage capacitors is further connected to said first doped region.
15. The photosensor according to claim 1, wherein at least an electrode of said first and second storage capacitors is further connected to said transferred charge region.
16. The photosensor according to claim 1, wherein said photosensor is used in a CMOS imager.
17. The photosensor according to claim 1, wherein said photosensor is a photogate.
18. The photosensor according to claim 1, wherein said photosensor is a photoconductor.
19. The photosensor according to claim 1, wherein said photosensor is a photodiode.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,525,134 B2
APPLICATION NO. : 11/488845
DATED : April 28, 2009
INVENTOR(S) : Rhodes et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:


In column 11, line 6, in Claim 1, delete "photo sensor;" and insert -- photosensor; --, therefor.

In column 11, line 24, in Claim 5, delete "photo sensor" and insert -- photosensor --, therefor.

In column 12, line 5, in Claim 9, delete "photo sensor" and insert -- photosensor --, therefor.

Signed and Sealed this

Fourteenth Day of July, 2009

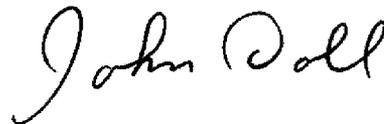

JOHN DOLL
Acting Director of the United States Patent and Trademark Office