




(86) Date de dépôt PCT/PCT Filing Date: 2009/10/19  
 (87) Date publication PCT/PCT Publication Date: 2010/04/29  
 (45) Date de délivrance/Issue Date: 2018/10/23  
 (85) Entrée phase nationale/National Entry: 2011/04/18  
 (86) N° demande PCT/PCT Application No.: KR 2009/006030  
 (87) N° publication PCT/PCT Publication No.: 2010/047507  
 (30) Priorité/Priority: 2008/10/20 (KR10-2008-0102770)

(51) Cl.Int./Int.Cl. *B64C 29/02* (2006.01)  
 (72) Inventeur/Inventor:  
 JUNG, SOO-CHEOL, KR  
 (73) Propriétaire/Owner:  
 JUNG, SOO-CHEOL, KR  
 (74) Agent: MCMILLAN LLP

(54) Titre : SYSTEME D'AERONEF PERMETTANT UNE NAVIGATION AU SOL  
 (54) Title: FLYING OBJECT SYSTEM PERFORMING GROUND TRAVELING

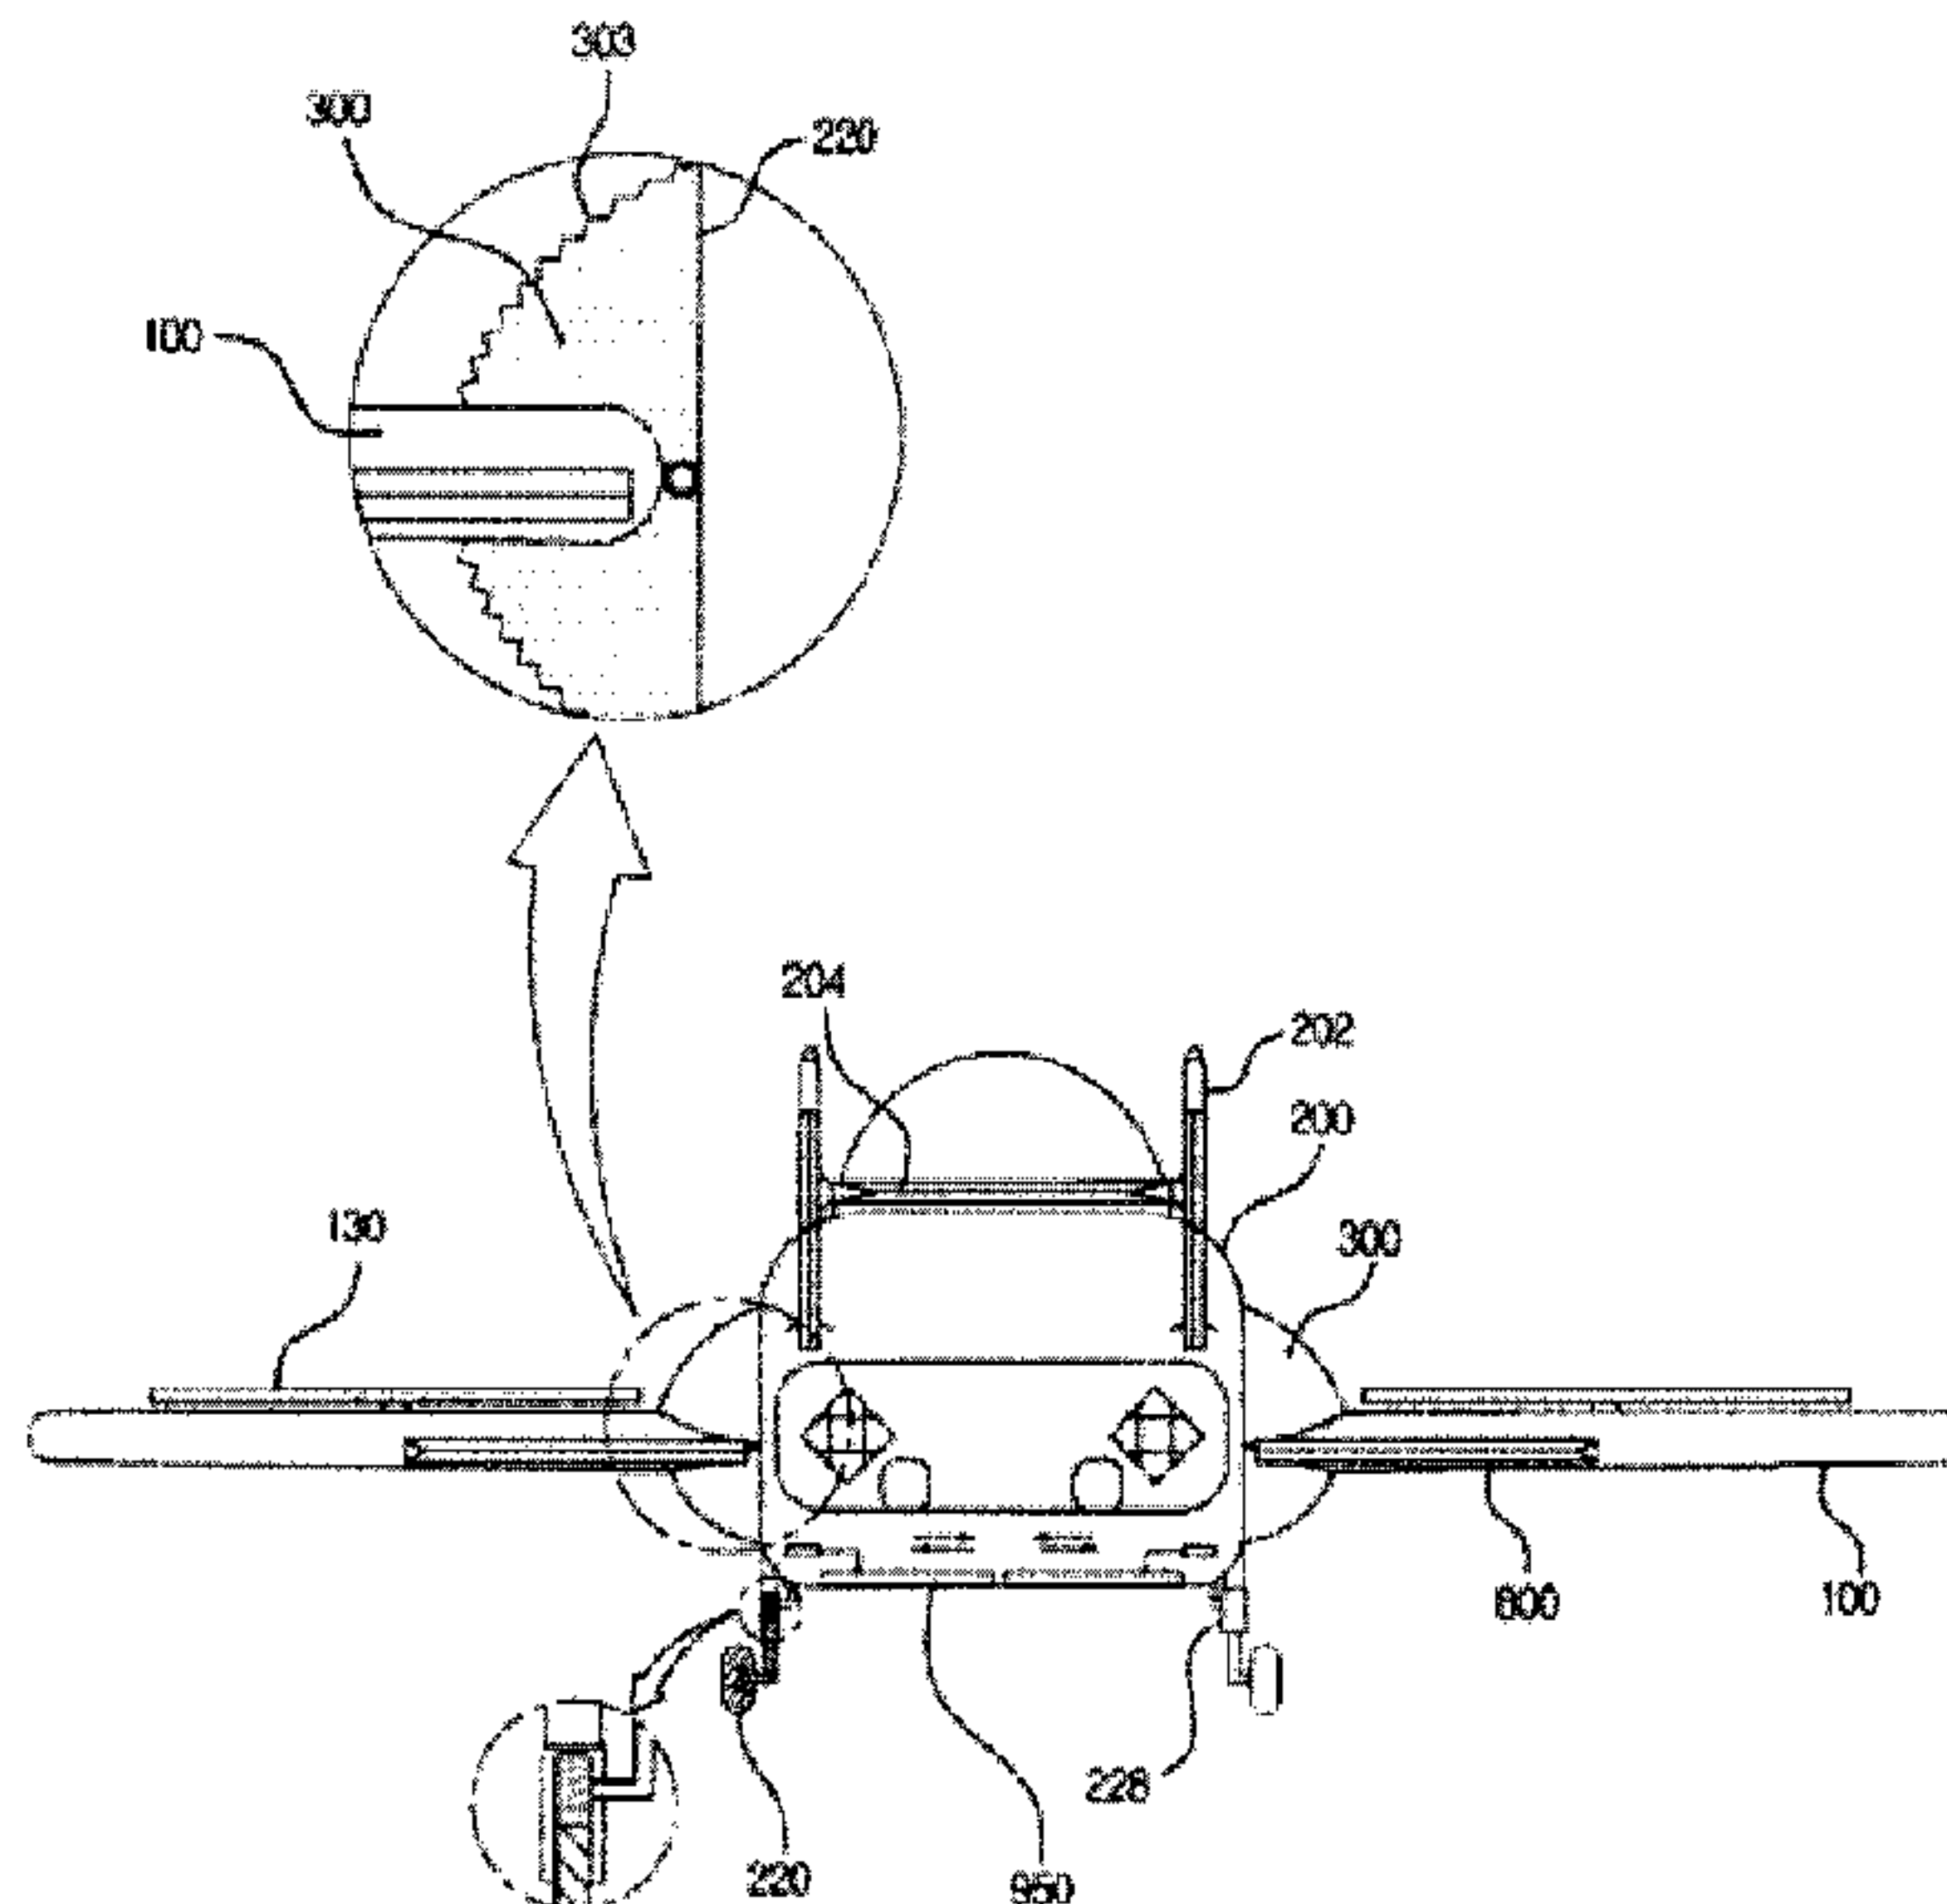

(57) **Abrégé/Abstract:**

Disclosed is a flying object system performing ground traveling, which travels on the ground and flies in the air. The flying object system travels with three or more wheels connected to a main body, generates flying force through wings symmetrically installed at both sides of the main body, and is provided with plural propellers, operated by a control lever and installed on the wings and at least a part of the main body, each of the wings being divided into a plurality of compartments to be folded or be changed in shape by pressure of gas or air. Therefore, the flying object system travels on a road on the ground and takes off and flies in the air in traffic congestion, and flies in the air and lands and travels on a road on the ground if necessary, thus rapidly moving to a destination without the effects of traffic congestion.

## ABSTRACT OF THE DISCLOSURE

Disclosed is a flying object system performing ground traveling, which travels on the ground and flies in the air. The flying object system travels with three or more wheels  
5 connected to a main body, generates flying force through wings symmetrically installed at both sides of the main body, and is provided with plural propellers, operated by a control lever and installed on the wings and at least a part of the main body, each of the wings being divided into a plurality of  
10 compartments to be folded or be changed in shape by pressure of gas or air. Therefore, the flying object system travels on a road on the ground and takes off and flies in the air in traffic congestion, and flies in the air and lands and travels on a road on the ground if necessary, thus rapidly moving to a  
15 destination without the effects of traffic congestion.

20

25

## FLYING OBJECT SYSTEM PERFORMING GROUND TRAVELING

## BACKGROUND OF THE INVENTION

## Field of the Invention

5           The present invention relates to a flying object system performing ground traveling, which takes off and lands during stoppage or movement, performs both traveling on the ground and flying in the air, has a light weight to minimize fuel consumption, is high in safety, and reaches a destination in  
10 the shortest time.

## Description of the Related Art

          Recently, a demand for vehicles, i.e. ground transportation, has been increased according to industrial  
15 development and income increase. On the contrary, since roads, on which vehicles can travel, are limited, serious traffic problems, such as traffic congestion, are on the rise.

          In order to solve the above traffic problems, various measures have been proposed. The expansion of roads is  
20 restricted within some degree from the structural point of view, and thus a rotation system of vehicles has been proposed. However, since a demand for vehicles has been rapidly increased due to the pursuit of an economically stabilized life, such an artificial measure is not a fundamental solution.

25           Therefore, other measures to solve the above-described

problems of ground transportation must be found from various angles. One of these measures is use of underground or air transportation.

5 However, the underground transportation (for example, a subway) requires an underground space for movement, and thus has various limits from the geological point of view as well as requires enormous construction expenses.

10 Further, the air transportation (for example, an airplane) requires a wide space for takeoff and landing and causes a difficulty in traveling on the ground due to short-distance movement, and thus is not a fundamental solution of the traffic problems.

15 Accordingly, in view of the problems of the above-described transportations, a transportation, which travels on a road on the ground and takes off and flies in the air in the event of traffic congestion, or flies in the air and lands and travels on a road on the ground if necessary, and thus rapidly moves to a destination without the effects of traffic congestion, has been required.

20 As one measure to prevent the above traffic congestion, the applicant of the present invention proposed an aircar, which performs both traveling on the ground and flying in the air, in Korean Patent Registration No. 150340. As shown in FIG. 1, the aircar includes both wing units 10, each of which has a  
25 propeller unit 12, which horizontally and vertically changes

direction thereof to allow the aircar to ascend, descend, and  
move forward and backward, a body 20, on which the wing units  
10 are horizontally and vertically foldably installed, provided  
with left and right driving wheels on the lower part thereof,  
5 and a tube unit 5, the inside of which is divided into a  
plurality of compartments 5b by a plurality of partitions 5a  
such that the tube unit 5 is expanded and contracted by  
supplying gas into the compartments 5b or discharging the gas  
from the compartments 5b, provided at the outside of the wing  
10 units 10 and the body 20 and made of silicon.

Further, a propeller 13 of the propeller unit 12, which  
is driven by a hydraulic motor M3, is journalled at each of the  
wing units 10 using a rotary shaft, and the angle of rotary  
blades 13a of the propeller 13 is adjusted to accelerate and  
15 decelerate the speed of the aircar during takeoff and landing,  
traveling, and flying. The aircar further includes a vertical  
stabilizer 6 provided with a rudder 6', and a horizontal  
stabilizer 7 provided with an elevator 7'.

However, in the aircar, which has the propellers 13 at  
20 both sides of the main body 20, when the main body 20 is not  
correctly balanced at the front and rear portions thereof in  
the event of landing, it is difficult to achieve stable takeoff  
and landing of the aircar, and when the propeller 13 provided  
with any one of the wing units 10 is out of order, it is  
25 difficult to achieve stable flight.

## SUMMARY OF THE INVENTION

Therefore, the present invention has been made in view of the above problems, and it is an object of the present invention to provide a flying object system performing ground traveling, which travels on a road on the ground and takes off and flies in the air in traffic congestion, and flies in the air and lands and travels on a road on the ground if necessary to rapidly move to a destination without the effects of traffic congestion, has a tube shape as a whole to alleviate impact in the event of a crash and thus be used stably, and properly varies the shape of wings and lift force generated from respective propellers according to usage conditions to improve flying performance.

In accordance with the present invention, the above and other objects can be accomplished by the provision of a flying object system performing ground traveling, which travels with three or more wheels connected to a lower surface of a main body, generates flying force through wings symmetrically installed at both sides of the main body, and is provided with a plurality of propellers, operated by a control lever and installed on the wings and at least a part of the main body, to generate lift force and propulsive force of the main body, each of the wings being divided into a plurality of compartments to be folded or be changed in shape by pressure

of air or gas.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and other  
5 advantages of the present invention will be more clearly  
understood from the following detailed description taken in  
conjunction with the accompanying drawings, in which:

FIG. 1 is a plan view illustrating a conventional flying  
object;

10 FIGS. 2, 3 and 4 are side, rear, and plan views  
illustrating a flying object system in accordance with one  
embodiment of the present invention;

FIG. 5 is a side view illustrating the flying object  
system in accordance with the embodiment of the present  
15 invention in a state in which wings are folded;

FIGS. 6a and 6b are side and rear views illustrating a  
flying object system in accordance with another embodiment of  
the present invention; and

FIG. 7 is a block diagram illustrating a control state  
20 of the flying object system in accordance with the present  
invention.

#### DETAILED DESCRIPTION OF THE INVENTION

Now, preferred embodiments of the present invention will  
25 be described in detail with reference to the annexed drawings.

As shown in FIGS. 2 to 7, in a flying object system of the present invention, more than three wheels 220 for ground traveling are provided on the lower surface of a main body 200, and a control block 228 is integrally provided on each of the wheels 220 such that the rotating directions of the wheels 220 are controlled and the heights of the wheels 220 are adjusted by fluid pressure or air pressure.

Here, a motor (not shown) is further connected to each of the wheels 220 such that the wheels 220 are rotated.

Further, the main body 200 may be made of a material, such as duralumin, like a general flying object, or the remaining parts of the main body 200 except for a control room 209 forming frames of the main body 200 may be made of a tube body including a plurality of compartments, which are divided from each other by partitions, as described below.

The compartments are installed such that air is simultaneously or selectively supplied to and discharged from the compartments through a pump 205.

The tube body is obtained by coating a net made of a heat-resistant fiber, serving as frames, with silicon.

Further, a gyrosensor 207 to sense a level state is provided on the main body 200, and a control lever 206 connected to the gyrosensor 207 is installed within the control room 209.

A vertical control unit 204 and a horizontal control

unit 202 are further provided at the rear portion of the main body 200 to provide directionality to the flying object.

Further, wings 100 are respectively connected to both sides of the main body 200 through variable units 300.

5 Each of the variable units 300 includes a plurality of variable chambers provided on a connection part between each of the wings 100 and the main body 200.

Each of the variable units 300 further includes a volume conversion part 303 to adjust an expansion degree at one side  
10 of the variable chambers.

When the wings 100 are respectively connected to both sides of the main body 200 through the variable units 300, more than two propellers 130 are installed on each of the wings 100.

15 Each of the propellers 130 is connected to a support unit 170, which is connected to a mounting part 105, vertically formed through each of the wings 100, through a rotary shaft 190, by a position conversion unit 180, and is connected directly to a power generation unit 160.

20 The position conversion unit 180 has a connection structure of a first plate 183, which is rotated, and a second plate 185, which is tilted in one direction.

The power generation unit 160 is selected from a motor driven by a general fuel cell, or an internal combustion  
25 engine.

Each of the wings 100 includes a plurality of compartments 103 connected by partitions 101.

Each of the wings 100 further includes an adjust chamber 107 at the central portion thereof.

5 Here, the compartments 103 and the adjust chamber 107 are installed such that air is simultaneously or selectively supplied to and discharged from the compartments 103 and the adjust chamber 107 through the pump 205 and a pipe connected thereto.

10 Further, the wings 100 may have a double structure including an external wing unit and an internal wing unit.

An anemometer 265 and an anemoscope 267 are further provided on the main body 200, and ailerons 800 to control the rolling of the flying object system are respectively provided  
15 at the rear portions of the wings 100.

Bulletproof members 950, which are manually or automatically slid, are provided on the bottom of the control room 209 of the main body 200, and a balloon 900 to increase lift force and protect the control room 209 in the event of  
20 crash is further provided at one side of the upper surface of the main body 200.

Here, the balloon 900 is generally located within the main body 200, and serves as a parachute through a plurality of wires connected thereto to allow the balloon 900 to be  
25 located at the center of gravity of the main body 200 in case

of emergency. The wires may be used as cables for traction.

A zipper member 970 is provided at the edge of each of the wings 100 such that the wings 100 are foldable when the wings 100 are not in use. Further, a handle 975 is further  
5 provided at one side of each of the wings 100 to facilitate the movement of the flying object system.

Further, an auxiliary propeller 980 is provided at the front portion of the main body 200.

Hereinafter, the operation of the above flying object  
10 system of the present invention will be described.

As shown in FIGS. 2 to 7, the flying object system can travel on the ground through more than the three wheels 220 for ground traveling, connected to the lower surface of the main body 200, and the wheels 220 are interlocked with the  
15 control lever 206 so that the rotating directions of the wheels 220 can be changed when the control lever 206 is manipulated.

Further, the heights of the wheels 220 are adjusted when the pressure of a fluid is transmitted to the wheels 220  
20 through the control blocks 228, and thus the level state of the flying object system is maintained even when the flying object system lands on the uneven surface of the ground.//

Power to cause the wheels 220 to travel employs driving force of the motors driven by power supplied from the main  
25 body 200 when the flying object system travels at a low speed

or is parked, or propulsive force of the propellers 130 installed on the wings 100 when the flying object system travels at a high speed.

Further, the main body 200 provided with a reception space and the control room 209 installed therein may be made of a lightweight material maintaining a uniform strength, such as duralumin or titanium, or the exterior part of the main body 200 except for the control lever 206 and some frames may be made of a tube body, into which air or gas can be injected.

In case that the exterior part of the main body 200 is made of the tube body, when the inside of the main body 200 is filled with air or gas, such as helium, lift force is increased and power consumption is minimized. Further, in this case, impact applied to the main body 200 when the flying object system crashes is absorbed, and thus users are more safely protected.

Further, the wings 100 providing lift force to the flying object system are installed at both sides of the main body 200 to maintain the balance of the main body 200. The wings 100 are also made of a tube body and are provided with the plural compartments 103 divided by the partitions 101, thus exhibiting the same effect as that of the above-described main body 200 made of the tube body.

The variable units 300 are respectively provided on the upper and lower portions of the wings 100, when the wings 100

are connected to the main body 200 through hinge shafts (not shown). Therefore, upward and downward gradients of the wings 100 from a line being horizontal with the connection parts between the main body 200 and the wings 100 are adjusted by  
5 injecting air into the variable units 300 via the pumps 205.//

The variable units 300 include the plurality of the variable chambers, which are expanded by injecting air into the chambers. Therefore, in case that a large amount of air is injected into the upper portions of the lower portions of  
10 the variable units 300, the wings 100 are folded in the perpendicular direction to the main body 200 through the expansions of the volume conversion parts 303, each of which is an elastic tube or a bellows member made of plastic including an external guide plate to be expanded and  
15 contracted only up to a designated part. Thereby, the flying object system may travel and be kept in a minimum space.

Further, gas is supplied to the wings 100 due to exhaust pressure of the pumps 205 or an engine used as a power source. The gas is selectively supplied to the wings 100 through  
20 branch units 201, and lines from the branch units 201 are connected to the respective compartments 103 such that the gas can be simultaneously supplied to the plural compartments 103 of the wings 100.

More than the two propellers 130 are installed on each  
25 of the wings 100, and the propellers 130 improve

directionality against the center of gravity of the main body  
200 of the flying object system.

Since the propellers 130 are rotated and tilted through  
the position conversion units 180, the angles of the  
5 propellers 130 in all directions are adjusted, and thus the  
direction of the flying object system may be adjusted without  
the vertical control unit 204 and the horizontal control unit  
202. Further, hovering, three-dimensional direction change  
and forward and backward movement of the flying object system  
10 may be achieved.

Further, the power generation unit 160 may be connected  
to the propeller 130 such that the propeller 130 is rotated  
through the rotary shaft 190, as shown in FIGS. 6a and 6b,  
thus generating propulsive force in a direction forming a  
15 designated angle with the wing 10.

The auxiliary propeller 980 is further provided at the  
front portion of the main body 200.

When the auxiliary propeller 980 provided at the front  
portion of the main body 200 is operated, the flying and  
20 traveling speeds of the flying object system are increased.

Further, the auxiliary propeller 980 varies a tilting  
degree and a rotating speed according to wind velocity in  
hovering and vertical takeoff and landing, and thus allows the  
hovering and vertical takeoff and landing of the flying object  
25 system due to the operations of the propellers 130 to be

safely carried out.

The propulsive force generated by the propellers 130 induces lift force due to the shape of the wings 100, and the control of the flying object system is achieved through the vertical control unit 204, the horizontal control unit 202, and the ailerons 800.

Each of the wings 100 includes the adjust chamber 107 provided in the perpendicular direction of the compartments 103, and thus the width of the wings 100 is increased or decreased by inserting gas into the adjust chamber 10 and the wings 100 have various shapes according to flying conditions.

Further, the anemometer 265 and the anemoscope 267, which are provided on the main body 200, judge external drag when the flying object flies, and thereby adjust the angles and the numbers of rotations of the respective propellers 130, thus generating propulsive force and lift force. The gyrosensor 207 senses the current state of the flying object, and thus properly adjust propulsive force and lift force.

The above-described flying object system of the present invention judges drag due to external surrounding factors in a direction to be flied using the anemometer 265 and the anemoscope 267, judges the current state of the flying object using the gyrosensor 207, and then determines the directionality of the flying object while generating propulsive force and lift force by manipulating the pumps 205,

the power generation units 160, and the position conversion units 180 connected to the control lever 206.

Here, the propellers 130, the angles of which are adjusted by the position conversion units 180, may provide only propulsive force, and the flying object system may be controlled through the vertical control unit 204, the horizontal control unit 202, and the ailerons 800 connected to the control lever 206.

Further, a plurality of cameras (not shown) is mounted on the main body 200, and transmits the state of the flying object system to the outside by wire or wirelessly such that the flying object system can be controlled from the outside wirelessly through a wireless installation, such as a portable phone.

The above-described flying object system of the present invention includes the foldable wings and occupies a small space, thus effectively using a parking space. Moreover, the flying object system easily passes through a narrow road.

The flying object system of the present invention may be parked on the top or the veranda of a house. Further, the flying object system unfolds the wings 100 and takes off, when traffic congestion occurs during traveling on the ground, thereby relieving the traffic congestion and contributing to the national economy due to a smooth flow of public transportation.

As apparent from the above description, the present invention provides a flying object system performing ground traveling, which has a light weight to minimize fuel consumption, travels on a road on the ground and takes off and  
5 flies in the air in traffic congestion, and flies in the air and lands and travels on a road on the ground if necessary to rapidly move to a destination without the effects of traffic congestion, has a tube shape as a whole to alleviate impact in the event of a crash and thus be used stably, and properly  
10 varies the shape of wings and lift force generated from respective propellers according to usage conditions to improve flying performance.

Although the preferred embodiments of the present invention have been disclosed for illustrative purposes, those  
15 skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope of the invention as disclosed in the accompanying claims.

**CLAIMS:**

1. A ground-air vehicle for performing ground or air traveling, which has three or more wheels connected to a lower surface of a main body, and is provided with a plurality of propellers, operated by a control lever and where at least one of the propellers is installed on the wings and at least one of the propellers is installed on at least a part of the main body, to generate lift force and propulsive force of the main body, each of the wings being divided into a plurality of compartments to be folded or be changed in shape by pressure of gas;

wherein each of the wings is divided into the plurality of compartments, to which gas is supplied by a pump installed in the main body,

wherein the plurality of compartments is divided from each other by partitions such that the gas is simultaneously or selectively supplied to the plurality of compartments by the pump, and an adjustable chamber is provided in the perpendicular direction of the compartments such that the width of the wings is increased or decreased by inserting gas into the adjustable chamber.

2. The ground-air vehicle according to claim 1, wherein the propellers adjust tilt angles thereof on the wings through position conversion units after vertical ascent of the ground-air vehicle, and thus achieve hovering, three-dimensional direction change and forward and backward movement of the ground-air vehicle.

3. The ground-air vehicle according to claim 1, wherein following a vertical ascent, the directional movement of the ground-air vehicle is adjusted by tilting the propellers using position conversion units in connection with a vertical control unit, a horizontal control unit, and ailerons installed at the rear portion of the main body.

4. The ground-air vehicle according to claim 2 or 3, wherein each of the position conversion units includes a first plate provided on a support unit, connected a mounting part of each of the wings through a rotary shaft, and rotated, and a second plate tilted with the first plate as the center, allowing the propeller to be rotated and tilted in directions transverse to the axis of propeller rotation.

5. The ground-air vehicle according to claim 1, wherein the main body is provided with a gyrosensor to sense a level state of the ground-air vehicle, and an anemometer and an anemoscope to provide feedback in order to control a stable posture of the ground-air vehicle in direction change according to the velocity and direction of the wind, hovering, and takeoff and landing.

6. The ground-air vehicle according to claim 1, wherein a posture of the ground-air vehicle is adjusted by a vertical control unit, a horizontal control unit, and the control lever connected to ailerons.

7. The ground-air vehicle according to claim 1, wherein a power generation unit of each of the propellers is a motor driven by a fuel cell or an internal combustion engine.

8. The ground-air vehicle according to claim 1, wherein an auxiliary propeller is provided at the front portion of the main body.

9. The ground-air vehicle according to claim 1, wherein a balloon is provided at one side of an upper surface of the main body.

10. The ground-air vehicle according to claim 1, wherein each of the wings has an external wing unit of the ground-air vehicle and an internal wing unit of the ground-air vehicle.


11. The ground-air vehicle according to claim 1, wherein an heights of the wheels is adjusted by pressure of a fluid transmitted to the wheels through control blocks integrally provided on each of the wheels when the ground-air vehicle lands on the surface of the ground.

12. The ground-air vehicle according to claim 1, wherein a zipper member is provided at the edges of the wings.

13. The ground-air vehicle according to claim 1, wherein bulletproof members are provided on the bottom of a control room.


14. The ground-air vehicle according to claim 1, wherein a plurality of cameras is mounted on the main body and a wireless transmitter transmits a state of the ground-air vehicle for remote control.

[Fig. 1]

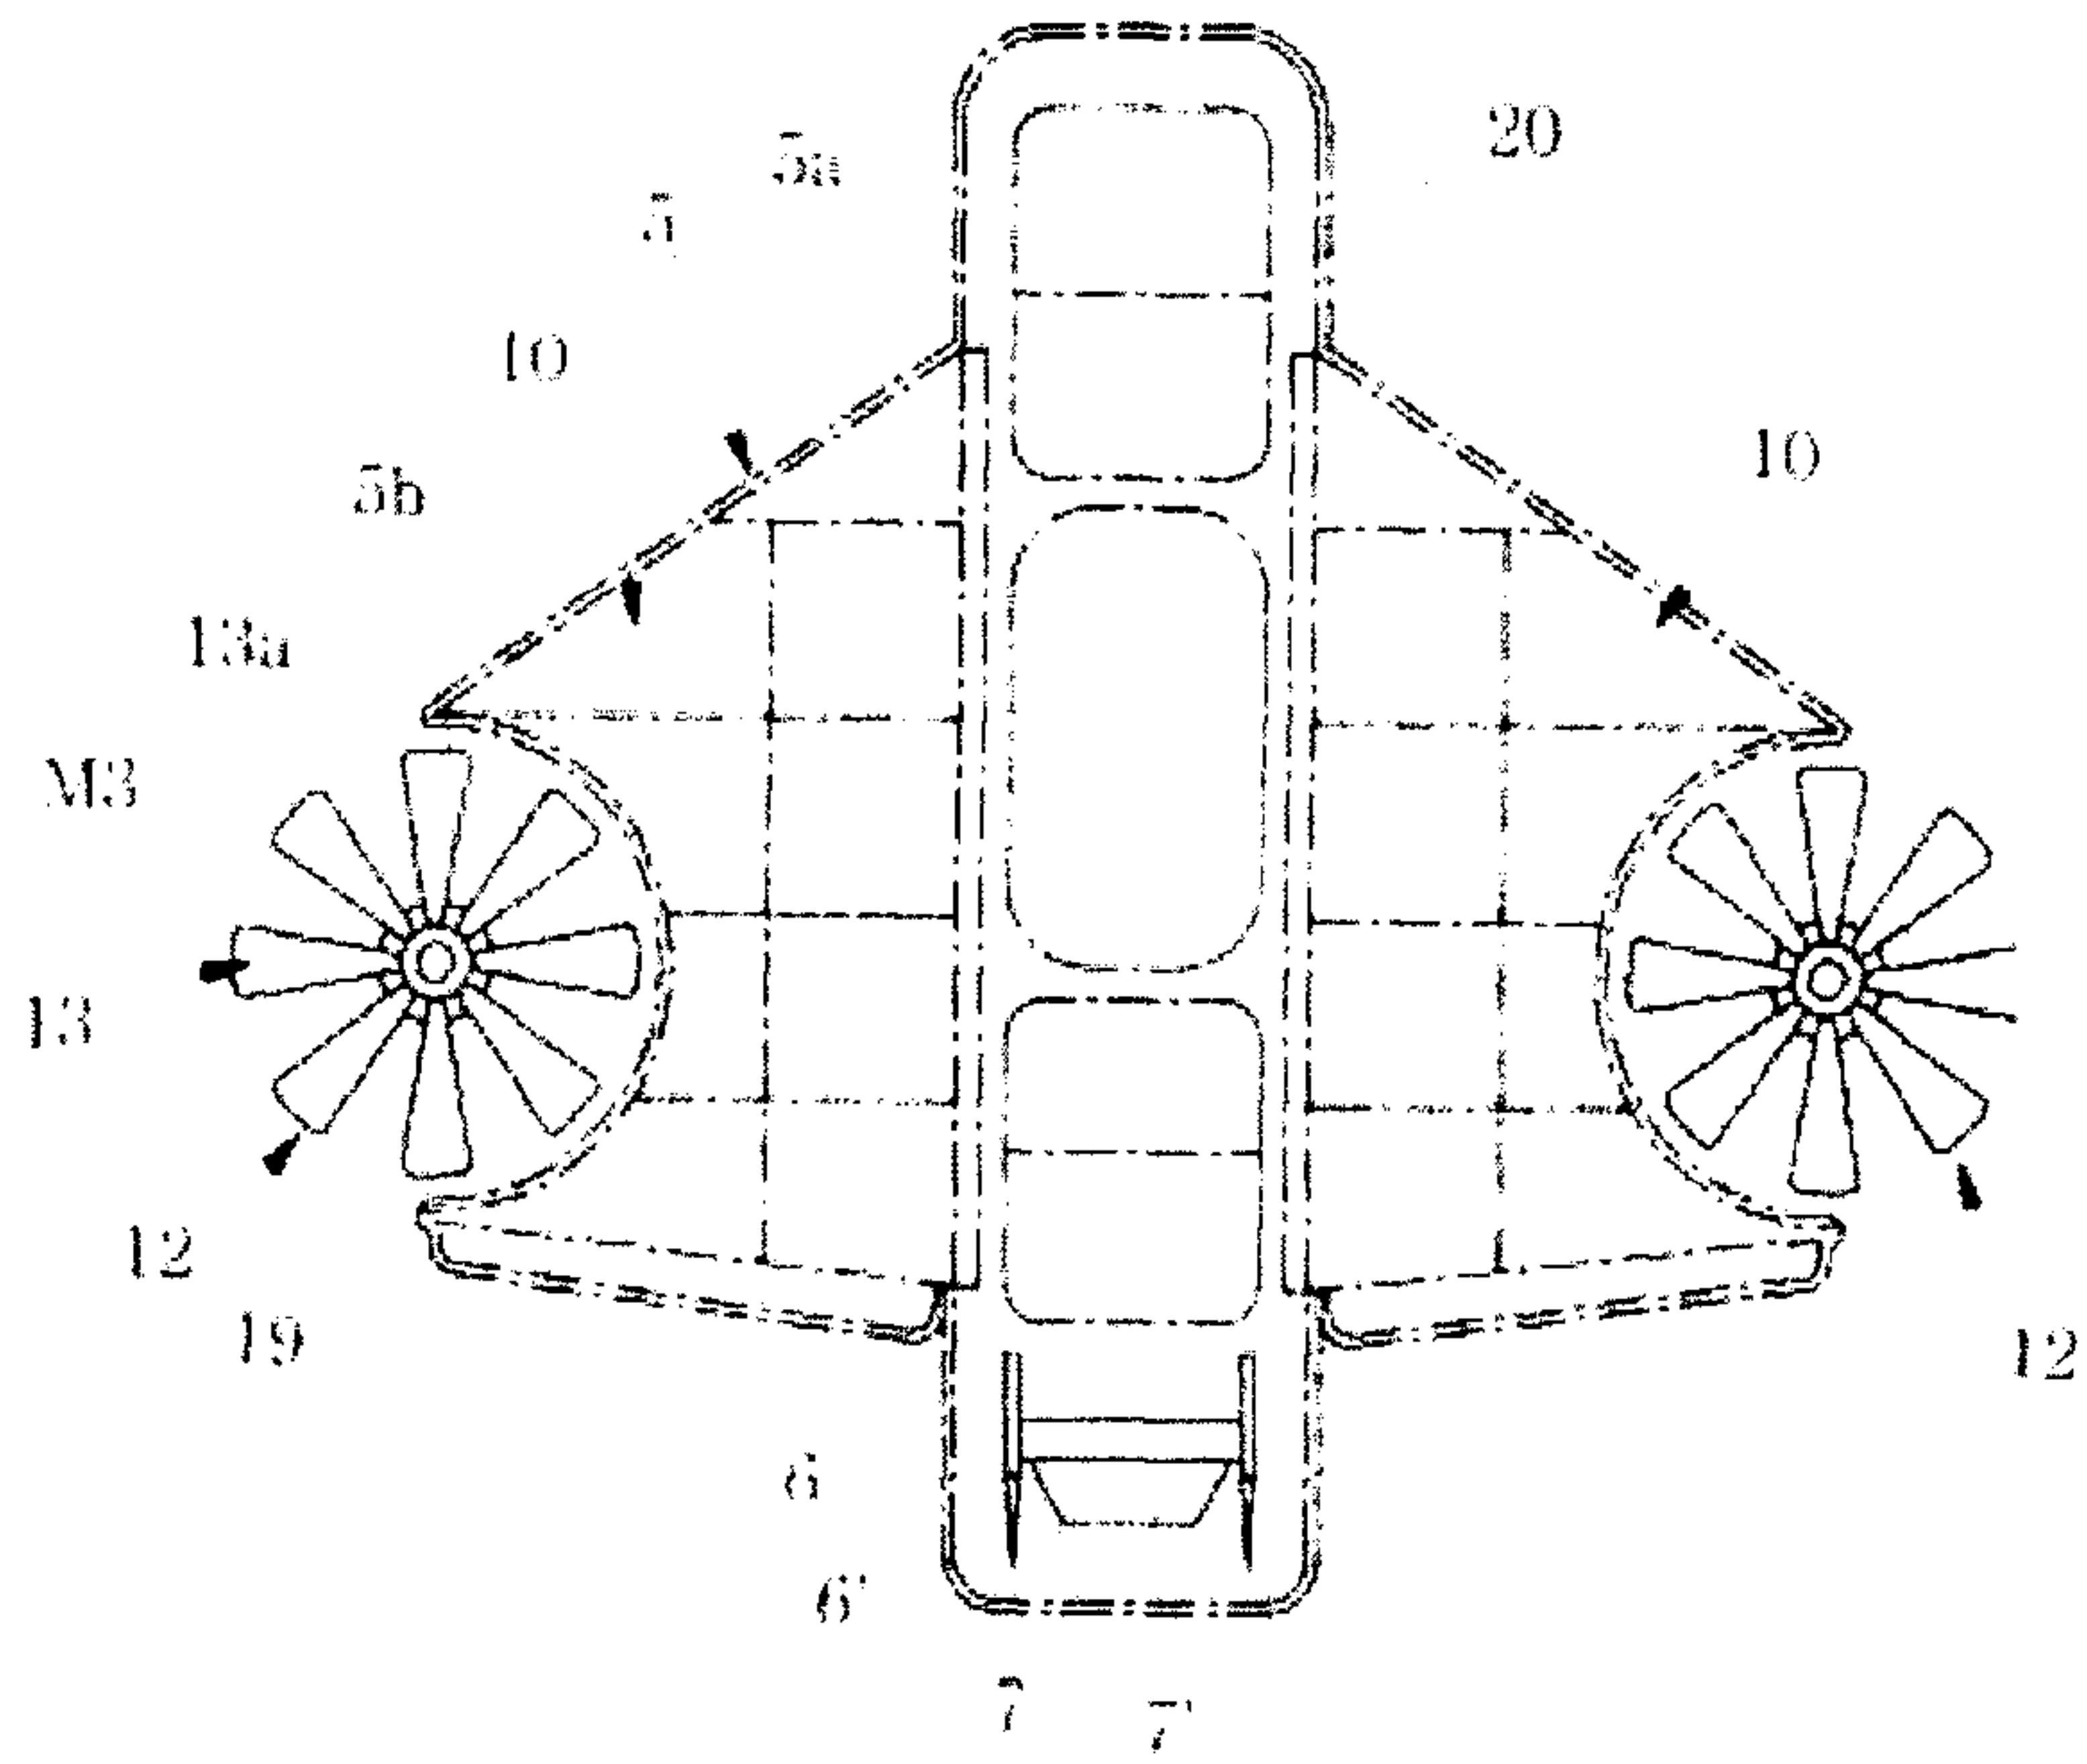


**PRIOR ART**


[Fig. 2]

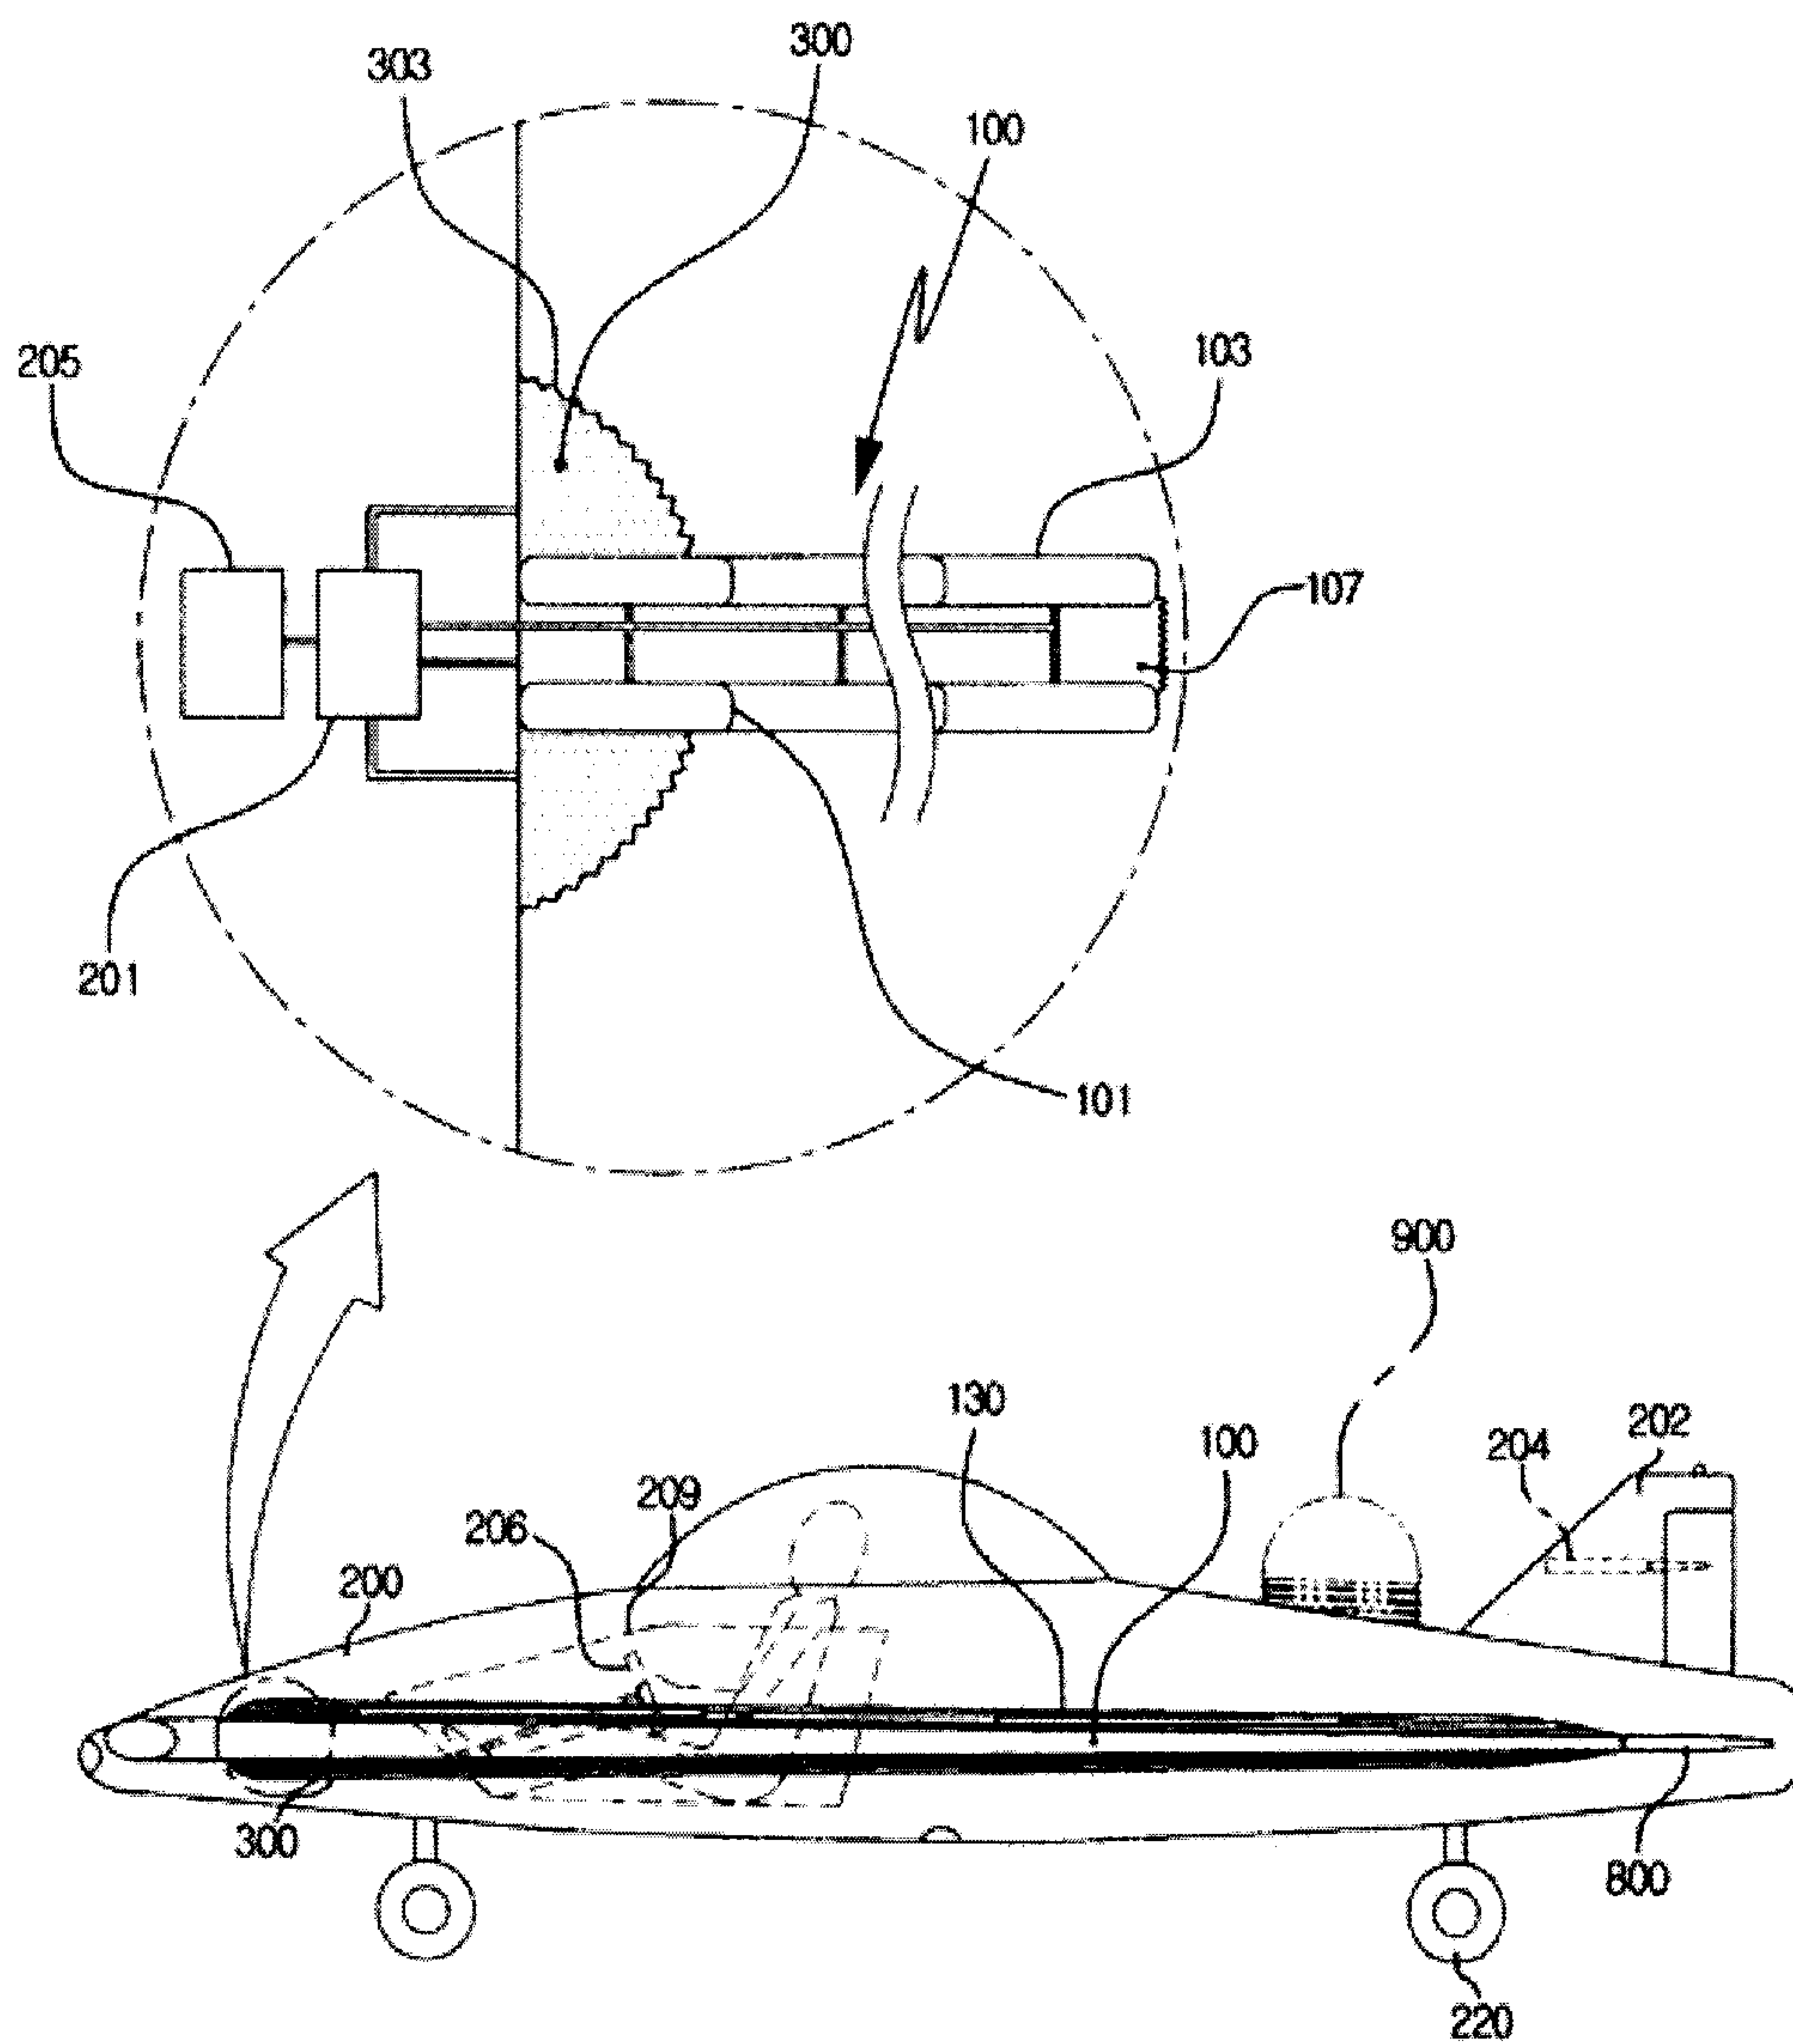


[Fig. 3]

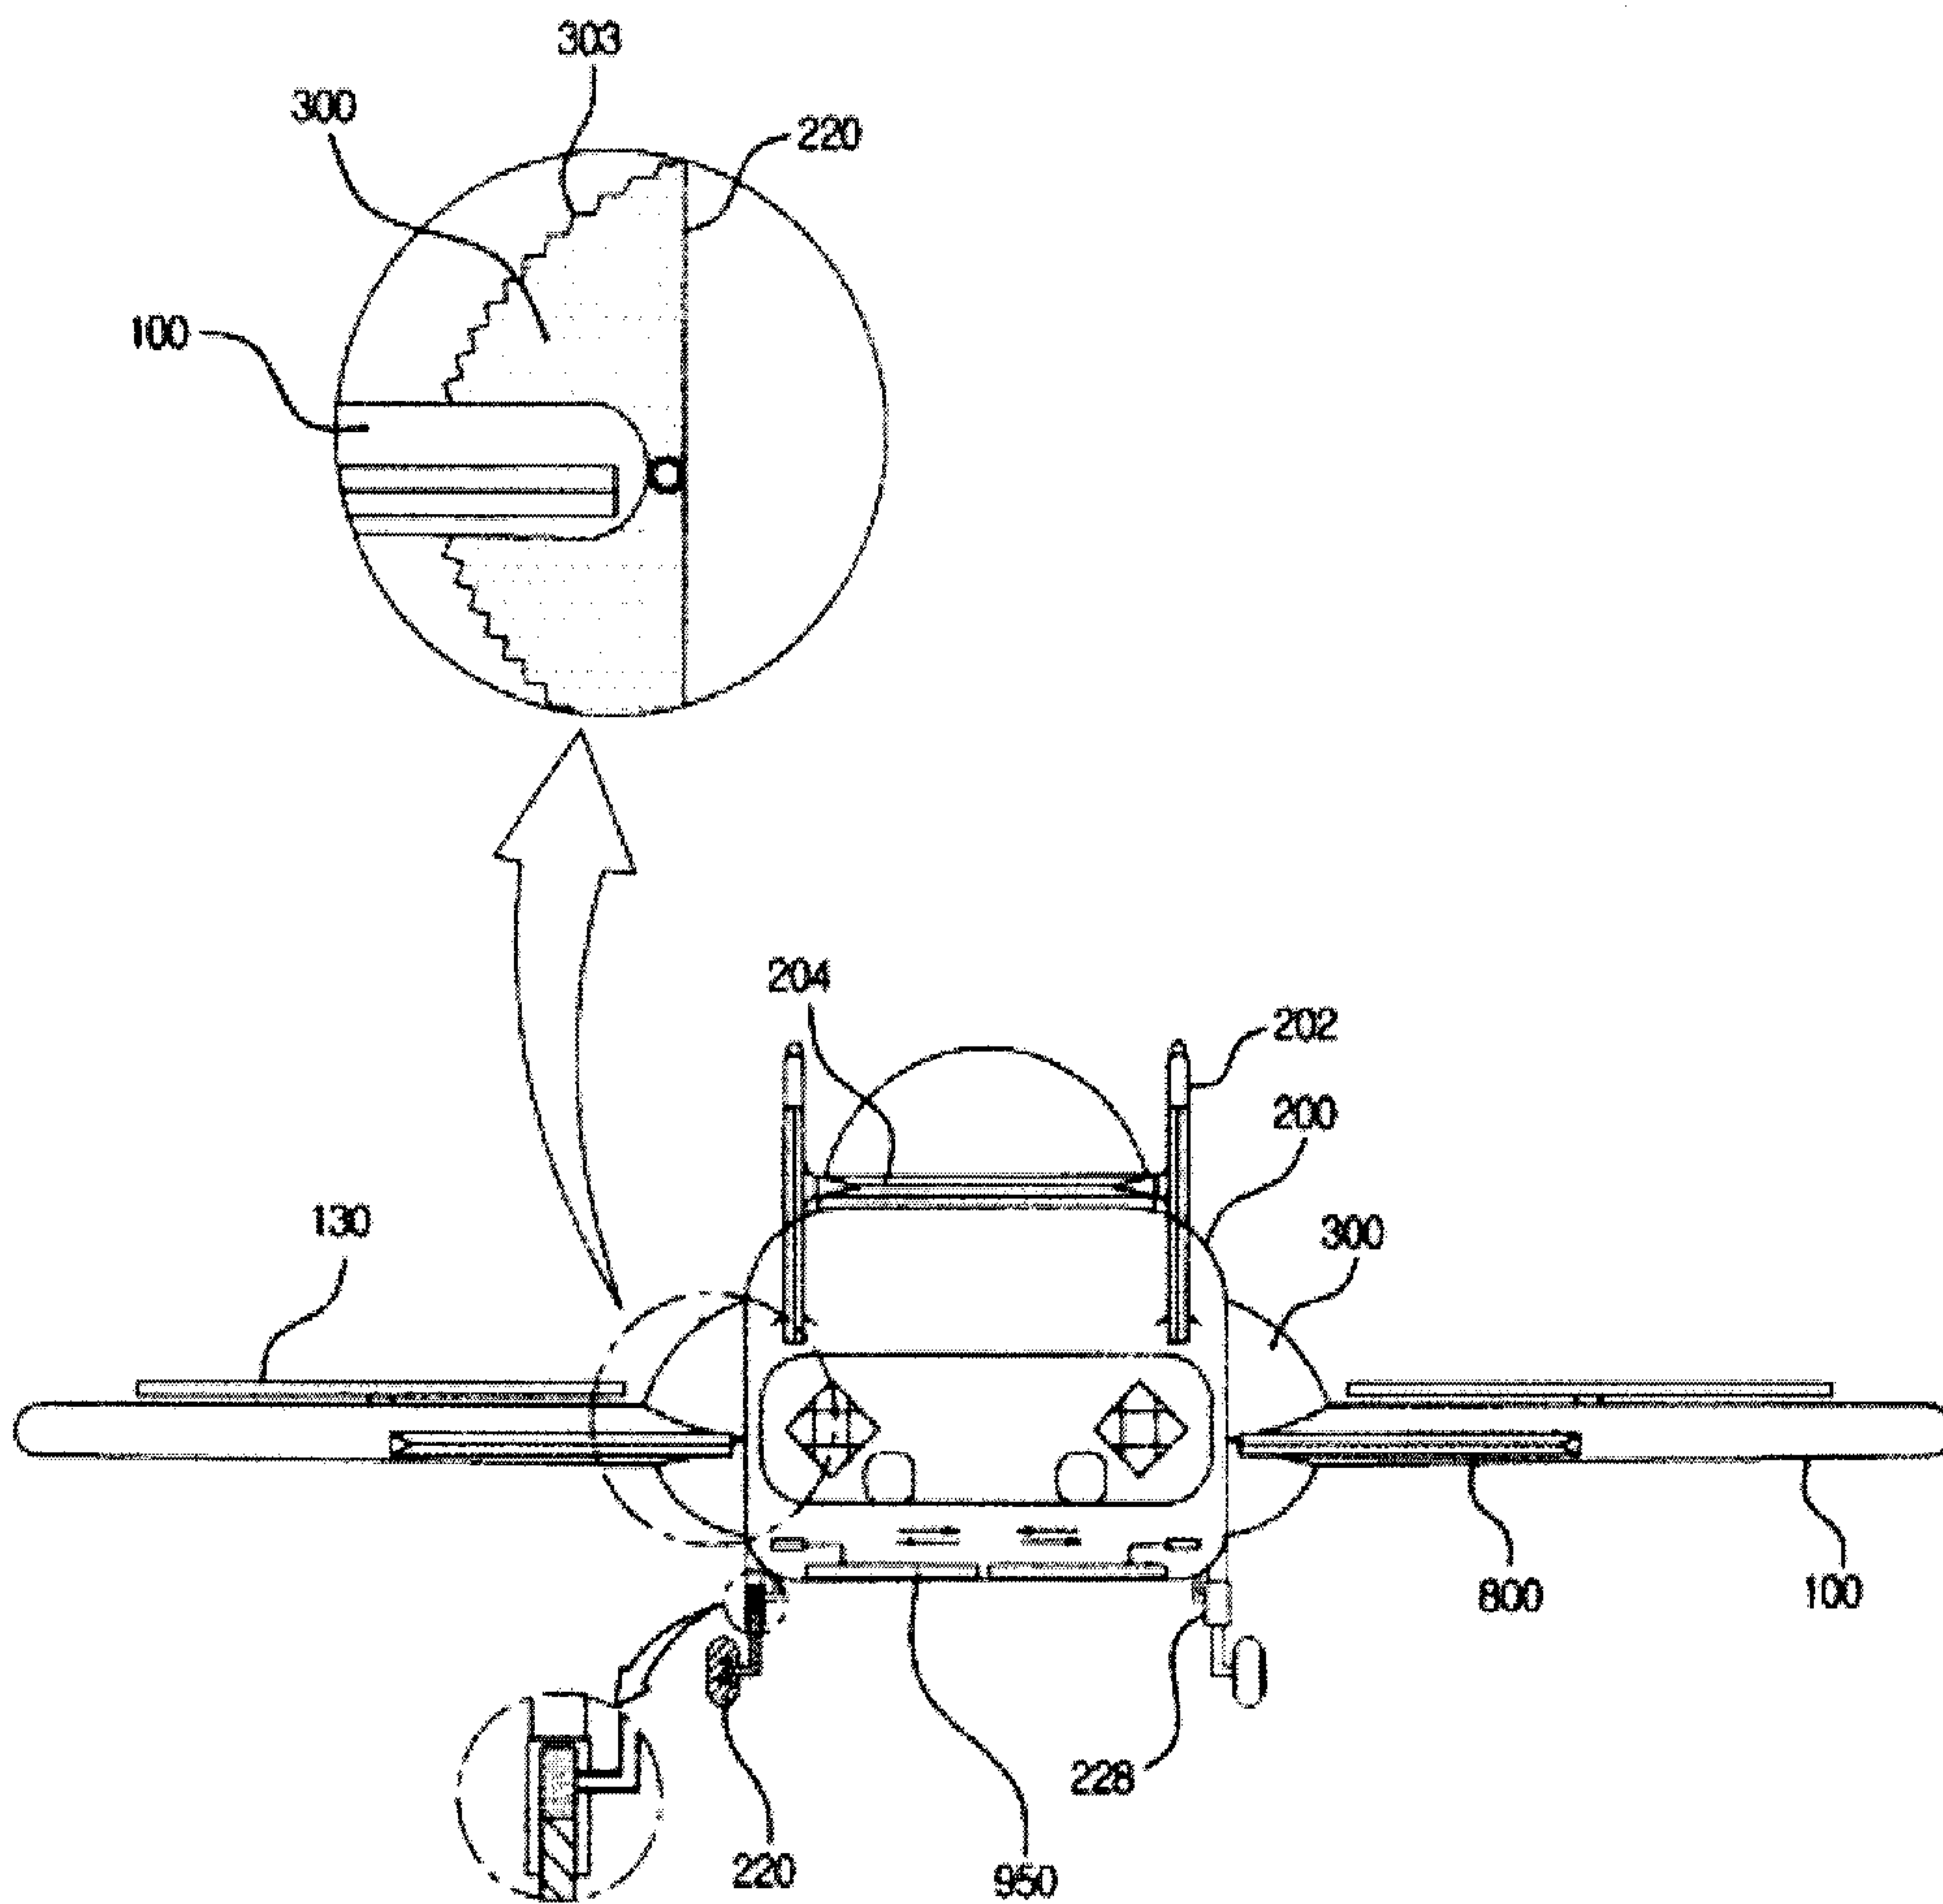


[Fig. 4]

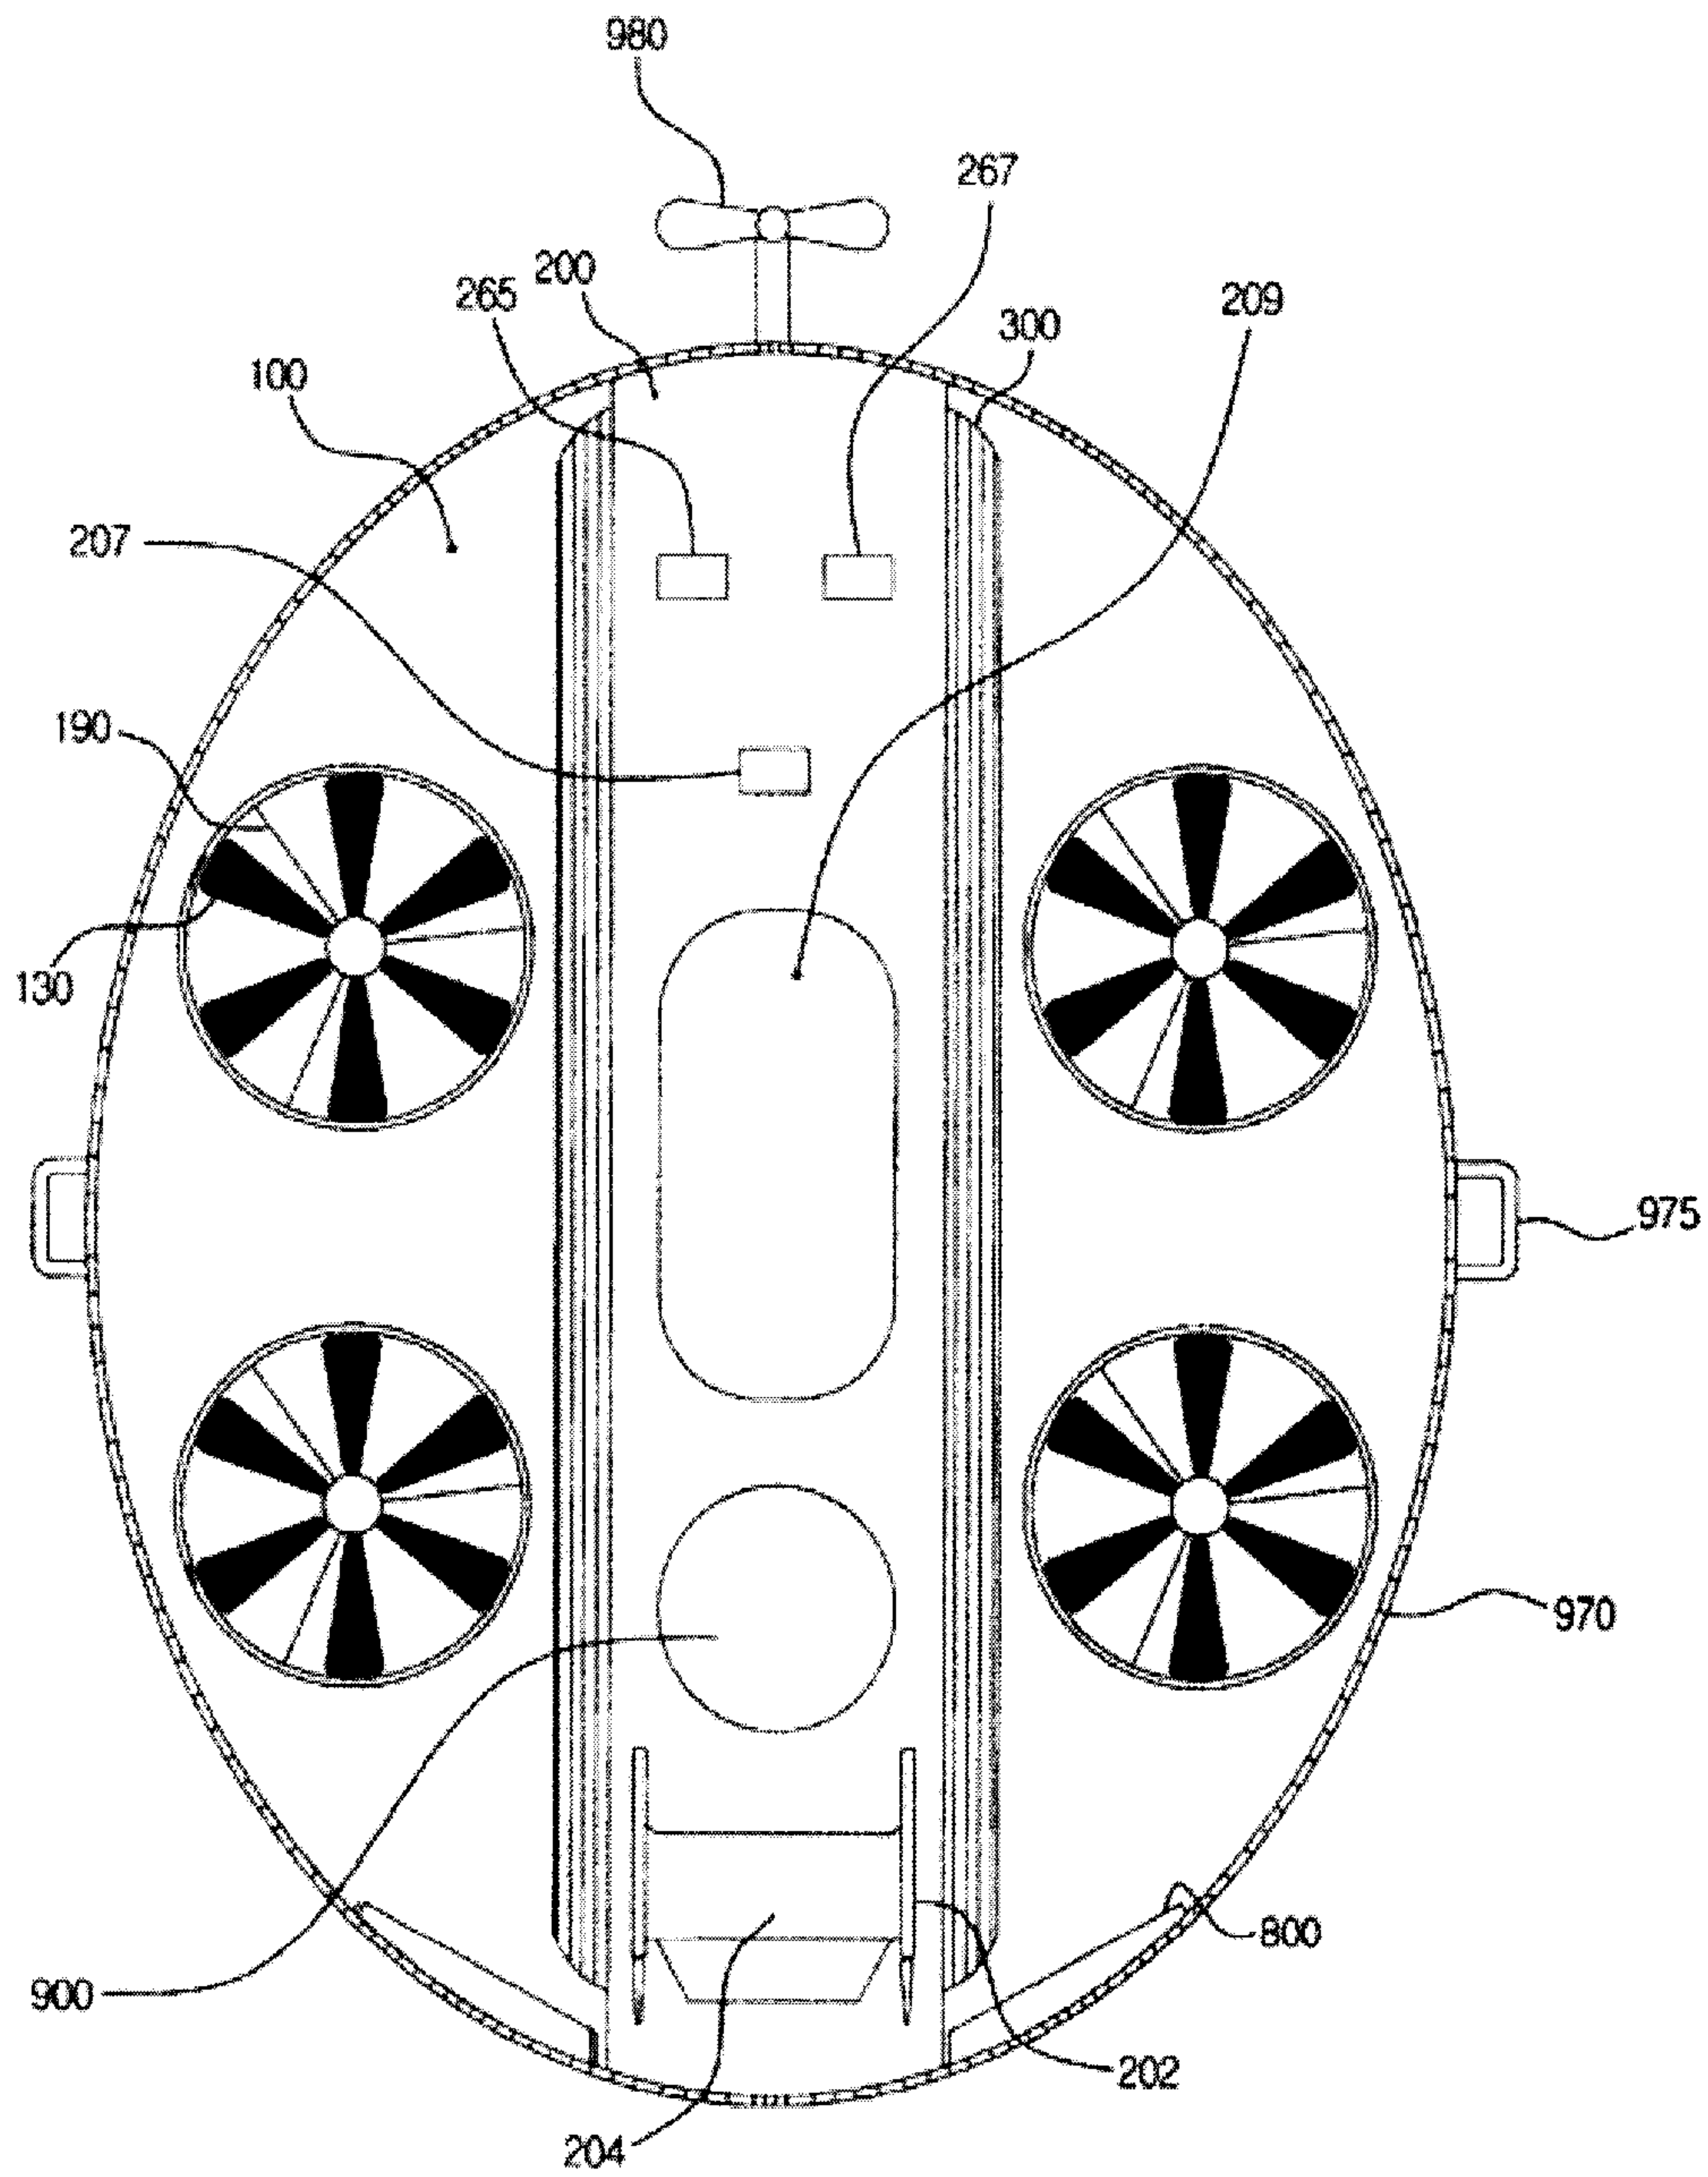


[Fig. 5]

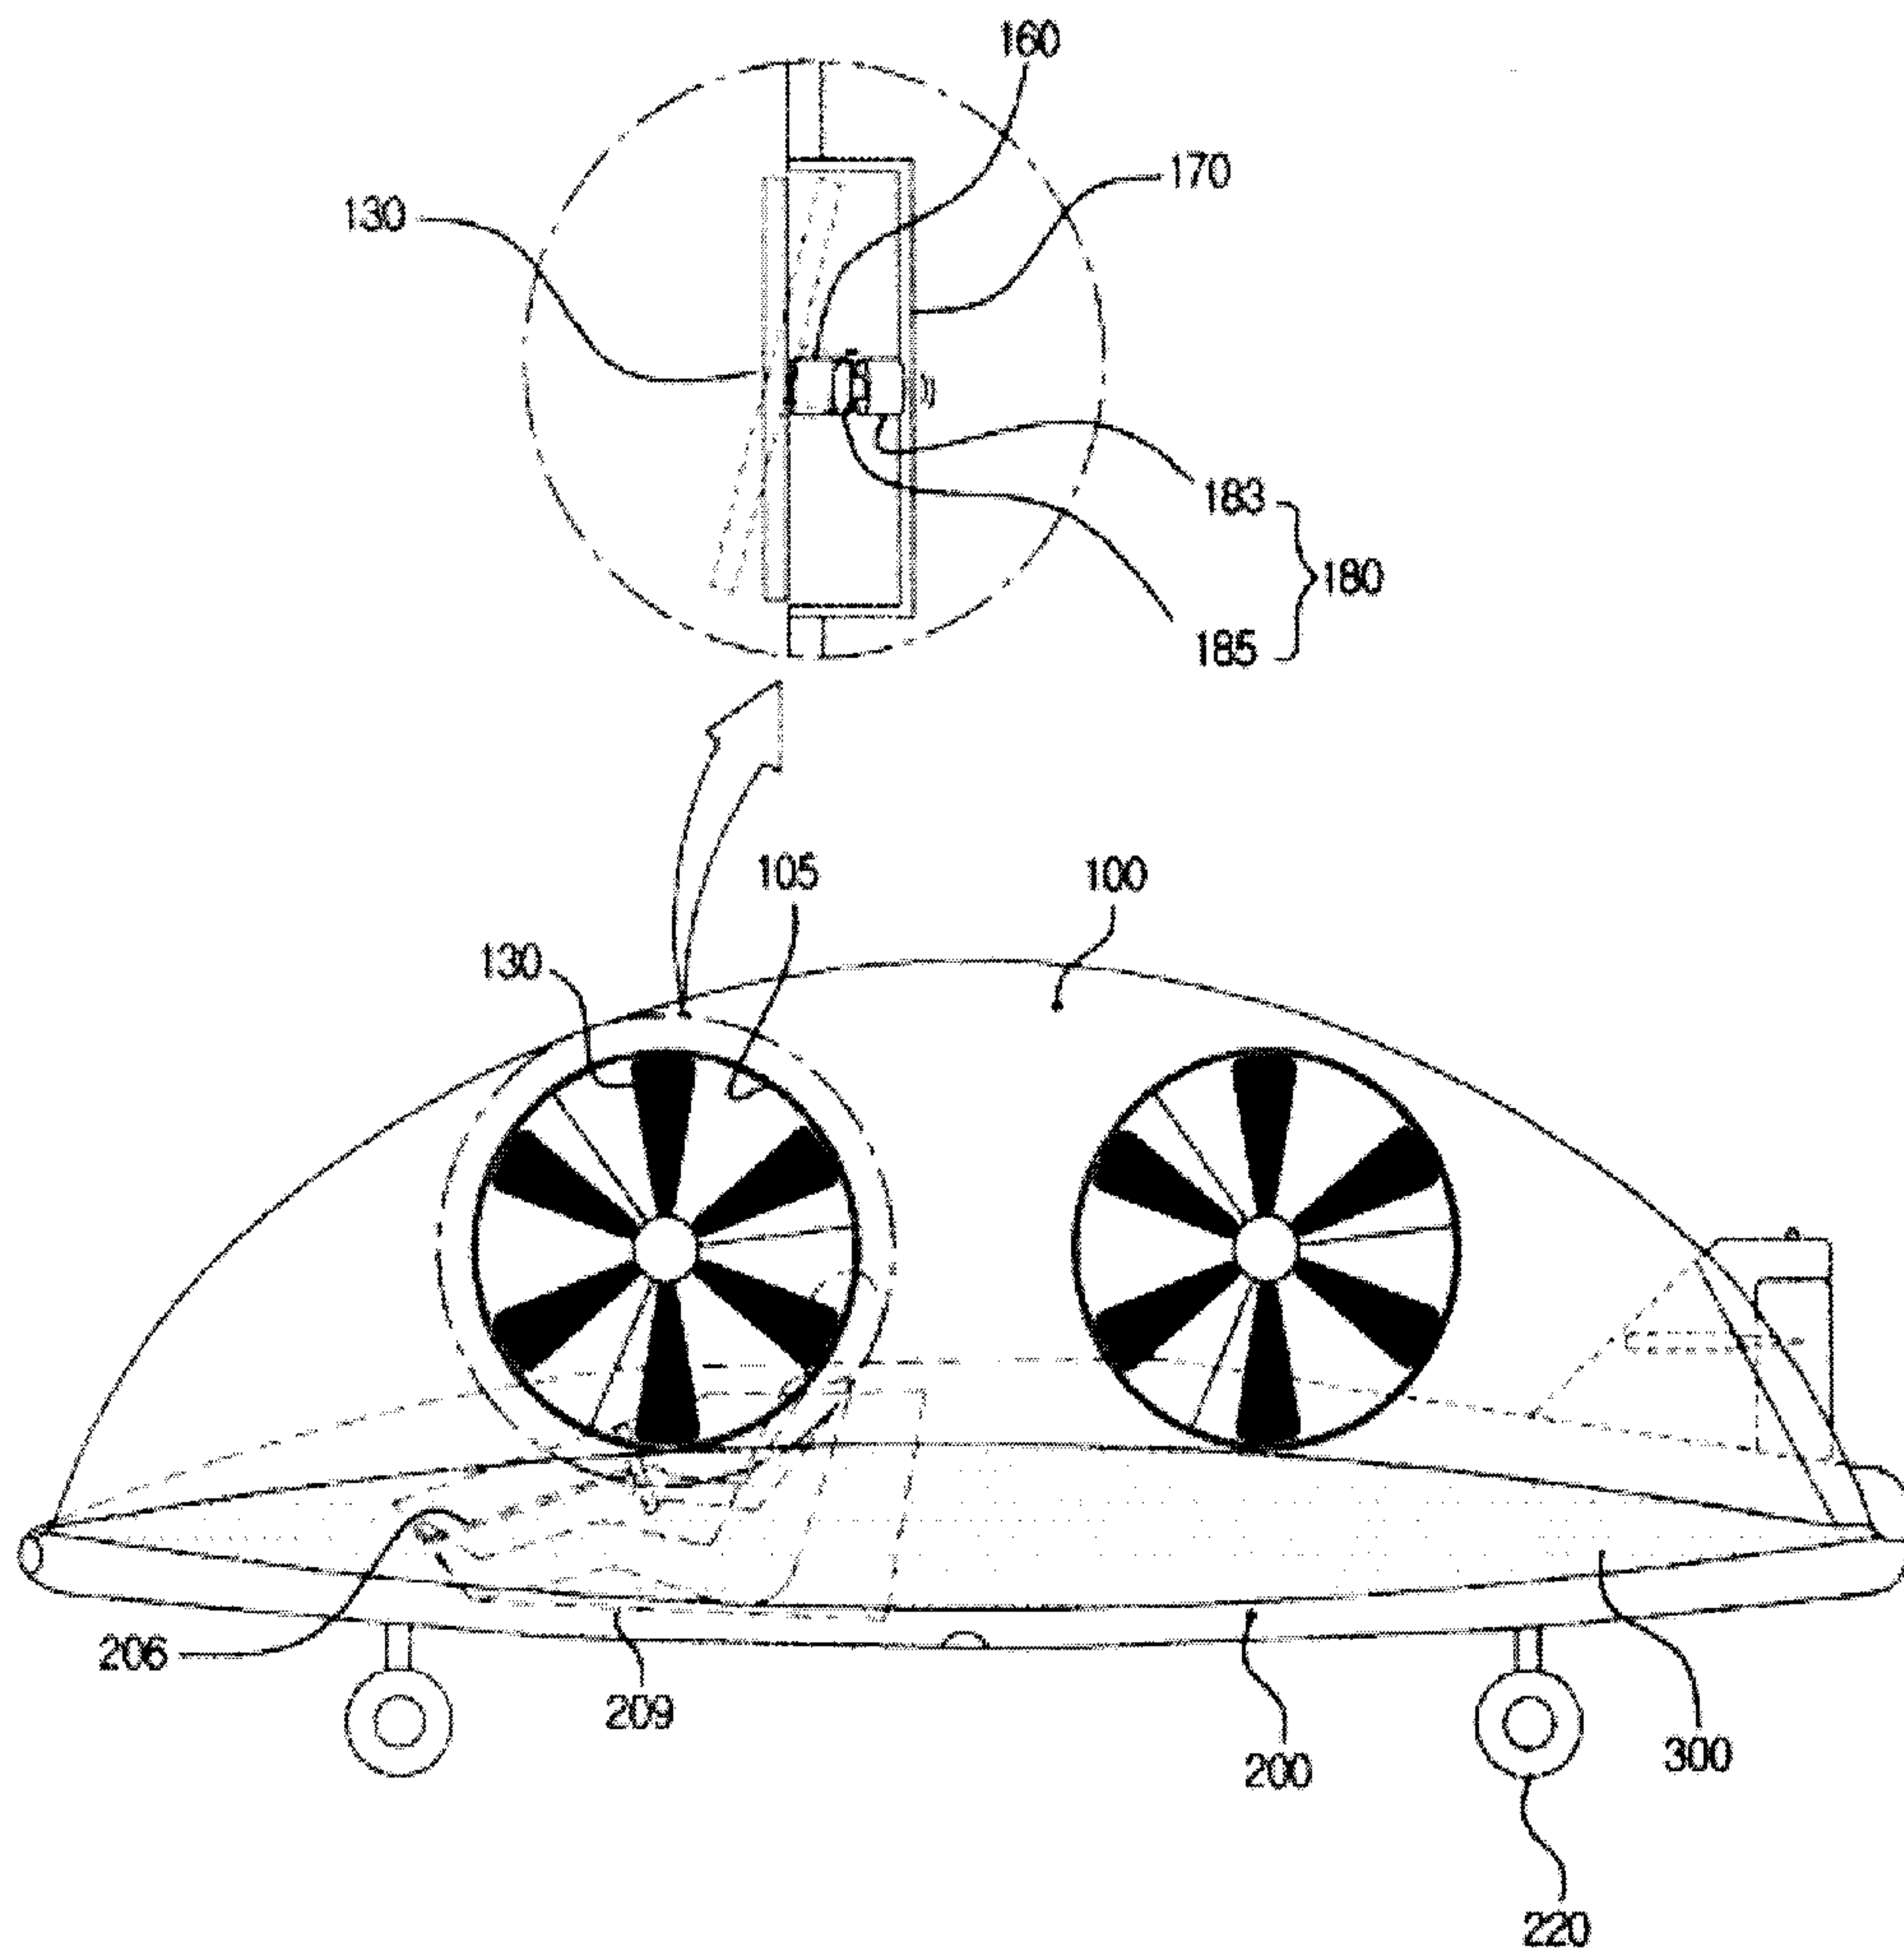

[Fig. 6]

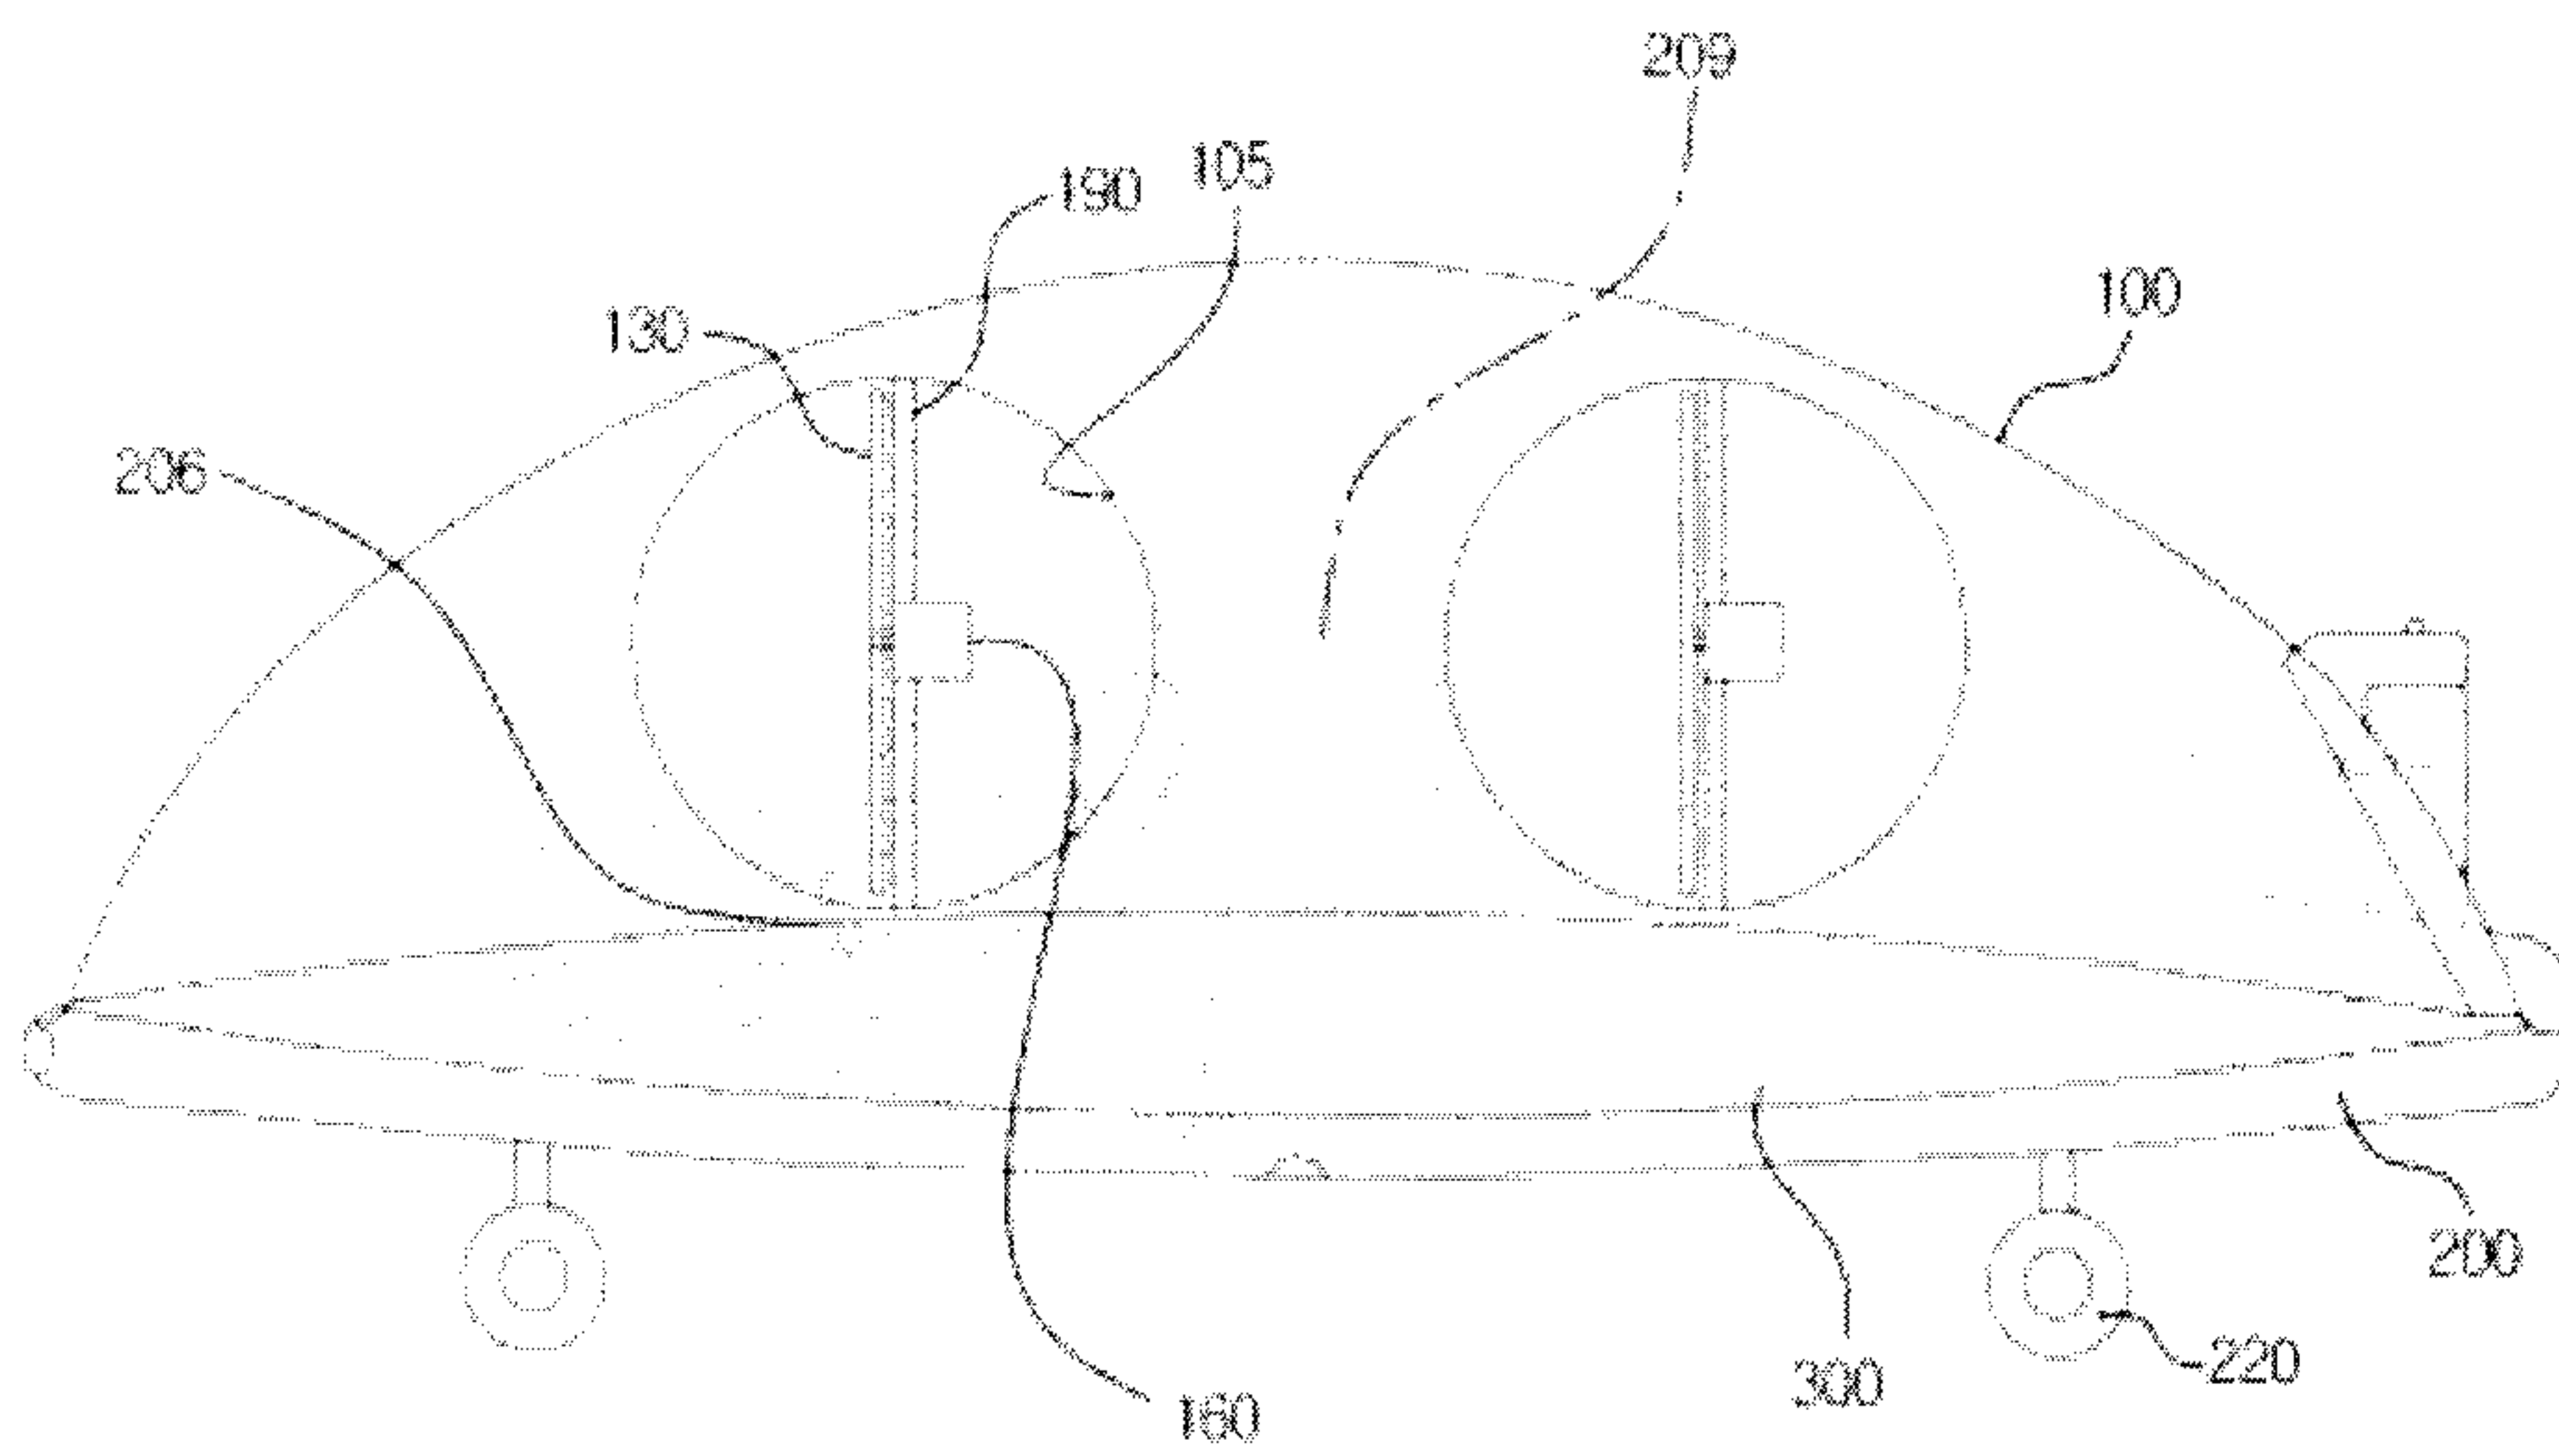

[Fig. 7]

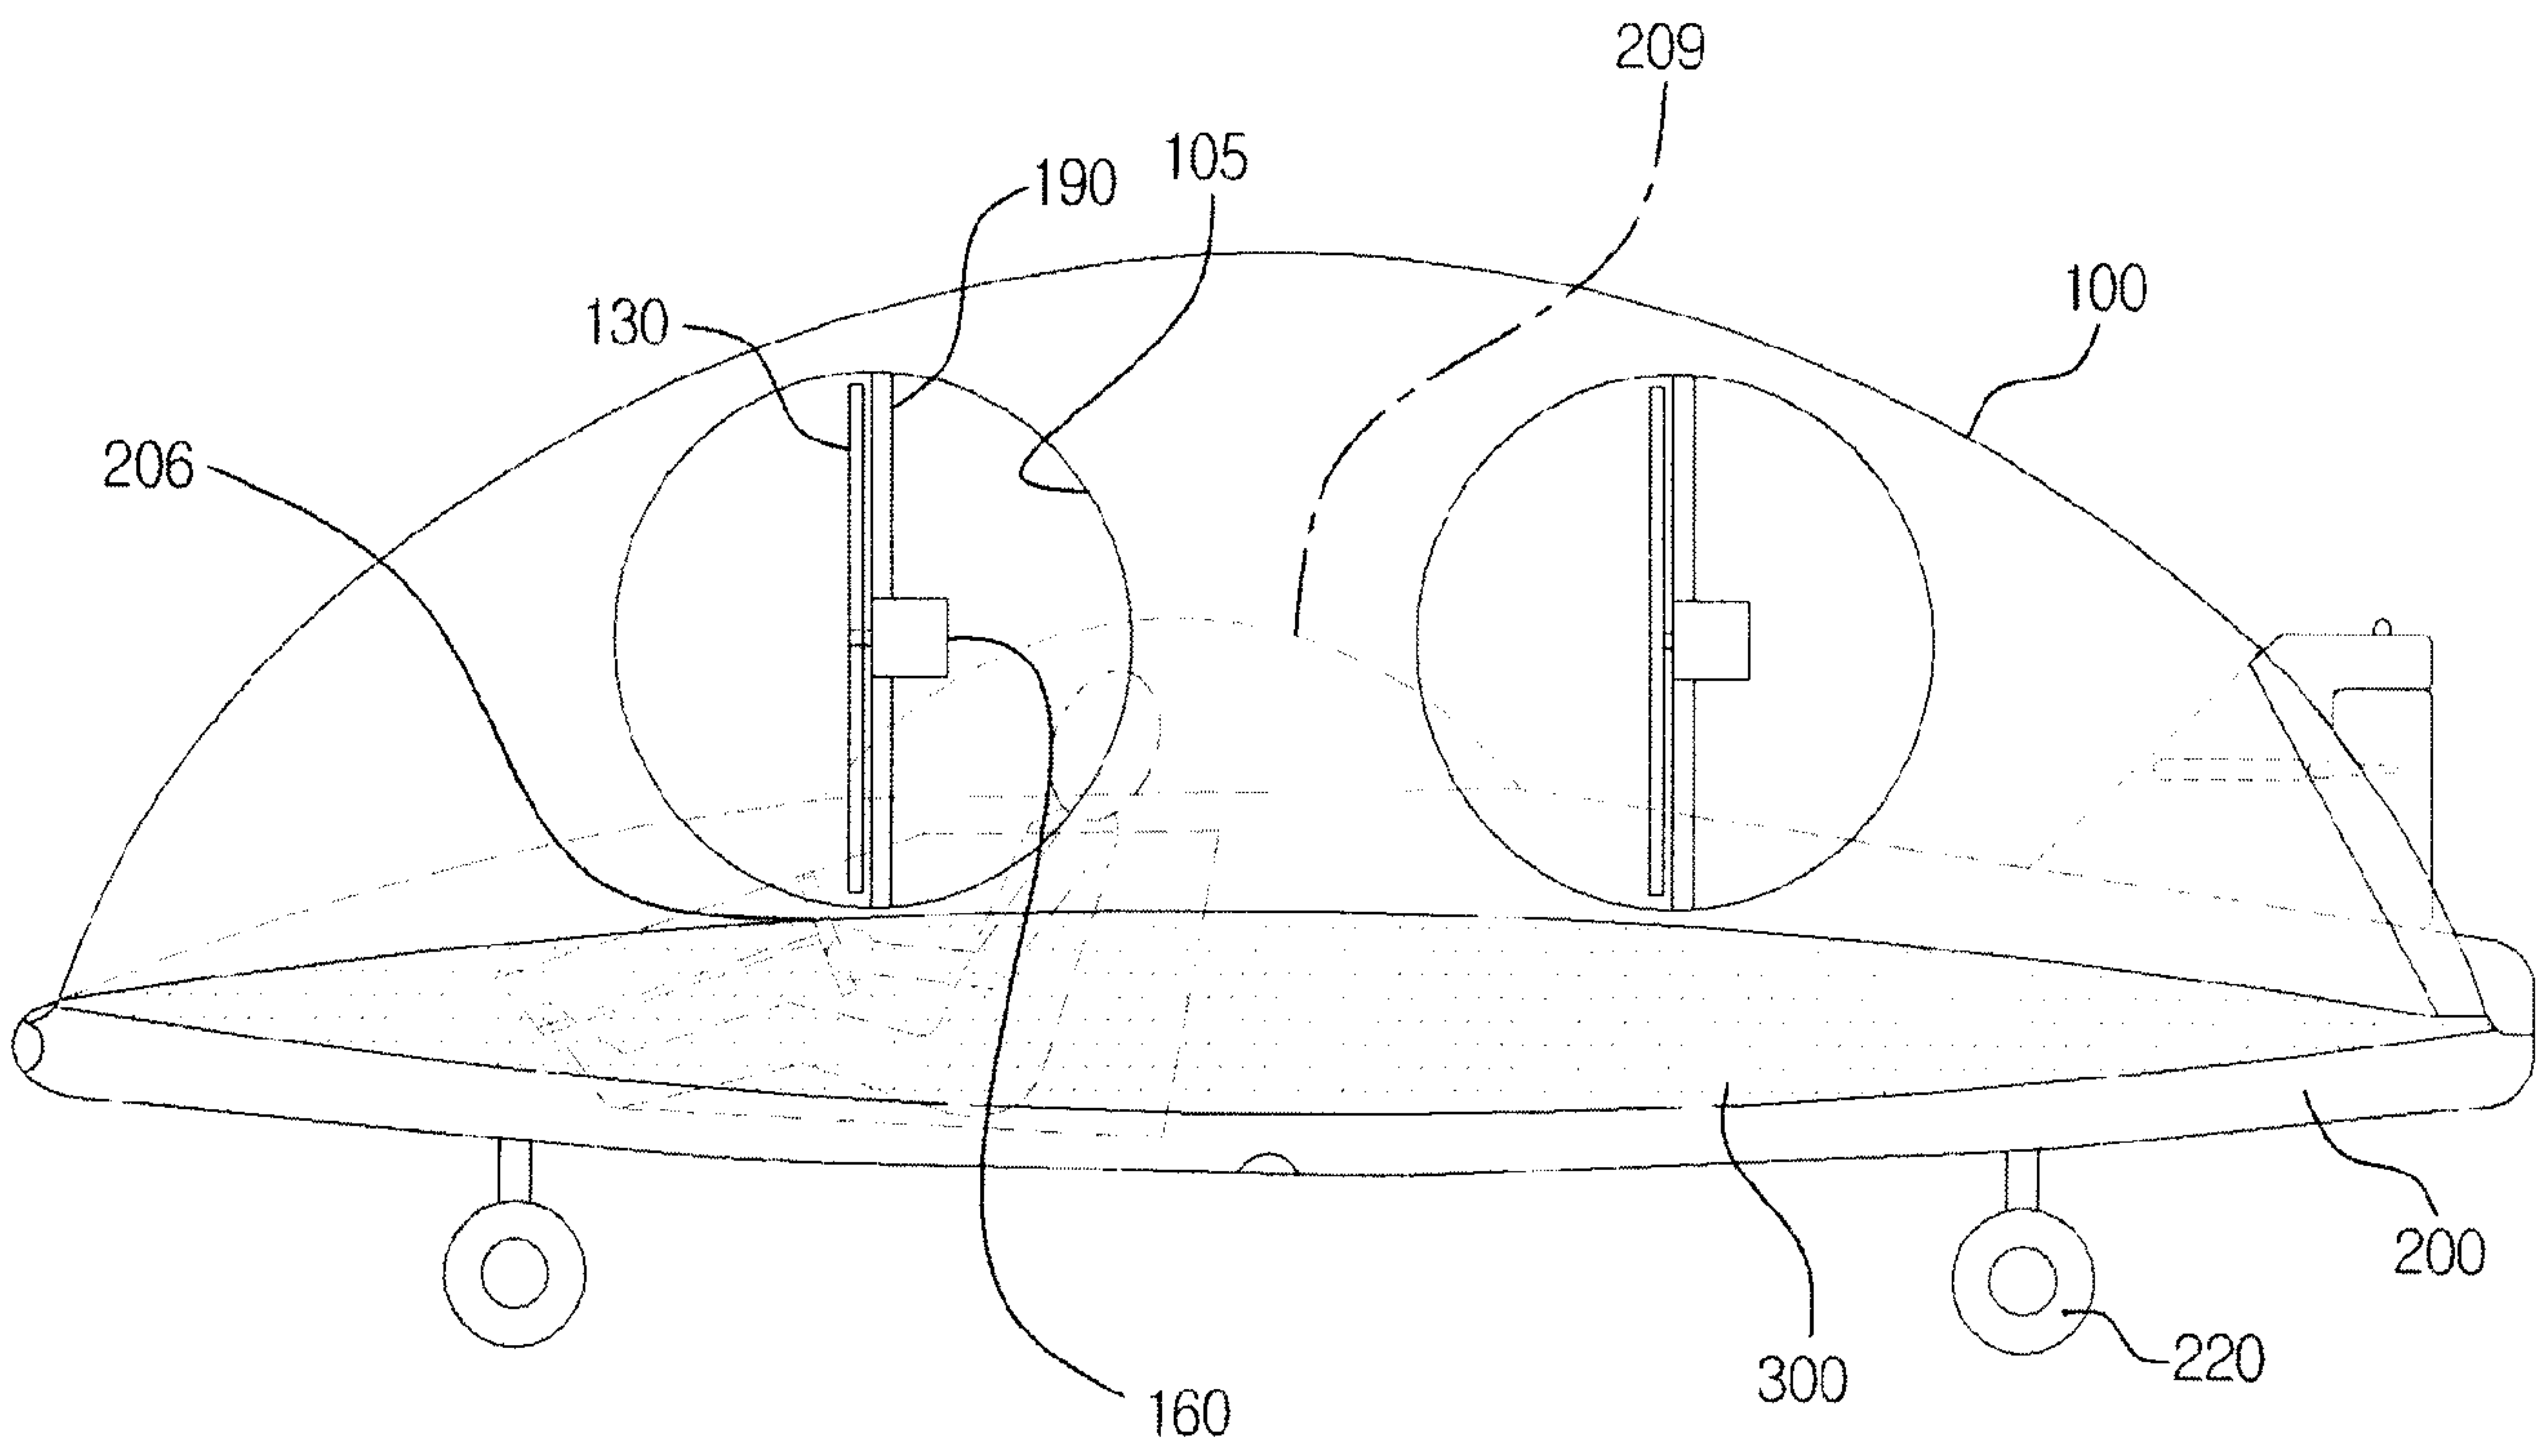

[Fig. 8]

