



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2404899 C 2009/11/24

(11)(21) **2 404 899**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(22) Date de dépôt/Filing Date: 2002/09/25

(41) Mise à la disp. pub./Open to Public Insp.: 2003/03/28

(45) Date de délivrance/Issue Date: 2009/11/24

(30) Priorité/Priority: 2001/09/28 (NL1019059)

(51) Cl.Int./Int.Cl. *A01J 5/01* (2006.01),
A01J 5/007 (2006.01), *G01N 21/31* (2006.01),
G01N 33/04 (2006.01)

(72) Inventeurs/Inventors:

VIJVERBERG, HELENA GERALDA MARIA, NL;
ESPADA AVENTIN, ELENA, NL


(73) Propriétaire/Owner:

LELY ENTERPRISES AG, CH

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : DISPOSITIF DE SEPARATION DU LAIT TIRE D'UN ANIMAL LAITIER

(54) Title: A DEVICE FOR SEPARATING MILK FROM DAIRY ANIMALS

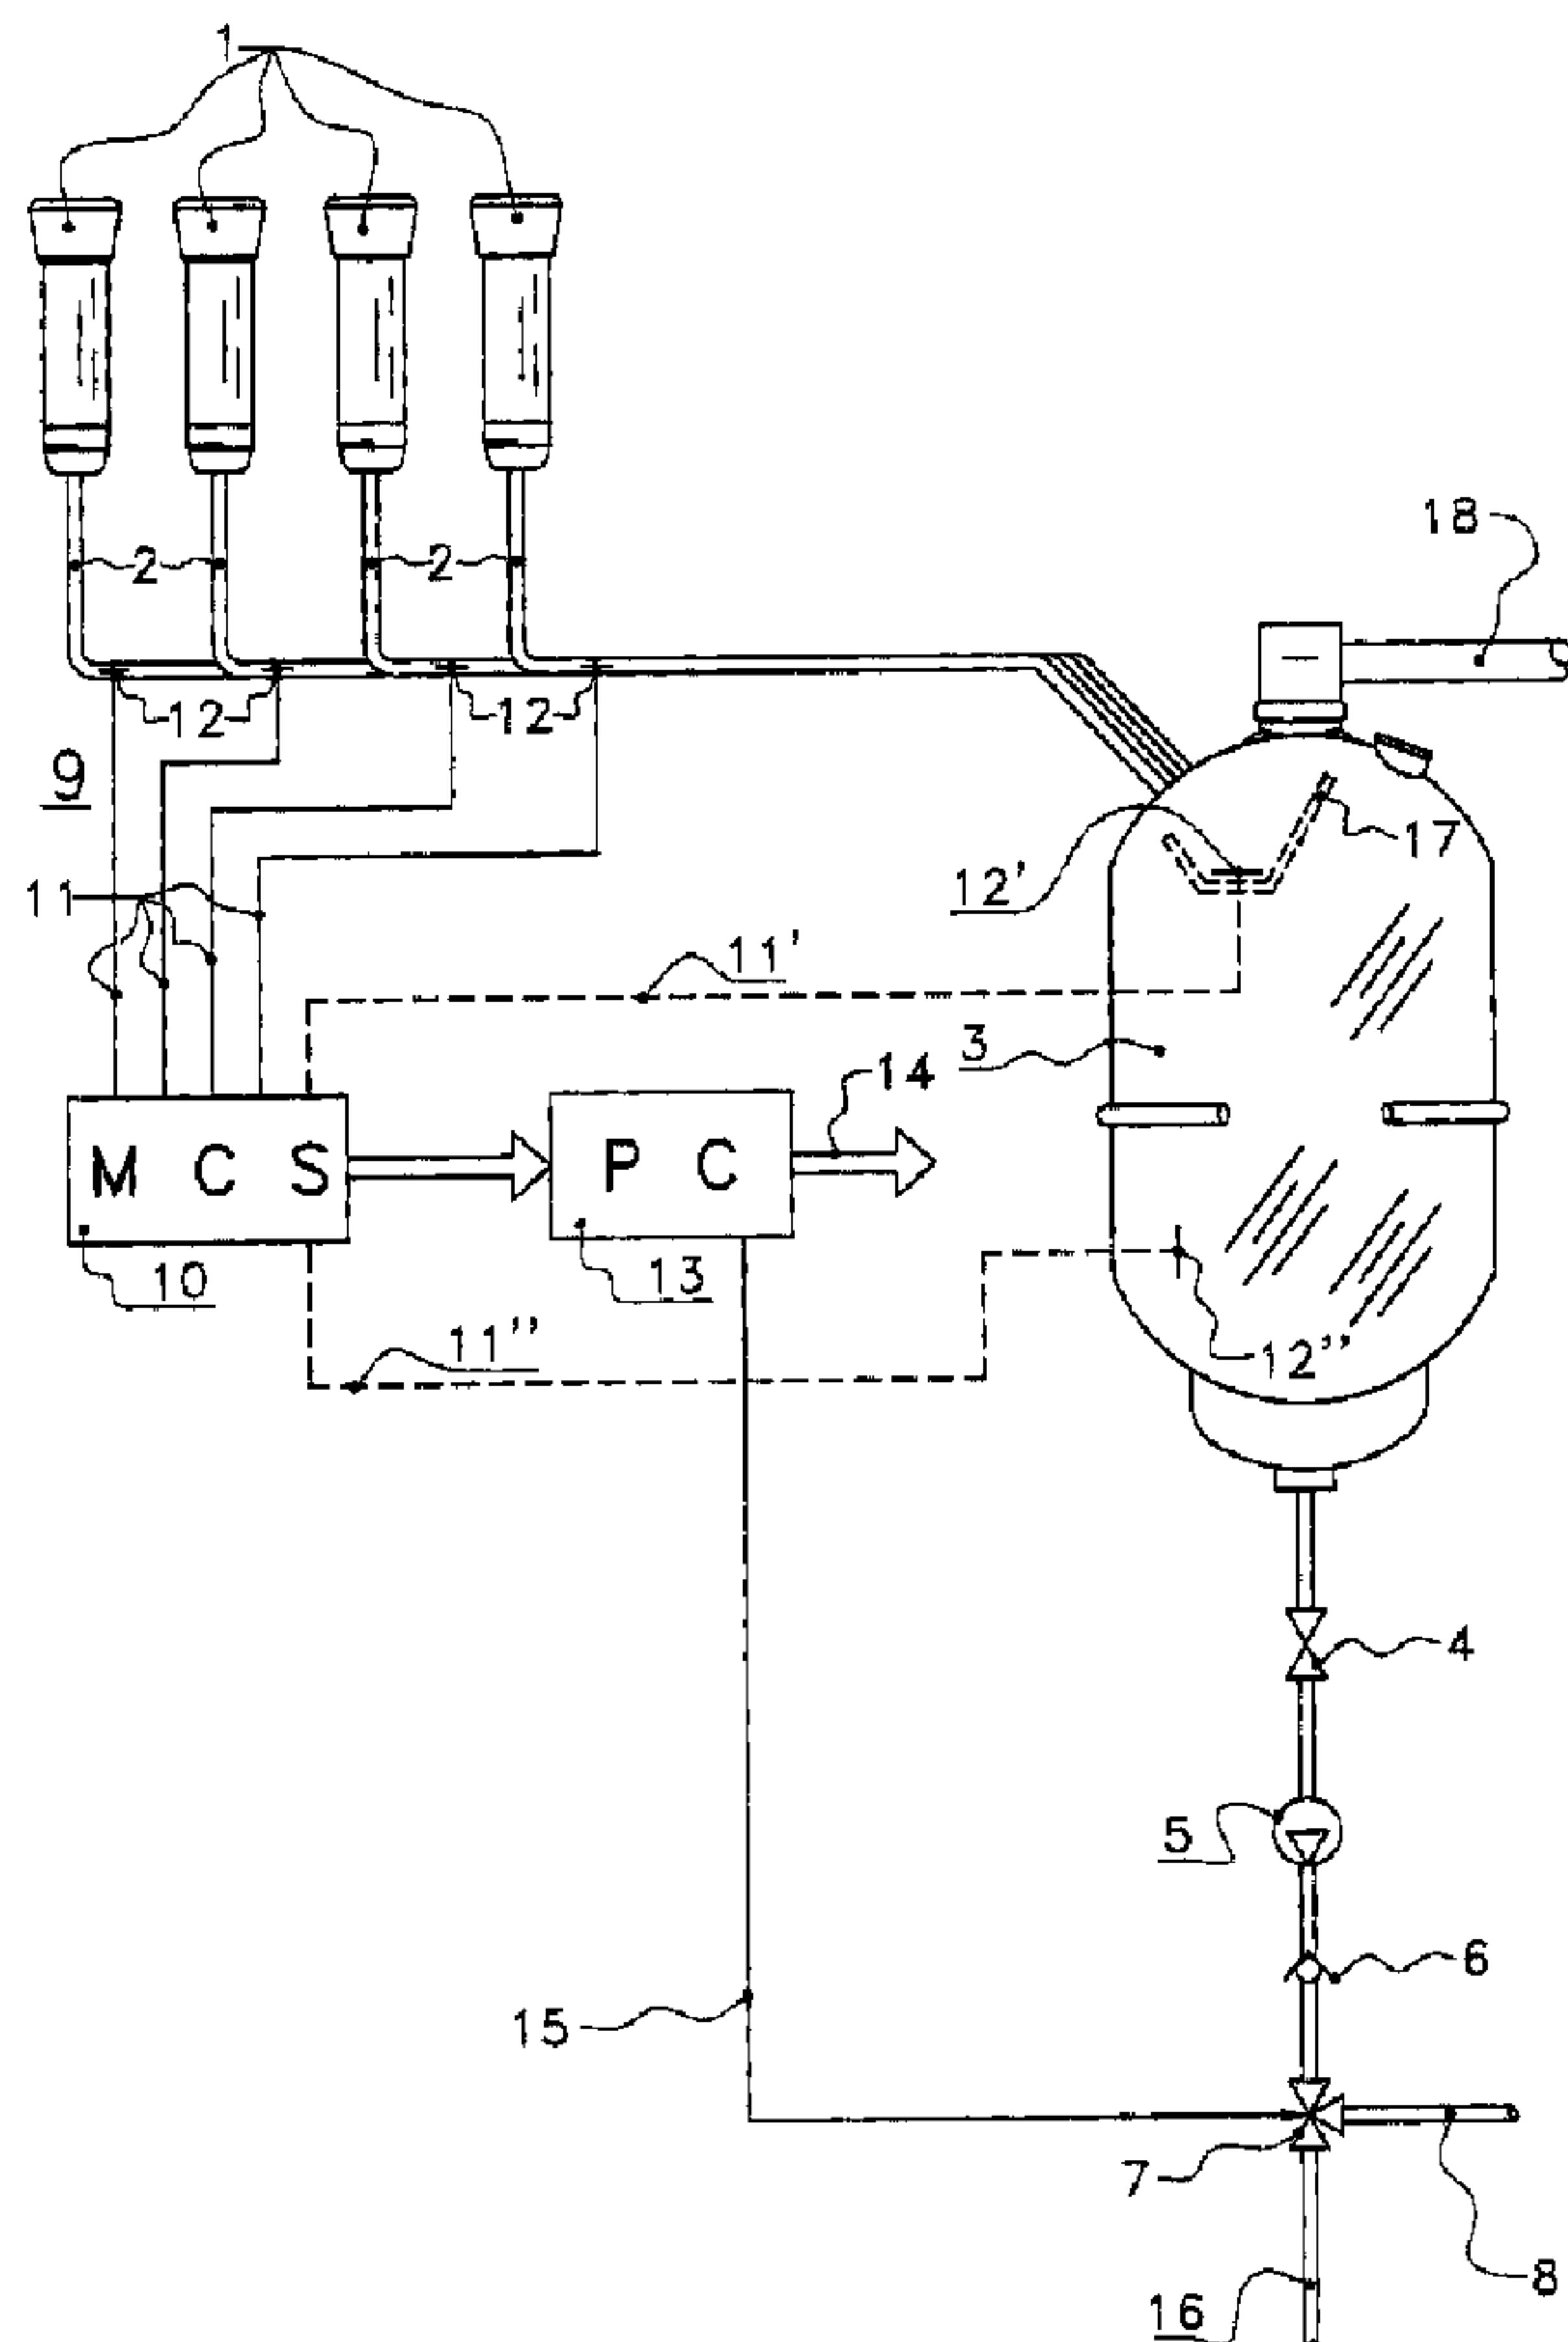

(57) Abrégé/Abstract:

A device for separating milk obtained from a dairy animal. Said device is provided with a processing device, with a measuring device for measuring at least one milk variable during a milking run of a dairy animal and for issuing a signal indicative of the

(57) Abrégé(suite)/Abstract(continued):

measured value to the processing device. The processing device is provided with a memory suitable for containing a reference value for the milk variable, and with a comparing device for comparing the measured value of the milk variable with the reference value and for issuing a comparison signal. The device separates milk in dependence on the comparison signal. The measuring device is suitable for measuring during the entire course of the milking run the value of the milk variable for obtaining a momentary measurement pattern of the milk variable. The memory of the processing device is suitable for containing a reference measurement pattern, and the comparing device is suitable for comparing the momentary measurement pattern of a milk variable with the reference measurement pattern of the milk variable and for issuing a comparison signal indicative of the comparison result.

ABSTRACT

A DEVICE FOR SEPARATING MILK FROM DAIRY ANIMALS

5 A device for separating milk obtained from a dairy animal. Said device is provided with a processing device, with a measuring device for measuring at least one milk variable during a milking run of a dairy animal and for issuing a signal indicative of the measured value to the 10 processing device. The processing device is provided with a memory suitable for containing a reference value for the milk variable, and with a comparing device for comparing the measured value of the milk variable with the reference value and for issuing a comparison signal. The device separates 15 milk in dependence on the comparison signal. The measuring device is suitable for measuring during the entire course of the milking run the value of the milk variable for obtaining a momentary measurement pattern of the milk variable. The memory of the processing device is suitable for containing a 20 reference measurement pattern, and the comparing device is suitable for comparing the momentary measurement pattern of a milk variable with the reference measurement pattern of the milk variable and for issuing a comparison signal indicative of the comparison result.

25

(Figure 1)

24268-455

1

A DEVICE FOR SEPARATING MILK FROM DAIRY ANIMALS

The present invention relates to a device for separating milk from a dairy animal.

5

Such a device is known from EP-A-1000535. The device known therefrom is provided with a measuring device in the form of a colour measuring system provided with one or more sensors comprising one or more sources irradiating the 10 milk successively or simultaneously with radiation of one or more different wavelengths and/or different intensities, while, during at least a part of the time when the sources are in their switched-on position, one or more receivers establish the radiation intensity during a time interval. 15 When the obtained measurement data indicate that the colour of the measured milk deviates from normal values, the relevant milk is separated. However, it has appeared that the known device sometimes draws a wrong conclusion on the basis of the colour measurements, so that e.g. suitable milk is not 20 used for being processed further, but is discharged.

It is an object of some embodiments of the invention to provide a device for separating milk from a dairy animal by means of which the decision whether or not milk obtained is suitable for being processed further can be taken in an accurate 25 manner.

24268-455

1a

According to one aspect of the invention, there is provided a device for separating milk obtained from a dairy animal, said device being provided with a processing device, with a measuring device for measuring at least one milk variable during a milking run of the dairy animal and for issuing a signal indicative of the measured value to the processing device, and the processing device being provided with a memory suitable for containing a reference value for the milk variable, and with a comparing device for comparing the measured value of the milk variable with the reference value and for issuing a comparison signal, the device separating milk in dependence on the comparison signal, wherein the measuring device is suitable for measuring during an entire course of the milking run the value of the milk variable for obtaining a momentary measurement pattern defining a variation of the milk variable during the milking run, and wherein the memory of the processing device is suitable for containing a reference measurement pattern, and wherein the comparing device is suitable for comparing the momentary measurement pattern of the milk variable with the reference measurement pattern of the milk variable and for issuing the comparison signal indicative of the comparison result.

By using not only a certain value, but the entire pattern i.e. course of the variable during the milking run for determining whether or not milk obtained should be processed further, it is possible to take a still more accurate decision whether or not the milk obtained should be processed further. Comparing measurement patterns with reference patterns appears to

result in more correct decisions than exclusively comparing one single measured value.

In an embodiment of a device according to the invention the processing device is provided with a memory, 5 said memory being suitable for storing the measurement pattern respectively the reference measurement pattern.

The processing device is in particular provided with an averaging device for determining the average measurement pattern of a milk variable, it being advantageous 10 that the memory is suitable for storing the average measurement pattern. Such an average measurement pattern may excellently be used for determining deviations from this average pattern, which may be an indication that the condition of the dairy animal is different from normal or 15 that the milk produced by the dairy animal is different from normal. In other words the average measurement pattern constitutes the reference pattern. Such an average measurement pattern appears to provide per animal a more accurate indication of the deviation than a predetermined 20 reference value. Especially when the average is a so-called progressive average, i.e. an average over e.g. the last ten milking runs (another number is possible as well), it is possible to take a correct decision.

Although for all the animals the same thresholds 25 may be used, it is advantageous when a memory of the processing device contains an upper threshold pattern and/or a lower threshold pattern for a relevant measurement pattern of a milk variable for an animal.

In a further embodiment of a device according to 30 the invention, the device being provided with a milk line system comprising a number of lines and with at least one device controlled by the comparison signal for guiding milk flowing through the milk line system to a relevant line, it is possible to discharge automatically unsuitable milk or to 35 convey suitable milk for being processed further.

For the purpose of enabling visual checking it is advantageous when the device comprises a displaying device for displaying the comparison signal. When the device comprises a device for generating a warning, said warning device being controlled by the comparison signal, it is possible, in certain situations, to give a warning to the manager of the device, e.g. in the form of a sound signal.

The measuring device preferably comprises a colour sensor measuring system for measuring the intensity of at least one wavelength band, in particular in the visible wavelength range, of the milk obtained from the dairy animal, the variable being the intensity of the wavelength band. With the aid of the colour sensor measuring system especially the intensity of the separate colours in the milk obtained from the separate udder quarters is established. Therefore, in this embodiment the variable is constituted by the colour of the milk obtained.

In an embodiment of a device according to the invention the measuring device is constituted by a flow sensor for measuring the flow of the milk obtained during the milking run. The flow sensor preferably measures the flow of the milk obtained from the separate udder quarters.

In a further embodiment of a device according to the invention the measuring device is constituted by a conductivity meter known per se for measuring the conductivity of the milk obtained during the milking run. The conductivity meter preferably measures the conductivity of the milk obtained from the separate udder quarters.

In a still further embodiment of a device according to the invention the measuring device is constituted by a thermometer for measuring the temperature of the milk obtained during the milking run. The thermometer preferably measures the temperature of the milk obtained from the separate udder quarters.

In another further embodiment of a device according to the invention the measuring device is constituted by a component meter for measuring the quantity of a component of the milk obtained during the milking run, such as fat, 5 protein, urea, bacteria, sugars, free fatty acids, germs, etc. The component meter preferably measures the components of the milk obtained from the separate udder quarters.

In a further embodiment of a device according to the invention the device is provided with a means for 10 determining the period between two successive milking runs of the dairy animal, and the memory is suitable for containing a reference pattern depending on the measured period, respectively an upper threshold pattern and/or a lower threshold pattern depending on the measured period. This 15 embodiment of the invention is based on the insight that the measured value of the variable depends on the measured period, also called interval, even when the condition of the dairy animal remains unchanged. By including, according to the invention, various reference values for the variable in 20 the memory, the reference values depending on the measured period, a more accurate comparison of the measured values can take place, so that it is possible to take a correct decision whether or not the milk is suitable for being processed further. Moreover, after comparison of the measured values 25 with the reference values, it is possible to draw more correct conclusions in relation to the condition respectively the health of the dairy animal. According to the invention, by period is meant in particular a period of time measured by a clock between two successive milking runs or a number of 30 dairy animals milked between the two successive milking runs, said number being counted by a counter. Besides, another time-dependent variable may be measured as well, e.g. the total quantity of milk produced between the two successive milking runs.

The invention will be explained hereinafter in further detail with reference to an embodiment shown in the drawing, in which:

5 Figure 1 is a schematic view of a device for milking a cow, provided with a colour sensor measuring system;

Figure 2 is a schematic view of a milking box with a milking robot provided with means for measuring a variable in relation to the cow, and

10 Figure 3 shows a number of normal measurement patterns for particular cows.

Figure 1 shows four teat cups 1 to be connected to the teats of an animal to be milked, the milk discharge lines 15 2 of said teat cups 1 debouching into a milk glass 3. To the milk glass 3 there is further connected a vacuum line 18 for the purpose of applying a vacuum in the milk glass 3 itself, in the milk discharge lines 2 and in the teat cups 1, said vacuum being required for keeping the teat cups connected to 20 the teats of the animal, for enabling milking and for separating milk and air present therein from each other in the milk glass 3. From the milk glass 3 the milk obtained is discharged via a valve 4, a pump 5, a non-return valve 6 and a three-way valve 7 through a line 8 to a not further shown 25 milk tank.

Figure 1 further shows a colour sensor measuring system 9, said measuring system comprising a colour intensity processing unit (MCS) 10, to which four sensors 12 are connected via glass fibre cables 11. Said sensors 12 are 30 disposed in the milk lines 2 for establishing the intensity of a number of defined colours in the milk and for supplying signals representing these intensities to the processing unit 10. As a colour sensor measuring system may be used the Modular Color Sensor system CS1 of Stracon Messsysteme GmbH, 35 Im Camisch 10, Kahla. The sensors used in this system are

sensitive to frequencies in frequency bands for red (R), green (G) and blue (B). Therefore there are issued three signals per measurement, which may be considered as intensity values for these three colours.

5 Although until now the opinion prevailed that for milk of a constant composition these three intensity values have a fixed mutual relation, said relation depending i.a. on the impurities and components in the milk, it has appeared that for certain dairy animals the relation between the three 10 intensity values depends on the interval, in other words depends on the period between two successive milking runs. The period appears to be in particular a period of time between the two successive milking runs, but alternatively there appears to be a relation between the number of cows 15 milked respectively the quantity of milk produced and the intensity values.

 The colour intensity processing unit (MCS) 10 comprises a computer (PC) 13 (shown in the figure separately from the colour intensity processing unit (MCS) for the sake 20 of clearness), in which for each animal to be milked there is a file in which all data required for milking a relevant animal are stored.

 During the entire course of a milking run also the obtained three intensity values of the relevant colours in 25 the milk are stored. These intensity values stored at each milking run thus constitute a colour measurement pattern. The progressive average may be determined from the colour measurement patterns obtained for a certain animal during a defined number (e.g. ten, but another number is possible as 30 well) of the last milking runs carried out. Upon averaging preferably milking runs with equal intervals are used. The colour patterns obtained at a next milking run with an equal interval may be compared with this progressive average colour measurement pattern, i.e. the last obtained colour 35 measurement pattern of each of the three colours may be

compared with the corresponding colour measurement pattern (preferably belonging to the same interval), recorded in the computer as a progressive average. In other words, the colour measurement patterns are compared both mutually and with 5 corresponding colour measurement patterns recorded during one or more previous milking runs (preferably with an equal interval). This comparison process takes place in the computer 13 which also functions as a comparing device. Subsequently the results of this comparison process may be 10 displayed on a displaying device in such a manner that the presence of certain substances, such as impurities, in the milk can be read directly therefrom. These results may be supplied via the line 14 to a screen or to a printer.

Instead of determining the progressive average of 15 the colour measurement pattern for each of the colours, it is also possible to determine in another manner for each colour a calibration pattern, such as in particular a reference pattern, respectively a lower threshold pattern or an upper threshold pattern. It is possible to apply calibration 20 patterns which could hold for the milk obtained from all the animals or from a group of animals. In that case it will not be necessary to dispose a sensor 12 in each of the milk discharge lines 2, but an overflow reservoir 17 may be disposed in the milk glass 3, in which overflow reservoir 25 there is provided such a sensor 12' which is connected to the processing unit 10 via a glass fibre cable shown by a "dashed" line 11'. As a further alternative a sensor 12" may be disposed in the lower part of the milk glass 3. Also in the latter case said sensor has to be connected to the 30 processing unit 10 via a glass fibre cable 11".

However, in all situations it applies that, when inadmissible quantities of undesired substances appear to be present in the milk, the computer 13 issues a signal over the line 15 to the three-way valve 7, via which three-way valve 7 35 and the discharge line 16 connected thereto the milk

containing these undesired substances may be discharged separately.

When for example blood has come into the milk, the colour measurement pattern issued by the sensor 12 for the 5 colour red, will be a different pattern than when no blood is present in the milk. This colour measurement pattern will then be higher than the colour measurement pattern established on the basis of the progressive average or higher than the calibration pattern applied (preferably in 10 dependence on the comparison with patterns belonging to the same interval). Also when there are no impurities in the milk, alterations in the concentration of substances normally being present in the milk may still be established.

It has further appeared that the colour measurement 15 patterns for the three colours have a different mutual ratio for different animals. Therefore it is advantageous to determine the colour measurement patterns for each animal separately at each milking run and to compare them with calibration patterns or, in particular, with progressive 20 average colour measurement patterns established for this specific animal (and preferably belonging to the same interval).

An example of the dependence of the measured colour 25 intensity (and consequently of the measured colour pattern) on the interval, said dependence having been proved clearly by means of the above-mentioned colour sensor measuring system, is given hereinafter. It has further appeared that this dependence is reproducible. For a particular cow it has 30 appeared that the intensity of the blue frequency band rises in a particular manner when the period of time, the interval, increases and/or the number of cows having been milked and/or the quantity of milk produced increases. It has further appeared that the intensity of the green frequency band shows a certain, slight fall at an increasing interval. The 35 intensity of the red frequency band showed a certain slight

rise. For this cow the total sum of the intensities appeared to rise to a maximum value at an increasing interval and to fall via a particular pattern at a further increasing interval. The value of the intensity in the red frequency 5 band reduced by the value of the blue frequency band appeared to show with this cow a falling pattern at an increasing interval, whereas the quotient of the intensity in the red frequency band and the intensity in the green frequency band rose to a maximum value at an increasing interval and 10 remained constant at a further increase of the interval. It will be obvious that upon comparing the milk obtained from this cow, at each interval there has to be taken a different reference value or pattern to decide whether or not the milk obtained is suitable for being processed further.

15 It has further appeared that the colour intensity may differ per quarter, so that it is advantageous to compare the colour measurement pattern per animal, per quarter, and preferably per interval, in order to be able to decide whether or not milk obtained from a quarter should be 20 processed further.

It has further appeared that the flow pattern of the milk obtained during the milking run differs per animal and further depends on the interval. Also here, to be able to take a correct decision whether or not the milk obtained 25 should be processed further, the measured pattern of the flow has to be compared with a reference pattern for that interval. It is noticed that a flow sensor for measuring the flow of the milk obtained during the milking run is known per se. In particular the flow sensor measures the flow pattern 30 of the milk obtained from the separate udder quarters.

It has further appeared that the conductivity pattern over the entire milking run may be different per animal or per group of animals, and may provide a more accurate decision whether or not the milk obtained should be 35 processed further than only one single measured value.

Besides, the conductivity of the milk obtained for the mentioned cow rises at an increasing interval. A conductivity meter for measuring the conductivity pattern of the milk obtained during the milking run, in particular per quarter,
5 may then be used to take a correct decision whether or not the milk obtained (possibly per quarter) should be processed further.

It has further appeared that the temperature of the milk obtained for the mentioned cow rises at an increasing
10 interval. In that situation a thermometer may be used for measuring the temperature pattern of the milk obtained during the milking run, in particular for measuring the temperature pattern of the milk obtained from the separate udder quarters, in order to take a correct decision whether or not
15 the milk obtained (possibly per quarter and/or per interval) should be processed further.

Moreover it has appeared that for the mentioned cow the fat content of the milk obtained falls according to a certain curve at an increasing interval. Also for other
20 components there appears to be a dependence between the quantity and the interval. A component meter for measuring the quantity pattern of a component of the milk obtained during the milking run, such as fat, protein, urea, bacteria, sugars, free fatty acids, germs, etc., in particular the
25 component pattern of the milk obtained from the separate udder quarters, may then be used for taking a correct decision whether or not the milk obtained (possibly per quarter and/or per interval) should be processed further.

The above-mentioned relations have not only been
30 found with a particular cow, but all cows appear to produce milk of which the measurable variables show a cow-dependent pattern. A certain pattern for one cow may then indicate milk suitable for being processed further, whereas the same pattern measured on milk obtained from another cow may

indicate milk which is not suitable for being processed further.

As already mentioned above for colour intensity measurement, according to the invention a measured measurement pattern (also called measured curve) of the variable is used to decide during the milking run whether or not milk obtained should be processed further. This applies in particular to the pattern of colour, conductivity and flow during a milking run, although the other above-mentioned variables also show a pattern during the milking run, which pattern may be used for obtaining a correct decision whether or not milk obtained is suitable for being processed further.

Examples of normal measurement patterns measured with different dairy animals in relation to colour and conductivity, which normal measurement patterns indicate milk suitable for being processed further, are shown in Figure 3.

Such a normal measurement pattern may be a predetermined measurement pattern, or an average measurement pattern for an animal (preferably per interval). To that end there is provided an averaging device for determining the average of a measurement pattern of a milk variable. Besides, other reference patterns may be used as well (for example an upper threshold pattern and/or lower threshold pattern).

Figure 2 shows schematically a milking box 19 with a milking robot 20, to which the invention applies in particular. In this figure various measuring devices for measuring the pattern of the values of variables in relation to the cow are shown schematically.

For the purpose of measuring the health of the cow 22, further the heart beat is measured by means of a band 21 including a heart beat meter around the leg or the abdomen of the cow 22. Alternatively or additionally a heart beat meter known per se may be provided on the cow 22 near a place where an artery is located, in this connection the udder or an ear of the cow may be taken into consideration. A suitable heart

monitoring system is for example obtainable at Polar Electro Oy, Helsinki, Finland. Alternatively a heart beat meter may be included in at least one of the teat cups 23.

In the milking box 19 there may be disposed one or 5 more cameras 24 for observing and measuring the activity of the cow 22, which may also be used for monitoring the condition of health of the cow 22. The video pictures are analysed by movement recognition equipment known per se for determining activity parameters such as stepping, kicking and 10 the like. To that end the picture is compared per cow 22 with stored historical data regarding the cow 22. There may further be provided a step counter 25, a muscle contraction meter 26 and/or a muscle vibration meter 27 for determining 15 the activity of the cow 22. Besides, the milk yield is measured by a quantity meter 32 or yield meter.

A flow sensor 28 measures the flow pattern of the milk obtained during a milking run. A conductivity meter 29 measures the conductivity pattern of the milk obtained during a milking run. A thermometer 30 measures the temperature pattern of the milk obtained during a milking run. A component meter 31 measures the component quantity pattern, e.g. protein and fat, in the milk obtained during the milking run. All these measurement data are transmitted to or read by a processing device 33 comprising a computer having a memory. 20 Besides the measurement data the processing device 33 preferably also stores the period of time elapsed since the same animal has been milked. Alternatively the number of cows milked or the quantity of milk produced is stored. To that end the processing device 33 comprises a clock (not explicitly shown, but implicitly present in the computer) for determining the period of time between two successive milking runs of the dairy animal. Alternatively there may be provided 25 a counter for counting the number of cows milked or a meter for measuring the quantity of milk produced. In the memory of the computer of the processing device 33 reference patterns 30

are stored per interval, per animal or per group of animals, possibly per quarter, and per milk variable, respectively these reference patterns are generated by the system itself. The processing device 33 comprises a (non-shown) comparing device for comparing the measured pattern of the variable with the stored reference patterns. The comparing device issues a comparison signal, the value of which depends on the comparison result, and is thus indicative of the comparison result. This comparison signal may be displayed on a displaying device, such as a screen 34. As described above, the comparison signal may also be used for controlling a valve or the like, so that the milk obtained will be processed further or not. Should the comparison signal indicate a deviation, then it is also possible for the comparison signal to control a device for generating a warning (such as e.g. a loudspeaker) for issuing a signal (e.g. a sound) which is perceptible by a manager of the device.

It will be obvious that the measurement patterns may be used separately, but that also combinations of measurement patterns of different variables may be used for determining whether or not milk should be processed further (or for determining whether the condition of a dairy animal is within the standards). Thus a weight factor may be given to certain parameters or comparison results may be given for combining the measurement patterns obtained in a desired manner.

As described, Figure 2 shows a side view of a milking box 19 with a cow 22 present therein. The milking box 19 is provided with a milking robot 20 with teat cups 23 which are automatically connected to the teats of the cow 22 by means of the milking robot 20. Near the front side of the milking box 19 there is further disposed a feeding trough to which concentrate may be supplied in metered quantities.

Other elements of the milking box and the robot are not shown in the figure for the sake of clearness.

The invention further relates to a method of separating milk from animals, such as cows, said method comprising the step of measuring a value of at least one milk variable during a milking run of an animal, the step of generating a measurement signal indicative of the measured value of the milk variable, the step of comparing the measured value with a reference value and the step of separating the milk in dependence on the comparison result, characterized in that the method comprises the step of measuring during the entire course of the milking run the value of the milk variable for obtaining a measurement pattern of the milk variable, and the step of comparing the obtained measurement pattern with a reference measurement pattern.

24268-455

15

CLAIMS:

1. A device for separating milk obtained from a dairy animal, said device being provided with a processing device, with a measuring device for measuring at least one milk variable during a milking run of the dairy animal and for issuing a signal indicative of the measured value to the processing device, and the processing device being provided with a memory suitable for containing a reference value for the milk variable, and with a comparing device for comparing the measured value of the milk variable with the reference value and for issuing a comparison signal, the device separating milk in dependence on the comparison signal, wherein the measuring device is suitable for measuring during an entire course of the milking run the value of the milk variable for obtaining a momentary measurement pattern defining a variation of the milk variable during the milking run, and wherein the memory of the processing device is suitable for containing a reference measurement pattern, and wherein the comparing device is suitable for comparing the momentary measurement pattern of the milk variable with the reference measurement pattern of the milk variable and for issuing the comparison signal indicative of the comparison result.
2. The device as claimed in claim 1, wherein the memory of the processing device is suitable for storing the measurement pattern.
3. The device as claimed in claim 1 or 2, wherein the processing device is provided with an averaging device for determining an average measurement pattern of the milk variable.
4. The device as claimed in claim 3, wherein the memory is suitable for storing the average measurement pattern.
5. The device as claimed in any one of claims 1 to 4, wherein the memory of the processing device contains an upper threshold pattern and/or a lower threshold pattern for a relevant measurement pattern of a milk variable for a dairy animal.

24268-455

16

6. The device as claimed in claim 5, wherein the device is provided with a milk line system comprising a number of lines and at least one device controlled by the comparison signal for guiding milk flowing through the milk line system to a relevant line.

5 7. The device as claimed in any one of claims 1 to 6, wherein the device comprises a displaying device for displaying the comparison signal.

8. The device as claimed in any one of claims 1 to 7, wherein the device comprises a device for generating a warning, said warning device being controlled by the comparison signal.

10 9. The device as claimed in any one of claims 1 to 8, wherein the measuring device comprises a colour sensor measuring system for measuring the intensity of at least one wavelength band of the milk obtained from the dairy animal, the variable being the intensity of the wavelength band.

10. The device as claimed in claim 9, wherein the at least one wavelength band is in the visible wavelength range.

15 11. The device as claimed in claim 9 or 10, wherein with the aid of the colour sensor measuring system, the intensity of the separate colours in the milk obtained from the separate udder quarters is established.

12. The device as claimed in any one of claims 1 to 11, wherein the measuring device is constituted by a flow sensor for measuring the flow of the milk obtained during the milking run.

20 13. The device as claimed in claim 12, wherein the flow sensor measures the flow of the milk obtained from the separate udder quarters.

14. The device as claimed in any one of claims 1 to 13, wherein the measuring device is constituted by a conductivity meter for measuring the conductivity of the milk obtained during the milking run.


25 15. The device as claimed in claim 14, wherein the conductivity meter measures the conductivity of the milk obtained from the separate udder quarters.

24268-455

17

16. The device as claimed in any one of claims 1 to 15, wherein the measuring device is constituted by a thermometer for measuring the temperature of the milk obtained during the milking run.
17. The device as claimed in claim 16, wherein the thermometer measures the temperature of the milk obtained from the separate udder quarters.
18. The device as claimed in any one of claims 1 to 17, wherein the measuring device is constituted by a component meter for measuring the quantity of a component of the milk obtained during the milking run.
19. The device as claimed in claim 18, wherein the component is a fat, protein, urea, bacteria, sugar, free fatty acids, or germ.
20. The device as claimed in claim 18 or 19, wherein the component meter measures the components of the milk obtained from the separate udder quarters.
21. The device as claimed in any one of claims 1 to 20, wherein the device is provided with a means for determining the period between two successive milking runs of the dairy animal, and wherein the memory is suitable for containing a reference pattern in dependence on the measured period respectively an upper threshold pattern and/or a lower threshold pattern in dependence on the measured period.
22. The device as claimed in claim 21, wherein the means for determining the period between two successive milking runs of the dairy animal comprises a clock for measuring the period of time between the two successive milking runs.
23. The device as claimed in claim 21, wherein the means for determining the period between two successive milking runs of the dairy animal is constituted by a counter for counting the number of dairy animals having been milked between the two successive milking runs.

1/3

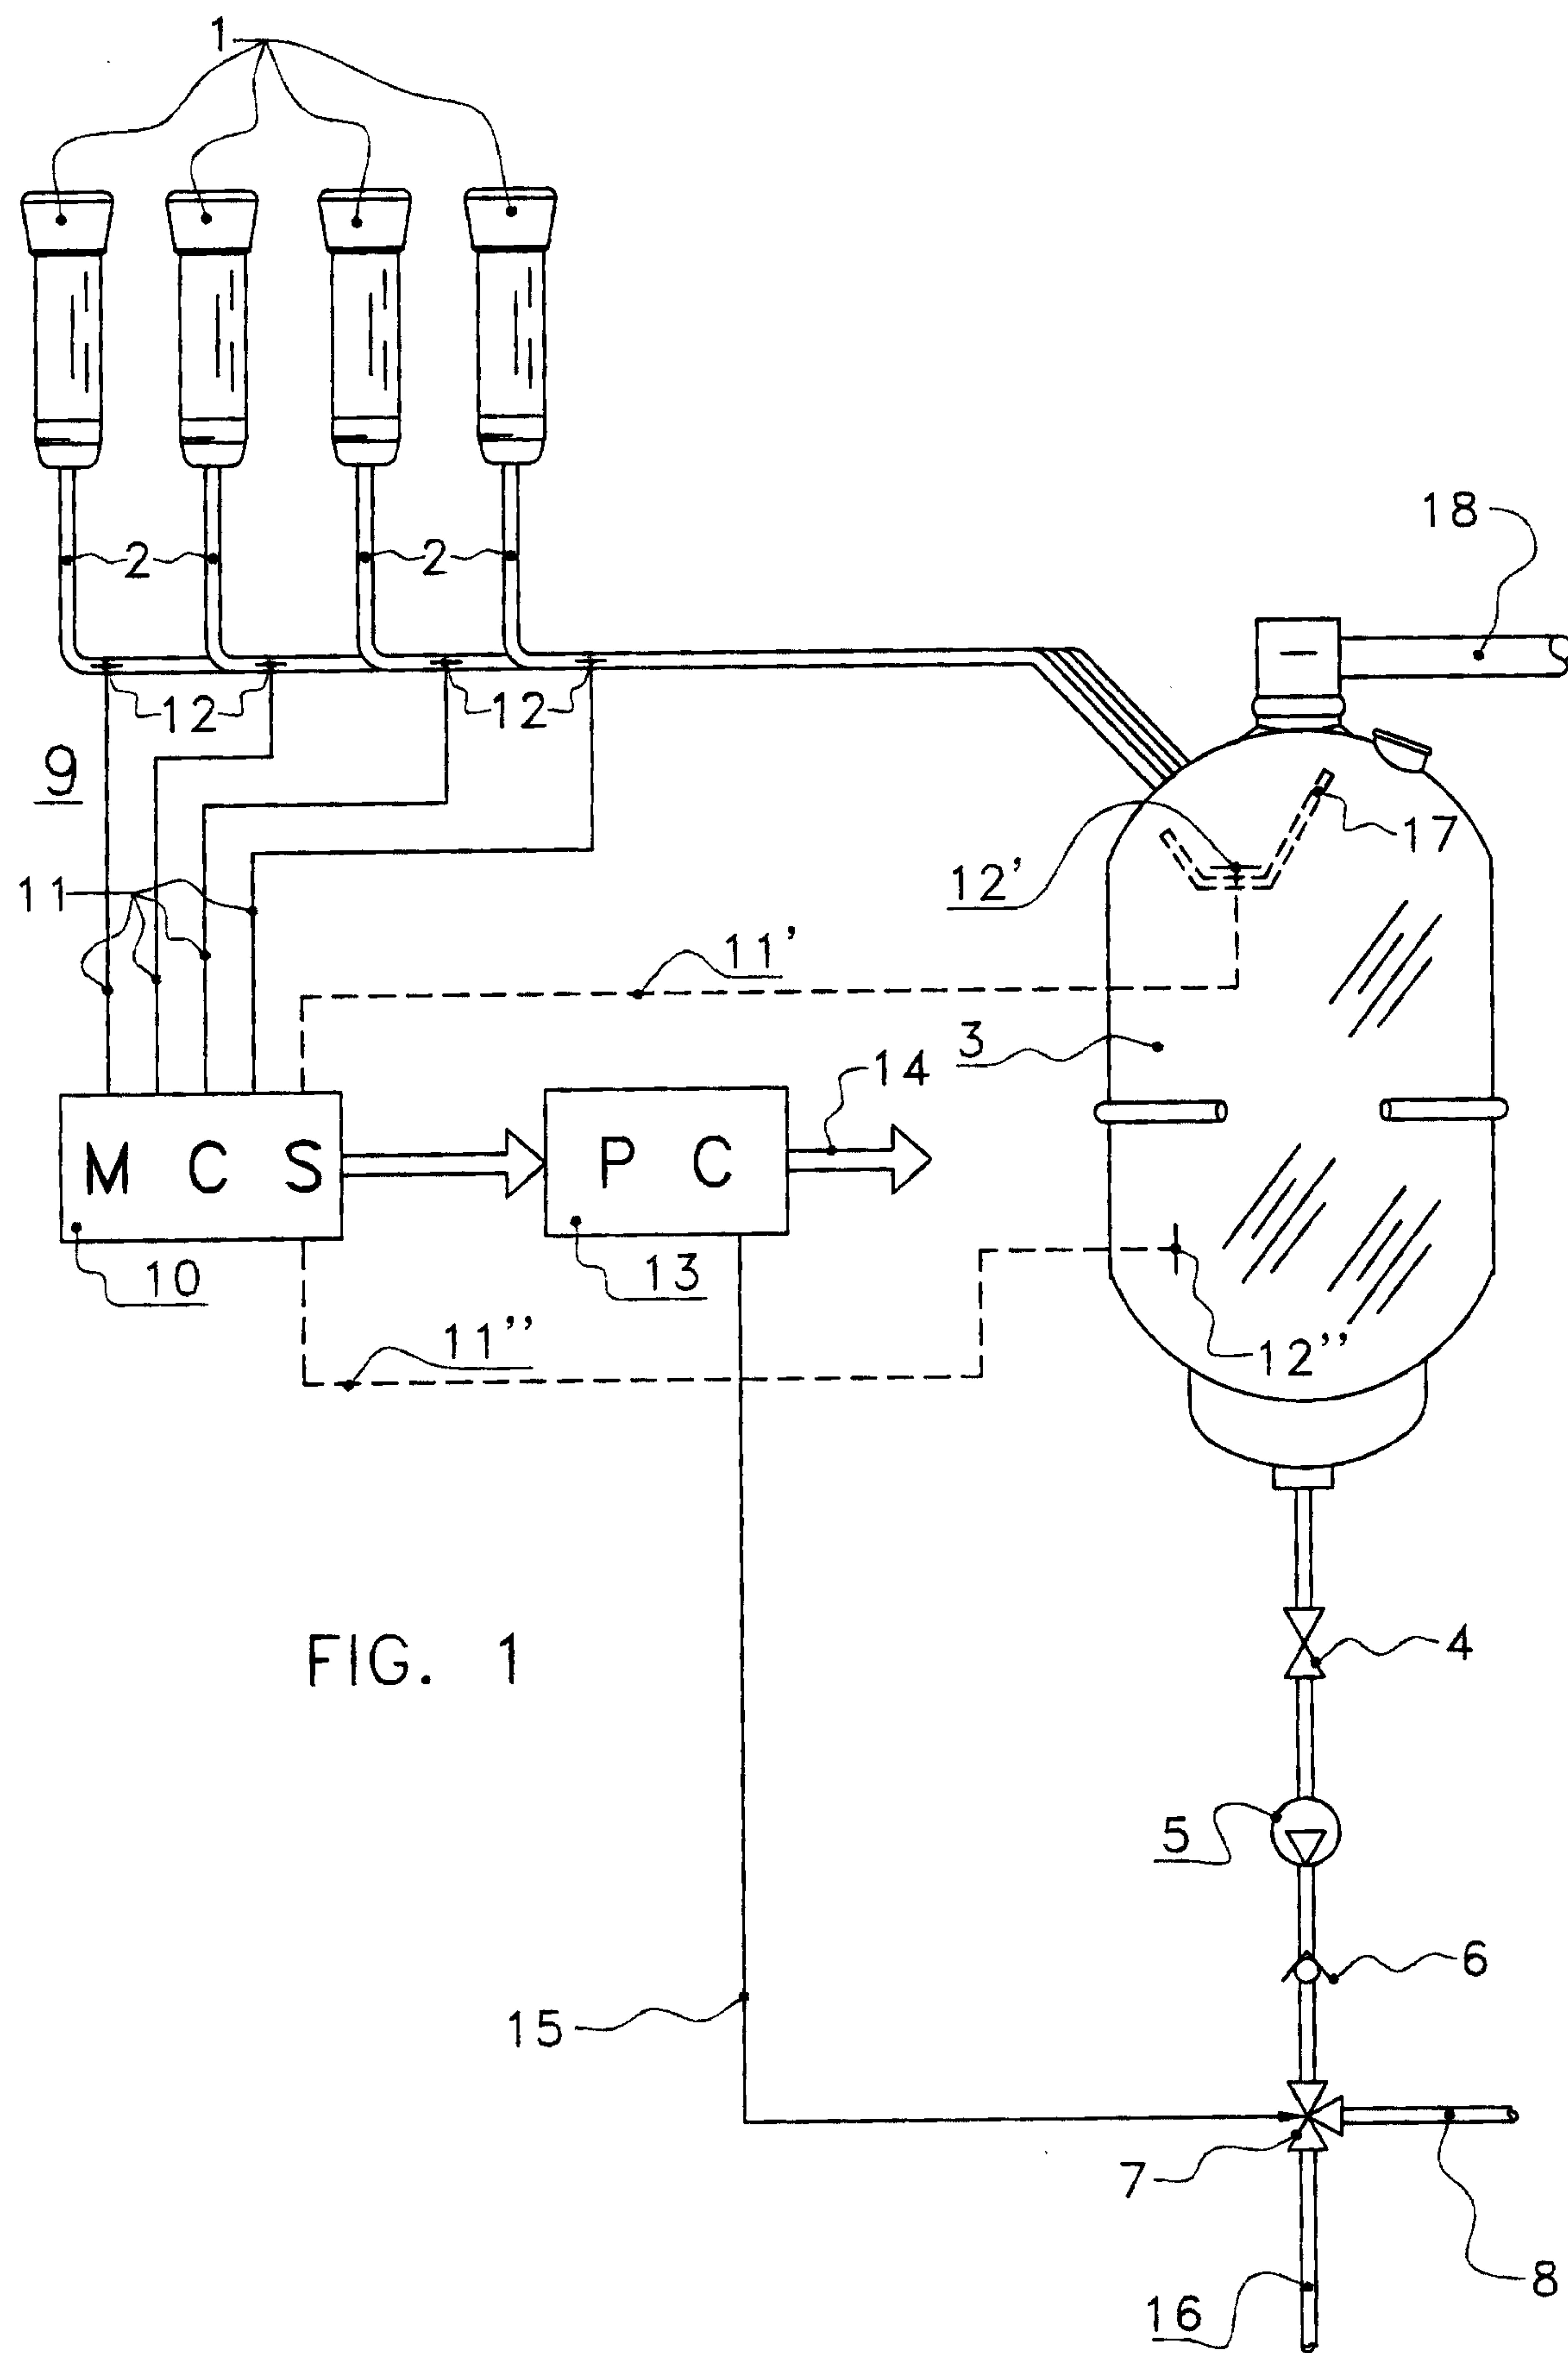

2/3

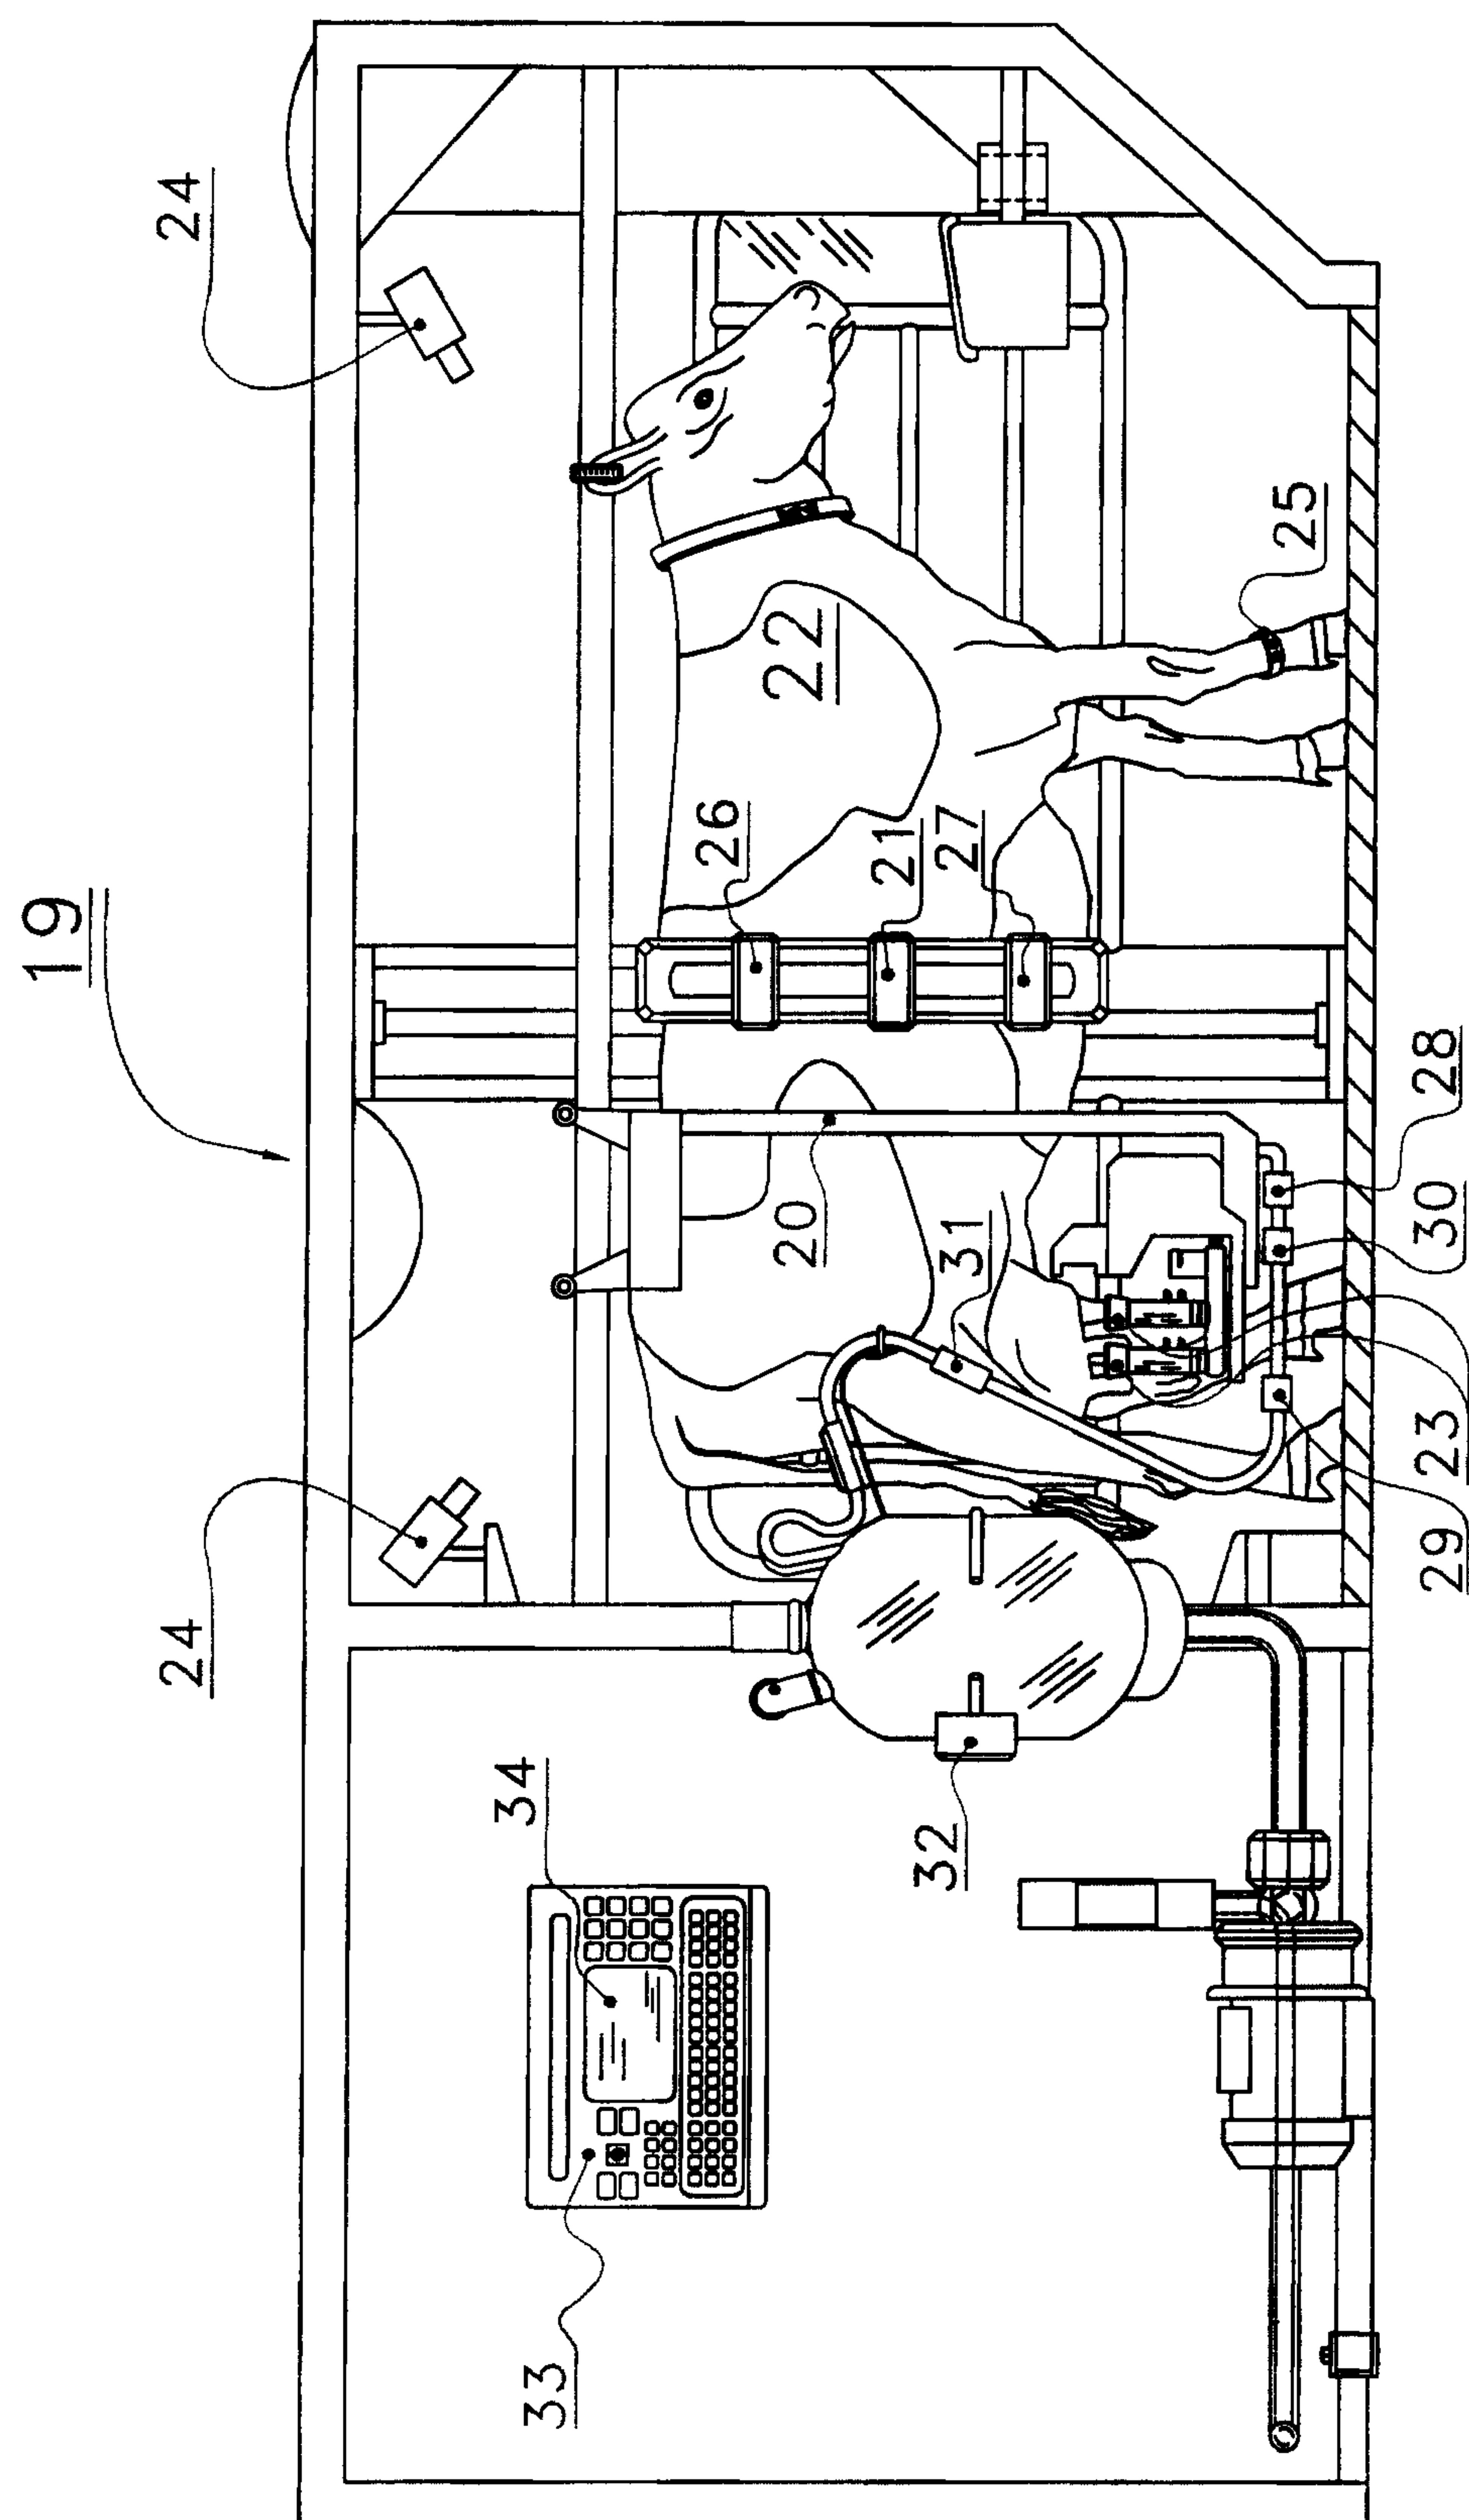


FIG. 2

3/3


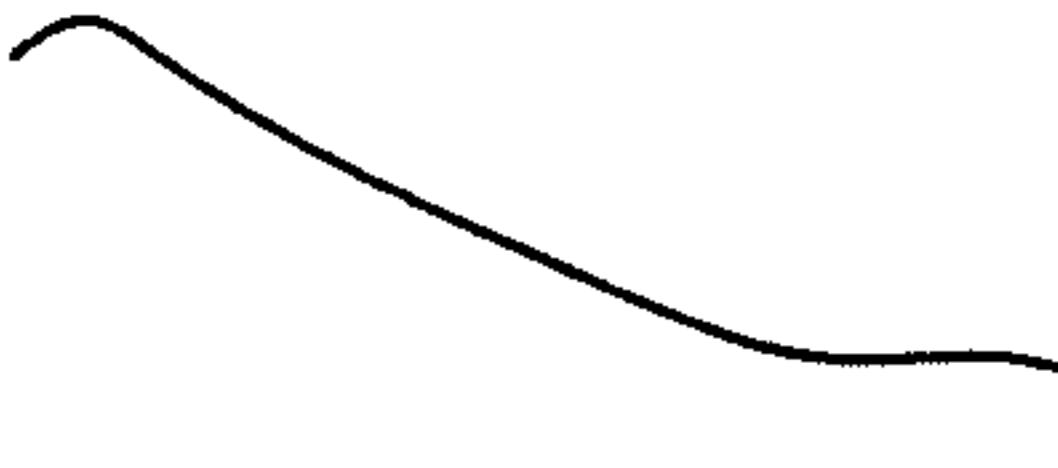
Kleur patroon (Blauw).	KOE 1.	
	KOE 2.	
	KOE 3.	
	KOE 4.	
	KOE 5.	
	KOE 6.	
Geleid- baarheids patroon.	KOE 7.	
	KOE 8.	
	KOE 9.	
	KOE 10.	
	KOE 11.	

FIG. 3

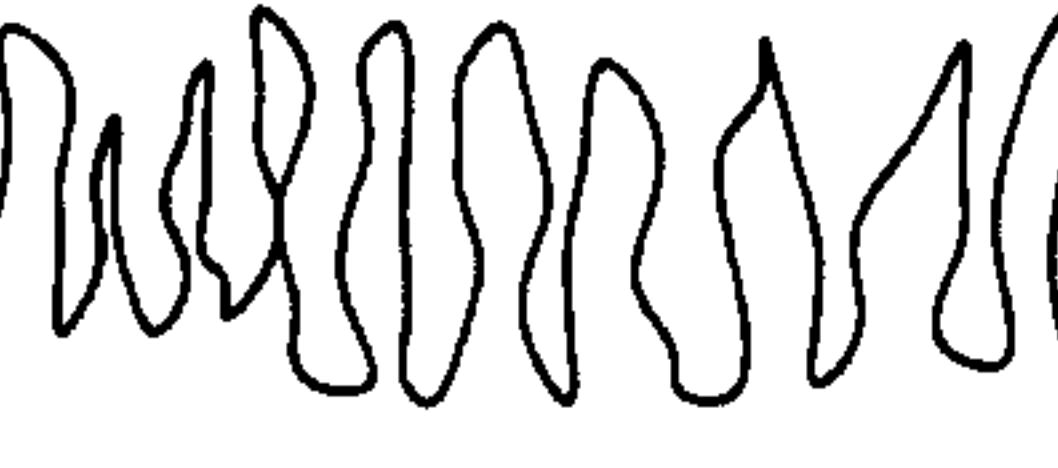