



(51) International Patent Classification:

E21B 7/04 (2006.01) *E21B 17/00* (2006.01)
E21B 7/06 (2006.01)

(21) International Application Number:

PCT/US2017/014321

(22) International Filing Date:

20 January 2017 (20.01.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/004,630 22 January 2016 (22.01.2016) US

(71) Applicant: **BAKER HUGHES INCORPORATED**
[US/US]; 17021 Aldine Westfield, Houston, TX 77073
(US).

(72) Inventors: **LEHR, Joerg**; Riethkamp 44, 29229 Celle
(DE). **SAUTHOFF, Bastian**; Bodekerstr. 61, 30161 Han-
nover (DE). **DEITERS, Arne**; Marschnerstr. 42, 30167
Hannover (DE).

(74) Agent: **CARSON, Matt, W.**; Intellectual Property Coun-
sel, Baker Hughes Incorporated, 17021 Aldine Westfield,
Houston, TX 77073 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: A METHOD AND APPLICATION FOR DIRECTIONAL DRILLING WITH AN ASYMMETRIC DEFLECTING BEND

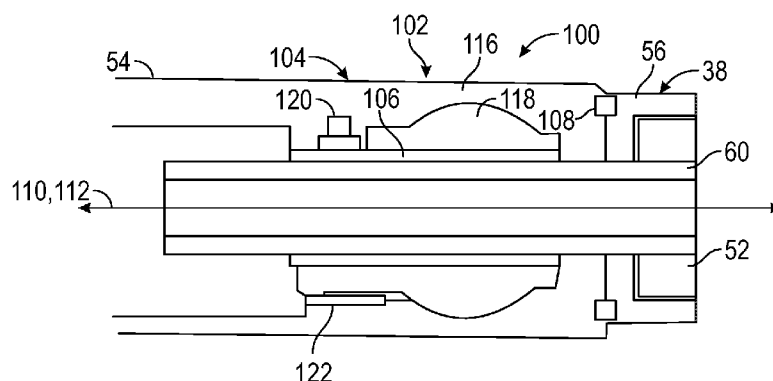


FIG. 2

(57) Abstract: A method and related apparatus for forming a wellbore in a subterranean formation includes forming a drill string that has a drill bit at a distal end, a drilling motor configured to rotate the drill bit with a drive shaft; a joint coupled to the drive shaft; and an actuator assembly displacing the drive shaft between a first and a second deflection angle, the drive shaft being movable at each of the deflection angles until a predetermined weight is applied to the bit. The method also includes conveying the drill bit through the wellbore and fixing the drive shaft in at least one of the first and the second deflection angles by applying a predetermined weight on the bit.



-1-

**TITLE: A METHOD AND APPLICATION FOR
DIRECTIONAL DRILLING WITH AN ASYMMETRIC
DEFLECTING BEND**

BACKGROUND OF THE DISCLOSURE

1. Field of the Disclosure

[0001] This disclosure relates generally to oilfield downhole tools and more particularly to drilling assemblies utilized for directionally drilling wellbores.

2. Background of the Art

[0002] To obtain hydrocarbons such as oil and gas, boreholes or wellbores are drilled by rotating a drill bit attached to the bottom of a drilling assembly (also referred to herein as a "Bottom Hole Assembly" or ("BHA")). The drilling assembly is attached to the bottom of a tubing, which is usually either a jointed rigid pipe or a relatively flexible spoolable tubing commonly referred to in the art as "coiled tubing." The string comprising the tubing and the drilling assembly is usually referred to as the "drill string." When jointed pipe is utilized as the tubing, the drill bit is rotated by rotating the jointed pipe from the surface and/or by a mud motor contained in the drilling assembly. In the case of a coiled tubing, the drill bit is rotated by the mud motor. During drilling, a drilling fluid (also referred to as the "mud") is supplied under pressure into the tubing. The drilling fluid passes through the drilling assembly and then discharges at the drill bit bottom. The drilling fluid provides lubrication to the drill bit and carries to the surface rock pieces disintegrated by the drill bit in drilling the wellbore. The mud motor is rotated by the drilling fluid passing through the drilling assembly. A drive shaft connected to the motor and the drill bit rotates the drill bit.

[0003] A substantial proportion of current drilling activity involves drilling deviated and horizontal wellbores to more fully exploit hydrocarbon reservoirs. Such boreholes can have relatively complex well profiles. The present disclosure addresses the need for steering devices for drilling such wellbores as well as

-2-

wellbore for other applications such as geothermal wells, as well as other needs of the prior art.

SUMMARY OF THE DISCLOSURE

[0004] In aspects, the present disclosure provides an apparatus for forming a wellbore in a subterranean formation. The apparatus may have a drill string having a drill bit at a distal end, a drilling motor configured to rotate the drill bit with a drive shaft, a joint coupled to the drive shaft; and an actuator assembly. The actuator assembly may be configured to displace the drive shaft between a first and a second deflection angle. The drive shaft may be movable at each of the deflection angles until a predetermined weight is applied to the bit.

[0005] In aspects, the present disclosure also provides a method for forming a wellbore in a subterranean formation. The method may include forming a drill string that has a drill bit at a distal end, a drilling motor configured to rotate the drill bit with a drive shaft; a joint coupled to the drive shaft; and an actuator assembly displacing the drive shaft between a first and a second deflection angle, the drive shaft being movable at each of the deflection angles until a predetermined weight is applied to the bit. The method also includes the steps of conveying the drill string into the wellbore and fixing the drive shaft in at least one of the first and the second deflection angles by applying a predetermined weight on the bit.

[0006] Examples of certain features of the disclosure have been summarized rather broadly in order that the detailed description thereof that follows may be better understood and in order that the contributions they represent to the art may be appreciated. There are, of course, additional features of the disclosure that will be described hereinafter and which will form the subject of the claims appended hereto.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] For a detailed understanding of the present disclosure, reference should be made to the following detailed description of the embodiments, taken in conjunction with the accompanying drawings, in which like elements have been given like numerals, wherein:

FIG. 1 illustrates a drilling system made in accordance with one embodiment of the present disclosure;

FIG. 2 schematically illustrates a bi-stable deflector assembly made in accordance with one embodiment of the present disclosure;

FIGS. 3A-C schematically illustrate various actuator assembly arrangements that may be used with a bi-stable deflector assembly made in accordance with one embodiment of the present disclosure;

FIGS. 4A & B schematically illustrate a bi-stable deflector assembly in accordance with one embodiment of the present disclosure that is configured for straight drilling and deviated drilling, respectively; and

FIGS. 5A & 5B schematically illustrate various arrangements for a momentum lock made in accordance with one embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE DISCLOSURE

[0008] As will be appreciated from the discussion below, aspects of the present disclosure provide a rotary steerable system for drilling wellbores. In general, the described steering methodology involves deflecting the angle of the drill bit axis relative to the tool axis an between two stable angular positions.

[0009] Referring now to **FIG. 1**, there is shown one illustrative embodiment of a drilling system **10** utilizing a steerable drilling assembly or bottomhole assembly (BHA) **12** for directionally drilling a wellbore **14**. While a land-based rig is shown, these concepts and the methods are equally applicable to offshore drilling systems. The system **10** may include a drill string **16** suspended from a rig **20**. The drill string **16**, which may be jointed tubulars or coiled tubing, may include power and/or data conductors such as wires for providing bidirectional communication and power transmission. In one configuration, the BHA **12** includes a drill bit **30**, a sensor sub **32**, a bidirectional communication and power module (BCPM) **34**, a formation evaluation (FE) sub **36**, and rotary power devices such as drilling motors **38**. The sensor sub **32** may include sensors for measuring near-bit direction (*e.g.*, BHA azimuth and inclination, BHA coordinates, etc.) and sensors and tools for making rotary directional surveys. The-near bit inclination devices may include three (3) axis accelerometers, gyroscopic devices and signal processing circuitry. The system may also include information processing devices such as a surface controller **50** and / or a downhole controller **42**. The drill bit **30** may be rotated by rotating the drill string **16** and / or by using a drilling motor **38**, or other suitable rotary power source. By drilling motor **38**, it is meant mud motors, turbines, electrically powered motors, etc. Communication between the surface and the BHA **12** may use uplinks and / or downlinks generated by a mud-driven alternator, a mud pulser and /or conveyed using hard wires (*e.g.*, electrical conductors, fiber optics), acoustic signals, EM or RF. As will be discussed in greater detail below, the BHA **12** may include a deflector assembly **100** to steer the BHA **12**.

[0010] Referring to **Fig. 2**, there is sectionally illustrated a bi-stable deflector assembly **100** for directionally drilling a borehole in a subterranean formation. The deflector assembly **100** includes a joint **102**, an actuator assembly

-5-

104, a joint bearing **106**, and a momentum lock **108**. The joint **102** allows a shaft **60** connected to a rotor **52** of the drilling motor **38** to be oriented by the actuator assembly **104**. By orient, it is meant that the actuator assembly **104** can cause a specified angular deflection between a shaft axis **110** of the drive shaft **60** and a tool axis **112** as best seen in **Fig. 4B**. The axes **110**, **112** may be generally aligned with the longitudinal axis of the wellbore (not shown). This angular deflection causes a bit face **114** (**Fig. 1**) to point in the desired drilling direction. The bit face **114** (**Fig. 1**) is generally the surface of the drill bit **30** that engages a bottom of the wellbore (not shown).

[0011] The joint **102** may include a ball case **116** that receives a ball **118**. In one arrangement, the ball case **116** is formed in a sub **54** uphole of the drilling motor **38**. The ball **118** seats around the joint bearing **106** and within the ball case **116**. In another arrangement, the ball case **116** is formed in a housing **56** of the drilling motor **38**. In both instances, a drive shaft **60** is disposed through the joint bearing **106** and the ball **118**. The momentum lock **108** prevents relative angular rotation between the sub **54** and the housing **56**.

[0012] In one embodiment, the actuator assembly **104** may include a plurality of active and / or passive actuators **120**, **122** configured to tilt the ball **118** to impart an angular deflection to the shaft **60**. In the illustrated arrangement, actuator **120** may be an active actuator, such a piston, and the actuator **122** may be a passive actuator, such as a spring or other biasing member. Referring to **Figs. 3A-C**, there are shown non-limiting variants of actuator assemblies **104** that may be used according to the present teachings. **Fig. 3A** shows an arrangement wherein the active actuator **120** is a hydraulically actuated piston that deflects the shaft **60** a specified amount and the passive actuator **122** is a spring that biases or urges the shaft **60** toward the active actuator **120**. **Fig. 3B** shows an arrangement wherein the active actuator **120** is a hydraulically actuated piston that deflects the shaft **60** a predetermined amount and the passive actuator **122** is a hydraulically actuated piston that functions as a stop that prevents the shaft **60** from radially deflecting more than a specified amount. The amount of radial deflection can be controlled by appropriately sizing a gap **70** between the passive actuator **122** and the shaft **60**.

Fig. 3C shows an arrangement wherein two active actuators **120** can independently or cooperatively deflect the shaft **60** a specified amount and the passive actuator **122** biases or urges the shaft **60** to the active actuators **120**. It should be noted that the actuators **120**, **122** are set to oppose one another (*i.e.*, one hundred eighty degrees apart) and thereby applying opposing forces to the shaft **60**.

[0013] Referring to **Figs. 4A,B**, in embodiments, the deflector assembly **100** may be configured to impose two discrete deflection angles. The first angle may be for straight drilling and set at zero or a small amount to counteract gravity (*e.g.*, 0.5 degrees). The second angle may be for direction drilling and set at a non-zero value such as five degrees. In arrangements, the deflector assembly **100** is stable at only these two angular deflections. That is, the deflection angle is always at or moving toward one of these two values and is not stable at an intermediate deflection angle value. The deflector assembly **100** may have suitable electronics (not shown) to allow control (*e.g.*, activation and de-activation) using the surface controller **50** (**Fig. 1**) and / or a downhole controller **42** (**Fig. 1**).

[0014] **Fig. 4A** show the deflector assembly **100** positioned uphole of the drilling motor **38** and configured for straight drilling. By “uphole,” it is meant between the drilling motor **38** and the surface as opposed to between the drilling motor **38** and the drill bit **30** (**Fig. 1**). In **Fig. 4A**, the actuators **120**, **122** are set to impose a zero deflection angle to the drive shaft **60**. Alternatively, a small angle, *e.g.*, -0.5 degrees relative to the tool axis **112**, may be applied by the actuators **120**, **122** to counteract gravity. **Fig. 4B** shows the deflector assembly **100** imposing a specified deflection angle (*e.g.*, 4 degrees). This deflection angle is imposed by the active actuator **120** pressing and displacing the drive shaft **60**, which then tilts or rotates the drive shaft **60** at the joint **104**. The passive actuator **122** resists the displacement and may prevent a deflection beyond a predetermined value.

[0015] **Fig. 4A** show the deflector assembly **100** positioned uphole of the drilling motor **38** and configured for directional drilling. By “uphole,” it is meant between the drilling motor **38** and the surface as opposed to between the drilling motor **38** and the drill bit **30** (**Fig. 1**). In **Fig. 4A**, the actuators **120**, **122** are set to have the self-stable idle position where the drive shaft **60** has a small deflection

-7-

angle, e.g. 1 degree skew relative to the tool axis **112**. The preset deflection angle will be used to counteract gravity of the BHA in homogenous formations and/or to be able to work against formation tendencies (formation dip). The pre-adjusted deflection angle will be oriented from 0 – 360° in drilling direction (tool face); *e.g.*, setting the tool face angle to 180° to work against a pushing up dip in the formation or to compensate a left hand walk tendency by orienting the deflection in direction of 90° tool face. For rigid tubulars such as drill pipe, the tool face angle may be set by rotating the drill string. Of non-rigid tubulars such as coiled tubing, an orienting module integrated into the BHA may be used to rotate the section of the BHA that includes the deflector assembly **100**. Of course, any angle may be used for the tool face angle (131° toolface). The preset deflection angle is supported by a passive actuator (e.g., a spring **120**) or an active actuator (e.g., hydraulic piston **122**) pressing and displacing the drive shaft **60**, into the idle position, while running the BHA in hole and/or orienting the bit off bottom according to the desired tool face, before drilling weight is applied.

[0016] When the bit reaches bottom and contacts a bottom face of the wellbore and weight on bit (WOB) is applied, the preset deflection angle position will be secured by the resulting vector in opposite direction of the deflection in addition. This position is called the idle stable condition. It should be noted that the contact between the actuator, whether passive or active, and the shaft **60** does not fix the preset deflection until WOB is applied. That is, the shaft **60** may, at times, not contact the actuators until the appropriate WOB is applied. Thus, the shaft **60** is movable relative to the actuators. Therefore, the deflection may be less than the desired preset deflection prior to application of the appropriate WOB.

[0017] Referring to **Figs. 1**, and **4A,B**, several modes of operation may be used in conjunction with the deflector assembly **100**. In a “sliding” mode of drilling, only the drilling motor **38** rotates the drill bit **30**. In this mode, a straight hole having a diameter the same size as the drill bit **30** is obtained by using the first stable deflection angle, either zero or a small angle to compensate for gravity. A maximum build-up rate is obtained by activating the actuator assembly **104** to obtain the second stable deflection angle. Here, the drilled hole has the same

diameter as the drill bit **30**.

[0018] Referring to **Figs. 1, and 4A,B**, several modes of operation may be used in conjunction with the deflector assembly **100**. In a “sliding” mode of drilling, only the drilling motor **38** rotates the drill bit **30**. In this mode, a build section or a straight horizontal section is formed using one degree of freedom, combined with slight meandering in another degree of freedom, which results in a bore having a diameter the same size as the drill bit **30**.

[0019] A maximum build-up rate is obtained by activating the opposite active actuator assembly **104** to obtain the second stable deflection angle (e.g., 3 degree) or build angle. Here, the drilled hole has the same diameter as the drill bit **30** as well. The applied WOB applied to the bit generates a vector in opposite direction of the deflection and secures the build angle. After the WOB has been applied, the active actuator assembly **104** may be deactivated to allow the applied WOB to principally fix the build angle. By principally, it is meant provide a majority of the force to fix the build angle. Thus, the active actuator assembly **104** moves the shaft **60** to the build angle, but is not required to maintain the build angle once the appropriate WOB is applied.

[0020] Switching between idle stable and build stable condition is called a Bi-Stable system and Bi-Stable operation mode to drill complex well trajectories and avoid Non Productive Time (NPT) for system adjustments on surface.

[0021] Drilling a close to straight hole and enabling power transmission from a rotating drill string in addition to the downhole motor power, will be preferable done in idle position (e.g., 1 degree deflection). Here, the drilled hole has a slight bigger diameter as the drill bit **30**, less vibration in the BHA and better hole quality for cementation later on in comparison to rotary drilling with a (e.g., 3 degree deflection).

[0022] Deactivating all actuators allows pull-out-of-hole (POOH) with a self-aligning system and enables to pass well bore restrictions e.g. due to break outs or local swelling of the formation.

[0023] Selectively activating the actuators **122** and **104** also allows using

-9-

the motor as reaming tool. Activating the actuator **122** will allow medium size hole enlargement and activating the actuator **104** enables maximum hole enlargement of desired part of the section of the wellbore in rotary mode. The operation in sliding mode only, enables local or sectional well bore wall maintenance; e.g., to bring an “egg” or oval shaped wellbore cross section back close to round, or a round into a defined egg shape, e.g., to ease casing or liner installation.

[0024] It should be appreciated that the deflector assemblies according to the present disclosure may be used to drill a complex wellbore without having to retrieve the drill string from the wellbore. A complex wellbore may be defined as a wellbore having at least one section having bend radius. The deflector assembly may be tripped into the well in a deactivated condition. Next, the deflector assembly may be activated to provide maximum deflection. Once the bend section is complete, the deflector assembly may be deactivated to allow straight drilling. This process may be continued to provide addition bend radius sections.

[0025] In a “rotary” mode of drilling, the entire drill string **16** rotates to rotate the drill bit **30**. The drilling motor **38** may or may not also rotate the drill bit **30**. In this mode, a straight hole having a diameter the same size as the drill bit **30** is obtained by using the first stable deflection angle that is zero. A straight hole having a diameter the slightly larger than the drill bit **30** is obtained by using the first stable deflection angle that has a small angle to compensate for gravity. This occurs because the drill bit **30** has a slight orbit around the drill string **16**. An even larger drilled hole size is obtained if the actuators are set to obtain the second stable deflection angle.

[0026] In a “cleaning” mode of drilling, the entire drill string **16** rotates to rotate the drill bit **30** while the drill string **16** is pulled out of the wellbore **14**. As in the “rotary” mode, the drilled hole will have a diameter the same size as the drill bit **30** if the first stable deflection angle is zero or may be cleaned if already at the larger size. Similarly, using the first stable deflection angle that has a small angle to compensate for gravity results in a straight hole with a diameter the slightly larger than the drill bit **30** or a cleaning effect if already at the larger size. The same result occurs if the actuators are set to obtain the second stable deflection angle.

-10-

[0027] There are a number of permutations for arrangements using passive and active actuators in order to move the shaft axis between two stable deflection angles. For example, a fixed block and a biasing device may be used to fix a zero or near zero deflection angle and a piston may be used to displace the drive shaft to the second deflection angle. In another embodiment, an adjustable fixed block may be with the biasing device. In another arrangement, the biasing device fixes the zero or near zero deflection angle and a piston and the fixed block to obtain the second deflection angle. Still another embodiment may use two active actuators to set the zero or near zero deflection angle and the second deflection angle. In still another embodiment, the solid block may be used to fix a specified angle for the drive shaft.

[0028] Referring to **Figs. 5A** and **5B**, there are shown variations for positioning the momentum lock **108** relative to the joint **102**. The momentum lock **108** may be formed using a friction lock or a form fit. In **Fig. 5A**, there is shown the drill bit **30**, the drive shaft bearings **74**, the drive shaft **60**, the joint **102**, the bearing **106**, and the momentum lock **108**. In this embodiment, the joint **102** is positioned external to the drilling motor housing **56**. In **Fig. 5B**, there is also shown the drill bit **30**, the drive shaft bearings **74**, the drive shaft **60**, the joint **102**, the bearing **106**, and the momentum lock **108**. In this embodiment, the joint **102** is positioned internal to the drilling motor housing **56**.

[0029] While the foregoing disclosure is directed to the one mode embodiments of the disclosure, various modifications will be apparent to those skilled in the art. It is intended that all variations within the scope of the appended claims be embraced by the foregoing disclosure.

THE CLAIMS

1. An apparatus for forming a wellbore in a subterranean formation, comprising: a drill string (16) having a drill bit (30) at a distal end; a drilling motor (38) configured to rotate the drill bit (30) with a drive shaft (60); and a joint (102) coupled to the drive shaft (60), the apparatus characterized by:
 - an actuator assembly (104) displacing the drive shaft (60) between a first and a second deflection angle, the drive shaft (60) being movable at each of the deflection angles until a predetermined weight is applied to the drill bit (30).
2. The apparatus of claim 1, further characterized in that the actuator assembly (104) includes a first and a second actuator (120, 122) arranged in an opposing fashion.
3. The apparatus of claim 2, further characterized in that the drive shaft (60) has the first deflection angle when the second actuator (122) is deactivated.
4. The apparatus of claim 3, further characterized in that the drive shaft (60) has the second deflection angle when the second actuator (122) is activated.
5. The apparatus of claim 2, further characterized in that the first actuator (120) is configured to provide a non-zero first deflection angle.
6. The apparatus of claim 2, further characterized in that the first actuator (120) urges the drive shaft (60) to the first deflection angle after the second actuator (122) is deactivated and the predetermined weight on the drill bit (30) is removed.

-12-

7. The apparatus of claim 2, further characterized in that the first actuator (120) is passive and the second actuator (122) is active.
8. A method for forming a wellbore in a subterranean formation, characterized by:
 - forming a drill string (16) having a drill bit (30) at a distal end; a drilling motor (38) configured to rotate the drill bit (30) with a drive shaft (60); a joint (102) coupled to the drive shaft (60); and an actuator assembly (104) displacing the drive shaft (60) between a first and a second deflection angle, the drive shaft (60) being movable at each of the deflection angles until a predetermined weight is applied to the drill bit (30);
 - conveying the drill string (16) into the wellbore; and
 - fixing the drive shaft (60) in at least one of the first and the second deflection angles by applying a predetermined weight on the drill bit (30).
9. The method of claim 8, configuring the actuator assembly (104) to maintain the drive shaft (60) in the first deflection angle before the drill bit (30) contacts a wellbore bottom.
10. The method of claim 8, further characterized by:
 - rotating the drill bit (30) with only the drilling motor (38).
11. The method of claim 10, further characterized in that the drive shaft (60) is in the first deflection angle; and further characterized by drilling a substantially straight section of the wellbore.

-13-

12. The method of claim 10, further characterized in that the drive shaft (60) is in the second deflection angle; and further characterized by drilling a deviated section of the wellbore.
13. The method of claim 8, further characterized by:
 - rotating the drill bit (30) with the drilling motor (38) and the drill string (16).
14. The method of claim 13, further characterized by drilling the wellbore to a diameter larger than a diameter of the drill bit (30).
15. The method of claim 13, further characterized in that the drill bit (30) changes an already drilled wellbore by one of: (i) changing a shape, and (ii) increasing a diameter.

1/4

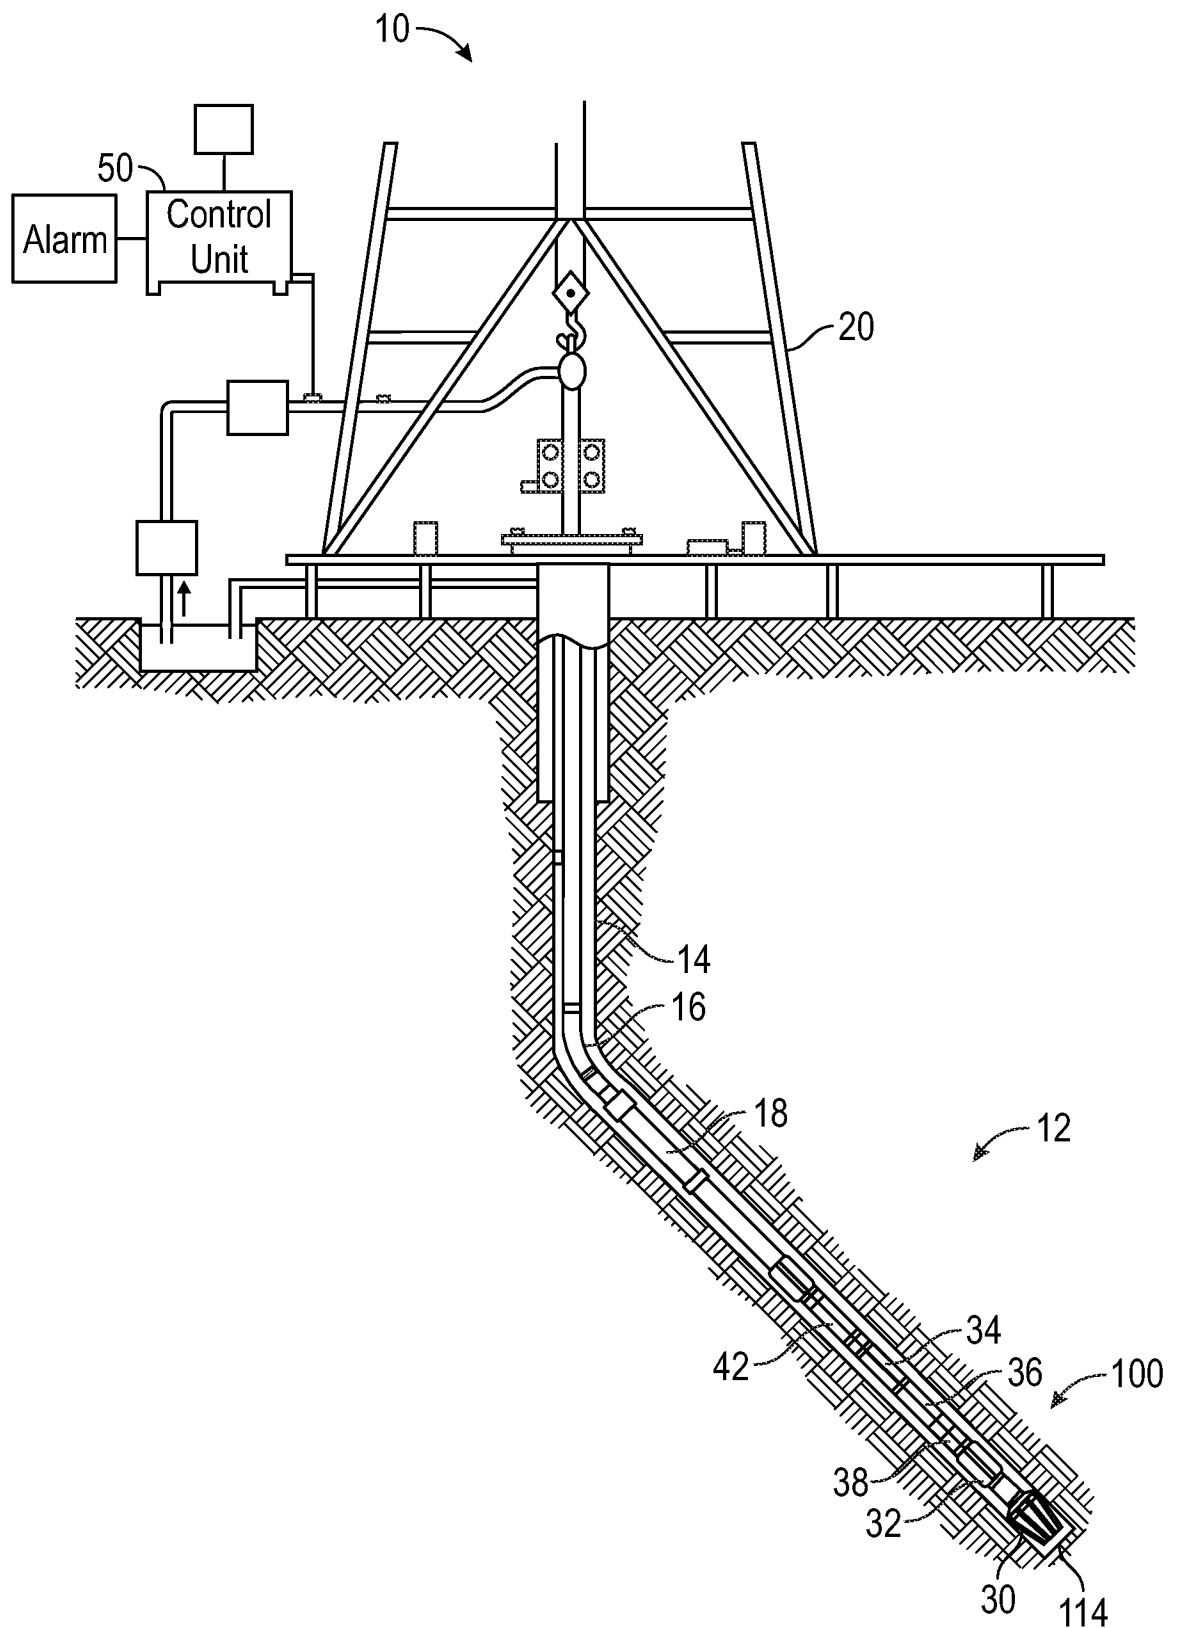


FIG. 1

2/4

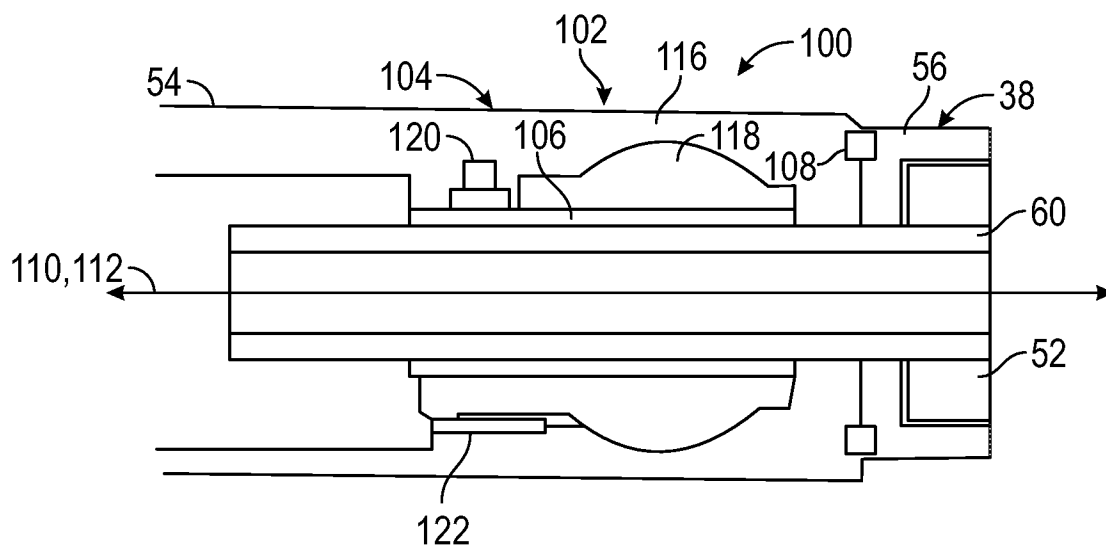


FIG. 2

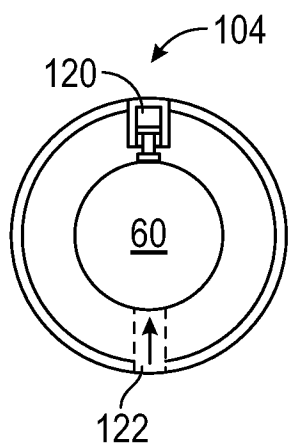


FIG. 3A

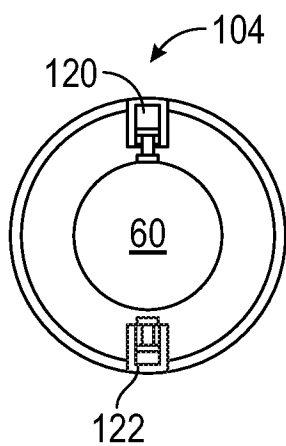


FIG. 3B

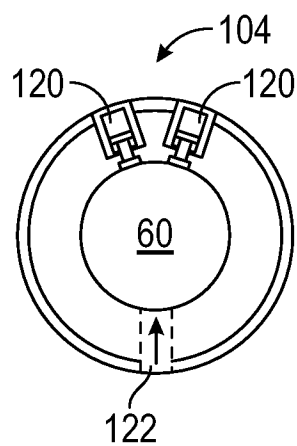


FIG. 3C

3/4

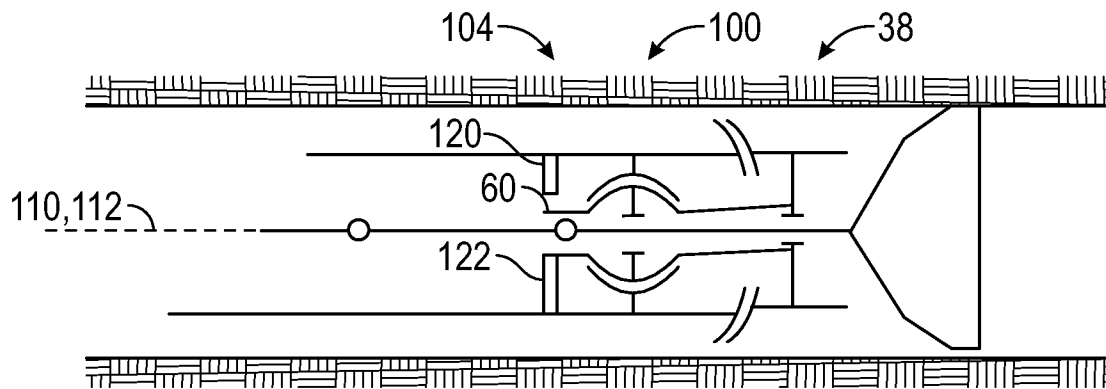


FIG. 4A

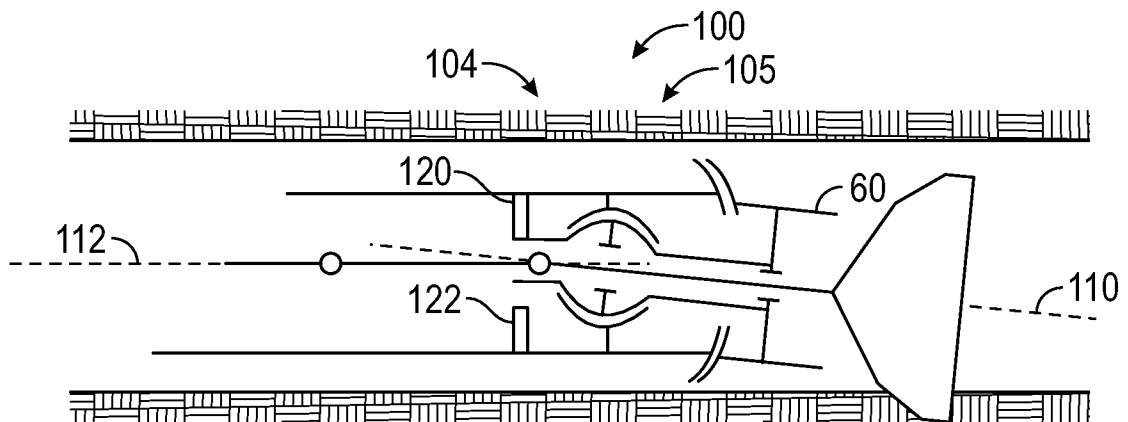


FIG. 4B

4/4

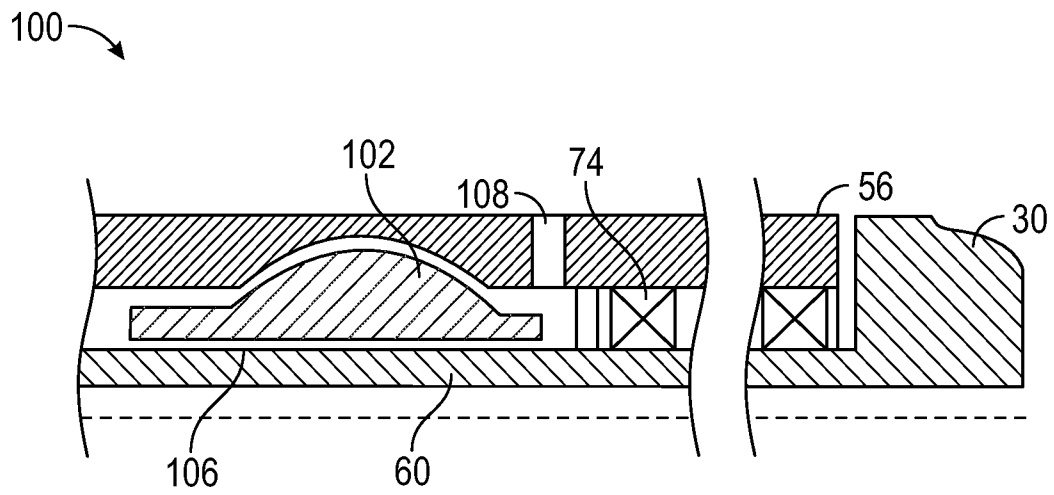


FIG. 5A

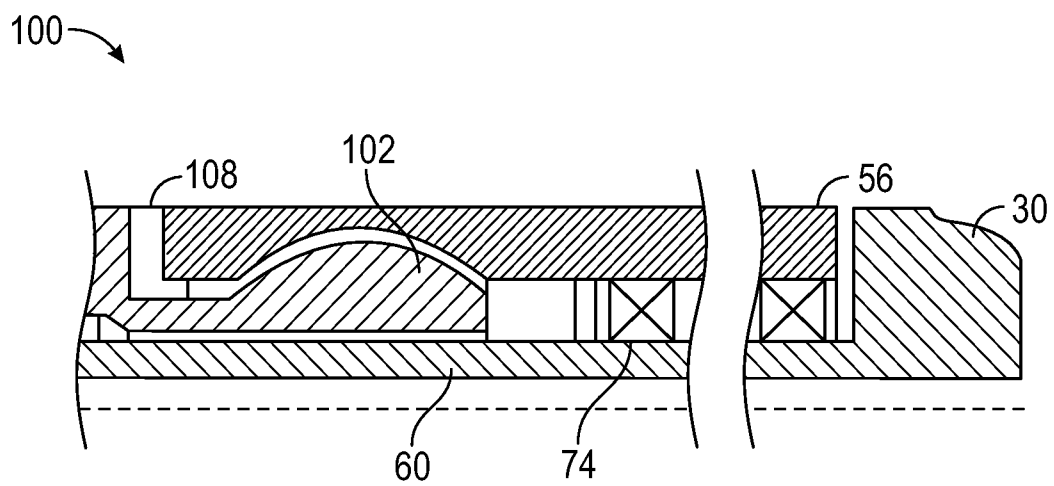


FIG. 5B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/014321**A. CLASSIFICATION OF SUBJECT MATTER****E21B 7/04(2006.01)i, E21B 7/06(2006.01)i, E21B 17/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 7/04; E21B 3/00; E21B 44/06; E21B 7/06; E21B 17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: directional drilling, asymmetric deflection, bi-stable, passive, active, actuator, angle, drill string, motor, joint

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011-0042144 A1 (DOWNTON, GEOFFREY C.) 24 February 2011 See paragraphs [0015]-[0018], [0020] and figures 1, 2.	1,2,8-15
Y		3-7
Y	US 2015-0114719 A1 (SCHLUMBERGER TECHNOLOGY CORPORATION) 30 April 2015 See paragraphs [0022], [0025]-[0027] and figures 2, 4.	3-7
A	US 2009-0272579 A1 (SIHLER et al.) 05 November 2009 See paragraphs [0022]-[0026] and figures 2, 4.	1-15
A	US 2012-0080235 A1 (SHEPPARD et al.) 05 April 2012 See paragraphs [0083]-[0094] and figure 2A.	1-15
A	US 2012-0018225 A1 (PETER et al.) 26 January 2012 See paragraphs [0018]-[0023] and figure 2.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 April 2017 (20.04.2017)

Date of mailing of the international search report

21 April 2017 (21.04.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea




Facsimile No. +82-42-481-8578

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/014321

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0042144 A1	24/02/2011	CA 2710222 A1	09/07/2009
		CA 2710222 C	05/08/2014
		CN 101946057 A	12/01/2011
		EP 2238310 A2	13/10/2010
		EP 2238310 B1	16/05/2012
		JP 2011-524477 A	01/09/2011
		JP 5364104 B2	11/12/2013
		RU 2010130479 A	27/01/2012
		RU 2452839 C2	10/06/2012
		SG 10201501180 A	29/04/2015
		US 8517121 B2	27/08/2013
		WO 2009-085753 A2	09/07/2009
		WO 2009-085753 A3	17/09/2009
US 2015-0114719 A1	30/04/2015	CN 105637164 A	01/06/2016
		EP 3060740 A1	31/08/2016
		EP 3060740 A4	15/02/2017
		WO 2015-061047 A1	30/04/2015
US 2009-0272579 A1	05/11/2009	GB 2462965 A	03/03/2010
		GB 2462965 B	13/06/2012
		GB 2487022 A	04/07/2012
		GB 2487022 B	10/10/2012
		NO 20093497 A	08/01/2010
		US 7779933 B2	24/08/2010
		WO 2009-134842 A2	05/11/2009
US 2012-0080235 A1	05/04/2012	US 2009-044980 A1	19/02/2009
		US 8534380 B2	17/09/2013
		US 8720605 B2	13/05/2014
US 2012-0018225 A1	26/01/2012	BR 112013001409 A2	24/05/2016
		GB 2511291 A	03/09/2014
		NO 20130113 A	14/02/2013
		US 9145736 B2	29/09/2015
		WO 2012-012624 A1	26/01/2012