



(11) **EP 2 199 578 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
08.05.2013 Bulletin 2013/19

(51) Int Cl.:
F02D 41/02 ^(2006.01)

(21) Application number: **09173598.5**

(22) Date of filing: **21.10.2009**

(54) **Torque control device and method for internal combustion engine**

Drehmomentsteuerungsvorrichtung für Verbrennungsmotor

Dispositif de contrôle de couple et procédé pour moteur à combustion interne

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

- **Ohnishi, Hiroyuki**
Saitama 351-0193 (JP)
- **Noguchi, Tomoyuki**
Saitama 351-0193 (JP)

(30) Priority: **22.12.2008 JP 2008325416**

(74) Representative: **Prechtel, Jörg et al**
Weickmann & Weickmann
Patentanwälte
Postfach 86 08 20
81635 München (DE)

(43) Date of publication of application:
23.06.2010 Bulletin 2010/25

(73) Proprietor: **Honda Motor Co., Ltd.**
Tokyo 107-8556 (JP)

(56) References cited:
EP-A2- 0 881 376 DE-A1- 19 549 081
US-A1- 2005 054 482

(72) Inventors:
• **Sasaki, Yuji**
Saitama 351-0193 (JP)

EP 2 199 578 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE INVENTION**5 **Field of the Invention**

[0001] The present invention relates to a torque control device and method for an internal combustion engine, for controlling torque output from the engine.

10 **Description of the Related Art**

[0002] Conventionally, there has been proposed a torque control device for an internal combustion engine in Japanese Laid-Open Patent Publication (Kokai) No. 2004-92522. This engine includes a throttle valve for controlling an intake air amount, and is connected to drive wheels of a vehicle via a torque converter having a lockup clutch, and a belt-type stepless transmission (hereinafter referred to as "the transmission"). Further, the torque control device calculates a maximum transmission torque that can be transmitted by the transmission, e.g. based on the transmission gear ratio of the transmission calculated based on an input rotational speed and an output rotational speed of the transmission. Further, when it is determined that an accelerator pedal is suddenly stepped on and at the same time the torque output from the engine to the transmission exceeds the maximum transmission torque, the torque control device causes the opening of the throttle valve to be reduced so as to limit the output torque of the engine such that the output torque becomes smaller than the maximum transmission torque of the transmission, to thereby prevent the belt of the transmission from slipping.

[0003] In the conventional torque control device, however, the output torque of the engine is controlled by controlling the intake air amount via the opening of the throttle valve, and hence there is an inevitable delay of time which occurs after the opening of the throttle valve is changed and before intake air corresponding to the change in the opening of the throttle valve actually flows into cylinders to have the change reflected on an increase/decrease of the output torque of the engine. This makes it impossible to control the output torque in the optimum timing.

[0004] The same applies to a case where the vibration of the vehicle caused by variation in the output torque is suppressed e.g. by controlling the output torque. Further, when the torque converter having the lockup clutch is provided between the engine and the drive wheels of the vehicle, if the degree of engagement of the lockup clutch varies, the magnitude and transmission rate of torque transmitted from the engine to the drive wheels vary to cause variation in the behavior of vibration caused on the vehicle. Therefore, if torque control is performed without taking the degree of engagement of the lockup clutch into consideration, it is impossible to properly suppress the vibration of the vehicle.

[0005] In DE 195 49 081 A1, on which the preamble of the independent claims is based, the delay of engine torque increase is set according to the lockup status signal of the lockup clutch bridging the torque converter, while the throttle opening is temporarily decoupled from the accelerator pedal.

[0006] In EP 0 881 376 A2, the fuel injection amount signal is filtered to avoid abrupt load changes. The filter constants are determined for example based on gear position and engine speed.

[0007] In US 2005/054482 A1, the engine torque is controlled using a speed ratio across the torque converter, which is provided with a lockup clutch. If this clutch is partially disengaged, the torque converter is set to be in an unlocked state. The duty cycle of the lockup clutch is determined for determining whether the torque converter is unlocked or unlocked state.

SUMMARY OF THE INVENTION

45 **[0008]** It is an object of the present invention to provide a torque control device and method for an internal combustion engine, which is capable of properly suppressing the vibration of a vehicle by controlling torque output from the engine such that no large variation in the output torque is caused, when the vehicle has a torque converter having a lockup clutch.

[0009] To attain the above object, in a first aspect of the present invention provides a torque control device for an internal combustion engine, for controlling an output torque which is output from the engine connected to drive wheels of a vehicle via an automatic transmission that has a torque converter having a lockup clutch, in accordance with claim 1.

[0010] The torque control device comprises operating condition-detecting means for detecting an operating condition of the engine, basic value-setting means for setting a basic value of a torque parameter which is a parameter for determining the torque output, according to the detected operating condition of the engine, filtering correction means for correcting the basic value by filtering thereof, to thereby set the torque parameter, lockup clutch engagement degree-detecting means for detecting a degree of engagement of the lockup clutch, and filtering characteristic-setting means for setting a filtering characteristic of the filtering correction means according to the detected degree of engagement of the lockup clutch.

[0011] With the configuration of this torque control device according to the first aspect of the present invention, the output torque of the engine is transmitted to the drive wheels of the vehicle via the automatic transmission that has the torque converter having the lockup clutch. Further, according to the torque control device, the basic value of the torque parameter that is a parameter for determining the output torque is set according to the detected operating condition of the engine. Furthermore, the degree of engagement of the lockup clutch is detected, and the filtering characteristic is set according to the detected degree of engagement of the lockup clutch. Then, the torque parameter is set by correcting the basic value of the torque parameter by filtering thereof using the set filtering characteristic, whereby the output torque of the engine is controlled.

[0012] As described above, the torque parameter is set by setting the filtering characteristic according to the degree of engagement of the lockup clutch, and performing filtering correction of the basic value of the torque parameter using the set filtering characteristic. This makes it possible to control the output torque of the engine according to the degree of engagement of the lockup clutch such that no large variation in the output torque is caused, thereby making it possible to properly suppress the vibration of the vehicle.

[0013] The filtering correction means includes torque correction term-calculating means for calculating a torque correction term for correction of the basic value, such that a torque in an opposite phase to a state of variation in the output torque from the engine is generated.

[0014] With the configuration of this preferred embodiment, the torque correction term is calculated such that a torque in the opposite phase to the variation in the output torque from the engine is generated, and the basic value of the torque parameter is corrected using the torque correction term. Therefore, it is possible to cancel out the variation in the output torque using the torque in the opposite phase generated by the torque correction term, thereby making it possible to suppress the variation in the output torque and the vibration of the vehicle caused by the variation in the output torque.

[0015] Preferably, the filtering characteristic-setting means sets a gain of the filtering characteristic according to the detected degree of engagement of the lockup clutch.

[0016] With the configuration of this preferred embodiment, the filtering characteristic of the filtering correction means includes a gain, and the gain is set according to the degree of engagement of the lockup clutch. When the degree of engagement of the lockup clutch varies, the magnitude of the output torque transmitted to the drive wheels varies accordingly, so that as described above, by setting the gain of the filtering characteristic according to the degree of engagement of the lockup clutch, it is possible to perform proper filtering correction according to the magnitude of the transmission torque.

[0017] Preferably, the filtering characteristic-setting means sets a time constant of the filtering characteristic according to the detected degree of engagement of the lockup clutch.

[0018] With the configuration of this preferred embodiment, the filtering characteristic of the filtering correction means includes a time constant, and the time constant is set according to the degree of engagement of the lockup clutch. When the degree of engagement of the lockup clutch varies, the transmission rate of the output torque transmitted to the drive wheels varies accordingly, so that as described above, by setting the time constant of the filtering characteristic according to the degree of engagement of the lockup clutch, it is possible to perform proper filtering correction according to the transmission rate of the output torque.

[0019] To attain the above object, in a second aspect of the present invention, there is provided a torque control method for an internal combustion engine, for controlling an output torque which is output from the engine connected to drive wheels of a vehicle via an automatic transmission that has a torque converter having a lockup clutch in accordance with claim 4.

The method comprises an operating condition-detecting step of detecting an operating condition of the engine, a basic value-setting step of setting a basic value of a torque parameter which is a parameter for determining the torque output, according to the detected operating condition of the engine, a filtering correction step of correcting the basic value by filtering thereof, to thereby set the torque parameter, a lockup clutch engagement degree-detecting step of detecting a degree of engagement of the lockup clutch, and a filtering characteristic-setting step of setting a filtering characteristic in the filtering correction step according to the detected degree of engagement of the lockup clutch.

[0020] With the configuration of the torque control method according to the second aspect of the present invention, it is possible to obtain the same advantageous effects as provided by the first aspect of the present invention.

[0021] The filtering correction step includes a torque correction term-calculating step of calculating a torque correction term for correction of the basic value, such that a torque in an opposite phase to a state of variation in the output torque from the engine is generated.

[0022] Preferably, the filtering characteristic-setting step includes setting a gain of the filtering characteristic according to the detected degree of engagement of the lockup clutch.

[0023] Preferably, the filtering characteristic-setting step include setting a time constant of the filtering characteristic according to the detected degree of engagement of the lockup clutch.

[0024] With the configurations of these preferred embodiments, it is possible to obtain the same advantageous effects as provided by the respective corresponding preferred embodiments of the first aspect of the present invention.

[0025] The above and other objects, features, and advantages of the present invention will become more apparent from the following detailed description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026]

FIG. 1 is a schematic diagram of a torque control device according to an embodiment of the present invention, and an internal combustion engine to which is applied the torque control device;

FIG. 2 is a flowchart of a process for calculating a fuel injection amount;

FIG. 3 is a flowchart of a process for calculating an average torque, which is executed as a subroutine in a step in FIG. 2;

FIG. 4 is a flowchart of a process for calculating a torque correction term, which is executed as a subroutine in a step in FIG. 2;

FIG. 5 is a diagram showing an example of an average gain map; and

FIG. 6 is a diagram showing an example of a torque correction gain map.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0027] The invention will now be described in detail with reference to drawings showing a preferred embodiment thereof. FIG. 1 schematically shows a torque control device 1 for an internal combustion engine, according to the present embodiment, and the internal combustion engine (hereinafter simply referred to as the "engine") 3 to which is applied the torque control device 1. The engine 3 is a diesel engine that has e.g. four cylinders, and is installed on a vehicle V.

[0028] Injectors 4 (only one of which is shown) are mounted on the respective cylinders (not shown) of the engine 3. Each injector 4 injects fuel supplied from a fuel supply system (not shown) into an associated one of the cylinders. A fuel injection amount QINJ of the injector 4 is controlled by a drive signal from an ECU 2, referred to hereinafter.

[0029] A crank angle sensor 21 comprised e.g. of a magnet rotor and an MRE pickup is mounted on a crankshaft 10 of the engine 3. The crank angle sensor 21 delivers a CRK signal and a TDC signal, which are both pulse signals, to the ECU 2 in accordance with rotation of the crankshaft 10. The CRK signal is delivered whenever the crankshaft 10 rotates through a predetermined crank angle (e.g. 10°). The ECU 2 calculates a rotational speed NE of the engine 3 (hereinafter referred to as "the engine speed NE") based on the CRK signal. The TDC signal indicates that each piston (not shown) in an associated one of the cylinders of the engine 3 is in a predetermined crank angle position slightly before the TDC position at the start of the intake stroke, and is delivered whenever the crankshaft 10 rotates through 180° when the engine 3 has four cylinders, as in the present embodiment.

[0030] On the other hand, the vehicle V is of a front-engine and front-drive type, and the engine 3 is connected to left and right front wheels W (only one of which is shown), which are drive wheels, via an automatic transmission 9, a final speed reduction gear (not shown), a drive shaft 12, and so forth.

[0031] The automatic transmission 9 is formed by combining a torque converter 6 having a lockup clutch 7 and a stepped transmission 8. The lockup clutch 7 is engaged and disengaged by supply of oil pressure from an oil pressure circuit 5. The oil pressure circuit 5 is provided with an LC (Lockup Clutch) solenoid valve 5a, which is electrically connected to the ECU 2. The ECU 2 controls an operating state of the LC solenoid valve 5a to thereby control the engagement and disengagement of the lockup clutch 7. In this case, in a state where the lockup clutch 7 is completely connected (engaged), the crankshaft 10 of the engine 3 is mechanically directly connected to a driven shaft 11 of the torque converter 6.

[0032] A rotational speed sensor 23 is mounted on the driven shaft 11. Similarly to the crank angle sensor 21, the rotational speed sensor 23 is comprised of a magnet rotor and an MRE pickup, and detects the engine speed NE to deliver a pulse signal indicative of the sensed engine speed NE to the ECU 2, whenever the driven shaft 11 rotates through a predetermined angle. The ECU 2 calculates a rotational speed NS of the driven shaft 11 (hereinafter referred to as "the driven shaft rotational speed NS") based on the signal from the rotational speed sensor 23.

[0033] Further, an accelerator pedal opening sensor 22 detects an amount AP of operation (stepped-on amount) of an accelerator pedal, not shown (hereinafter referred to as "the accelerator pedal opening AP"), and delivers a signal indicative of the sensed accelerator pedal opening AP to the ECU 2.

[0034] Further, the ECU 2 is implemented by a microcomputer comprised of an I/O interface, a CPU, a RAM, and a ROM (none of which are specifically shown). The ECU 2 carries out e.g. engine control including torque control of the engine 3 in response to the signals from the above-described sensors 21 to 23.

[0035] In the present embodiment, the ECU 2 corresponds to basic value-setting means, filtering correction means, filtering characteristic-setting means and torque correction term-calculating means.

[0036] Next, a torque control process executed by the ECU 2 will be described with reference to FIGS. 2 to 4.

[0037] FIG. 2 shows a process for calculating the fuel injection amount QINJ, which is performed by the ECU 2. The

present process is executed whenever a predetermined time period elapses. In the present process, the ECU 2 calculates a demanded torque TD according to an operating condition of the engine 3, and calculates the fuel injection amount QINJ based on the calculated demanded torque TD, to thereby control the output torque of the engine 3.

[0038] In the present process, first, in a step 21 (shown as S21 in abbreviated form in FIG. 2; the following steps are also shown in abbreviated form), a basic value TD_BASE of the demanded torque TD is calculated by searching a predetermined map (not shown) according to the detected engine speed NE and accelerator pedal opening AP. In this map, the basic value TD_BASE is set to a larger value as the engine speed NE is higher and the accelerator pedal opening AP is larger.

[0039] Then, in a step 22, it is determined whether or not an LC detection system abnormality flag F_LCNG is equal to 1. This LC detection system abnormality flag F_LCNG is set to 1 when it is determined that a system for detecting a lockup clutch (LC) engagement ratio R_LC, referred to hereinafter, specifically, any of the crank angle sensor 21, the rotational speed sensor 23 and wiring for connecting between the sensors 21 and 23 and the ECU 2, is faulty.

[0040] If the answer to the question of the step 22 is affirmative (YES), i.e. if it is determined that the R_LC detecting system is faulty, there is a fear that no accurate LC engagement ratio R_LC necessary for filtering correction is obtained, and hence the basic value TD_BASE calculated in the step 21 is set as the demanded torque TD (step 23), whereby the basic value TD_BASE is inhibited from being corrected according to the LC engagement ratio R_LC.

[0041] On the other hand, if the answer to the question of the step 22 is negative (NO), i.e. if it is determined that the R_LC detecting system is normal, the basic value TD_BASE is filtered to thereby calculate an average torque TD_A (step 24). The average torque TD_A is obtained by averaging the basic value TD_BASE so as to suppress the vibration of the vehicle V which might be caused by direct reflection of the calculated basic value TD_BASE of the demanded torque TD on the output torque. The process for calculating the average torque TD_A will be described hereinafter.

[0042] Then, a torque correction term CTD_B is calculated (step 25). The torque correction term CTD_B is for correcting the basic value TD_BASE such that a torque in an opposite phase to variation in the output torque of the engine 3 is generated. The process for calculating the torque correction term CTD_B will be described hereinafter.

[0043] Then, the demanded torque TD is calculated by subtracting the torque correction term CTD_B calculated in the step 25 from the average torque TD_A calculated in the above-mentioned step 24 (step 26).

[0044] Then, the fuel injection amount QINJ is calculated by searching a predetermined map (not shown) according to the demanded torque TD calculated in the step 23 or 26 and the engine speed NE (step 27), followed by terminating the present process. Torque corresponding to the fuel injection amount QINJ calculated as above is output from the engine 3.

[0045] FIG. 3 shows the process for calculating the average torque TD_A, which is executed as a subroutine in the step 24 in FIG. 2. In the present process, first, the LC engagement ratio R_LC is calculated as a parameter indicative of the degree of engagement of the lockup clutch 7 by dividing the detected driven shaft rotational speed NS by the engine speed NE (step 31).

[0046] Next, an averaging gain FG_A is calculated by searching an average gain map shown in FIG. 5 according to the calculated LC engagement ratio R_LC (step 32). In this map, the averaging gain FG_A is set to a smaller value as the LC engagement ratio R_LC is higher.

[0047] Next, an averaging time constant FT_A is calculated by searching a predetermined averaging time constant map (not shown) according to the LC engagement ratio R_LC (step 33).

[0048] Next, the average torque TD_A is calculated by the following equation (1) using the calculated averaging gain FG_A, the averaging time constant FT_A and the basic value TD_BASE (step 34), followed by terminating the present process. In the equation (1), Ga(s) represents a transfer function of the average torque TD_A with respect to the basic value TD_BASE, and "s" represents a Laplace operator. More specifically, the reverse Laplace transform of the equation (1) is performed to determine a computing equation of a continuous system, and the average torque TD_A is calculated by using a computing equation of a discrete system which is obtained by approximate transformation of the determined computing equation of the continuous system.

$$Ga(s) = \frac{1 + FT_A \cdot FG_A \cdot s}{1 + FT_A \cdot FG_A} \dots\dots (1)$$

[0049] In the computing equation of the discrete system obtained from the above equation (1), the average torque TD_A is calculated such that it becomes closer to the basic value TD_BASE of the demanded torque TD as the averaging gain FG_A is larger, whereas as the averaging gain FG_A becomes smaller, the difference between the average torque TD_A and the basic value TD_BASE of the demanded torque TD becomes larger.

[0050] Further, as described hereinabove, the averaging gain FG_A is set to a smaller value as the LC engagement

ratio R_{LC} is higher, and hence as the degree of engagement of the lockup clutch 7 is higher, the average torque TD_A is calculated such that the difference between the average torque TD_A and the basic value TD_{BASE} of the demanded torque TD becomes larger, which makes higher the degree of averaging of the basic value TD_{BASE} .

[0051] FIG. 4 shows the process for calculating the torque correction term CTD_B , which is executed as a subroutine in the step 25 in FIG. 2. In the present process, first, a torque correction gain FG_B is calculated by searching a torque correction gain map shown in FIG. 6 according to the LC engagement ratio R_{LC} (step 41). In this map, the torque correction gain FG_B is set to a larger value as the LC engagement ratio R_{LC} is higher.

[0052] Next, a torque correction time constant FT_B is calculated by searching a predetermined torque correction time constant map (not shown) according to the LC engagement ratio R_{LC} (step 42).

[0053] Then, the torque correction term CTD_B is calculated by the following equation (2) using the torque correction gain FG_B and the torque correction time constant FT_B , calculated in the above-mentioned steps 41 and 42, respectively, and the engine speed NE (step 43), followed by terminating the present process. In the above equation (2), $G_b(s)$ represents a transfer function of the torque correction term CTD_B with respect to the engine speed NE , and "s" represents a Laplace operator. More specifically, the reverse Laplace transform of the equation (2) is performed to determine a computing equation of a continuous system, and the torque correction term CTD_B is calculated by using a computing equation of a discrete system which is obtained by approximate transformation of the determined computing equation of the continuous system.

$$G_b(s) = \frac{FT_B^2 \cdot FG_B^2 \cdot s^2}{(1 + FT_B \cdot FG_B)^2} \quad \dots\dots (2)$$

[0054] In the computing equation of the discrete system determined by the above equation (2), the torque correction term CTD_B is calculated such that the degree of influence of the engine speed NE on the torque correction term CTD_B becomes larger as the value of the torque correction gain FG_B is larger and the torque correction time constant FT_B is larger.

[0055] Further, as described above, the torque correction gain FG_B is set to a larger value as the LC engagement ratio R_{LC} is higher, and hence the torque correction term CTD_B is calculated such that it becomes larger as the degree of engagement of the lockup clutch 7 is higher.

[0056] As described hereinabove, according to the present embodiment, the basic value TD_{BASE} of the demanded torque TD is set according to the detected accelerator pedal opening AP and engine speed NE (step 21 in FIG. 2). Further, the average torque TD_A is calculated by filtering the basic value TD_{BASE} using the equations (1) and (2) (step 24), and the fuel injection amount $QINJ$ is calculated based on the average torque TD_A (steps 26 and 27). Further, the averaging gain FG_A and the averaging time constant FT_A , which represent characteristics of the above-described filtering, are set according to the LC engagement ratio R_{LC} indicative of the degree of engagement of the lockup clutch 7 (FIGS. 5 and 6).

[0057] As described heretofore, since the fuel injection amount $QINJ$ is calculated based on the average torque TD_A calculated by filtering correction of the basic value TD_{BASE} according to the LC engagement ratio R_{LC} , it is possible to control the output torque of the engine 3 according to the degree of engagement of the lockup clutch 7 such that no large variation in the output torque of the engine 3 is caused, whereby it is possible to properly suppress the vibration of the vehicle V.

[0058] Further, since the torque correction term CTD_B is calculated (step 25), and the demanded torque TD is calculated by subtracting the torque correction term CTD_B from the average torque TD_A (step 26), it is possible to cancel out the variation in the output torque by the torque in the opposite phase generated by the torque correction term CTD_B , whereby it is possible to suppress the variation in the output torque and the vibration of the vehicle V caused by the variation in the output torque.

[0059] Further, the averaging time constant FT_A used when the average torque TD_A is calculated, and the torque correction time constant FT_B used when the torque correction term CTD_B is calculated are set according to the LC engagement ratio R_{LC} , so that it is possible to perform proper filtering correction according to the transmission rate of the output torque varying with the degree of engagement of the lockup clutch 7.

[0060] Further, as the LC engagement ratio R_{LC} is higher, the averaging gain FG_A is set to a smaller value to make higher the degree of averaging of the average torque TD_A , and therefore it is possible to properly suppress the variation in the output torque of the engine 3 according to the degree of engagement of the lockup clutch 7. Similarly, as the LC engagement ratio R_{LC} is higher, the torque correction gain FG_B is set to a larger value, whereby the torque correction term CTD_B is set to a larger value. This makes it possible to properly cancel out the variation in the output torque by the torque in the opposite phase, in a manner dependent on the degree of engagement of the lockup clutch 7.

[0061] The present invention is by no means limited to the above-described embodiment, but it can be practiced in

various forms. The methods of setting the gains FG_A and FG_B and the time constants FT_A and FT_B, which represent characteristics of the filtering, are by no means limited to those in the above-described embodiment but any other suitable methods may be employed. Further, it is possible to use different maps for setting the characteristics of the filtering, depending on whether the engine 3 is in an accelerated state or in a decelerated state.

[0062] Furthermore, although in the above-described embodiment, the LC engagement ratio R_LC calculated based on the engine speed NE and the driven shaft rotational speed NS is used as the parameter indicative of the degree of engagement of the lockup clutch 7, any other suitable parameter may be used.

[0063] Further, although in the above-described embodiment, the present invention is applied to a diesel engine, by way of example, this is not limitative, but it can be applied to various engines other than the diesel engine.

[0064] A torque control device for an internal combustion engine, capable of properly suppressing the vibration of a vehicle by controlling torque output from the engine such that no large variation in the output torque is caused, when the vehicle has a torque converter having a lockup clutch. The torque control device calculates a basic value of a demanded torque for determining the output torque, according to detected operating conditions of the engine, and calculates a filtering characteristic for determining an average torque, and a filtering characteristic for determining a torque correction term, according to a detected degree of engagement of the lockup clutch. The torque control device calculates the demanded torque by filtering correction of the basic value using the filtering characteristics, and calculates a fuel injection amount based on the demanded torque. Torque corresponding to the fuel injection amount is output from the engine.

Claims

1. A torque control device for an internal combustion engine (4), for controlling an output torque which is output from the engine connected to drive wheels (W) of a vehicle via an automatic transmission (9) that has a torque converter (6) having a lockup clutch (7), comprising:

operating condition-detecting means (22, 23) for detecting an operating condition (AP, NE) of the engine (3);
basic value-setting means (S21) for setting a basic value (TD_BASE) of a torque parameter (TD_A) which is a parameter for determining the torque output, according to the detected operating condition of the engine (3);
filtering correction means (S24) for correcting the basic value (TD_BASE) by filtering thereof, to thereby set the torque parameter (TD_A);

lockup clutch engagement degree-detecting means (S31) for detecting a degree of engagement (R_LC) of the lockup clutch (7);

and

filtering characteristic-setting means for setting a filtering characteristic of said filtering correction means (S24) according to the detected degree of engagement (R_LC) of the lockup clutch (7),

characterized in that

the filtering correcting means (S24) sets the torque parameter (TD_A) as an average torque (TD A) calculated by the filtering correction of the basic value (TD_BASE) according to the degree of engagement (R_LC) of the lock up clutch (7), and includes torque correction term-calculating means (S25) for calculating a torque correction term (CTD_B) for correction of the basic value (TD_BASE), such that a torque in an opposite phase to a state of variation in the output torque from the engine is generated, and **in that** the torque control device comprises means (S26) for calculating a demanded torque (TD) by subtracting the torque correction term (CTB_B) from the calculated average torque (TD_A) and means (S27) for calculating the fuel injection amount (QINJ) of the engine from the demanded torque.

2. The torque control device as claimed in claim 1, wherein said filtering characteristic-setting means sets a gain (FG_B) of the filtering characteristic according to the detected degree of engagement (R_LC) of the lockup clutch.

3. The torque control device as claimed in claim 1, wherein said filtering characteristic-setting means sets a time constant (FT_A) of the filtering characteristic according to the detected degree of engagement (R_LC) of the lockup clutch (7).

4. A torque control method for an internal combustion engine (4), for controlling an output torque which is output from the engine connected to drive wheels (W) of a vehicle via an automatic transmission (9) that has a torque converter (6) having a lockup clutch (7), comprising:

an operating condition-detecting step of detecting an operating condition (AP, NE) of the engine (3);

a basic value-setting step (S21) of setting a basic value (TD_BASE) of a torque parameter which is a parameter (TD_A) for determining the torque output, according to the detected operating condition of the engine (3);
a filtering correction step (S24) of correcting the basic value (TD_BASE) by filtering thereof, to thereby set the torque parameter (TD_A);

a lockup clutch engagement degree-detecting step (S31) of detecting a degree of engagement (R_LC) of the lockup clutch (7); and

a filtering characteristic-setting step of setting a filtering characteristic in said filtering correction step (S24) according to the detected degree of engagement (R_LC) of the lockup clutch (7),

characterized in that

the filtering correcting step (S24) sets the torque parameter (TD_A) as an average torque (TD_A) calculated by the filtering correction of the basic value (TD_BASE) according to the degree of engagement (R_LC) of the lock up clutch (7), and includes a torque correction term-calculating step (S25) of calculating a torque correction term (CTD_B) for correction of the basic value (TD_BASE), such that a

torque in an opposite phase to a state of variation in the output torque from the engine is generated, and **in that** the torque control method comprises a step (S26) for calculating a demanded torque (TD) by subtracting the torque correction term (CTB_B) from the calculated average torque (TD_A) and a step (S27) for calculating the fuel injection amount (QINJ) of the engine from the demanded torque.

5. The torque control method as claimed in claim 4, wherein said filtering characteristic-setting step includes setting a gain (FG_B) of the filtering characteristic according to the detected degree of engagement (R_LC) of the lockup clutch (7).

6. The torque control method as claimed in claim 4, wherein said filtering characteristic-setting step include setting a time constant (FT_A) of the filtering characteristic according to the detected degree of engagement (R_LC) of the lockup clutch (7).

Patentansprüche

1. Drehmomentsteuerungsvorrichtung für ein Verbrennungsmotor (4) zum Steuern/Regeln eines Ausgangsdrehmoments, das von dem Motor ausgegeben wird, der mit Antriebsrädern (W) eines Fahrzeugs über ein Automatikgetriebe (9) verbunden ist, das einen Drehmomentwandler (6) mit einer Überbrückungskupplung (7) aufweist, umfassend:

ein Betriebszustandserfassungsmittel (22, 23) zum Erfassen eines Betriebszustands (AP, NE) des Motors (3);
ein Basiswertsetzmittel (S21) zum Setzen eines Basiswerts (TD_BASE) eines Drehmomentparameters (TD_A), der ein Parameter zur Bestimmung des Ausgangsdrehmoments ist, gemäß dem erfassten Betriebszustand des Motors (3);

ein Filterkorrekturmittel (S24) zum Korrigieren des Basiswerts (TD_BASE) durch Filterung davon, um hierdurch den Drehmomentparameter (TD_A) zu setzen;

ein Überbrückungskupplungseingriffsgraderfassungsmittel (S31) zum Erfassen eines Eingriffsgrads (R_LC) der Überbrückungskupplung (7);

und

ein Filtercharakteristiksetzmittel zum Setzen einer Filtercharakteristik des Filterkorrekturmittels (S24) gemäß dem erfassten Eingriffsgrad (R_LC) der Überbrückungskupplung (7),

dadurch gekennzeichnet, dass

das Filterkorrekturmittel (S24) den Drehmomentparameter (TD_A) als Durchschnittsdrehmoment (TD_A) setzt, das durch die Filterkorrektur des Basiswerts (TD_BASE) gemäß dem Eingriffsgrad (R_LC) der Überbrückungskupplung (7) berechnet ist, und ein Drehmomentkorrekturtermberechnungsmittel (S25) enthält, um einen Drehmomentkorrekturterm (CTD_B) zur Korrektur des Basiswerts (TD_BASE) zu berechnen, derart, dass ein Drehmoment in einer entgegengesetzten Phase zu einem Änderungszustand im Ausgangsdrehmoment von dem Motor erzeugt wird, und dass die Drehmomentsteuerungsvorrichtung ein Mittel (S26) aufweist, um ein angefordertes Drehmoment (TD) durch Subtraktion des Drehmomentkorrekturterms (CTB_B) von dem berechneten Durchschnittsdrehmoment (TD_A) zu berechnen, und ein Mittel (S27) zum Berechnen der Kraftstoffeinspritzmenge (QINJ) des Motors aus dem angeforderten Drehmoment.

2. Die Drehmomentsteuerungsvorrichtung nach Anspruch 1, worin das Filtercharakteristiksetzmittel einen Faktor (FG_B) der Filtercharakteristik gemäß dem erfassten Eingriffsgrad (R_LC) der Überbrückungskupplung setzt.

3. Die Drehmomentsteuerungsvorrichtung nach Anspruch 1, worin das Filtercharakteristiksetzmittel eine Zeitkonstante (FT_A) der Filtercharakteristik gemäß dem erfassten Eingriffsgrad (R_LC) der Überbrückungskupplung (7) setzt.

4. Drehmomentsteuerungsverfahren für ein Verbrennungsmotor (4) zum Steuern/Regeln eines Ausgangsdrehmoments, das von dem Motor ausgegeben wird, der mit Antriebsrädern (W) eines Fahrzeugs über ein Automatikgetriebe (9) verbunden ist, das einen Drehmomentwandler (6) mit einer Überbrückungskupplung (7) aufweist, umfassend:

einen Betriebszustandserfassungsschritt zum Erfassen eines Betriebszustands (AP, NE) des Motors (3);
einen Basiswertsetzschritt (S21) zum Setzen eines Basiswerts (TD_BASE) eines Drehmomentparameters (TD_A), der ein Parameter zur Bestimmung des Ausgangsdrehmoments ist, gemäß dem erfassten Betriebszustand des Motors (3);

einen Filterkorrekturschritt (S24) zum Korrigieren des Basiswerts (TD_BASE) durch Filterung davon, um hierdurch den Drehmomentparameter (TD_A) zu setzen;

einen Überbrückungskupplungseingriffsgraderfassungsschritt (S31) zum Erfassen eines Eingriffsgrads (R_LC) der Überbrückungskupplung (7); und

einen Filtercharakteristiksetzschritt zum Setzen einer Filtercharakteristik des Filterkorrekturschritts (S24) gemäß dem erfassten Eingriffsgrad (R_LC) der Überbrückungskupplung (7),

dadurch gekennzeichnet, dass

der Filterkorrekturschritt (S24) den Drehmomentparameter (TD_A) als Durchschnittsdrehmoment (TD_A) setzt, das durch die Filterkorrektur des Basiswerts (TD_BASE) gemäß dem Eingriffsgrad (R_LC) der Überbrückungskupplung (7) berechnet ist, und einen Drehmomentkorrekturtermberechnungsschritt (S25) enthält, um einen Drehmomentkorrekturterm (CTD_B) zur Korrektur des Basiswerts (TD_BASE) zu berechnen, derart, dass ein Drehmoment in einer entgegengesetzten Phase zu einem Änderungszustand im Ausgangsdrehmoment von dem Motor erzeugt wird, und dass das Drehmomentsteuerungsverfahren einen Schritt (S26) aufweist, um ein angefordertes Drehmoment (TD) durch Subtraktion des Drehmomentkorrekturterms (CTD_B) von dem berechneten Durchschnittsdrehmoment (TD_A) zu berechnen, und einen Schritt (S27) zum Berechnen der Kraftstofffeinspritzmenge (QINJ) des Motors aus dem angeforderten Drehmoment.

5. Drehmomentsteuerungsverfahren nach Anspruch 4, worin der Filtercharakteristiksetzschritt enthält, einen Faktor (FG_B) der Filtercharakteristik gemäß dem erfassten Eingriffsgrad (R_LC) der Überbrückungskupplung zu setzen.

6. Drehmomentsteuerungsverfahren nach Anspruch 4, worin der Filtercharakteristiksetzschritt enthält, eine Zeitkonstante (FT_A) der Filtercharakteristik gemäß dem erfassten Eingriffsgrad (R_LC) der Überbrückungskupplung (7) zu setzen.

Revendications

1. Dispositif de contrôle de couple pour un moteur à combustion interne (4), pour contrôler un couple de sortie qui est produit par le moteur connecté à des roues motrices (W) d'un véhicule via une transmission automatique (9) qui a un convertisseur de couple (6) ayant un embrayage de prise directe (7), comprenant:

un moyen de détection d'une condition d'exploitation (22, 23) pour détecter une condition d'exploitation (AP, NE) du moteur (3); un moyen de définition d'une valeur de base (S21) pour définir une valeur de base (TD_BASE) d'un paramètre de couple (TD_A) qui est un paramètre pour déterminer le couple de sortie, en fonction de la condition d'exploitation détectée du moteur (3);

un moyen de correction de filtrage (S24) pour corriger la valeur de base (TD_BASE) par filtrage de celle-ci, afin de définir ce faisant le paramètre de couple (TD_A);

un moyen de détection du degré d'engagement d'un embrayage de prise directe (S31) pour détecter un degré d'engagement (R_LC) de l'embrayage de prise directe (7); et

un moyen de définition d'une caractéristique de filtrage pour définir une caractéristique dudit moyen de correction de filtrage (S24) en fonction du degré d'engagement détecté (R_LC) de l'embrayage de prise directe (7),

caractérisé en ce que le moyen de correction de filtrage (S24) définit le paramètre de couple (TD_A) comme un couple moyen (TD_A) calculé par la correction de filtrage de la valeur de base (TD_BASE) en fonction du degré d'engagement (R_LC) de l'embrayage de prise directe (7), et inclut un moyen de calcul de correction de couple (S25) pour calculer un terme de correction de couple (CTD_B) pour la correction de la valeur de base (TD_BASE), de façon à générer un couple dans une phase opposée à un état de variation du couple de sortie

du moteur, et **en ce que** le dispositif de contrôle de couple comprend un moyen (S26) pour calculer un couple demandé (TD) en soustrayant le terme de correction de couple (CTB_B) du couple moyen calculé (TD_A) et un moyen (S27) pour calculer la quantité d'injection de carburant (QINJ) du moteur à partir du couple demandé.

2. Dispositif de contrôle de couple suivant la revendication 1, dans lequel ledit moyen de définition d'une caractéristique de filtrage définit un gain (FG_B) de la caractéristique de filtrage en fonction d'un degré d'engagement détecté (R_LC) de l'embrayage de prise directe.

3. Dispositif de contrôle de couple suivant la revendication 1, dans lequel ledit moyen de définition d'une caractéristique de filtrage définit une constante de temps (FT_A) de la caractéristique de filtrage en fonction d'un degré d'engagement détecté (R_LC) de l'embrayage de prise directe (7).

4. Procédé de contrôle de couple pour un moteur à combustion interne (4), pour contrôler un couple de sortie qui est produit par le moteur connecté à des roues motrices (W) d'un véhicule via une transmission automatique (9) qui a un convertisseur de couple (6) ayant un embrayage de prise directe (7), comprenant:

une étape de détection d'une condition d'exploitation pour détecter une condition d'exploitation (AP, NE) du moteur (3);

une étape de définition d'une valeur de base (S21) pour définir une valeur de base (TD_BASE) d'un paramètre de couple qui est un paramètre (TD_A) pour déterminer le couple de sortie, en fonction de la condition d'exploitation détectée du moteur (3);

une étape de correction de filtrage (S24) pour corriger la valeur de base (TD_BASE) par filtrage de celle-ci, afin de définir ce faisant le paramètre de couple (TD_A);

une étape de détection du degré d'engagement d'un embrayage de prise directe (S31) pour détecter un degré d'engagement (R_LC) de l'embrayage de prise directe (7); et

une étape de définition d'une caractéristique de filtrage pour définir une caractéristique de ladite étape de correction de filtrage (S24) en fonction du degré d'engagement détecté (R_LC) de l'embrayage de prise directe (7),

caractérisé en ce que l'étape de correction de filtrage (S24) définit le paramètre de couple (TD_A) comme un couple moyen (TD_A) calculé par la correction de filtrage de la valeur de base (TD_BASE) en fonction du degré d'engagement (R_LC) de l'embrayage de prise directe (7), et inclut une étape de calcul de correction de couple (S25) pour calculer un terme de correction de couple (CTD_B) pour la correction de la valeur de base (TD_BASE), de façon à générer un couple dans une phase opposée à un état de variation du couple de sortie du moteur, et **en ce que** le procédé de contrôle de couple comprend une étape (S26) pour calculer un couple demandé (TD) en soustrayant le terme de correction de couple (CTB_B) du couple moyen calculé (TD_A) et une étape (S27) pour calculer la quantité d'injection de carburant (QINJ) du moteur à partir du couple demandé.

5. Procédé de contrôle de couple suivant la revendication 4, dans lequel ladite étape de définition d'une caractéristique de filtrage inclut la définition d'un gain (FG_B) de la caractéristique de filtrage en fonction d'un degré d'engagement détecté (R_LC) de l'embrayage de prise directe (7).

6. Procédé de contrôle de couple suivant la revendication 4, dans lequel ladite étape de définition d'une caractéristique de filtrage inclut la définition d'une constante de temps (FT_A) de la caractéristique de filtrage en fonction d'un degré d'engagement détecté (R_LC) de l'embrayage de prise directe (7).

FIG. 1

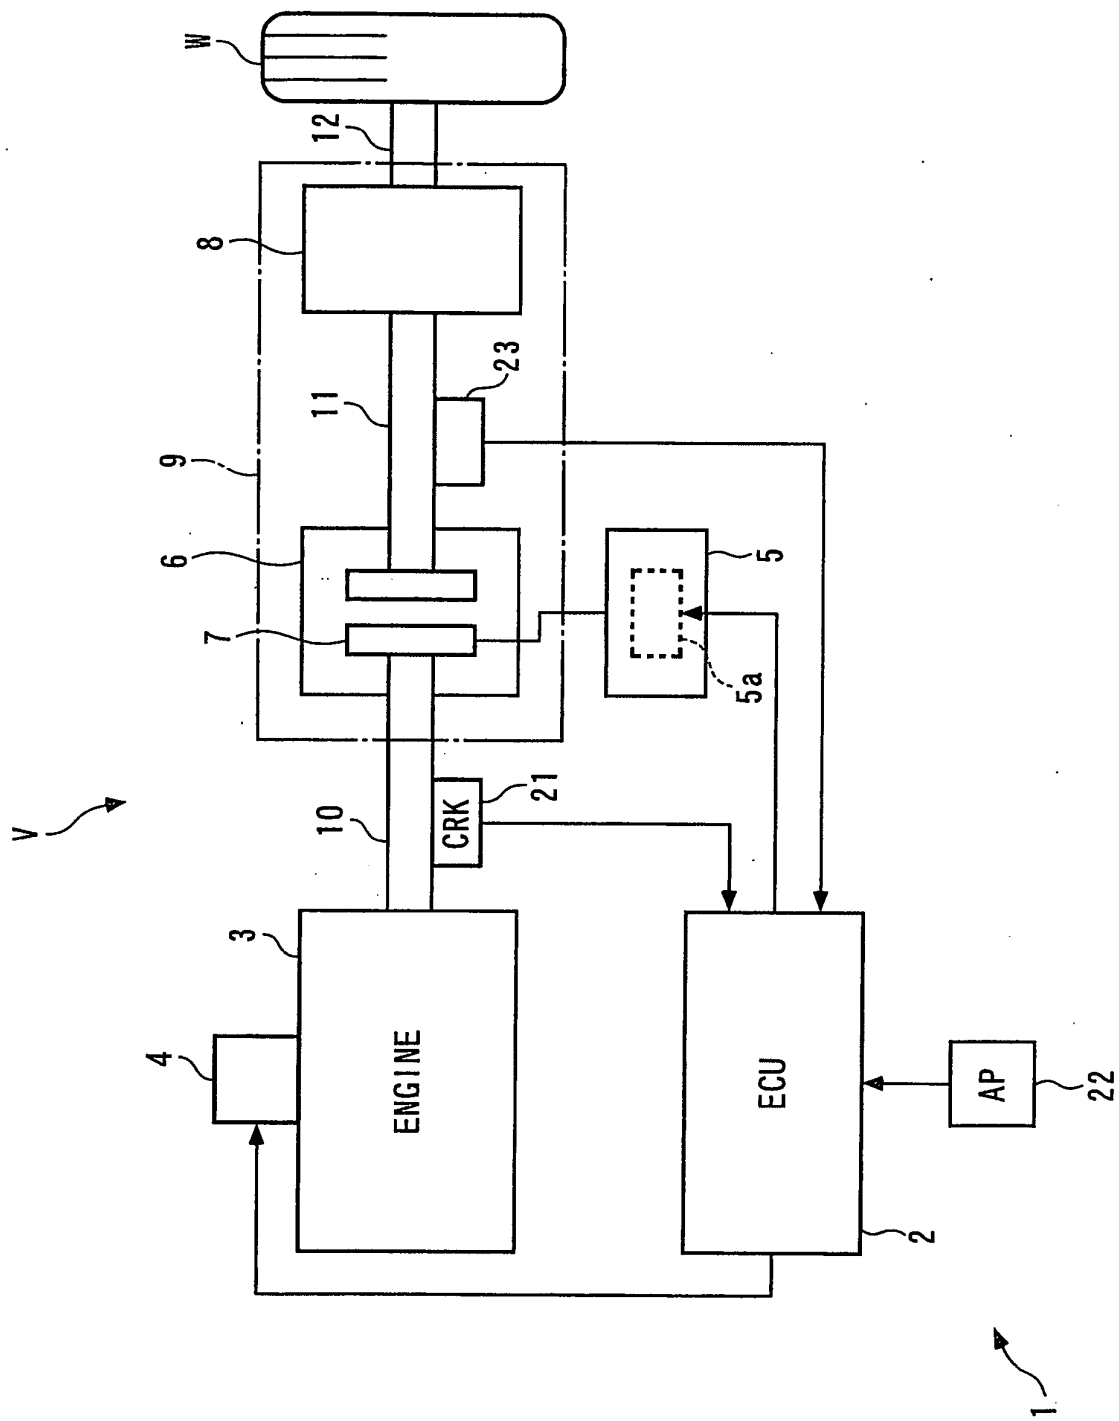


FIG. 2

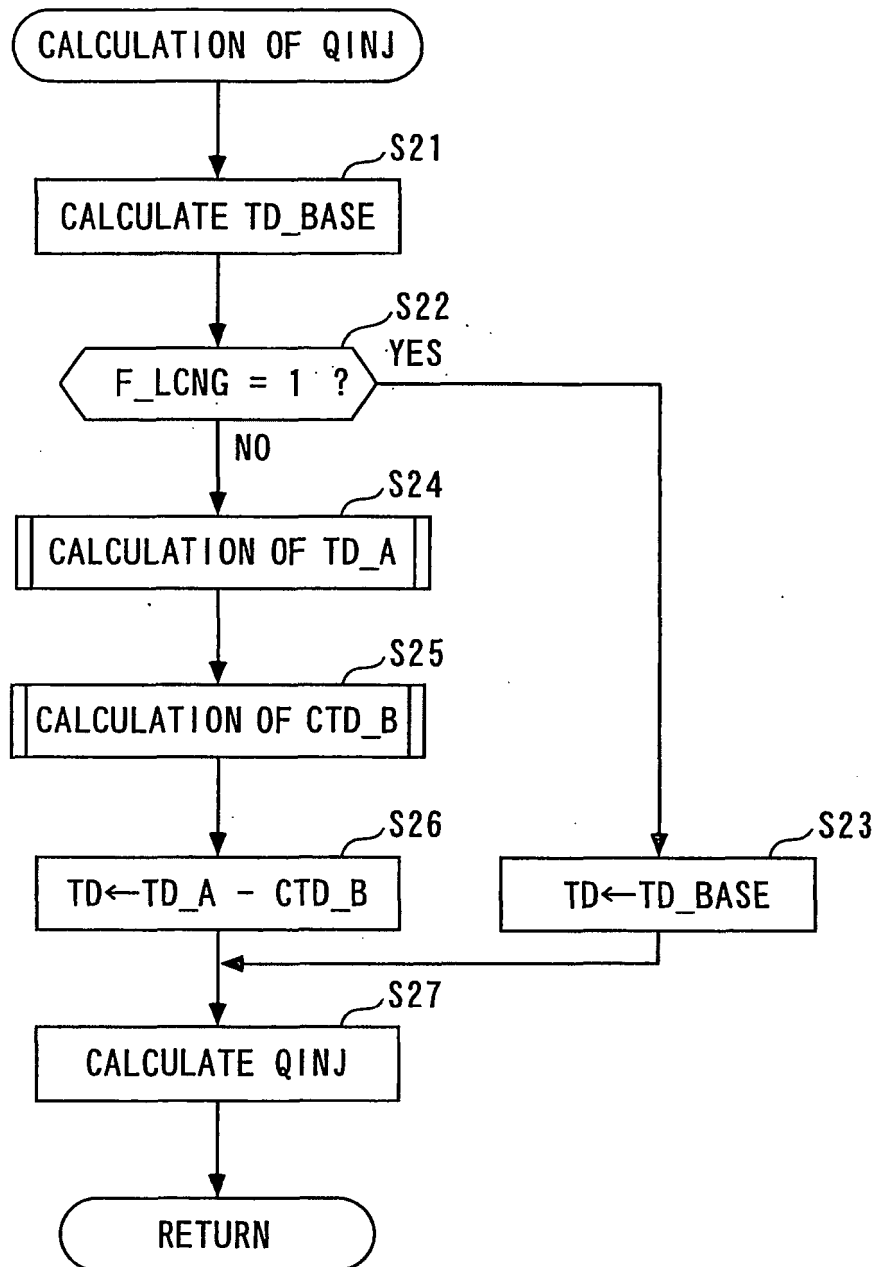


FIG. 3



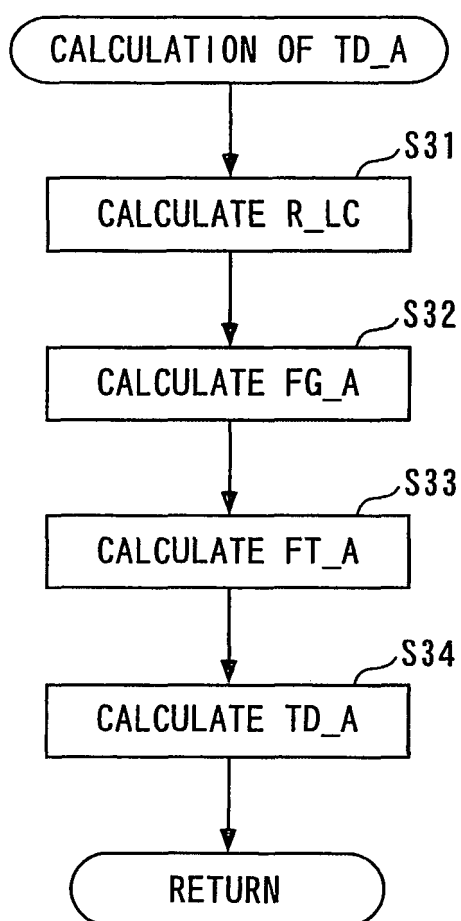



FIG. 4

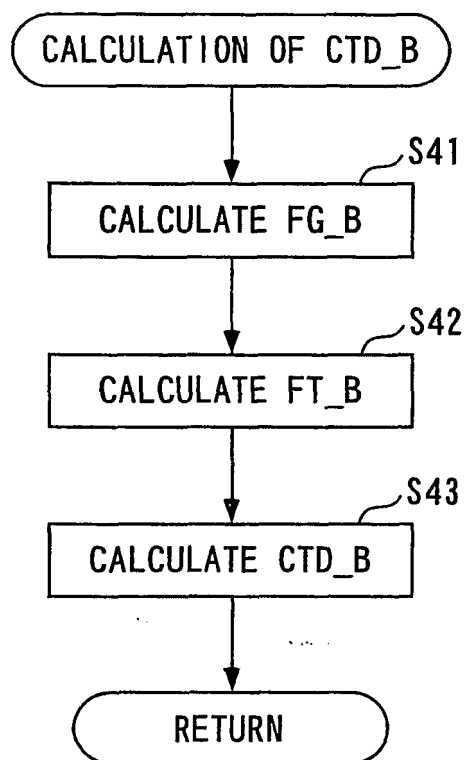

F I G. 5

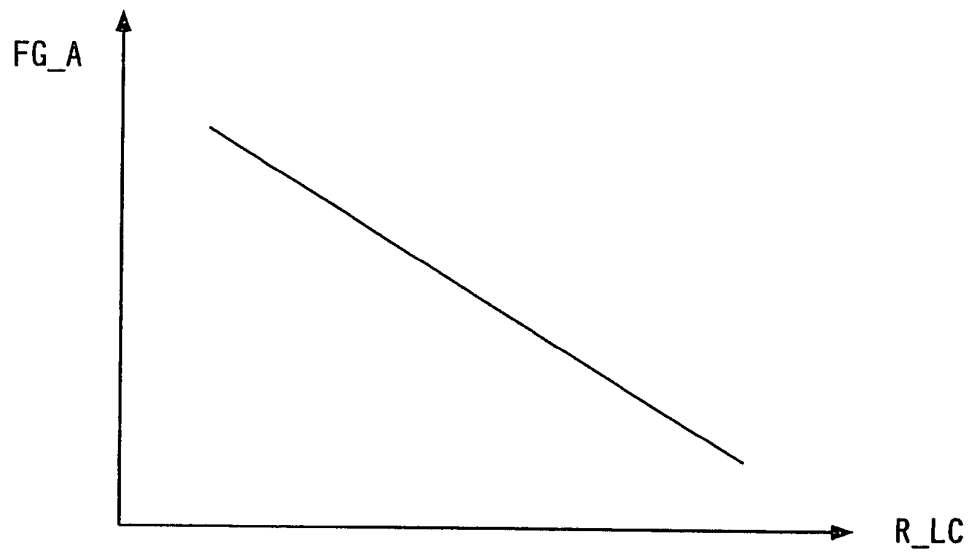

F I G. 6

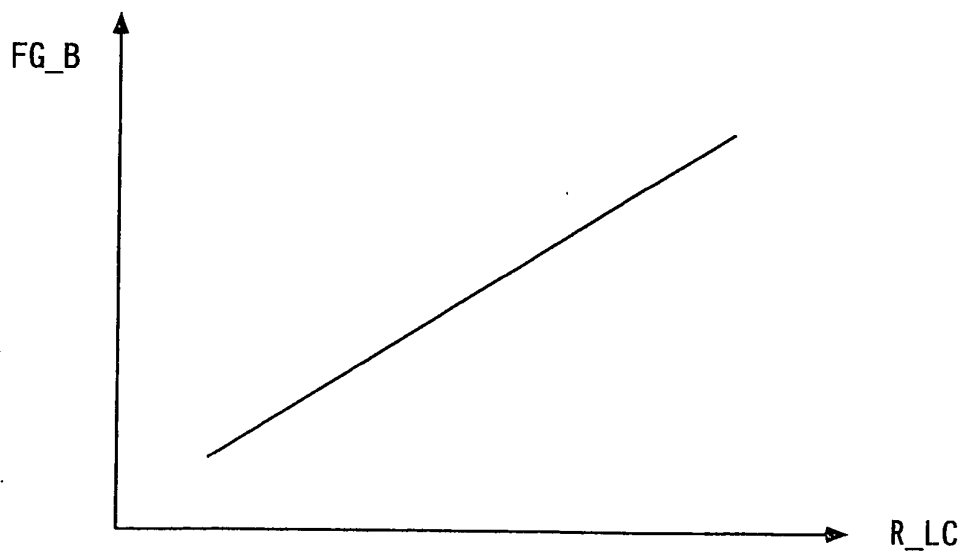

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004092522 A [0002]
- DE 19549081 A1 [0005]
- EP 0881376 A2 [0006]
- US 2005054482 A1 [0007]