



(51) International Patent Classification:

A61N 5/06 (2006.01) *A61L 2/08* (2006.01)
A23L 3/26 (2006.01)

(21) International Application Number:

PCT/US2017/034396

(22) International Filing Date:

25 May 2017 (25.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/341,691 26 May 2016 (26.05.2016) US

(71) Applicants: **SAN DIEGO STATE UNIVERSITY RESEARCH FOUNDATION** [US/US]; 5250 Campanile Drive, San Diego, CA 92182 (US). **SONOVIA HOLDINGS LLC** [US/US]; 1501 South Arlington Avenue, Reno, NV 89509 (US).


(72) Inventors: **ENWEMEKA, Chukuka, S.**; 5500 Campanile Drive, San Diego, CA 92182-8010 (US). **CASTEL, John, C.**; 1501 S. Arlington Avenue, Reno, NV 89509 (US).

(74) Agent: **CARLSON, Judith, L.**; Stinson Leonard Street LLP, 1201 Walnut Street, Suite 2900, Kansas City, MO 64106 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: PHOTOERADICATION OF MICROORGANISMS WITH PULSED PURPLE OR BLUE LIGHT

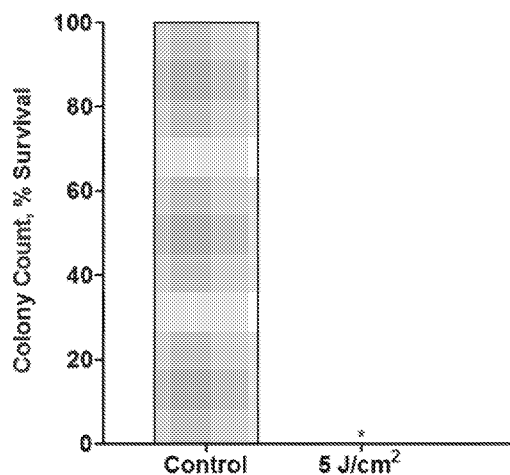

* Statistically significant compared to the control ($p < 0.0001$)

FIG. 20

(57) Abstract: The present invention is directed to a system and method for photoeradication of microorganisms from a target. A light source is configured to irradiate the target with purple or blue light in a pulsed mode of irradiation at an average irradiance that preferably ranges from 0.1 mW/cm² to 20 mW/cm². An electronic circuit is configured to control the light source in accordance with an irradiation schedule that includes a plurality of irradiation sessions. The light source is controlled to provide the purple or blue light at a radiant exposure that preferably ranges from 0.5 J/cm² to 60 J/cm² during each of the irradiation sessions. The irradiation sessions are provided at a plurality of time intervals so as to cause photoeradication of all or a portion of the microorganisms.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

PHOTOERADICATION OF MICROORGANISMS WITH PULSED PURPLE OR BLUE LIGHT

Cross-Reference to Related Applications

This application is based on and claims priority to U.S. Provisional Application
Serial No. 62/341,691, filed on May 26, 2016, which is incorporated herein by reference in its
entirety.

Background of the Invention

Various devices for delivering light to a region of skin for therapeutic or
cosmetic purposes are known in the art. The use of phototherapy, in particular blue light, as an
armamentarium for antimicrobial activity has been of great interest, particularly since
Enwemeka et al., first reported in 2007 that 405 nm and 470 nm light inactivate the methicillin-
resistant *Staphylococcus aureus* (MRSA) bacteria. Current research indicates that bacteria kill
rate is tied to the intensity and total amount of irradiation energy; that is, the higher the
intensity used and the higher the total energy of irradiation, the better the bacteria kill rate. For
example, conventional light emitting diodes (LEDs) operating in a continuous wave (CW)
mode of irradiation have been used to deliver light at high irradiances and radiant exposures to
increase bacteria kill rates. However, there is a risk that these high irradiances and radiant
exposures may damage other tissues in the region under treatment through thermal or
photochemical effects or may provide a significant optical hazard to the subject undergoing
treatment.

Brief Summary of the Invention

The present invention is directed to a system and method for photoeradication
of microorganisms from a target. A light source is configured to irradiate the target with
purple or blue light in a pulsed mode of irradiation at an average irradiance that preferably
ranges from 0.1 mW/cm² to 20 mW/cm². An electronic circuit is configured to control the
light source in accordance with an irradiation schedule that includes a plurality of irradiation
sessions. The light source is controlled to provide the pulsed purple or blue light at a radiant
exposure that preferably ranges from 0.5 J/cm² to 60 J/cm² during each of the irradiation
sessions. The irradiation sessions are provided at a plurality of time intervals so as to cause
photoeradication of all or a portion of the microorganisms.

In a first embodiment, the target comprises a region of skin, tissue or a wound
infected by various types of bacteria, such as *Propionibacterium acnes* (*P. acnes*). The
bacteria infected skin, tissue, or wound is treated by irradiating the region with pulsed purple

- 2 -

or blue light. Preferably, the pulsed purple or blue light is provided at specified pulse parameters, dosages and time intervals so as to inactivate all or a portion of the bacteria at low irradiances and radiant exposures compared to those of a continuous wave (CW) mode of irradiation. As a result, it is believed that the bacteria can be inactivated without damage to other tissues in the region under treatment.

In a second embodiment, the target comprises an environment contaminated with various types of bacteria, such as methicillin-resistant *Staphylococcus aureus* (MRSA). The contaminated environment may comprise, for example, a locker room, a public or private restroom, an airplane, a school, a beach, a playground, a playing field, a hospital or a clinical environment. The contaminated environment is irradiated with pulsed purple or blue light as discussed above so as to photoeradicate the bacteria and thereby sanitize the area.

In a third embodiment, the target comprises food under storage or transport conditions that is contaminated with bacteria, such as *Salmonella* spp., *E. Coli*, and *Listeria* spp. The food may be contained within, for example, a refrigeration system, a food display system, a food storage area, or a food processing system. The food is irradiated with pulsed purple or blue light as discussed above so as to photoeradicate the bacteria and thereby enhance shelf-life and reduce the potential for significant bacterial infection transmission to human and animal populations.

Brief Description of the Drawings

Various exemplary embodiments of the present invention are described in detail below with reference to the attached drawing figures, as described below.

FIG. 1 is a graph depicting *P. acnes* irradiation with 450 nm light at radiant exposures of 20 and 60 J/cm²; irradiance of 4.5 mW/cm²; continuous wave (CW) mode of irradiation; and single irradiation at 0 hours.

FIG. 2 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 20 J/cm²; irradiance of 4.5 mW/cm²; continuous wave (CW) mode of irradiation; and multiple irradiation at 0, 24 and 48 hours.

FIG. 3 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 20 J/cm²; irradiance of 4.5 mW/cm²; continuous wave (CW) mode of irradiation; and multiple irradiation at 0, 4, 24 and 48 hours.

FIG. 4 is a graph depicting *P. acnes* irradiation with 450 nm light at radiant exposures of 30, 40, 45 and 60 J/cm²; irradiance of 4.5 mW/cm²; continuous wave (CW) mode of irradiation; and multiple irradiation at 0 and 4 hours.

FIG. 5 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 60 J/cm²; average irradiance of 5 mW/cm²; continuous wave (CW) mode of irradiation and pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0 and 4 hours.

5 FIG. 6 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 20 J/cm²; average irradiance of 5 mW/cm²; continuous wave (CW) mode of irradiation and pulsed mode of irradiation (33% and 20% duty factors); and multiple irradiation at 0 and 4 hours.

FIG. 7 is a graph depicting *P. acnes* irradiation with 450 nm light at radiant exposures of 5, 10 and 20 J/cm²; average irradiance of 2 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 4, 24 and 48 hours.

FIG. 8 is a graph depicting *P. acnes* irradiation with 450 nm light at radiant exposures of 5, 10 and 20 J/cm²; average irradiance of 3.5 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 4, 24 and 48 hours.

15 FIG. 9 is a graph depicting *P. acnes* irradiation with 450 nm light at radiant exposures of 5, 10 and 20 J/cm²; irradiance of 5 mW/cm²; continuous wave (CW) mode of irradiation; and multiple irradiation at 0, 4, 24 and 48 hours.

FIG. 10 is a graph depicting *P. acnes* irradiation with 450 nm light at radiant exposures of 5, 10 and 20 J/cm²; average irradiance of 3 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 4, 24 and 48 hours.

FIG. 11 is a graph depicting *P. acnes* irradiation with 450 nm light at radiant exposures of 5, 10 and 20 J/cm²; average irradiance of 3 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 6 and 24 hours.

25 FIG. 12 is a graph depicting *P. acnes* irradiation with 450 nm light at radiant exposures of 5, 10 and 20 J/cm²; average irradiance of 3 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3 and 6 hours.

FIG. 13 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 5 J/cm²; average irradiance of 3 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours.

30 FIG. 14 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 5 J/cm²; average irradiance of 3 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours.

FIG. 15 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 5 J/cm²; average irradiance of 2 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours.

5 FIG. 16 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 5 J/cm²; average irradiance of 2 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours.

FIG. 17 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 3.6 J/cm²; average irradiance of 2 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 24, 27, 48, 51, 72 and 75 hours.

10 FIG. 18 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 3.6 J/cm²; average irradiance of 2 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 24, 27, 48, 51, 72, 75, 96 and 99 hours.

FIG. 19 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 3.6 J/cm²; average irradiance of 2 mW/cm²; pulsed mode of irradiation (33% duty
15 factor); and multiple irradiation at 0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours.

FIG. 20 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant exposure of 5 J/cm²; average irradiance of 2 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours.

FIG. 21 is a graph depicting *P. acnes* irradiation with 450 nm light at a radiant
20 exposure of 3.6 J/cm²; average irradiance of 2 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours.

FIG. 22A is a photograph of a printed LED flexible lamp suitable for use in accordance with the present invention.

FIG. 22B is a photograph of the printed LED flexible lamp of FIG. 22A in an
25 unlit state.

FIG. 23 is a schematic illustration depicting an experimental set-up used in bacteria irradiation with a 458 nm laser light.

FIG. 24A is a graph depicting porphyrin emission extracted from *P. acnes* excited with 458 nm light.

30 FIG. 24B is a graph depicting porphyrin fluorescence emission extracted from *P. acnes* excited with 450 nm light from the printed LED flexible lamp shown in FIG. 22A at an average irradiance of 3 mW/cm²; pulsed mode of irradiation (33% duty factor); and multiple irradiation at 0, 10, 20 and 30 minutes.

- 5 -

FIG. 24C is a graph depicting porphyrin emission extracted from a sample of *Protoporphyrin IX* excited with 450 nm light from the printed LED flexible lamp shown in FIG. 22A.

FIG. 25 illustrates the general structure of a light source in the form of a very thin layered structure that is suitable for delivering pulsed light in accordance with the present invention.

FIG. 26 is a top plan view of various exemplary shapes for the light source of FIG. 25.

FIG. 27 illustrates an exemplary OLED structure for use in the light source of FIG. 25.

FIG. 28 illustrates an exemplary printable LED structure for use in the light source of FIG. 25.

FIG. 29 illustrates a light source with a bottom light emitting configuration that is suitable for delivering pulsed light in accordance with the present invention.

FIG. 30 illustrates a light source with a top light emitting configuration that is suitable for delivering pulsed light in accordance with the present invention.

FIG. 31 is a block diagram of an electronic circuit for controlling a light source in accordance with the present invention, wherein the electronic circuit includes a drive circuit and microcontroller that is preprogrammed to provide a fixed dose of light.

FIG. 32 is a block diagram of an electronic circuit for controlling a light source in accordance with the present invention, wherein the electronic circuit includes sensors that operate in a closed loop to provide feedback to a microcontroller so as to dynamically control the light source.

Detailed Description of Exemplary Embodiments

The present invention is directed to methods and systems for the photoeradication of microorganisms from a target using pulsed purple or blue light in accordance with an irradiation schedule that includes a plurality of irradiation sessions provided at a plurality of time intervals. While the invention will be described in detail below with reference to various exemplary embodiments, it should be understood that the invention is not limited to the specific methodologies or device configurations of these embodiments. In addition, although the exemplary embodiments are described as embodying several different inventive features, one skilled in the art will appreciate that any one of these features could be implemented without the others in accordance with the present invention.

I. General Overview

The methods and systems of the present invention may be used to photoeradicate many different types of microorganisms with pulsed purple or blue light provided at specified pulse parameters, dosages and time intervals.

5 In a first embodiment, the invention is used to provide treatment for many different types of diseases, disorders or conditions. For example, a region of skin, tissue, or a wound infected by bacteria may be irradiated with pulsed purple or blue light for the treatment of a bacterial infection. The treatment can be provided to subjects having or who are susceptible to or at elevated risk for experiencing a bacterial skin, tissue or wound infection.

10 Subjects may be susceptible to or at elevated risk for experiencing a bacterial infection due to family history, age, environment, and/or lifestyle. As used herein, "susceptible" and "at risk" refer to having little resistance to a certain disease, disorder or condition, including being genetically predisposed, having a family history of, and/or having symptoms of the disease, disorder or condition.

15 The bacterial infection may comprise any infection caused by aerobic and anaerobic bacteria (Gram positive and Gram negative). Exemplary bacterial infections include acne, psoriasis, cellulitis, erysipelas, erythrasma, folliculitis and skin abscesses, hidradenitis suppurativa, impetigo and ecthyma, lymphadenitis, lymphangitis, necrotizing skin infections, staphylococcal scalded skin syndrome, as well as wound and tissue infections such as

20 osteomyelitis.

In a second embodiment, the invention is used to enable photoeradication of bacteria from contaminated environments. The bacteria may comprise any aerobic and anaerobic bacteria (Gram positive and Gram negative). For example, community associated methicillin-resistant *Staphylococcus aureus* (MRSA) strains are often acquired from places that

25 people congregate, such as locker rooms, public or private restrooms, airplanes, schools, beaches, playgrounds, playing fields, etc., while hospital associated MRSA is contacted in hospitals and clinical environments. These contaminated environments may be irradiated with pulsed purple or blue light to provide a more effective way to sanitize such places. The pulsed purple or blue light may be placed together with a white light to act as a dual light source, one

30 for lighting and one for bactericidal effects. The pulse treatment sequences could be applied daily to the environment or on any other periodic or scheduled basis (e.g., the pulse treatment sequence could be applied to the interior surfaces of an airplane between the various successive flights).

- 7 -

In a third embodiment, the invention is used to enable photoeradication of bacteria from food. The bacteria may comprise any aerobic and anaerobic bacteria (Gram positive and Gram negative). For example, foods may be contaminated with *Salmonella* spp., *E. Coli*, or *Listeria* spp. *Salmonella* spp. contains CspH, a cold shock protein that protects the bacteria at 50°C. As such, refrigeration at this temperature may not be adequate to kill the bacteria. Refrigeration in retail may be a higher temperature further exacerbating the problem of bacterial growth. Globally, there are more than 80.3 million cases annually of *Salmonella* spp. with more than 115,000 deaths. Contaminated foods may be irradiated with pulsed purple or blue light to provide a more effective way to extend shelf life and prevent bacterial transmission to humans and animals exposed to such foods. The pulsed light may be built into commercial, residential or portable refrigeration systems, food display systems, food storage areas and systems for food processing. For example, the pulsed purple or blue light may be activated whenever a door of a refrigeration system is opened and closed. When the door is opened, the light would be white and when closed the pulsed purple or blue light would be applied at the correct dose and treatment sequence. The treatment sequence would be applied daily and/or as new food items are added to the food storage or processing system.

For all three embodiments discussed above, exemplary bacteria include *Propionibacterium acnes*, *Propionibacterium* spp., *Staphylococcus* spp. (including methicillin resistant strains), *Clostridium* spp., *Escherichia* spp., *Pseudomonas* spp., *Campylobacter* spp., *Listeria* spp., *Leuconostoc* spp., *Bacillus* spp., *Acinetobacter* spp., *Streptococcus* spp., *Brucella* spp., *Proteus* spp., *Klebsiella* spp., *Shigella* spp., *Helicobacter* spp., *Mycobacterium* spp., *Enterococcus* spp., *Salmonella* spp., *Chlamydia* spp., *Porphyromonas* spp., *Stenotrophomonas* spp., and *Elizabethkingia* spp.

In accordance with the invention, bacteria or other microorganisms are inactivated via the application of purple or blue light in a pulsed mode of irradiation. As used herein, "purple or blue light" refers to light having a wavelength ranging from about 380 nm to about 500 nm (e.g., 380, 390, 400, 410, 420, 430, 440, 450, 460, 470, 480, 490, 500 nm or some value therebetween). A particularly suitable wavelength is about 450 nm. The pulsed purple or blue light is provided at radiant exposures that can range from about 0.5 J/cm² to about 60 J/cm², with a preferred range of about 3.6 J/cm² to about 20 J/cm², and a more preferred range of about 3.6 J/cm² to about 5 J/cm². The average irradiance can range from about 0.1 mW/cm² to about 20 mW/cm², with an average irradiance of about 2 mW/cm² to about 3 mW/cm² being preferred at the tissue surface, contaminated environment or food

surface. The peak irradiance in pulsed mode is about 3 times the average irradiance, i.e., about 0.3 mW/cm² to about 60 mW/cm² or the preferred range of about 6 mW/cm² to about 15 mW/cm² at a duty factor of 33%. At other duty factors, the peak irradiance may be higher or lower so that the average irradiance stays within the preferred ranges of irradiance described herein. The duty factor is typically in the range of about 20% to about 33%.

It should be understood that the low levels of light used in connection with the present invention (e.g., average irradiances of about 2 mW/cm² to about 3 mW/cm² and radiant exposures of about 3.6 J/cm² to about 5 J/cm²) are very safe to the eye and meet international blue light safety requirements, including IEC TR 62778:2014 (Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaries), IEC 62471:2006 (Photobiological safety of lamps and lamp systems), IEC 60601-2-57:2011 (Medical Electrical equipment - Part 2-57: Particular requirements for the basic safety and essential performance of non-laser light source equipment intended for therapeutic, diagnostic, monitoring and cosmetic/aesthetic use). This provides a significant advantage over continuous wave (CW) light sources that deliver light at high irradiances and radiant exposures. These higher output light sources also require significant cooling and heat sinking and, thus, are not ideal for refrigeration applications.

The purple or blue light is preferably provided in a pulsed mode of irradiation, as opposed to a continuous wave (CW) mode of irradiation. The pulse duration can range from about 5 microseconds to about 1,000 microseconds, and the off time between pulses can range from about 10 microseconds to about 1 second. A suitable combination may range from about 5 microseconds to about 30 microseconds for the pulse duration with off times ranging from about 10 microseconds to about 100 microseconds. A particularly suitable combination provides a pulse duration of about 10 microseconds and an off time of about 20 microseconds. The pulses provided can be a square wave, rectified sinusoidal waveform or any combination thereof, although other pulse shapes may also be used in accordance with the present invention. A square wave with a rise time of less than 1 microsecond is preferred. A particularly suitable pulse repetition rate can range from about 33 kHz to about 40 kHz.

The pulsed purple or blue light may be applied one time (i.e., single irradiation session) and is preferably provided multiple times (i.e., multiple irradiation sessions) at the desired radiant exposures (fluence) and power density (irradiance). One skilled in the art will appreciate that the irradiation time for each irradiation session is dependent on the dose, and is typically in the range of about 20 minutes to about 45 minutes for the irradiances and radiant

exposures used in connection with the present invention. The duration of exposure may also be controlled by the decay in fluorescence of the bacteria. In that configuration, the exposure would stop when the fluorescence has depleted to a preset level indicating that there is insufficient photo-activity to maintain bacterial kill.

5 Preferably, the pulsed purple or blue light is applied during a plurality of irradiation sessions at pre-defined time intervals in accordance with an irradiation schedule, as described below. The time interval between irradiation sessions may range from about one hour to about four hours (e.g., 1, 2, 3, 4 hours or some value therebetween) with two or three (or more) irradiation sessions per day. These timed irradiation sessions may also be
10 repeated on two, three, four or more days in certain embodiments, or in the case of environmental or food irradiation on a daily basis. The pulsing has been found to be optimized when the irradiation schedule includes the application of pulses three times per day with a three hour time interval between applications, which may be repeated on two or more days (e.g., when the pulses are applied at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours). Alternatively, the
15 application of the pulses may be timed to the microorganism replication cycle (discussed below) or the depletion and restoration of porphyrins or other photoactive molecules involved in bacterial photoeradication. Of course, other irradiation schedules that are suitable for a particular application may also be used within the scope of the present invention. The irradiation schedule is preferably chosen to provide a survival rate for the microorganisms of
20 less than 50% and preferably 0% (i.e., a survival rate of 50%, 40%, 30%, 20%, 10%, 5%, 0% or some value therebetween).

 In addition to the basic pulsing of the purple or blue light as described above, the pulsed mode may be further modulated when used for irradiation of human or animal tissue, i.e., gated on and off with a low frequency signal timed to coincide with the heart rate or
25 at a rate similar to the heart rate (i.e., 0.5 to 2 Hz or a multiple or harmonic thereof). This signal allows for recharge of the free oxygen, porphyrins or other molecules responsible for photochemical activation of cellular killing mechanisms during the resting period of the photostimulation. Duty factors in the range of 5% to 95% may be used for this modulation.

 Any suitable light source may be used to generate the pulsed purple or blue
30 light in accordance with the present invention. Exemplary light sources include various types of lasers, light emitting diodes (LEDs), organic light emitting diodes (OLEDs), printed light emitting diodes (printed LEDs), polymer light emitting diodes (PLEDs) also known as light emitting polymers (LEPs), quantum dot light emitting diodes (QDLEDs), and fluorescent tubes

- 10 -

emitting light in the purple or blue spectral region. Exemplary light sources are described in greater detail below.

For the first embodiment directed to the treatment of various diseases, disorders or conditions, devices comprised of printed LEDs or OLEDs on flexible substrates are preferred due to their ability to produce light with an intensity that is substantially constant across the surface of the light source so as to provide substantially uniform light emission when the light source is in contact with or illuminates skin or tissue of a subject. The devices are also able to conform to the skin or tissue surface to maximize optical coupling. In addition, a layer of hydrogel may be used as an adhesive to contact the flexible substrate to the skin or tissue surface and thereby provide optical light piping and coupling. The hydrogel layer may also contain therapeutic substances used to enhanced bacterial inhibition or kill.

For the second and third embodiments directed to photoeradication of bacteria from contaminated environments and food, respectively, it is possible to use strips or sheets of printed LEDs or OLEDs, high power LEDs or even tube lamps emitting modulated light in the UVA through blue spectral range. Certain of these strips or sheets may have rows of blue lamps in parallel or interspersed with white lamps or phosphor coated or Stokes conversion quantum dots or the like to produce white light. As used herein, "white light" means light having a color temperature in the range of about 1700 kelvins (K) to about 9500 kelvins (K).

In some embodiments, the light source is controlled by an electronic circuit with a drive circuit and microcontroller that provides a preprogrammed sequence of light pulses at a fixed dose during each irradiation session. In other embodiments, the light source is controlled by an electronic circuit with one or more sensors that operate in a closed loop to provide feedback to a microcontroller so as to dynamically control the dose during a treatment session. Exemplary electronic circuits for both preprogrammed control and dynamic control of a light source are described in greater detail below. In some embodiments, the controller will receive input from a lighting system or the opening or closing of a door in a refrigeration or storage unit to activate the pulsed purple or blue lights and provide the appropriate daily irradiation sequence.

II. *In Vitro* Testing of *P. Acnes* Cultures to Determine Feasibility and Reproducibility of Inactivation with Light Irradiation

Testing was performed to determine the feasibility and reproducibility of 450 nm light to inactivate *P. acnes* using flexible printed LED lighted substrates operated in a continuous wave (CW) irradiation mode, a pulsed irradiation mode with a 33% duty factor, and

a pulsed irradiation mode with a 20% duty factor (referred to hereinafter as CW mode, 33% DF pulsed mode, and 20% DF pulsed mode). An example of the lighted substrate is shown in FIG. 22A (lit state) and FIG. 22B (unlit state).

Culturing *P. Acnes*

5 A vial of *P. acnes* (ATCC 6919) was obtained from the American Type Culture Collection (ATCC) and cultures started according to ATCC recommendations. Briefly, under anaerobic conditions, the lyophilized pellet was rehydrated in 500 µl modified reinforced clostridial broth (pre-reduced) and transferred into another tube containing 5ml clostridial broth. Test tubes were labelled as "Start Cultures" (SC) and 200 µl transferred onto a
10 reinforced clostridial agar plate. The bacteria were streaked on the plates for isolation of single colonies by the "clock plate technique" to check colony morphology and purity. These plates were called "start plates." Both tube/plate were placed in an anaerobic chamber with BD Gas-Pak EZ anaerobic container system sachets. The anaerobic chamber was then placed inside a 37°C incubator for 72 hours. After 72 hours of growth period, culture tubes were removed
15 from the 37°C incubator and tested for their susceptibility to irradiation with 450 nm blue light.

Illumination of Bacteria

A 5ml liquid culture was grown for 3 days and 1ml pipetted into a sterile microcentrifuge tube and centrifuged at 13,300 rpm for five minutes. The supernatant was removed and discarded. The pellet was re-suspended in 1ml saline and optical density adjusted
20 using McFarland standard to 0.8 to 1.0 at 625 nm for a concentration of 10^8 CFU/ml. The bacteria were diluted to a concentration of 1×10^6 CFU/ml and 2µl streaked onto reduced clostridial agar plates (12 well plates were used, which enabled triplicate irradiations with 3 patches simultaneously) and irradiated in an anaerobic chamber with various protocols. A set of non-irradiated plates served as controls. After irradiation, plates were placed upside down
25 in the anaerobic chamber, along with a Gas-pak sachet and incubated at 37°C for 72 hours. The colonies were then counted, percentage survival computed and morphology checked. Illumination times and intervals were optimized based on experimentation as to which dose and sequence provided the most effective kill rates.

Quantification of Bacterial Colonies

30 Standardized digital images of *P. acnes* colonies were taken 72 hours after incubation, with the camera positioned 10 cm perpendicularly above each plate to ensure consistency of colony magnification. Colonies were counted, and percent survival calculated, comparing irradiated groups and non-irradiated controls.

Description of Test Protocols and Test Results

Example 1

A first series of experiments involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) – ITO coated film with printed LEDs. The lighted substrate was set to operate in CW mode and driven with a constant current source. The peak and average irradiances were the same, i.e., 4.5 mW/cm², due to the continuous output. The bacteria were irradiated one, three or four times with different radiant exposures, as described below. Three substrates were provided for the experiments and all were tested and calibrated.

The data is presented in FIGS. 1-4. As illustrated in FIG. 1, single irradiation of bacteria with radiant exposures of 20 J/cm² and 60 J/cm² produced statistically significant decreases in percent survival when compared to the control, with maximum reduction of 31% observed at 60 J/cm². As illustrated in FIG. 2, triple irradiation of bacteria with a radiant exposure of 20 J/cm² at 0, 24 and 48 hours reduced the percent survival to 62%, which was significantly different from the control. As illustrated in FIG. 3, when bacteria were irradiated four times with a radiant exposure of 20 J/cm² at 0, 4, 24 and 48 hours, a significant decrease in percent survival of 31% was observed when compared to the control. This percent survival was much lower than the percent survival of 62% observed with triple irradiation at 0, 24 and 48 hours (FIG. 2). It was found that four exposures at 20 J/cm² applied at 0, 4, 24 and 48 hours provided the highest kill rates as compared to a single, double or triple exposure.

FIG. 4 illustrates the relationship between different radiant exposures for a double exposure occurring at 0 and 4 hours. Double irradiation of bacteria with radiant exposures of 30, 40, 45 and 60 J/cm² at 0 and 4 hours produced a significant dose dependent decrease in percent survival as the dose increased, with complete inactivation observed at 60 J/cm².

Example 2

A second series of experiments involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in CW mode, 33% DF pulsed mode, or 20% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was the same for all modes, i.e., 5 mW/cm². The peak irradiance was 15 mW/cm² in the 33% DF pulsed mode (i.e., three times higher than CW mode) and 25 mW/cm² in the 20% DF pulsed mode (i.e., five times higher than CW mode). In the 33%

DF pulsed mode, the pulse duration was 10 microseconds with an off time of 20 microseconds, and the pulse repetition rate was 33 kHz. In the 20% DF pulsed mode, the pulse duration was 5 microseconds with an off time of 20 microseconds, and the pulse repetition rate was 40 kHz. The bacteria were irradiated twice at 0 and 4 hours with different radiant exposures, as described below. Three substrates were provided for the experiments and all were tested and calibrated.

The data is presented in FIGS. 5 and 6. As illustrated in FIG. 5, double irradiation of bacteria at 0 and 4 hours with a radiant exposure of 60 J/cm^2 in CW mode and 33% DF pulsed mode revealed marked decreases in percent survival when compared to the control, with maximum reduction to a percent survival of 2.2% observed in the 33% DF pulsed mode. As illustrated in FIG. 6, double irradiation of bacteria at 0 and 4 hours with a radiant exposure of 20 J/cm^2 in CW mode, 33% DF pulsed mode and 20% DF pulsed mode again revealed that the 33% DF pulsed mode was more efficacious in suppressing bacteria growth than the CW mode and the 20% DF pulsed mode, with a percent survival of 16% for the 33% DF pulsed mode compared to percent survivals of 87% and 80% for the CW mode and 20% DF pulsed mode, respectively.

Example 3

A third series of experiments involved further testing with a change to the exposure schedule based on the findings described in FIG. 3, i.e., that four irradiation exposures (0, 4, 24 and 48 hours) provided the best kill rate at a radiant exposure of 20 J/cm^2 . These experiments involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in CW mode or 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was selectable at 2 and 3.5 mW/cm^2 in the 33% DF pulsed mode compared to an average irradiance of 5 mW/cm^2 in the CW mode. In the 33% DF pulsed mode, the pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated four times at 0, 4, 24 and 48 hours with different radiant exposures of 5, 10 and 20 J/cm^2 . Three substrates were provided for the experiments and all were tested and calibrated.

The data is presented in FIGS. 7-9. As illustrated in FIG. 7, irradiation of cultures four times (0, 4, 24 and 48 hours) with radiant exposures of 5, 10 and 20 J/cm^2 and an average irradiance of 2 mW/cm^2 in the 33% DF pulsed mode showed significant decreases in percent survival when compared to the control; however, no significant differences were

observed between the doses. These results indicated that no significant differences in the percent survival existed with increases in radiant exposure from 5 J/cm² to 20 J/cm² at an average irradiance of 2 mW/cm².

As illustrated in FIG. 8, irradiation of cultures four times (0, 4, 24 and 48 hours) with radiant exposures of 5, 10 and 20 J/cm² and an average irradiance of 3.5 mW/cm² in the 33% DF pulsed mode showed significant decreases in percent survival when compared to the control; however, no significant differences were observed between the doses. These results indicate that no significant differences in the percent survival existed with increases in radiant exposure from 5 J/cm² to 20 J/cm² at an average irradiance of 3.5 mW/cm².

As illustrated in FIG. 9, irradiation of cultures four times (0, 4, 24 and 48 hours) with radiant exposures 5, 10 and 20 J/cm² and an irradiance of 5 mW/cm² in the CW mode showed significant decreases in percent survival when compared to the control. However, unlike the results shown in FIGS. 7 and 8, the decrease in percent bacterial survival was dose dependent with significant decreases observed between the radiant exposures of 5 J/cm² and 10 J/cm² and between 10 J/cm² and 20 J/cm² at an irradiance of 5 mW/cm².

Thus, it can be seen that the CW mode behaved in a linear dose dependent fashion. However, a significant and unexpected result was obtained with respect to the 33% DF pulsed mode, i.e., there was no significant radiant exposure dependency on kill rates for different average irradiances of 2 and 3.5 mW/cm². As a result, a novel treatment was discovered using two to four doses in sequence in the 33% DF pulsed mode at a radiant exposure of 5 J/cm².

III. *In Vitro* Testing of *P. Acnes* Cultures to Determine Optimal Parameters of Inactivation with Light Irradiation

The preliminary results described above revealed that pulsed blue light was more effective in suppressing bacteria growth than continuous wave. Thus, further testing was performed to determine the optimal parameters of 450 nm light to inactivate *P. acnes* using flexible printed LED lighted substrates operated in a pulsed irradiation mode with a 33% duty factor. An example of the lighted substrate is shown in FIG. 22A (lit state) and FIG. 22B (unlit state).

A suspension of *P. acnes* bacteria diluted to a concentration of 1 x 10⁶ CFU/ml, as discussed in Section II above, was streaked onto reduced clostridial agar plates that were irradiated or not (controls) in an anaerobic chamber. The tests were conducted using three different irradiation substrates (with the same power output) with each placed at the top of two

wells on a 12 well plate. This enabled results to be obtained in triplicates (six sets of data for each experiment). After irradiation protocols were completed, plates were placed upside down in the anaerobic chamber, along with a Gas-pak sachet and incubated at 37°C for 72 hours. The colonies were then counted, percentage survival computed and morphology checked.

5 Description of Test Protocols and Test Results

Example 1

A first experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described
10 below, and driven with a constant current source. The average irradiance was 3 mW/cm². The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated four times at 0, 4, 24 and 48 hours with different radiant exposures of 5, 10 and 20 J/cm².

As illustrated in FIG. 10, irradiation of cultures four times (0, 4, 24 and 48
15 hours) with radiant exposures of 5, 10 and 20 J/cm² and an average irradiance of 3 mW/cm² in the 33% DF pulsed mode showed decreases in percent survival when compared to the control, i.e., 89.1%, 34.3% and 0.5%, respectively. The decrease in percent bacterial survival was dose dependent with significant decreases observed between the radiant exposure of 5 and 10 J/cm², between 5 and 20 J/cm², and between 10 and 20 J/cm².

20 Example 2

A second experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described
25 below, and driven with a constant current source. The average irradiance was 3 mW/cm². The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated four times at 0, 3, 6 and 24 hours with different radiant exposures of 5, 10 and 20 J/cm².

As illustrated in FIG. 11, irradiation of cultures four times (0, 3, 6 and 24 hours)
30 with radiant exposures of 5, 10 and 20 J/cm² and an average irradiance of 3 mW/cm² in the 33% DF pulsed mode showed decreases in percent survival when compared to the control, i.e., 85.7%, 16.3% and 0.0%, respectively. The overall decrease in percent survival was higher than that seen in the first example. Again, the decrease in percent bacterial survival was dose

dependent with significant decreases observed between the radiant exposure of 5 and 10 J/cm², between 5 and 20 J/cm², and between 10 and 20 J/cm².

Example 3

A third experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 3 mW/cm². The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated three times at 0, 3 and 6 hours with different radiant exposures of 5, 10 and 20 J/cm².

As illustrated in FIG. 12, irradiation of cultures three times using a shorter time interval (0, 3 and 6 hours) with radiant exposures of 5, 10 and 20 J/cm² and an average irradiance of 3 mW/cm² in the 33% DF pulsed mode showed decreases in percent survival when compared to the control, i.e., 60.9%, 11.7% and 0.2%, respectively. The decrease in percent bacterial survival was dose dependent with significant decreases observed between the radiant exposure of 5 and 10 J/cm², between 5 and 20 J/cm², and between 10 and 20 J/cm².

Example 4

A fourth experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 3 mW/cm². The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated nine times at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours with a radiant exposure of 5 J/cm².

As illustrated in FIG. 13, a change in the irradiation schedule to three times per day, every three hours over the course of three days for a total of nine times (0, 3, 6, 24, 27, 30, 48, 51 and 54 hours) with a radiant exposure of 5 J/cm² and an average irradiance of 3 mW/cm² in the 33% DF pulsed mode showed a significant decrease in percent survival when compared to the control, i.e., 2.57%.

Example 5

A fifth experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described

below, and driven with a constant current source. The average irradiance was 3 mW/cm^2 . The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated twelve times at 0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours with a radiant exposure of 5 J/cm^2 .

5 As illustrated in FIG. 14, a change in the irradiation schedule to three times per day, every three hours over the course of four days for a total of twelve times (0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours) with a radiant exposure of 5 J/cm^2 and an average irradiance of 3 mW/cm^2 in the 33% DF pulsed mode showed a significant decrease in percent survival when compared to the control, i.e., 1.13%. The overall decrease in percent survival
10 was higher than that seen in the fourth example when bacteria were irradiated over the course of three days (with all other parameters being the same).

Example 6

A sixth experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with
15 printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 2 mW/cm^2 . The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated twelve times at 0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours with a radiant exposure of 5 J/cm^2 .

20 As illustrated in FIG. 15, the irradiation of bacteria three times per day, every three hours over the course of four days for a total of twelve times (0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours) with a radiant exposure of 5 J/cm^2 and a change in the average irradiance to 2 mW/cm^2 in the 33% DF pulsed mode showed a complete bacterial eradication when compared to the control, i.e., 0.0%. The overall decrease in percent survival was slightly
25 higher than that seen in the fifth example when the average irradiance was 3 mW/cm^2 (with all other parameters being the same).

Example 7

A seventh experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with
30 printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 2 mW/cm^2 . The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse

repetition rate of 33 kHz. The bacteria were irradiated nine times at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours with a radiant exposure of 5 J/cm².

As illustrated in FIG. 16, the irradiation of bacteria three times per day, every three hours over the course of three days for a total of nine times (0, 3, 6, 24, 27, 30, 48, 51 and 54 hours) with a radiant exposure of 5 J/cm² and an average irradiance of 2 mW/cm² in the 33% DF pulsed mode showed a complete bacterial eradication when compared to the control, i.e., 0.0%. The overall decrease in percent survival was the same as that seen in the sixth example when the irradiation was applied over the course of four days for a total of twelve times (with all other parameters being the same).

Example 8

An eighth experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 2 mW/cm². The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated eight times at 0, 3, 24, 27, 48, 51, 72 and 75 hours with a radiant exposure of 3.6 J/cm².

As illustrated in FIG. 17, the irradiation of bacteria two times per day, every three hours over the course of four days for a total of eight times (0, 3, 24, 27, 48, 51, 72 and 75 hours) with a lower radiant exposure of 3.6 J/cm² and an average irradiance of 2 mW/cm² in the 33% DF pulsed mode showed a slight decrease in percent survival when compared to the control, i.e., 86.9%, which is significantly higher than that seen in the seventh example when the radiant exposure was 5 J/cm² and the irradiation was applied three times per day (with all other parameters being the same).

Example 9

A ninth experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 2 mW/cm². The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated ten times at 0, 3, 24, 27, 48, 51, 72, 75, 96, and 99 hours with a radiant exposure of 3.6 J/cm².

As illustrated in FIG. 18, the irradiation of bacteria two times per day, every three hours over the course of five days for a total of ten times (0, 3, 24, 27, 48, 51, 72, 75, 96, and 99 hours) with a radiant exposure of 3.6 J/cm^2 and an average irradiance of 2 mW/cm^2 in the 33% DF pulsed mode showed a decrease in percent survival when compared to the control, i.e., 78.9%, which is just slightly lower than that seen in the eighth example when the irradiation was applied over the course of four days (with all other parameters being the same).

Example 10

A tenth experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 2 mW/cm^2 . The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated twelve times at 0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours with a radiant exposure of 3.6 J/cm^2 .

As illustrated in FIG. 19, the irradiation of bacteria three times per day, every three hours over the course of four days for a total of twelve times (0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours) with a radiant exposure of 3.6 J/cm^2 and an average irradiance of 2 mW/cm^2 in the 33% DF pulsed mode showed a decrease in percent survival when compared to the control, i.e., 32.6%, which is lower than that seen in the eighth and ninth examples.

Example 11

An eleventh experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 2 mW/cm^2 . The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated nine times at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours with a radiant exposure of 5 J/cm^2 .

As illustrated in FIG. 20, the irradiation of bacteria three times per day, every three hours over the course of three days for a total of nine times (0, 3, 6, 24, 27, 30, 48, 51 and 54 hours) with a radiant exposure of 5 J/cm^2 and an average irradiance of 2 mW/cm^2 in the 33% DF pulsed mode showed a complete bacterial eradication when compared to the control, i.e., 0.0%. This experiment confirmed the data from the seventh experiment (see Example 7).

Example 12

A twelfth experiment involved culturing *P. acnes* and illuminating the bacteria with a 450 nm lighted substrate that used PET (polyethylene terephthalate) silver film with printed LEDs. The lighted substrate was set to operate in 33% DF pulsed mode, as described below, and driven with a constant current source. The average irradiance was 2 mW/cm². The pulse duration was 10 microseconds with an off time of 20 microseconds, and a pulse repetition rate of 33 kHz. The bacteria were irradiated nine times at 0, 3, 6, 24, 27, 30, 48, 51 and 54 hours with a radiant exposure of 3.6 J/cm².

As illustrated in FIG. 21, the irradiation of bacteria three times per day, every three hours over the course of three days for a total of nine times (0, 3, 6, 24, 27, 30, 48, 51 and 54 hours) with a radiant exposure of 3.6 J/cm² and an average irradiance of 2 mW/cm² in the 33% DF pulsed mode showed a significant decrease in percent survival when compared to the control, i.e., 11.7%. Although the percentage survival was low, it was still higher than that seen in the eleventh example when the radiant exposure was 5 J/cm² (with all other parameters being the same).

Summary

Further testing was performed using light patches that emit pulsed blue light at a 33% duty cycle. The various protocols tested showed effective reduction in bacteria growth. Testing using irradiation intervals of 3 hours proved to be more efficient than irradiation intervals of 4 hours. It is believed that such observed efficiency may be due in part to targeting the bacteria at the appropriate time during the replication cycle or due to porphyrin depletion/replenishing mechanisms in the bacteria.

Irradiation protocols were optimized to yield 100% bacterial suppression of 1 x 10⁶ CFU/ml *P. acnes* cultures. Optimal bacterial suppression of 100% was attained (i) when cultures were irradiated at 0, 3, 6 and 24 hours with a radiant exposure of 20 J/cm² and an average irradiance of 3 mW/cm² (see Example 2), (ii) when cultures were irradiated three times per day, every three hours over the course of four days for a total of twelve times (0, 3, 6, 24, 27, 30, 48, 51, 54, 72, 75 and 78 hours) with a radiant exposure of 5 J/cm² and an average irradiance of 2 mW/cm² (see Example 6), and (iii) when cultures were irradiated three times per day, every three hours over the course of three days for a total of nine times (0, 3, 6, 24, 27, 30, 48, 51 and 54 hours) with a radiant exposure of 5 J/cm² and an average irradiance of 2 mW/cm² (see Example 11).

One skilled in the art will appreciate that the present invention allows for improved device performance with reduced battery requirements, a substantial reduction in treatment time, and improved patient safety due to a significant reduction in heat and optical hazard.

5 **IV. Detection of Emission Spectra of Light Absorbing Pigment "Porphyrins" in *P. Acnes***

10 *P. acnes* gives off a florescence in the red spectrum of 600-700 nm (typically 620 nm to 640 nm) when illuminated with pulsed purple or blue light. Without being bound by any one theory, it is believed that porphyrins are optically pumped with the sequence of pulses and, upon return to their ground state, create an oxidation reaction that produces free radicals which subsequently destroy mitochondrial membranes, DNA or other cellular structures. Thus, if a photo sensor is used to detect red or other wavelengths given off during irradiation by the cells undergoing irradiation, then the feedback can be used to control the dose of light, e.g., irradiation with the pulsed purple or blue light would take place until the porphyrin level had reached a minimum point and treatment would not restart until porphyrin recovery took place. This may take place as part of the replication cycle of the microorganism.

15 Testing was performed to detect the emission spectra of light absorbing pigment porphyrins in *P. acnes*.

20 A 72 hour culture of *P. acnes* was centrifuged at 13,300 rpm for five minutes, supernatant discarded and re-suspended in 1ml saline. It was then washed again by centrifuging at 13,300 rpm for 5 minutes with 1ml saline (washing ensures that no other factors - aside from the innate porphyrins found in the *P. acnes* cells - would contribute to the detection). The optical density was adjusted using McFarland standard to 0.8 to 1.0 at 625 nm for a concentration of 108 CFU/ml. A volume of 10µl of this solution was placed on 25 concanavalin A coated dishes and excited as described below.

30 As illustrated in FIG. 23, the set-up used for irradiating the bacteria employed a 458 nm Ar-Ion laser assembly (Edmund optics, USA) delivering continuous wave (CW) light with spectral bandwidth of less than 1 nm and a total power of 150 mW. The original, divergent laser beam was collimated using a lens (focal length 35 mm) placed about 22 mm from the laser aperture. The final beam diameter was 15 mm with a cross-sectional area of 3 cm², which approximately matched the area of the dish coated with concanavalin A. The sample was placed on a translation stage positioned about 25 cm from the collimating lens.

The sample was placed onto an inverted microscope (Axio Observer – Z1, Carl Zeiss, Oberkochen, Germany) and illuminated through the back port of the microscope using a continuous wave Ar-Ion laser (Edmund Optics) with a 458 nm wavelength. The excitation light (0.5 mW) was focused by a 63x water immersion objective with numerical aperture (NA) of 1.2. The microscope scanning head consisted of a computer-controlled OptiMiS TruLine (Aurora Spectral Technologies, Milwaukee, WI, USA). The detection was done using a modified OptiMiS detection module (a commercial prototype of OptiMiS d-Lux), which included a galvanometric scanner used to descanned the fluorescence beam which then falls on an electron multiplying charged coupled device (iXon3, Andor, Belfast, UK). This descanning concept allowed the use of OptiMiS as a confocal (rather than a two-photon) microscope. This in turn reduced the laser-induced photo-bleaching of the cellular fluorescence, which was critical in these experiments given the low intensity of the signal detected. In order to capture full spectrum images, the sample was scanned line by line. The line images were further reconstructed resulting in an image for each wavelength channel (total of 300 channels).

The extraction of the porphyrin spectrum was performed by first measuring the spectrum of the emission from the bacteria and the spectrum of the media outside of the bacteria. Next, the spectrum of the media was subtracted from the bacterial emission spectrum while considering the emission ratios between the bacteria and the outside media. Finally, the resulting spectrum was fitted with two Gaussians as the emission has two humps.

FIG. 24A depicts the porphyrin emission spectrum extracted from *P. acnes* excited with 458 nm light and detected using OptiMiS TruLine (Aurora Spectral Technologies, Milwaukee, WI). The peak wavelengths of the resulting emission were 619 nm and 670 nm for the two apparent humps. This emission is characteristic of cytochrome C which most likely is present in the acne bacteria. However, it may still contain some emission from different porphyrins such as coproporphyrins which may participate in the bacterial eradication mechanism. It is proposed that the free radical production by peroxides generated from porphyrins exposed to pulsed purple or blue light may alter DNA structure and lead to destruction of the bacteria during its replicative phase. Thus, the timing of light exposures during the replicative phase may have significant impact on the kill rates.

FIG. 24B demonstrates the fluorescence spectra of *P. acnes* at various times during irradiation from zero to 30 minutes (measured at T=1, 10, 20 and 30 minutes). It can be readily seen that the fluorescence gradually depletes over time and thus can act as an indicator of porphyrin depletion at the cellular level. The porphyrin depletion follows the dose

parameters (approximately 30 minutes of irradiation at $3\text{mW}/\text{cm}^2$) which were found to be optimal for photoeradication of bacteria. These experiments were performed in vitro, in a petri dish in agar, illuminated with 450 nm printed LEDs on a flexible substrate. The output was pulsed at a duty factor of 33% (10 microseconds on and 20 microseconds off) at an irradiance of $3\text{ mW}/\text{cm}^2$. A calibrated ocean optics OCEAN-FX-VIS-NIR-ES spectrometer was used to record the fluorescence. The dish was held in a light tight housing. The blue 450 nm excitation light was filtered to eliminate all wavelengths beyond 420 and 480 nm. A filter was used below the dish to eliminate any wavelengths below 510 nm. The extraction of the porphyrin spectrum was performed by first measuring the spectrum of the emission from the bacteria and the spectrum of the media outside of the bacteria. Next, the spectrum of the media was subtracted from the bacterial emission spectrum while considering the emission ratios between the bacteria and the outside media. The spectra were then plotted.

FIG. 24C depicts the porphyrin emission spectrum extracted from a sample of *Protoporphyrin IX* excited with 450 nm printed LEDs on PET substrate and detected using an ocean optics OCEAN-FX-VIS-NIR-ES spectrometer in the same test set-up as FIG. 24B. The peak wavelengths of the resulting emission were 620 nm and 670 nm and 750 nm for the three apparent humps. This emission is similar to the initial porphyrin emission spectrum extracted from *P. acnes* excited with 458 nm light (FIG. 24A); however, it has a broader emission in the near infrared range.

Dosage can thus be optimized by detecting the emission spectrum of porphyrins or other emissions from the targeted bacteria, measuring fluorescence depletion or recovery, determining the optimal excitation periods and recovery between treatment sessions, and calculating ideal irradiation parameters, including dosage, irradiance, fluence and treatment schedule. It is also possible that killing of different strains of bacteria can be optimized using this method. Ideal wavelengths to measure porphyrin depletion are shown to be in the 620-640 nm range and the 670 nm range from the data presented, which correlates well with our data shown in FIGS. 24A, 24B and 24C. Ideal wavelengths to measure other types of emissions can be determined by one skilled in the art.

V. Exemplary Light Sources

Various types of light sources may be used to provide light energy in accordance with the present invention. For example, the light source may comprise various types of lasers, LEDs, PLEDs/LEPs), QDLEDs, or fluorescent tubes emitting light in the purple or blue spectral region. The light source may directly illuminate the skin, tissue or other

surface to be irradiated, such as a contaminated environment or food to be exposed to pulsed light. The light source may also be coupled by fiber optics or directly mounted to the edge of a lens-diffuser that redirects the light to the surface to be irradiated. These diffusers may contain numerous optical elements designed to diffuse and distribute the light evenly across the surface to be irradiated. These may include Fresnel lenses, various light pipes, irregularities and additional lens-like structures designed to pipe the light source and distribute it evenly over the surface of the lens-diffuser assembly. In order to improve the extraction or out-coupling of light, the device may include an internal scattering layer of high index particles such as TiO_x in a transparent photoresist or a micro-lens array (MLA) layer. The light sources may also be placed directly behind the diffuser or Fresnel lens at a sufficient distance to allow the production of a substantially uniform beam to be applied to the surface to be irradiated. The light source may be a combination of white light and purple or blue light, whereupon the purple or blue light is pulsed and the white light is continuous wave (CW). These different wavelengths can be applied simultaneously or sequentially to irradiate an infected environment or food.

A preferred light source is provided in the form of a very thin layered structure. An example of this type of light source is shown generally as reference numeral 10 in FIG. 25. Light source 10 is comprised of a plurality of layers 12 including a flexible light emitter 40 located between an anode 50 and a cathode 60. A suitable power source is connected to light source 10. Preferably, direct current (DC) or pulsed DC is used to power light source 10. Light source 10 is substantially planar in its form, although it is preferably flexible and is more preferably conformable such that it may conform to the contours of the body, surfaces within a contaminated environment, or surfaces inside of a refrigeration or food display system. The overall thickness of light source 10 is typically about 10 mm or less (e.g., about 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0.5, 0.4, 0.3, 0.2, 0.1, 0.05 mm or less).

Light source 10 produces light with an intensity that is substantially constant across the surface of the device so as to provide substantially uniform light emission. As described in more detail below, the light source may comprise, for example, organic light emitting diodes (OLEDs) or printed light emitting diodes (printed LEDs) (organic or inorganic) commonly referred to as LED ink. It can be appreciated that the light source is capable of decreasing hot spots on the surface of a subject's skin or tissue to provide a safer delivery of light to a subject. Also, a substantially uniform dose of light across the surface of

- 25 -

the device ensures that all of the skin, tissue, surface or food is effectively treated with the same dose of light.

The light source may be in the form of an array, patch, pad, mask, wrap, fiber, bandage or cylinder, for example. The light source may have a variety of shapes and sizes.

5 For example, the light source may be square, rectangular, circular, elliptical, clover-shaped, oblong, or crescent/moon-shaped, such as the light sources 10a-10f generally illustrated in FIG. 26. The overall surface area of one side of the light source may range from, for example, 1 cm² to 1 m², or in panels placed together to cover larger areas, although typically the surface area is about 1 to 2000 cm² (e.g., about 1, 4, 9, 16, 25, 36, 49, 64, 81, 100, 121, 144, 169, 196,
10 225, 289, 324, 361, 400, 441, 484, 529, 576, 625, 676, 729, 784, 841, 900, 961, 1024, 1089, 1156, 122, 1296, 1369, 1444, 1521, 1600, 1681, 1764, 1849, 1936 or 2000 cm² or some range therebetween). The light source is thus well adapted to be applied to various areas of the subject's body, for example, the face, forehead, back, and the like. The light source may also be applied other types of surfaces, such as surfaces within a contaminated environment or
15 surfaces inside of a refrigeration or food display system.

The various elements/layers of the light source will now be described in greater detail.

Substrate

In some embodiments, the light source includes a substrate. The substrate may
20 be any substance capable of supporting the various layers of the light source. The substrate is preferably flexible and/or conformable to a surface in which the light source will be used, such as the contours of a subject's body, surfaces within a contaminated environment, or surfaces inside of a refrigeration, food display or processing system. The substrate can comprise, for example, an inorganic material, an organic material, or a combination of inorganic and organic
25 materials. The substrate may be, for example, made from metals, plastics or glass. The substrate may be any shape to support the other components of the light source, for example, the substrate may be substantially flat or planar, curved, or have portions that are substantially flat portions and curved portions. Most preferably, the substrate is transparent, flexible, and conformable in nature. Ideally, the material is a latex-free, non-toxic, non-allergenic material,
30 which is resistant to UV, sunlight and most infection control products.

As used herein, the term "transparent" generally means transparency for light and includes both clear transparency as well as translucency. Generally, a material is considered transparent if at least about 50%, preferably about 60%, more preferably about

70%, more preferably about 80% and still more preferably about 90% of the light illuminating the material can pass through the material. In contrast, the term "opaque" generally refers to a material in which the light is substantially absorbed or reflected, e.g., at least 90% of the light is absorbed or reflected, and typically at least 95% of the light is absorbed or reflected.

5 In some embodiments, the substrate may be comprised of a silicon-based material, rubber, thermoplastic elastomers (TTP), or other polymeric material, such as polyester, polyethylene terephthalate (PET), polyethylene naphthalate (PEN), polycarbonate, polystyrene, polyacryl, polyether sulfone (PES), etc. Transparent substrates may include, for example, polyethylene, ethylene-vinyl acetate copolymers, polyimide (PI), polyetherimide
10 (PEI), ethylene-vinyl alcohol copolymers, polypropylene, polystyrene, polymethyl methacrylate, PVC, polyvinyl alcohol, polyvinylbutyral, polyether ether ketone, polysulfone, polyether sulfone, as well as fluoropolymers, such as, fluorinated ethylene-propylene (FEP), tetrafluoroethylene-perfluoroalkyl vinyl ether copolymers, polyvinyl fluoride, tetrafluoroethylene-ethylene copolymers, tetrafluoroethylene-hexafluoropropylene copolymers,
15 polychlorotrifluoroethylene, polyvinylidene fluoride, polyester, polycarbonate, polyurethanes, polyimide or polyether imide.

In another embodiment, the transparent substrate is a polyester film, such as Mylar. In another aspect, the substrate comprises a polyetheretherketone film commercially available from Victrex under the name APTIV. In still another aspect, the substrate is a thin
20 film sold under the name Flexent by Konica Minolta or flexible glass such as Willow Glass by Dow Corning. Ideally, substrates in direct or indirect contact with organic layers will have exceptional barrier capabilities that withstand heat, offer flexibility, have sustained reliability and can be mass produced.

Conductive Layers (Electrodes)

25 The light source comprises a plurality of conductive layers (i.e., electrodes), namely, a cathode and an anode. The anode may comprise, for example, a transparent conductive oxide (TCO), such as, but not limited to, indium tin oxide (ITO), zinc oxide (ZnO), and the like. The cathode may also comprise, for example, a thin metal film or fibers such as aluminum, copper, gold, molybdenum, iridium, magnesium, silver, lithium fluoride and alloys
30 thereof, or a non-metal conductive layer.

Because the light source must emit light through one or both electrodes, at least one of the electrodes must be transparent. The transparent electrode is positioned on the side of the light source designed to be facing the surface to be irradiated. For a light source

intended to emit light only through the bottom electrode (i.e., the surface-facing electrode), the top electrode (i.e., the electrode facing away from the surface) does not need to be transparent. The top electrode may thus comprise an opaque or light-reflective metal layer having a high electrical conductivity. Where a top electrode does not need to be transparent, using a thicker layer may provide better conductivity, and using a reflective electrode may increase the amount of light emitted through the transparent electrode by reflecting light back towards the transparent electrode. Fully transparent light sources may also be fabricated, where both electrodes are transparent.

The thickness of each electrode is typically about 200 nm or less (e.g., about 200, 180, 160, 140, 120, 100, 90, 80, 70, 60, 50, 40, 30 nm or less). Preferably, the thickness of each electrode is less than 10 nm (e.g., about 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0.8, 0.6, 0.4, 0.2 nm or less or some range therebetween).

The electrodes are preferably flexible in nature. In some embodiments, the conductive materials of one or both of the electrodes may include, but are not limited to, transparent conductive polymer materials, such as indium tin oxide (ITO), fluorine-doped tin oxide (FTO), ZnO--Ga₂O₃, ZnO--Al₂O₃, SnO₂--Sb₂O₃, and polythiophene. In addition, the electrodes may be comprised of silver or copper grids or bushbars plated on a transparent substrate or silver nanowires or nanoparticles deposited on a substrate with a poly(3,4-ethylenedioxythiophene) poly(styrenesulfonate) (PEDOT:PSS) coating. Additional conductive polymer layers may be added to improve conductivity.

In one aspect, the transparent conductive electrode may be carbon-based, for example, carbon nanotubes, carbon nanowires, or graphene, and the like. One preferred electrode (typically for infrared) comprises graphene. While one or two layers of graphene are preferred, the electrode may comprise about 1 to 20 layers of graphene (e.g., 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20 layers or some range therebetween). The graphene electrode(s) also have the effect of protecting the photoactive layer sandwiched between them from oxidation. Therefore, environmental stability of the light source can be improved. The graphene electrode may optionally have a plurality of plasmonic nanostructures, which may have various morphologies (spherical, rods, discs, prisms, etc.). Exemplary nanostructures include those made of gold, silver, copper, nickel, and other transition metals, for example gold nanoparticles, silver nanoparticles, copper nanoparticles, nickel nanoparticles, and other transition metal nanoparticles. In general, any electrically conductive materials, such as oxides and nitrides, of surface plasmonic resonance frequencies

- 28 -

in the visible spectrum can be made into plasmonic nanostructures for the same purpose. In some embodiments, the plasmonic particles have the size of about 1 nm to about 300 nm (e.g., about 10, 50, 100, 150, 200, 250, 300 nm, or some range therebetween).

Light Emitter Layer

5 The light source includes a thin light emitter that may comprise, for example, OLEDs or printed LEDs (organic or inorganic). The thickness of the light emitter is preferably about 2 mm or less (e.g., about 2, 1.8, 1.6, 1.4, 1.2, 1, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1, 0.09, 0.08, 0.07, 0.06, 0.05, 0.04, 0.03, 0.02, 0.01 mm or less). Most preferably, the flexible light emitter is about 10 to 200 nm in thickness (e.g., about 200, 180, 160, 140, 120, 100, 90, 10 80, 70, 60, 50, 40, 30, 20, 10 nm, or some range therebetween). The light emitter is preferably flexible and emits light in response to an electric current applied to the anode and cathode.

OLEDs

In some embodiments, the light source may comprise OLEDs in which the flexible light emitter is a thin organic film. As used herein, the term "organic" with respect to 15 OLEDs encompasses polymeric materials as well as small molecule organic materials that may be used to fabricate organic opto-electronic devices. Such materials are well known in the art. "Small molecule" refers to any organic material that is not a polymer, and it will be appreciated that "small molecules" may actually be quite large. "Small molecules" may include repeat units in some circumstances. For example, using a long chain alkyl group as a substituent does 20 not remove a molecule from the "small molecule" class. "Small molecules" may also be incorporated into polymers, for example as a pendent group on a polymer backbone or as a part of the backbone. "Small molecules" may also serve as the core moiety of a dendrimer, which consists of a series of chemical shells built on the core moiety. The core moiety of a dendrimer may be a fluorescent or phosphorescent small molecule emitter. A dendrimer may be a "small molecule," and it is believed that all dendrimers currently used in the field of OLEDs are small 25 molecules. In general, a "small molecule" has a well-defined chemical formula with a single molecular weight, whereas a polymer has a chemical formula and a molecular weight that may vary from molecule to molecule.

Generally speaking, in the flexible light emitter, electrons and holes recombine 30 to radiate photons. The radiative photon energy emitted from the flexible light emitter corresponds to the energy difference between the lowest unoccupied molecular orbital (LUMO) level and the highest occupied molecular orbital (HOMO) level of the organic

material. Photons of lower energy/longer wavelength may be generated by higher-energy photons through fluorescent or phosphorescent processes.

As described below, the flexible light emitter may optionally include one or more of a hole injection material (HIM), a hole transport material (HTM), a hole blocking material (HBM), an electron injection material (EIM), an electron transport material (ETM), an
5 electron blocking material (EBM), and/or an exciton blocking material (ExBM).

In one aspect, the emissive electroluminescent layer may include a hole injection material (HIM). A HIM refers to a material or unit capable of facilitating holes (i.e., positive charges) injected from an anode into an organic layer. Typically, a HIM has a HOMO
10 level comparable to or higher than the work function of the anode, i.e., -5.3 eV or higher.

In another aspect, the emissive electroluminescent layer may include a hole transport material (HTM). A HTM is characterized in that it is a material or unit capable of transporting holes (i.e., positive charges) injected from a hole injecting material or an anode. A HTM has usually high HOMO, typically higher than -5.4 eV. In many cases, HIM can also
15 function as HTM, depending on the adjacent layer.

In another aspect, the emissive electroluminescent layer may include a hole blocking material (HBM). A HBM generally refers to a material which, if deposited adjacent to an emitting layer or a hole transporting layer in a multilayer structure, prevents the holes from flowing through. Usually it has a lower HOMO as compared to the HOMO level of the
20 HTM in the adjacent layer. Hole-blocking layers are frequently inserted between the light-emitting layer and the electron-transport layer.

In another aspect, the emissive electroluminescent layer may include an electron injection material (EIM). An EIM generally refers to a material capable of facilitating electrons (i.e., negative charges) injected from a cathode into an organic layer. The EIM
25 usually has a LUMO level comparable to or lower than the working function of the cathode. Typically, the EIM has a LUMO lower than -2.6 eV.

In another aspect, the emissive electroluminescent layer may include an electron transport material (ETM). An ETM generally refers to a material capable of transporting electrons (i.e., negative charges) injected from an EIM or a cathode. The ETM has usually a
30 low LUMO, typically lower than -2.7 eV. In many cases, an EIM can serve as an ETM as well, depending on the adjacent layer.

In another aspect, the emissive electroluminescent layer may include an electron blocking material (EBM). An EBM generally refers to a material which, if deposited adjacent

to an emissive or electron transporting layer in a multilayer structure, prevents the electron from flowing through. Usually it has a higher LUMO as compared to the LUMO of the ETM in the adjacent layer.

5 In another aspect, the emissive electroluminescent layer may include an exciton blocking material (ExBM). An ExBM generally refers to a material which, if deposited adjacent to an emitting layer in a multilayer structure, prevents the excitons from diffusing through. ExBM should have either a higher triplet level or singlet level as compared to the emitting layer or other adjacent layer.

Exemplary OLED materials are described in Hammond et al., U.S. Published
10 Patent Application No. 2010/0179469; Pan et al., U.S. Published Patent Application No. 2013/0006119; Buchholz et al., PCT Published Patent Application No. WO 2012/010238; and Adamovich et al., U.S. Published Patent Application No. 2007/0247061.

Referring to FIG. 27, a typical sequence of materials found in the flexible light emitter between the anode and the cathode of the OLED is HIM, HTM, emission layer, HBM,
15 and ETM. Another typical sequence of materials is HTM, emission layer, and ETM. Of course, other sequences of materials are also possible. Further, the OLED may comprise one or more interlayers.

In one aspect, the flexible light emitter comprises a single layer. The flexible light emitter may comprise, for example, a conjugated polymer which is luminescent, a hole-
20 transporting polymer doped with electron transport molecules and a luminescent material, or an inert polymer doped with hole transporting molecules and a luminescent material. The flexible light emitter may also comprise an amorphous film of luminescent small organic molecules which can be doped with other luminescent molecules.

In another aspect, the flexible light emitter may comprise one or more different
25 emissive materials in either the same emission layer or in different emission layers. For example, the flexible light emitter may comprise 5, 4, 3, 2, or 1 radiation emitting materials. The various different emissive materials may be selected from the emissive materials described in the references set forth above, but any other suitable emissive material can be employed. If
30 two emissive materials are used in one emission layer, the absorption spectrum of one of the two emissive materials preferably overlaps with the emission spectrum of the other emissive material. The emissive materials may be arranged in stacked layers or side-by-side configurations. The emissive layer may comprise a continuous region forming a single emitter or a plurality of light emitters. The plurality of light emitters may emit light with substantially

different wavelengths. The plurality of light emitters may be vertically stacked within the emissive layer or they may form a mixture. In some embodiments, a dopant is dispersed within an organic host matrix. In one embodiment, a layer of quantum dots is sandwiched between two organic thin films.

5 In another aspect, the flexible light emitter may comprise a plurality of layers sharing a common anode and/or cathode. In this case, individual layers are stacked one on top of another. The stacked configuration may generally include intermediate electrodes disposed between adjacent layers such that successive layers share an intermediate electrode, i.e., a top electrode of one layer is the bottom electrode of another in the stack. The stacked layers may
10 be formed of different materials, and therefore, different emissions spectra.

The flexible light emitter may be substantially transparent. When mostly transparent layers are used, a plurality of emissive layers may be vertically stacked without substantially blocking light emission from individual layers. The flexible light emitter may comprise a single or multiple layers, for example, a combination of p- and n-type materials.
15 The p- and n-type materials may be bonded to each other in the layer. The bonding may be ionic or covalent bonding, for example. The multiple layers of the flexible light emitter may form heterostructures therebetween.

Printed LEDs

In some embodiments, the light source may comprise printed LEDs (organic or
20 inorganic), i.e., LED ink. With LED ink, each light source is very small which enables the LEDs to be positioned in very close proximity to each other. During fabrication, the LEDs may be printed in a uniform manner whereby each LED operates as a point source in which the beams from the individual LEDs are substantially parallel to each other to provide substantially uniform light across the surface of the device. Unlike conventional LEDs, printed LEDs do
25 not need to be positioned a sufficient distance from the surface to be irradiated in order to deliver a substantially uniform dose of light. There are several known methods for printing such LEDs, as described below.

In one method, a plurality of individual LEDs are suspended and dispersed in a liquid or gel comprising one or more solvents and a viscosity modifier so as to form a diode
30 ink that is capable of being printed on a flexible substrate (e.g., through screen printing, flexographic printing and the like). In one aspect, the average surface area concentration of LEDs is from about 25 to 50,000 LEDs per square centimeter. In general, each LED includes a light emitting region, a first metal terminal located on a first side of the light emitting region,

- 32 -

and a second metal terminal located on a second side of the light emitting region. The first and second metal terminals of each LED may be electrically coupled to conductive layers (i.e., electrodes) to enable the light emitting region to emit light when energized.

An exemplary light source is shown generally in FIG. 28, wherein only five LEDs are provided in order to simplify the description. As can be seen, this device includes a plurality of conductors 80a-80e deposited on a flexible substrate 82. A plurality of LEDs 84a-84e are deposited on the conductors 80a-80e such that the first metal terminals of the LEDs 84a-84e are electrically coupled to the conductors 80a-80e. One skilled in the art will appreciate that the LEDs 84a-84e may be formed of various shapes. Preferably, the LEDs 84a-84e settle into a position over conductors 80a-80e such that they maintain their polarity based on the shape of the LEDs. Next, a plurality of dielectric layers 86a-86e are deposited over the LEDs 84a-84e and the conductors 80a-80e, as shown. Another conductor 88 is then deposited over the LEDs 84a-84e and dielectric layers 86a-86e such that the second metal terminals of the LEDs 84a-84e are coupled to the conductor 88. One skilled in the art will appreciate that the substrate 82 and conductors 80a-80e may be transparent so that light is emitted from the bottom of the device and/or conductor 82 may be transparent so that light is emitted from the top of the device. Various configurations of printed LEDs that may be manufactured in accordance with the above method are described in Lowenthal et al., U.S. Patent No. 8,415,879.

In another method, the light source comprises LEDs that are created through a printing process. In this method, a substrate is provided that includes a plurality of spaced-apart channels. A plurality of first conductors are formed on the substrate such that each first conductor is positioned in one of the channels. Next, a plurality of substantially spherical substrate particles are coupled to the first conductors and, then the substantially spherical substrate particles are converted into a plurality of substantially spherical diodes. The substantially spherical diodes may comprise, for example, semiconductor LEDs, organic LEDs encapsulated organic LEDs, or polymer LEDs. A plurality of second conductors are then formed on the substantially spherical diodes. Finally, a plurality of substantially spherical lenses suspended in a polymer (wherein the lenses and suspending polymer have different indices of refraction) are deposited over the substantially spherical diodes and the second conductors. Thus, in this method, the LED's are built up on the substrate as opposed to being mounted on the substrate. Various configurations of printable LEDs that may be manufactured in accordance with the above method are described in Ray et al., U.S. Patent No. 8,384,630.

In an exemplary embodiment, the light source is comprised of printed LEDs having a thickness of 12 μm , silver electrodes each of which has a thickness of 5-10 μm with a transparent silver fiber having a thickness of .05-5 μm , and a PET substrate having a thickness of 125 μm .

5 Micro-Lens Array

The light source may optionally include a light dispersion layer, such as a micro-lens array. It has been found that one of the key factors that limits the efficiency of OLED devices is the inefficiency in extracting the photons generated by the electron-hole recombination out of the OLED devices. Due to the high optical indices of the organic materials used, most of the photons generated by the recombination process are actually trapped in the devices due to total internal reflection. These trapped photons never leave the OLED devices and make no contribution to the light output from these devices. In order to improve the extraction or out-coupling of light from OLEDs, the device may include an internal scattering layer of high index particles such as TiOx in a transparent photoresist or a micro-lens array (MLA) layer. Exemplary MLAs and methods for forming the same are described in Gardner et al., U.S. Published Patent Application No. 2004/01217702; Chari et al. U.S. Patent No. 7,777,416; Xu et al., U.S. Patent No. 8,373,341; Yamae et al., *High-Efficiency White OLEDs with Built-up Outcoupling Substrate*, SID Symposium Digest of Technical Papers, 43 694 (2012); and Komoda et al., *High Efficiency Light OLEDs for Lighting*, J. Photopolymer Science and Technology, Vol. 25, No. 3 321-326 (2012).

20 Barrier Layer

The light source may optionally include one or more encapsulation or barrier layers that isolate the light emitter (or other layers) from an ambient environment. The encapsulation or barrier layer is preferably substantially impermeable to moisture and oxygen. In general, the moisture and oxygen sensitive components should be enclosed by materials having gas permeation properties. The barrier preferably achieves low water vapor permeation rates of 10^{-4} g/m²/day or less, 10^{-5} g/m²/day or less, and even more preferably about 10^{-6} g/m²/day or less.

The encapsulation or barrier layer may be glass or a plastic, for example. Exemplary materials include a polyetheretherketone film commercially available from Victrex under the name APTIV. In still another aspect, the substrate is a thin film sold under the name Flexent by Konica Minolta or flexible glass such as Willow Glass by Dow Corning. Ideally,

- 34 -

substrates in direct contact with organic layers will have exceptional barrier capabilities that withstand heat, offer flexibility, have sustained reliability and can be mass produced.

The light source may be further covered with a transparent or semi-transparent covering. The covering may provide comfort for a subject using the light source. The covering may provide protection to the light source, keeping dirt and fluid off of the device and providing a cushion to protect the device from impact.

Quantum Dot Layer

In some embodiments, a layer of quantum dots is used between the light emitting surface and the surface to be irradiated in order to convert all or a portion of the light emission into a different wavelength. The wavelength is typically down converted to a longer wavelength (Stokes conversion). For example, purple or blue light may be converted into red light at 630 nm. Quantum dots may contain cadmium or may be organic and cadmium free. Wavelength conversion may occur with many wavelengths thus providing an additional or multiple wavelengths from a fixed wavelength source. Quantum dots may also be embedded into the hydrogel used to connect the light source to the surface to be irradiated, such as a skin or tissue surface. This may consist of a film or encapsulated quantum dots layered on the surface of the hydrogel or the light emitting surface of the lamp. Various densities of quantum dots can be used to control the percentage of light converted from one wavelength to another. For example, testing was performed using 50% and 75% blue light and 50% and 25% red light in bacterial kill experiments. This combination had an effect on the killing of *P. acnes* and may be added to enhance the anti-inflammatory effects of the light due to the addition of red light. The quantum dot converts light as it receives the incident light so the continuous or pulse characteristic of the light is maintained.

Bottom and Top Light Emitting Configurations

In some embodiments, the light source has a "bottom" light emitting configuration or a "top" light emitting configuration.

FIG. 29 illustrates an exemplary embodiment of a light source 110 with a "bottom" light emitting configuration. Light source 110 comprises a flexible light emitter 140 located between an anode 150 and a cathode 160, all of which are formed on a transparent substrate 120. A power source (not shown) is provided so that DC or pulsed DC is used to power the light source. Further, a transparent barrier layer 180 protects the flexible light emitter 140 from moisture and oxygen.

- 35 -

In this embodiment, the flexible light emitter 140 comprises an OLED or printed LEDs. Both the substrate 120 and the anode 150 are transparent. The substrate is comprised of a transparent silicon rubber. The anode 150 is comprised of ITO. Light generated from the flexible light emitter 140 is emitted through the transparent anode 150 and substrate 120 such that the device has a "bottom" light emitting configuration. The cathode 160 is comprised of a conductive metal such as silver. The barrier layer is comprised of Flexent film (Konica Minolta).

FIG. 30 illustrates an exemplary embodiment of a light source 210 with a "top" light emitting configuration. Light source 210 comprises a flexible light emitter 240 located between an anode 250 and a cathode 260, all of which are formed on a bottom surface 222 of a substrate 220 (i.e., the surface facing towards a surface to be irradiated). A power source (not shown) is provided so that DC or pulsed DC is used to power the light source. Further, a transparent barrier layer 280 protects the flexible light emitter 240 from moisture and oxygen.

In this embodiment, the flexible light emitter 240 comprises an OLED or printed LEDs. The substrate 220 comprises a Mylar film and a silver nanolayer is coated on its bottom side to form the cathode 260 of the light source. The silver nanolayer is highly reflective to the light generated by the flexible light emitter 240 such that the light is directed towards the surface to be irradiated. Both the barrier layer 280 and the anode 250 are transparent. The barrier layer 280 is comprised of Willow transparent flexible glass (Dow Corning). The anode 250 is comprised of ITO. Light generated from the flexible light emitter 240 is emitted through the transparent anode 250 and barrier layer 280 such that the device has a "top" light emitting configuration.

Hydrogel or Adhesive Layer

In some embodiments, a transparent hydrogel or double-sided adhesive tape layer is applied between the light emitting surface of the lamp to attach it to the surface to be irradiated, such as a skin or tissue surface. This layer may be a single use disposable in cases where certain microorganisms are able to penetrate the hydrogel or adhesive layer. As such, the hydrogel or adhesive layer is not suitable for re-use due to the infection control requirements and non-transmittal of infection back to the user or subsequent users of the device. Alternatively, this layer may be used multiple times in cases where there is no microorganism penetration. For example, studies have shown that certain bacteria do not grow on the surface of a hydrogel layer. The hydrogel or adhesive layers may also contain additional anti-bacterials and substances suitable to enhance tissue regeneration for use in

wound healing. The double-sided transparent adhesive tape may be, for example, 3M 9964 Clear Polyester Diagnostic Microfluidic Medical Tape (3M.com). Various hydrogels are available based on the adhesion requirements for various skin types and wound dressings.

VI. Control of Light Source

5 The light source is driven and controlled by an electronic circuit that includes, for example, a power supply, drive circuit and control module. For flexible light sources, the electronic circuit may be provided in a separate housing electrically connected to the light source or may be built into the flexible material that mounts the light source.

10 The power supply may be any power supply capable of supplying sufficient power to activate the light source. The power supply may comprise a disposable or rechargeable battery, solar cell, fuel cell, an adapter, or may be powered by the power grid. The battery may be a printed battery, or a flexible printed primary or secondary cell capable of flexing with the printed LED or OLED substrate. The light source is preferably driven by DC or pulsed DC. One skilled in the art will understand that the output voltages and current levels
15 of the DC or pulsed DC control the peak output of each layer of the device, which in combination with the treatment time control the dose.

FIG. 31 is a block diagram of an exemplary system in which the light source and light source drive circuit are controlled by a microcontroller (discussed below) in accordance with a preprogrammed treatment cycle that provides a sequence of light at a fixed
20 dose or wavelength based on the patch configuration. For example, the microcontroller may be preprogrammed for treatment of a specific disorder, such as acne. The microcontroller may control the light source by adjusting the activation and deactivation of the light source, voltage, current, light wavelength, pulse width, duty factor, and light treatment time. One skilled in the art will appreciate that other operating parameters may also be controlled by the
25 microcontroller in accordance with the present invention.

The microcontroller is also connected to one or more I/O devices, such as an LED that provides an indication of whether the light source is on/off or an audio buzzer that alerts the user upon completion of a particular treatment. An on/off switch may also be provided to power the light source.

30 The system may be used in a number of treatment (irradiation) sessions that together result in an overall treatment time. For such cases, the microcontroller may include at least one timer configured to measure session time and overall treatment time or both. The timer may be used simply to monitor the session time or overall treatment time or may be used

- 37 -

to deactivate the light source after completion of a session or overall treatment. The timer may also be used to provide sequential treatments for automatic dosing in a wound care dressing, for example. A real time clock associated with the system can monitor the treatments and track/manage treatment sequences and dosing.

5 FIG. 32 is a block diagram of an exemplary system in which the light source is controlled by an electronic circuit with one or more sensors that operate in a closed loop to provide feedback to a microcontroller so as to dynamically control the light source during a treatment (irradiation) session. As can be seen, the electronic circuit is similar to that shown and described in connection with FIG. 31, with the addition of one or more sensors that operate
10 in a closed loop to provide feedback to the microcontroller. For example, in applications involving the photoeradication of *P. acnes* and other microorganisms, a photo sensor could be used to detect porphyrins or other spectra related to the inactivation of the bacteria that emit light within the red or other wavelength portion of the fluorescent spectrum, as discussed above. An exemplary sensor is a photo sensor used to detect porphyrins that emit light within
15 the red or other portion of the fluorescent spectrum in applications involving the photoeradication of *P. acnes* with pulsed purple or blue light or other spectra related to the inactivation of the bacteria. The photo sensor may comprise, for example, a photo detector with a sharp purple or blue notch filter and a bandpass filter that is used to detect the red or other wavelength portion of the fluorescent spectrum. This would be monitored during
20 treatment and as it decayed to a preset threshold the pulsed purple or blue light stimulation would be turned off. From time to time, the system would turn on to see if the porphyrin levels would return to a high enough level to induce microorganism kill upon exposure to pulsed purple or blue light. Of course, other types of sensors may also be used in accordance with the invention. Certain sensors may be built into the layers of the device, while other sensors may
25 be applied to the skin or other surface to be irradiated or may be built into the illuminator.

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the disclosure pertains. Also, as will be understood by one skilled in the art, for any and all purposes, all ranges disclosed herein also encompass any and all possible subranges and
30 combinations of subranges thereof. Any listed range can be easily recognized as sufficiently describing and enabling the same range being broken down into at least equal halves, thirds, quarters, fifths, tenths, etc. As will also be understood by one skilled in the art, a range includes each individual member.

- 38 -

While the present invention has been described and illustrated hereinabove with reference to several exemplary embodiments, it should be understood that various modifications could be made to these embodiments without departing from the scope of the invention. Therefore, the present invention is not to be limited to the specific methodologies or
5 device configurations of the exemplary embodiments, except insofar as such limitations are included in the following claims.

CLAIMS

We claim:

1. A method for photoeradication of microorganisms from a target, the method comprising: irradiating the target with purple or blue light in a pulsed mode of irradiation in accordance with an irradiation schedule that includes a plurality of irradiation sessions, wherein the irradiation sessions are provided at a plurality of time intervals so as to cause photoeradication of all or a portion of the microorganisms.
2. The method of claim 1, wherein the light has a wavelength that ranges from 380 nm to 500 nm.
3. The method of claim 1, wherein the light has a wavelength of 450 nm.
4. The method of any of claims 1-3, wherein at least a portion of the light is converted to a different wavelength.
5. The method of any of claims 1-4, wherein the purple or blue light is provided at a radiant exposure that ranges from 0.5 J/cm^2 to 60 J/cm^2 during each of the irradiation sessions.
6. The method of any of claims 1-4, wherein the purple or blue light is provided at a radiant exposure that ranges from 3.6 J/cm^2 to 20 J/cm^2 during each of the irradiation sessions.
7. The method of any of claims 1-4, wherein the purple or blue light is provided at a radiant exposure that ranges from 3.6 J/cm^2 to 5 J/cm^2 during each of the irradiation sessions.
8. The method of any of claims 1-7, wherein the purple or blue light has an average irradiance that ranges from 0.1 mW/cm^2 to 20 mW/cm^2 .
9. The method of any of claims 1-7, wherein the purple or blue light has an average irradiance that ranges from 2 mW/cm^2 to 3 mW/cm^2 .
10. The method of any of claims 1-9, wherein the purple or blue light comprises a sequence of light pulses provided at a duty factor that ranges from 20% to 33%.
11. The method of any of claims 1-10, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 50%.
12. The method of any of claims 1-10, wherein the irradiation schedule results in a survival

- 40 -

rate for the microorganisms of less than 40%.

13. The method of any of claims 1-10, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 30%.

14. The method of any of claims 1-10, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 20%.

15. The method of any of claims 1-10, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 10%.

16. The method of any of claims 1-10, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 5%.

17. The method of any of claims 1-10, wherein the irradiation schedule results in a survival rate for the microorganisms of 0%.

18. The method of any of claims 1-17, wherein the purple or blue light is provided at a fixed dose during each of the irradiation sessions.

19. The method of any of claims 1-17, wherein the purple or blue light is provided at a dose controlled by feedback from a sensor during each of the irradiation sessions.

20. The method of claim 19, wherein the sensor comprises a photo sensor that detects a portion of the fluorescent spectrum.

21. The method of claim 20, wherein the photo sensor detects red light emitted during irradiation of the microorganisms.

22. The method of claim 20, wherein each of the irradiation sessions is terminated when the detected portion of the fluorescent spectrum reaches a predetermined minimum level.

23. The method of any of claims 1-22, wherein the irradiation sessions are provided at a plurality of pre-defined time intervals.

24. The method of claim 23, wherein each of the pre-defined time intervals ranges from 1 hour to 4 hours.

25. The method of claim 24, wherein the pre-defined time intervals are repeated on a

plurality of days.

26. The method of claim 25, wherein the pre-defined time intervals are repeated on 2 days.
27. The method of claim 25, wherein the pre-defined time intervals are repeated on 3 days.
28. The method of claim 25, wherein the pre-defined time intervals are repeated on 4 days.
29. The method of claim 25, wherein the pre-defined time intervals are repeated daily.
30. The method of any of claims 1-22, wherein the time intervals are determined by a recovery time that a detected portion of the fluorescent spectrum reaches a predetermined minimum level capable of photoeradication of the microorganisms.
31. The method of any of claims 1-30, wherein the microorganisms comprise any aerobic or anaerobic bacteria (Gram positive and Gram negative).
32. The method of any of claims 1-30, wherein the microorganisms comprise one of *Propionibacterium acnes*, *Propionibacterium* spp., *Staphylococcus* spp., *Clostridium* spp., *Escherichia* spp., *Pseudomonas* spp., *Campylobacter* spp., *Listeria* spp., *Leuconostoc* spp., *Bacillus* spp., *Acinetobacter* spp., *Streptococcus* spp., *Brucella* spp., *Proteus* spp., *Klebsiella* spp., *Shigella* spp., *Helicobacter* spp., *Mycobacterium* spp., *Enterococcus* spp., *Salmonella* spp., *Chlamydia* spp., *Porphynomonas* spp., *Stenotrophomonas* spp., and *Elizabethkingia* spp.
33. The method of any of claims 1-32, wherein the target comprises a region of skin, tissue or a wound infected by the microorganisms so as to cause a bacterial infection.
34. The method of claim 33, wherein the bacterial infection comprises one of acne, psoriasis, cellulitis, erysipelas, erythrasma, folliculitis and skin abscesses, hidradenitis suppurativa, impetigo and ecthyma, lymphadenitis, lymphangitis, necrotizing skin infections, staphylococcal scalded skin syndrome, wound infection, tissue infection, and osteomyelitis.
35. The method of any of claims 1-32, wherein the target comprises an environment contaminated with the microorganisms.
36. The method of claim 35, wherein the microorganisms comprise community associated methicillin-resistant *Staphylococcus aureus* (MRSA).

- 42 -

37. The method of either of claims 35 and 36, wherein the contaminated environment comprises one of a locker room, a public or private restroom, an airplane, a school, a beach, a playground, and a playing field.
38. The method of claim 35, wherein the microorganisms comprise hospital associated methicillin-resistant *Staphylococcus aureus* (MRSA).
39. The method of either of claims 35 and 38, wherein the contaminated environment comprises one of a hospital and a clinical environment.
40. The method of any of claims 1-32, wherein the target comprises food contaminated with the microorganisms.
41. The method of claim 40, wherein the microorganisms comprise one of *Salmonella* spp., *E. Coli*, and *Listeria* spp.
42. The method of either of claims 40 and 41, wherein the food is contained within one of a refrigeration system, a food display system, a food storage area, and a food processing system.

- 43 -

43. A method for photoeradication of microorganisms from a target, the method comprising: irradiating the target with purple or blue light in a pulsed mode of irradiation in accordance with an irradiation schedule that includes a plurality of irradiation sessions, wherein the purple or blue light has an average irradiance that ranges from 0.1 mW/cm^2 to 20 mW/cm^2 and is provided at a radiant exposure that ranges from 0.5 J/cm^2 to 60 J/cm^2 during each of the irradiation sessions, wherein the irradiation sessions are provided at a plurality of time intervals so as to cause photoeradication of all or a portion of the microorganisms.
44. The method of claim 43, wherein the light has a wavelength that ranges from 380 nm to 500 nm.
45. The method of claim 43, wherein the light has a wavelength of 450 nm.
46. The method of any of claims 43-45, wherein at least a portion of the light is converted to a different wavelength.
47. The method of any of claims 43-46, wherein the purple or blue light comprises a sequence of light pulses provided at a duty factor that ranges from 20% to 33%.
48. The method of any of claims 43-46, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 50%.
49. The method of any of claims 43-46, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 40%.
50. The method of any of claims 43-46, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 30%.
51. The method of any of claims 43-46, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 20%.
52. The method of any of claims 43-46, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 10%.
53. The method of any of claims 43-46, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 5%.
54. The method of any of claims 43-46, wherein the irradiation schedule results in a survival

- 44 -

rate for the microorganisms of 0%.

55. The method of any of claims 43-54, wherein the purple or blue light is provided at a fixed dose during each of the irradiation sessions.

56. The method of any of claims 43-54, wherein the purple or blue light is provided at a dose controlled by feedback from a sensor during each of the irradiation sessions.

57. The method of claim 56, wherein the sensor comprises a photo sensor that detects a portion of the fluorescent spectrum.

58. The method of claim 57, wherein the photo sensor detects red light emitted during irradiation of the microorganisms.

59. The method of claim 57, wherein each of the irradiation sessions is terminated when the detected portion of the fluorescent spectrum reaches a predetermined minimum level.

60. The method of any of claims 44-59, wherein the irradiation sessions are provided at a plurality of pre-defined time intervals.

61. The method of claim 60, wherein each of the pre-defined time intervals ranges from 1 hour to 4 hours.

62. The method of claim 61, wherein the pre-defined time intervals are repeated on a plurality of days.

63. The method of claim 62, wherein the pre-defined time intervals are repeated on 2 days.

64. The method of claim 62, wherein the pre-defined time intervals are repeated on 3 days.

65. The method of claim 62, wherein the pre-defined time intervals are repeated on 4 days.

66. The method of claim 62, wherein the pre-defined time intervals are repeated daily.

67. The method of any of claims 44-59, wherein the time intervals are determined by a recovery time that a detected portion of the fluorescent spectrum reaches a predetermined minimum level capable of photoeradication of the microorganisms.

68. The method of any of claims 43-67, wherein the microorganisms comprise any aerobic or

- 45 -

anaerobic bacteria (Gram positive and Gram negative).

69. The method of any of claims 43-67, wherein the microorganisms comprise one of *Propionibacterium acnes*, *Propionibacterium* spp., *Staphylococcus* spp., *Clostridium* spp., *Escherichia* spp., *Pseudomonas* spp., *Campylobacter* spp., *Listeria* spp., *Leuconostoc* spp., *Bacillus* spp., *Acinetobacter* spp., *Streptococcus* spp., *Brucella* spp., *Proteus* spp., *Klebsiella* spp., *Shigella* spp., *Helicobacter* spp., *Mycobacterium* spp., *Enterococcus* spp., *Salmonella* spp., *Chlamydia* spp., *Porphyromonas* spp., *Stenotrophomonas* spp., and *Elizabethkingia* spp.

70. The method of any of claims 43-69, wherein the target comprises a region of skin, tissue or a wound infected by the microorganisms so as to cause a bacterial infection.

71. The method of claim 70, wherein the bacterial infection comprises one of acne, psoriasis, cellulitis, erysipelas, erythrasma, folliculitis and skin abscesses, hidradenitis suppurativa, impetigo and ecthyma, lymphadenitis, lymphangitis, necrotizing skin infections, staphylococcal scalded skin syndrome, wound infection, tissue infection, and osteomyelitis.

72. The method of any of claims 43-69, wherein the target comprises an environment contaminated with the microorganisms.

73. The method of claim 72, wherein the microorganisms comprise community associated methicillin-resistant *Staphylococcus aureus* (MRSA).

74. The method of either of claims 72 and 73, wherein the contaminated environment comprises one of a locker room, a public or private restroom, an airplane, a school, a beach, a playground, and a playing field.

75. The method of claim 72, wherein the microorganisms comprise hospital associated methicillin-resistant *Staphylococcus aureus* (MRSA).

76. The method of either of claims 72 and 75, wherein the contaminated environment comprises one of a hospital and a clinical environment.

77. The method of any of claims 43-69, wherein the target comprises food contaminated with the microorganisms.

78. The method of claim 77, wherein the microorganisms comprise one of *Salmonella* spp., *E. Coli*, and *Listeria* spp.

- 46 -

79. The method of either of claims 77 and 78, wherein the food is contained within one of a refrigeration system, a food display system, a food storage area, and a food processing system.

- 47 -

80. A system for photoeradication of microorganisms from a target, the system comprising:
- a. a light source configured to irradiate the target with purple or blue light in a pulsed mode of irradiation; and
 - b. an electronic circuit configured to control the light source in accordance with an irradiation schedule that includes a plurality of irradiation sessions, wherein the irradiation sessions are provided at a plurality of time intervals so as to cause photoeradication of all or a portion of the microorganisms.
81. The system of claim 80, wherein the light source comprises one of lasers, light emitting diodes (LEDs), organic light emitting diodes (OLEDs), printed light emitting diodes (printed LEDs), polymer light emitting diodes (PLEDs), quantum dot light emitting diodes (QDLEDs), and fluorescent tubes.
82. The system of claim 80, wherein the light source comprises a flexible light emitter layer comprising one of organic light emitting diodes (OLEDs) and printed light emitting diodes (printed LEDs), wherein the flexible light emitter layer is electrically coupled to a first flexible conductive layer and a second flexible conductive layer, wherein at least one of the first and second flexible conductive layers is transparent, wherein the flexible light emitter layer and the first and second flexible conductive layers are supported by a flexible substrate.
83. The system of any of claims 80-82, wherein the light has a wavelength that ranges from 380 nm to 500 nm.
84. The system of any of claims 80-82, wherein the light has a wavelength of 450 nm.
85. The system of any of claims 80-84, wherein the light source includes a layer of quantum dots that convert a portion of the light to a different wavelength.
86. The system of any of claims 80-85, wherein the light source includes a hydrogel layer.
87. The system of any of claims 80-86, wherein the light source is controlled to provide the purple or blue light at a radiant exposure that ranges from 0.5 J/cm^2 to 60 J/cm^2 during each of the irradiation sessions.
88. The system of any of claims 80-86, wherein the light source is controlled to provide the purple or blue light at a radiant exposure that ranges from 3.6 J/cm^2 to 20 J/cm^2 during each of

- 48 -

the irradiation sessions.

89. The system of any of claims 80-86, wherein the light source is controlled to provide the purple or blue light at a radiant exposure that ranges from 3.6 J/cm^2 to 5 J/cm^2 during each of the irradiation sessions.

90. The system of any of claims 80-89, wherein the light source provides the purple or blue light at an average irradiance that ranges from 0.1 mW/cm^2 to 20 mW/cm^2 .

91. The system of any of claims 80-89, wherein the light source provides the purple or blue light at an average irradiance that ranges from 2 mW/cm^2 to 3 mW/cm^2 .

92. The system of any of claims 80-91, wherein the purple or blue light comprises a sequence of light pulses provided at a duty factor that ranges from 20% to 33%.

93. The system of any of claims 80-92, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 50%.

94. The system of any of claims 80-92, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 40%.

95. The system of any of claims 80-92, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 30%.

96. The system of any of claims 80-92, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 20%.

97. The system of any of claims 80-92, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 10%.

98. The system of any of claims 80-92, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 5%.

99. The system of any of claims 80-92, wherein the irradiation schedule results in a survival rate for the microorganisms of 0%.

100. The system of any of claims 80-99, wherein the electronic circuit provides the purple or blue light at a fixed dose during each of the irradiation sessions.

- 49 -

101. The system of any of claims 80-99, wherein the system further comprises a sensor electrically coupled to the electronic circuit, wherein the electronic circuit provides the purple or blue light at a dose controlled by feedback from the sensor during each of the irradiation sessions.

102. The system of claim 101, wherein the sensor comprises a photo sensor that detects a portion of the fluorescent spectrum.

103. The system of claim 102, wherein the photo sensor detects red light emitted during irradiation of the microorganisms.

104. The system of claim 102, wherein the electronic circuit terminates each of the irradiation sessions when the detected portion of the fluorescent spectrum reaches a predetermined minimum level.

105. The system of any of claims 80-104, wherein the electronic circuit provides the irradiation sessions at a plurality of pre-defined time intervals.

106. The system of claim 105, wherein each of the pre-defined time intervals ranges from 1 hour to 4 hours.

107. The system of claim 106, wherein the electronic circuit repeats the pre-defined time intervals on a plurality of days.

108. The system of claim 107, wherein the electronic circuit repeats the pre-defined time intervals on 2 days.

109. The system of claim 107, wherein the electronic circuit repeats the pre-defined time intervals on 3 days.

110. The system of claim 107, wherein the electronic circuit repeats the pre-defined time intervals on 4 days.

111. The system of claim 107, wherein the electronic circuit repeats the pre-defined time intervals daily.

112. The system of any of claims 80-104, wherein the time intervals are determined by a recovery time that a detected portion of the fluorescent spectrum reaches a predetermined

- 50 -

minimum level capable of photoeradication of the microorganisms.

113. The system of any of claims 80-112, wherein the microorganisms comprise any aerobic or anaerobic bacteria (Gram positive and Gram negative).

114. The system of any of claims 80-112, wherein the microorganisms comprise one of *Propionibacterium acnes*, *Propionibacterium* spp., *Staphylococcus* spp., *Clostridium* spp., *Escherichia* spp., *Pseudomonas* spp., *Campylobacter* spp., *Listeria* spp., *Leuconostoc* spp., *Bacillus* spp., *Acinetobacter* spp., *Streptococcus* spp., *Brucella* spp., *Proteus* spp., *Klebsiella* spp., *Shigella* spp., *Helicobacter* spp., *Mycobacterium* spp., *Enterococcus* spp., *Salmonella* spp., *Chlamydia* spp., *Porphyromonas* spp., *Stenotrophomonas* spp., and *Elizabethkingia* spp.

115. The system of any of claims 80-114, wherein the target comprises a region of skin, tissue or a wound infected by the microorganisms so as to cause a bacterial infection.

116. The system of claim 115, wherein the bacterial infection comprises one of acne, psoriasis, cellulitis, erysipelas, erythrasma, folliculitis and skin abscesses, hidradenitis suppurativa, impetigo and ecthyma, lymphadenitis, lymphangitis, necrotizing skin infections, staphylococcal scalded skin syndrome, wound infection, tissue infection, and osteomyelitis.

117. The system of any of claims 80-114, wherein the target comprises an environment contaminated with the microorganisms.

118. The system of claim 117, wherein the microorganisms comprise community associated methicillin-resistant *Staphylococcus aureus* (MRSA).

119. The system of either of claims 117 and 118, wherein the contaminated environment comprises one of a locker room, a public or private restroom, an airplane, a school, a beach, a playground, and a playing field.

120. The system of claim 117, wherein the microorganisms comprise hospital associated methicillin-resistant *Staphylococcus aureus* (MRSA).

121. The system of either of claims 117 and 120, wherein the contaminated environment comprises one of a hospital and a clinical environment.

122. The system of any of claims 80-114, wherein the target comprises food contaminated with the microorganisms.

- 51 -

123. The system of claim 122, wherein the microorganisms comprise one of *Salmonella* spp., *E. Coli*, and *Listeria* spp.

124. The system of either of claims 122 and 123, wherein the light source is positioned within one of a refrigeration system, a food display system, a food storage area, and a food processing system.

125. The system of any of claims 80-114 and 117-124, wherein the light source is also configured to irradiate the target with white light that is applied either simultaneously or sequentially with the pulsed purple or blue light.

126. The system of claim 125, wherein the light source is controlled to activate the pulsed purple or blue light only after a door of the refrigeration system, the food display system, the food storage area, or the food processing system is closed or when the white light is inactivated.

- 52 -

127. A system for photoeradication of microorganisms from a target, the system comprising:
- a. a light source configured to irradiate the target with purple or blue light in a pulsed mode of irradiation at an average irradiance that ranges from 0.1 mW/cm^2 to 20 mW/cm^2 ; and
 - b. an electronic circuit configured to control the light source in accordance with an irradiation schedule that includes a plurality of irradiation sessions, wherein the light source is controlled to provide the purple or blue light at a radiant exposure that ranges from 0.5 J/cm^2 to 60 J/cm^2 during each of the irradiation sessions, wherein the irradiation sessions are provided at a plurality of time intervals so as to cause photoeradication of all or a portion of the microorganisms.
128. The system of claim 127, wherein the light source comprises one of lasers, light emitting diodes (LEDs), organic light emitting diodes (OLEDs), printed light emitting diodes (printed LEDs), polymer light emitting diodes (PLEDs), quantum dot light emitting diodes (QDLEDs), and fluorescent tubes.
129. The system of claim 127, wherein the light source comprises a flexible light emitter layer comprising one of organic light emitting diodes (OLEDs) and printed light emitting diodes (printed LEDs), wherein the flexible light emitter layer is electrically coupled to a first flexible conductive layer and a second flexible conductive layer, wherein at least one of the first and second flexible conductive layers is transparent, wherein the flexible light emitter layer and the first and second flexible conductive layers are supported by a flexible substrate.
130. The system of any of claims 127-129, wherein the light has a wavelength that ranges from 380 nm to 500 nm.
131. The system of any of claims 127-129, wherein the light has a wavelength of 450 nm.
132. The system of any of claims 127-131, wherein the light source includes a layer of quantum dots that convert a portion of the light to a different wavelength.
133. The system of any of claims 127-132, wherein the light source includes a hydrogel layer.
134. The system of any of claims 127-133, wherein the purple or blue light comprises a sequence of light pulses provided at a duty factor that ranges from 20% to 33%.

- 53 -

135. The system of any of claims 127-134, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 50%.

136. The system of any of claims 127-134, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 40%.

137. The system of any of claims 127-134, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 30%.

138. The system of any of claims 127-134, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 20%.

139. The system of any of claims 127-134, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 10%.

140. The system of any of claims 127-134, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 5%.

141. The system of any of claims 127-134, wherein the irradiation schedule results in a survival rate for the microorganisms of 0%.

142. The system of any of claims 127-141, wherein the electronic circuit provides the purple or blue light at a fixed dose during each of the irradiation sessions.

143. The system of any of claims 127-141, wherein the system further comprises a sensor electrically coupled to the electronic circuit, wherein the electronic circuit provides the purple or blue light at a dose controlled by feedback from the sensor during each of the irradiation sessions.

144. The system of claim 143, wherein the sensor comprises a photo sensor that detects a portion of the fluorescent spectrum.

145. The system of claim 144, wherein the photo sensor detects red light emitted during irradiation of the microorganisms.

146. The system of claim 144, wherein the electronic circuit terminates each of the irradiation sessions when the detected portion of the fluorescent spectrum reaches a predetermined minimum level.

- 54 -

147. The system of any of claims 127-146, wherein the electronic circuit provides the irradiation sessions at a plurality of pre-defined time intervals.

148. The system of claim 147, wherein each of the pre-defined time intervals ranges from 1 hour to 4 hours.

149. The system of claim 148, wherein the electronic circuit repeats the pre-defined time intervals on a plurality of days.

150. The system of claim 149, wherein the electronic circuit repeats the pre-defined time intervals on 2 days.

151. The system of claim 149, wherein the electronic circuit repeats the pre-defined time intervals on 3 days.

152. The system of claim 149, wherein the electronic circuit repeats the pre-defined time intervals on 4 days.

153. The system of claim 149, wherein the electronic circuit repeats the pre-defined time intervals daily.

154. The method of any of claims 127-146, wherein the time intervals are determined by a recovery time that a detected portion of the fluorescent spectrum reaches a predetermined minimum level capable of photoeradication of the microorganisms.

155. The system of any of claims 127-154, wherein the microorganisms comprise any aerobic or anaerobic bacteria (Gram positive and Gram negative).

156. The system of any of claims 127-154, wherein the microorganisms comprise one of *Propionibacterium acnes*, *Propionibacterium* spp., *Staphylococcus* spp., *Clostridium* spp., *Escherichia* spp., *Pseudomonas* spp., *Campylobacter* spp., *Listeria* spp., *Leuconostoc* spp., *Bacillus* spp., *Acinetobacter* spp., *Streptococcus* spp., *Brucella* spp., *Proteus* spp., *Klebsiella* spp., *Shigella* spp., *Helicobacter* spp., *Mycobacterium* spp., *Enterococcus* spp., *Salmonella* spp., *Chlamydia* spp., *Porphyromonas* spp., *Stenotrophomonas* spp., and *Elizabethkingia* spp.

157. The system of any of claims 127-156, wherein the target comprises a region of skin, tissue or a wound infected by the microorganisms so as to cause a bacterial infection.

- 55 -

158. The system of claim 157, wherein the bacterial infection comprises one of acne, psoriasis, cellulitis, erysipelas, erythrasma, folliculitis and skin abscesses, hidradenitis suppurativa, impetigo and ecthyma, lymphadenitis, lymphangitis, necrotizing skin infections, staphylococcal scalded skin syndrome, wound infection, tissue infection, and osteomyelitis.

159. The system of any of claims 127-156, wherein the target comprises an environment contaminated with the microorganisms.

160. The system of claim 159, wherein the microorganisms comprise community associated methicillin-resistant *Staphylococcus aureus* (MRSA).

161. The system of either of claims 159 and 160, wherein the contaminated environment comprises one of a locker room, a public or private restroom, an airplane, a school, a beach, a playground, and a playing field.

162. The system of claim 159, wherein the microorganisms comprise hospital associated methicillin-resistant *Staphylococcus aureus* (MRSA).

163. The system of either of claims 159 and 162, wherein the contaminated environment comprises one of a hospital and a clinical environment.

164. The system of any of claims 127-156, wherein the target comprises food contaminated with the microorganisms.

165. The system of claim 164, wherein the microorganisms comprise one of *Salmonella* spp., *E. Coli*, and *Listeria* spp.

166. The system of either of claims 164 and 165, wherein the light source is positioned within one of a refrigeration system, a food display system, a food storage area, and a food processing system.

167. The system of any of claims 127-156 and 159-166, wherein the light source is also configured to irradiate the target with white light that is applied either simultaneously or sequentially with the pulsed purple or blue light.

168. The system of claim 167, wherein the light source is controlled to activate the pulsed purple or blue light only after a door of the refrigeration system, the food display system, the food storage area, or the food processing system is closed or when the white light is inactivated.

- 56 -

169. A system for photoeradication of microorganisms from a target, the system comprising:
- a. a light source configured to irradiate the target with purple or blue light in a pulsed mode of irradiation at an average irradiance that ranges from 0.1 mW/cm^2 to 20 mW/cm^2 ; and
 - b. an electronic circuit configured to control the light source in accordance with an irradiation schedule that includes a plurality of irradiation sessions, wherein the light source is controlled to provide the purple or blue light at a radiant exposure that ranges from 0.5 J/cm^2 to 60 J/cm^2 during each of the irradiation sessions, wherein the irradiation sessions are provided at a plurality of time intervals so as to cause photoeradication of all or a portion of the microorganisms.
170. The system of claim 169, wherein the light source comprises one of lasers, light emitting diodes (LEDs), organic light emitting diodes (OLEDs), printed light emitting diodes (printed LEDs), polymer light emitting diodes (PLEDs), quantum dot light emitting diodes (QDLEDs), and fluorescent tubes.
171. The system of claim 169, wherein the light source comprises a flexible light emitter layer comprising one of organic light emitting diodes (OLEDs) and printed light emitting diodes (printed LEDs), wherein the flexible light emitter layer is electrically coupled to a first flexible conductive layer and a second flexible conductive layer, wherein at least one of the first and second flexible conductive layers is transparent, wherein the flexible light emitter layer and the first and second flexible conductive layers are supported by a flexible substrate.
172. The system of any of claims 169, wherein the light has a wavelength that ranges from 380 nm to 500 nm.
173. The system of any of claims 169, wherein the light has a wavelength of 450 nm.
174. The system of any of claims 169, wherein the light source includes a layer of quantum dots that convert a portion of the light to a different wavelength.
175. The system of any of claims 169, wherein the light source includes a hydrogel layer.
176. The system of any of claims 169, wherein the purple or blue light comprises a sequence of light pulses provided at a duty factor that ranges from 20% to 33%.

- 57 -

177. The system of any of claims 169, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 50%.

178. The system of any of claims 169, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 40%.

179. The system of any of claims 169, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 30%.

180. The system of any of claims 169, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 20%.

181. The system of any of claims 169, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 10%.

182. The system of any of claims 169, wherein the irradiation schedule results in a survival rate for the microorganisms of less than 5%.

183. The system of any of claims 169, wherein the irradiation schedule results in a survival rate for the microorganisms of 0%.

184. The system of any of claims 169, wherein the electronic circuit provides the purple or blue light at a fixed dose during each of the irradiation sessions.

185. The system of any of claims 169, wherein the system further comprises a sensor electrically coupled to the electronic circuit, wherein the electronic circuit provides the purple or blue light at a dose controlled by feedback from the sensor during each of the irradiation sessions.

186. The system of claim 185, wherein the sensor comprises a photo sensor that detects a portion of the fluorescent spectrum.

187. The system of claim 186, wherein the photo sensor detects red light emitted during irradiation of the microorganisms.

188. The system of claim 186, wherein the electronic circuit terminates each of the irradiation sessions when the detected portion of the fluorescent spectrum reaches a predetermined minimum level.

- 58 -

189. The system of any of claims 169, wherein the electronic circuit provides the irradiation sessions at a plurality of pre-defined time intervals.

190. The system of claim 189, wherein each of the pre-defined time intervals ranges from 1 hour to 4 hours.

191. The system of claim 189, wherein the electronic circuit repeats the pre-defined time intervals on a plurality of days.

192. The system of claim 191, wherein the electronic circuit repeats the pre-defined time intervals on 2 days.

193. The system of claim 191, wherein the electronic circuit repeats the pre-defined time intervals on 3 days.

194. The system of claim 191, wherein the electronic circuit repeats the pre-defined time intervals on 4 days.

195. The system of claim 191, wherein the electronic circuit repeats the pre-defined time intervals daily.

196. The method of any of claims 169, wherein the time intervals are determined by a recovery time that a detected portion of the fluorescent spectrum reaches a predetermined minimum level capable of photoeradication of the microorganisms.

197. The system of any of claims 169, wherein the microorganisms comprise any aerobic or anaerobic bacteria (Gram positive and Gram negative).

198. The system of any of claims 169, wherein the microorganisms comprise one of *Propionibacterium acnes*, *Propionibacterium* spp., *Staphylococcus* spp., *Clostridium* spp., *Escherichia* spp., *Pseudomonas* spp., *Campylobacter* spp., *Listeria* spp., *Leuconostoc* spp., *Bacillus* spp., *Acinetobacter* spp., *Streptococcus* spp., *Brucella* spp., *Proteus* spp., *Klebsiella* spp., *Shigella* spp., *Helicobacter* spp., *Mycobacterium* spp., *Enterococcus* spp., *Salmonella* spp., *Chlamydia* spp., *Porphyromonas* spp., *Stenotrophomonas* spp., and *Elizabethkingia* spp.

199. The system of any of claims 169, wherein the target comprises a region of skin, tissue or a wound infected by the microorganisms so as to cause a bacterial infection.

- 59 -

200. The system of claim 199, wherein the bacterial infection comprises one of acne, psoriasis, cellulitis, erysipelas, erythrasma, folliculitis and skin abscesses, hidradenitis suppurativa, impetigo and ecthyma, lymphadenitis, lymphangitis, necrotizing skin infections, staphylococcal scalded skin syndrome, wound infection, tissue infection, and osteomyelitis.

201. The system of any of claims 169, wherein the target comprises an environment contaminated with the microorganisms.

202. The system of claim 201, wherein the microorganisms comprise community associated methicillin-resistant *Staphylococcus aureus* (MRSA).

203. The system of either of claims 202, wherein the contaminated environment comprises one of a locker room, a public or private restroom, an airplane, a school, a beach, a playground, and a playing field.

204. The system of claim 201, wherein the microorganisms comprise hospital associated methicillin-resistant *Staphylococcus aureus* (MRSA).

205. The system of either of claims 204, wherein the contaminated environment comprises one of a hospital and a clinical environment.

206. The system of any of claims 169, wherein the target comprises food contaminated with the microorganisms.

207. The system of claim 206, wherein the microorganisms comprise one of *Salmonella* spp., *E. Coli*, and *Listeria* spp.

208. The system of either of claims 206, wherein the light source is positioned within one of a refrigeration system, a food display system, a food storage area, and a food processing system.

209. The system of either of claims 201 and 206, wherein the light source is also configured to irradiate the target with white light that is applied either simultaneously or sequentially with the pulsed purple or blue light.

210. The system of claim 209, wherein the light source is controlled to activate the pulsed purple or blue light only after a door of the refrigeration system, the food display system, the food storage area, or the food processing system is closed or when the white light is inactivated.

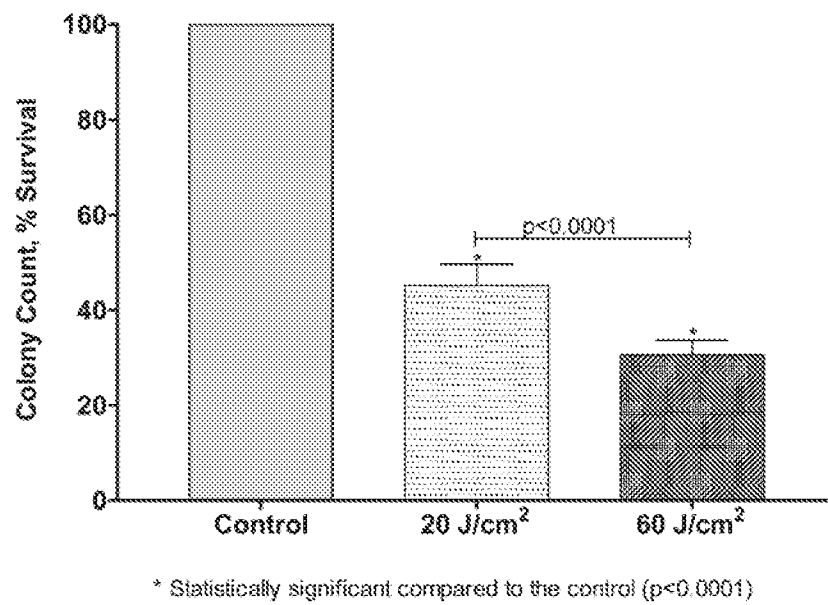


FIG. 1

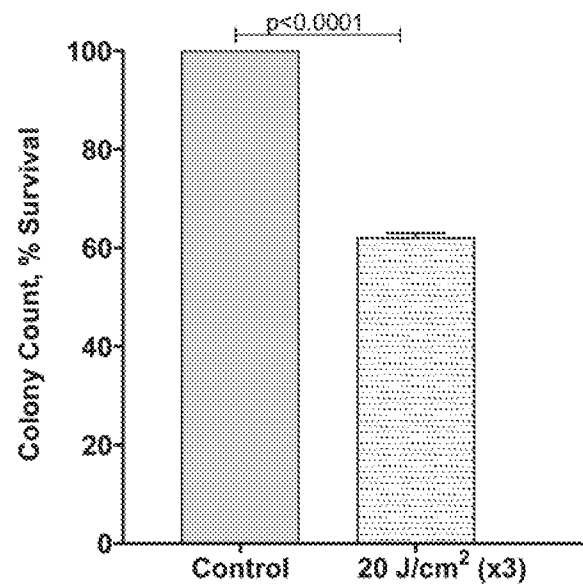


FIG. 2

2/23


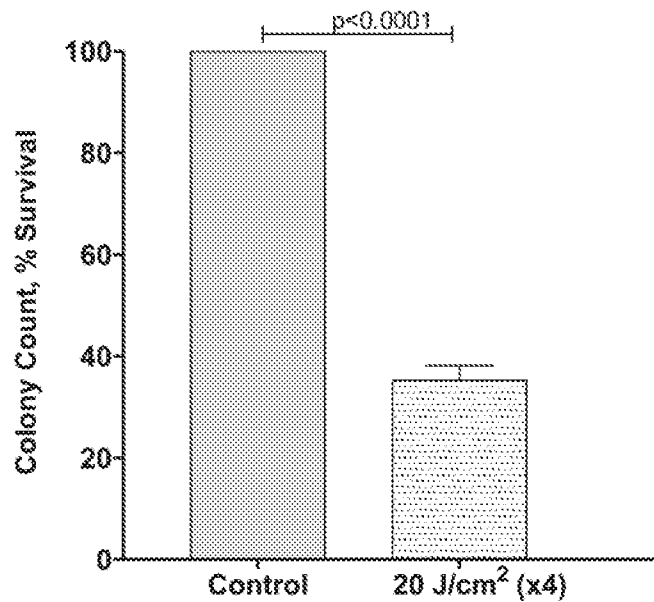


FIG. 3

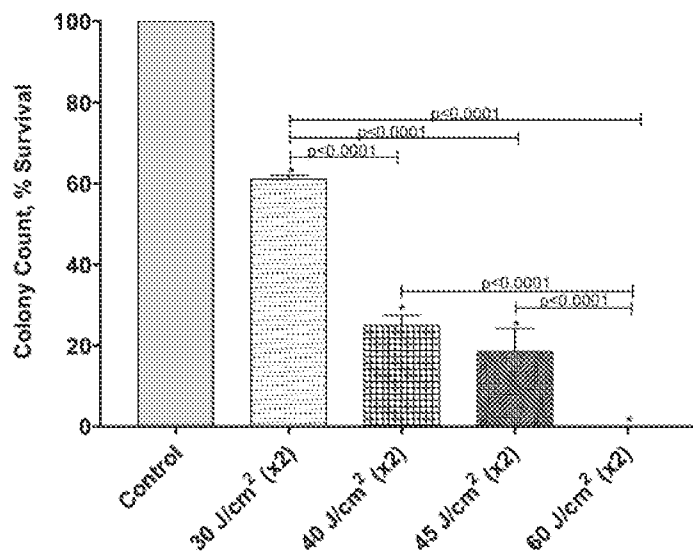

* All treatment groups were statistically significant compared to the control ($p < 0.0001$)

FIG. 4

3/23

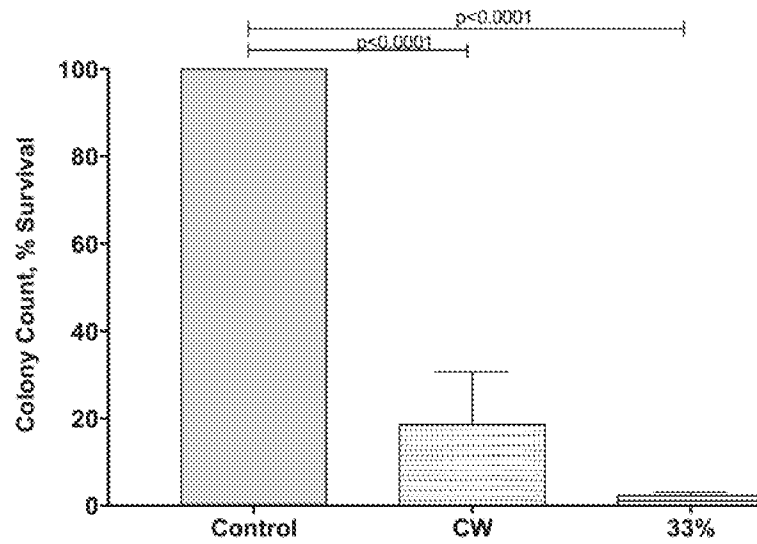


FIG. 5

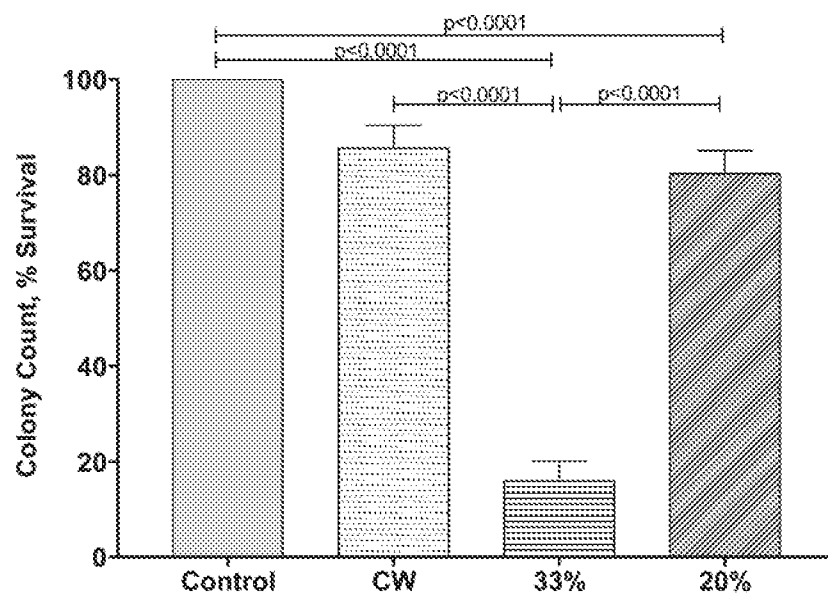


FIG. 6

4/23

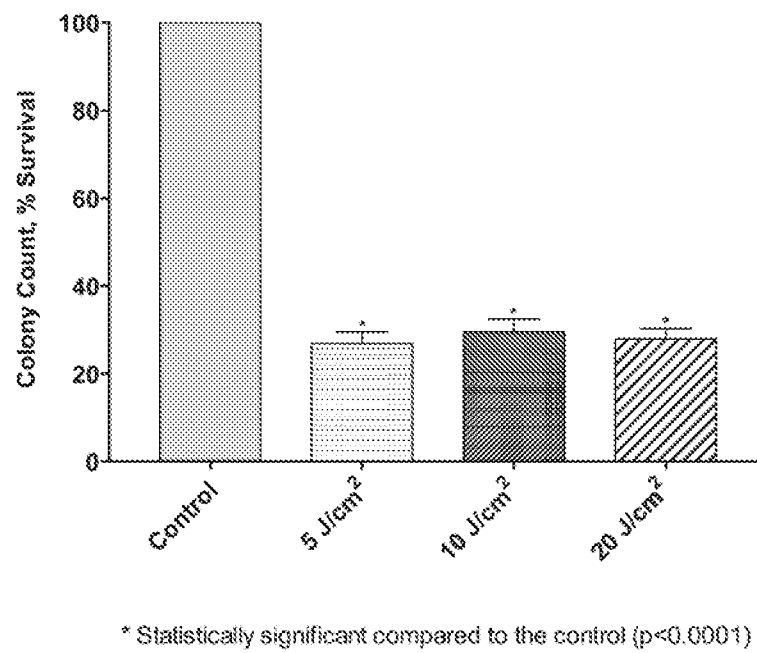


FIG. 7

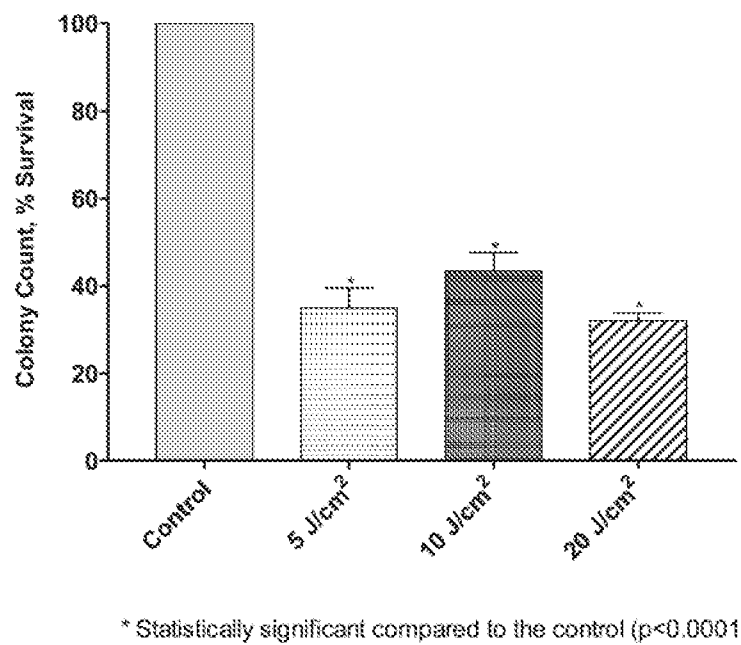


FIG. 8

5/23

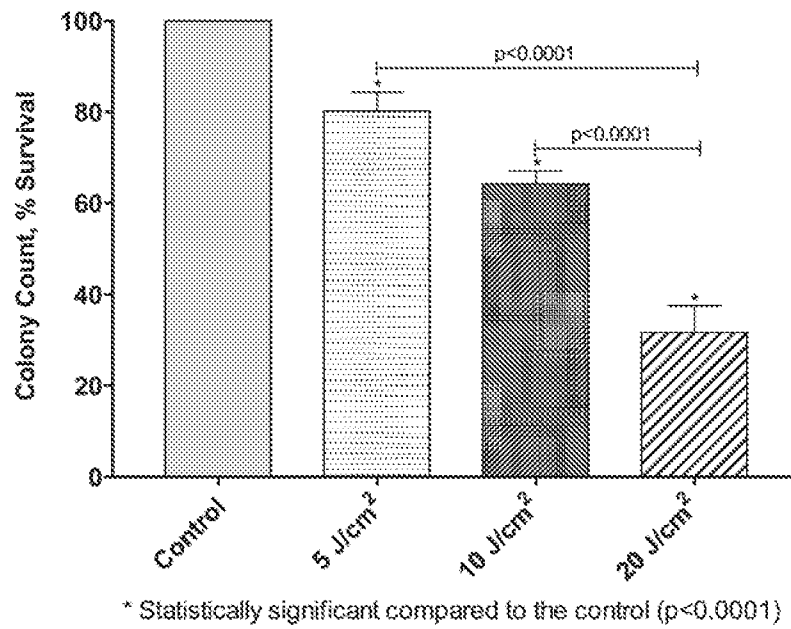


FIG. 9

6/23

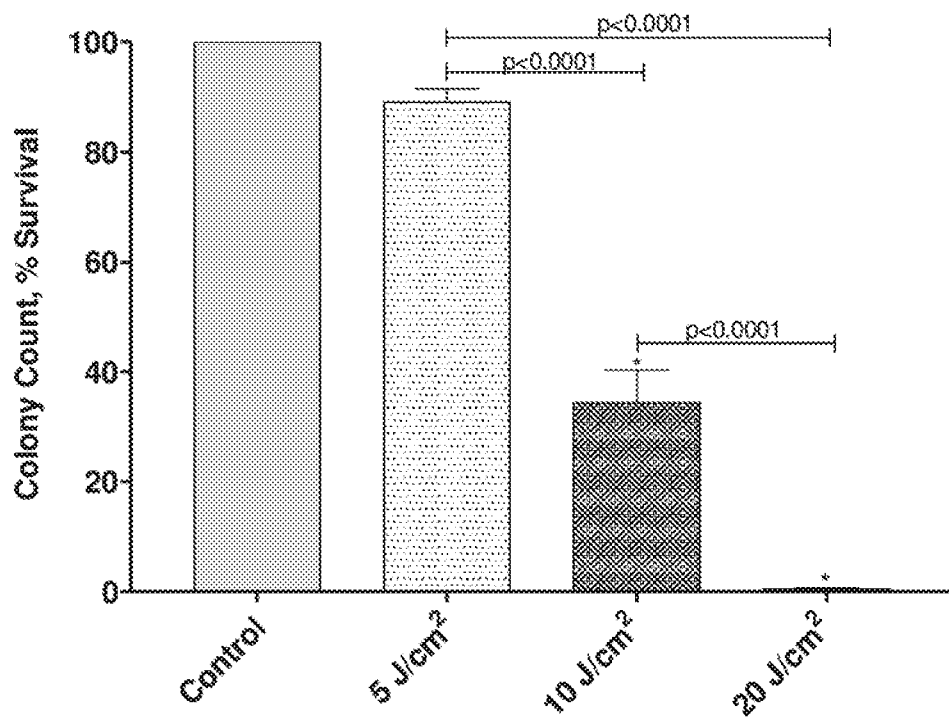


FIG. 10



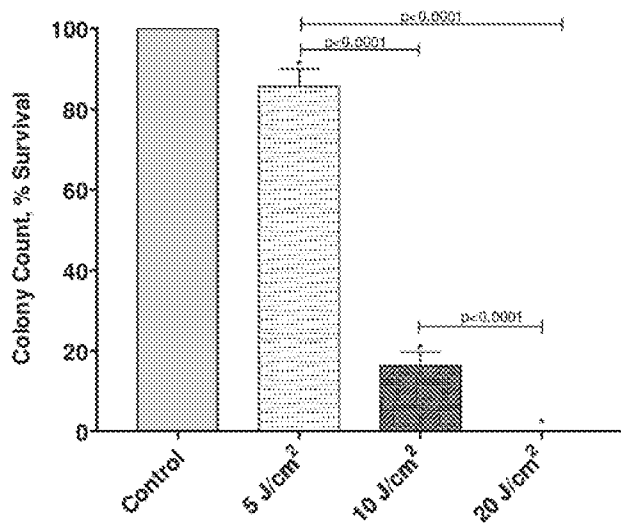


FIG. 11

7/23

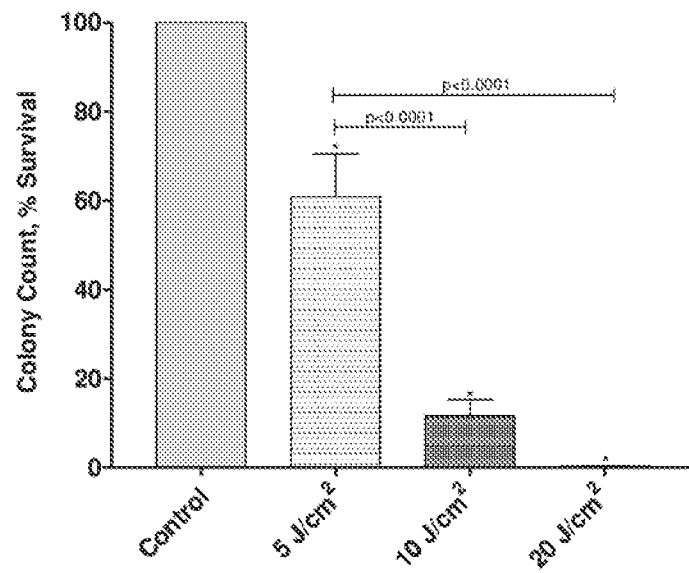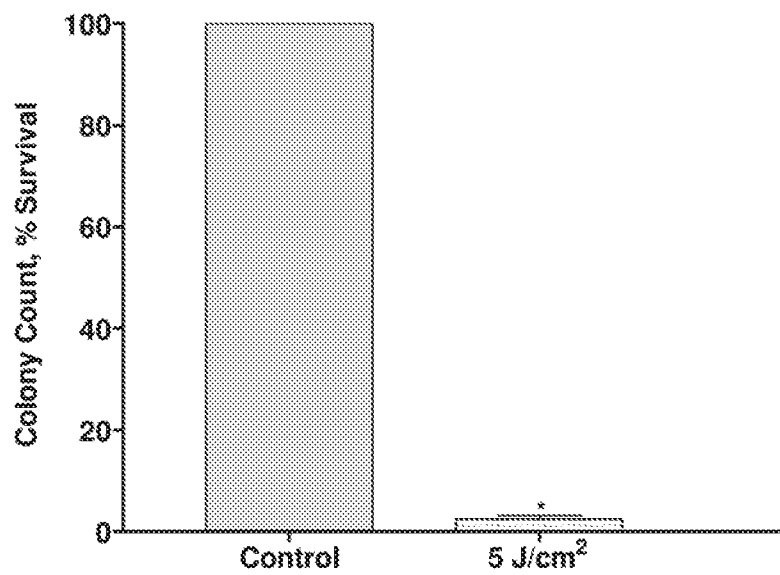


* Statistically significant compared to the control (p<0.0001)

FIG. 12


* Statistically significant compared to the control (p<0.0001)

FIG. 13

8/23

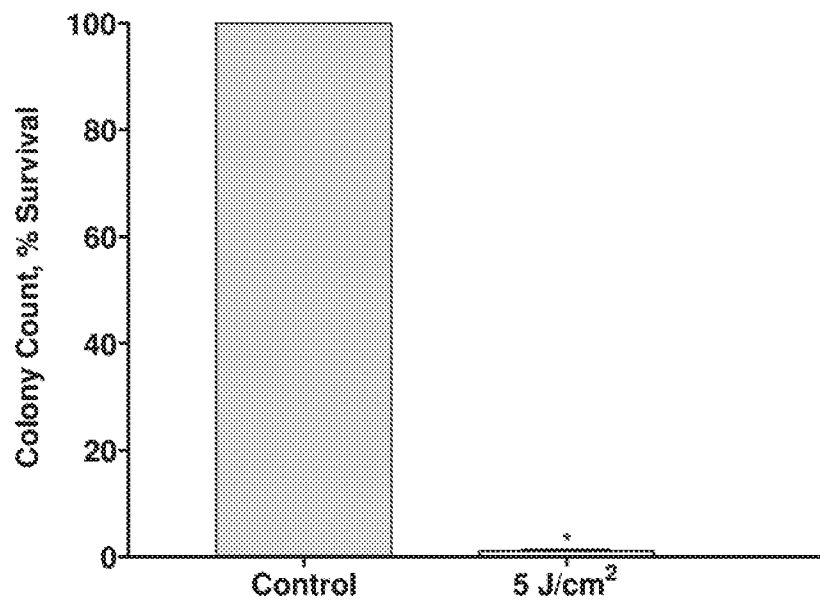


* Statistically significant compared to the control (p=0.0164)

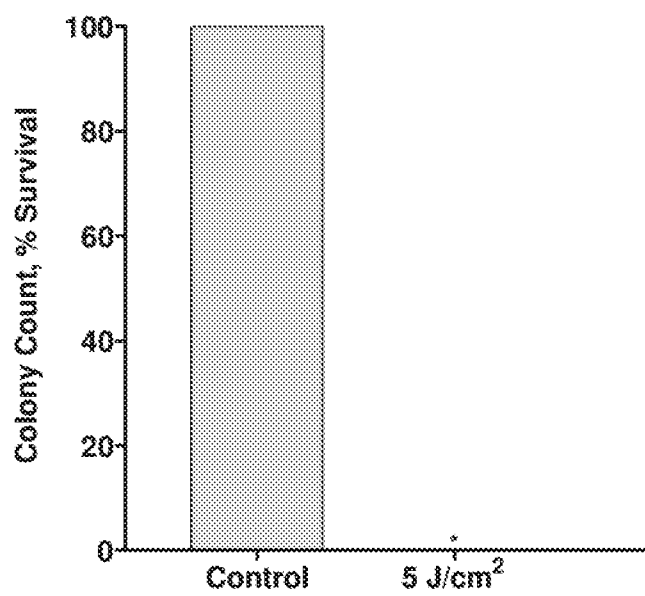FIG. 14


* Statistically significant compared to the control (p<0.0001)

FIG. 15

9/23

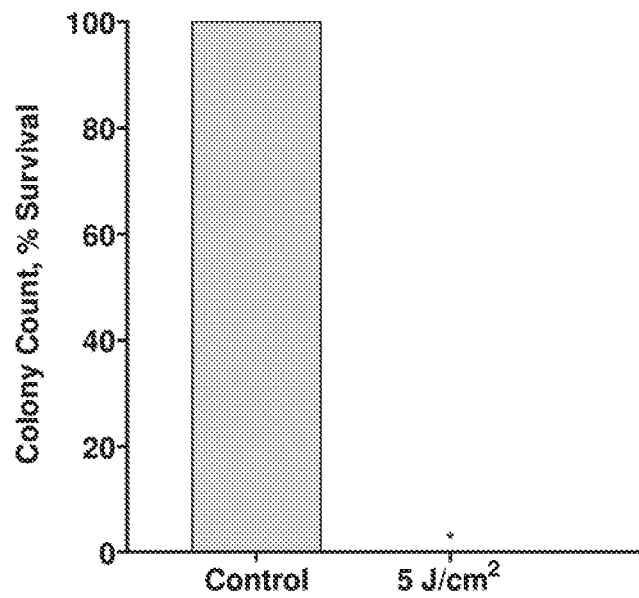

* Statistically significant compared to the control ($p < 0.0001$)

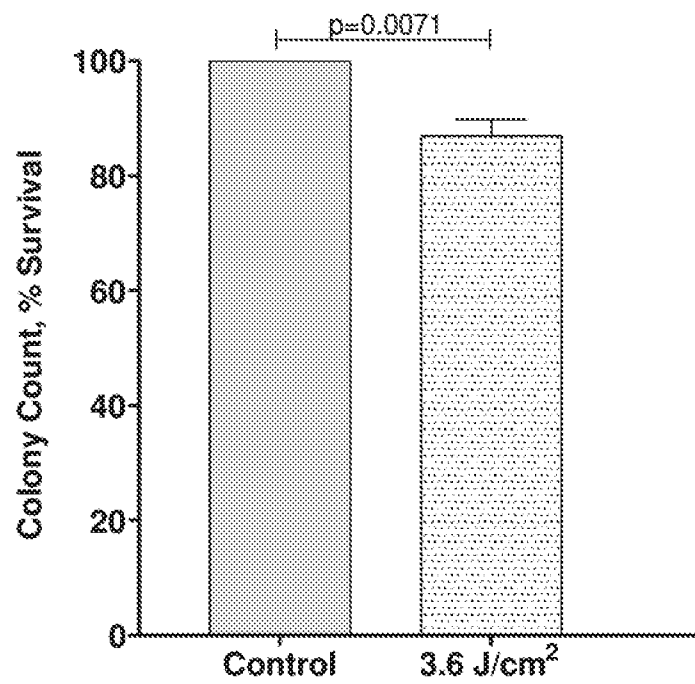FIG. 16**FIG. 17**

10/23


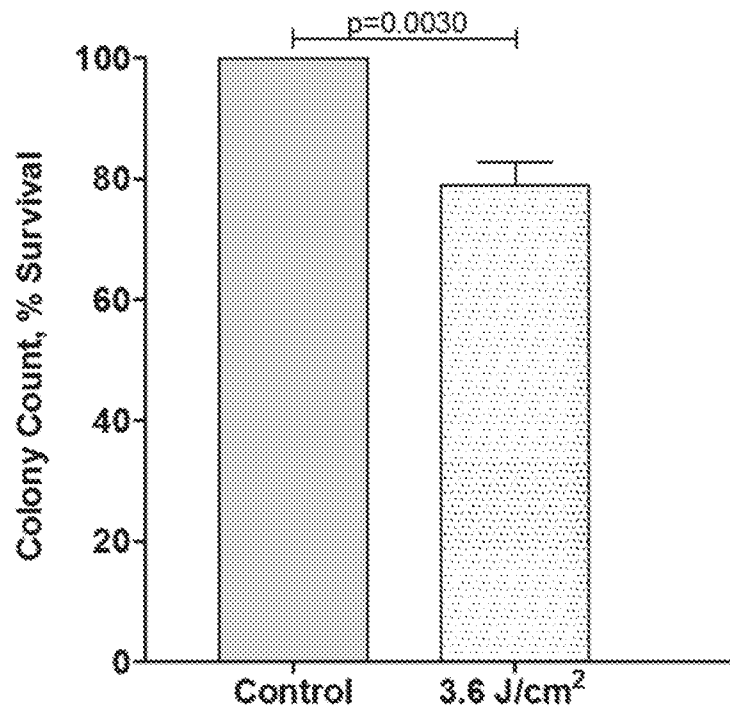



FIG. 18

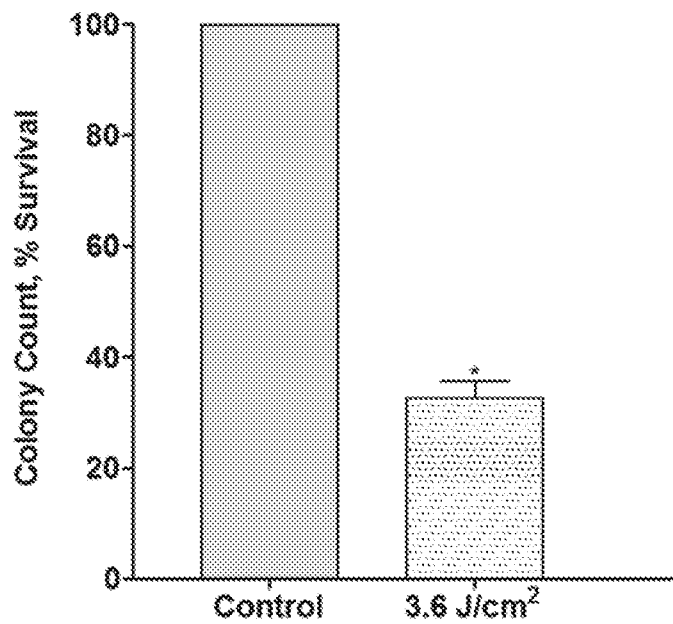


* Statistically significant compared to the control ($p < 0.0001$)

FIG. 19

11/23

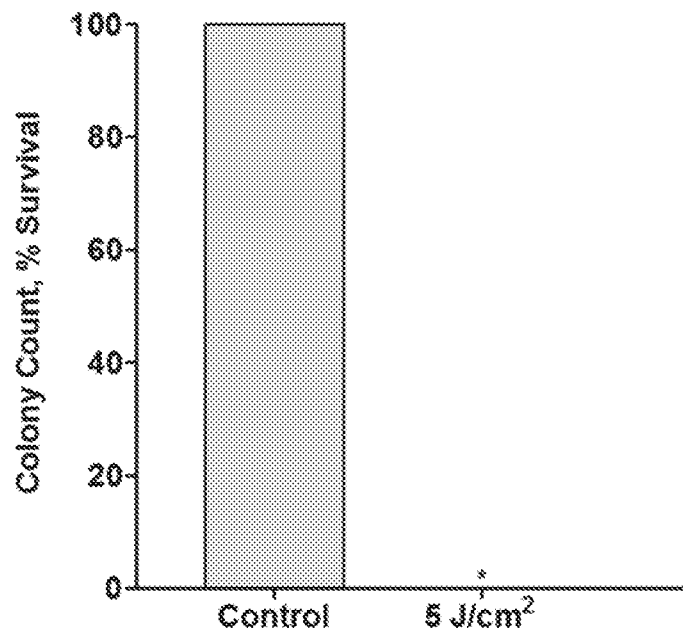

* Statistically significant compared to the control ($p < 0.0001$)

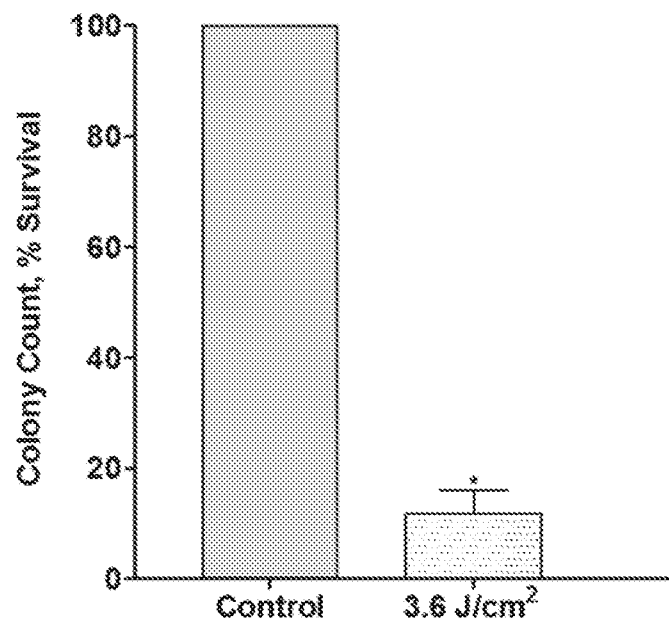FIG. 20

* Statistically significant compared to the control ($p < 0.0001$)

FIG. 21

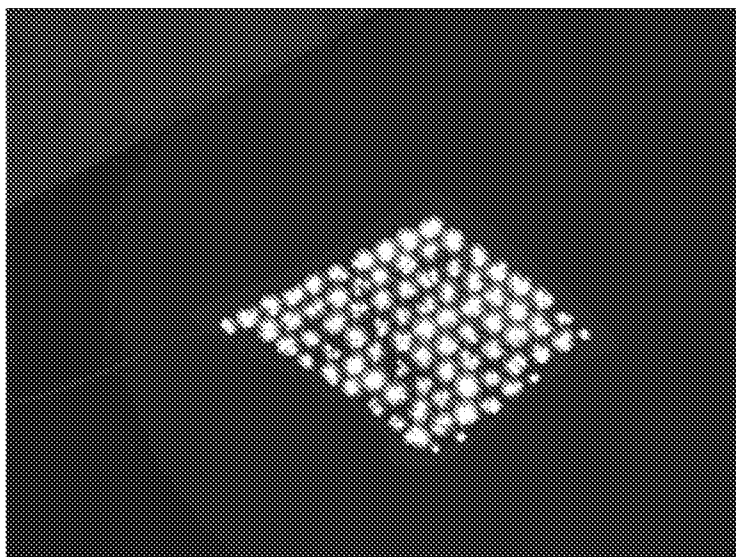


FIG. 22A

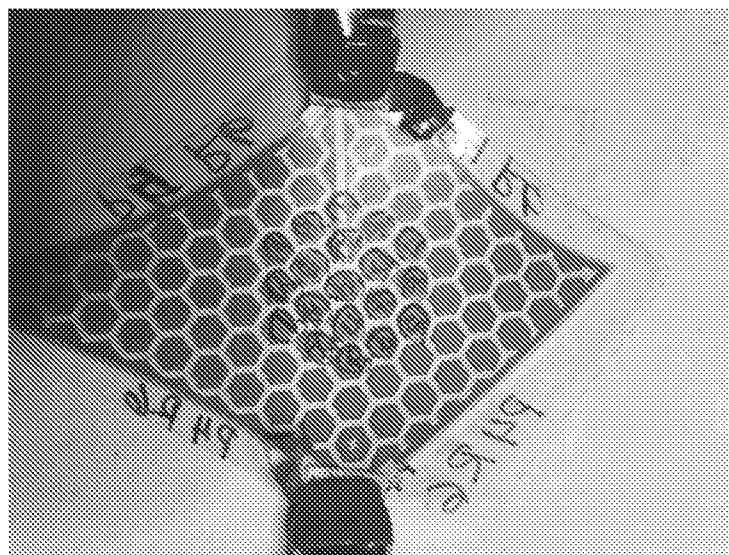


FIG. 22B

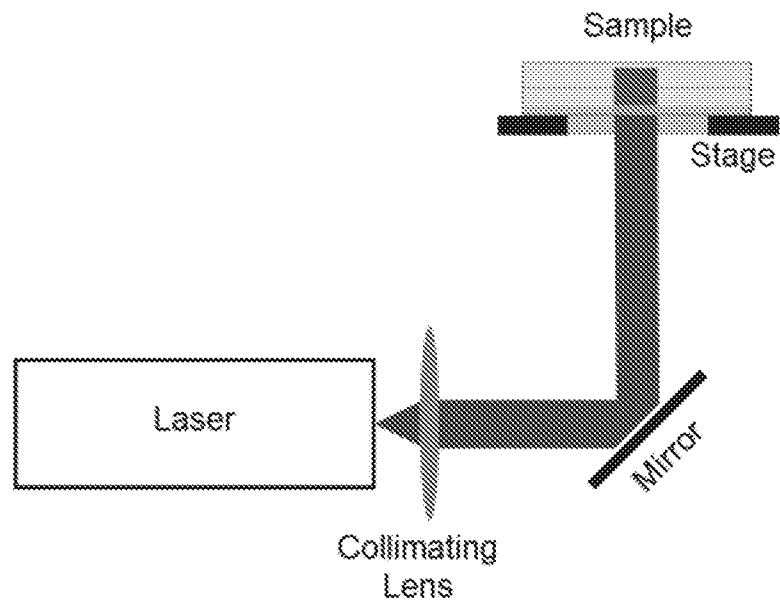


FIG. 23

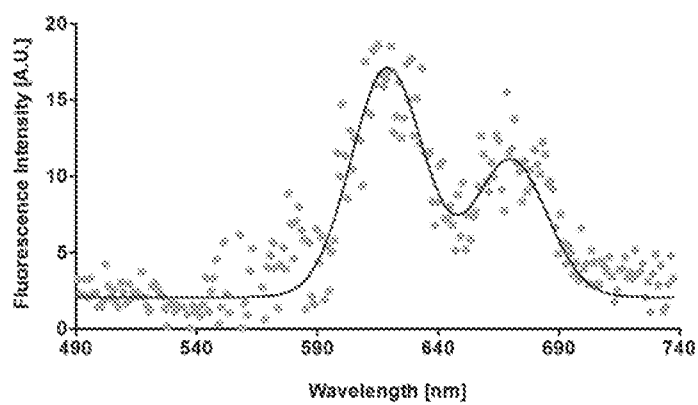


FIG. 24A

15/23

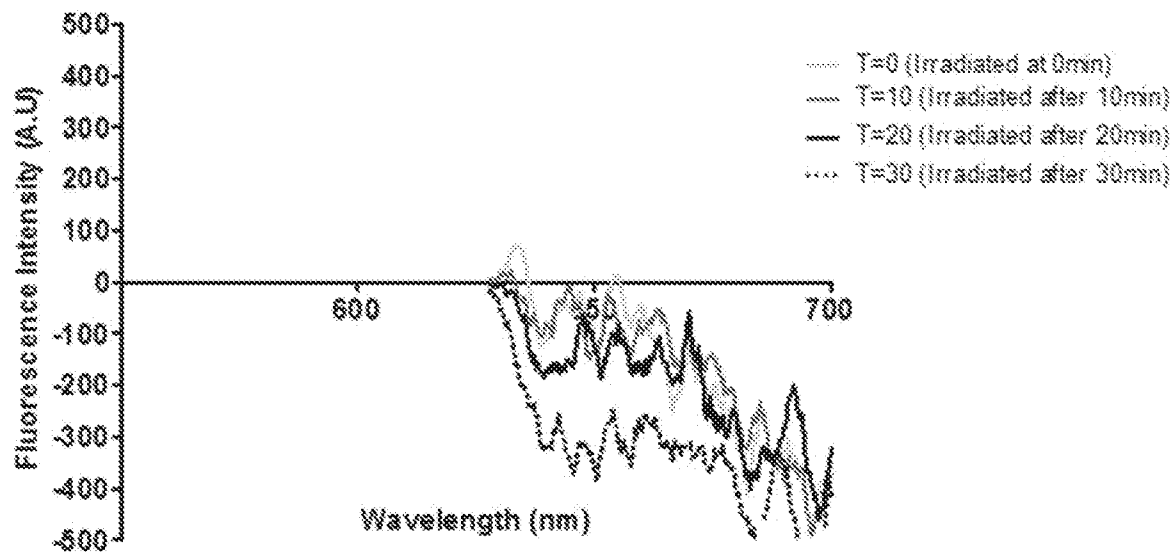


FIG. 24B

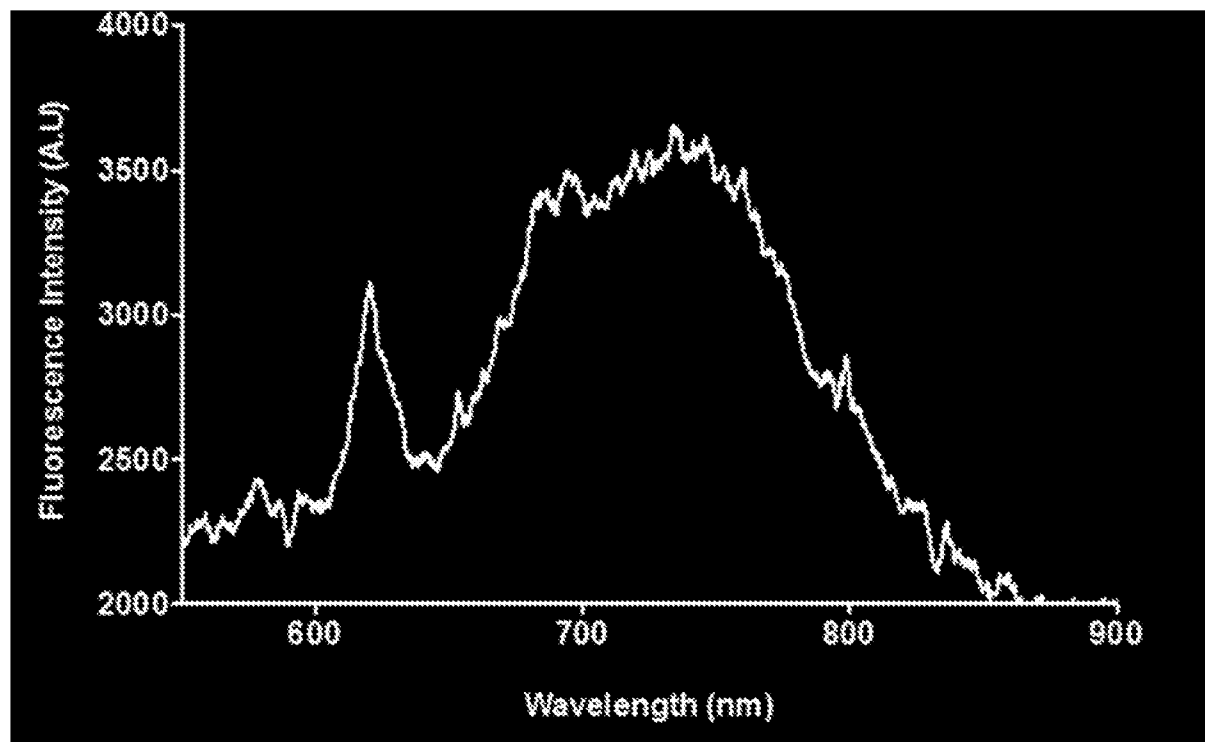


FIG. 24C

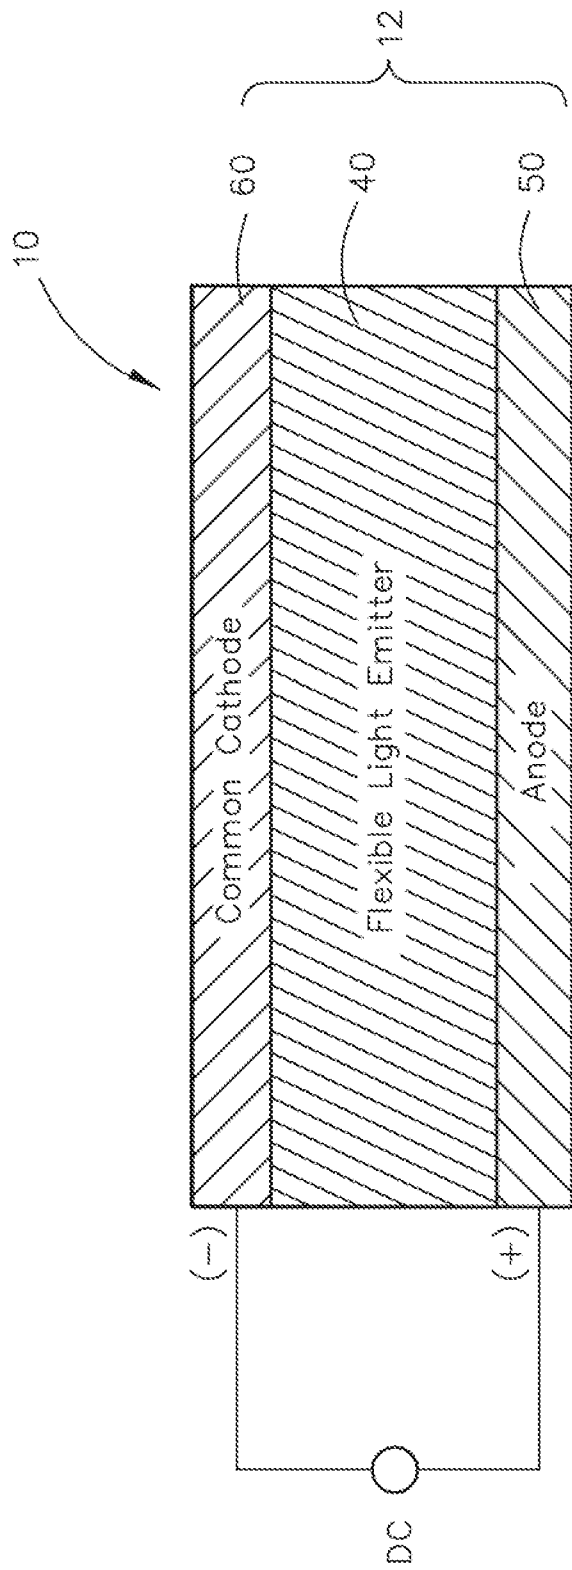


FIG. 25

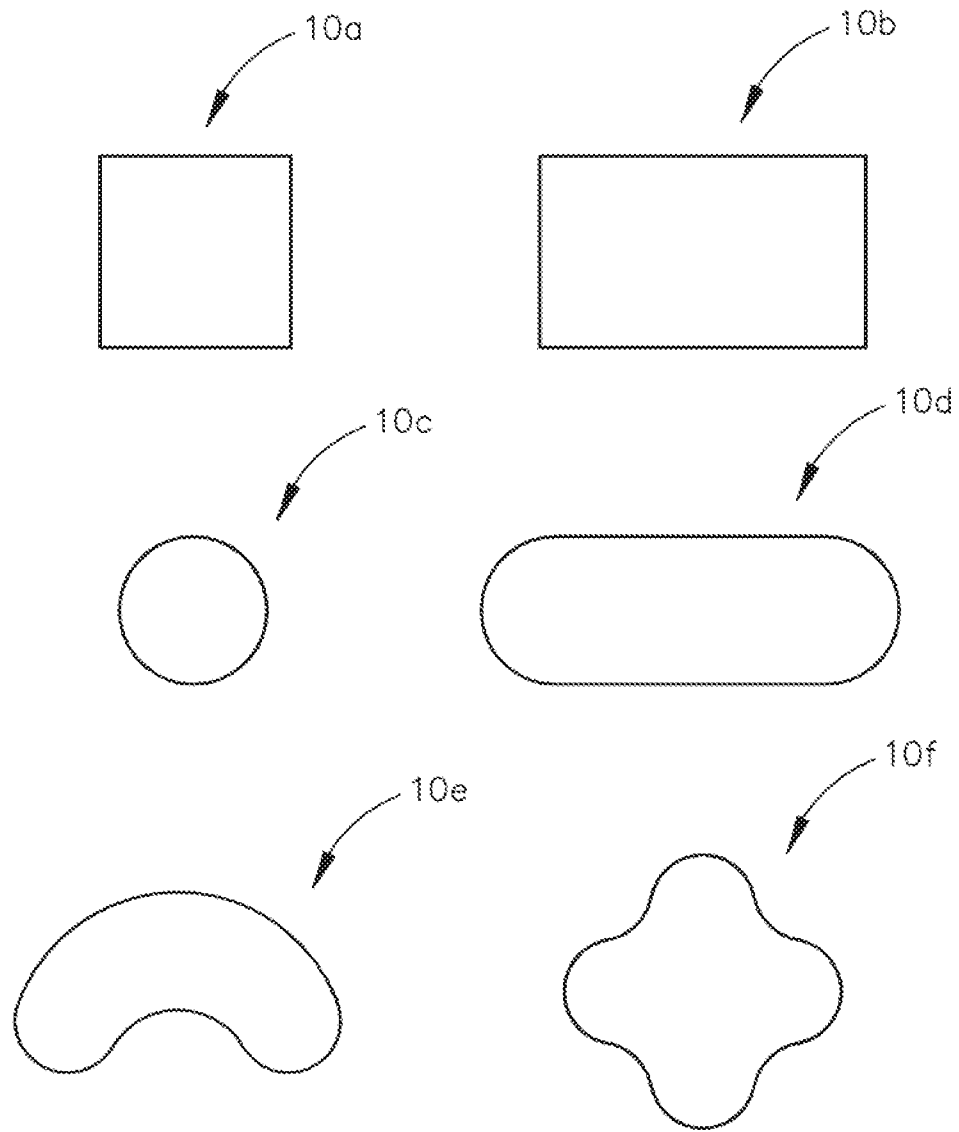


FIG. 26

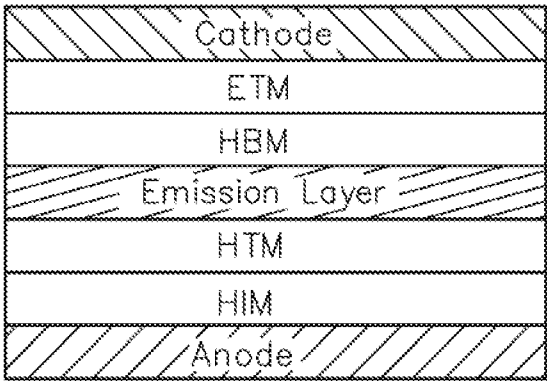


FIG. 27

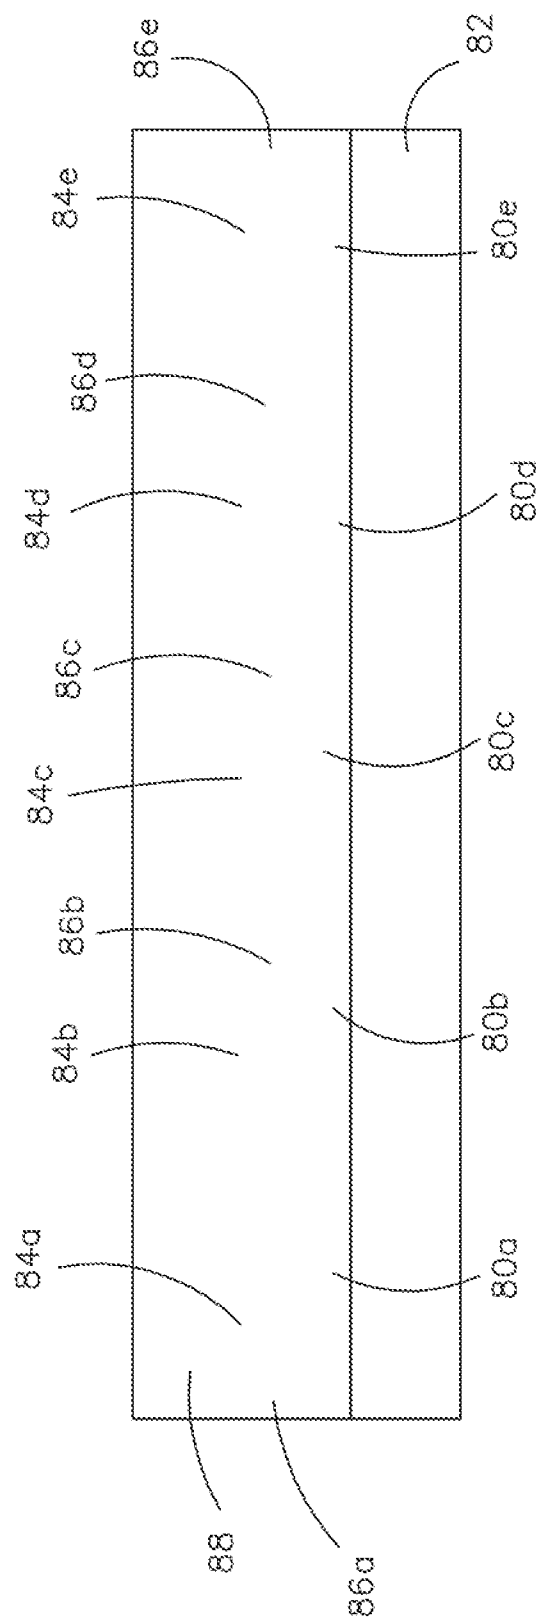
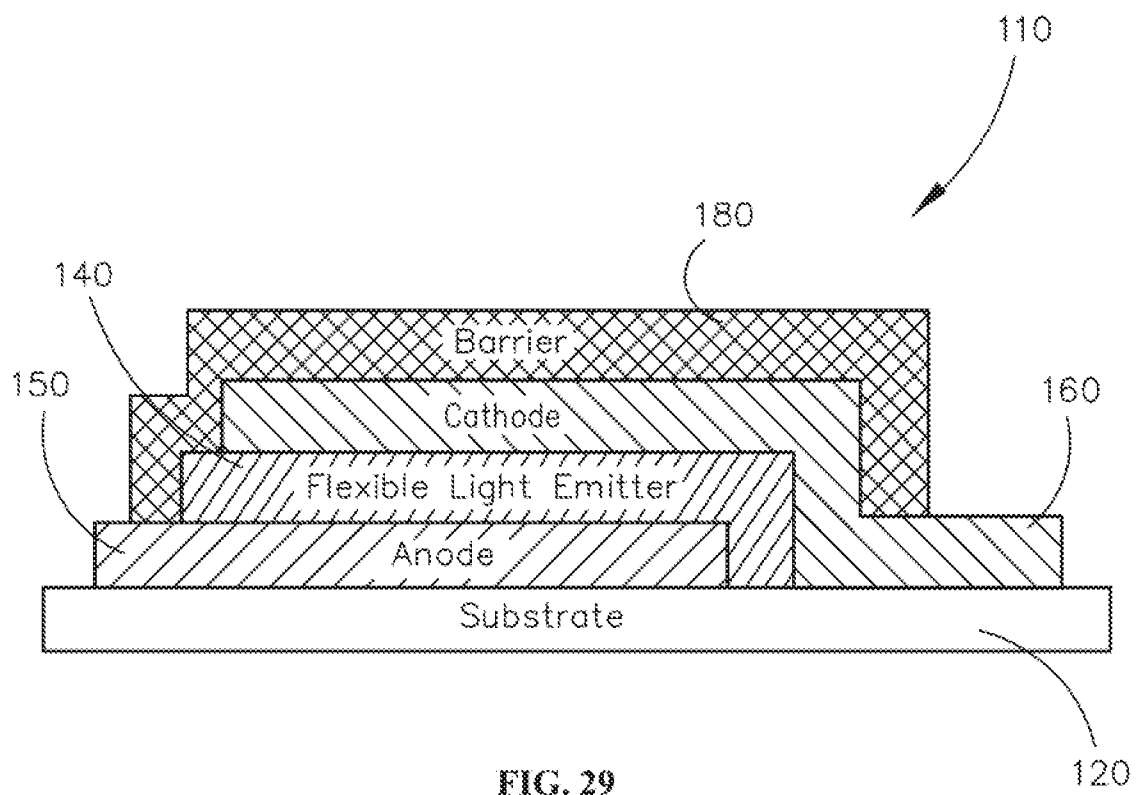


FIG. 28



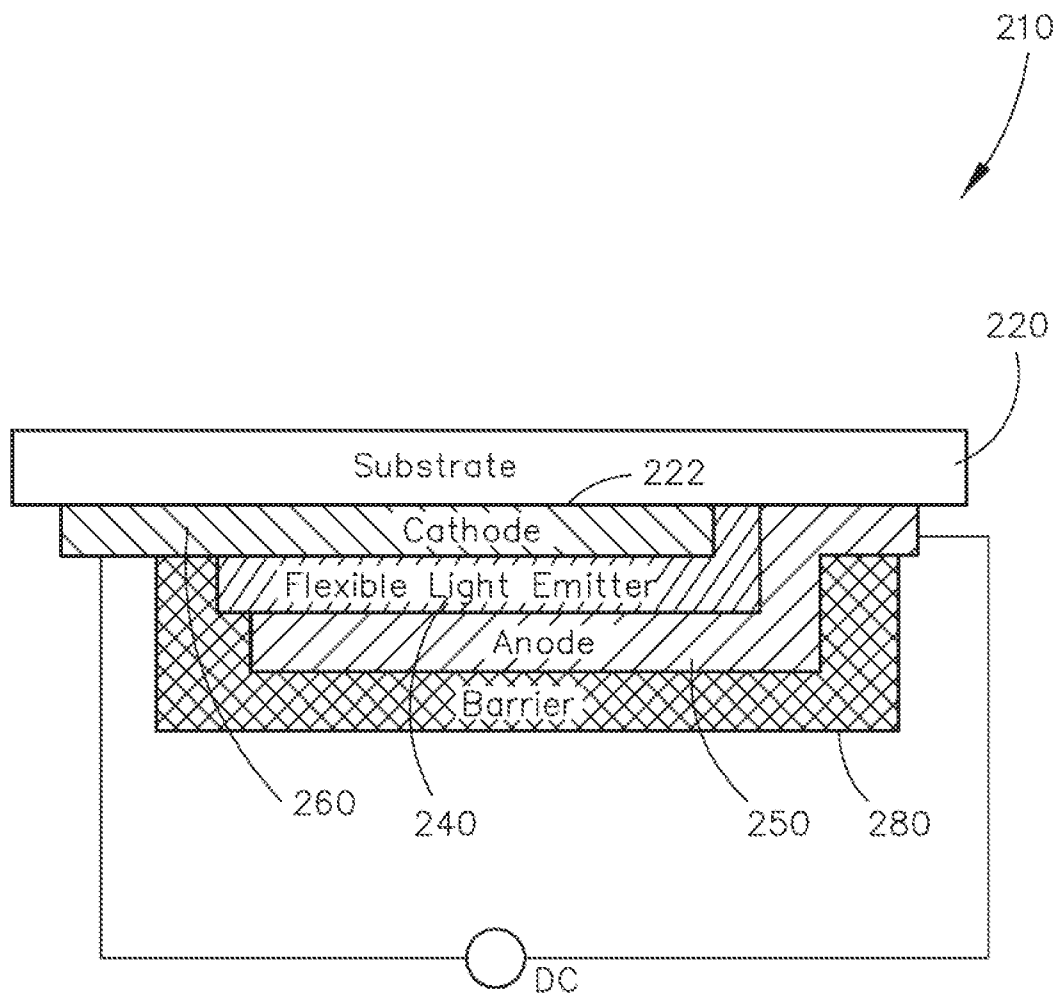


FIG. 30

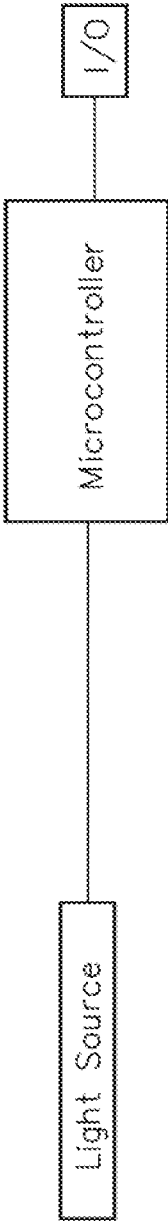


FIG. 31

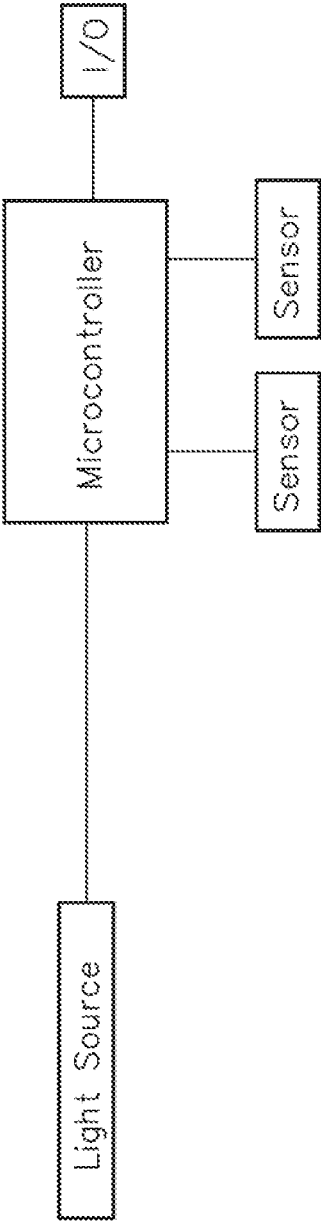


FIG. 32

A. CLASSIFICATION OF SUBJECT MATTER**A61N 5/06(2006.01)i, A23L 3/26(2006.01)i, A61L 2/08(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61N 5/06; A61K 31/5415; A61M 37/00; A61M 35/00; A61B 18/18; A61K 41/00; A23L 3/26; A61L 2/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: photoeradication, skin, wound, microorganism, light source, electronic circuit, purple, blue, LED, OLED**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010-0069898 A1 (O'NEIL, M. P. et al.) 18 March 2010 See claims 1, 5, 9; paragraphs [0050], [0068]; figures 1-4.	80-81, 83-84 , 127-128, 130-131 , 169-170, 172-173 , 177-184, 189-195 , 197-208
Y		82, 129, 171, 174-176 , 185-188, 196
Y	WO 2014-144923 A1 (SONOVIA HOLDINGS LLC) 18 September 2014 See claims 1, 31-32, 34, 39; page 10, lines 5-12; page 13, lines 29-30.	82, 129, 171, 174-176 , 185-188, 196
A	EP 1263465 B1 (ADVANCED PHOTODYNAMIC TECHNOLOGIES, INC.) 30 May 2012 See the entire document.	80-84, 127-131 , 169-208
A	US 2011-0224598 A1 (BAROLET, D.) 15 September 2011 See the entire document.	80-84, 127-131 , 169-208



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 September 2017 (08.09.2017)

Date of mailing of the international search report

08 September 2017 (08.09.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

LEE GYONG CHEOL

Telephone No. +82-42-481-8611



INTERNATIONAL SEARCH REPORTInternational application No.
PCT/US2017/034396**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 1-79
because they relate to subject matter not required to be searched by this Authority, namely:
Claims 1-79 pertain to methods for treatment of the human body and thus relate to a subject-matter which this International Searching Authority is not required to search under PCT Article 17(2)(a)(i) and PCT Rule 39.1(iv).
2. ☒ Claims Nos.: See the supplemental box.
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
See the supplemental box.
3. ☒ Claims Nos.: See the supplemental box.
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

Box No. II Observations where certain claims were found unsearchable

2. Claims Nos.:

20-22,24-29,34,36,38,41,57-59,61-66,71,73,75,78,102-104,106-111,116,118,120,123,126,144-146,148-153,158,160,162,165,168,210

because they relate to parts of the national application that do not comply with the prescribed requirements to such as extent that no meaningful international-type search can be carried out, specifically:

Claims

20-22,24-29,34,36,38,41,57-59,61-66,71,73,75,78,102-104,106-111,116,118,120,123,126,144-146,148-153,158,160,162,165,168,210 directly or indirectly refer to one of the unsearchable claims which does not comply with PCT Rule 6.4(a).

3. Claims Nos.:

5-19,23,30-33,35,37,39,40,42,47-56,60,67-70,72,74,76,77,79,85-101,105,112-115,117,119,121,122,124,125,132-143,147,154-157,159,161,163,164,166,167,209

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/034396

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0069898 A1	18/03/2010	EP 1596707 A2	23/11/2005
		EP 1596707 A3	28/12/2005
		EP 1596744 A2	23/11/2005
		EP 1596744 B1	17/02/2016
		EP 1596745 A2	23/11/2005
		EP 1596745 B1	17/02/2016
		EP 1596747 A2	23/11/2005
		EP 1596747 B1	17/02/2016
		EP 1624787 A2	15/02/2006
		EP 2194899 A1	16/06/2010
		EP 2337551 A2	29/06/2011
		EP 2344249 A1	20/07/2011
		EP 2604215 A1	19/06/2013
		EP 2604216 A1	19/06/2013
		JP 2006-518610 A	17/08/2006
		JP 2006-518611 A	17/08/2006
		JP 2006-518612 A	17/08/2006
		JP 2006-518614 A	17/08/2006
		JP 2006-525036 A	09/11/2006
		JP 2010-046518 A	04/03/2010
		JP 2010-535597 A	25/11/2010
		JP 2012-502696 A	02/02/2012
		JP 2012-502913 A	02/02/2012
		JP 2014-237025 A	18/12/2014
		JP 4361081 B2	11/11/2009
		JP 4361082 B2	11/11/2009
		JP 4361083 B2	11/11/2009
		JP 4435149 B2	17/03/2010
		JP 5595270 B2	24/09/2014
		US 2004-0167499 A1	26/08/2004
		US 2004-0167500 A1	26/08/2004
		US 2004-0167501 A1	26/08/2004
		US 2004-0167502 A1	26/08/2004
		US 2004-0167592 A1	26/08/2004
		US 2004-0176823 A1	09/09/2004
		US 2006-0009749 A1	12/01/2006
		US 2007-0032847 A1	08/02/2007
		US 2008-0027518 A1	31/01/2008
		US 2009-0043294 A1	12/02/2009
		US 2009-0125006 A1	14/05/2009
		US 2009-0204109 A1	13/08/2009
		US 2010-0196343 A1	05/08/2010
		US 2014-0155876 A1	05/06/2014
		US 2014-0171929 A1	19/06/2014
		US 2014-0236265 A1	21/08/2014
		US 7118563 B2	10/10/2006
		US 7250045 B2	31/07/2007
		US 7413567 B2	19/08/2008
		US 7452356 B2	18/11/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/034396

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 7981111 B2	19/07/2011
		US 8551104 B2	08/10/2013
		US 8709003 B2	29/04/2014
		US 8777935 B2	15/07/2014
		WO 2004-075718 A2	10/09/2004
		WO 2004-075718 A3	21/07/2005
		WO 2004-075721 A2	10/09/2004
		WO 2004-075721 A3	23/06/2005
		WO 2004-075731 A2	10/09/2004
		WO 2004-075731 A3	10/11/2005
		WO 2004-075976 A2	10/09/2004
		WO 2004-075976 A3	29/12/2004
		WO 2004-077020 A2	10/09/2004
		WO 2004-077020 A3	01/09/2005
		WO 2004-078034 A2	16/09/2004
		WO 2004-078034 A3	28/10/2004
		WO 2004-080279 A2	23/09/2004
		WO 2004-080279 A3	01/02/2007
		WO 2009-021225 A1	12/02/2009
		WO 2010-033494 A2	25/03/2010
		WO 2010-033494 A3	12/08/2010
		WO 2010-033630 A1	25/03/2010
WO 2014-144923 A1	18/09/2014	CA 2906787 A1	18/09/2014
		EP 2968883 A1	20/01/2016
		JP 2016-521999 A	28/07/2016
		KR 10-2015-0135335 A	02/12/2015
		US 2014-0276247 A1	18/09/2014
		US 2014-0276248 A1	18/09/2014
		US 2017-0100585 A1	13/04/2017
		US 9061128 B2	23/06/2015
		US 9561357 B2	07/02/2017
EP 1263465 B1	30/05/2012	EP 1263465 A2	11/12/2002
		JP 2003-531828 A	28/10/2003
		US 2002-0091424 A1	11/07/2002
		US 2002-0183808 A1	05/12/2002
		US 6251127 B1	26/06/2001
		US 7229447 B1	12/06/2007
		US 8187278 B2	29/05/2012
		US 8267982 B2	18/09/2012
		WO 01-62289 A2	30/08/2001
		WO 01-62289 A3	02/05/2002
US 2011-0224598 A1	15/09/2011	US 2009-0112192 A1	30/04/2009
		US 2009-0247932 A1	01/10/2009
		US 2013-0274834 A1	17/10/2013
		WO 2007-118303 A2	25/10/2007