
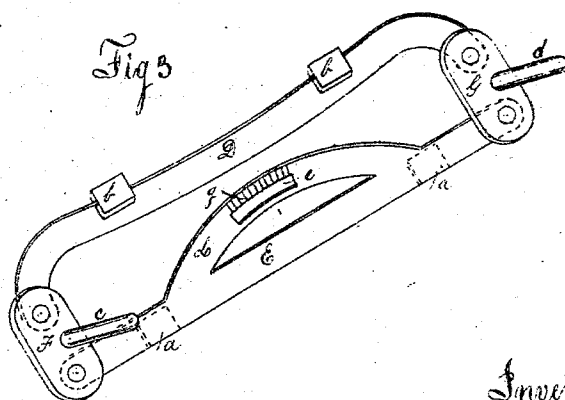
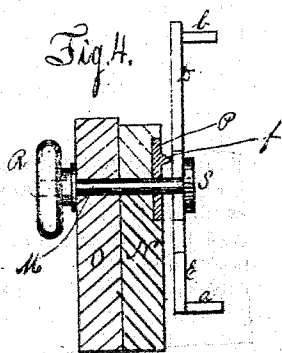
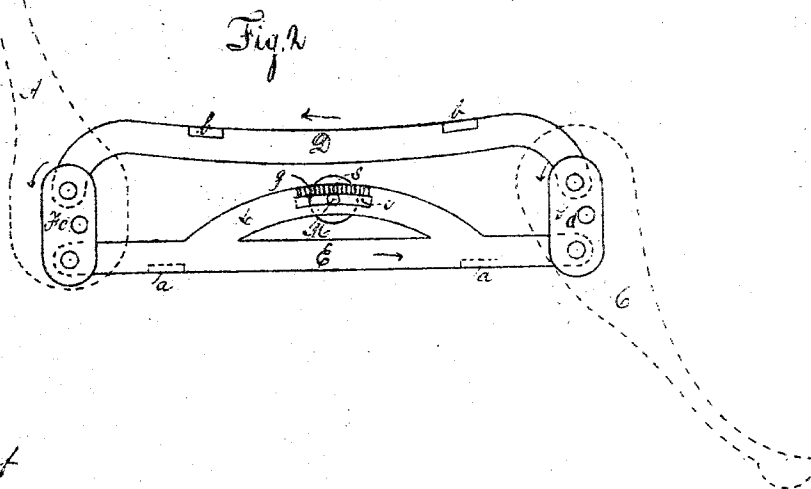


William Donoghue's Reclining Chair

117056

PATENTED JUL. 18 1871

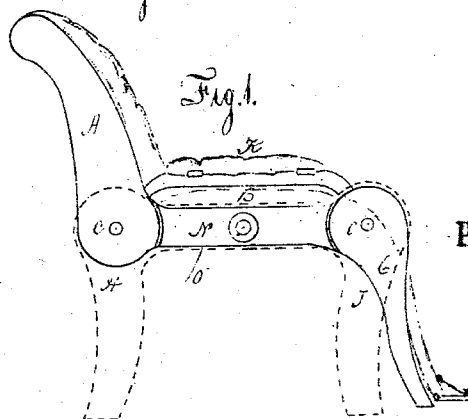

Witnesses
Chas. McCall
J. M. Mills

Inventor
William Donoghue
By Francis D. Carterius
his Attorney in fact.

UNITED STATES PATENT OFFICE.

WILLIAM DONOGHUE, OF PHILADELPHIA, PENNSYLVANIA.

IMPROVEMENT IN RECLINING-CHAIRS.

Specification forming part of Letters Patent No. 117,056, dated July 18, 1871.

To all whom it may concern:

Be it known that I, WILLIAM DONOGHUE, of the city and county of Philadelphia and State of Pennsylvania, have invented an Improved Reclining-Chair, of which the following is a description:

The invention consists of a reclining-chair in which the back, seat, arms, and fly-legs or front have a simultaneous movement, and can be fixed and adjusted at any required angle. It is designed, generally, for office purposes, and can be used as a reclining-chair or lounge.

Figure 1 is a side view, the frame being shown in dotted lines. Fig. 2 is a side view of the mechanism for operating the back, seat, arms, and front or fly-leg. Fig. 3 is a perspective view of the same. Fig. 4 is a transverse section.

The mechanism for operating the back A, seat B, and the front or fly-leg C, Fig. 1, as shown at Figs. 2 and 3, consists of the upper and lower horizontal connecting-bars D and E, and the links F and G. The back links F are let into the inner side of the frames of the back A of the chair, the front links G are let into the inner side of the frames of the front or fly-leg C, the seat B is fixed to and rests upon the lugs or projections *a* of the lower connecting-bar E, and the arms of the chair are fixed to and rest upon the lugs *b* of the upper connecting-bars. The mechanism on both sides of the chair is identical. The links F and G vibrate on the pins *c* and *d*, which pass through the front and back legs H and J of the chair, shown in dotted lines, Fig. 1. If pressure be applied in the direction of the arrow to the back A of the chair, (dotted lines, Fig. 2,) in reclining it turns the back link in the same direction and causes the upper and lower connecting-bars D and E to move horizontally in opposite directions, and the front links G to have a simulta-

neous vibration with the back links. The front or fly-legs C being connected to the front links, move, therefore, at the same time with the back A. The seat B being attached to the lower connecting-bars, and the arms K to the upper connecting-bar move horizontally, and accommodate to the positions of the back and front or fly-legs. L is a slotted arch, which forms part of the lower connecting-bar. An adjusting holding-bolt, M, Fig. 4, passes through the slot *e*, the connecting-piece N, and the horizontal part O of the frame of the chair. A metal piece, P, is let into the connecting-piece N of the back and front or fly-legs, so that when the reclining parts of the chair are set at any required angle they can be fixed and held in place by screwing the nut R until the head S of the bolt M forces the point or projection *f* of the plate P and the serrations *g* of the arch in contact. The slot *e* of the arch is made of sufficient length to accommodate the movement of the lower connecting-bar E. This holding hold-bolt and arch can be applied to the mechanism on either or both sides of the chair.

What I claim as my invention, and desire to secure by Letters Patent, is—

A reclining-chair, composed of the back A, seat B, fly-leg C, upper and lower horizontal bars D E, and the slotted arch L and adjusting-bolt M, the vertical links F G with their pins *c d*, the whole constructed, arranged, and operated substantially as shown and described.

In testimony whereof I hereunto sign my name to this specification in presence of two subscribing witnesses.

WILLIAM DONOGHUE.

Witnesses:

FRANCIS D. PASTORIUS,
JOHN YILLE.