



(51) International Patent Classification:  
**H05B 37/02** (2006.01)

(21) International Application Number:  
PCT/US2010/028250

(22) International Filing Date:  
23 March 2010 (23.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
12/426,545 20 April 2009 (20.04.2009) US

(71) Applicant (for all designated States except US): **LSI INDUSTRIES, INC.** [US/US]; 10000 Alliance Road, Cincinnati, OH 45242 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JALBOUT, Bas-sam, D.** [CA/CA]; 260 Strathcona, Mont-Royal, Québec H2V 1B1 (CA). **WONG, Brian** [CA/CA]; 27 Shediac, Kirkland, Québec H9J 2J8 (CA).

(74) Agent: **LENO, Matthew**; McDermott Will & Emery LLC, 28 State Street, Boston, MA 02109 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: LIGHTING TECHNIQUES FOR WIRELESSLY CONTROLLING LIGHTING ELEMENTS

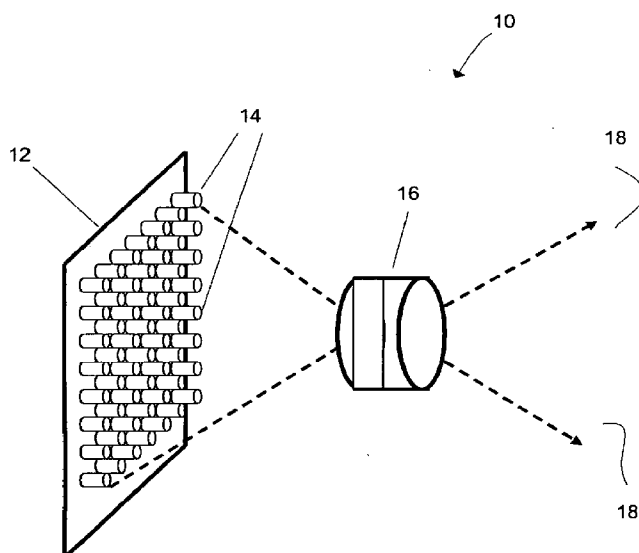


Fig. 1

(57) Abstract: Disclosed are lighting techniques, including systems, apparatus, and methods, that employ optical transmission of two-dimensional control signals to manipulate lighting elements. The lighting apparatus can include a projector with an IR LED array to wirelessly transmit pixel information onto a target space. The pixel information controls lighting elements within the target space. The two-dimensional control signals can include subareas corresponding to lighting elements in a control array. The lighting elements can be lights of desired wavelengths including infrared and/or visible wavelengths. LEDs can be used as light sources in exemplary embodiments.



- 
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))* — *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

**Published:**

- *with international search report (Art. 21(3))*

# **LIGHTING TECHNIQUES FOR WIRELESSLY CONTROLLING LIGHTING ELEMENTS**

## **FIELD OF THE DISCLOSURE**

**[0001]** The present disclosure relates to lighting control apparatus and related methods. More specifically, lighting control apparatus can use and transmit wireless control signals to manipulate and control remote lighting elements.

## **BACKGROUND OF THE DISCLOSURE**

**[0002]** Control of lighting elements, such as light bulbs and light emitting diodes (LEDs) has always been an important factor in lighting design. Quick and efficient manipulation of lighting elements is desirable in any lighting implementation. Current methods of controlling lighting elements include hardwiring controls to individual lighting elements.

**[0003]** Another design concern with nearly all lighting apparatus is controlling lighting behavior. When lighting elements serve various functions, such as emitting colorful lights, intermittent timing sequences, or otherwise, a designer can develop a scheme for controlling these optical characteristics. Again, current methods include hardwiring controls to each lighting element for managing optical characteristics.

**[0004]** One design concern with most lighting apparatuses is power consumption and control. Designers are increasingly turning to alternative designs to control power usage of lighting elements, which ultimately aids consumers in lowering operating costs. For example, one design alternative is to implement an automatic light switch which turns off after periods of inactivity triggered a motion sensor. Similarly, remotely controlling lighting elements is another way of turning lighting elements on and off.

[0005] Another concern a designer may face is mobility of lighting elements within a space. In certain applications, lighting elements are not stationary and the system requires controlling optical characteristics of lighting elements which are mobile. If a lighting system is used to light different areas in a space, optimal system operation can require that lighting elements within the system be mobile while maintaining control of their optical characteristics. For example, in stage lighting, light distribution is manipulated routinely such that lighting elements must be moved while maintaining control of their optical characteristics.

[0006] Given these considerations, efficient wireless control of lighting elements and their optical characteristics is desirable. Systems and methods that aid in reducing power consumption through controlling lighting elements are desirable. High-speed, efficient wireless control of lighting elements is an attractive feature in certain lighting implementations that require remote control of the optical behavior of lighting elements. Moreover, wireless control of mobile lighting elements is also a desirable feature of lighting apparatus and methods to permit users to easily manipulate light distribution in spaces to be illuminated.

## SUMMARY

[0007] The present disclosure pertains to lighting apparatus providing wireless control of lighting elements. More specifically, the present disclosure describes projector systems for transmitting and a module for receiving optical control signals to manipulate lighting elements on the module. The projector can transmit a two-dimensional control signal onto a target space to control lighting elements within that target space.

[0008] In one embodiment, the projector system can time multiplex transmission of a control image to serially transmit a two-dimensional control image onto and through one or more target spaces. The projector system can include an array of infrared (IR) light emitting diodes (LEDs) to optically transmit a two-dimensional

control image. The projector system can also include one or more simple lenses to magnify and direct a control image.

[0009] In an embodiment, a module for receiving optical control signals can receive infrared signals. In alternate embodiments, lighting elements controlled by a module for receiving optical control signals can include LEDs.

[0010] It should be understood that while certain embodiments/aspects are described herein, other embodiments/aspects according to the present disclosure will become readily apparent to those skilled in the art from the following detailed description, wherein exemplary embodiments are shown and described by way of illustration. The techniques are capable of other and different embodiments, and details of such are capable of modification in various other respects. Accordingly, the drawings and detailed description are to be regarded as illustrative in nature and not as restrictive.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

[0011] Aspects and embodiments of the present disclosure may be more fully understood from the following description when read together with the accompanying drawings, which are to be regarded as illustrative in nature, and not as limiting. The drawings are not necessarily to scale, emphasis instead being placed on the principles of the disclosure. In the drawings:

[0012] Figure 1 shows an embodiment of a wireless signal projector;

[0013] Figure 2 shows a flow chart demonstrating one method of converting an image to a control signal image;

[0014] Figure 3 shows an embodiment of a reactive module;

[0015] Figure 4 represents a flow chart of one method of controlling lighting elements on a reactive module;

[0016] Figure 5 depicts an embodiment of a lighting apparatus, in accordance with an exemplary embodiment of the present disclosure;

[0017] Figure 6 depicts an alternate view of the embodiment of Figure 5; and

[0018] Figures 7 through 14 demonstrate different applications of reactive lighting modules, in accordance with the present disclosure.

[0019] While certain embodiments depicted in the drawings, one skilled in the art will appreciate that the embodiments depicted are illustrative and that variations of those shown, as well as other embodiments described herein, may be envisioned and practiced within the scope of the present disclosure.

## **DETAILED DESCRIPTION**

[0020] The present disclosure is generally directed to methods and apparatus for wireless control of lighting elements. More specifically, lighting apparatus and methods are disclosed which employ a projector to wirelessly transmit control signals as one or more projected images over or through a space encompassing reactive modules (receivers) that include lighting elements. By sending control signals wirelessly by such techniques, lighting elements can be manipulated remotely, quickly, and efficiently. Further, the lighting elements can be controlled based on their location, not based on their identity. The disclosed techniques can include a projector to wirelessly transmit control signals and one or more reactive modules to receive those commands.

[0021] Generally, one embodiment of this disclosure contemplates wireless control of any lighting element using a two-dimensional projected image of control signals. As further described below, a pixel-like section of the projected image can represent a different control signal transmitted to or over a target space encompassing one or more reactive modules. In exemplary embodiments, a projector is used to project a two-dimensional control image on or through a three-dimensional space or volume for reception by reactive modules. The projector can include multiple light

sources or elements that are configured in an array of desired shape to optically transmit a two-dimensional control image. Because the projector can utilize multiple light sources, the projected control image can include sub-images, where each sub-image corresponds to a light source. Through control (e.g., modulation) of the individual light sources/elements in the array, the sub-images act like pixels of the projected control image.

**[0022]** As described in further detail below, the projected image can be used to effectively transmit control signals to reactive modules (which include lighting elements) that are within the space or volume over which the control image is projected, e.g., area of a concert audience, auditorium, etc. Thus, reactive modules encompassed within a target space upon which a sub-image is projected are controlled by the received control signals included in the sub-image. In such embodiments, lighting elements are controlled not by their individual modules, but rather by their location relative to the projected control image and its included images of each light source/element (“pixels”) within the projector. For example, at a concert, lighting elements on reactive modules worn by individual audience members can be controlled such that the audience as a whole can be used to display an image or pattern.

**[0023]** Referring now to Figure 1, an embodiment of a projector 10 for use in practicing the disclosed lighting apparatus is represented. The projector 10 includes a circuit board 12, an array of infrared (IR) LEDs 14, and a lens system 16 to project a control signal image 18. The projector 10 provides an optical control image to be projected onto a target space/area. This optical control image is represented by each of the individual IR LEDs as arranged in the array. One or more IR LEDs can act like a “pixel” within the control image and can transmit a control signal to control a receiver. In one embodiment, the control signal of each pixel is pulse encoded, e.g. by suitable pulse width modulation techniques, as discussed below in further detail. As the projector may be required to cover a different size area for different applications, e.g., at different concerts, a selection of projector lenses of varying focal length may be used; a zoom optic can also be used. In some embodiments, an IR-

sensitive video camera (or other IR viewing device) can be used to monitor/view the area illuminated by the projector. Various embodiments of the present disclosure can utilize IR wavelengths between roughly about 750 nm and 1 micron, though other wavelengths may be used within the scope of the present disclosure, including for example medium and long-wave infrared and/or visible light. Exemplary embodiments of the present disclosure can use IR LEDs operational with a peak output wavelength of about 850 nm or about 940 nm.

**[0024]** In an embodiment using IR LEDs for wireless transmission, each IR LED in the array 14 is driven by individual driver circuitry, such that each IR LED 14 can emit a signal independent and unique from the other IR LEDs in the array 14. Contemplated embodiments permit simultaneous transmission of different control signals at each IR LED, or “pixel”. Alternatively, each IR LED in the array 14 can serially transmit control signals, such that a control signal is driven through an IR LED in its own time slot, i.e., in a time-multiplexed manner. For example, in a time-multiplexed embodiment, the control image can be streamed through the IR LED array 14 one pixel at a time, in predetermined time slots. One benefit of this embodiment is to reduce the transmitted signal to noise ratio: if all IR LEDs were transmitting at the same time, the overall optical glare would decrease the signal to noise ratio very considerably. In a time-multiplexed example, in the case of 40 x 50 “pixels,” 2000 time slots would be required. If the image were to be refreshed at a rate of 10 Hz, then each time slot would have a length of  $1/2000 \times 100 \text{ ms} = 50 \text{ } \mu\text{s}$ . Further, in this example, if each pixel control signal is a bit-encoded pulsed data stream and the pulsed data stream is encoded in 10 bit ASCII format, then the bit rate would have to be slightly higher than 5  $\mu\text{s}$ . A 1  $\mu\text{s}$  pulse rate would thus allow for five times oversampling for each frame in this example.

**[0025]** In an embodiment using IR as a mode of wireless transmission, the control image is created by one or more LED driver circuits and one or more IR LEDs. In one non-limiting example, these IR LEDs may be Sharp infrared emitting diodes or



LG Electronics. The IR LEDs 14 may be directly mounted onto a printed circuit board (PCB) 12.

**[0026]** The produced control image is transmitted through lens system 16. In conjunction with or alternative to such a lens system 16 or combination of lenses, other suitable optical elements such as mirrors may be used for projection of the control image. The lens system 16 may include one or more lenses to efficiently direct, project, and/or magnify the control image onto a space encompassing the reactive modules. In an exemplary embodiment, the lens system 16 can include standard commercially available lenses, e.g., as supplied by Pentax or Minolta, configured to magnify the image of the light source (e.g., LED) array. The projected image can also be collimated as desired. Since the projector may be required to cover different areas, various lenses can be applied to vary focal length, magnification, or other adjustment. In this manner, the control image can be projected onto or through a target space. The projector lens system can, for exemplary embodiments, be any simple lens with a positive (+) diopter value. The lens system can be a simple magnifying glass (one uncoated lens of double convex or plano-convex configuration). Use of a lens that produces a blur effect on the control image, which effect can serve to fill in areas between pixels of the projected image.

**[0027]** Referring now to Figure 2, flow chart 20 represents one method of generating an image to be sent to be displayed on a target space. First, the operator of the lighting apparatus selects an image 22 for projection onto the space. For example, this image 22 can be a snapshot of a video, such as from a television, video camera, DVD player, or Blu-Ray player. The image could also be a photo or any pattern. Thus, any frame, pattern, photo, other image, or sequences thereof (e.g. video) can be “projected” on to a space by playing it through the reactive modules, which are described below in further detail.

**[0028]** Next, the image 22 is digitized 24 into pixel information. This digitization can be accomplished using a PC video card to produce a digital image of predetermined or desired resolution. This pixel information describes the features and

characteristics of the corresponding pixel of the image 22, such as color, brightness, intensity, or otherwise. The pixel information is then encoded 26 into a control signal image for projection. A CPU can perform such encoding. In one embodiment, the encoding process may be achieved by transmitting the bit information as a stream of pulses. In an example of a 40 x 50 pixel image, 2000 data elements would be created and each element could be encoded as 8-bit ASCII characters.

**[0029]** The control signals, each of which correspond to pixels in the original image 22, collectively constitute the control image to be projected onto or through a target space. In exemplary embodiments, the image 22 can be digitized to have a pixel resolution that matches (or nearly matches) the number of lighting elements in the projector array, e.g., the array of infrared (IR) LEDs 14 depicted in FIG. 1.

**[0030]** Each control signal can then be transmitted 28 to its corresponding IR LED in the IR LED array 14. As shown in the flow chart 20, this transmission can occur through clocking 28 each control signal to the appropriate driver circuitry for each IR LED in the array 14.

**[0031]** Figure 3 shows one exemplary reactive module 30. This reactive module 30 is comprised of detectors 32, computing units 34, lighting elements 36, and a power source 38. In one embodiment, a projected image 18 is wirelessly transmitted onto a target space encompassing reactive modules 30, where each “pixel” of the projected image 18 defines an area within the space to display the corresponding pixel of the original image 22. Thus, the projected image dictates a reactive module’s 30 behavior. The reactive module 30 receives the control signal transmitted to its area within the target space and subsequently reacts to the command by varying brightness, color, intensity, timing, or other feature or characteristic. If the projected image is transmitted via IR, then the reactive module’s 30 detector 32 can be an IR optical detector 40. An IR optical detector can be constructed by placing an IR filter onto an optical transistor. For mobility, the power source can be battery powered 38.

[0032] This reaction is shown in Figure 4. The detectors 32 on the reactive module 30 detect the control signal, which represents a “pixel” of the projected image 18 and the corresponding original image 22. An IR detector 40 can be coupled to computing units 34 to interpret the received signal. If the wireless signal is bit-encoded as pulsed data, a pulse detector circuit 34, 42 is coupled to the signal detector 32, 40 to detect the rising and/or falling edges of the analog signal. A clock signal may be used to correctly time the detection of these edges. A decoder in the computing unit 34 next receives this digital information and converts 44 that it into an instruction for the lighting element 36. If, for example, the lighting element 36 is one or more LEDs (and their corresponding driver circuitry), then the command is delivered to the LED driver circuitry 46 for the LEDs 48. In this example, the LED driver circuitry drives the LEDs 48 in accordance with the instruction, the projected image 18, and ultimately the original video image 22.

[0033] A reactive module 30 can have multiple detectors 32 to maximize the received signal. With multiple detectors, the signals can be added to provide maximum signal to noise ratio. Also, placing detectors 32 at different angles can aid in receiving the signal in case other detectors 32 do not receive the wireless signal.

[0034] Figures 5 and 6 disclose an embodiment of the lighting apparatus implemented at a concert or event venue. The embodiment includes a projector 10 projecting an optical image 18 onto an audience possessing reactive modules 30. Each IR LED of the IR LED array 14 transmits pixel information through a control signal onto the corresponding area of the audience 51 and the reactive modules 30 therein. In an embodiment, the reactive modules can appear on various articles worn by audience members, such as hats 61.

[0035] Other examples of these articles of clothing or accessories appear in Figures 7-14. The reactive module can be affixed to a hat 61 (e.g., as shown in FIG. 7), a pocket clip 80 for a shirt 82 (e.g., as shown in FIG. 8), and/or necklace 90 (e.g., as shown in FIG. 9), among other things. Reactive modules can be designed for affixation to smaller sized objects, such as a belt 100 (e.g., as shown in FIG. 10),

and/or a tie clip 110 (e.g., as shown in FIG. 11). For small applications, the reactive modules can be designed to with surface mount components. These applications can include glasses 120 (e.g., as shown in FIG. 12), wrist bands and/or watches 130 (e.g., as shown in FIG. 13), and/or bracelets/anklets or necklaces/collars 140 (e.g., as shown in FIG. 14). Using different packaging techniques, virtually any imaginable article can incorporate a reactive module for use in this disclosed apparatus.

**[0036]** The reactive modules 30 can have lighting elements such as LEDs, of any color. In one embodiment, multiple LEDs of different colors, e.g. red, blue, and green, are used in a single reactive module to provide a complete color palette can be reproduced. In exemplary embodiments, contemplated LEDs can include LEDs made commercially available by Osram or Nichia, but other lighting elements are contemplated. These LEDs can be used to produce visible light for the control image and/or desired lighting effects from the reactive modules.

**[0037]** Each reactive module can receive a control signal projected to over or to its location. Accordingly, the same reactive device 22 in a different location would receive a different signal from the projector. The same reactive module may react differently if it moves between pixels. Thus reactive modules 30 in different areas of a target space display different outputs, and the overall target space can be coordinated to display any pattern or image desired.

**[0038]** If the LEDs are in very close proximity in the projector, the image projected onto the target space has only very small or negligible gaps between pixels. The reflections or scattering from the surroundings will fill these gaps. Any reactive module located directly in a seam between two pixels would pick up one signal or the other, and it makes no difference which, as he is located at the cusp of the two pixels and can correctly display either. In an exemplary embodiment, noise received from scattering of control signals can be sufficiently eliminated by filtering the received oversampled data stream, e.g., by filtering so as to remove noise using error-correction algorithms

[0039] To maximize reception of the wireless image, the floor and other surroundings can be painted or coated to reflect the medium of wireless transmission. For example, if IR is the mode of transmission, the floors can be painted with IR reflective paint, which can be formulated into nearly any visible paint.

[0040] In an embodiment employing the disclosed methods and apparatus, audience members of an event or concert can wear one or more reactive modules that each include one or more lighting elements. An optical characteristic of the lighting elements, e.g., brightness, intensity, timing, and other characteristics, can be controlled remotely via a projected control image over a space or volume, where the space and projected image are divided into pixel-like sections. This remote control allows the audience to participate in an event through including the audience in the event's lighting structure, such as manipulating the lighting elements according to sounds. Further, since the operator controls the lighting elements on each reactive module, the audience as a whole can be used to display pictures or video, moving patterns, or any other image. Thus, by controlling the lighting elements by location, and not by their identity, an image or video frame can be "displayed".

[0041] Alternatively, the disclosed apparatus and methods can wirelessly manipulate optical characteristics of lighting elements such as stage lighting. In such circumstances, stage or area lighting can be remotely controlled using a projector, and lighting elements in different areas can be separately governed. Traditionally, individual cables are used to control stage lighting elements. With the disclosed apparatus and methods, however, stage lighting can be wireless controlled using a two-dimensional projected image. The sub-images within the projected image can control the stage lighting elements within the area over which the sub-images are projected. A receiving module can be placed on the stage lighting element to receive and interpret a control signal for controlling the stage lighting element. Thus, implementing the disclosed methods and apparatus, stage lighting or other area lighting can be wireless controlled based on the location of the lighting elements, instead of the lighting elements' identity.

**[0042]** Yet another application of the disclosed apparatus and methods is for use as a video screen. In such an embodiment, the video screen is comprised of several reactive modules which serve as pixels of the screen. Using a projector to project a two-dimensional control image onto the video screen, an image can be displayed on the video screen by controlling the optical characteristics of the lighting elements of the reactive modules within the screen. A benefit of this system is that a dead pixel in the screen, i.e. a reactive module, can simply be replaced with another reactive module, without modifying the rest of the screen.

**[0043]** Although a variety of embodiments are shown and described above, it should be understood that other various modifications can also be made. For example, an LED array can take any shape, and is not necessarily rectangular. Also, the type of wireless communication (optical transmission) to reactive devices can vary. In other embodiments, the pixel information can be encoded in any suitable wireless communication encoding scheme, depending on the lighting apparatus design. This disclosure also contemplates implementing a projector with reflective optical elements in conjunction with or alternatively to refractive optical elements (lenses). Any optical waveguide or other method of wirelessly projecting a control image is contemplated within the scope of the present disclosure.

**[0044]** One skilled in the art will appreciate that embodiments and/or portions of embodiments of the present disclosure can be implemented in/with computer-readable storage media (e.g., hardware, software, firmware, or any combinations of such), and can be distributed and/or practiced over one or more networks. Steps or operations (or portions of such) as described herein, including processing functions to derive, learn, or calculate formula and/or mathematical models utilized and/or produced by the embodiments of the present disclosure, can be processed by one or more suitable processors, e.g., central processing units ("CPUs) implementing suitable code/instructions in any suitable language (machine dependent on machine independent).

**[0045]** Accordingly, the embodiments described herein, and as claimed in the attached claims, are to be considered in all respects as illustrative of the present disclosure and not restrictive.

What is claimed is:

1. An infrared control system for controlling reactive lighting modules, the system comprising:

a projector system configured and arranged to project a two-dimensional control image including an array of sub-images; and

a plurality of reactive modules, each including an optical receiver and one or more lighting elements, wherein each module is configured and arranged to control the one or more lighting elements based on a received portion of the two-dimensional control image.

2. The infrared control system of Claim 1, wherein the projector system time multiplexes transmission of control signals within the control image to serially transmit the two-dimensional control image through a space.

3. The infrared control system of Claim 1, wherein the projector system includes two or more infrared light emitting diodes to optically transmit the two-dimensional control image.

4. The infrared control system of Claim 1, wherein the projector system includes one or more simple lenses.

5. The infrared control system of Claim 1, wherein the optical receiver is an infrared receiver.

6. The infrared control system of Claim 1, wherein the one or more lighting elements include light emitting diodes.

7. The infrared control system of Claim 6, wherein the light emitting diodes emit one or more of blue, red, green, or white visible spectra.



8. The infrared control system of Claim 1, wherein the plurality of reactive modules each further includes a power source.
9. The infrared control system of Claim 8, wherein the power source includes a battery.
10. The infrared control system of Claim 1, wherein the system includes optical paint on portions of the target space to reflect the projected two-dimensional control image.
11. The infrared control system of Claim 1, wherein one or more of the plurality of reactive modules are affixed to an article of clothing or accessory.
12. The infrared control system of Claim 1, wherein one or more of the plurality of reactive modules are stage lighting elements for illuminating a stage.
13. The infrared control system of Claim 1, wherein the plurality of reactive modules are aligned and configured to be a video screen.
14. A method of wireless transmission of a two-dimensional optical control signal to control one or more lighting elements, the method comprising:
  - mapping pixel information of a digital image to a two-dimensional control array of lights; and
  - projecting a two-dimensional control image including an array of sub-images of the lights of the two-dimensional control array.
15. The method of claim 14, wherein the control image is an infrared image.
16. A method of wireless control of area lighting, the method comprising:

projecting a two-dimensional control image including a plurality of sub-images including a control signal onto one or more lighting elements;

receiving at one or more plurality of receiving modules; and

interpreting the sub-image including a control signal in the receiving module for controlling an optical characteristic of the one or more lighting elements.

17. The method of claim 16, wherein the control image is an infrared image.

18. A control system for optical control of lighting elements, the system comprising:

a target space including one or more sub-spaces;

a projector system arranged and configured to project an optical two-dimensional control image onto the target space, where the two-dimensional control image includes at least one sub-image which is projected onto at least one sub-space;

a receiving module arranged and configured to receive and interpret a control signal included in the at least one sub-image; and

a lighting element in communication with the receiving module and with one or more optical characteristics controlled by the control signal.

19. The control system of Claim 18, wherein the projector system time multiplexes transmission of control signals within the control image to serially transmit the two-dimensional control image onto the target space.

20. The control system of Claim 18, wherein the projector system includes two or more infrared light emitting diodes to optically transmit the two-dimensional control image.

21. The control system of Claim 18, wherein the projector system includes one or more simple lenses.
22. The control system of Claim 18, wherein the receiving module includes an infrared receiver.
23. The control system of Claim 18, wherein lighting element includes a light emitting diodes.
24. The control system of Claim 23, wherein the light emitting diode emits blue, red, green, or white visible spectra.
25. The control system of Claim 18, wherein the reactive module includes a power source.
26. The control system of Claim 25, wherein the power source includes a battery.
27. The control system of Claim 18, wherein the system further comprises optical paint on portions of the target space to reflect the projected two-dimensional control image.
28. The control system of Claim 18, wherein the reactive module is affixed to an article of clothing or accessory.
29. The control system of Claim 18, wherein the lighting element is a stage lighting element for illuminating a stage.
30. The control system of Claim 18, wherein the reactive module, with one or more other reactive modules, is aligned and configured to be a video screen.

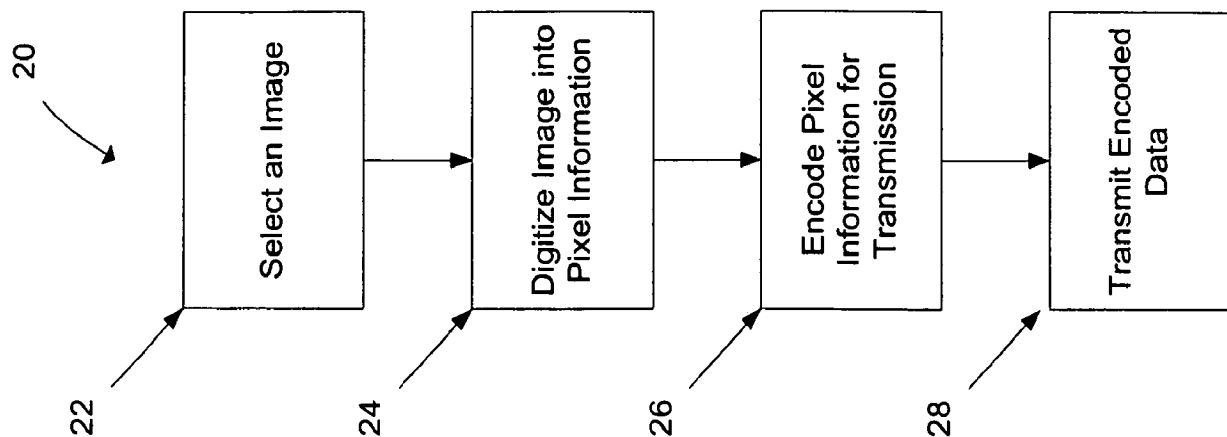


Fig. 2

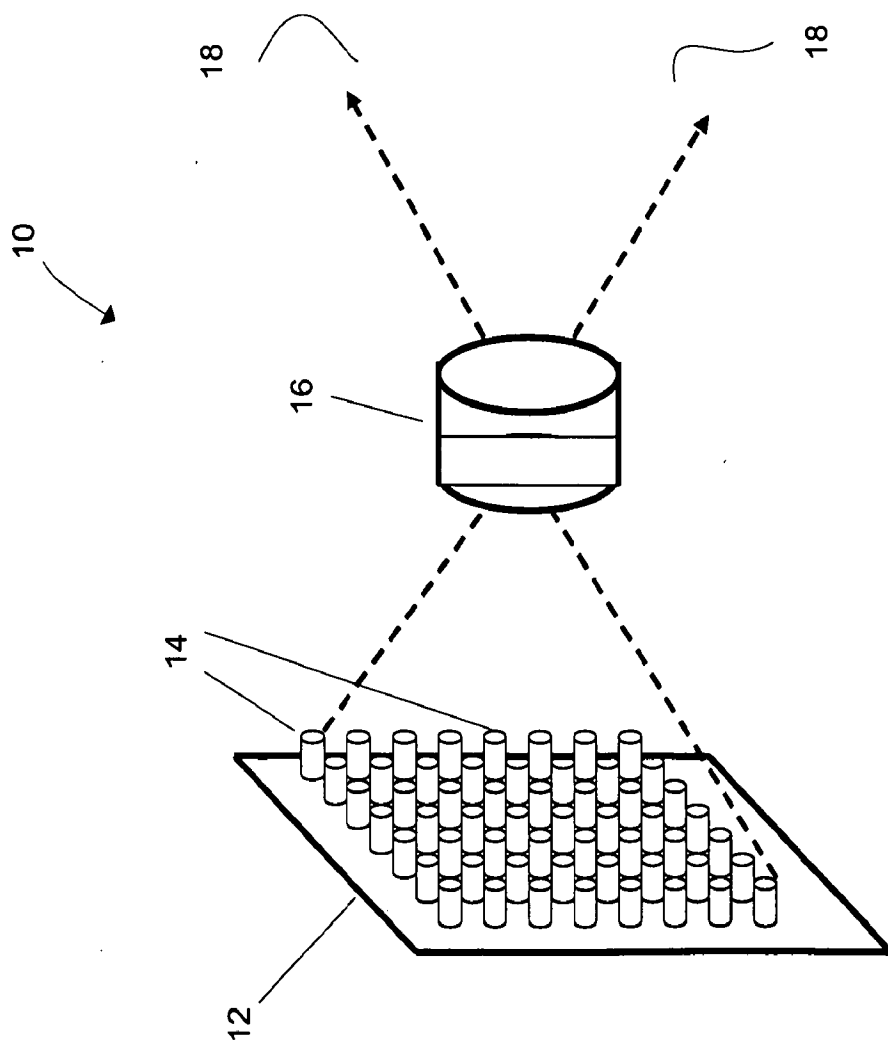


Fig. 1

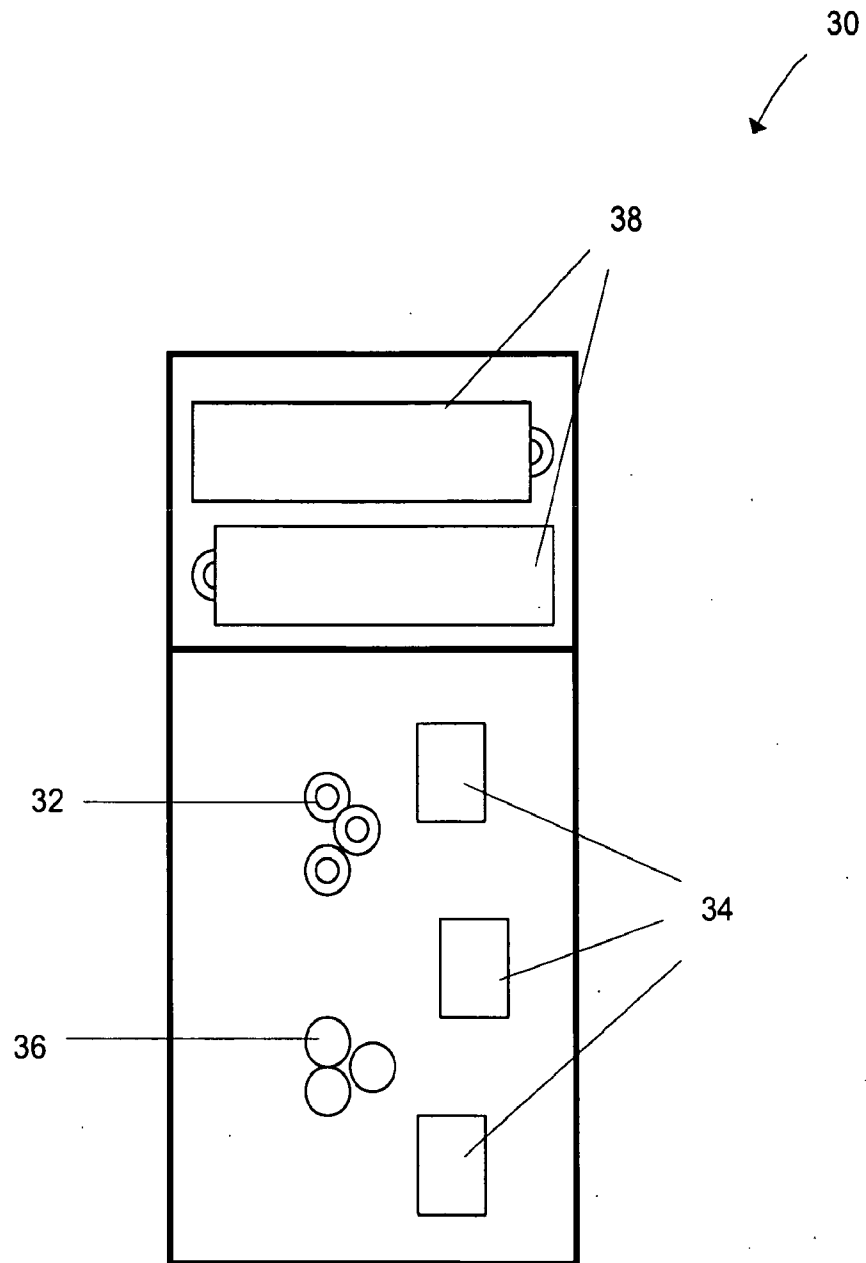


Fig. 3

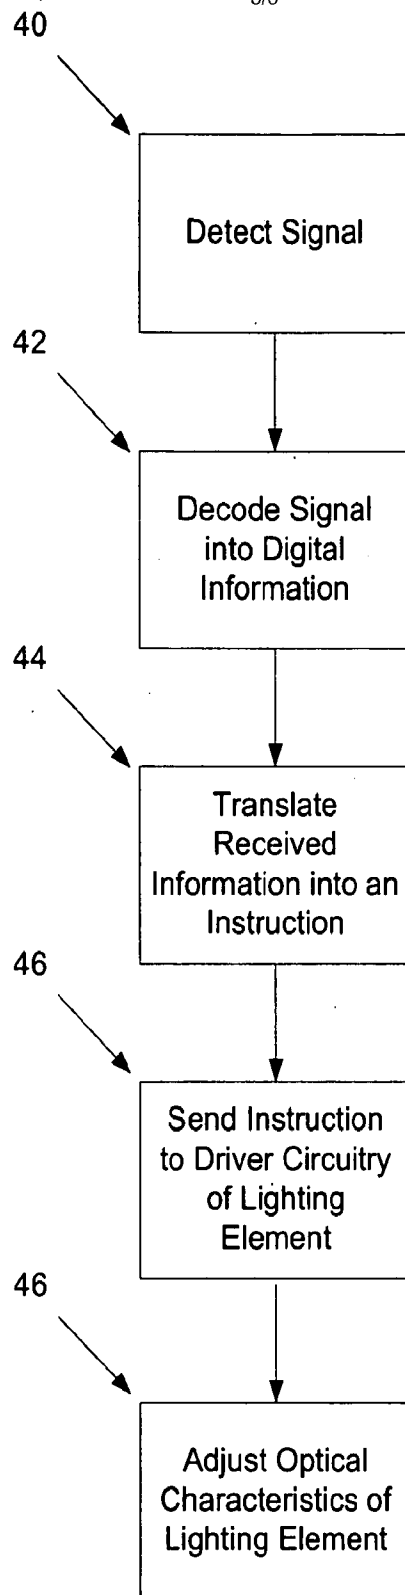


Fig. 4

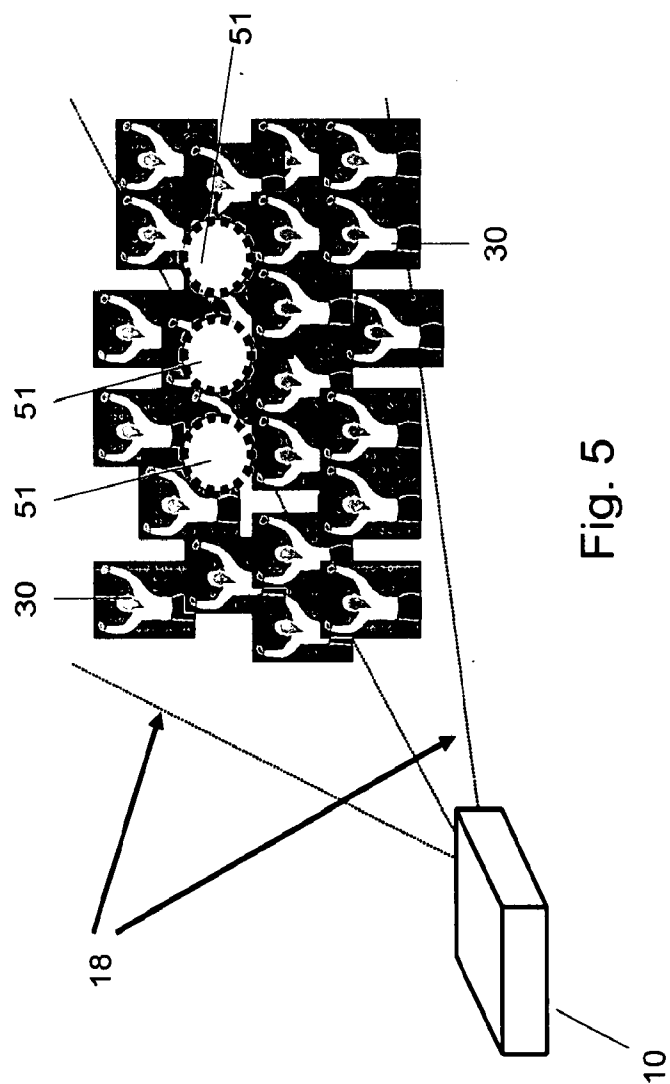


Fig. 5

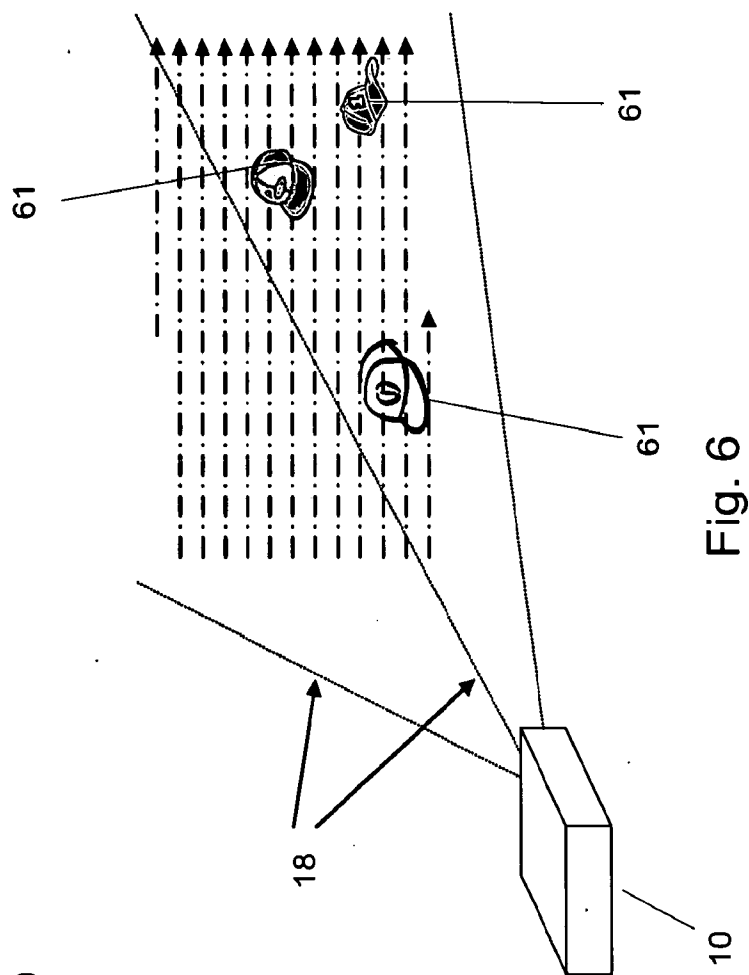


Fig. 6

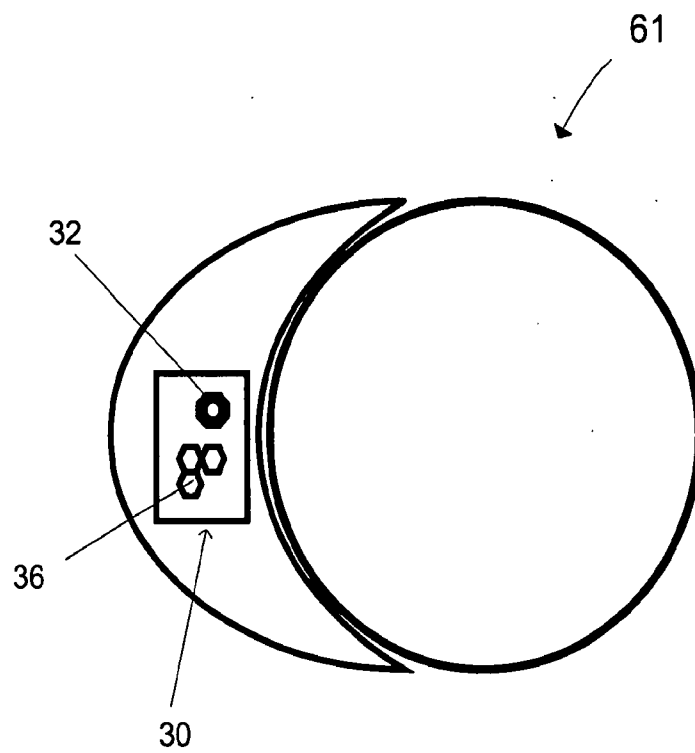


Fig. 7



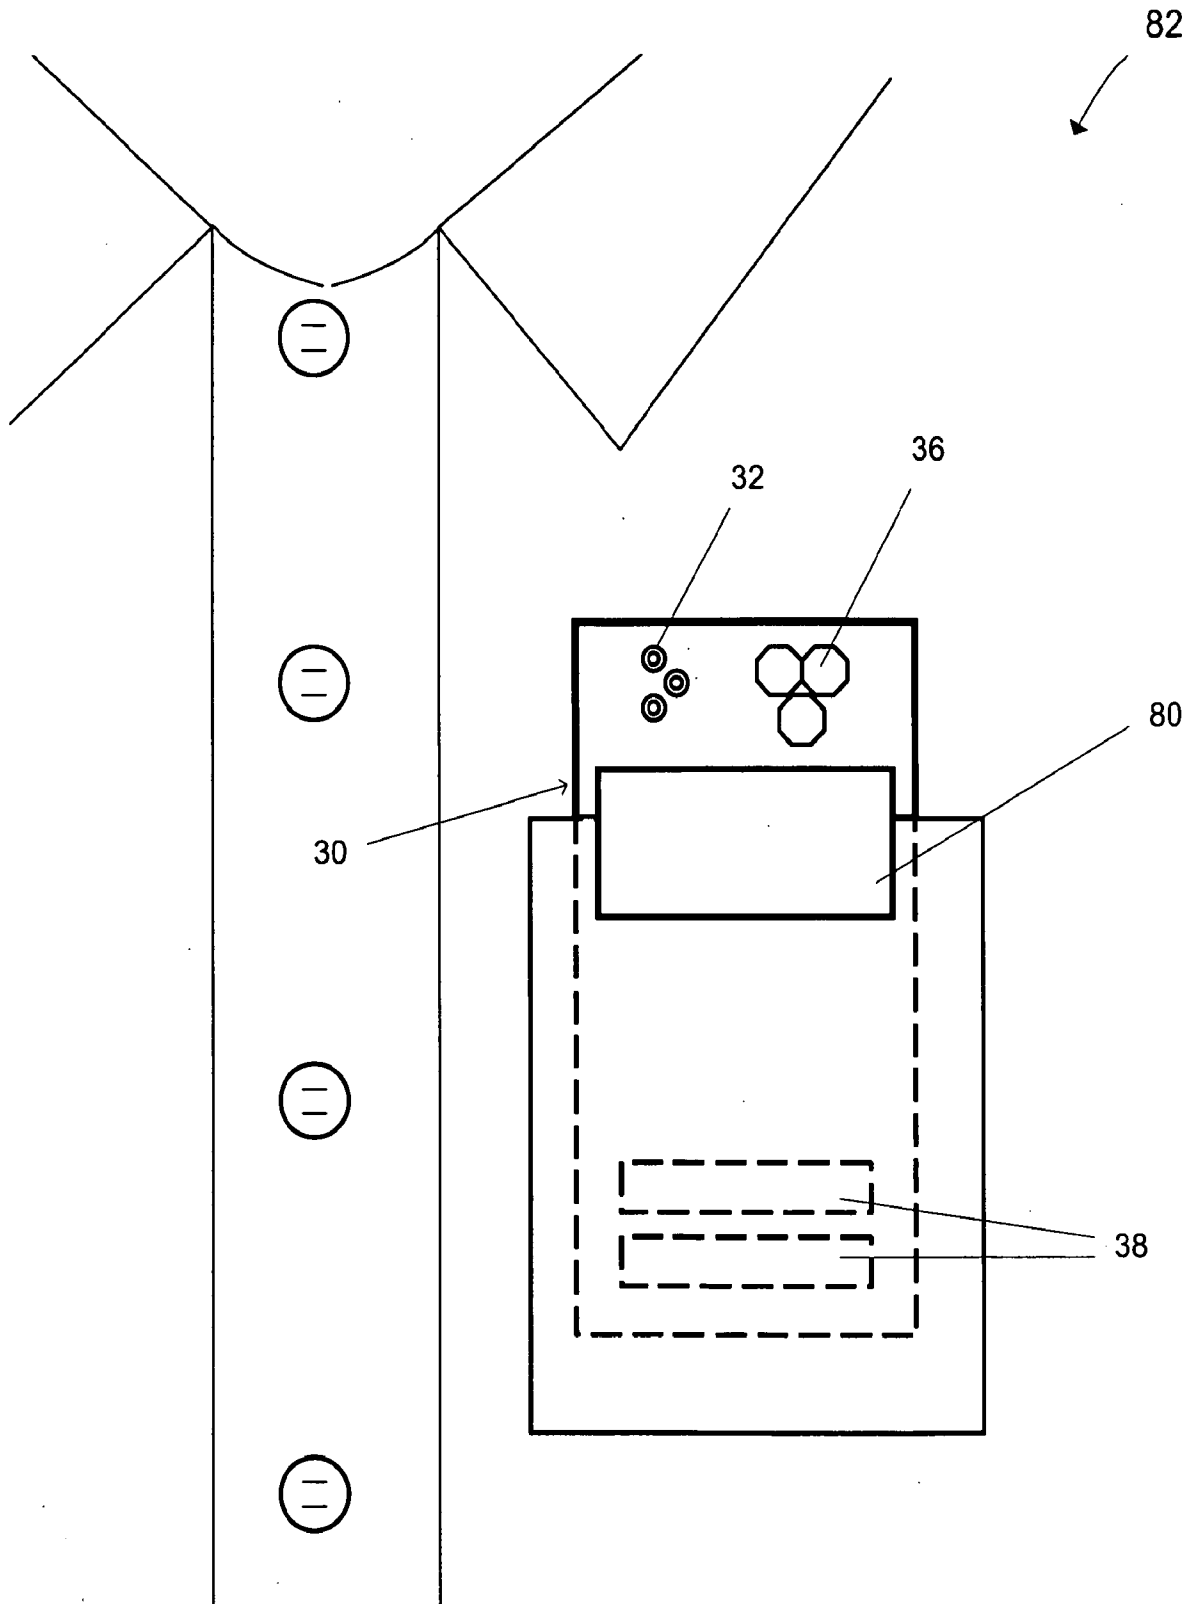


Fig. 8

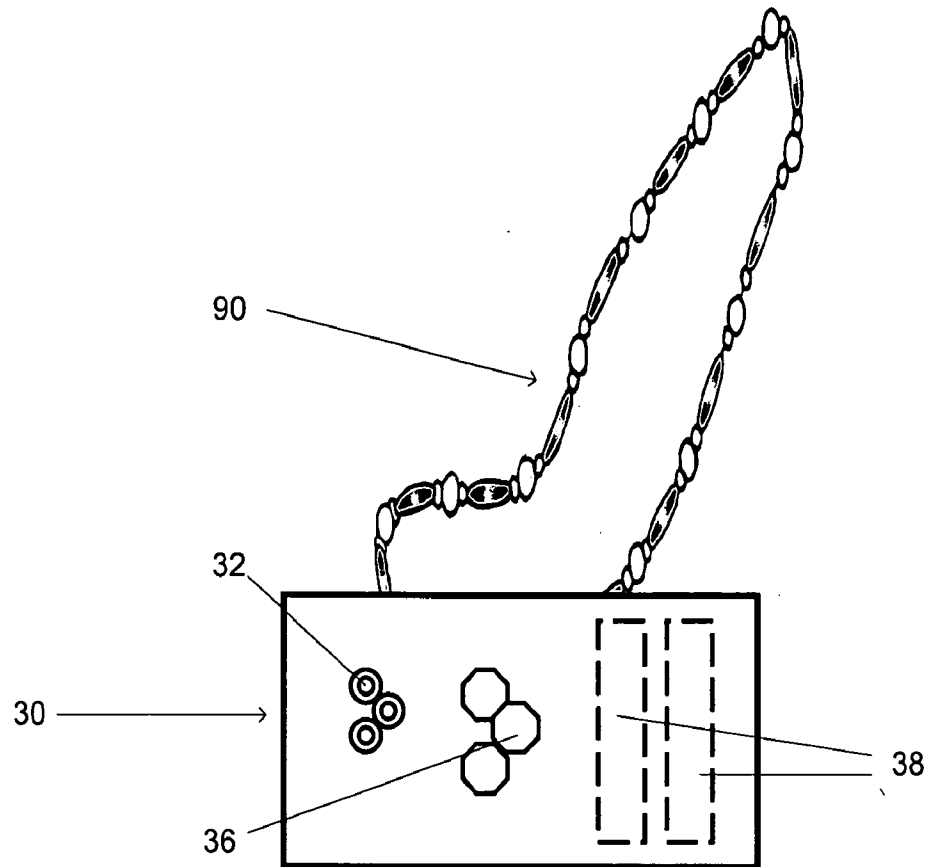


Fig. 9

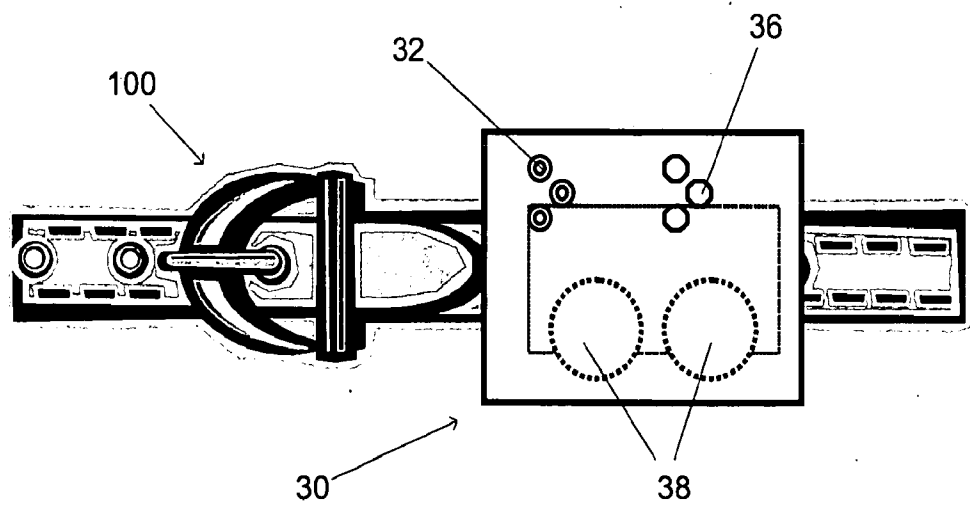


Fig. 10

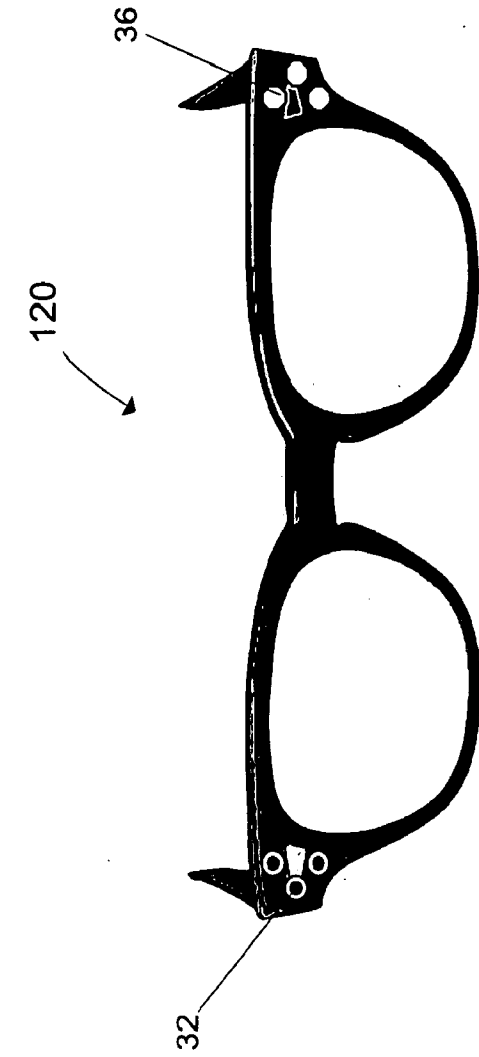


Fig. 11

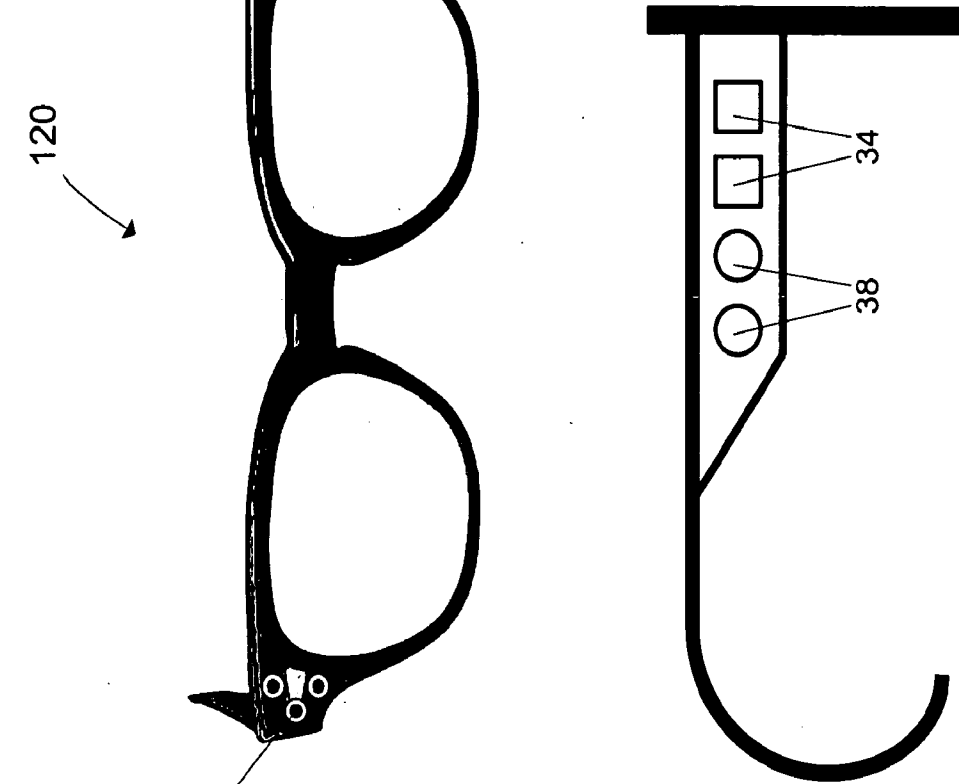


Fig. 12

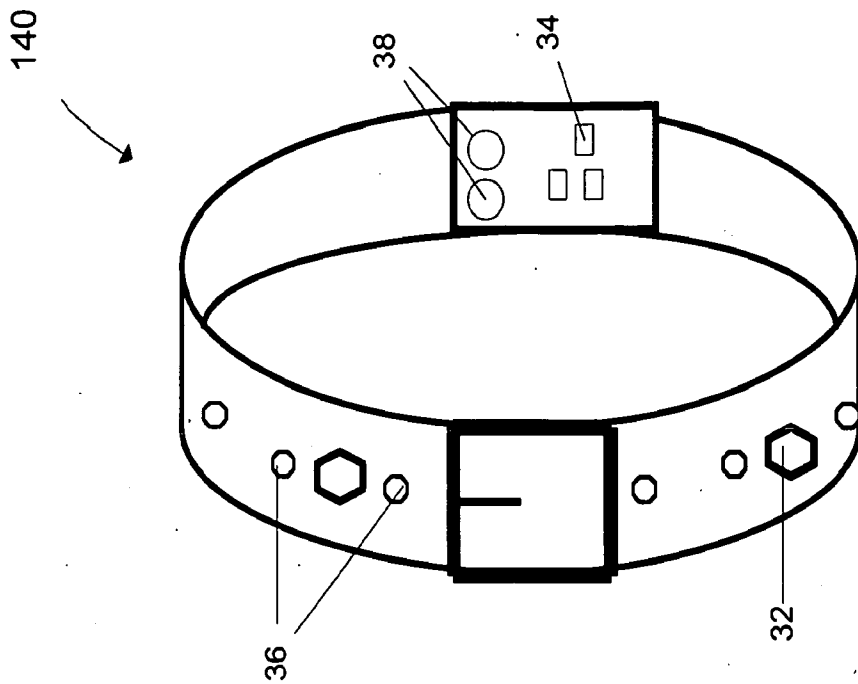


Fig. 14

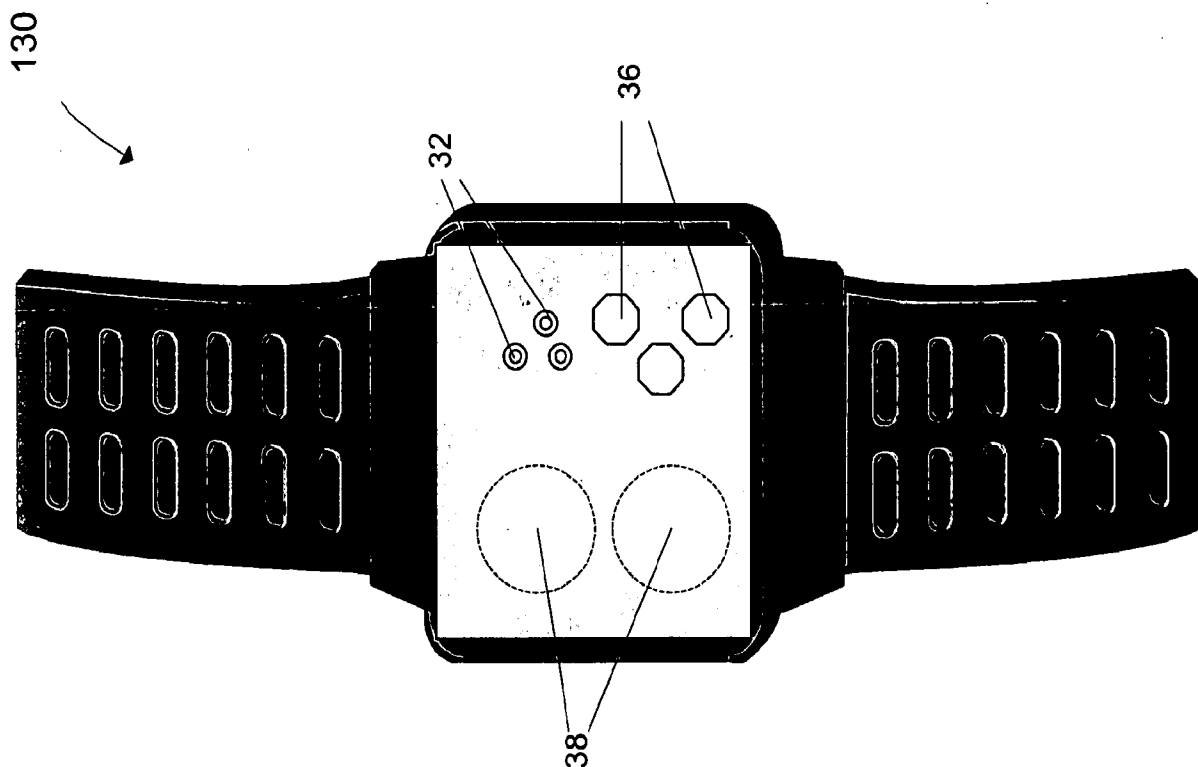


Fig. 13

# INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/028250

## A. CLASSIFICATION OF SUBJECT MATTER

INV. H05B37/02

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/101702 A2 (COLOR KINETICS INC [US]) 19 December 2002 (2002-12-19) page 29, line 29 - page 35, line 2 -----	1-30
A	US 2006/097660 A1 (SCOTT DEBORAH [US] ET AL) 11 May 2006 (2006-05-11) pages 2-3; figures 1,2 -----	1-30
A	WO 2007/004097 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; BERGMAN ANTHONIE H [NL]; BUDZELAA) 11 January 2007 (2007-01-11) pages 6-10; figure 5 -----	1-30



Further documents are listed in the continuation of Box C.



See patent family annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

25 August 2010

Date of mailing of the international search report

31/08/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Morrish, Ian

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/028250

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 02101702	A2	19-12-2002	JP 2004534356 T	11-11-2004
US 2006097660	A1	11-05-2006	NONE	
WO 2007004097	A1	11-01-2007	AT 418257 T	15-01-2009
			CN 101213880 A	02-07-2008
			JP 2008545229 T	11-12-2008
			KR 20080034906 A	22-04-2008
			US 2010045205 A1	25-02-2010