



(22) Date de dépôt/Filing Date: 2004/10/19

(41) Mise à la disp. pub./Open to Public Insp.: 2005/05/03

(45) Date de délivrance/Issue Date: 2008/11/18

(30) Priorité/Priority: 2003/11/03 (US60/516,293)

(51) Cl.Int./Int.Cl. *A63F 9/08* (2006.01)

(72) Inventeurs/Inventors:

COOKE, DOUGLAS E, CA;

COOKE, LOUISE H., CA;

COOKE, GERALD N., CA

(73) Propriétaires/Owners:

COOKE, DOUGLAS E, CA;


COOKE, LOUISE H., CA;

COOKE, GERALD N., CA

(74) Agent: THERIAULT, MARIO D., P.ENG.

(54) Titre : CASSE-TETE CIRCULAIRE A TROIS POSITIONS

(54) Title: THREE-WAY RING PUZZLE

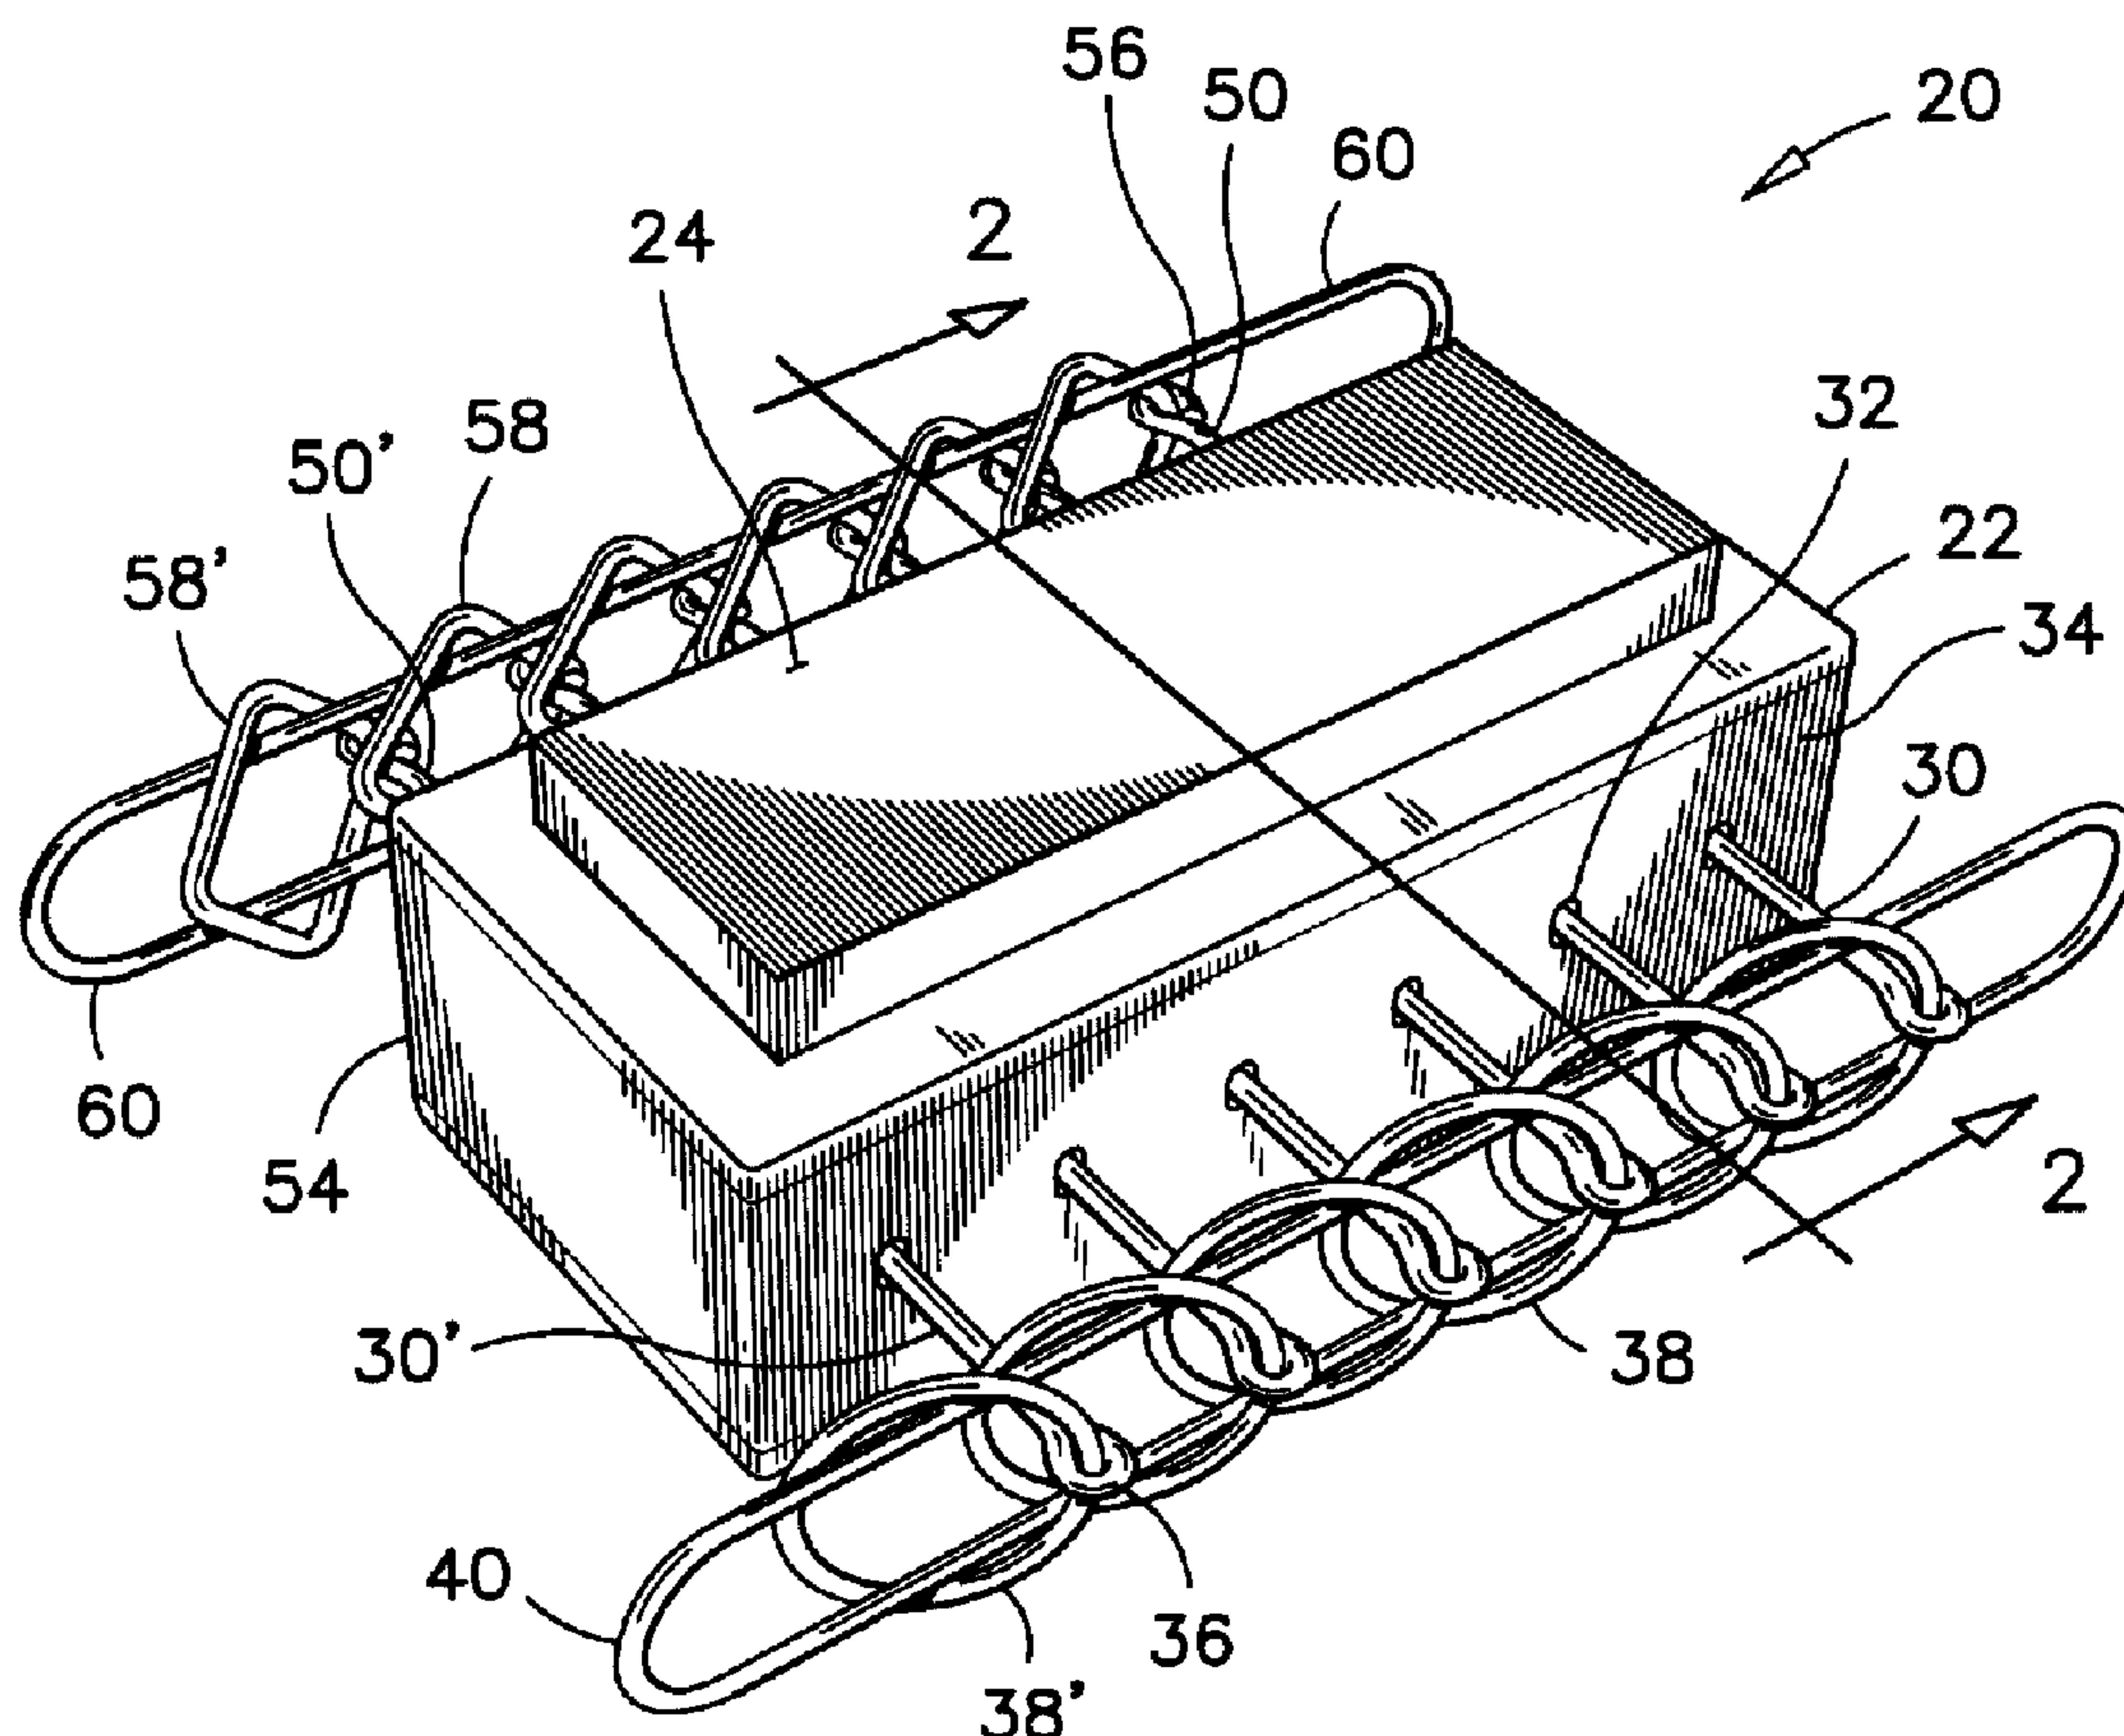

(57) Abrégé/Abstract:

In a first aspect of the invention, the three-way ring puzzle has a rectangular housing with a first and second opposite sides. A first series of stems extends from the first side, and a second series of stems extends from the second side. Each stem has an eyelet on



(57) **Abrégé(suite)/Abstract(continued):**

its extremity outside the housing and a wire loop is loosely mounted in this eyelet. Each of the stems in the first series aligns with and is joined inside the housing to one of the stems in the second series. A first and second elongated wire bands are respectively mounted in the wire loops on the first and the second series of stems. In another aspect of the present invention, the housing has a cylindrical shape, the stems extend diametrically through the housing and each of the elongated wire bands has a curved shape.

TITLE: THREE-WAY RING PUZZLE**ABSTRACT OF THE DISCLOSURE**

In a first aspect of the invention, the three-way ring puzzle has a rectangular housing with a first and second opposite sides. A first series of stems extends from the first side, and a second series of stems extends from the second side. Each stem has an eyelet on its extremity outside the housing and a wire loop is loosely mounted in this eyelet. Each of the stems in the first series aligns with and is joined inside the housing to one of the stems in the second series. A first and second elongated wire bands are respectively mounted in the wire loops on the first and the second series of stems. In another aspect of the present invention, the housing has a cylindrical shape, the stems extend diametrically through the housing and each of the elongated wire bands has a curved shape.

TITLE: THREE-WAY RING PUZZLE**FIELD OF THE INVENTION**

5 This invention pertains to wire ring puzzles, and more particularly, it pertains to a ring puzzle that incorporates three games in one, and which can be played by one player, or by two players at the same time.

BACKGROUND OF THE INVENTION

10 Wire ring puzzle games are known to improve concentration, memory, imagination, ingenuity, determination and coordination of the user, in addition to provide great amusement. Although ring puzzle games belong to an old art, it is believed that there is a renewed interest in these games to develop logic and cleverness in children, and to improve dexterity and mental skills of persons recovering from accidents or illnesses. It is also
15 believed that these ring puzzle games can be used by medical personnel to diagnose various affections and physical conditions, such as finger joint stiffness.

20 The wire ring puzzles that are of interest herein have not changed much during the last generation. These puzzles comprise a series of wire stems mounted along a straight line in a base. An eyelet is formed on the end of each stem, and a wire ring is mounted in that eyelet. Each ring, except the first one in the series encloses an adjacent stem, such that adjacent rings partly overlap each other. An elongated wire band is mounted through all the rings and encloses all the stems. The game consists of removing the
25 wire band from the rings and the stems by doing a series of specific operations, and inserting the wire band back through the rings and around

the stems to complete the game. This game has a moderate level of difficulty, as it can be solved by a majority of people. Moreover, the puzzle is portable and can be turned around to be played with either hand.

5 The ring puzzle game as known from the prior art is basically a solitary game where the player challenges himself/herself to complete the game without help from others. The common ring puzzle game is played by manipulating the wire band with the right hand if the user is right-handed, or with the left hand if the user is left-handed. In other words, there is no provision or stimulus in the prior art games to practice one hand more than
10 the other.

Examples of the ring puzzles of the prior art are as follows;

CA Patent 444,591 issued to G.H. Smith on October 21, 1947;
CA Patent 1,083,623 issued to C. Touchette on Aug. 12, 1980;
US Patent 2,998,253 issued to E.A. Kranzusch on August 29, 1961;
15 **US Patent 3,698,719** issued to L.M. Winslow on October 17, 1972;
US Patent 3,881,732 issued to L.M. Winslow on May 6, 1975;
US Patent 4,000,901 issued to R. Flores on January 4, 1977;
US Patent 4,907,805 issued to D.W. Watkins et al. on March 13, 1990.

Although the prior art ring puzzles and games deserve undeniable merits,
20 it is believed that a need still exists for a new game incorporating different levels of difficulty therein. Also, it is believed that a need still exists to make this game playable by two players at the same time, such as a mother and a child playing together for example. Further, it is believed that there is a need to incorporate in this game a level of difficulty which consists of
25 manipulating the wire band with one's awkward hand.

SUMMARY OF THE INVENTION

In the ring puzzle according to the present invention, however, there are incorporated therein various degrees of difficulty to challenge a larger population group. The ring puzzle has two sides that can be played
5 separately or simultaneously by one player. The two sides can also be played by two opponents, and one of the difficulties incorporated in the puzzle of the present invention consists of playing one side of the puzzle with one's awkward hand.

10 In accordance with one aspect of the present invention, there is provided a three-way ring puzzle, comprising a hollow housing having a first and second opposite sides. A first series of stems extends from the first side, and a second series of stems extends from the second side. Each stem has an eyelet on its extremity outside the housing, and a wire loop is loosely
15 mounted in that eyelet. Each of the stems in the first series aligns with, and is joined inside the housing to one of the stems in the other series. There are also provided, a first and second elongated wire bands respectively mounted in the wire loops on the first and the second series of stems.

20 As mentioned, this ring puzzle can be played by one player, one side at the time or both sides simultaneously. It can also be played by two players competing against each other. Because of the two solitary games plus the social game, the puzzle according to the present invention is referred to herein as a three-way ring puzzle.

25 One degree of difficulty in the game consists of playing with diamond-shaped wire loops on one of the series of stems, and with circular rings on the other series of stems. Because the manipulation of the diamond-shaped

wire loops is different from the manipulation of the circular rings, the solution of the diamond-shaped wire loop side of the puzzle requires more skills than the ring side.

5 In another aspect of the present invention, the first series of stems comprises a first stem and the second series of stems comprises a leading stem. The first stem in the first series of stems is aligned with the leading stem in the second series of stems such that both sides of the puzzle are played in a same direction. When two opponents play the game at the same time, one of the players manipulates one of the wire bands with
10 his/her right hand, while the other player manipulates the other wire band with his/her left hand.

The housing can be rotated end-to-end to reverse the orientation in which the game is played. When the shapes of the wire loops are different on both series of stems, the puzzle can be tilted upside down to change degree
15 of difficulty for each player without changing the hand with which the game is played. It will be appreciated that the housing can be rotated end-to-end and tilted upside down to change both the degree of difficulty and the hand of each player.

The three-way ring puzzle according to the present invention is preferably
20 manufactured with two series of six stems in a first model for sale to the general public. A smaller version having only two series of four stems is believed to be more appropriate for use by preschool children. In this second model, the wire loops have flower-like shapes and different colours. This second model is believed to be advantageous for teaching colours to
25 young children. It is also advantageous for teaching, the right side from the left side, the difference between over and under, and the importance of a

sequence in problem solving. A third model of puzzle having series of three stems is believed to be useful in the medical field to diagnose a patient. For example, a medical professional reading game instructions to a patient manipulating the puzzle can easily monitor finger movement, as well as visual and audition skills or other conditions of that patient.

In accordance with another aspect of the present invention, there is provided a three-way ring puzzle, comprising a hollow cylindrical housing and a series of stems extending diametrically through this housing. The stems have a same length. Each stem has a first and second extremities outside the housing and an eyelet on each of these extremities. A first series of rings is mounted in the eyelets on the first extremities. A second series of rings is mounted in the eyelets on the second extremities. A first curved wire band is mounted through the rings in the first series of rings and encloses the stems near the first extremities of these stems. A second curved wire band is mounted through the rings in the second series of rings and encloses the stems near the second extremities of these stems.

The cylindrical shape of this housing constitutes an additional level of difficulty because the movement of the hand to remove one of the wire bands from the rings is circular as opposed to the linear movement in the prior art puzzles. Furthermore, it is believed that the novelty of the shape of this embodiment of the present invention and its appearance constitutes a level of difficulty and an appealing attribute challenging even those who have mastered the longitudinal puzzles of the prior art.

Still another feature of the three-way ring puzzle according to the present invention is that it is susceptible of a low cost of manufacture with regard to both materials and labour, and which accordingly is then susceptible of

low prices of sale to the consumer, thereby making such three-way ring puzzle economically available to the public.

5 This brief summary has been provided so that the nature of the invention may be understood quickly. A more complete understanding of the invention can be obtained by reference to the following detailed description of the preferred embodiments thereof in connection with the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Two embodiments of the present invention are illustrated in the accompanying drawings, in which like numerals denote like parts throughout the several views, and in which:

FIG. 1 is a perspective side, top and end view of the ring puzzle according to the first preferred embodiment of the present invention;

15 **FIG. 2** is a cross-section view through the ring puzzle of **FIG. 1**, as seen along **line 2-2** in **FIG. 1**;

FIG. 3 is an enlarged partial cross-section view of the coupling joining opposite stems together, as seen in detail **circle 3**, in **FIG. 2**;

20 **FIG. 4** is a side view of the ring puzzle according to the first preferred embodiment, showing various loop shapes to make different game variants;

FIG. 5 illustrates a second preferred embodiment of the present invention wherein the housing thereof has a cylindrical configuration, and the stems thereof are mounted diametrically through the housing;

5 **FIG. 6** is a top view of one of the double-ended stems used in the wire puzzle according to the second preferred embodiment;

FIG. 7 is a side view of one of the double-ended stems used in the wire puzzle according to the second preferred embodiment;

10 **FIG. 8** is a side view of a stem with bulges thereon to provide an additional level of difficulty in playing the game with either embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 While this invention is susceptible of embodiments in many different forms, there are shown in the drawings and will be described in details herein two specific embodiments, with the understanding that the present disclosure is to be considered as an example of the principles of the invention and is not intended to limit the invention to the embodiments illustrated and described.

20 Referring firstly to **FIGS. 1** and **2**, the ring puzzle **20** according to the first preferred embodiment has a hollow rectangular boxlike housing **22**. The housing has a first planar projection **24** on its top surface and a second planar projection **26** on its bottom surface. Either one of the planar projections **24** and **26** can be used as a base to support the housing **22** on a table for example.

The preferred puzzle **20** has a first series of stems **30** extending through holes **32** in a first side **34** of the housing **22**. The first stem in the first series of stems is labelled as **30'**. Each of the stems **30**, **30'** has an eyelet **36** on its extremity, and a ring **38** is mounted in that eyelet. Each ring **38** except the first one **38'** encloses an adjacent stem **30**, **30'** between the eyelet **36** on that respective adjacent stem **30** or **30'** and the housing **22**. A first elongated wire band **40** is mounted through all the rings **38**, **38'** and encloses all the stems **30**, **30'**.

The stems **30**, **30'**, the rings **38**, **38'**, and the first wire band **40** on the first side **34** of the housing **22** constitute the first game of the preferred puzzle **20**. A game played with the first rings **38**, **38'** and the first wire band **40** represents a first degree of difficulty.

The first game is played by removing the wire band **40** from all the rings **38**, **38'**, and from around all the stems **30**, **30'** starting from the first ring **38'**, and then reintroducing the wire band **40** back into the rings and around the stems as it was before starting the game.

The instructions to play this game and the steps required to remove and to install the wire band **40** from and into the rings **38**, **38'** and around the stems **30**, **30'** are not described herein because these instructions and procedures are well known in the art and do not constitute the focus of the present invention. A complete list of steps to play this game is disclosed in the **US Patent 4,907,805** for example.

In the puzzle **20** according to the preferred embodiment, a second series of stems **50** extend through holes (not shown) in the second side **54** of the housing **22**. The leading stem in the second series of stems is labelled as

50', and extends as a continuation of the first stem **30'** in the first series of stems. Each of the stems **50, 50'** has an eyelet **56** of its end and a ring or a wire loop such as diamond-shaped wire loop **58** mounted in that eyelet **56**. Each wire loop **58**, except the first one **58'**, encloses an adjacent stem
 5 **50, 50'** between the eyelet **56** on that respective adjacent stem **50, 50'** and the housing **22**. A second elongated wire band **60** is mounted through all the wire loops **58, 58'** and encloses all the stems **50, 50'**.

The leading stem **50'** and the first stem **30'** are also designated to these unique foremost positions in the puzzle **20**, because these stems are at one
 10 end of their respective series of stems and are enclosed by an adjacent ring **38** or an adjacent diamond-shaped wire loop **58** as shown in **FIG. 1**. Conversely, the last stem in each series of stems is not enclosed by an adjacent ring or diamond-shaped wire loop.

15 The stems **50,50'**, the diamond-shaped wire loops **58, 58'**, and the second wire band **60** on the second side **54** of the housing **22** constitute the second game of the preferred puzzle **20**. A game played with the diamond-shaped wire loops **58, 58'** and the second wire band **60** represents a second degree of difficulty, whereby the diamond-shaped wire loops **58, 58'** require
 20 different manipulations than the circular rings **38, 38'** of the first game.

A third degree of difficulty in this second game comes from the fact that both sides are played in a same direction. Therefore, when the housing **22** is rotated end-to-end between games, the first game is played by handling the first wire band **40** with the right hand, and the second game is played
 25 by handling the second wire band **60** with the left hand of the same player.

It will be appreciated that the diamond-shaped wire loops **58, 58'** can be replaced by circular rings **38, 38'**, wherein the higher level of difficulty in the second game consists only in playing one of the sides with the awkward hand.

5 Additional degrees of difficulty can be added to either sides by replacing the rings **38, 38'**, or the diamond-shaped wire loops **58, 58'** by wire loops of different shapes such as a star shape **70**, a flower-like shape **72**, a heart shape **74** or any combinations of these figures or other figures, such as shown in **FIG. 4**. The rings **38, 38'** and any other wire loops **58, 70, 72,**
 10 and **74** can also be coloured of various colours such that the instructions to play the game can be given with reference to a specific ring or wire loop by colour rather than by position number.

Referring back to **FIGS. 2 and 3**, the stems **30** in the first series of stems are respectively connected to the stems **50** in the second series of stems,
 15 with the first stem **30'** being connected to the leading stem **50'** and so forth. Opposite stems in the first and second series of stems are connected to each other by means of a sleeve-type coupling **80** enclosing the ends of the opposite stems **30, 50** or **30', 50'**. Preferably, the end of each stem **30, 30'** and **50, 50'** has a knurled segment **82** thereon and the coupling **80** has a
 20 central hole **84** therein. The central hole **84** has a diameter which represents a tight fit over the knurled segment **82**, so as to firmly retain opposite stems **30, 50** and **30', 50'** together.

Both series of stems **30, 30'** and **50, 50'**; the rings **38, 38'**; the diamond-shaped wire loops **58, 58'**; the first and second wire bands **40** and **60** and
 25 the couplings **80** constitute the third game of the preferred puzzle **20**.

The third game can be played by one player playing both sides of the puzzle at the same time. The third game is also played by two players, wherein the first player manipulates the first wire band **40** with his/her right hand, and the other player manipulates the second wire band **60** with his/her left hand.

5 It will be appreciated that a rotation of the housing **22** end-to-end reverses the hand with which the game is played by each player. It will also be appreciated that the turning of the housing **22** end-to-end, and the tilting of the housing top-to-bottom with the first planar projection **24** being used as a base, also reverse the hand with which the game is played and reverse the
10 degree of difficulty attributed to the diamond-shaped wire loops **58**. It is therefore possible to play the third game with the housing **22** set in four different orientations, wherein the game is different each time.

When the game is played by two players, one player must take advantage of the moves of the other player to solve his/her side of the puzzle. One
15 player can also take advantage of the degree of difficulty associated with his opponent's side of the puzzle to solve his/her side ahead of his/her opponent.

The housing **22** and the couplings **80** are preferably made of molded plastic. The stems **30, 30', 50, 50'**; the rings **38, 38'**; the wire loops **58, 58', 20 70, 72, 74** and the wire bands **40, 60** are preferably made of metal wire, but can also be made of molded plastic or other material, according to the preferences of the manufacturer.

Referring now to **FIG. 5**, there is shown therein a wire puzzle **90** according
25 to the second preferred embodiment of the present invention. In this second preferred embodiment, the housing **92** thereof has a cylindrical

shape, and both wire bands **94, 96** in the first and second games have a curved shape. In this second preferred embodiment, both sides of the puzzle **90** are played in a same direction. The stems on both sides of the housing are continuous with each other and extend diametrically through the housing **92**. The central stem **98** is straight, while each of the outside stems **100**, has a deviation **102** in its central segment to extend over or under the central stem **98**, as shown in **FIGS. 6, and 7**.

A game using the puzzle **90** is played while holding the cylindrical housing **92** in one's hand and working one of the wire bands **94, 96** at a time, or both wire bands simultaneously with the other hand.

Having described a rectangular and cylindrical housings, it will be appreciated that the puzzle according to the present invention can also be made with a housing having another shape, such as an elliptical shape or a spherical shape for example. Therefore, the shape of the housing is not limited to those illustrated by labels **22 and 92**.

An additional level of difficulty can be added to the game played with the first or second preferred puzzle by providing at least some of the stems with staggered bulges **104**, as illustrated in **FIG. 8**, to command the working of these stems into the corresponding holes **32** in the sides of the housing **22 or 92**, such as the working of a key into a keyhole. For this purpose, the holes **32** in the sides of the housings **22 and 92** are slots as illustrated in **FIGS. 1 and 5**. In addition, some of the stems may be made of round or square stock to limit their rotation into their respective slots **32**.

As to other manner of usage and operation of the present invention, the same should be apparent from the above description and accompanying

drawings, and accordingly further discussion relative to the manner of usage and operation of the invention would be considered repetitious and is not provided.

5 While two embodiments of the present invention have been illustrated and described herein above, it will be appreciated by those who are skilled in the art that various modifications, alternate constructions and equivalents may be employed without departing from the true spirit and scope of the invention. Therefore, the above description and the illustrations should not be construed as limiting the scope of the invention which is defined by the
10 appended claims.

CLAIMS

We claim:

1. A three-way ring puzzle, comprising;
a hollow housing having a first and second opposite sides and a first and second series of holes in said first and second sides respectively;
a first series of stems extending outside said housing through said first series of holes in said first side of said housing;
a second series of stems extending outside said housing through said second series of holes in said second side of said housing;
each of said stems having an eyelet on an extremity thereof outside said housing and a wire loop loosely mounted in said eyelet;
each of said stems in said first series of stems aligning with and being joined inside said housing to one of said stems in said second series of stems, and
a first and second elongated wire bands respectively mounted in said wire loops on said first and second series of stems.
2. A three-way ring puzzle as claimed in **claim 1**, wherein said wire loops on said stems in said first series of stems are circular rings.
3. A three-way ring puzzle as claimed in **claim 1**, wherein said wire loops on said stems in said second series of stems have diamond-like shapes.

4. A three-way ring puzzle as claimed in **claim 1**, wherein some of said wire loops have different colours.
5. A three-way ring puzzle as claimed in **claim 1**, wherein said holes in said first and second series of holes are slots and at least some of said stems have staggered bulges thereon for restricting a movement thereof through said slots.
6. A three-way ring puzzle as claimed in **claim 1**, further comprising a first planar projection on a top surface of said housing and a second planar projection on a bottom surface of said housing.
7. A three-way ring puzzle as claimed in **claim 1**, wherein said first series of stem comprises a first stem on one end thereof, and said second series of stems comprises a leading stem on one end thereof, and said first stem in said first series of stems being aligned with and joined to said leading stem in said second series of stems.
8. A three-way ring puzzle as claimed in **claim 1**, wherein each of said stems in said first series of stems being joined to one of said stems in said second series of stems by means of a sleeve-type coupling.
9. A three-way ring puzzle as claimed in **claim 1**, wherein said housing has a cylindrical shape and said stems extend diametrically through said housing.
10. A three-way ring puzzle as claimed in **claim 7** wherein one of said wire loops on said first series of stems encloses said first stem and

one of said wire loops on said second series of stems encloses said leading stem.

11. A three-way ring puzzle as claimed in **claim 8**, wherein each of said stems has a knurled segment on an end thereof, and said knurled segment is firmly engaged in said coupling.
12. A three-way ring puzzle, comprising;
 - a hollow housing having a first and second opposite sides and a first and second series of holes in said first and second sides respectively;
 - a first series of stems extending outside said housing through said first series of holes in said first side of said housing; said first series of stems comprising a first stem on an end thereof;
 - a second series of stems extending outside said housing through said second series of holes in said second side of said housing; said second series of stems comprising a leading stem on an end thereof;
 - each of said stems in said first series of stems aligning with and being joined to a respective one of said stems in said second series of stems, with said first stem in said first series of stems aligning with and being joined to said leading stem in said second series of stems;
 - each of said stems having an eyelet on an extremity thereof outside said housing;
 - a first series of wire loops mounted in said eyelets on said stems in said first series of stems, with one of said wire loops in said first series of wire loops being loosely mounted in a respective one of said eyelets on said stems in said first series

of stems;

a second series of wire loops mounted in said eyelets on said stems in said second series of stems, with one of said wire loops in said second series of wire loops being loosely mounted in a respective one of said eyelets on said stems in said second series of stems;

a first elongated wire band mounted in said wire loops in said first series of wire loops and enclosing said stems in said first series of stems;

a second elongated wire band mounted in said wire loops in said second series of wire loops and enclosing said stems in said second series of stems, and

said first stem in said first series of stems being enclosed by one of said wire loops in said first series of wire loops, and said leading stem in said second series of stems being enclosed by one of said wire loops in said second series of wire loops.

13. A three-way ring puzzle as claimed in **claim 12**, wherein said wire loops in said first series of wire loops are circular rings, and said wire loops in said second series of wire loops have diamond-like shapes.

14. A three-way ring puzzle as claimed in **claim 12**, wherein each of said stems in said first series of stems are joined to one of said stems in said second series of stems by means of a sleeve-type coupling, and each of said stems has a knurled segment on an end thereof, and said knurled segment is firmly engaged in said coupling.

- 15.** A three-way ring puzzle, comprising;
a hollow cylindrical housing;
a series of stems extending diametrically through said housing;
each stem having a first and second extremities outside said housing
and an eyelet on each of said extremities;
a first series of wire loops mounted in said eyelets on said first
extremities, with one of said wire loops in said first series of
wire loops being loosely mounted in a respective one of said
eyelets on said first extremities;
a second series of wire loops mounted in said eyelets on said second
extremities, with one of said wire loops in said second series
of wire loops being loosely mounted in a respective one of
said eyelets on said second extremities;
a first curved wire band mounted through said wire loops in said
first series of wire loops and enclosing said stems near said
first extremities of said stems, and
a second curved wire band mounted through said wire loops in said
second series of wire loops and enclosing said stems near
said second extremities of said stems.
- 16.** A three-way puzzle as claimed in **claim 15**, wherein said series of
stems comprises three stems.
- 17.** A three-way puzzle as claimed in **claim 15** wherein said wire loops
are circular rings.
- 18.** A three-way puzzle as claimed in **claim 15**, wherein said cylindrical
housing has a cylindrical surface having slots therein and said stems
extend through said slots; and at least some of said stems have

staggered bulges thereon for restricting a movement thereof through said slots.

- 19.** A three-way puzzle as claimed in **claim 15**, wherein said wire loops have different colours.
- 20.** A three-way puzzle as claimed in **claim 16**, wherein said three stems comprises a central stem and two outside stems, and said central stem is straight and each of said outside stems has a deviation in a central segment thereof.

Mario D. Theriault, P.Eng.

Patent Agent of the Applicants

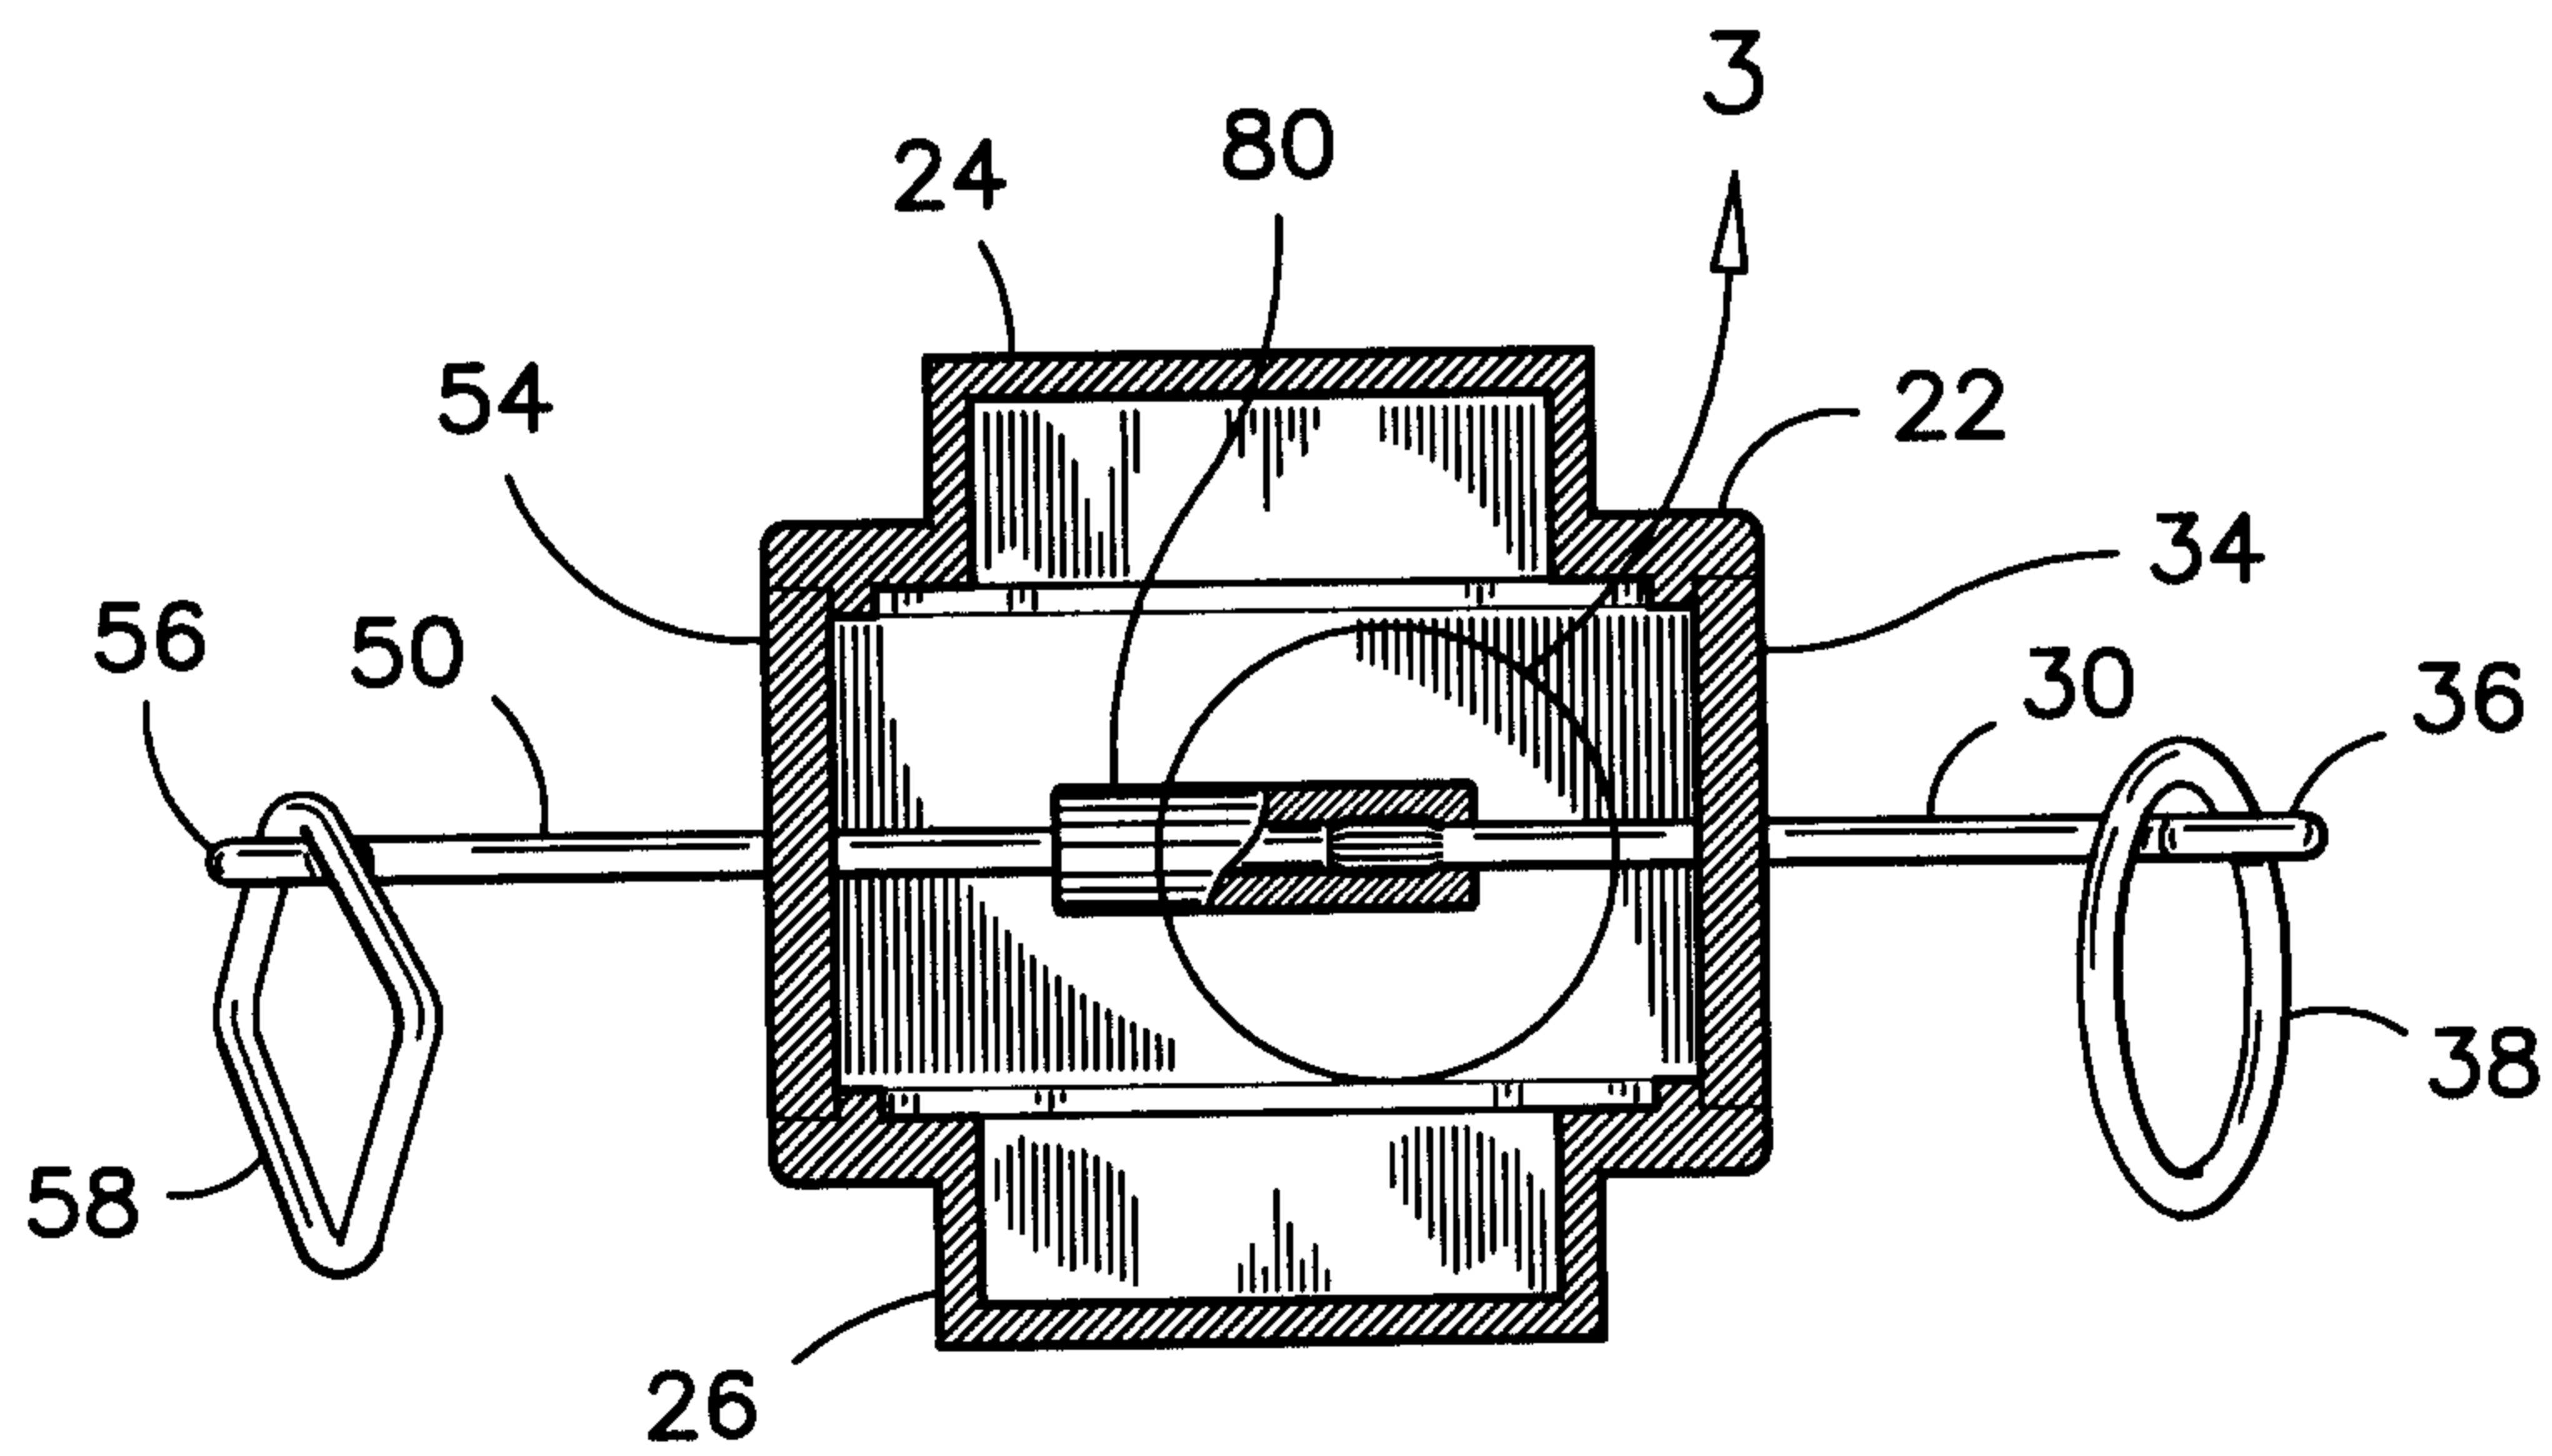
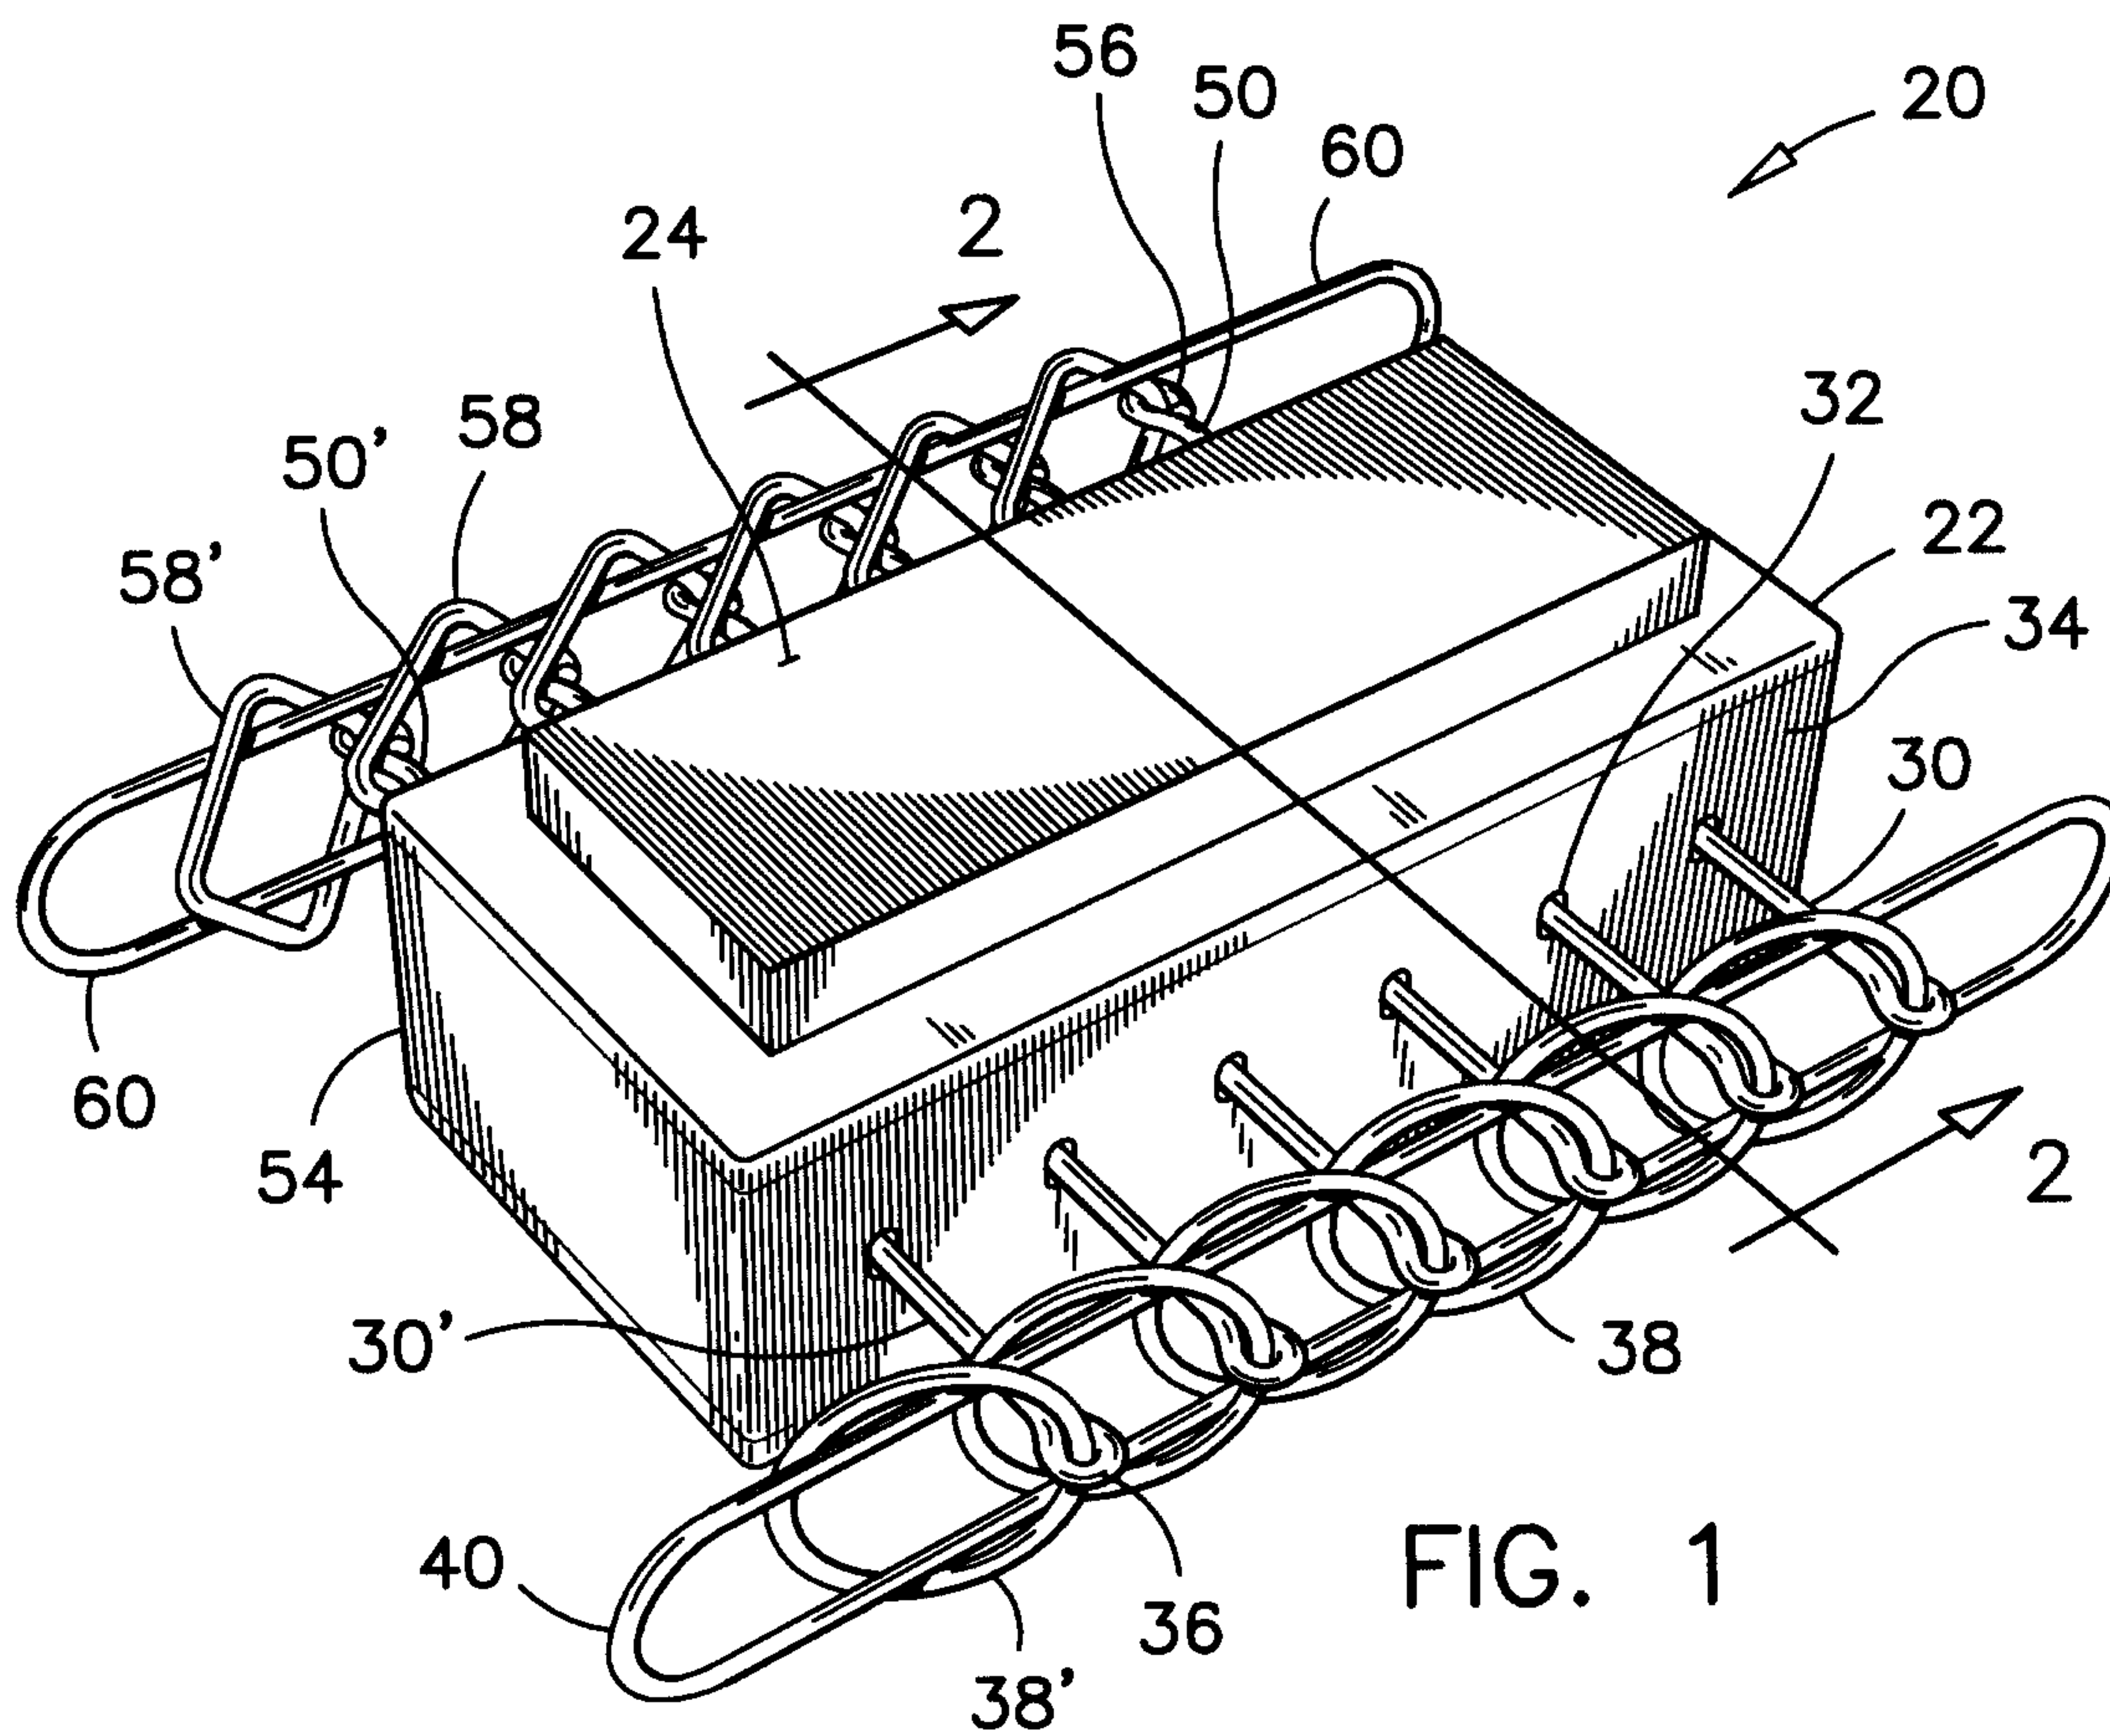


FIG. 2

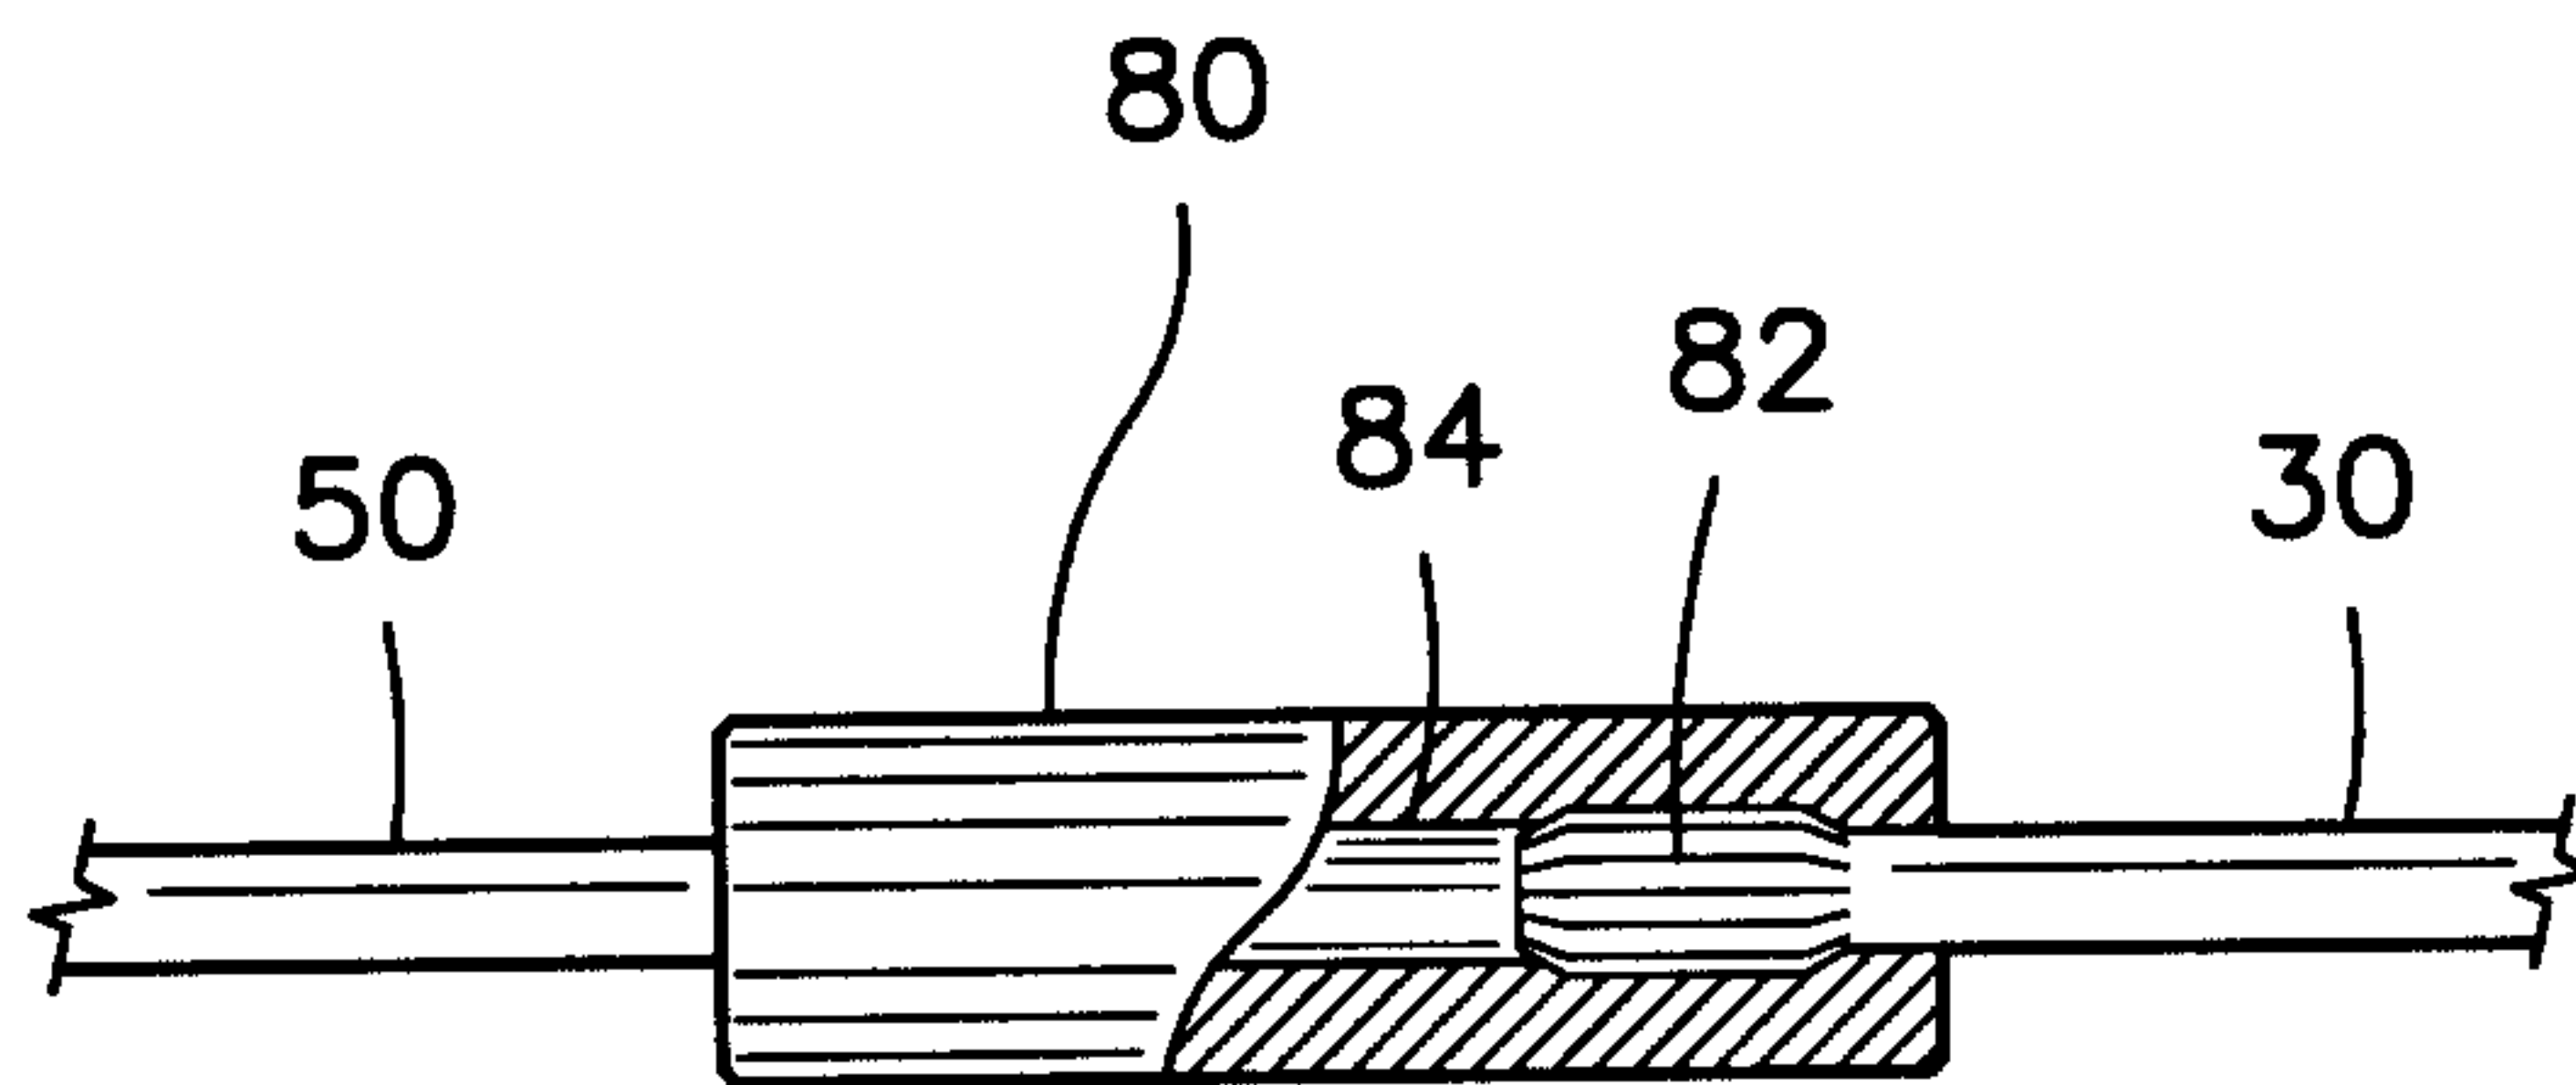


FIG. 3

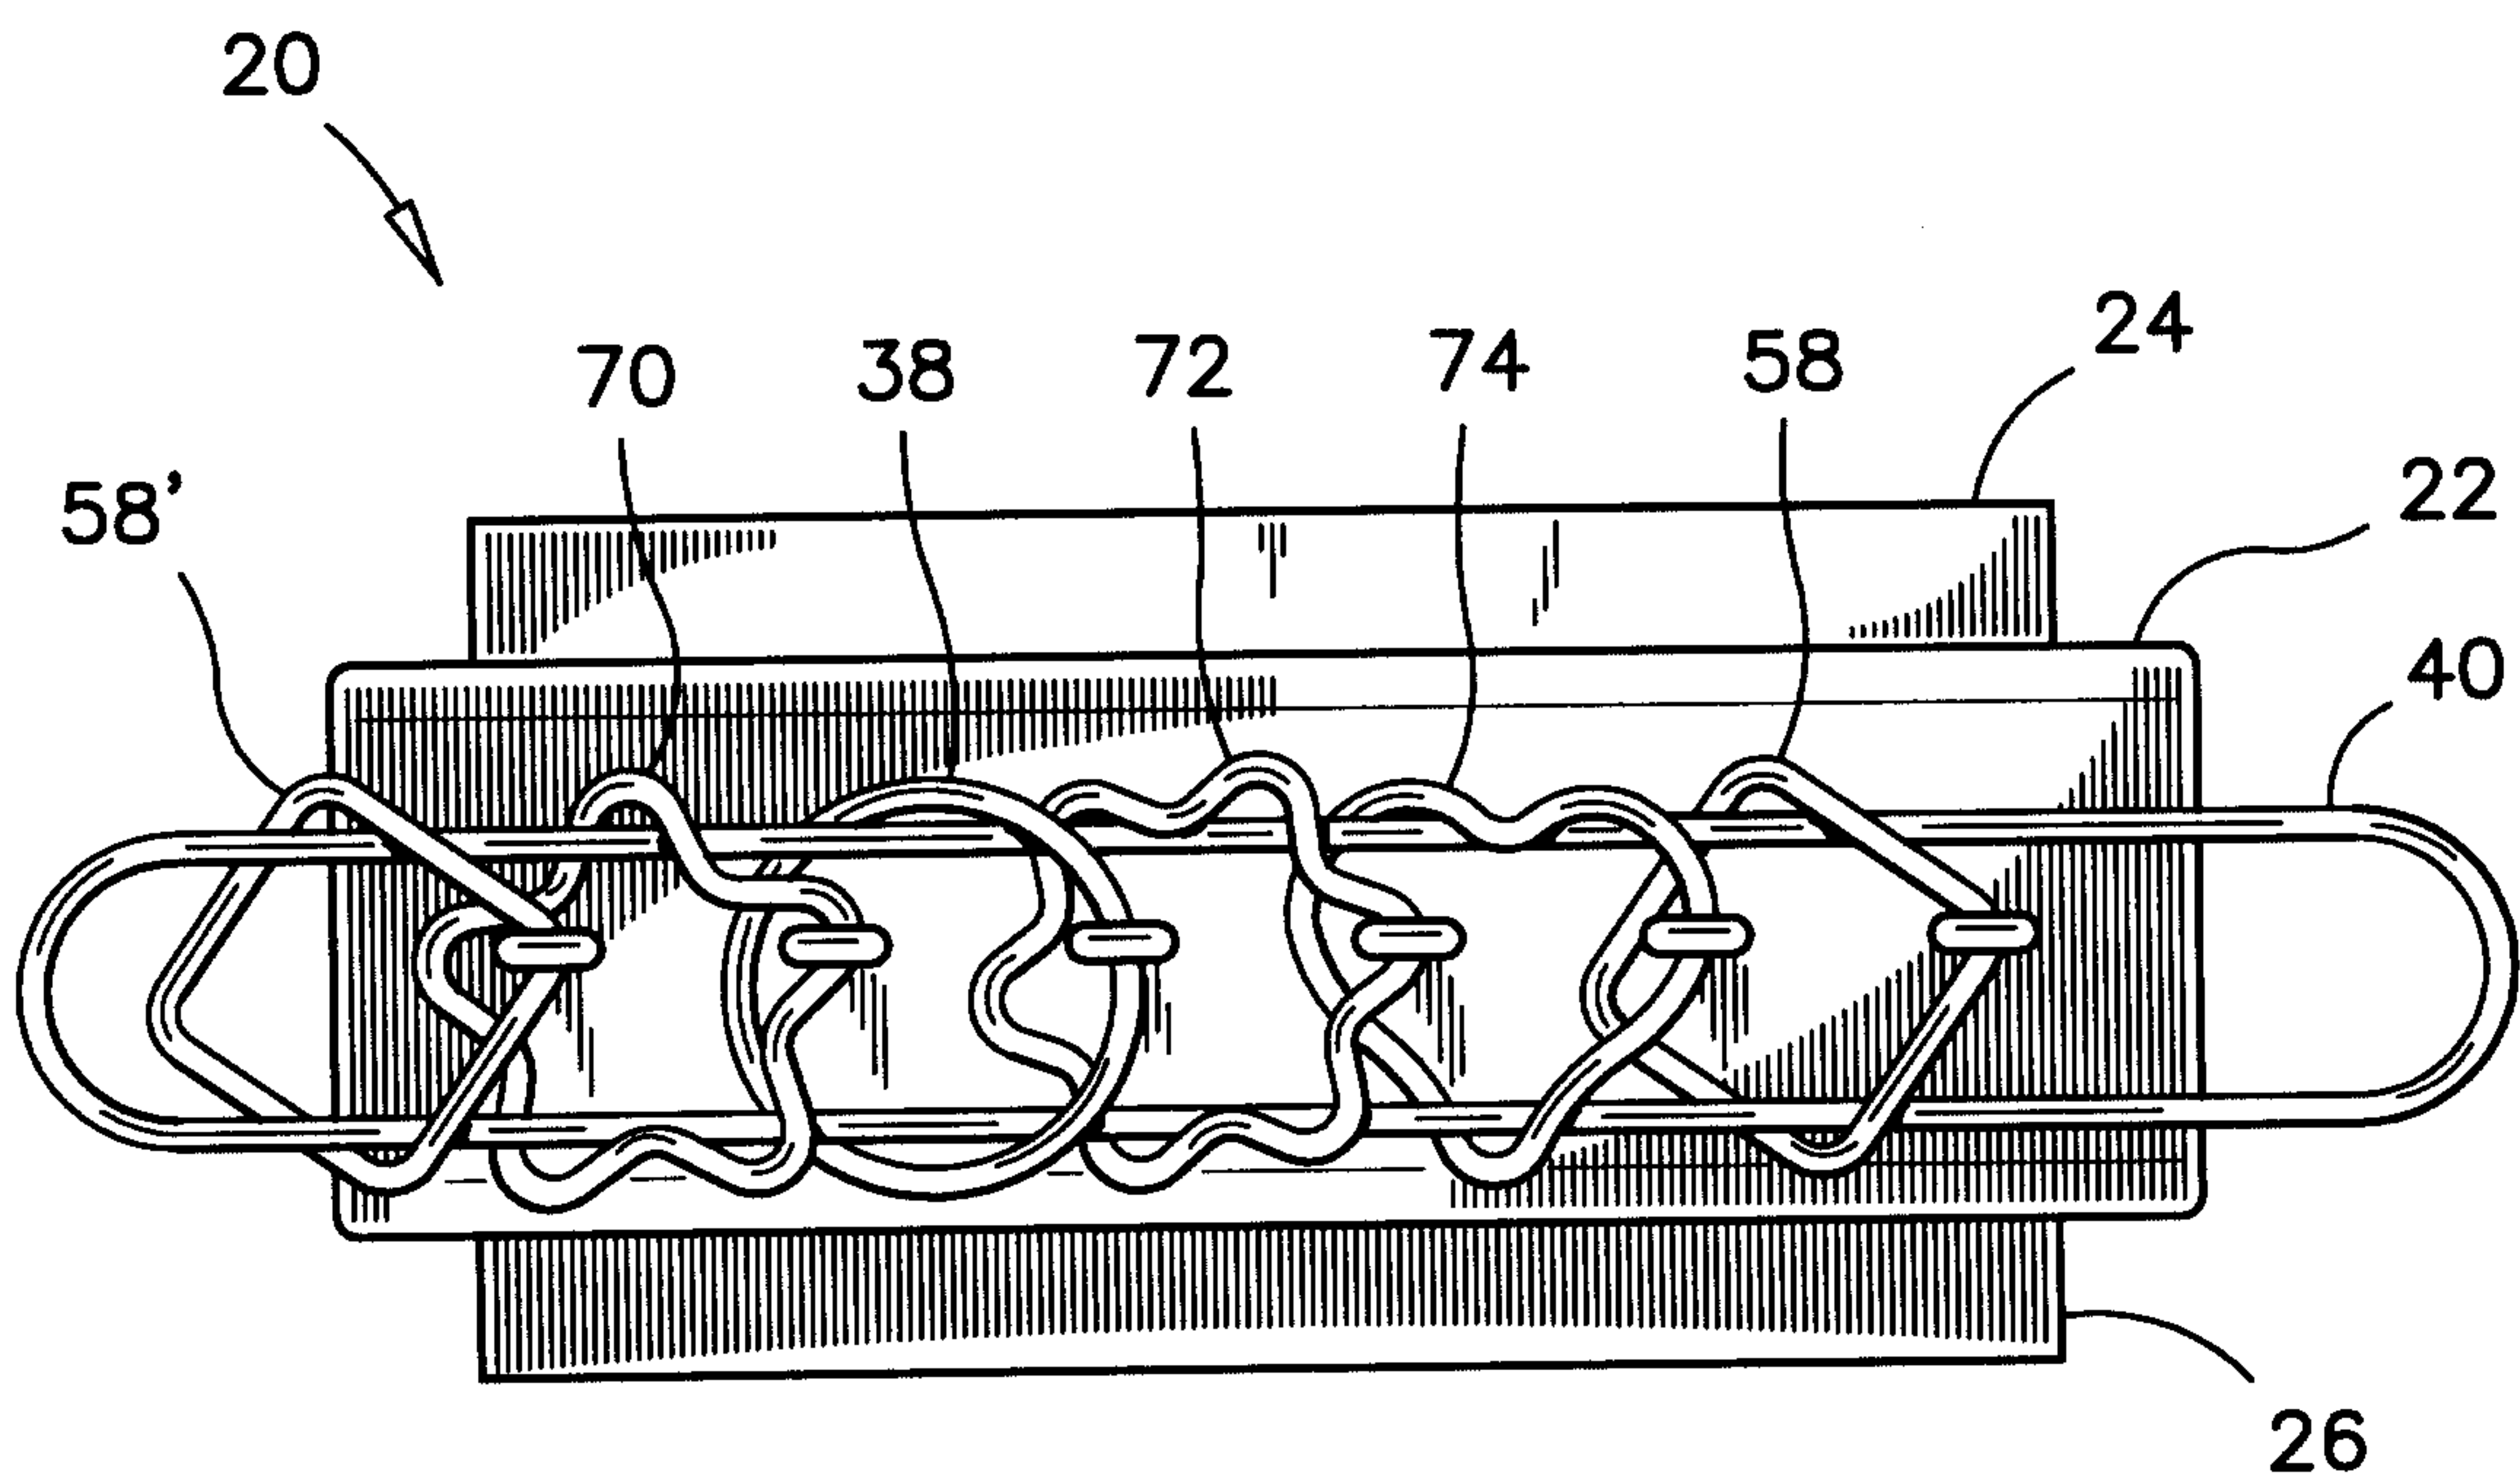


FIG. 4

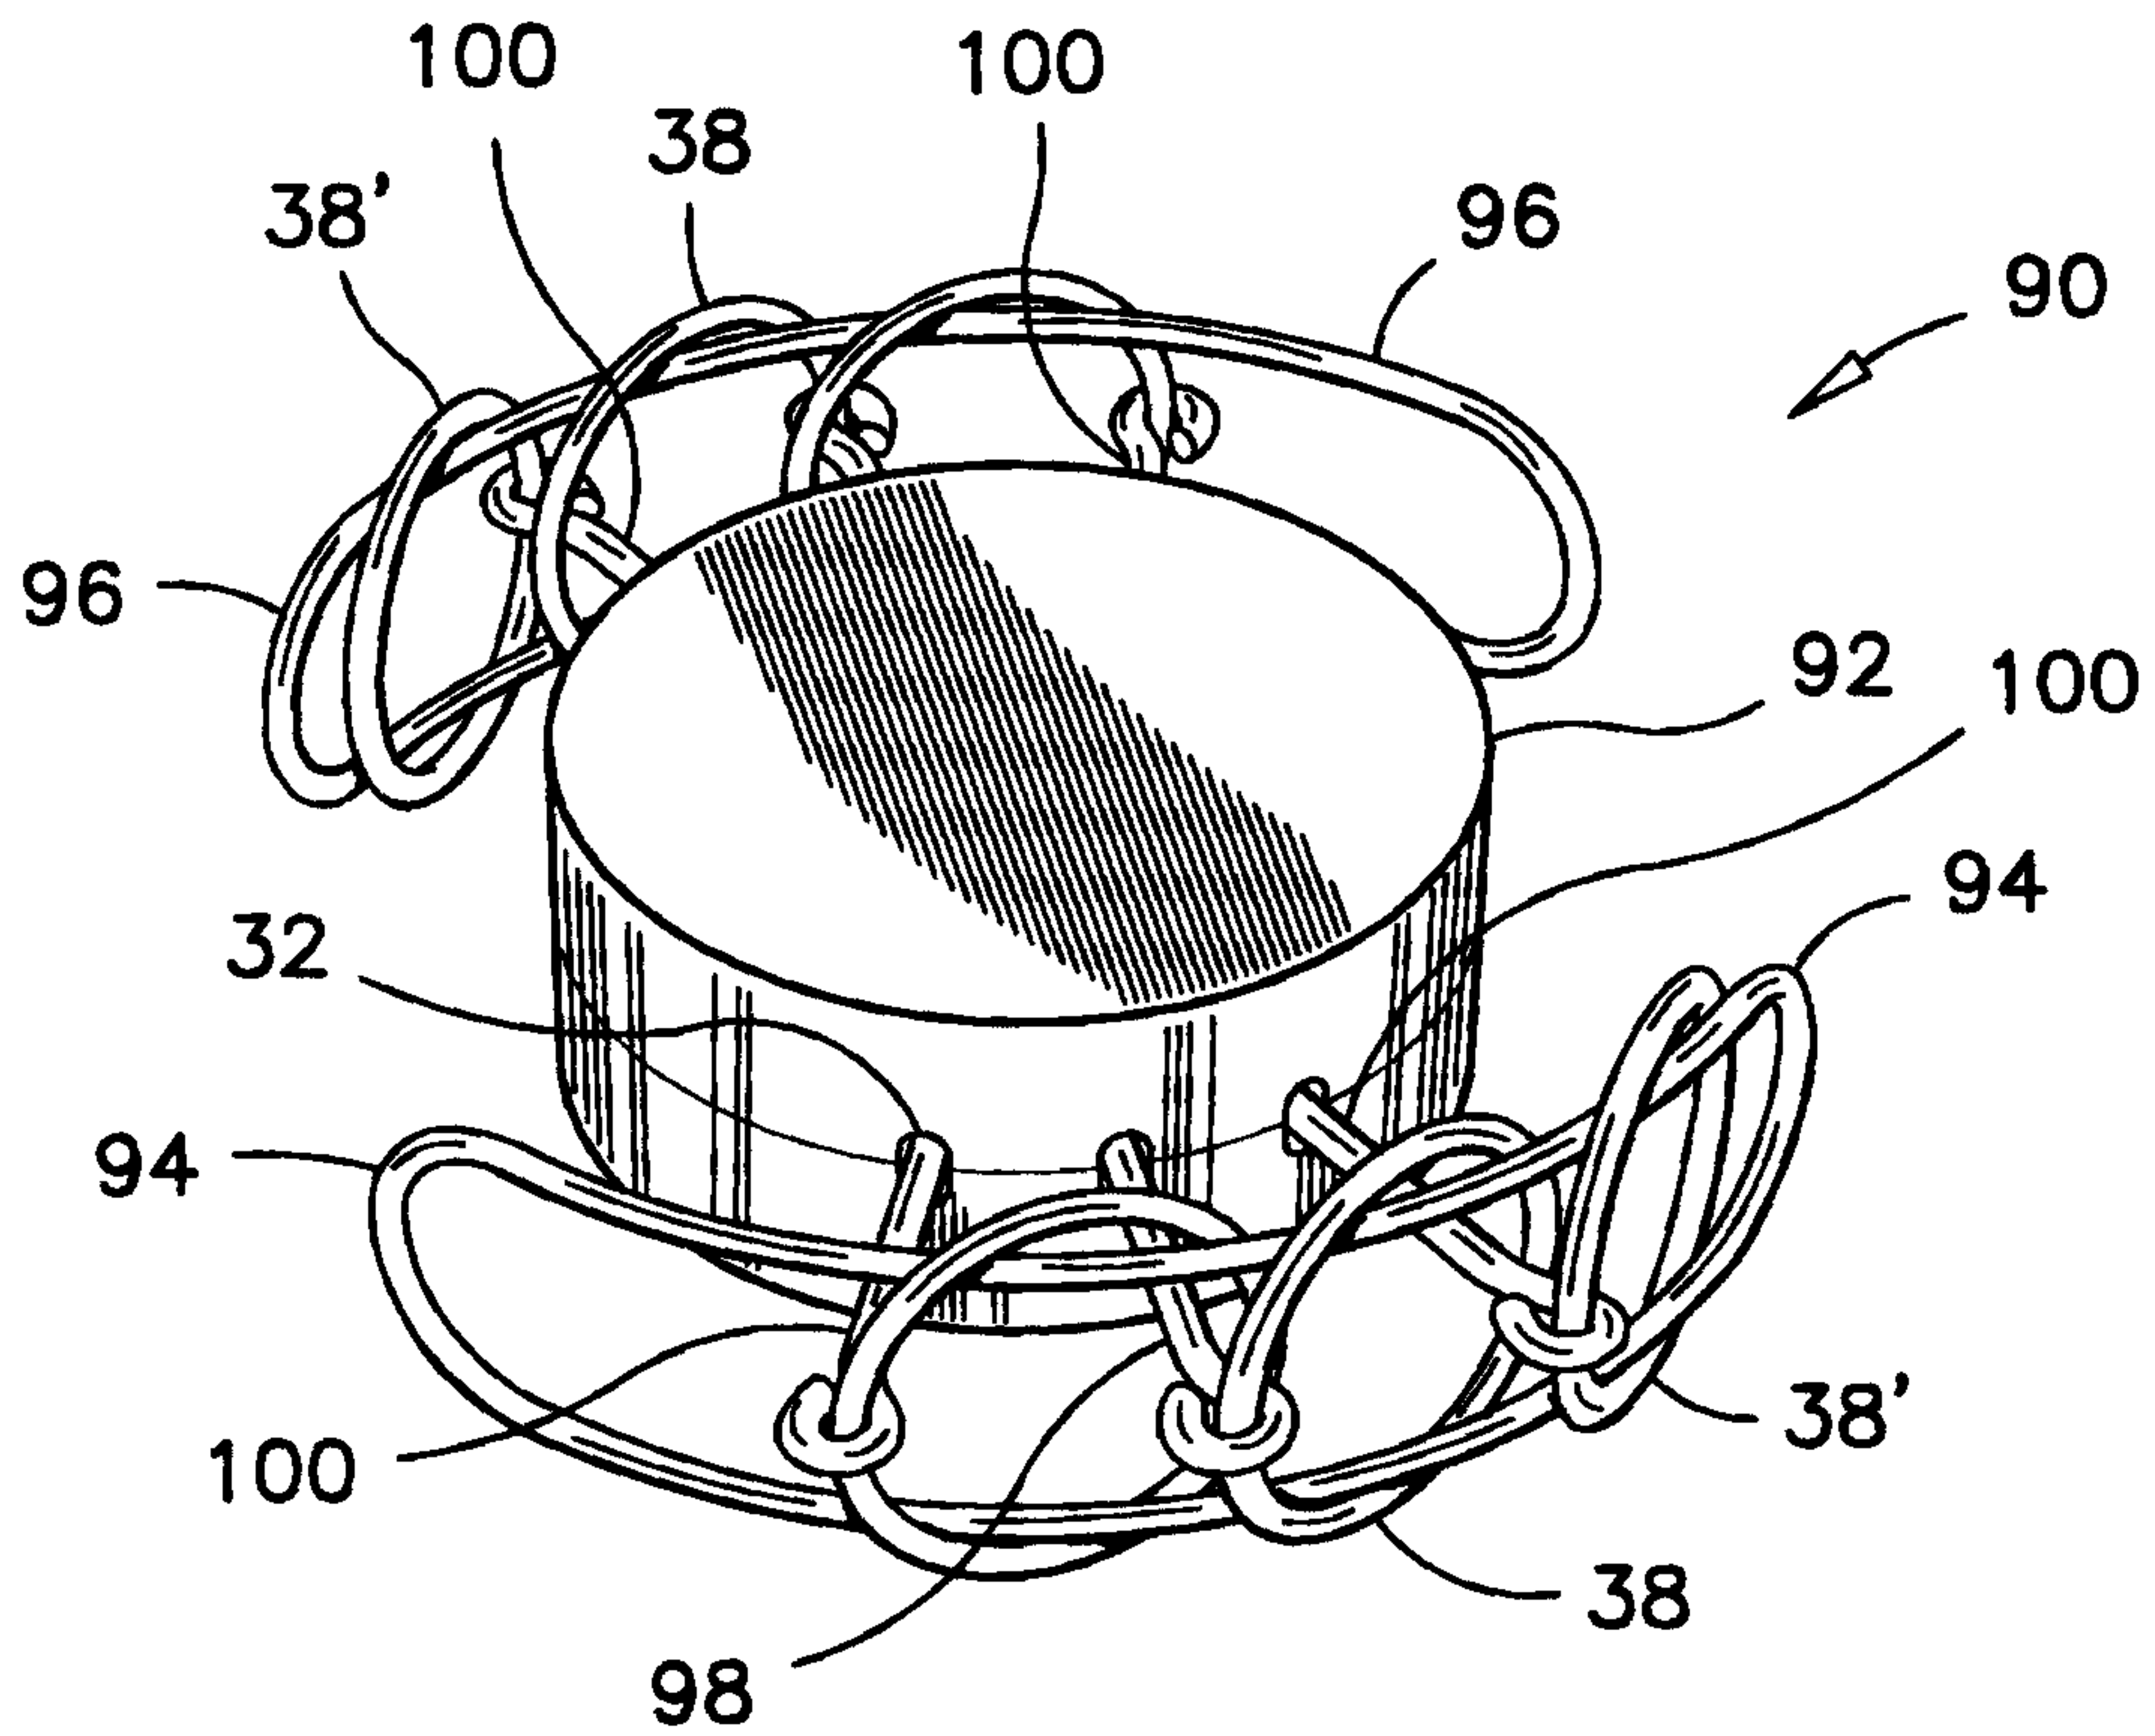


FIG. 5

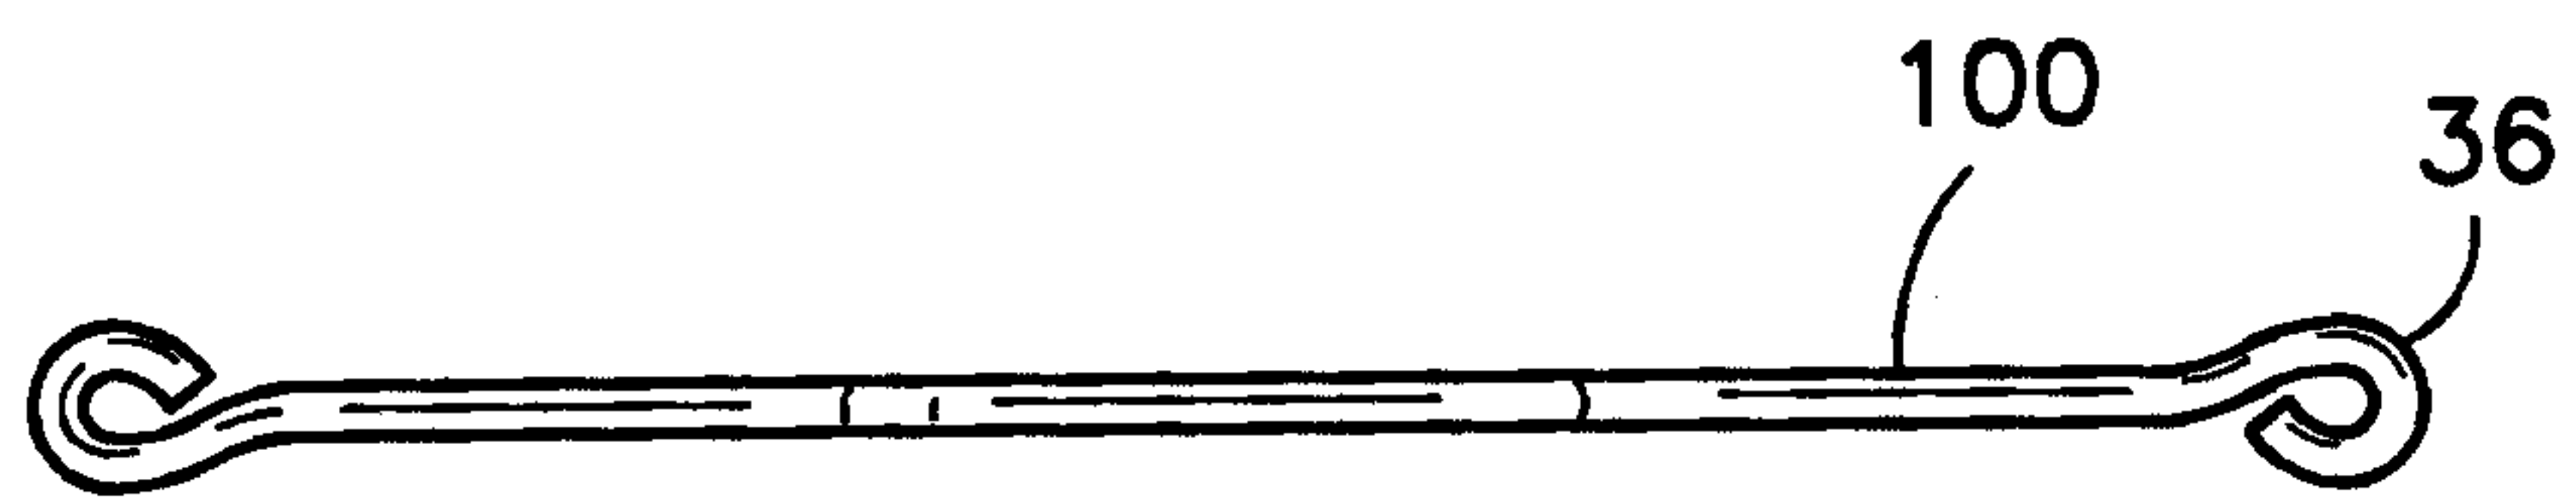


FIG. 6

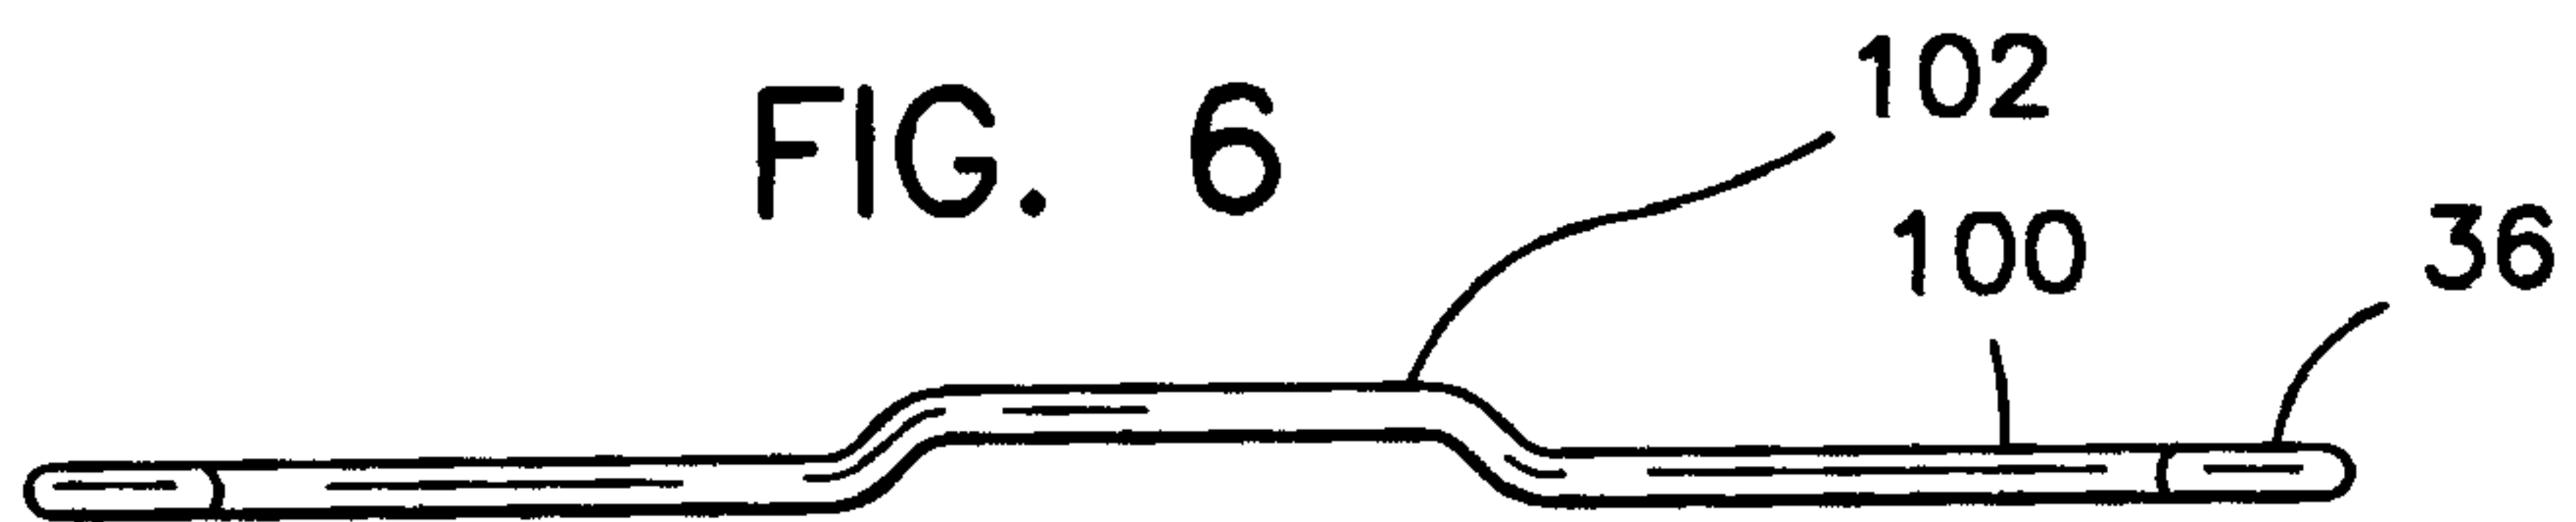


FIG. 7

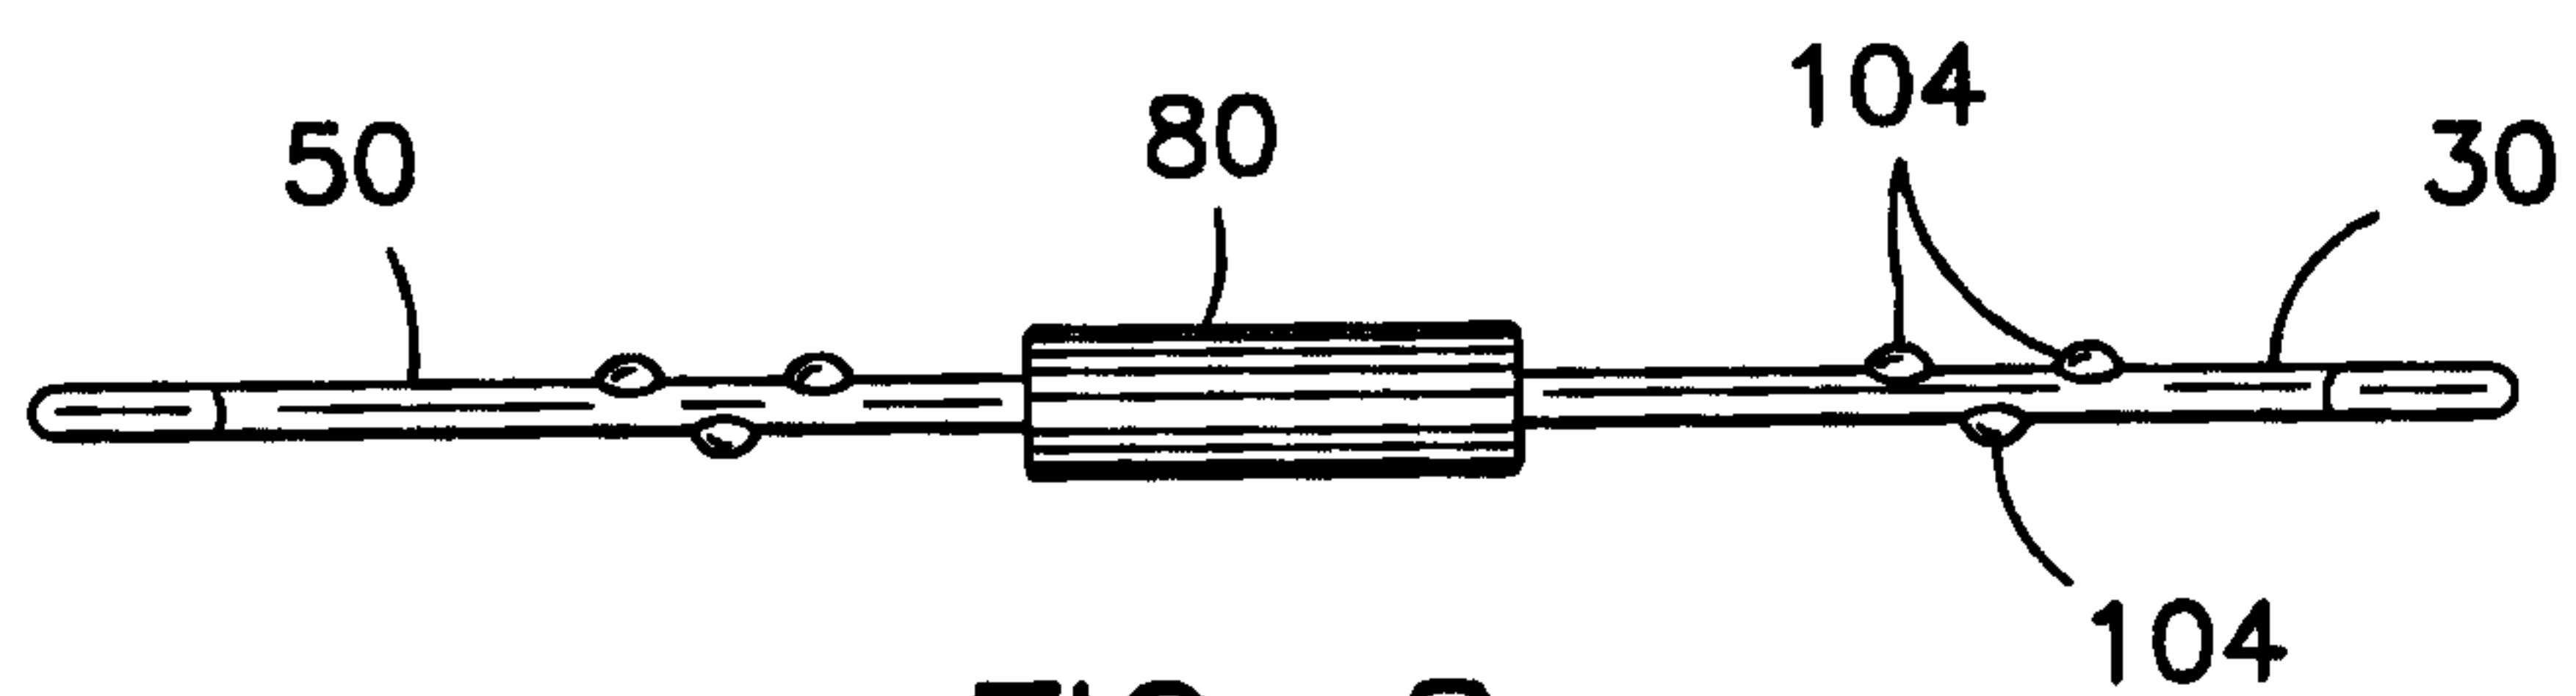


FIG. 8

