




(86) **Date de dépôt PCT/PCT Filing Date:** 2015/06/26
(87) **Date publication PCT/PCT Publication Date:** 2016/01/21
(85) **Entrée phase nationale/National Entry:** 2016/11/04
(86) **N° demande PCT/PCT Application No.:** SE 2015/050751
(87) **N° publication PCT/PCT Publication No.:** 2016/010469
(30) **Priorité/Priority:** 2014/07/16 (EP14177221.0)

(51) **Cl.Int./Int.Cl. C22C 38/24** (2006.01),
C22C 38/36 (2006.01)
(71) **Demandeur/Applicant:**
UDDEHOLMS AB, SE
(72) **Inventeurs/Inventors:**
DAMM, PETTER, SE;
HILLSKOG, THOMAS, SE;
BENGTSSON, KJELL, SE;
ENGSTROM SVENSSON, ANNIKA, SE;
EJNERMARK, SEBASTIAN, SE;
EKMAN, LARS, SE;
BERGQVIST, VICTORIA, SE
(74) **Agent:** RIDOUT & MAYBEE LLP

(54) **Titre : ACIER A OUTILS ECROUI A FROID**
(54) **Title: COLD WORK TOOL STEEL**

(57) **Abrégé/Abstract:**

The invention relates cold work tool steel. The steel comprises the following main components (in wt. %): C0.5 -2. N1.3 -3. Si0.05 -1.2 Mn0.05 -1. Cr2.5 -5.5 Mo0.8 -2.2 V6 -18 balance optional elements, iron and impurities.

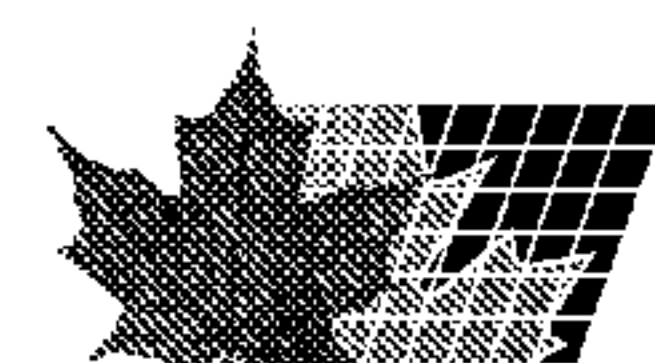

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



WIPO | PCT



(10) International Publication Number

WO 2016/010469 A1

(43) International Publication Date
21 January 2016 (21.01.2016)

(51) International Patent Classification:

C22C 38/24 (2006.01) C22C 38/36 (2006.01)

(21) International Application Number:

PCT/SE2015/050751

(22) International Filing Date:

26 June 2015 (26.06.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14177221.0 16 July 2014 (16.07.2014) EP

(71) Applicant: UDDEHOLMS AB [SE/SE]; S-683 85 Hagförs (SE).

(72) Inventors: DAMM, Petter; Kvarnbergsgatan 17, S-652 29 Karlstad (SE). HILLSKOG, Thomas; Mosstorp 237, S-655 93 Karlstad (SE). BENGTSSON, Kjell; Myra 161, S-683 93 Råda (SE). ENGSTRÖM SVENSSON, Annika; Fogdhyttan 12, S-682 91 Filipstad (SE). EJNERMARK, Sebastian; Kadriåvägen 1, S-663 41 Hammarö (SE). EKMAN, Lars; Hornäs Boa, S-683 62 Ekshärad (SE). BERGQVIST, Victoria; Gjutberg Berget, S-683 61 Ekshärad (SE).

(74) Agent: HYNELL PATENTTJÄNST AB; Box 138, S-683 23 Hagförs (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: COLD WORK TOOL STEEL

(57) Abstract: The invention relates cold work tool steel. The steel comprises the following main components (in wt. %): C0.5 -2. N1.3 -3. Si0.05 -1.2 Mn0.05 -1. Cr2.5 -5.5 Mo0.8 -2.2 V6 -18 balance optional elements, iron and impurities.



WO 2016/010469 A1

COLD WORK TOOL STEEL

TECHNICAL FIELD

5 The invention relates to a nitrogen alloyed cold work tool steel.

BACKGROUND OF THE INVENTION

10 Nitrogen and vanadium alloyed powder metallurgy (PM) tool steels attained a considerable interest because of their unique combination of high hardness, high wear resistance and excellent galling resistance. These steels have a wide range of applications where the predominant failure mechanisms are adhesive wear or galling. Typical areas of application include blanking and forming, fine blanking, cold extrusion, deep drawing and powder pressing. The basic steel composition is atomized, subjected to
15 nitrogenation and thereafter the powder is filled into a capsule and subjected to hot isostatic pressing (HIP) in order to produce an isotropic steel. A high performance steel produced in this way is VANCRON[®]40. It has high carbon, nitrogen and vanadium contents and is also alloyed with substantial amounts of Cr, Mo and W, which result in a microstructure comprising hard phases of the type MX (14 vol. %) and M₆C (5 vol.
20 %). The steel is described in WO 00/79015 A1.

Although VANCRON[®]40 has a very attractive property profile there is a continuous strive for improvements of the tool material in order to further improve the surface quality of the products produced as well as to extend the tool life, in particular under
25 severe working conditions, where galling is the main problem.

DISCLOSURE OF THE INVENTION

30 The object of the present invention is to provide a nitrogen alloyed powder metallurgy (PM) produced cold work tool steel having an improved property profile for advanced cold working.

Another object of the present invention is to provide a powder metallurgy (PM) produced cold work tool steel having a composition and microstructure leading to
35 improvements in the surface quality of the produced parts.

The foregoing objects, as well as additional advantages are achieved to a significant measure by providing a cold work tool steel having a composition as set out in the claims.

- 5 The invention is defined in the claims.

DETAILED DESCRIPTION

10 The importance of the separate elements and their interaction with each other as well as the limitations of the chemical ingredients of the claimed alloy are briefly explained in the following. All percentages for the chemical composition of the steel are given in weight % (wt. %) throughout the description. The upper and lower limits of the individual elements may be freely combined within the limits set out in claim 1.

15 **Carbon (0.5 – 2.1 %)**

Carbon is to be present in a minimum content of 0.5 %, preferably at least 1.0 %. The upper limit for carbon may be set to 1.8 % or 2.1 %. Preferred ranges include 0.8 – 1.6 %, 1.0 -1.4 % and 1.25 – 1.35 %. Carbon is important for the formation of the MX and for the hardening, where the metal M is mainly V but Mo, Cr and W may also be present. X is one or more of C, N and B. Preferably, the carbon content is adjusted in order to obtain 0.4-0.6 %C dissolved in the matrix at the austenitizing temperature. In any case, the amount of carbon should be controlled such that the amount of carbides of the type $M_{23}C_6$, M_7C_3 and M_6C in the steel is limited, preferably the steel is free from said carbides.

25

Nitrogen (1.3 –3.5 %)

Nitrogen is in the present invention essential for the formation of the hard carbonitrides of the MX-type. Nitrogen should therefore be present in an amount of at least 1.3 %. The lower limit may be 1.4 %, 1.5%, 1.6%, 1.7 %, 1.8 %, 1.9%, 2.0 % 2.1 % or even 2.2 %. The upper limit is 3.5 % and it may be set to 3.3 %, 3.2 %, 3.0 %, 2.8 %, 2.6 %, 2.4 %, 2.2 %, 2.1 % 1.9 % or 1.7%. Preferred ranges include 1.6 -2.1 % and 1.7 – 1.9 %.

Chromium (2.5 – 5.5 %)

35 Chromium is to be present in a content of at least 2.5 % in order to provide a sufficient hardenability. Cr is preferably higher for providing a good hardenability in large cross sections during heat treatment. If the chromium content is too high, this may lead to the

formation of undesired carbides, such as M_7C_3 . In addition, this may also increase the propensity of retained austenite in the microstructure. The lower limit may be 2.8 %, 3.0 %, 3.2 %, 3.4 %, 3.6 %, 3.8 %, 4.0 %, 4.2 %, 4.35 %, 4.4 % or 4.6 %. The upper limit may be 5.2 %, 5.0 %, 4.9 %, 4.8 % or 4.65%. The chromium content is preferably 4.2 - 4.8 %.

Molybdenum (0.8 – 2.2 %)

Mo is known to have a very favourable effect on the hardenability. Molybdenum is essential for attaining a good secondary hardening response. The minimum content is 0.8 %, and may be set to 1 %, 1.25 %, 1.5 %, 1.6 %, 1.65 % or 1.8 %. Molybdenum is a strong carbide-forming element. However, molybdenum is also a strong ferrite former. Mo needs to be restricted also for the reason of limiting the amount of other hard phases than MX. In particular the amount of M_6C -carbides should be limited, preferably to ≤ 3 vol. %. Most preferably no M_6C -carbides should be present in the microstructure. The maximum content of molybdenum is therefore 2.2 %. Preferably Mo is limited to 2.15 %, 2.1 %, 2.0 % or 1.9 %.

Tungsten (≤ 1 %)

The effect of tungsten is similar to that of Mo. However, for attaining the same effect it is necessary to add twice as much W as Mo on a weight % basis. Tungsten is expensive and it also complicates the handling of scrap metal. Like Mo, W is also forming M_6C -carbides. The maximum amount is therefore limited to 1 %, preferably 0.5 %, more preferably 0.3 % and most preferably W is not deliberately added at all. By not adding W and restricting Mo, as set out above, make it possible to completely avoid the formation of M_6C -carbides.

Vanadium (6 – 18 %)

Vanadium forms evenly distributed primary precipitated carbides and carbonitrides of the type MX. The precipitates may be represented by the formula $M(N,C)$ and they are commonly also called nitrocarbides, because of the high nitrogen content. In the inventive steel M is mainly vanadium but Cr and Mo may be present to some extent. Vanadium shall be present in an amount of 6 – 18 % in order to get the desired amount of MX. The upper limit may be set to 16 %, 15 %, 14 %, 13 %, 12 %, 11 %, 10.25 %, 10 % or 9 %. The lower limit may be 7 %, 8 %, 8.5 %, 9 %, 9.75 %, 10 %, 11 % or 12 %. Preferred ranges include 8 – 14 %, 8.5 – 11.0 % and 9.75 – 10.25 %.

Niobium ($\leq 2\%$)

Niobium is similar to vanadium in that it forms MX or carbonitrides of the type M(N,C). However, Nb results in a more angular shape of the M(N,C). Hence, the maximum addition of Nb is restricted to 2.0% and the preferred maximum amount is 0.5%. Preferably, no niobium is added.

Silicon (0.05 – 1.2 %)

Silicon is used for deoxidation. Si also increases the carbon activity and is beneficial for the machinability. Si is therefore present in an amount of 0.05 – 1.2 %. For a good deoxidation, it is preferred to adjust the Si content to at least 0.2 %. The lower limit may be set to 0.3 %, 0.35 % or 0.4 %. However, Si is a strong ferrite former and should be limited to 1.2 %. The upper limit may be set to 1.1%, 1 %, 0.9 %, 0.8 %, 0.75 %, 0.7 % or 0.65 %. A preferred range is 0.3 – 0.8 %.

Manganese (0.05 – 1.5 %)

Manganese contributes to improving the hardenability of the steel and together with sulphur manganese contributes to improving the machinability by forming manganese sulphides. Manganese shall therefore be present in a minimum content of 0.05 %, preferably at least 0.1 % and more preferably at least 0.2 %. At higher sulphur contents manganese prevents red brittleness in the steel. The steel shall contain maximum 1.5 % Mn. The upper limit may be set to 1.4 %, 1.3 %, 1.2 %, 1.1 %, 1.0 %, 0.9 %, 0.8 %, 0.7 %, 0.7 % 0.6% or 0.5 %. However, preferred ranges are 0.2 – 0.9 %, 0.2 – 0.6 and 0.3 - 0.5 %.

Nickel ($\leq 3.0\%$)

Nickel is optional and may be present in an amount of up to 3 %. It gives the steel a good hardenability and toughness. Because of the expense, the nickel content of the steel should be limited as far as possible. Accordingly, the Ni content is limited to 1%, preferably 0.3%. Most preferably, no nickel additions are made.

Copper ($\leq 3.0\%$)

Cu is an optional element, which may contribute to increasing the hardness and the corrosion resistance of the steel. If used, the preferred range is 0.02 – 2% and the most preferred range is 0.04 - 1.6%. However, it is not possible to extract copper from the steel once it has been added. This drastically makes the scrap handling more difficult. For this reason, copper is normally not deliberately added.

Cobalt ($\leq 12\%$)

Co is an optional element. Co dissolves in iron (ferrite and austenite) and strengthens it whilst at the same time imparting high temperature strength. Co increases the M_s temperature. During solution heat treatment Co helps to resist grain growth so that
5 higher solution temperatures can be used which ensures a higher percentage of carbides being dissolved resulting in an improved secondary hardening response. Co also delays the coalescence of the carbides and carbonitrides and tends to cause secondary hardening to occur at higher temperatures. Co contributes to increase the hardness of the martensite. The maximum amount is 12 %. The upper limit may be set to 10 %, 8 %, 7%, 6 %, 5 % or 4 %. The lower limit may be set to 1%, 2 %, 3 %, 4 % or 5%.
10 However, for practical reasons such as scrap handling there is no deliberate addition of Co. A preferred maximum content is 1 %.

Phosphorous (≤ 0.05)

15 P is a solid solution strengthening element. However, P tends to segregate to the grain boundaries, reduces the cohesion and thereby the toughness. P is therefore limited to $\leq 0.05\%$.

Sulphur ($\leq 0.5\%$)

20 S contributes to improving the machinability of the steel. At higher sulphur contents there is a risk for red brittleness. Moreover, a high sulphur content may have a negative effect on the fatigue properties of the steel. The steel shall therefore contain $\leq 0.5\%$, preferably $\leq 0.03\%$.

25 Be, Bi, Se, Ca, Mg , O and REM (Rare Earth Metals)

These elements may be added to the steel in the claimed amounts in order to further improve the machinability, hot workability and/or weldability of the claimed steel.

Boron ($\leq 0.6\%$)

30 Substantial amounts of boron may optionally be used to assist in the formation of the hard phase MX. B may be used in order to increase the hardness of the steel. The amount is then limited to 0.01%, preferably $\leq 0.004\%$.

Ti, Zr, Al and Ta

35 These elements are carbide formers and may be present in the alloy in the claimed ranges for altering the composition of the hard phases. However, normally none of these elements are added.

Steel production

Tool steels having the claimed chemical composition can be produced by conventional gas atomizing followed by a nitrogenation treatment. The nitrogenation may be performed by subjecting the atomized powder to an ammonia based gas mixture at 500 - 600 °C, whereby nitrogen diffuses into the powder, reacts with vanadium and nucleate minute carbonitrides. Normally the steel is subjected to hardening and tempering before being used.

Austenitizing may be performed at an austenitizing temperature (T_A) in the range of 950 – 1150 °C, typically 1020 - 1080 °C. A typical treatment comprises austenitizing at 1050 °C for 30 minutes, gas quenching and tempering three times at 530 °C for 1 hour followed by air cooling. This results in a hardness of 60-66 HRC.

EXAMPLE

In this example, a steel according to the invention is compared to the known steel. Both steels were produced by powder metallurgy.

The basic steel compositions were melted and subjected to gas atomization, nitrogenation, capsuling and HIPing.

The steels thus obtained had the following compositions (in wt. %):

		Inventive steel	VANCRON [®] 40
	C	1.3	1.2
25	N	1.8	1.8
	Si	0.5	0.5
	Mn	0.4	0.4
	Cr	4.5	4.6
	Mo	1.8	3.25
30	W	0.1	3.8
	V	10.0	8.5
	balance iron and impurities.		

The microstructure of the two steels was examined and it was found that the inventive steel contained about 20 vol. % MX (black phase), which particles are small in size and uniformly distributed within the matrix as disclosed in Fig. 1.

The comparative steel on the other hand contained about 15 vol. % MX and about 6 vol. % M₆C (white phase) as shown in Fig. 2. It is apparent from this figure that the M₆C carbides are larger than the MX-particles and that there is a certain spread in the particle size distribution of the M₆C carbides.

5

The steels were austenitized at 1050 °C for 30 minutes and hardened by gas quenching and tempering at 550 °C for 1 hour (3x1h) followed by air cooling. This resulted in a hardness of 63 HRC for the inventive steel and 62 HRC for the comparative material. The equilibrium composition of the matrix and the amount of primary MX and M₆C at
10 the austenitizing temperature (1050 °C) were calculated in a Thermo-Calc simulation with the software version S-build-2532 and the database TCFE6. The calculations showed that the inventive steel was free from M₆C-carbides and contained 16.3 vol. % MX. The comparative steel on the other hand was found to contain 5.2 vol. % M₆C and 14.3 vol. % MX.

15

The two materials were used in rolls for cold rolling of stainless steel and it was found that the inventive material resulted in an improved surface micro-roughness of the cold rolled steel, which may be attributed to the more uniform microstructure and to the absence of the large M₆C-carbides.

20

INDUSTRIAL APPLICABILITY

The cold work tool steel of the present invention is particular useful
in applications requiring very high galling resistance such as blanking and forming of austenitic stainless steel. The small size of the MX-carbonitrides in combination with
25 their uniform distribution is also expected to result in an improved galling resistance.

CLAIMS

1. A steel for cold working consisting of in weight % (wt.%):

	C	0.5 - 2.1
5	N	1.3 – 3.5
	Si	0.05 - 1.2
	Mn	0.05 – 1.5
	Cr	2.5 – 5.5
	Mo	0.8 – 2.2
10	V	6 – 18
	optionally one or more of	
	P	≤ 0.05
	S	≤ 0.5
	W	≤ 1.0
15	Cu	≤ 3
	Co	≤ 12
	Ni	≤ 3
	Nb	≤ 2
	Ti	≤ 0.1
20	Zr	≤ 0.1
	Ta	≤ 0.1
	B	≤ 0.6
	Be	≤ 0.2
	Bi	≤ 0.2
25	Se	≤ 0.3
	Ca	0.0003 – 0.009
	Mg	≤ 0.01
	REM	≤ 0.2
30	balance Fe apart from impurities.	

2. A steel according to claim 1 fulfilling at least one of the following requirements:

	C	0.6 - 1.8
	N	1.4 – 3.3
35	Si	0.2 - 1.1
	Mn	0.1 – 1.1
	Cr	2.8 – 5.2

	Mo	1.25 – 2.15
	W	≤ 0.5
	V	7 – 16
	P	≤ 0.03
5	S	≤ 0.03
	Cu	0.02 - 2
	Co	≤ 1
	Ni	≤ 1
	Nb	≤ 1
10	Ti	≤ 0.01
	Zr	≤ 0.01
	Ta	≤ 0.01
	B	≤ 0.005
	Be	≤ 0.02
15	Se	≤ 0.03
	Mg	≤ 0.001

20 3. A steel according to claim 1 or 2 fulfilling at least one of the following requirements:

	C	0.8 - 1.6
	N	1.6 – 3.2
	Si	0.25 - 0.85
	Mn	0.2 – 0.9
25	Cr	3.2 – 5.0
	Mo	1.5 – 2.1
	W	≤ 0.45
	V	8 – 14
	Co	≤ 1
30	Cu	≤ 0.5
	Ni	≤ 0.3
	Nb	≤ 0.5

35

4. A steel according to any of the preceding claims fulfilling at least one of the following requirements:

	C	1.0 - 1.4
	N	1.6 - 2.1
	Si	0.3 - 0.8
	Mn	0.2 - 0.6
5	Cr	4.2 - 4.8
	Mo	1.6 - 2.0
	W	≤ 0.40
	V	8.5 - 11.0

- 10 5. A steel according to any of the preceding claims fulfilling at least one of the following requirements:

	C	1.25 - 1.35
	N	1.7 - 1.9
	Si	0.35 - 0.65
15	Mn	0.3 - 0.5
	Cr	4.35 - 4.65
	Mo	1.65 - 1.95
	W	≤ 0.30
	V	9.75 - 10.25

20

6. A steel according to claim 4 consisting of:

	C	1.0 - 1.4
	N	1.6 - 2.1
25	Si	0.3 - 0.8
	Mn	0.2 - 0.6
	Cr	4.2 - 4.8
	Mo	1.6 - 2.0
	W	≤ 0.40
30	V	8.5 - 11.0

balance Fe apart from impurities.

- 35 7. A steel according to any of the preceding claims, wherein the amount of carbides and carbonitrides present in the steel fulfils the following requirements in volume %:

MX	15 - 35
----	---------

$$M_6X \leq 3$$

$$M_7X_3 \leq 1$$

$$M_{23}X_6 \leq 1$$

5 wherein M is a one or more of V, Cr and Mo and X is C and/or N and optionally B.

8. A steel according to claim 7 fulfilling the requirement:

$$\begin{array}{ll} MX & 15 - 30 \\ 10 \quad M_6X & \leq 1 \\ M_7X_3 & \leq 0.2 \\ M_{23}X_6 & \leq 0.2 \end{array}$$

15 9. A steel according to claim any of the preceding claim, wherein the amount of carbides and carbonitrides fulfils the following requirements in volume %:

$$\begin{array}{ll} MX & 15 - 30 \\ M_6X & \leq 0.1 \end{array}$$

20 wherein the microstructure is free from M_7X_3 , and $M_{23}X_6$, preferably the microstructure is free from M_6X .

25 10. A steel according to any of the preceding claims, wherein the Equivalent Circle Diameter (ECD) of the carbides and carbonitrides in the microstructure is less than 1.5 μm , preferably less than 1.0 μm .

1/2

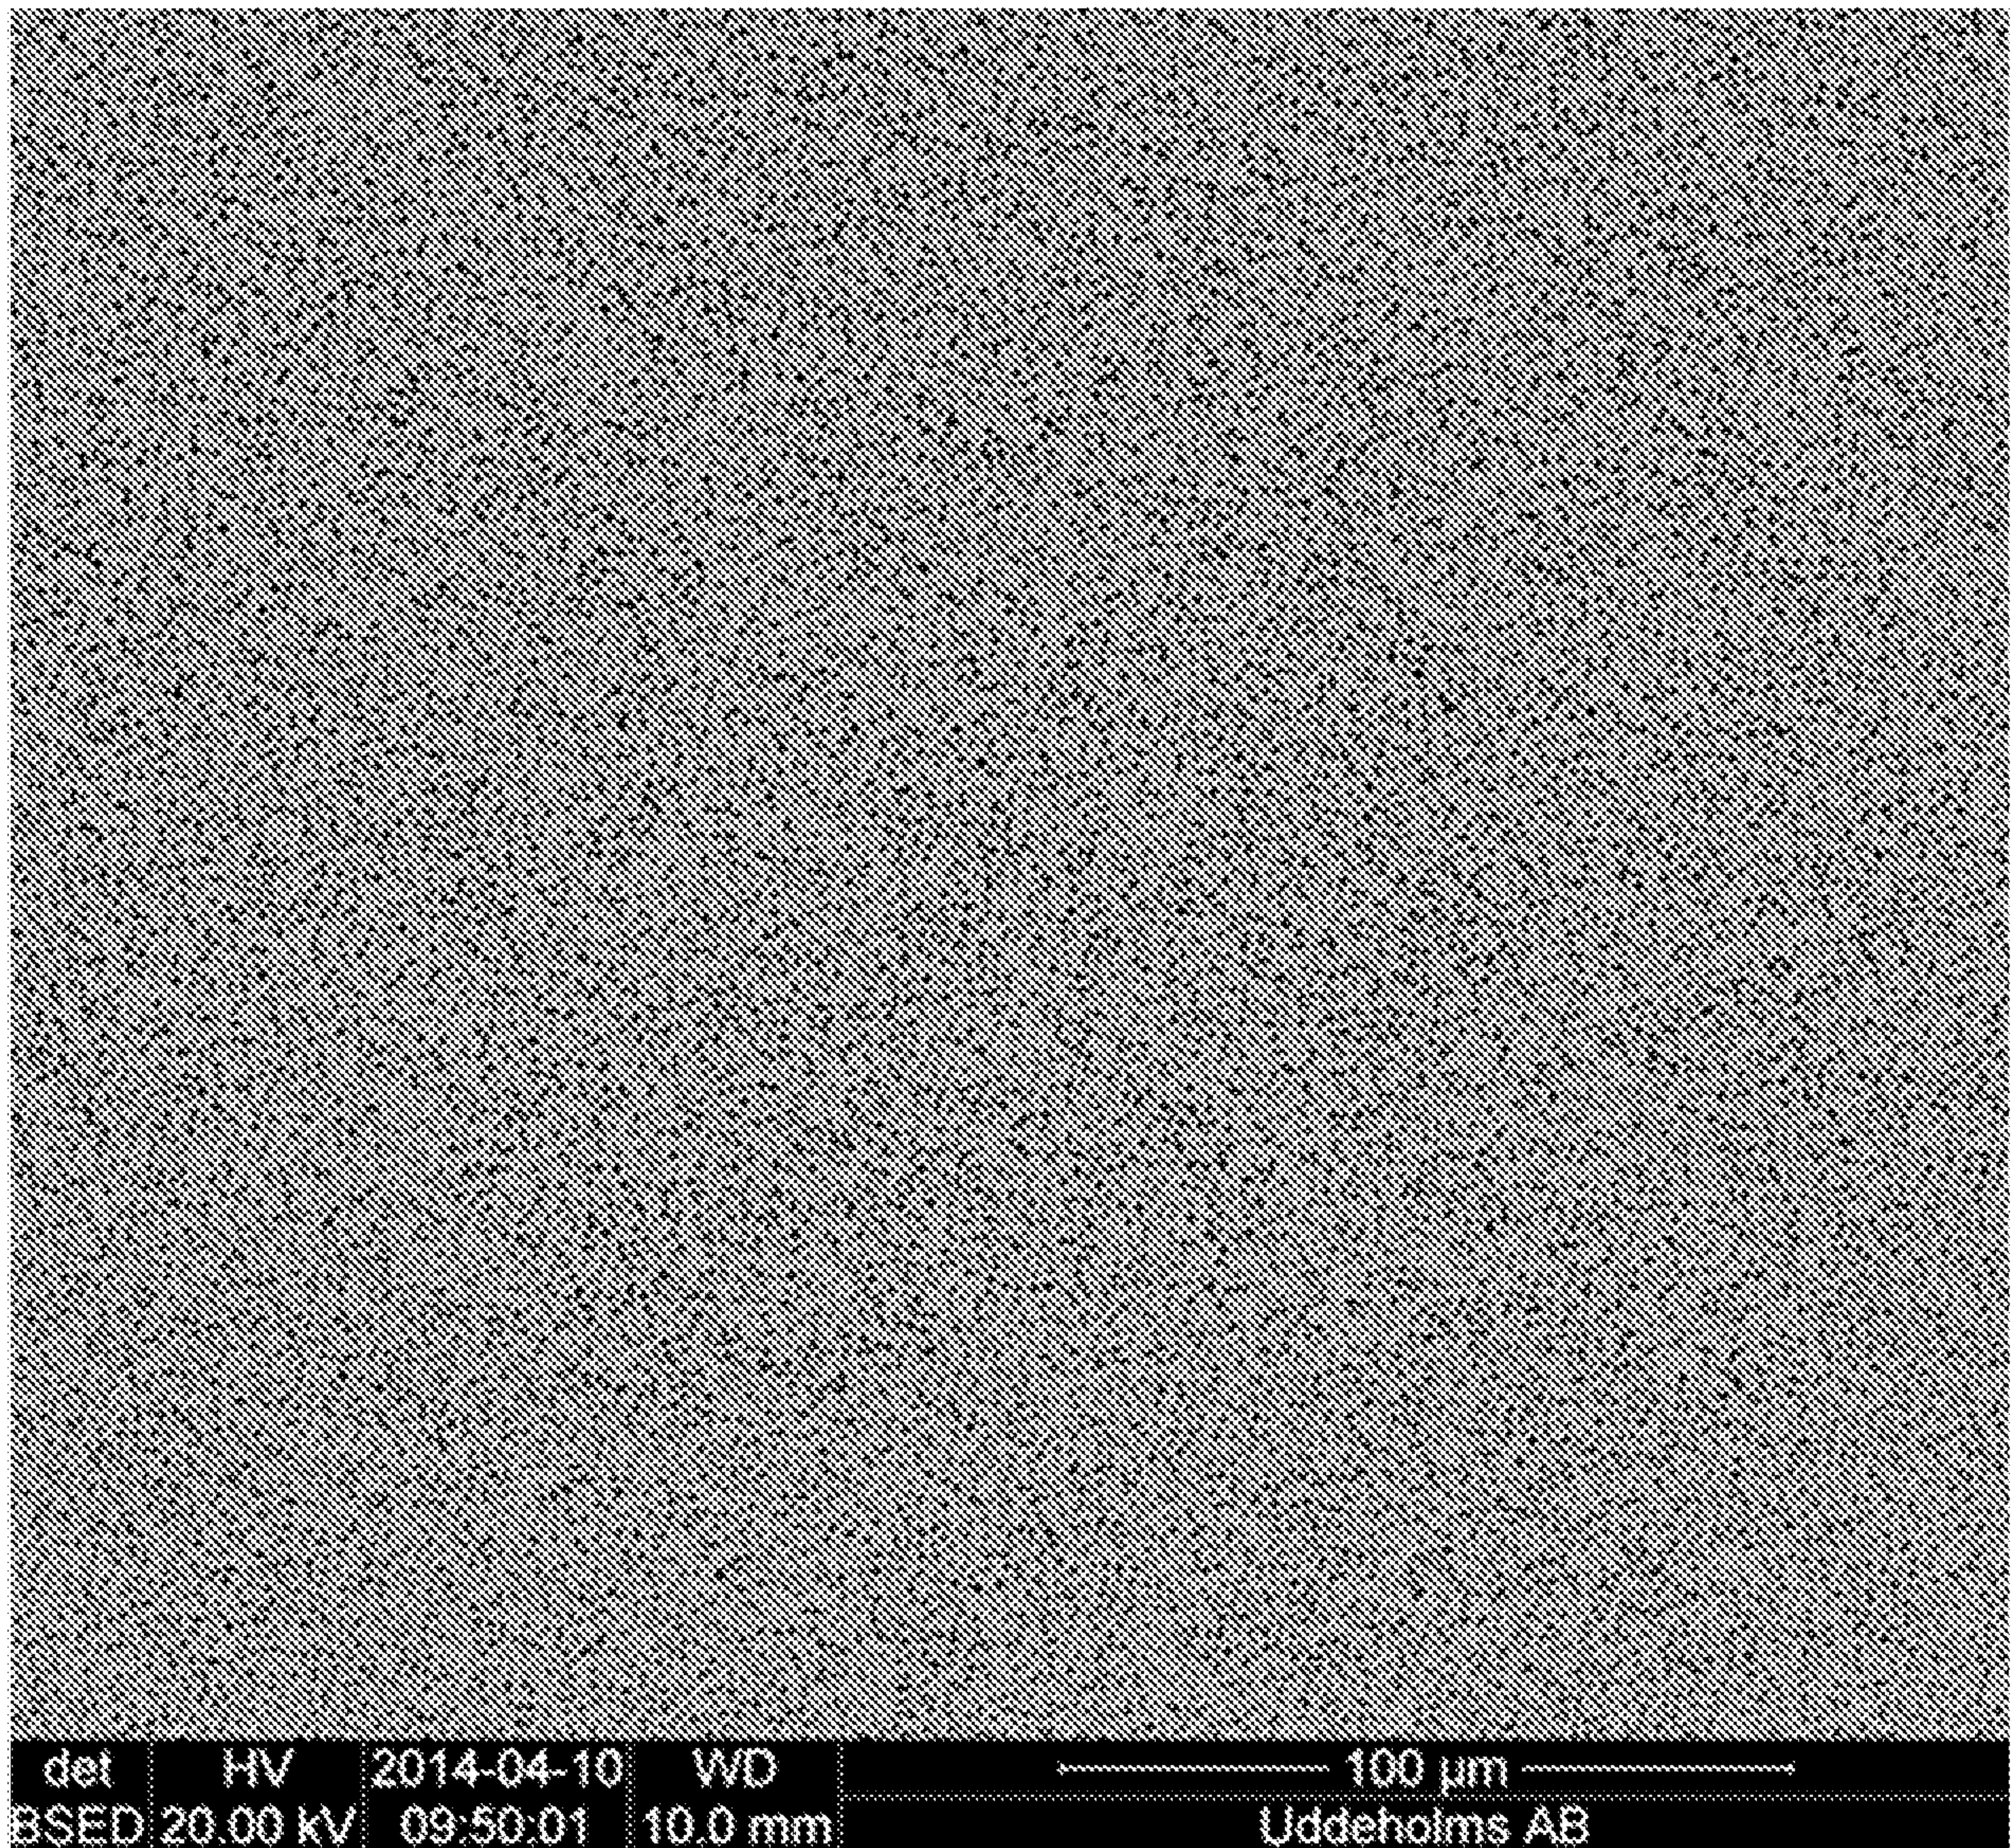


Figure 1. Microstructure of the inventive steel. Small and uniformly distributed MX-particles (black phase) in the steel matrix.

2/2

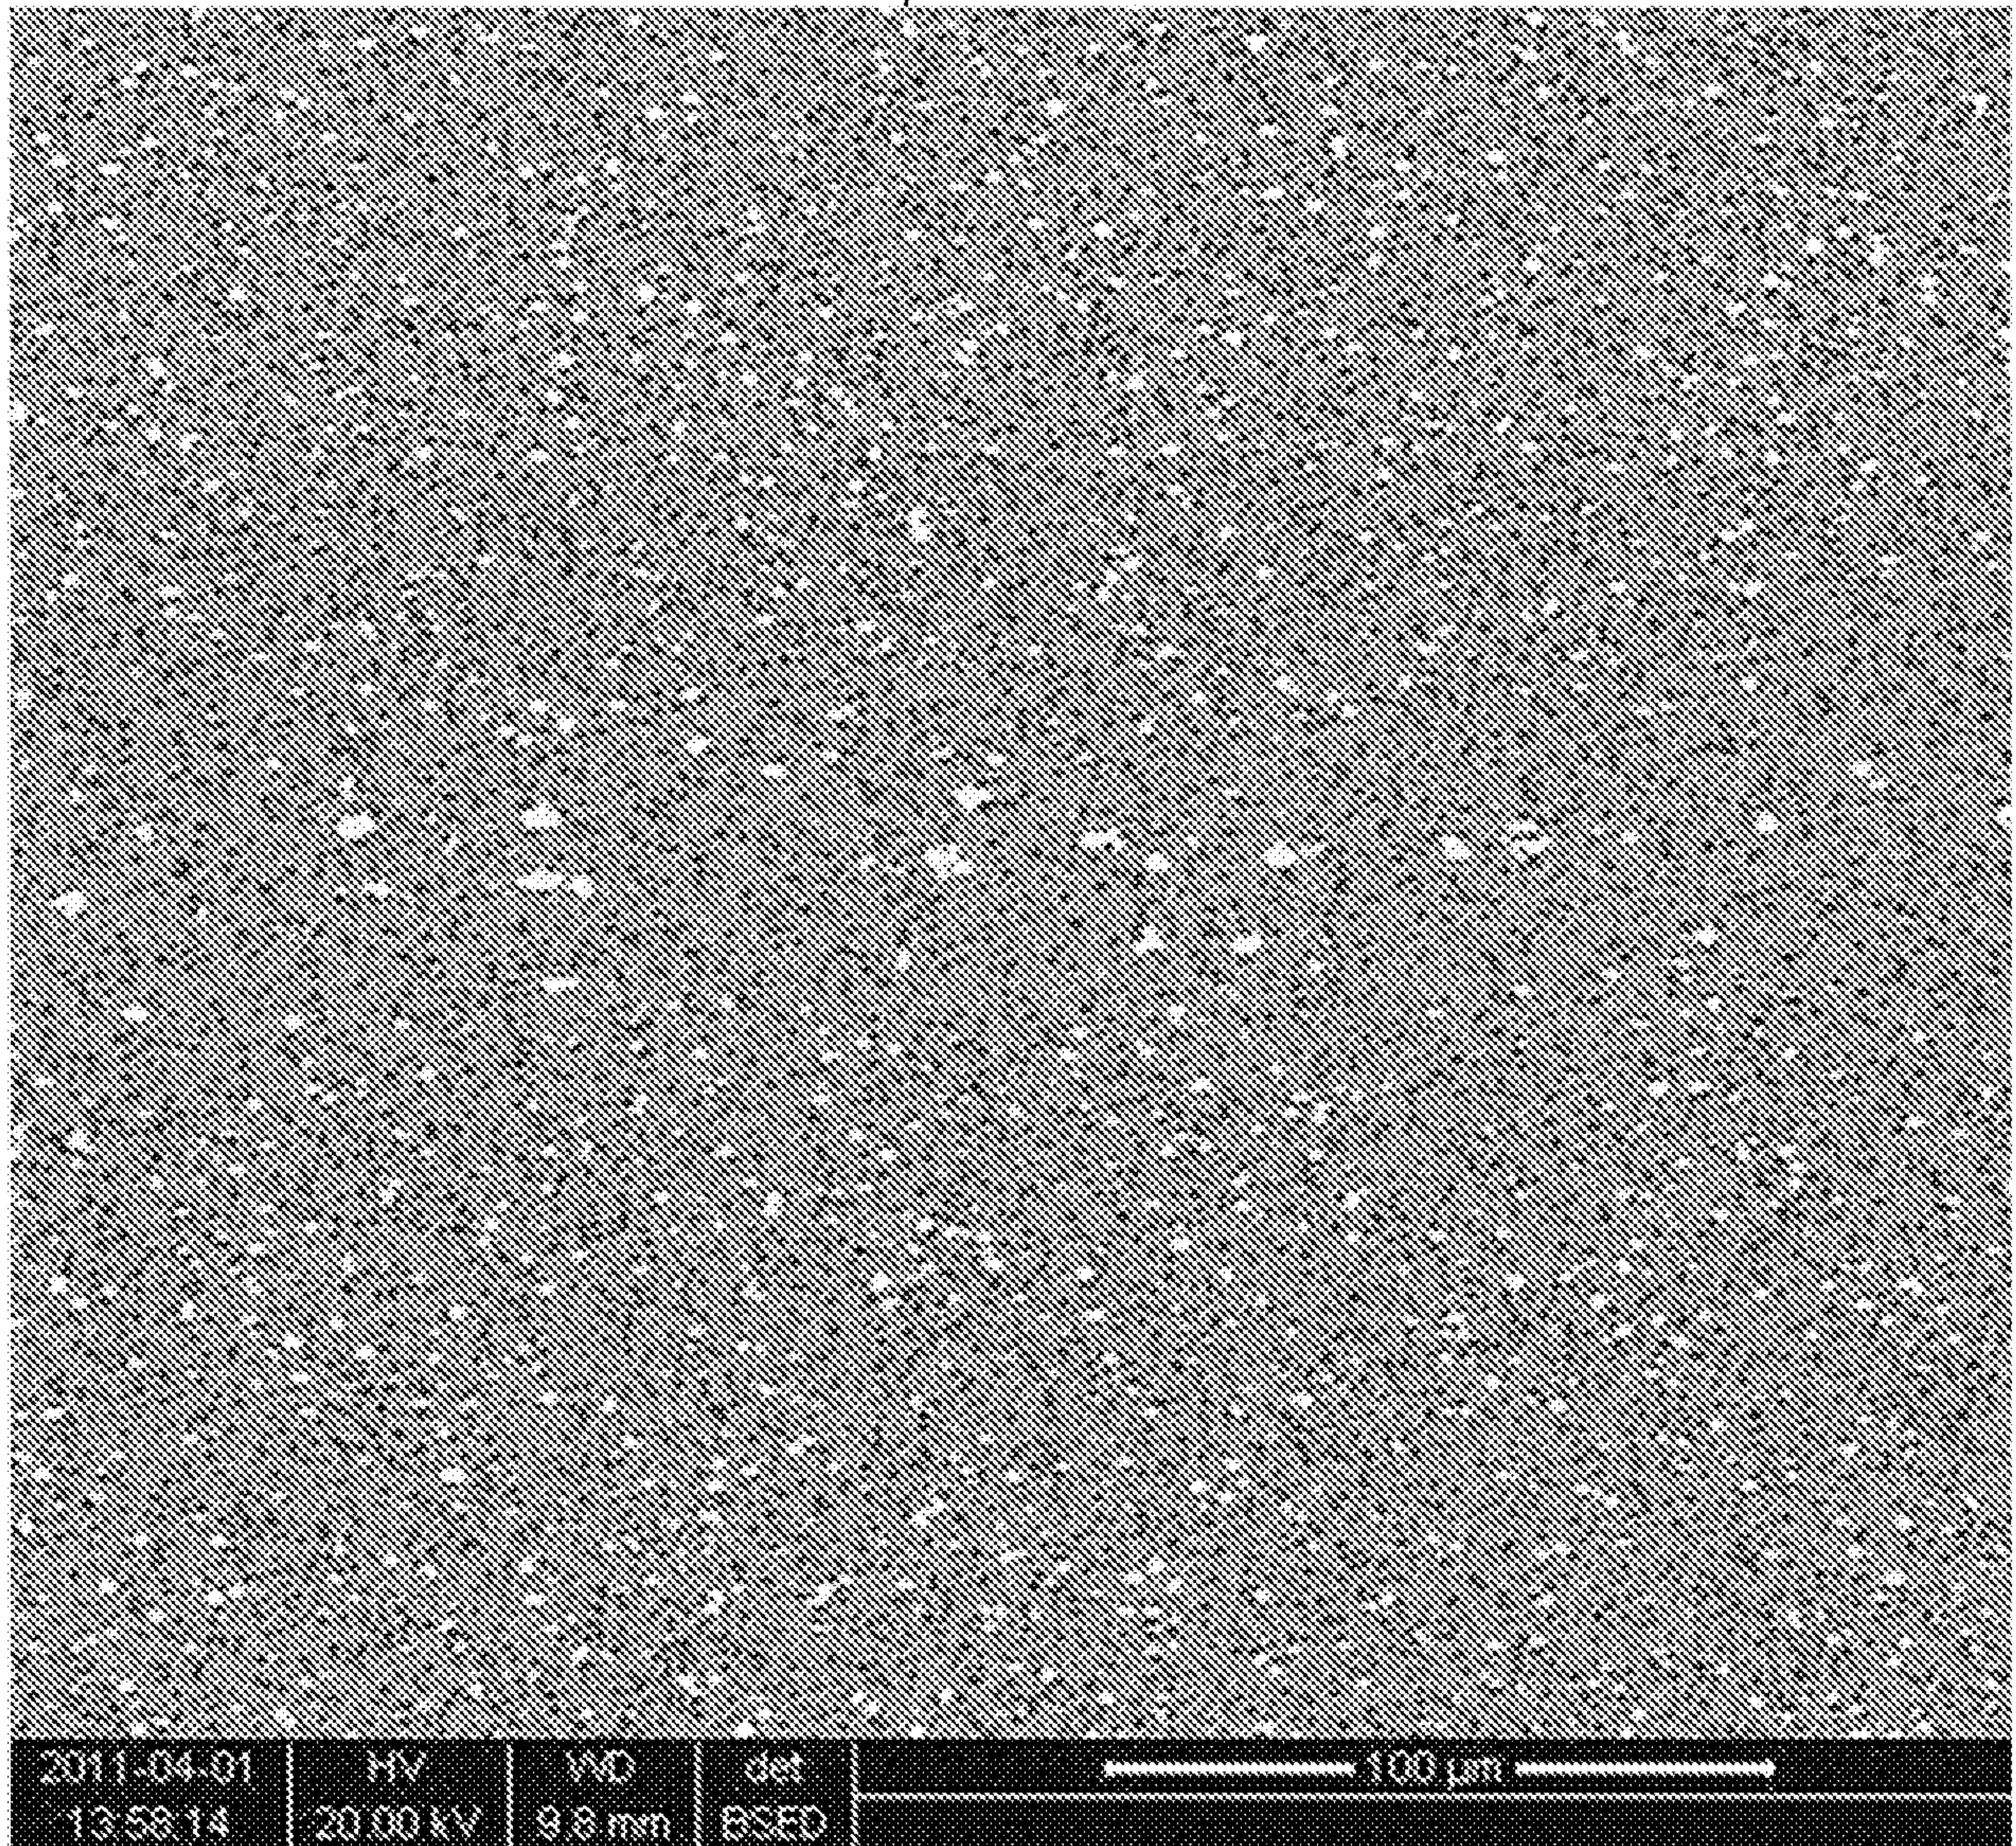


Figure 2. Microstructure of the comparative steel VANCROn®40. MX-particles (black phase) and M₆C-particles (white phase) in the steel matrix.