



(51) International Patent Classification:
H04L 1/00 (2006.01)

(21) International Application Number:
PCT/EP2012/059311

(22) International Filing Date:
18 May 2012 (18.05.2012)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **NOKIA SIEMENS NETWORKS OY** [FI/FI]; Karaportti 3, FI-02610 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RAAF, Bernhard** [DE/DE]; Knollerweg 14, 82061 Neuried (DE). **TIIR-OLA, Esa Tapani** [FI/FI]; Porttikellonkuja 12, FI-90450 Kempele (FI). **FREDERIKSEN, Frank** [DK/DK]; Hornbækvej 4, DK-9270 Klarup (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: NETWORK NODES AND METHODS FOR TRANSMITTING LOW-LATENCY DATA IN A RADIO COMMUNICATIONS SYSTEM

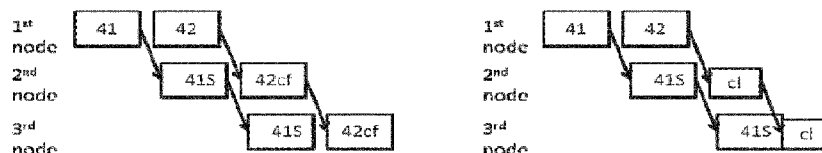


Fig. 9

(57) Abstract: The present invention refers to methods and network nodes transmitting data in a radio communications system. In particular, the present invention refers to a method comprising the steps of receiving a portion of a data unit; and starting a processing of the portion of the data unit prior to receiving remaining portions of the data unit, and to a network node configured for executing the method.

DESCRIPTION

NETWORK NODES AND METHODS FOR TRANSMITTING LOW-LATENCY DATA IN A RADIO COMMUNICATIONS SYSTEM

5

FIELD OF THE INVENTION

The present invention relates to transmitting data in a radio communications system. Particularly, the present invention refers to methods for the transmitting; and network nodes configured to perform the transmitting.

BACKGROUND OF THE INVENTION

15 In current system designs for mobile or wireless communication, in particular in the context of the 3rd Generation Partnership Project (3GPP), there is a clear tendency to optimize the standardized system primarily for maximum spectral efficiency and maximized data throughput. Additionally, latency is a key issue as well, which is also under consideration when specifying systems and their operation.

25 One-way latency in a communications system is defined as the delay from when a data packet is available for transmission in one end until it is available for further processing in the receiving end, while two-way or round-trip latency is the sum of the latencies in both directions, e.g. the time it takes for a response on a packet to become available at the transmitter of that packet.

35 Latency will limit the achievable data rate, and is inherent in all protocols, as e.g. TCP/IP, for basically all applications. As an example, whenever a handshaking between peers on both sides of a communication line is needed e.g. in a request-response way, one peer needs to wait until

information is sent to the other peer and subsequently the answer is received. This waiting time, i.e. the latency, limits the achievable throughput in practice, even if an unlimited amount of data could be sent per time interval.

5

Latency is in particular an issue for multi-hop or relaying systems where data have to transverse several hops where each link between nodes will have its own individual Hybrid automatic repeat request (HARQ) loop, but latency could also be an issue for conventional single hop systems.

There are several ways to increase throughput, partly by increasing the spectral efficiency but mainly by exploiting more resources, e.g. using more base stations, more spectrum and more antennas per base station and user equipment (UE).

It is much harder to improve latency: the main tools are to reduce the time span of a physical layer packet (smaller Transmission Time Interval TTI, currently 1ms in LTE after 2ms in HSDPA and 10 ms in UMTS), decrease cell sizes in order to reduce the travel time of the signals (speed of light), or more generally put peer nodes as close as possible to the UE (e.g. from RNC in UMTS to the eNB in LTE) and to do the processing in the nodes quicker. The first cost spectral efficiency due to increased control overhead, while the second requires more base stations and more functionality to be implemented in them and the latter costs more powerful processing elements.

It is therefore a problem to reduce the latency in current communication systems, and thus there is still a need for an improved method for processing data in a radio communications network.

SUMMARY OF THE INVENTION

Object of the present invention is improving of data transmission in a radio communications system.

5 This object is achieved by a method for transmitting data in a radio communications system comprising the steps of receiving a portion of a data unit; and starting a processing of the portion of the data unit prior to receiving remaining portions of the data unit.

10 As an advantage of the method the overall transmission latency in the radio communications network is improved.

15 According to some embodiments of the present invention, the processing comprises a forwarding of the portion of the data unit.

According to further embodiments of the present invention, the method further comprises the step of checking the data unit for eligibility for further processing.

20

As an advantage, the method allows for a low latency yet robust signaling scheme by checking the eligibility of the data unit.

25 According to further embodiments of the present invention, the method further comprises the step of receiving a further portion of the data unit, wherein the step of checking is based on the further portion of the data unit.

30 According to further embodiments of the present invention, the checking comprises checking of each received portion of the data unit.

As an advantage, each transmitted portion of the data unit can be checked individually regarding its eligibility, as well as the data unit as a whole.

- 5 According to further embodiments of the present invention, the method further comprises one or more of the following steps of:
- sending a speculation indication, the speculation indication indicating a possible recalling of the data unit
10 in case that the checking results in the data unit not to be considered eligible for further processing;
 - sending a confirmation indication, the confirmation indication indicating that the checking results in the data unit being considered eligible for further processing;
 - 15 - sending a cancellation indication, the cancellation indication indicating that the data unit and/or any portion of the data unit is to be cancelled;
 - sending an instruction for preferred processing of the data unit, indicating a preferred processing of the data unit;
 - 20 - sending an instruction for deferred processing of the data unit, indicating a deferred processing of the data unit; or
 - sending, in case of the checking indicating that a previously received portion of the data unit is not considered eligible for further processing, a corrective
25 information, the corrective information allowing for correcting the previously received portion of the data unit.

As an advantage, the overall system latency is reduced as processing of the data unit, or at least processing of
30 portions of the data unit, can already start prior to receiving the complete data unit. In case of a data unit which later turns out not to be eligible for further processing, the speculation indication allows to prepare for a later cancelling, thereby reducing the processing time
35 necessary for the actual cancelling and avoiding non cancellable or non revertible effects.

According to further embodiments of the present invention,
the method further comprises the step of assigning an
identification to the data unit, the identification allowing
5 to uniquely identify the data unit.

As an advantage, portions of the data unit as well as
speculation indications, confirmation indications, cancelling
indications or instructions for preferred or deferred
10 processing can easily be linked to the respective portions
during the processing.

According to further embodiments of the present invention,
the method further comprises the step of assigning a
15 likelihood value to the data unit, the likelihood value
indicating a likelihood for a need for a correction or a
cancelling of the data unit.

As an advantage, it is possible to take precautions regarding
20 a possible correcting or cancelling of the data unit and
assign processing resources more optimally by prioritizing
such data units that have a lower risk of requiring
cancellation or correction later on.

25 The object of the present invention is also achieved by a
method for transmitting data in a radio communications system
comprising one or more of the following steps:

- forwarding, upon receiving a portion of a data unit
comprising a speculation indication, the portion of the data
30 unit, and preparing for a possible cancelling of the data
unit;

- postponing, upon receiving a portion of a data unit
comprising a speculation indication, a forwarding of the
portion of the data unit until a confirmation indication is
35 received;

- forwarding, upon receiving a confirmation indication, the portion of the data unit and any previously received, postponed portions of the data unit;
- cancelling, upon reception of a cancelling indication, the data unit and/or any portion of the data unit;
- correcting, upon receiving a corrective information, a previously received portion of the data unit which is not considered eligible for further processing, and forwarding the corrected previously received portion of the data unit;
- or
- finalizing, upon complete reception of the data unit, the transmitting of the data unit.

As an advantage of the method, the overall transmission latency in the radio communications network is improved.

According to some embodiments of the present invention, the method further comprises the step of interpreting, after a defined time or upon complete reception of the data unit, a missing of a cancellation indication in the data unit as a confirmation indication for the data unit.

As an advantage, signaling overhead is reduced, as it is not necessary to send an explicit confirmation indication, and instead interpret the absence of a cancelling indication after a certain, defined time or in the last portion of the data unit as confirmation indication.

The object of the present invention is also achieved by a network node configured for transmitting data in a radio communications system, the network node comprising:

- receiving means configured for receiving a portion of a data unit; and

- processing means configured for starting a processing of the portion of the data unit prior to receiving remaining portions of the data unit.

- 5 As an advantage of the network node, the overall transmission latency in the radio communications network is improved.

The object of the present invention is also achieved by a network node configured for transmitting data in a radio
10 communications system, comprising one or more of the following:

- forwarding means configured for forwarding, upon receiving a portion of a data unit comprising a speculation indication, the portion of the data unit, and preparing for a possible
15 cancelling of the data unit;

- postponing means configured for postponing, upon receiving a portion of a data unit comprising a speculation indication, a forwarding of the portion of the data unit until a confirmation indication is received;

20 - forwarding means configured for forwarding, upon receiving a confirmation indication, the portion of the data unit and any previously received, postponed portions of the data unit;

- cancelling, upon reception of a cancelling indication, the data unit and/or any portion of the data unit;

25 - correcting means configured for correcting, upon receiving a corrective information, a previously received portion of the data unit which is not considered eligible for further processing, and forwarding the corrected previously received portion of the data unit; or

30 - finalizing means configured for finalizing, upon complete reception of the data unit, the transmitting of the data unit.

As an advantage of the network node, the overall transmission
35 latency in the radio communications network is improved.

Further embodiments of the present invention are provided with the corresponding dependent claims.

5 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more clearly understood from the following description of the preferred embodiments of the invention read in conjunction with the attached drawings, in
10 which:

Fig. 1 shows an implementation of the present invention according to some embodiments of the present invention;

15 Fig. 2 shows an implementation of the present invention according to some embodiments of the present invention;

Fig. 3 shows an implementation of the present invention according to some embodiments of the present invention.

20

Fig. 4 shows an implementation of the present invention according to some embodiments of the present invention;

Fig. 5 shows an implementation of the present invention
25 according to some embodiments of the present invention;

Fig. 6 shows an implementation of the present invention according to some embodiments of the present invention;

30 Fig. 7 shows an implementation of the present invention according to some embodiments of the present invention;

Fig. 8 shows an implementation of the present invention according to some embodiments of the present invention;

5 Fig. 9 shows an implementation of the present invention according to some embodiments of the present invention; and

Fig. 10 shows an implementation of the present invention according to some embodiments of the present invention.

10

DESCRIPTION OF THE PREFERRED EMBODIMENTS

According to the present invention, it is proposed to introduce speculative processing and speculative
15 communication into mobile or wireless communications systems, in particular to protocol stacks. Communications in such a communications system is mainly done on data units, or data packages. Typical examples are so-called protocol data units (PDUs). However, the present invention applies to any kind of
20 data units to be transmitted from one network node, or sender, to another network node, or receiver. The transmitting of data units can furthermore comprise a relay node, or hop, which acts as a receiver in one step of the method and as a sender in a further step of the method, as it
25 receives a data unit transmitted from the original sender and forwards the data unit to the final receiver.

Typically a network node, or protocol entity, only starts processing of a PDU after the PDU has been fully received
30 from the next lower or higher or peer protocol entity. According to some embodiments of the present invention, it is proposed to already start early to forward partial PDUs, or portions of a data unit, to the next protocol entity to allow that one to start working on the initial part, or portion, of
35 the PDU as well.

Accordingly, fig. 1 shows a method for transmitting data in a radio communications system. The method comprises the steps of receiving 11 a portion of a data unit, and starting a processing 12 of the portion of the data unit prior to receiving remaining portions of the data unit. It should be noted that already the first network node, or protocol entity, in a chain receives a portion of a data unit, e.g. from a data source, another protocol layer, or a user.

10 According to further embodiments, as shown in Fig. 1, the processing 12 further comprises a forwarding 121 of the portion of the data unit. This applies, for instance, in case of a relay node, or hop, involved in the transmitting.

15 According to further embodiments of the present invention, as shown in fig. 2 the method further comprises the steps of receiving 13 a further portion of the data unit, and checking 14, based on the further portion of the data unit, the data unit for eligibility for further processing. A typical example is an approach called Cyclic Redundancy Check (CRC), which adds information at the end of a data unit, or packet, that is used to identify and catch incorrectly received data units. According to some embodiments of the invention, the further portion of the data unit comprises control data.

25

However, it is not necessary to receive the further portion of the data unit in order to check the data unit for eligibility for further processing. The checking is also possible based on other measures. Examples are cases where there is some additional side information available on the data. One example would be multiple CRC sums which cover only part of the data unit, or a pre-knowledge on certain aspects of the data unit e.g. some fields may only contain values of a certain predefined range to be eligible. Then a data unit can be determined not to be eligible based only on parts of that data unit e.g. if there is a field with illegal value or a partial CRC sum doesn't match. On the other hand some parts of a data unit may have any content, say a free payload part after the header, then there data unit can be determined to

be eligible for forwarding after checking the header as there is no constraint on the payload and therefore no risk for an ineligible payload.

- 5 The checking 14 comprises, according to further embodiments of the invention, checking of each received portion of the data unit.

10 In case of the checking 14 resulting in the data unit not to be considered eligible for further processing, i.e. the data unit being incorrectly received or being not or no longer valid for some reason, the invention proposes to provide a kind of "emergency break" to allow to cancel processing of an already forwarded and/or speculatively executed or
15 speculatively communicated PDU in case it is determined eventually that the PDU should not have been forwarded and/or executed. Furthermore, the invention proposes to allow for data units to be processed in a preferred or deferred manner, as well as for providing corrective information to correct a
20 previously, incorrectly received portion of the data unit.

In particular, as shown in fig. 3, according to some embodiments of the invention the method further comprises one or more of the following steps:

25

- Sending 15a a speculation indication, the speculation indication indicating a possible recalling of the data unit in case that the checking 14 results in the data unit not to be considered eligible for further processing. The
30 speculation indication to the next entity can be used to make it aware there may be a need to revoke the data unit. This indication can be protocol entity and/or PDU-specific. Even before receiving the final confirmation of the data unit, the peer can already forward the data unit to further
35 communication entities, again with a speculation indication and possibly cancelling it if the original data unit was cancelled. In a similar way the speculation indication can be chained over different protocol layers or entities.

- Sending 15b a confirmation indication, the confirmation indication indicating that the checking 14 results in the data unit being considered eligible for further processing.

5 In the case the whole data unit received by next higher or lower protocol entity is true, the processing of the data unit is continued as usual. For this purpose, instead of the speculation indication, or emergency break, a confirmation information can be sent, confirming the sent data unit is
10 valid.

- Sending 15c a cancellation indication, the cancellation indication indicating that the data unit and/or any portion of the data unit is to be cancelled. Cancelling here can also
15 be understood as nullifying the data unit, or declaring it as invalid.

- Sending 16, 17 an instruction for preferred or deferred processing of the data unit, indicating a preferred or
20 deferred processing of the data unit, i.e. the data unit is to be processed earlier or later than other data units. When receiving several PDUs, or data units, this allows to start processing the ones that e.g. would be most easily corrected, i.e. one that has only limited impact. As an example, it is
25 proposed to rather process an ordinary data unit that simply causes a corresponding data unit to be forwarded to the next entity rather than a release message that would cause a release of the connection and significant changes to the internal states and variables.

30

- Sending 18, in case of the checking 14 indicating that a previously received portion of the data unit is not considered eligible for further processing, a corrective
information, the corrective information allowing for
35 correcting the previously received portion of the data unit. In case only a part of the data unit is false, the corrective information can be applied to the data unit as follows: The receiver stores the partially correctly received PDU. The transmitter (re)-transmits the missing or erroneous (part of)

the PDU or an information allowing to correct erroneous parts. The receiver reassembles the PDUs until a complete data unit corresponding to next protocol entity is received. The next entity (i.e. in the receiver) can then either decide to cancel the original data unit and send a cancellation indication to the next entity and instead process the correct data unit, or correct the action, e.g. send itself a corrective information to the next entity. The latter typically applies if the correction applies to the data-payload rather than to the header of the data unit, while the former would typically be done if the header happens to turn out to have been corrupted. Errors introduced by transmission errors on portions on the data unit, or sub-packets, which form a PDU can also be covered by this means: the receiver does not have to wait for the correct reception of the entire PDU but can already react on it and (at least partially) forward it. Once the missing portion of the data unit, or sub-packet, arrives it is forwarded as a corrective information to the next entity to complete the PDU that was already (partially) forwarded. Instead of sending deliberately an erroneous portion of the data unit, it is also possible to indicate explicitly where a part is missing. This avoids that the next entity triggers unnecessary actions which would most likely have to be cancelled.

Furthermore, according to some embodiments of the invention, as shown in fig. 3 the method further comprises the step of assigning 19a an identification to the data unit, the identification allowing to uniquely identify the data unit. This is in particular helpful to link the above described indications and instructions to the respective data unit, as assigning a specific identification to a forwarded PDU enables to later on associate cancellation or corrections to the correct PDU. Alternatively the linking can be done in an implicit way, e.g. similarly as in a synchronous HARQ scheme.

According to further embodiments of the invention, as shown in fig. 3 the method further comprises the step of assigning 19b a likelihood value to the data unit, the likelihood value indicating a likelihood for a need for a correction or a cancelling of the data unit. I.e. it is proposed to add an

indication of the likelihood that the PDU may need to be corrected or cancelled in order to assist the peer which PDUs to process with priority. Basically the receiver is well advised to prioritize the data units that have a low

5 likelihood of needing to be cancelled or corrected. E.g. if two data units are received simultaneously, the one that is less prone to be cancelled is forwarded first and only later the other ones. Prioritizing in this way the risk that the already forwarded portions of the data unit will need to be
10 cancelled is minimized, as these units would have been forwarded in vain. The likelihood that forwarded portions of data units can be maintained is maximized; these have been then forwarded usefully.

15 With regard to fig. 3, it has to be noted that the steps 15a, 15b, 15c, 16, 17, 18, 19a, 19b do not need to be executed in sequence, nor is it necessary to execute all of these steps. The asterisk indicates that one or more of the steps 15a, 15b, 15c, 16, 17, 18, 19a, 19b can be executed in any
20 sequence, and each step can be executed once or several times or not at all during the process of transmitting a data unit.

Fig. 4 shows another implementation according to some embodiments of the current invention. As shown in fig. 4, the
25 proposed method for transmitting data in a radio communications system comprises one or more of the following steps:

- Forwarding 21, upon receiving a portion of a data unit
30 comprising a speculation indication, the portion of the data unit, and preparing for a possible cancelling of the data unit. The following examples show how such a preparing for cancelling can be implemented in different cases. The data unit may e.g. cause data to be stored in a database, then the
35 previous, overwritten content of the database may be temporarily stored to allow the original state of the database to be restored in case a cancellation becomes necessary. In order to avoid further changes to the entry in the database, the entry may be held locked to make sure it

remains available for being restored. Any actions that cannot be reverted, e.g. deletion of entire records in the database can be postponed to make sure the cancelling is not impossible. Another example is that in response to the data unit some information is to be retrieved and sent (e.g. back to the requestor, in this case the information may already be retrieved and prepared for sending i.e. formatted in a suitable way but not be sent yet. In particular changes to the outside of the device which may easily happen in control applications like igniting an oven, detaching some physical units or printing and ejecting some information/goods from a machine e.g. vending machine all actions that can typically not be reverted easily, are prepared, e.g. the oven may be pre-heated the fixture of the unit being prepared for unlocking, the goods of the vending machine retrieved from storage and aligned with the release hole, but the action is not finally and irreversibly being executed.

- Postponing 22, upon receiving a portion of a data unit comprising a speculation indication, a forwarding of the portion of the data unit until a confirmation indication is received. This is in particular applicable in case the subsequent processing unit or step does not support handling of cancellation indications e.g. because it is a legacy device not having implemented the invention.

- Forwarding 23, upon receiving a confirmation indication, the portion of the data unit and any previously received, postponed portions of the data unit.

- Cancelling 24, upon reception of a cancelling indication, the data unit and/or any portion of the data unit. The following examples show how such a cancelling can be implemented in different cases. In case of a database, any change being done can be reverted, also called rerolled including any potential subsequent changes i.e. changes that had been done in response to the change that is cancelled. Another example is that information that has been retrieved in response to the data unit to be sent subsequently and

prepared for sending is discarded. Physical changes to the outside of the device are not done and any preparations are reverted e.g. an oven is not ignited but let cool down again, physical units are not detached but on the contrary re-
5 secured, and retrieved goods are not ejected but brought back into the storage.

- Correcting 25, upon receiving a corrective information, a previously received portion of the data unit which is not
10 considered eligible for further processing, and forwarding the corrected previously received portion of the data unit. According to some embodiments of the invention, upon receiving a corrective information, a previously received portion of the data unit is cancelled, and a new, correct
15 copy of the portion of the data unit is transmitted.

- Finalizing 26, upon complete reception of the data unit and/or a confirmation indication, the transmitting of the data unit. The following examples show how such a finalizing
20 can be implemented in different cases. In case of a database, any change being done are submitted to the database and the records are unlocked so further action can be done on the new values by other processes and any previously stored values or information to reroll the transaction can be discarded.
25 Another example is that information that has been retrieved in response to the data unit is finally sent. Physical changes to the outside of the device can now finally be done e.g. an oven is ignited, physical units are detached, and retrieved goods are now ejected by the vending machine.

30

Fig. 5 shows another implementation according to some embodiments of the current invention. As shown in fig. 5, the method further comprises the step of interpreting 27, after a defined time or upon complete reception of the data unit, a
35 missing of a cancellation indication unit as a confirmation indication for the data unit.

Fig. 6 shows another implementation according to some embodiments of the current invention. In particular, fig. 6 shows a network node 31 configured for transmitting data in a radio communications system, the network node comprising:

- 5 - receiving means 311 configured for receiving a portion of a data unit; and
- processing means 312 configured for starting a processing of the portion of the data unit prior to receiving remaining portions of the data unit.

10

According to further embodiments, the processing means 312 are further being configured for forwarding the portion of the data unit.

- 15 According to some embodiments, the network node 31 further comprises checking means 313 configured for checking, based on a further portion of the data unit, the data unit for eligibility for further processing.

- 20 According to further embodiments, the network node 31 further comprises one or more of the following:

- sending means 314a configured for sending a speculation indication, the speculation indication indicating a possible recalling of the data unit in case that the checking results
- 25 in the data unit not to be considered eligible for further processing;

- sending means 314b configured for sending a confirmation indication, the confirmation indication indicating that the checking results in the data unit being considered eligible
- 30 for further processing;

- sending means 315 configured for sending a cancellation indication, the cancellation indication indicating that the data unit and/or any portion of the data unit is to be cancelled;

- sending means 314c configured for sending an instruction for preferred processing of the data unit, indicating a preferred processing of the data unit;

- sending means 314d configured for sending an instruction for deferred processing of the data unit, indicating a deferred processing of the data unit; or

- sending means 314e configured for sending, in case of the checking indicating that a previously received portion of the data unit is not considered eligible for further processing, a corrective information, the corrective information allowing for correcting the previously received portion of the data unit.

According to some embodiments, the network node 31 further comprises assigning means 316a configured for assigning an identification to the data unit, the identification allowing to uniquely identify the data unit.

According to further embodiments, the network node 31 further comprises assigning means (316b) configured for assigning a likelihood value to the data unit, the likelihood value indicating a likelihood for a need for a correction or a cancelling of the data unit.

Fig. 6 also shows another implementation according to some embodiments of the current invention. In particular, fig. 6 shows a network node 32 configured for transmitting data in a radio communications system, comprising one or more of the following:

- forwarding means 321a configured for forwarding, upon receiving a portion of a data unit comprising a speculation indication, the portion of the data unit, and preparing for a possible cancelling of the data unit;

- postponing means 322 configured for postponing, upon receiving a portion of a data unit comprising a speculation indication, a forwarding of the portion of the data unit until a confirmation indication is received;

- forwarding means 321b configured for forwarding, upon receiving a confirmation indication, the portion of the data unit and any previously received, postponed portions of the data unit;
- 5 - cancelling means 323 configured for cancelling, upon reception of a cancelling indication, the data unit and/or any portion of the data unit;
- correcting means 324 configured for correcting, upon receiving a corrective information, a previously received
10 portion of the data unit which is not considered eligible for further processing, and forwarding the corrected previously received portion of the data unit; or
- finalizing means 325 configured for finalizing, upon complete reception of the data unit, the transmitting of the
15 data unit.

According to some embodiments, the network node 32 further comprises interpreting means 326 configured for interpreting, after a defined time or upon complete reception of the data
20 unit, a missing of a cancellation indication in the data unit as a confirmation indication for the data unit.

Fig. 7 shows another implementation according to some embodiments of the current invention. In particular, fig. 7
25 shows a data unit 4, comprising a first portion 41 of the data unit 4 and a further portion 42 of the data unit 4. As described above, the data unit is forwarded in portions.

Furthermore, fig. 7 shows on the left side a conventional forwarding of a data unit 4 from a first network node to a
30 second network node. This can also be called one hop forwarding, as two network nodes are involved and the data unit has to take two hops. In the upper and lower row, portions of a data unit sent by the first and second network node are shown. Time is indicated from the left to the right
35 in fig. 7.

As shown in fig. 7, conventionally, a data unit 4 needs to be fully received at the first network node before being forwarded to the second network node. According to the present invention, however, the data unit 4, or in particular a portion 41, 42 of the data unit is forwarded early. As shown on the right side of fig. 7, the first received portion 41 of the data unit 4 is forwarded already when only this first portion 41 was received. A second portion 42 of the data unit 4, and any further portion, is forwarded upon receiving it. The advantage of this approach is that the data unit 4 is received at the second network node earlier compared to the conventional forwarding method. The saved time is indicated by the thick black arrow in fig. 7.

However, as described earlier, after an early forwarding of a first portion 41 of a data unit 4, a further portion 42 of the data unit 4 may turn out to be erroneous later. This is shown in fig. 8. Conventionally, a data unit 4 turning out to be erroneous is simply not forwarded. However, according to the invention, the data unit 4 might already have been partly forwarded, i.e. a first portion 41 of the data unit 4 might have been forwarded earlier, as shown in fig. 8 on the left. A further portion 42 of the data unit 4 then turns out to be erroneous.

To solve this problem, according to some embodiments of the present invention, if a first portion 41 of the data unit 4 was already forwarded, this first portion 41 is marked as being speculatively forwarded, indicated by an "s" in fig. 8, right side. If the further portion 42 of the data unit 4 turns out to be erroneous, a cancelation indication is sent, indicated by a "cl" in fig. 8, right side.

As an advantage of the method, already sent portions 41 of the data unit 4, or the data unit 4 as a whole, can be cancelled. The final recipient is aware that the data unit 4 may need to be revoked.

Fig. 9 shows another implementation according to some embodiments of the current invention. In particular, fig. 9 shows the case of three network nodes being involved in the method. As shown on the left side of fig. 9, portions 41, 42 of a not fully confirmed data unit 4 are forwarded with a speculation indication, indicated by "s" in fig. 9, and only marked as confirmed with a confirmation indication later, indicated by "cf" in fig. 9.

As shown on the right side of fig. 9, if it turns out later that the data unit 4, or portions 41, 42 of the data unit 4, are invalid, a cancellation indication is forwarded, indicated by "cl" in fig. 9.

Fig. 10 shows another implementation according to some embodiments of the current invention. In particular, fig. 10 shows an alternative handling on a subsequent hop: As shown in fig. 10, if a forwarded cancellation indication arrives early enough, the forwarding of a first portion 41 of the data unit 4 can already be cancelled. This is applicable in particular if there is some processing involved in the network nodes in addition to a simple forwarding, and if the cancellation indication is forwarded quickly, e.g. as a small data packet. Then the cancellation indication may arrive in time to avoid forwarding the first portion 41 of the data unit 4 on the next hop, as indicated by the crossed out portion 41 of the data unit 4 in fig. 10. The cancellation indication may also easily overtake previously sent portions, if those are marked as to be forwarded with lower priority or are marked as suffering a high risk of being subject to cancellation because intermediate nodes will then likely forward other portions instead.

The extra processing is indicated by a block arrow in fig. 10. It is done in vain, and any additional side-effects e.g. to internal states will have to be cancelled or reverted as well subsequently (not shown in fig. 10).

It should be noted that the proposed method of speculative forwarding of a data unit in a network can easily be used in conjunction with or on top of conventional network protocols, e.g. HARQ based on acknowledgements ACK/NACK, or any other
5 flow and/or error control mechanisms. In particular any additional protocols on lower layers can be applied which are not shown in the figures and not explained in detail for the sake of clarity.

10 The proposed method can be applied to any processing layer from the physical layer to the application layer in the OSI model of the communication protocol, or any other layered model for acknowledged information exchange between two or more units.

15

While specific embodiments and/or details of the invention have been shown and described above to illustrate the application of the principles of the invention, it is understood that this invention may be embodied as more fully
20 described in the claims, or as otherwise known by those skilled in the art (including any and all equivalents), without departing from such principles.

LIST OF ABBREVIATIONS:

	3GPP	3 rd Generation Partnership Project
	CRC	Cyclic Redundancy Check
5	eNB	enhanced Node B
	HARQ	Hybrid automatic repeat request
	HSDPA	High Speed Downlink Packet Access
	LTE	Long Term Evolution
	PDU	Protocol Data Unit
10	RNC	Radio network controller
	TTI	Transmission Time Interval
	UE	User equipment
	UMTS	Universal Mobile Telecommunications System

LIST OF REFERENCES:

	11, 13	receiving
	12	processing
5	121, 15c,	forwarding
	21, 23	
	14	checking
	15a, 15b,	sending
	16, 17, 18	
10	19a, 19b	assigning
	22	postponing
	24	cancelling
	25	correcting
	26	finalizing
15	27	interpreting
	31, 32	network node
	311	receiving means
	312	processing means
	313	checking means
20	314a, 314b,	sending means
	314c, 314d,	
	314e	
	315, 321a,	forwarding means
	321b	
25	316a, 316b	assigning means
	322	postponing means
	323	cancelling means

324	correcting means
325	finalizing means
326	interpreting means
4	data unit
5 41, 42	portion of a data unit

CLAIMS

1. Method for transmitting data in a radio communications system comprising the steps of:

- 5 - receiving (11) a portion of a data unit; and
- starting a processing (12) of the portion of the data unit prior to receiving remaining portions of the data unit.

2. Method according to claim 1, wherein the processing (12) comprises a forwarding (121) of the portion of the data unit.

10

3. Method according to any preceding claim, the method further comprising the step of:

- 15 - checking (14) the data unit for eligibility for further processing.

4. Method according to claim 3, wherein the checking (14) comprises checking of each received portion of the data unit.

20 5. Method according to claim 3 or 4, the method further comprising one or more of the following steps of:

- sending (15a) a speculation indication, the speculation indication indicating a possible recalling of the data unit in case that the checking (14) results in the data unit not
- 25 to be considered eligible for further processing;

 - sending (15b) a confirmation indication, the confirmation indication indicating that the checking (14) results in the data unit being considered eligible for further processing;

- 30 - sending (15c) a cancellation indication, the cancellation indication indicating that the data unit and/or any portion of the data unit is to be cancelled;

- sending (16) an instruction for preferred processing of the data unit, indicating a preferred processing of the data unit;

5 - sending (17) an instruction for deferred processing of the data unit, indicating a deferred processing of the data unit; or

10 - sending (18), in case of the checking (14) indicating that a previously received portion of the data unit is not considered eligible for further processing, a corrective information, the corrective information allowing for correcting the previously received portion of the data unit.

6. Method according to any preceding claim, the method further comprising the step of assigning (19a) an
15 identification to the data unit, the identification allowing to uniquely identify the data unit.

7. Method according to any preceding claim, the method further comprising the step of assigning (19b) a likelihood
20 value to the data unit, the likelihood value indicating a likelihood for a need for a correction or a cancelling of the data unit.

8. Method for transmitting data in a radio communications
25 system comprising one or more of the following steps:

- forwarding (21), upon receiving a portion of a data unit comprising a speculation indication, the portion of the data unit, and preparing for a possible cancelling of the data unit;

30 - postponing (22), upon receiving a portion of a data unit comprising a speculation indication, a forwarding of the portion of the data unit until a confirmation indication is received;

35 - forwarding (23), upon receiving a confirmation indication, the portion of the data unit and any previously received, postponed portions of the data unit;

- cancelling (24), upon reception of a cancelling indication, the data unit and/or any portion of the data unit;

- correcting (25), upon receiving a corrective information, a previously received portion of the data unit which is not considered eligible for further processing, and forwarding the corrected previously received portion of the data unit; or

- finalizing (26), upon complete reception of the data unit and/or a confirmation indication, the transmitting of the data unit.

9. Method according to claim 8, the method further comprising the step of interpreting (27), after a defined time or upon complete reception of the data unit, a missing of a cancellation indication as a confirmation indication for the data unit.

10. Network node (31) configured for transmitting data in a radio communications system, the network node comprising:

- receiving means (311) configured for receiving a portion of a data unit; and

- processing means (312) configured for starting a processing of the portion of the data unit prior to receiving remaining portions of the data unit.

11. Network node (31) according to claim 10, the processing means (312) further being configured for forwarding the portion of the data unit.

12. Network node (31) according to claims 10 or 11, further comprising:

- checking means (313) configured for checking the data unit for eligibility for further processing.

13. Network node (31) according to claim 12, wherein the checking means (313) are configured for checking of each received portion of the data unit.

5 14. Network node (31) according to claim 13, further comprising one or more of the following:

- sending means (314a) configured for sending a speculation indication, the speculation indication indicating a possible recalling of the data unit in case that the checking results
10 in the data unit not to be considered eligible for further processing;

- sending means (314b) configured for sending a confirmation indication, the confirmation indication indicating that the checking results in the data unit being considered eligible
15 for further processing;

- sending means (315) configured for sending a cancellation indication, the cancellation indication indicating that the data unit and/or any portion of the data unit is to be cancelled;

20 - sending means (314c) configured for sending an instruction for preferred processing of the data unit, indicating a preferred processing of the data unit;

- sending means (314d) configured for sending an instruction for deferred processing of the data unit, indicating a
25 deferred processing of the data unit; or

- sending means (314e) configured for sending, in case of the checking indicating that a previously received portion of the data unit is not considered eligible for further processing, a corrective information, the corrective information allowing
30 for correcting the previously received portion of the data unit.

15. Network node (31) according to any of claims 10 to 14, further comprising assigning means (316a) configured for
35 assigning an identification to the data unit, the identification allowing to uniquely identify the data unit.

16. Network node (31) according to any of claims 10 to 15, the network node further comprising assigning means (316b) configured for assigning a likelihood value to the data unit, the likelihood value indicating a likelihood for a need for a correction or a cancelling of the data unit.

17. Network node (32) configured for transmitting data in a radio communications system, comprising one or more of the following:

- forwarding means (321a) configured for forwarding, upon receiving a portion of a data unit comprising a speculation indication, the portion of the data unit, and preparing for a possible cancelling of the data unit;

- postponing means (322) configured for postponing, upon receiving a portion of a data unit comprising a speculation indication, a forwarding of the portion of the data unit until a confirmation indication is received;

- forwarding means (321b) configured for forwarding, upon receiving a confirmation indication, the portion of the data unit and any previously received, postponed portions of the data unit;

- cancelling means (323) configured for cancelling, upon reception of a cancelling indication, the data unit and/or any portion of the data unit;

- correcting means (324) configured for correcting, upon receiving a corrective information, a previously received portion of the data unit which is not considered eligible for further processing, and forwarding the corrected previously received portion of the data unit; or

- finalizing means (325) configured for finalizing, upon complete reception of the data unit, the transmitting of the data unit.

18. Network node (32) according to claim 17, further comprising interpreting means (326) configured for

interpreting, after a defined time or upon complete reception of the data unit, a missing of a cancellation indication in the data unit as a confirmation indication for the data unit.

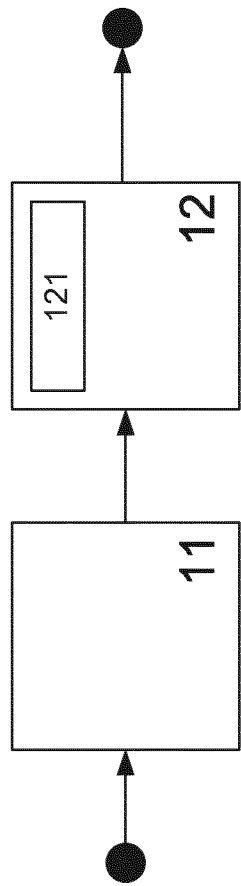


Fig. 1

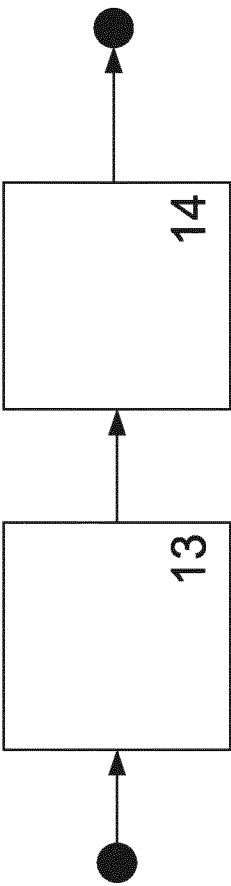


Fig. 2

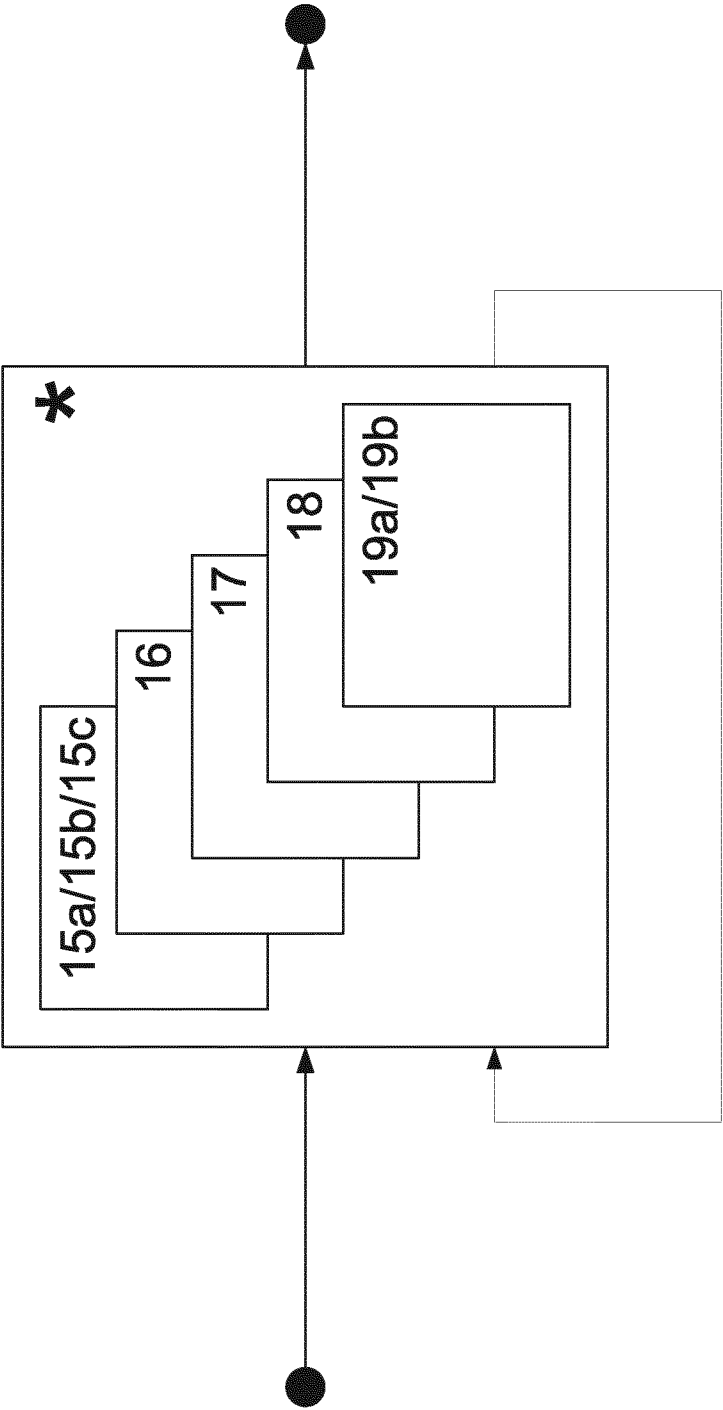


Fig. 3

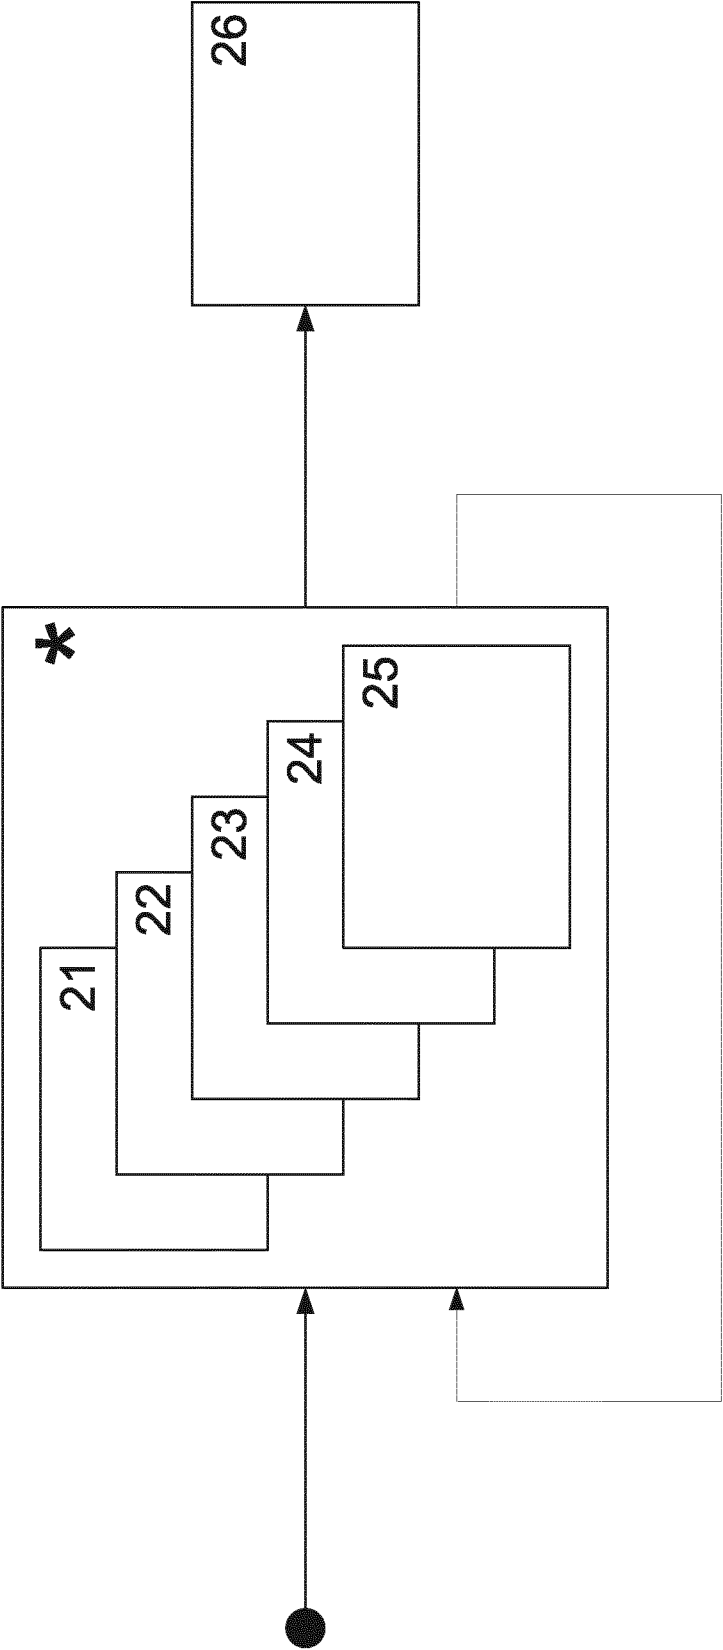


Fig. 4

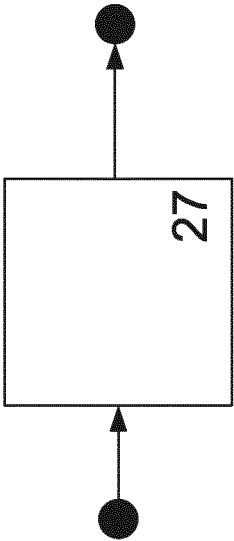


Fig. 5

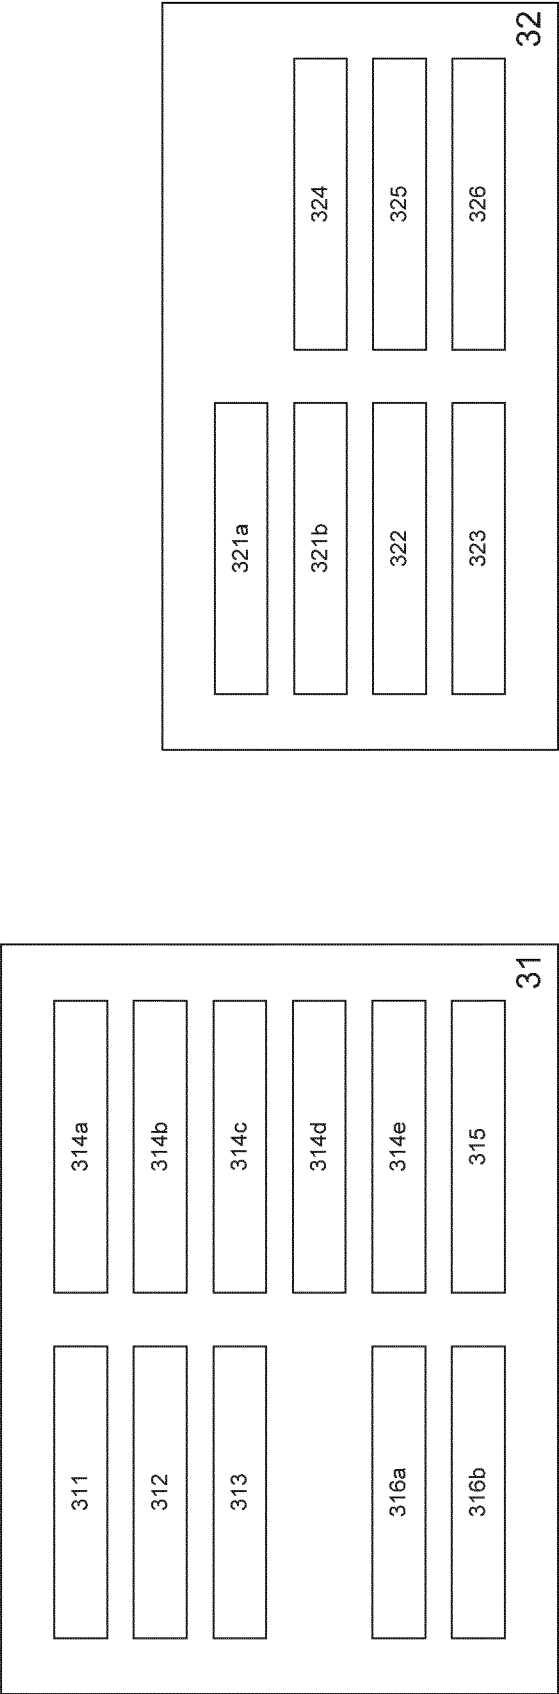


Fig. 6

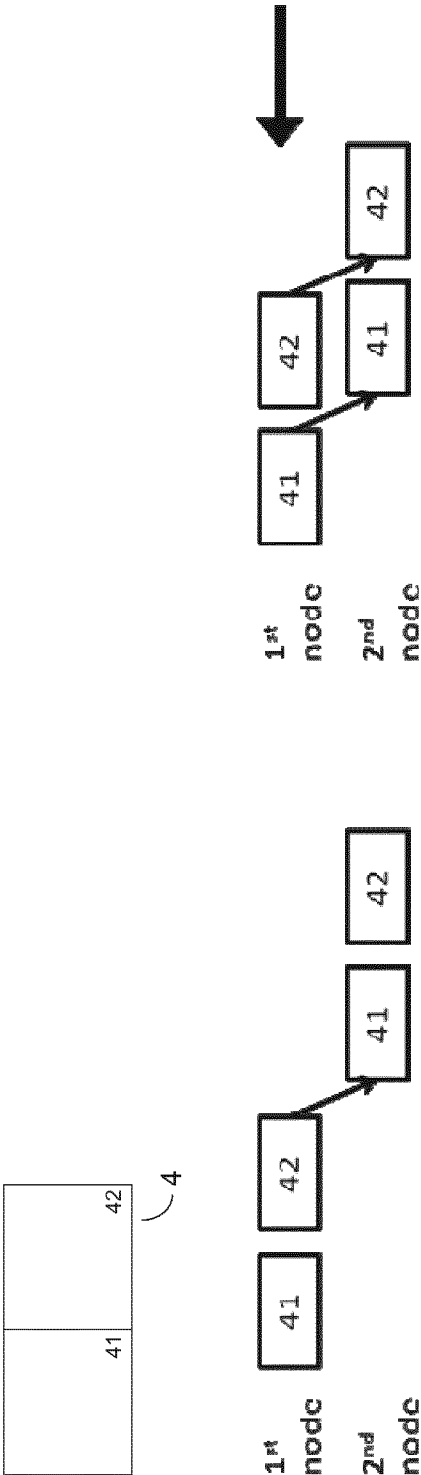


Fig. 7



Fig. 8

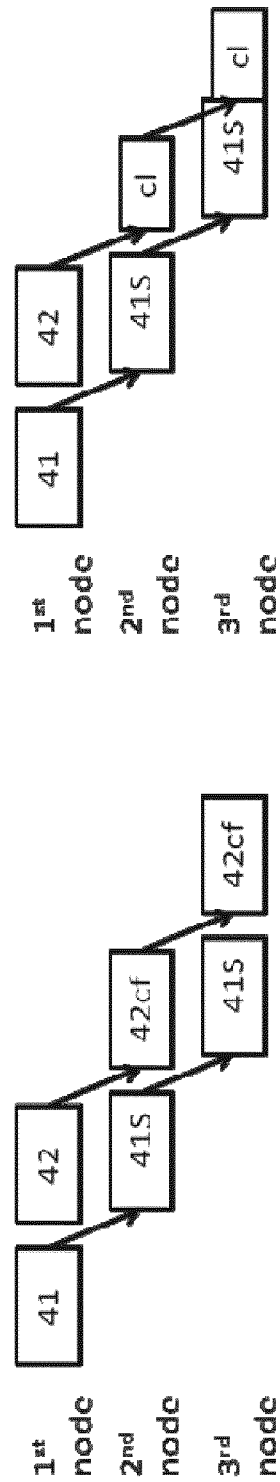


Fig. 9

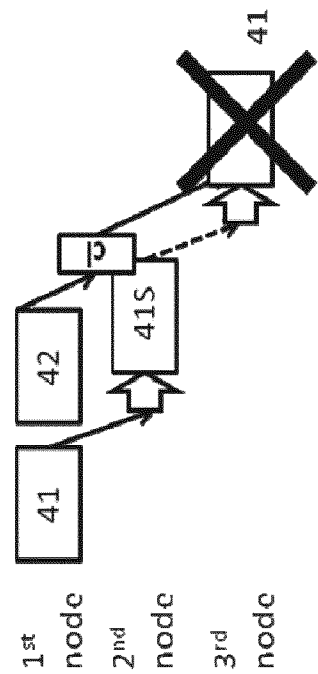


Fig. 10

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/059311

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04L1/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/253768 A1 (KING STEVEN [US] ET AL) 9 November 2006 (2006-11-09) paragraphs [0035], [0037], [0038], [0040], [0041] -----	1-18
X	US 7 051 259 B1 (WILLIAMS JR JOHN J [US] ET AL) 23 May 2006 (2006-05-23) column 6, line 61 - column 7, line 30 -----	1-18
X	US 2007/139229 A1 (BERENS FRIEDBERT [CH]) 21 June 2007 (2007-06-21) paragraphs [0095], [0097], [0098], [0103], [0104], [0107], [0109] -----	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 December 2012

Date of mailing of the international search report

03/01/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Belloni, Paolo

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/059311

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006253768	A1	09-11-2006	CN 101208892 A 25-06-2008
			EP 1878152 A1 16-01-2008
			US 2006253768 A1 09-11-2006
			WO 2006119199 A1 09-11-2006

US 7051259	B1	23-05-2006	NONE

US 2007139229	A1	21-06-2007	EP 1786109 A1 16-05-2007
			US 2007139229 A1 21-06-2007
