


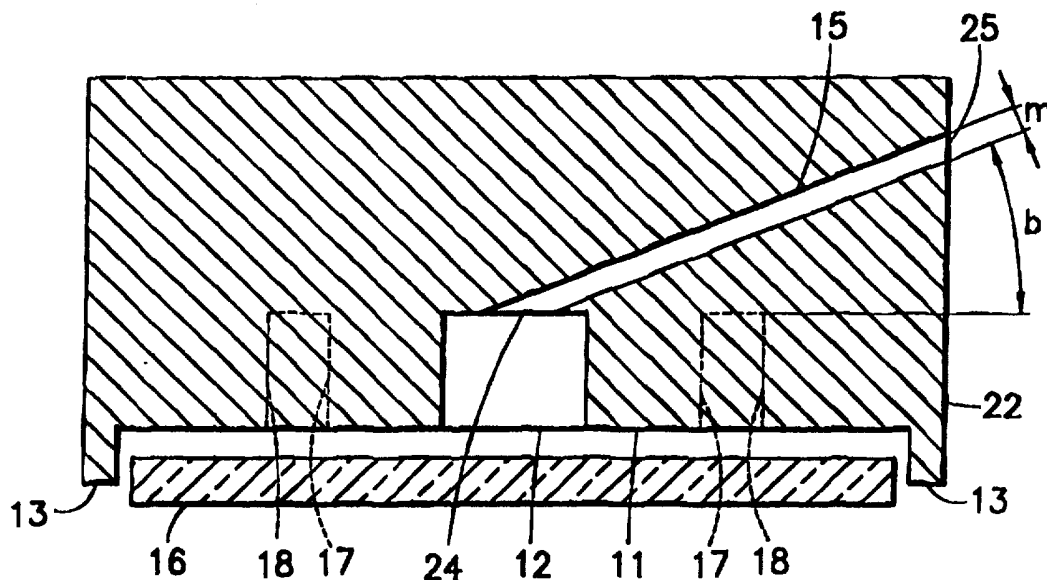

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01L 21/00	A1	(11) International Publication Number: WO 97/45862 (43) International Publication Date: 4 December 1997 (04.12.97)
(21) International Application Number: PCT/US97/08626 (22) International Filing Date: 21 May 1997 (21.05.97) (30) Priority Data: 60/018,782 31 May 1996 (31.05.96) US (71) Applicant (for all designated States except US): IPEC PRECISION, INC. [-/US]; 3 Berkshire Boulevard, Bethel, CT 06801 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): SINIAGUINE, Oleg [RU/US]; 11 Red Barn Road, Oxford, CT 06478 (US). STEINBERG, George [US/US]; 17 Jennings Court, Westport, CT 06880 (US). (74) Agent: VAN WINKLE, Peter, H.; Ware, Fressola, Van der Sluys & Adolphson, Bradford Green, Building Five, 755 Main Street, P.O. Box 224, Monroe, CT 06468-0224 (US).		(81) Designated States: JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: NON-CONTACT HOLDER FOR WAFER-LIKE ARTICLES**(57) Abstract**

A holder for wafer-like articles is formed by providing a platform having a wafer-like article facing surface that includes at least one annular groove therein. The annular groove has a ceiling surface therein which is provided with an opening. A gas conducting conduit is connected to the opening. A gas, which introduced into the conduit, exits the conduit through the opening. By choosing a particular orientation of the conduit relative to the annular groove, the gas exiting the opening can be caused to circulate in a clockwise or counter clockwise fashion. The circular flow of gas causes the formation of a vortex adjacent to the article facing surface. A wafer-like article may be held in a suspended state adjacent to the wafer-like article facing surface without contact by the vortex and the gas flowing between the wafer-like article and the article facing surface.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

NON-CONTACT HOLDER FOR WAFER-LIKE ARTICLES

BACKGROUNDField of the Invention

5 The present invention relates to a holder for holding wafer-like articles without physical contact between the holder and the wafer-like article being held. More particularly, the present invention relates to an apparatus for holding articles through the use of a particular fluid dynamic relationship between the wafer-like article and the holder created by the structure of the holder.

Description of the Prior Art

10 The handling of wafer-like articles, such as silicon wafers, can present problems. Some prior art wafer-like article holding apparatus have mechanical latches to hold the article in place. The mechanical latches have drawbacks such as contact between the article and the holder. The contact can cause contamination
15 of the article as well as induce mechanical stresses in the article.

Other prior art wafer-like article holders include vacuum or electrostatic chucks. These types of holders also have drawbacks. Such drawbacks include physical contact between the holder and the article which can cause contamination and mechanical damage. Also, because some actual pre-processed articles, such
20 as wafers, are not flat, securing such articles on a flat holder by vacuum or electrostatic means can cause mechanical stresses in the article.

SUMMARY OF THE INVENTION

25 The present invention provides a holder for holding wafer-like articles without physical contact between the holder and the wafer-like article being held. The holder comprises a platform having an article facing surface which includes at least one annular groove therein formed by an inner wall, an outer wall and a ceiling surface between the inner and outer walls. The ceiling surface is provided with an opening. The holder further includes a gas conducting conduit which is
30 connected to the opening in the ceiling surface of the annular groove. The gas

conducting conduit is oriented relative to the opening in the ceiling surface of the annular groove so as to cause a circular flow of gas around the annular groove when a gas is flowed down the conduit and through the opening.

One object of the present invention is to provide a wafer-like article holder that avoids physical contact between the wafer-like article and the holder.

Another object of the present invention is to provide a wafer-like article holder that does not induce mechanical stress in the wafer-like article while it is being held.

The foregoing and other objects, features, and advantages will become apparent from the detailed description of the preferred embodiments invention as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The drawings, which are not drawn to scale, include:

FIG. 1A, which is a diagram plan view of one embodiment of the apparatus of the present invention;

FIG. 1B, which is a diagram plan view of an alternative embodiment of the apparatus of the present invention;

FIG. 2A, which is a sectional view of the embodiment illustrated in FIG. 1A taken along the line 2A--2A, and which also includes a wafer-like article adjacent to the apparatus;

FIG. 2B, which is a sectional view of the embodiment illustrated in FIG. 1A taken along the line 2B--2B, and which also includes a wafer-like article adjacent to the apparatus;

FIG. 3, which is a graph showing the relationship of the differential pressure with radial distance from the center of an annular groove in the apparatus;

FIG. 4, which is a graph showing the relationship between holding force applied to the wafer-like article and the distance between the surface of the wafer-like article adjacent the apparatus and the apparatus;

FIG. 5, which is a diagram plan view of another embodiment of the apparatus of the present invention illustrating four annular grooves;

FIG. 6, which is a schematic diagram plan view of an end effector which incorporates the structure of the present invention for creating a vortex;

FIG. 7, which is a schematic diagram elevational view of the end effector shown in FIG. 6; and

FIG. 8, which is a partial schematic diagram elevational view illustrating a rim comprised of fingers for preventing excessive lateral movement of the wafer-like article.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGS. 1A and 2, the wafer-like article holder of the present invention comprises a platform 10 having a flat wafer-like article facing surface 11. The flat wafer-like article facing surface 11 includes at least one annular groove 12 therein formed by an inner wall 17 having a diameter d_1 , an outer wall 18 having a diameter d and a ceiling surface 14 between the inner 17 and outer 18 walls. The ceiling surface 14 is provided with an opening 24. The wafer-like article holder of the present invention may also include a rim 13 about the perimeter of the platform 10.

Still referring to FIGS. 1A and 2, a gas conducting conduit 15 having a diameter m is provided in the platform 10 between the opening 24 in the ceiling surface 14 of the annular groove 12 and a side 22 of the platform 10 at opening 25. The conduit 15 is oriented in one aspect such that a component of its axis is substantially tangential to the circumference of the annular groove 12 in the plane formed by the article facing surface 11. Preferably, the ceiling surface 14 is substantially parallel planar to the plane formed by flat wafer-like article facing surface 11. The conduit 15 is also oriented in another aspect such that a component of the axis of the conduit 15 makes an angle b which is generally less than 90° , and preferably less than 45° , relative to the parallel plane formed by the ceiling surface 14 of annular groove 12. Also, preferably, the diameter m of the conduit 15 is made smaller than the annular groove's depth H .

During operation, opening 25 is connected to a source of compressed gas. The compressed gas is flowed down conduit 15 to opening 24 where it exits. Because the conduit 15 is oriented relative to opening 24 the exiting gas flows around the annular groove 12. The gas flowing around the annular groove 12 causes a vortex to be formed adjacent to the annular groove 12. As will be explained below, the gas dynamics provided by the vortex hold the wafer-like article in place without contact.

Alternatively, as shown in FIG. 1B, the ceiling surface 14 of the annular groove 12 may be provided with a plurality of openings 24a-24d and a plurality of conduits 15a-15d providing a flow of compressed gas to the openings 24a-24d. Each of the conduits 15a-15d is oriented in the same manner as described above and in such a manner that each directs a flow of compressed gas out of the openings in the same direction around the annular groove 12. The advantage to having a greater number of openings 24a-24d and conduits 15a-15d is that the vortex created can be better controlled so that it has less discontinuities.

The internal diameter d_1 of the annular groove 12, which is established by the inner wall 17, is chosen from the ratio system:

IPEC Precise

scm) $d_1 < \text{minimum value of } \left\{ \frac{(d-2m)}{(d^2-4n \frac{Scm}{\pi})} \right\}^{1/2}$

$Sc(m)$ to be corrected

where: d - diameter of the outer wall 18 of the annular groove 12 which is established by the outer wall 18;

n - quantity of the openings 24 in the ceiling surface 14 of the annular groove 12; and

$S(m)$ - cross-sectional area of the opening 24.

Through adjustments in the orientation of the gas conducting conduit 15 relative to opening 24 in the ceiling surface 14, as well as adjustments in the size

of the annular groove, the gas dynamics created by the apparatus, i.e., the created vortex, can be optimized.

The wafer-like article holder of the present invention holds a wafer-like article 16 adjacent the article facing surface 11 through fluid dynamics caused by the delivery of compressed gas to opening 25. The compressed gas is directed via conduit 15 to the opening 24 in the ceiling surface 14 of the annular groove 12. The gas exits the opening 24 and moves around the annular groove 12 in either a clockwise or counter clockwise direction, depending on the orientation of the conduit 15 relative to the opening 24, and therefore, relative to annular groove 12. In either case, the clockwise or counterclockwise flowing gas forms a vortex. At the center of the vortex there is a region of relatively low pressure. As the angle θ between the axis of the conduit 15 and the ceiling surface 14 of the annular groove 12 is decreased towards 0 degrees, the region of relatively low pressure caused by the vortex increases.

The diameter m of the conduit 15 should be made smaller than the depth H of the annular groove 12 to insure that the gas flows uniformly inside the annular groove 12 to create the vortex. If the annular groove's internal diameter d_i , established by inner wall 17 is chosen according to the ratio system (1) expressed above, such that the annular groove's cross-section $(d-d_i)$ established by the inner 17 and outer 18 walls, and correspondingly the ceiling surface 14 width, is larger than area of opening 24, vortex gas velocity reduction due to annular groove-gas dynamical resistance will be minimized or avoided altogether.

By flowing gas through opening 24 according to the present invention, a wafer-like article 16 may be held in place by merely positioning the wafer-like article 16 parallel to the flat wafer-like article facing surface 11 with the gap of about 0.1 - 1mm between the wafer-like article 16 and the flat wafer-like article facing surface 11. The wafer-like article will be held in place adjacent to the flat wafer-like article facing surface 11 without physically contacting it.

The gas flowing out from the annular groove 12 flows along gap h between the wafer-like article 16 and flat wafer-like article facing surface 11 and forms radial flow which is continuous around the annular groove 12 and directed out of

it. As a result of the gas flow, a difference between the ambient gas pressure and the pressure in the gap **h** between the wafer-like article **16** and flat wafer-like article facing surface **11** is created. The typical pressure differential distribution as a function of radial distance is shown in FIG. 3.

Referring to FIG. 3, within a region in the annular groove **12** where **r** is less than **d/2**, the ambient gas pressure **P_a** (e.g. atmospheric pressure) is higher than the gas pressure **P_h** in the gap **h**, and the resulting pressure difference **ΔP** (**ΔP=P_a-P_h**) is positive. This is the reason why the wafer-like article **16** is pressed to the wafer-like article holder **11** with force:

$$F(+) = 2\pi \int_{r=0}^{r=d/2} \Delta P(r) r dr$$

For a radius greater than the annular groove **12**, **d/2**, the ambient gas pressure is lower than the gas pressure in the gap **h**, and the pressure difference **ΔP** is negative. This is the reason why the wafer-like article **16** is pushed out of the wafer-like article holder with force (see Fig. 3):

$$F(-) = 2\pi \int_{d/2}^{D/2} \Delta P(r) r dr$$

This force **F(-)** does not allow the wafer-like article **16** to touch the wafer-like article facing surface **11**.

Both force values and their sum **F = F(-)+F(+)** depend on the gap size **h**. The wafer-like article equilibrium location is a gap size **h** where the wafer-like article weight **W** is compensated by the force **F**. Two configurations of the wafer-like article **16** with respect to the holder's surface **11** that meet the equilibrium conditions are when: (1) the wafer-like article **16** is placed below the holder

surface 11; and (2) the wafer-like article 16 lies above the holder surface 11. For the first case, provided the wafer-like article's weight W is less than the maximum net positive force, $F_{\max}$ of Fig. 4, the wafer-like article is drawn towards the holder surface 11 to an equilibrium position with gap $h1$. At this position, the downward force W is equal in magnitude and opposite in direction to the upward force supplied by the gas dynamics created by the holder. In the second case, gravity pulls the wafer-like article toward the holder surface 11 to an equilibrium position with gap $h2$ less than gap $h1$ where the negative force, pushing the wafer-like article 16 away from the holder surface 11, balances the wafer-like article's weight W . Similarly, for any orientation of the wafer holder surface to the direction of gravity, there is an equilibrium gap h which the component of W normal to the holder surface 11 is balanced by a counteracting force F supplied by the holder 11. Consequently, provided there are retaining elements 13 FIG 2B & 8, the holder can hold the wafer-like article 16 in any orientation with no contact of the wafer-like article to the holder surface.

Analyzing FIG. 4 the advantages of the wafer-like article holder of the present invention become very apparent for the case when the holder is used to suspend the wafer-like article 16 because: a) the wafer-like article equilibrium position $h1$ is a stable position because of small deviation of the wafer-like article's position causes counter forces to arise, that is important for reliable wafer-like article holding; b) the holder may "catch" the wafer-like article and bring it to it's equilibrium position $h1$ from any distance in the range between $h1$ and $h3$ where the attractive force is higher than wafer-like article's weight, which may simplify loading the wafer-like article onto the holder; and c) due to the gas gap between the wafer-like article and the holder the wafer-like article does not need to be flat or change its flatness during a treatment (thermal elastic deformation) without additional stress or degradation of holding reliability if the non-flatness magnitude is comparable with the gas gap size.

In processing applications and specifically for plasma processing applications, there may be heat input to the surface of the wafer-like article. Heat must be effectively removed so that there is not thermal degradation of the wafer-

like article (e.g., damage to semiconductor IC circuits, thermally diffusing contaminants into a semiconductor wafer). Heat must be uniformly removed; otherwise, non-uniform processing for thermally dependent processes will occur (e.g., non uniform etching of a material from the wafer-like article with an etch process whose rate is temperature dependent). Consequently, the close proximity to the surface of the wafer-like article (i.e., less than 1mm) provides efficient heat transfer across the wafer-like article to holder surface gap **h**. Also, because the holder's surface **11** has no large holes or discontinuities in its surface, only annular grooves which are small in size as compared to the entire surface area of surface **11**, the rate of heat transfer from the wafer-like article to the holder is substantially uniform across its area.

Referring to FIG. 5, flat wafer-like article facing surface **11** may be provided with a plurality of annular grooves, such as the plurality of annular grooves **112a-112d**. As illustrated in FIG. 5, when a plurality of annular grooves are employed, the quantity of annular grooves is preferably chosen in multiples of two. Each annular groove **112a-112d** has a conduit **115a-115d** connected to an opening **124a-124d** in the ceiling surface. The conduits are connected to a source of compressed gas. Each of the conduits **115a-115d** is selectively oriented in an opposite direction from a conduit of an immediately adjacent annular groove. For example, in the embodiment shown in FIG. 5, two of the annular grooves **112a** and **112c**, forming a first plurality of annular grooves, have openings **124a** and **124c** which are connected to a first plurality of gas conducting conduits, conduits **115a** and **115c**, which are oriented relative to the annular grooves **112a** and **112c** to cause a counter clockwise flow around each. The remaining two annular grooves **112b** and **112d**, forming a second plurality of annular grooves, have openings **124b** and **124d** connected to a second plurality of conduits, such as conduits **115b** and **115d**, which are oriented relative to the annular grooves **112b** and **112d** to cause a clockwise flow around each. The opposite rotation of gas in the adjacent annular grooves allows the rotational influences of the vortexes on the wafer-like article to cancel and the wafer-like article **16** does not rotate relatively the flat wafer-like article facing surface **11**.

Referring to FIGS. 6 and 7, there is shown a fork-shaped end effector **40** for picking up, transporting and holding wafer-like articles in any orientation. With the fork-shaped end effector **40**, the orientation of the wafer-like article may be changed during transport to allow, for example, removal from a station in which it is face-down and loaded into a wafer-like article holder, such as the holder described above, for processing with a face-up orientation. Also, the fork-shaped end effector **40** can be made to allow removal from and into stations with little dimensional clearance. For examples where the wafer-like article is a semiconductor wafer or a glass plate used for lithographic exposure of semiconductor wafer patterns, standard packing is in multiple, stacked configurations with little spacing between the articles and only limited areas of open space around the article's edge. The fork-shaped end effector **40** can be made thin (e.g., less than about 2.5 mm) to fit between stacked, wafer-like articles and with lateral dimensions that fit into open space around the edges.

The end effector **40** is formed by a substantially planar thin fork-shaped platform **42** having first and second prong regions **43a-43b** located at first end **44** and a base region **45** adjacent to second end **46**. The platform further includes a pair of sides **48a** and **48b**. Preferably, the sides **48a** and **48b** taper outwardly from the first end **44** towards a point **50** between the first and second ends. From point **50**, the sides **48a** and **48b** taper inwardly toward the second end **46**.

An even numbered plurality of annular grooves **52a-52d** are provided in the platform **42**. Each of the plurality of annular grooves is constructed in a similar fashion as described above. Each has inner and outer walls and a ceiling surface which spans the inner and outer walls. The ceiling surface of each of the plurality of annular grooves is provided with an opening. The openings in half of the even numbered plurality of annular grooves, **52a & 52c**, are supplied with a flow of gas by corresponding gas conducting conduits **54a & 54c**, which are oriented relative to the annular grooves so as to direct the flow of gas in a counter clockwise fashion. The openings in the other half of the even numbered plurality of annular grooves **52b & 52d** are supplied with a flow of gas by corresponding gas conducting conduits **54b & 54d**, which are oriented relative to the annular grooves

so as to direct the flow of gas in a clockwise fashion. Annular grooves **52a** and **52d** are provided on first and second prong regions **43a** and **43b** respectively. Annular grooves **52b** and **52c** are provided on the base region **45** of the platform **42**. Gas conducting conduits **54a-54d** may be made from hypodermic tubing.

5 The second end **46** of platform **42** is connected to extension member **56** and the extension member **56** is attached to a gas manifold **58**. The gas conducting conduits **54a-54d** are connected to gas manifold **58** which has inlet **60** connected to a supply of compressed gas (not shown).

10 Preferably, the platform is provided with first and second rim sections **62a** and **62b**. The first rim **62a** is positioned adjacent to the first end **44**, while second rim section **62b** is positioned adjacent section to the second end **46**. The rim sections prevent the wafer-like article from moving laterally off of the platform.

15 Referring to FIG. 8, in the embodiment of the invention illustrated in FIG. 1A, the flat wafer-like article facing surface **11** is provided with rim **13** having an inner surface **30**, an outer surface **32** and an end **34**. The rim is positioned along the facing surface's perimeter or edge. The rim **13** is intended to function as a boundary to retain the wafer-like article adjacent to the flat wafer-like article facing surface **11** because the wafer-like article **16** has no mechanical contact and no friction with the wafer-like article facing surface **11**, the wafer-like article **16** could shift relative to the facing surface **11**. Preferably, the end **32** of the rim **13** extends out from the article facing surface **11** by a distance **L**, which is typically more than 1mm because the equilibrium gap size **h** is typically not more than 1 mm. While the rim **13** may be continuous along the perimeter, alternatively, the rim **13** may comprise a plurality of periodically spaced apart fingers, such as that shown in FIG. 8. The fingers make the wafer-like article's edges more open to treatment agents than a continuous rim. In a preferred embodiment, the inner surface **30** of the rim **13** or the inner surface **30** of each of the plurality of fingers comprising a rim **13**, may be made to have angle **a** which is greater than 90° relative to the plane formed by the wafer-like article facing surface **11**. The purpose of angling the rim is to reduce "shadow" effects caused by the rim **13** during treatment (as an example, plasma treatment) of the article **16**.

According to the present invention, in any embodiment, such as that shown in FIGS. 1A, 1B, 5, 6 and 7, for example, the flat wafer-like article facing surface 11 is provided with dimension **D** which is always greater than the dimension D_1 of the wafer-like article 16. In other words, the wafer-like articles which may be held by the apparatus of the present invention will always have dimensions which are less than the dimensions of the article facing surface 11. The wafer-like article facing surface 11 size **D** should be more than the wafer-like article dimension D_1 to allow the wafer-like article to take it's equilibrium position without interference from the rim 13.

As will be understood from the foregoing description, according to the present invention, several embodiments of a wafer-like article holder have been described which use gas dynamics to hold the article without physical contact between the holder and the article. The present invention adequately provides a means for meeting the requirements for holding wafer-like articles for the purposes of processing the side of the wafer-like article facing away from the holder's surface, particularly with a reactive gas generated by an electrical discharge and for transporting the wafer like article. It is to be understood that the embodiments described herein are merely illustrative of the principles of the invention. Various modifications may be made thereto by persons skilled in the art which will embody the principles of the invention and fall within the spirit and scope thereof. Hence, the present invention is deemed limited only by the appended claims and the reasonable interpretation thereof.

What Is Claimed Is:

1. A holder for holding wafer-like articles without physical contact between the holder and the wafer-like article being held, the holder comprising:

5 a platform having an article facing surface, the article facing surface further including an annular groove therein formed by an inner wall, an outer wall and a ceiling surface between the inner and outer walls, the ceiling surface further including an opening therein; and

10 a gas conducting conduit connected to the opening in the ceiling surface of the annular groove, wherein the gas conducting conduit is oriented relative to the opening in the ceiling surface of the annular groove so as to cause a circular flow of gas around the annular groove when a gas is flowed down the conduit and through the opening.

15 2. The holder of claim 1, wherein the gas conducting conduit is oriented so as to be substantially tangential to the annular groove's circumference which is in the same plane as a plane formed by the article facing surface.

20 3. The holder of claim 1, wherein the ceiling surface is substantially planar and the gas conducting conduit forms an angle **b** with respect to the plane formed by the ceiling surface and wherein angle **b** is in the range of 0 to 45 degrees.

25 4. The holder of claim 2, wherein the ceiling surface is substantially planar and the gas conducting conduit forms an angle **b** with respect to the plane formed by the ceiling surface and wherein angle **b** is in the range of 0 to 45 degrees.

30 5. The holder of claim 1, wherein the annular groove in the article facing surface has a depth H, wherein the gas conducting conduit has a diameter m, and wherein diameter m is smaller than depth H.

6. The holder of claim 4, wherein the annular groove in the article facing surface has a depth H, wherein the gas conducting conduit has a diameter m, and wherein diameter m is smaller than depth H.

5 7. The holder of claim 1, wherein the opening in the ceiling surface is smaller than the ceiling surface.

10 8. The holder of claim 1, wherein the ceiling surface is provided with a plurality of openings, and wherein the holder is further provided with a plurality of gas conducting conduits, each of the openings being connected to a gas conducting conduit, each of the gas conducting conduits being oriented relative to its respective opening so as to cause a circular flow of gas around the annular groove in the same direction when a gas is flowed down the conduit and through the associated opening.

15 9. The holder of claim 1, wherein the article facing surface is provided with a rim extending therefrom, the rim having an inner surface which faces the annular groove, an outer surface and an end.

20 10. The holder of claim 9, wherein the rim is substantially continuous.

11. The holder of claim 9, wherein the rim is formed from a plurality of spaced apart fingers.

25 12. The holder of claim 9, wherein the inner surface of the rim forms angle α with respect to the plane formed by the wafer-like article facing surface, and wherein angle α is greater than 90 degrees.

30 13. The holder of claim 1, wherein the article facing surface is provided with a second annular groove formed by a second inner wall, a second outer wall

and a second ceiling surface between the second inner and outer walls, the second ceiling surface further including an opening therein; and

a second gas conducting conduit connected to the opening in the second ceiling surface of the second annular groove, wherein the second gas conducting conduit is oriented relative to the opening in the second ceiling surface of the second annular groove so as to cause a circular flow of gas around the second annular groove when a gas is flowed down the second conduit and through the opening, and wherein the circular flow of gas around the second annular groove is in a direction which is opposite to the direction of the circular flow of gas around the other annular groove.

14. The holder of claim 1, wherein the gas conducting conduit is formed from a hypodermic tube.

15. A holder for holding wafer-like articles without physical contact between the holder and the wafer-like article being held, the holder comprising:

a platform having an article facing surface, the article facing surface further having a first even numbered plurality of annular grooves therein formed by inner walls, outer walls and ceiling surfaces between the inner and outer walls, the ceiling surfaces further including an opening therein, and a second even numbered plurality of annular grooves therein formed by inner walls, outer walls and ceiling surfaces between the inner and outer walls, the ceiling surfaces further including an opening therein;

a first plurality of gas conducting conduits, wherein each opening in the ceiling surface of the first plurality of annular grooves is connected to one of the conduits of the first plurality of gas conducting conduits and wherein each of the conduits of the first plurality of gas conducting conduits is oriented relative to the opening so as to cause a clockwise circular flow of gas around the annular groove when a gas is flowed down the conduit and through the opening; and

a second plurality of gas conducting conduits, wherein each opening in the ceiling surface of the second plurality of annular grooves is connected to one of

the conduits of the second plurality of gas conducting conduits and wherein each of the conduits of the second plurality of gas conducting conduits is oriented relative to the opening so as to cause a counter clockwise circular flow of gas around the annular groove when a gas is flowed down the conduit and through the opening.

16. The holder of claim 15, wherein the conduits are formed from hypodermic tubes.

17. The holder of claim 15, wherein the platform further includes a rim extending from the article facing surface.

18. A holder for holding wafer-like articles without physical contact between the holder and the wafer-like article being held, the holder comprising:

a fork-shaped platform having an article facing surface formed by a first prong region, a second prong region and a base region;

a first annular groove formed in the first prong region by an inner wall, an outer wall and a ceiling surface between the inner and outer walls, the ceiling surface further including an opening therein;

a first gas conducting conduit connected to the opening in the ceiling surface of the first annular groove, wherein the first gas conducting conduit is oriented relative to the opening in the ceiling surface of the first annular groove so as to cause a circular flow of gas around the annular groove when a gas is flowed down the conduit and through the opening;

a second annular groove formed in the second prong region by an inner wall, an outer wall and a ceiling surface between the inner and outer walls, the ceiling surface further including an opening therein;

a second gas conducting conduit connected to the opening in the ceiling surface of the first annular groove, wherein the second gas conducting conduit is oriented relative to the opening in the ceiling surface of the second annular groove so as to cause a circular flow of gas around the annular groove when a gas is

flowed down the conduit and through the opening, and wherein the circular flow of gas around the second annular groove is in a direction which is opposite to the direction of the circular flow of gas around the first annular groove;

5 a third annular groove formed in the base region by an inner wall, an outer wall and a ceiling surface between the inner and outer walls, the ceiling surface further including an opening therein;



10 a third gas conducting conduit connected to the opening in the ceiling surface of the third annular groove, wherein the third gas conducting conduit is oriented relative to the opening in the ceiling surface of the third annular groove so as to cause a circular flow of gas around the annular groove when a gas is flowed down the conduit and through the opening, and wherein the circular flow of gas around the third annular groove is in a direction which is the same as the direction of the circular flow of gas around the first annular groove;

15 a fourth annular groove formed in the base region by an inner wall, an outer wall and a ceiling surface between the inner and outer walls, the ceiling surface further including an opening therein; and

20 a fourth gas conducting conduit connected to the opening in the ceiling surface of the fourth annular groove, wherein the fourth gas conducting conduit is oriented relative to the opening in the ceiling surface of the fourth annular groove so as to cause a circular flow of gas around the annular groove when a gas is flowed down the conduit and through the opening, and wherein the circular flow of gas around the fourth annular groove is in a direction which is opposite to the direction of the circular flow of gas around the first annular groove.

25 19. The holder of claim 18, wherein the first prong region, the second prong region and the base region are provided with a rim.

30 20. The holder of claim 18, wherein the first, second, third and forth gas conducting conduits are connected to a gas supplying manifold which is attached to an end of the platform adjacent to the base region.

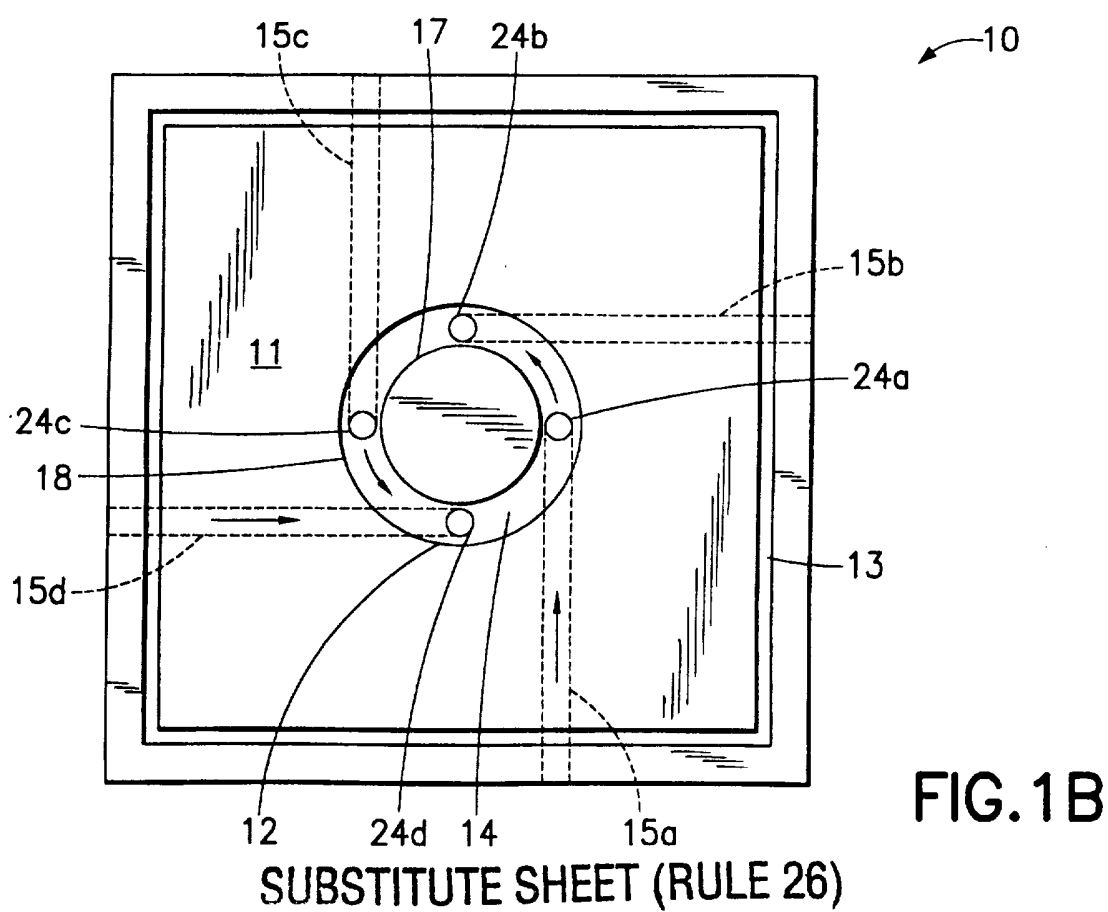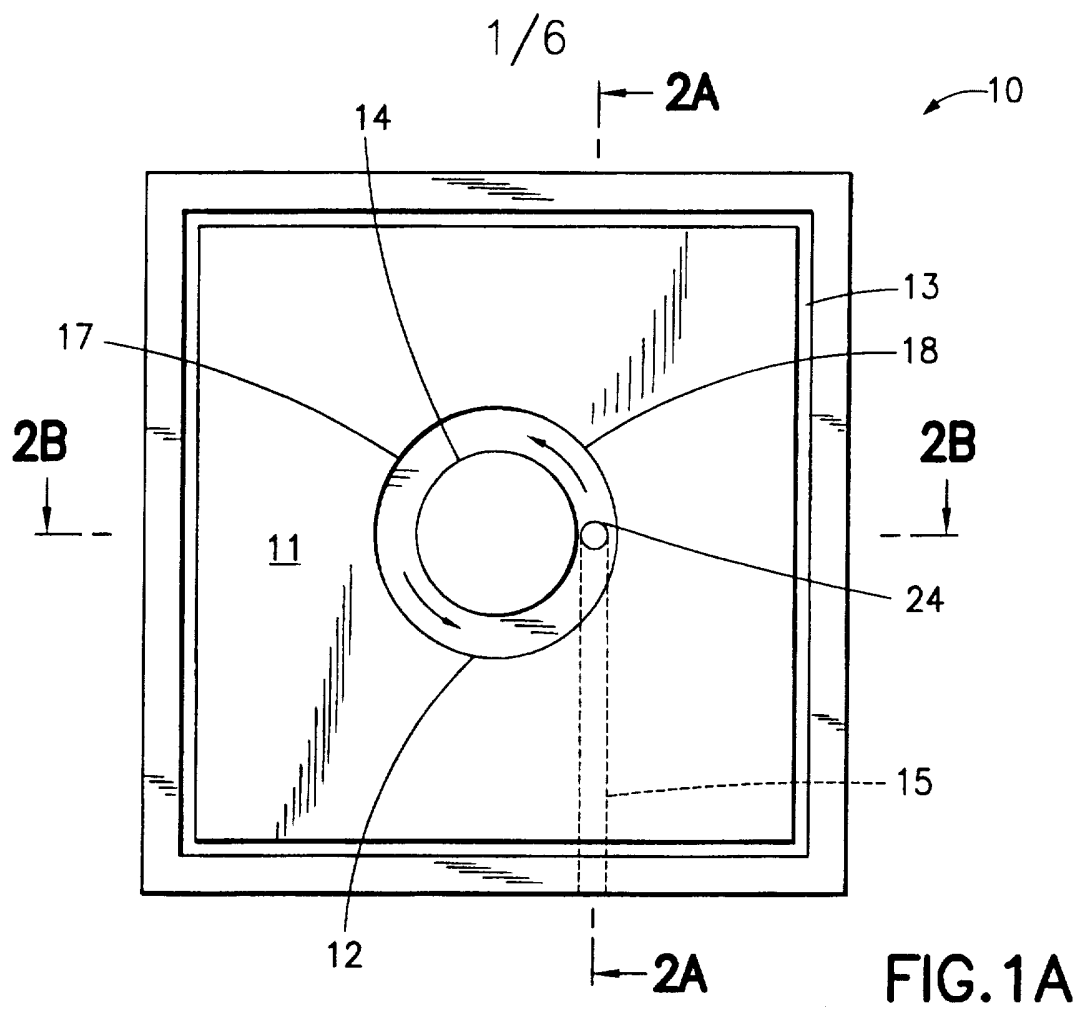

2/6

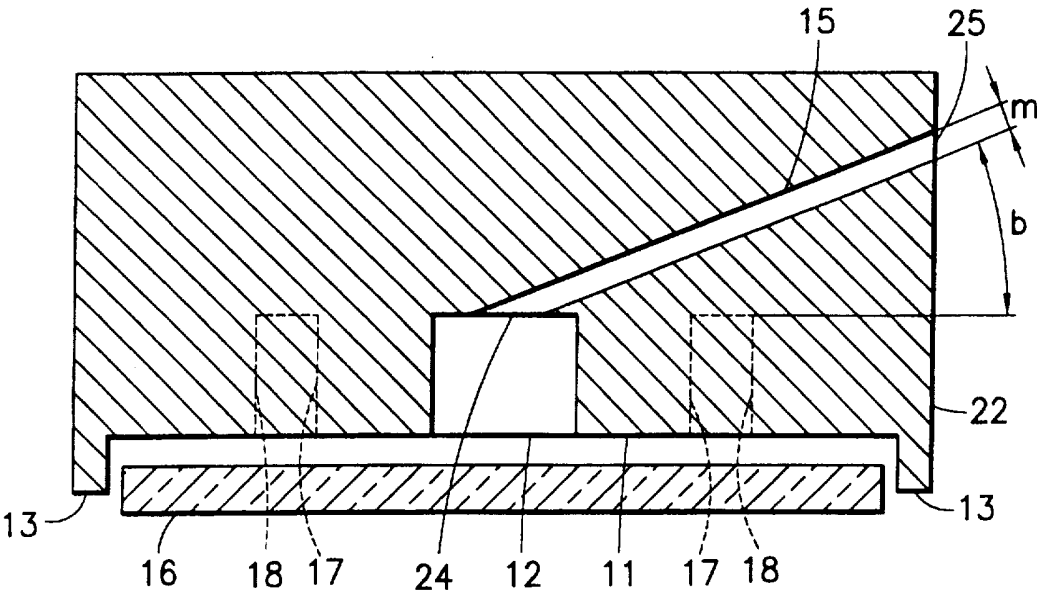


FIG. 2A

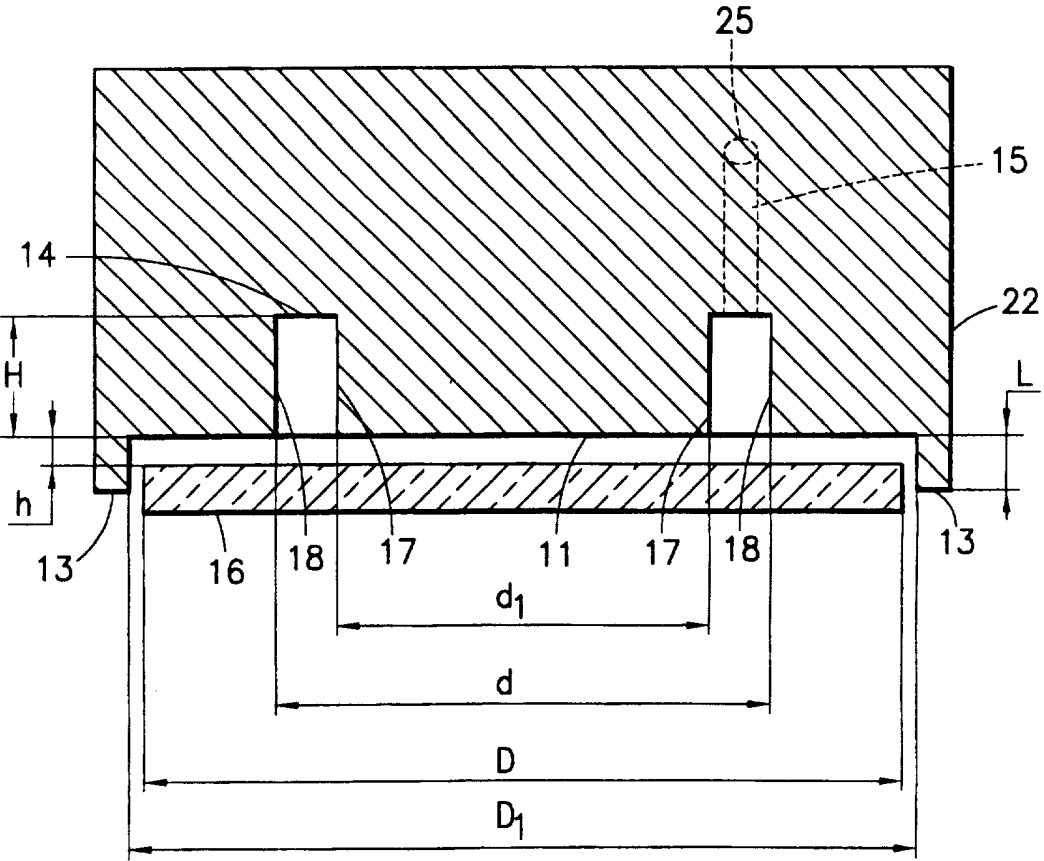


FIG. 2B

3/6

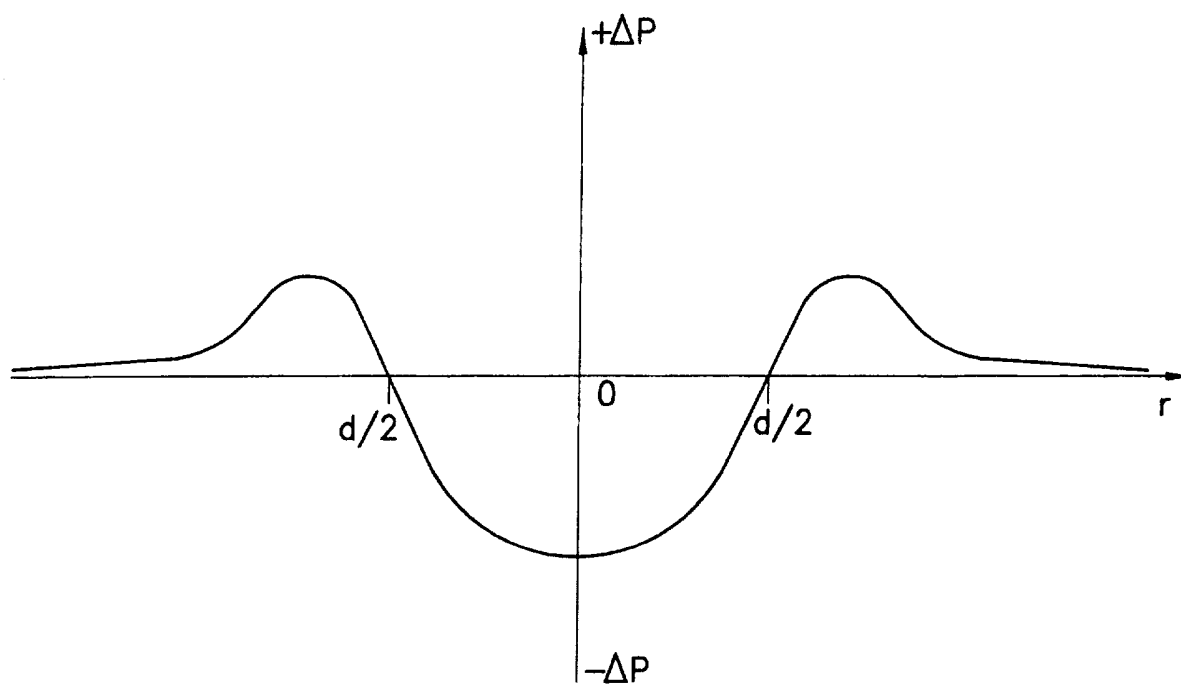


FIG. 3

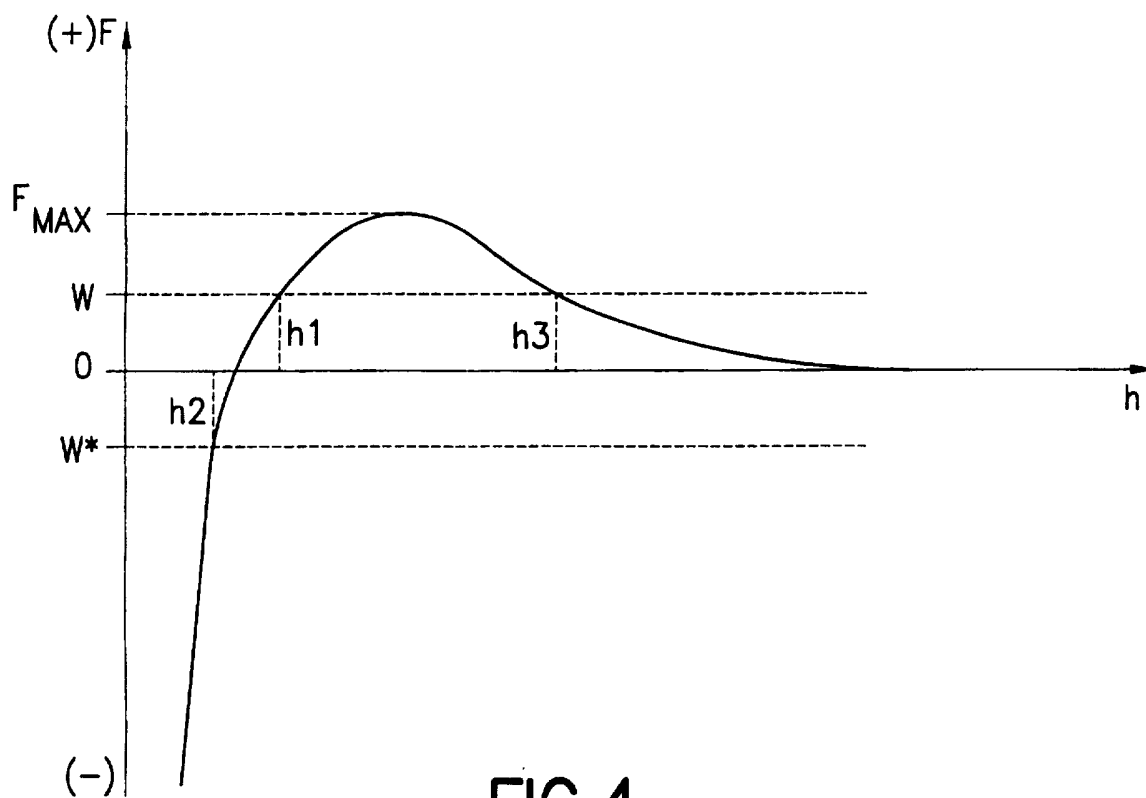


FIG. 4

SUBSTITUTE SHEET (RULE 26)

4/6

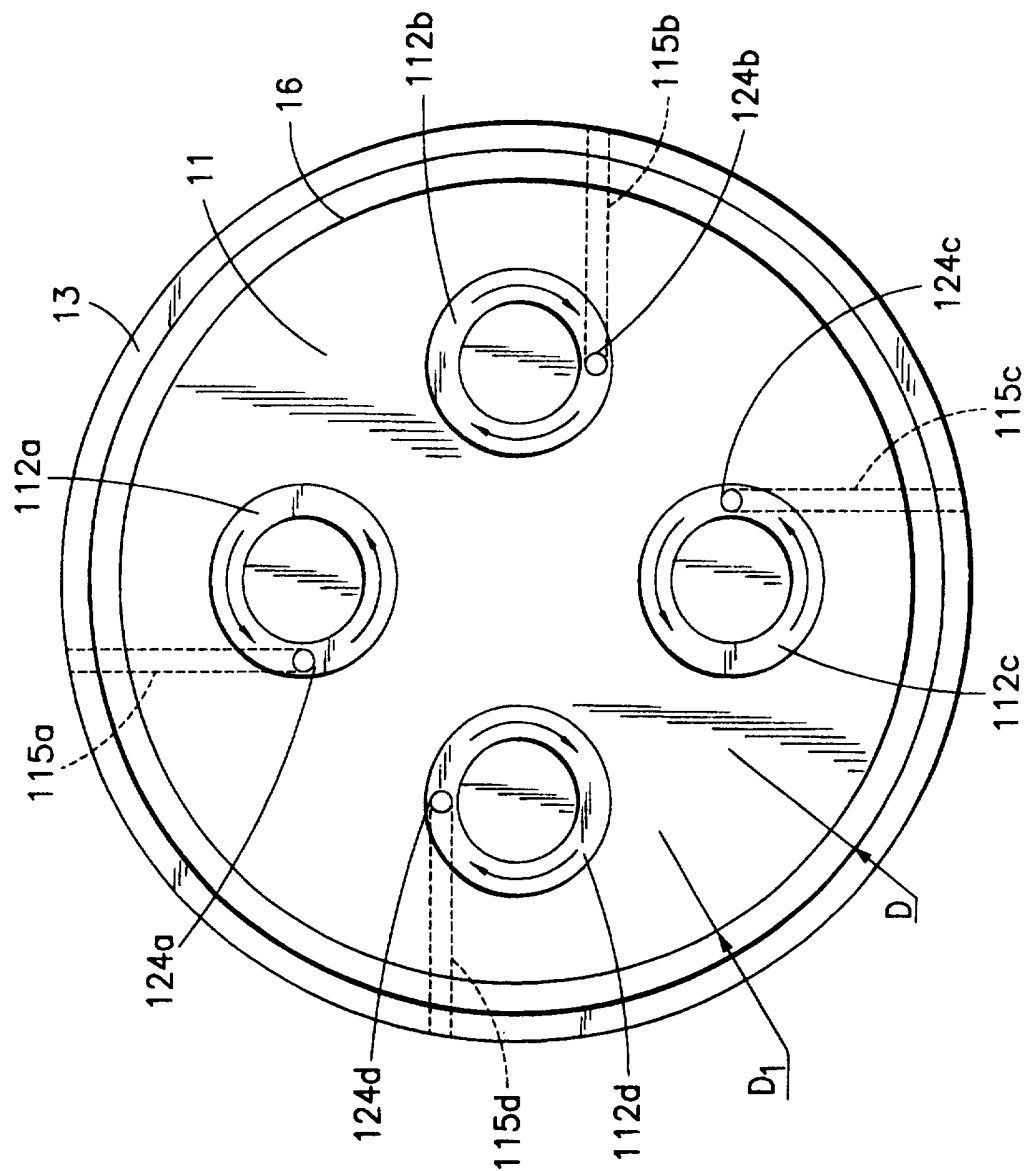


FIG. 5

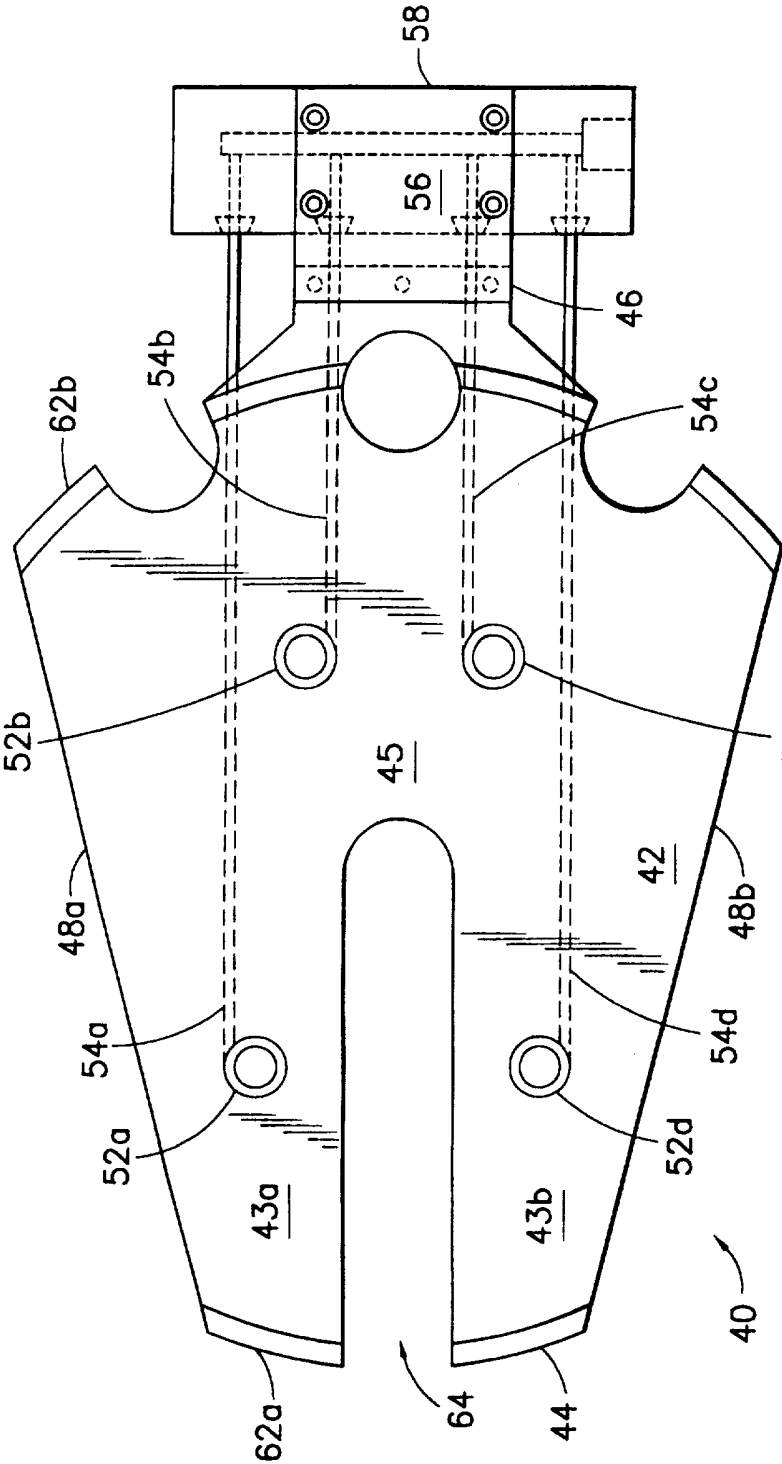


FIG. 6

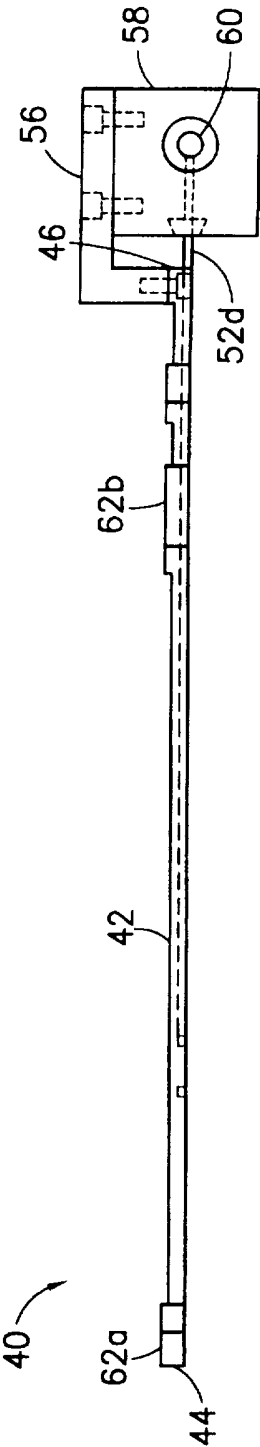


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 97/08626

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H01L21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H01L B25J B65G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 080 549 A (GOODWIN ET AL.) 14 January 1992 see column 14, line 10 - column 14, line 48; figures 15-17 ---	1-4, 8, 15, 18
A	US 5 067 762 A (AKASHI) 26 November 1991 see column 8, line 27 - column 8, line 53; figures 15, 16, 25 ---	1
A	EP 0 201 240 A (KABUSHIKI KAISHA SEIBU GIKEN) 12 November 1986 see the whole document ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 17, no. 209 (E-1355), 23 April 1993 & JP 04 348052 A (KYUSHU ELECTRON METAL CO LTD), 3 December 1992, see abstract -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

22 September 1997

Date of mailing of the international search report

26.09.97

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Bolder, G

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No
PCT/US 97/08626

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5080549 A	14-01-92	US 5324155 A	28-06-94
US 5067762 A	26-11-91	JP 62290654 A	17-12-87
		JP 1806030 C	26-11-93
		JP 5012113 B	17-02-93
		JP 62251094 A	31-10-87
		JP 62264118 A	17-11-87
		JP 1051413 B	02-11-89
		JP 1563948 C	12-06-90
		JP 62105831 A	16-05-87
		JP 62027245 A	05-02-87
		JP 62041122 A	23-02-87
		JP 62060747 A	17-03-87
		JP 62070140 A	31-03-87
		JP 62157792 A	13-07-87
		DE 3642937 A	06-08-87
EP 0201240 A	12-11-86	JP 1724962 C	24-12-92
		JP 4011342 B	28-02-92
		JP 62016924 A	26-01-87
		JP 1908686 C	24-02-95
		JP 6032916 B	02-05-94
		JP 62016945 A	26-01-87
		US 4735449 A	05-04-88