



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2020/03/11
(87) Date publication PCT/PCT Publication Date: 2021/09/16
(85) Entrée phase nationale/National Entry: 2022/09/02
(86) N° demande PCT/PCT Application No.: IL 2020/050287
(87) N° publication PCT/PCT Publication No.: 2021/181371

(51) Cl.Int./Int.Cl. *A01G 7/00* (2006.01),
A01G 7/06 (2006.01), *G01J 3/28* (2006.01),
G01N 21/64 (2006.01), *G01N 21/84* (2006.01),
G01N 33/00 (2006.01), *G06Q 50/02* (2012.01)
(71) Demandeur/Applicant:
VIEWNETIC LTD., IL
(72) Inventeurs/Inventors:
SCHEINER, DAVID, IL;
TAL, EILAT, IL;
BENRON, HAI, IL
(74) Agent: FASKEN MARTINEAU DUMOULIN LLP

(54) Titre : SYSTEMES ET PROCEDES DE SURVEILLANCE DE PLANTES DANS DES ZONES DE CULTURE DE
PLANTES

(54) Title: SYSTEMS AND METHODS FOR MONITORING PLANTS IN PLANT GROWING AREAS

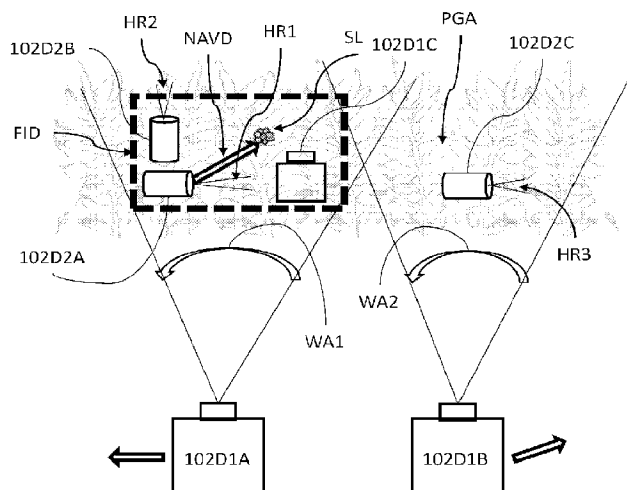


Fig. 2B

(57) **Abrégé/Abstract:**

Systems and methods for monitoring plants' conditions in one or more plant growing areas are presented. The system comprises a data collection system for providing characterization data about various parameters of plants in the one or more plant growing areas, the data collection system comprising data collection modules of at least first and second different types comprising respectively one or more first type imaging devices of predetermined first field of view and first resolution and one or more second type imaging devices of predetermined second field of view narrower than the first field of view and second resolution higher than the first resolution, the characterization data provided by the first type imaging device(s) comprising first type image data indicative of one or more plants in the plant growing area and of location of at least one device of the second type imaging devices with respect to said one or more plants in the plant growing area, the characterization data provided by the second type imaging device(s) comprising second type image data indicative of one or more portions of plants in the plant growing area; and a control system for activating at least one first type imaging device and at least one second type imaging device at least partially simultaneously, and to be responsive to operational data being based on analysis of the first type image data and comprising navigation data to navigate the at least one second type imaging device or at least one device of the first type imaging devices in the plant growing area.

Date Submitted: 2022/09/02

CA App. No.: 3170566

Abstract:

Systems and methods for monitoring plants' conditions in one or more plant growing areas are presented. The system comprises a data collection system for providing characterization data about various parameters of plants in the one or more plant growing areas, the data collection system comprising data collection modules of at least first and second different types comprising respectively one or more first type imaging devices of predetermined first field of view and first resolution and one or more second type imaging devices of predetermined second field of view narrower than the first field of view and second resolution higher than the first resolution, the characterization data provided by the first type imaging device(s) comprising first type image data indicative of one or more plants in the plant growing area and of location of at least one device of the second type imaging devices with respect to said one or more plants in the plant growing area, the characterization data provided by the second type imaging device(s) comprising second type image data indicative of one or more portions of plants in the plant growing area; and a control system for activating at least one first type imaging device and at least one second type imaging device at least partially simultaneously, and to be responsive to operational data being based on analysis of the first type image data and comprising navigation data to navigate the at least one second type imaging device or at least one device of the first type imaging devices in the plant growing area.

SYSTEMS AND METHODS FOR MONITORING PLANTS IN PLANT GROWING AREAS

TECHNOLOGICAL FIELD

The invention relates generally to the agricultural field, and more specifically to automated systems and methods of monitoring of plants and/or plant treatment decisions in plant growing areas.

5 BACKGROUND

Crops require a lot of care, either when grown in protected environment (such as in a greenhouse) or outdoors, especially when cultivated on a large scale where farmers continuously face a variety of challenges, including the need to maintain plants' health over the whole plant life cycle, control over flower pollination, and insure healthy as well as good yield crops. Indeed, it can be a difficult task to know whether the crop, at a specific time point, suffers from a problem, such as existence of pest, disease, or nutritional deficit, and what is the extent of the problem until it is readily visible. Often by that stage, it may require expensive and extensive intervention. Crop yield is affected by the physiological performance of the crop throughout its development cycle. Precise intervention at critical developmental stages, allows farmers to achieve high yields of the crop. A common practice for monitoring crops for pests, diseases and other deleterious conditions, has been the use of human scouts who visually inspect the crop. However, human inspection might take a long time, especially in large plant areas, and might facilitate the spread of those pests and diseases, for example, through physical contact with multiple plants, and is subject to subjective interpretation of the inspecting person.

Many crop management practices are employed based on past practices. A common underlying assumption is that crops are uniform and perform evenly which is not necessarily the case.

- 2 -

Sensor systems have been developed for crop monitoring. For example, some systems use a grid of sensors suspended above the crop or which fly over the crops. Handheld devices are also used to capture data from individual plants. Other systems rely on visual detection by means of motion detection or visual pattern recognition.

5 Some sensor systems are directed toward specific indicators (presence of disease, emergence of pests, etc.) with narrow spectra of responses. For example, fluorescent measurement systems have been used to detect far red spectra produced by plants when exposed to blue or red light. Conventional fluorescent measurement requires complex equipment, and typically a single assessment takes several minutes. Other sensory
10 systems can collect very general information (temperature, humidity) that cannot accurately pinpoint problems at the level of individual plants.

GENERAL DESCRIPTION

The present invention provides novel systems and methods for monitoring plants' conditions in one or more plant growing areas, enabling management of crops, for
15 example in greenhouses or open fields. The technique of the invention enables high quality, yet cost effective and time saving, autonomous monitoring and management of plant condition by utilizing different novel modules that collect data from a crop area, and individually characterize and determine the status of each plant, including plant health, growing stage such as flowering and fruitage, detrimental conditions such as pest
20 infestations, diseases and environmental deficiencies. The invention also enables performing analysis of the plant condition and generating corresponding relevant recommendations for interventions. While being capable of managing each individual plant, the invention is particularly useful in managing large/multiple farming areas due to the highly effective data collection and analysis techniques.

25 According to the technique of the invention, the data collected includes image data mainly, but not only. The image data is collected in one or more data collection phases by one or more data collection module types being different in their specifications.

Thus, according to a broad aspect of the invention, there is provided an automatic system for monitoring plants' conditions in one or more plant growing areas, the system
30 comprising:

a data collection system configured and operable to provide characterization data about plants in said one or more plant growing areas, the data collection system

- 3 -

comprising data collection modules of at least first and second different types, the first type data collection module comprising a first imaging device of predetermined first optical properties and the second type data collection module comprising a second imaging device of predetermined second optical properties different from the first optical properties, the characterization data provided by at least one of the first and second

5 imaging devices being indicative of various parameters of the plants being imaged; and

 a control system configured and operable to be in data communication with an analyzer to be responsive to operational data received from the analyzer and being based on analysis of the image data indicative of one or more plants being imaged by the first

10 type imaging device, to selectively activate the second type imaging device to apply the second type imaging to at least a part of said one or more plants.

 In a preferred embodiment, the first type data collection module comprises one or more first type imaging devices of predetermined first field of view and first resolution and the second type data collection module comprises one or more second type imaging

15 devices of predetermined second field of view narrower than the first field of view and second resolution higher than the first resolution, the characterization data provided by at least one of the one or more first type imaging devices comprising first type image data indicative of one or more plants in the plant growing area and of location of at least one device of the second type imaging devices with respect to said one or more plants in the

20 plant growing area, the characterization data provided by the one or more second type imaging devices comprising second type image data indicative of one or more portions of plants in the plant growing area; the control system is configured and operable to activate at least one of said one or more first type imaging devices and at least one of said one or more second type imaging devices at least partially simultaneously, and to be in

25 data communication with an analyzer to be responsive to operational data received from the analyzer, the operational data being based on analysis of the first type image data and comprising navigation data to navigate the at least one second type imaging device or at least one device of the first type imaging devices in the plant growing area.

 Generating the navigation data based solely on the image data substitutes or at

30 least reduces the need to depend on localization systems, such as GPS. This is particularly advantageous in places where the signals of GPS and the like are weak, such as closed places or places with interferences.

- 4 -

In some embodiments, the first type image data is further indicative of location of at least one first type imaging device with respect to said one or more plants in the plant growing area.

In some embodiments, based on the analysis of the first type image data,
5 location(s) of the one or more plants in the plant growing area are identified and plant location data is generated and utilized for generating said navigation data, the navigation data comprising at least one movement path data.

In some embodiments, based on the analysis of the first type image data, one or more suspect locations in the one or more plants is(are) identified, said navigation data
10 comprising at least one movement path data of the at least one first or second type imaging devices to said one or more suspect locations, said movement path data comprising movement vector data, optical axis orientation data and trigger time data for activating the at least one first or second type imaging devices to respectively apply the first or second type imaging to said one or more suspect locations.

In some embodiments, said at least one second type imaging device is activated
15 to apply said second type imaging to said one or more suspect locations, said navigation data being further based on analysis of the second type image data to optimize said at least one movement path data.

In some embodiments, said at least one device of said first and second type
20 imaging devices being activated, is operated to apply continuous imaging along the at least one movement path.

In some embodiments, said analysis of the first type image data is indicative of characteristics of the one or more suspect locations thereby enabling selecting either said first or second type imaging devices to respectively apply said first or second type
25 imaging to said one or more suspect locations.

In some embodiments, said first type image data is provided by a single device of the one or more first type imaging devices. The first type image data may comprise overlapping images obtained by the single first type imaging device.

In some embodiments, the system comprises a plurality of the first type imaging
30 devices, said first type image data being provided by two or more devices of the plurality of the first type imaging devices. The portion of the first image data, being indicative of the one or more plants in the plant growing area, is provided by at least one device of the plurality of first type imaging devices, and said portion of the first image data, being

- 5 -

indicative of the location of at least one of the one or more second type imaging devices with respect to said one or more plants in the plant growing area, is provided by at least second device of the plurality of first type imaging devices. The navigation data is generated based on analysis of overlapping data between two or more first type images
5 provided respectively by the two or more first type imaging devices.

In some embodiments, the system comprises a plurality of second type imaging devices part of which having different directions of optical axes or different focal distances. At least one device of the plurality of second type imaging devices may have at least one of adjustable angle of optical axis, adjustable magnification or adjustable
10 focus distance.

In some embodiments, at least one device of said one or more first type imaging devices and at least one device of said one or more second type imaging devices are configured and operable to move in the plant growing area in an independent manner with respect to each other.

15 In some embodiments, at least one device of said one or more first type imaging devices and at least one device of said one or more second type imaging devices are configured to move with respect to each other, in the plant growing area, with a predetermined spatial relationship therebetween, at least a portion of said first type image data, being indicative of the location of the at least one second type imaging device with
20 respect to said one or more plants, is provided by the at least one first type imaging device. The predetermined spatial relationship may be a fixed vector value.

In some embodiments, at least one device of the one or more second type imaging devices is periodically or continuously inside the first field of view of at least one device of the one or more first type imaging devices.

25 As mentioned, the first and second optical properties are different in field of view and resolution. More specifically, the second field of view and second resolution of the second type imaging device are, respectively, narrower and higher than first field of view and resolution of the first type imaging device. Thus, the first imaging device is referred to herein below as a wide-area imaging device (meaning it has a field of view wider than
30 that of the second imaging device), and the second imaging device is referred to herein below as a high-resolution imaging device (meaning it has a resolution higher than that of the first imaging device).

- 6 -

For example, the wide-area field of view is chosen to be as wide as possible in order to minimize the number of images needed to cover the crop, with the limitations being distance from the camera to the object and the minimum required resolution. If the distance from the camera to the object is about 0.5m, and a lens with 90 degrees angular field of view can be used, then the diagonal field of view on the object will be 1.0m. If the minimum required resolution for imaging of plant parts is 0.5mm, and an imaging sensor with 3 micron pixels is used, and the resolution of the optics, measured for example by line-spread-function or other relevant parameter, is 1.5 camera pixels, then magnification of $1/110 = (3 \times 1.5)/500$ is required to provide the field-of-view at the required resolution.

The high-resolution is defined by the number of image pixels needed to resolve, detect and classify the smallest expected object. For example, an insect 0.5mm in size may require about 30x30 resolved pixels in order to be analyzed, therefore an effective resolution of about 17 microns is required. If an imaging sensor with pixels 3 microns in size is used, and the resolution of the optics, measured for example by line-spread-function or other relevant parameter, is 1.5 camera pixels, then a magnification of about $1/3.8 = (3 \times 1.5)/17$ is required from object to sensor in order to provide the high-resolution capability.

It should be noted that the control system may be a distributed system, i.e. functional utilities of the control system may be distributed between the collection modules or between one or more of the collection modules and a central station; or may generally be integral with one of the collection modules. It should also be noted that the analyzer may or may not be an integral part of the monitoring system. For example, the analyzer may be located at (installed in) a central station or can be a cloud-based service; or the analyzer may be integral with the control system; or functional utilities of the analyzer may be distributed between the monitoring system (e.g. the control system and/or data collection system) and a central station or a cloud-based server.

Specifically, characterization data collected includes one or more of the following, but is not limited to, whole plant images, leaf images, leaf underside images, flower images, plant crown images, fruit images, plant branch images, images of supporting wires and poles.

Characterization of the plant status may include one or more of the following, but is not limited to, detection and/or measurement of plant shape, plant height, leaf shape,

- 7 -

leaf color, leaf discoloring, leaf orientation and linearity, pest insects, beneficial insects, fungi, insect generated liquid drops, insect webs, flower pollination, fruit size, fruit location and height from the ground, fruit orientation, fruit shape, fruit color and fruit ripeness.

- 5 In addition, one or more of the following can be saved in the system for use by the analyzer upon decision making: irrigation and fertilization data, date of planting, date of last harvest, dates of pruning and others.

Analysis of the plant condition by the analyzer may include one or more of the following, but is not limited to: generating information on the growing stage, and on the
10 location and/or severity of detrimental conditions. The growing stage information may include plant height compared to plant age/growth cycle and plant height distribution; leaf size, leaf color and leaf density and distribution; flower density and distribution; flower pollination status; fruit size, fruit color, fruit ripeness and fruit density and distribution; branch quantity and density. The detrimental conditions information may
15 include fungus location and severity distribution; insect pest location and severity distribution; leaf deformation and severity distribution.

Analysis output from the analyzer may be in the form of tabular data, density maps of parametric data, maps with embedded data such as photographs, recommended treatment maps such as beneficial type and density for spreading and insecticide type and
20 spraying parameters. In some embodiments, the data collection modules are configured and operable to be in data communication with the analyzer, for communicating the characterization data to the analyzer, thereby enabling generation of output data indicative of plant status for each plant being imaged, based on analysis of the characterization data. The output data comprises data indicative of a predetermined condition of one or more
25 plants being imaged by at least one of the first type and second type imaging devices. The operational data may further include recommendation data to a plant growth control system.

Recommendation data to a plant growth control system may include interventions that may relate to one or more of the following, but is not limited to, insecticide spraying,
30 beneficial spreading, irrigation planning, fertilization planning, fruit picking, fruit pruning, leaf and branch pruning, inspection planning, treatment type for detrimental condition taking into account presence of beneficial species. The recommendations may

- 8 -

relate to the whole cultivated area or to local requirements in a subsection of the cultivated area, or to a more than one cultivated area.

Interventions/Treatment actions may include insecticide spraying, beneficial biological agent distribution, pruning of leaves and branches, picking of fruit, thinning of fruit, and fertilizer spreading.

As described above, the control system is configured and operable to selectively activate the second type imaging device to apply the second type imaging to at least a part of said one or more plants. In some embodiments, the control system is further configured and operable to perform one or more of the following: activate imaging sessions of the first and second type imaging devices to be performed at least partially simultaneously; and selectively adjust a movement path of the second type imaging device during an imaging session, based on the image data obtained by the first type imaging device prior to or during said imaging session performed by the second type imaging device.

The analyzer may be configured and operable to analyze the first type image data obtained in a certain imaging session performed by the first type imaging device by comparing the first type image data to pre-stored image data obtained in one or more preceding imaging sessions performed by at least one of the first and second type imaging devices.

The analyzer may be configured and operable to analyze at least one of the first and second type image data and determine one or more suspect locations within the at least part of the plant growing area. The control system and/or analyzer may be configured and operable to determine at least one movement path for at least one of the first and second type imaging devices to access the one or more suspect locations.

In some embodiments, the system is configured and operable to utilize the image data obtained by at least one of the second type imaging devices to optimize (improve the quality of) analysis of the image data provided by at least one of the first type imaging devices.

In some embodiments, the control system and/or analyzer is configured and operable to analyze image data indicative of multiple overlapping images obtained by at least one of the first type imaging device and second type imaging device in the plant growing area and generate three-dimensional plant shape data associated with said plant growing area and including at least some of: leaves, branches, stalks, flowers and fruit of the plants in said plant growing area. The multiple overlapping images may comprise at

- 9 -

least one in-focus image and at least one out-of-focus image obtained by said at least one of the first imaging device and second imaging device. The control system and/or analyzer may be further configured and operable to analyze the three-dimensional plant shape data and determine one or more suspect locations in the plant growing area.

5 The system preferably includes one or more vehicles carrying the data collection module(s).

 In some embodiments, at least one vehicle from the one or more vehicles carries at least one of the first type and at least one of the second type data collection modules. The at least one second type imaging device may be mounted on the vehicle aft of the at
10 least one first type imaging device in relation to direction of travel of the vehicle during an imaging session and such that the at least one second type imaging device is continuously or periodically inside the first field of view of the at least one first type imaging device. The first type data collection module may comprise a plurality of first
15 type imaging devices located at different locations with overlapped fields of view to provide overlapped images whereby three-dimensional information extracted from the overlapped images enables at least one of the control system and analyzer to measure and control depth position of the at least one second type imaging device in relation to variable parts of the plants to apply the second type imaging with a controlled distance.

 In some embodiments, the first type and second type data collection modules are
20 carried by different vehicles.

 In some embodiments, the second type data collection module(s) comprise(s) a plurality of second type imaging devices arranged such that their fields of view extend over a vertical distance with a predetermined overlap therebetween. The height adjustment mechanisms may be configured and operable to enable overlap or adjustment
25 of overlap between the fields of view of the imaging devices of the first or second data collection modules.

 In some embodiments, the system comprises one or more vertical and lateral adjustment mechanisms configured and operable for adjusting position of the one or more second type imaging device(s) to enable access to plant parts at variable heights and
30 depths relative to the position of the one or more second type imaging device(s).

 In some embodiments, the one or more vehicles comprise at least one of unmanned aerial vehicle, unmanned ground vehicle and cable-borne vehicle.

- 10 -

In some embodiments, the vehicles are configured and operable to travel simultaneously in the plant growing area and communicate with each other to aid in prevention of collisions.

In some embodiments, the analyzer is configured and operable to carry out the following: process at least one of the characterization data provided by the first type imaging device and three-dimensional plant shape data associated with said plant growing area and determine one or more of the following plant characteristics: plant structure, plant height, plant biomass, leaf color, leaf outline including at least one of leaf size, leaf angle, leaf shape and leaf distortion, fruit size, fruit location and height from the ground, fruit orientation, fruit shape, fruit color and fruit ripeness, flower location and height from the ground, flower orientation; and analyze said one or more determined plant characteristics in accordance with the one or more predetermined conditions to perform said selective generation of at least one of the operational data to activate the second type data collection module and the recommendation data to the plant growth control system.

The analyzer may be further configured and operable to be responsive to the characterization data contained in the second type image data, and upon determining that one or more parameters of the plant correspond to one or more predetermined conditions, generate the recommendation data to the plant growth control system. Such parameter(s) of the plant determined from the second type image data may include one or more of the following: leaf shape, leaf color, leaf discoloring, pest insects, beneficial insects, fungi, insect generated liquid drops, insect webs, and diseases.

In some embodiments, the analyzer is configured and operable to utilize the parameters of the plants determined from at least one of the first and second type image data to provide output data indicative of at least a part of the plant growing area. The output data includes data indicative of one or more of the following: plant height compared to plant age/growth cycle, plant height distribution, plant biomass, leaf size, color and density distribution, fruit size, ripeness, color, density and height distribution, flower density and height distribution, branch quantity, density and height distribution, specific pest insects density, specific beneficial insects density, ratio of specific beneficial insects to specific pest insects, fungi density, and diseases density. The output data may comprise one or more of the following: tabular data, density maps of parametric data, maps with embedded data, recommended treatment maps.

- 11 -

The recommendation data may comprise at least one of the following: (i) treatment data indicative of a plant treatment plan including one or more of the following: insecticide spraying, beneficial insect spreading, irrigation planning, fertilization planning, fruit picking, fruit thinning, leaf and branch pruning, plant trellising; and (ii) environmental data indicative of an environmental condition change in the plant growing area.

In some embodiments, the control system and/or analyzer is configured for data communication with one or more plant growth modules of the plant growth control system to deliver said recommendation data, the one or more plant growth modules providing at least one of: insecticide spraying, beneficial spreading, irrigation planning, fertilization planning, fruit picking, fruit pruning, leaf and branch pruning.

The first type imaging device is configured and operable to perform an imaging session of the plant growing area with an optical axis essentially perpendicular to a row along which plants are arranged in a spaced-apart fashion. The system is configured and operable to operate said first type imaging device to perform said imaging session while moving along a movement path substantially parallel to said row. In some embodiments, the first type imaging device performs the imaging session while moving along said movement path with a varying height above ground. In some embodiments, the first type imaging device performs imaging of spaced-apart parallel rows of plants located on both sides of an aisle while moving along said movement path. In some embodiments, the data collection system is configured such that at least two of the first type imaging devices are mounted in a spaced-apart relationship on a vertical support being therefore arranged at different heights.

The system may include a flash illuminator associated with at least one of the first type and second type data collection modules. The flash illuminator may be configured and operable to provide a variety of illumination intensities and/or a variety of exposure levels for multiple image acquisitions of a plant with different illumination intensities and/or exposure levels, thereby optimizing three-dimensional modeling of the plant.

In some embodiments, the first type data collection module performs imaging sessions for plants in the row while performing relative movement with respect to the plant being imaged. The first type data collection module may comprise a flash illuminator configured and operable to provide at least one of pulse time and intensity of flash illumination selected in accordance with at least one of a velocity of said relative

- 12 -

movement and a distance between the first type imaging device and the plant being imaged.

In some embodiments, at least one of the first type data collection modules and the control system is configured and operable to periodically vary a velocity of the relative
5 movement such that the velocity drops down to below a certain value when an image capture is required.

In some embodiments, the first type data collection module comprises an angular motion mechanism, which is associated with at least one first type imaging device and is configured and operable to controllably rotate an optical axis of said at least one first type
10 imaging device such that the optical axis is perpendicular to the plant being imaged during an image capture and the velocity of angular rotation of the optical axis compensates for the relative movement of said data collection module.

In some embodiments, the first type data collection module comprises an angular motion mechanism associated with a pair of the first type imaging devices accommodated
15 such that their optical axes are parallel while pointing in opposite directions. The angular motion mechanism comprises a controllable oscillator configured and operable to perform controllable oscillation of said optical axes in an alternating fashion such that oscillation velocity compensates for the relative movement while maintaining the optical axes perpendicular to the plant during an image capture. The angular motion mechanism
20 may further comprise a pair of light directing elements in the optical axes of said pair of the first type imaging devices, respectively, to redirect optical paths defined by the optical axes to opposite pointing directions. The controllable oscillator may be associated with either the pair of the light directing elements or the pair of the first type imaging devices.

In some embodiments, an angular motion mechanism is associated with an
25 imaging sensor of the first type imaging device for controlling oscillatory motion of said imaging sensor to compensate for the relative movement.

In some embodiments, an angular motion mechanism is associated with an imaging lens of the first type imaging device for controlling oscillatory motion of the imaging lens to compensate for the relative movement.

30 In some embodiments, the first type imaging device comprises a video camera operable with a certain video frame rate, and an angular motion mechanism is configured and operable to rotate the camera at a frequency corresponding to the video frame rate.

- 13 -

In some embodiments, the first type data collection module is carried by a drone, and an angular motion mechanism is provided for controlling angular motion of the optical axis of the first imaging device by intentionally controlled yaw of the drone.

The first and second types imaging devices may be configured and operable to
5 perform imaging using one or more of the following illumination schemes: visual spectrum, IR spectrum, IR, multi-spectral imaging, exciting illumination causing fluorescence response of plants being imaged, exciting illumination causing fluorescence response of insects being imaged.

The invention also provides a method for managing operation of a plant growing
10 area, the method comprising:

applying first type imaging to at least a part of the plant growing area while moving along said at least part of the plant growing area, generating first type image data comprising characterization data indicative of various parameters of plants being imaged in said at least part of the plant growing area, and communicating said first type image
15 data to an analyzer;

in response to data received from the analyzer, selectively carrying out at least one of the following: (1) activating a second type imaging to be applied to one or more selective regions within said at least part of the plant growing area; (2) activating plant treatment procedure with respect to at least some regions said at least part of the plant
20 growing area; and (3) affecting one or more environmental conditions within the plant growing area.

In a preferred embodiment, the method comprises:

at least partially simultaneously operating at least one first type and at least one second type imaging devices in the plant growing area;

25 generating first type image data, by at least one first type imaging device, the first type image data being indicative of one or more plants in the plant growing area and of location of at least one first or second type imaging device with respect to said one or more plants in the plant growing area, and communicating said first type image data to an analyzer;

30 analyzing the first type image data, at the analyzer, to determine one or more suspect locations in said one or more plants and generating plant characterization data and navigation data for navigating at least one first or second type imaging device to said suspect locations, and

- 14 -

carrying out at least one of the following: (1) activating and navigating the at least one first or second type imaging device to image said one or more suspect locations and respectively generate first or second type image data; (2) activating one or more plant treatment procedures with respect to said one or more suspect locations; and (3) affecting
5 one or more environmental conditions within the plant growing area. The invention further provides a control system for managing operation of a plant growing area, the control system comprising:

a plurality of unmanned vehicles controllably operable to travel within the plant growing area along multiple travel paths, wherein said plurality of vehicles carrying first
10 type imaging devices of predetermined first optical properties and second type imaging device of predetermined second optical properties different from the first optical properties; and

a control unit configured and operable to control operation of a first group of vehicles and a second group of vehicles to perform first and second type imaging sessions
15 by said first type and second type imaging devices, respectively, according to predetermined first and second operational patterns, the operational pattern being defined by a motion pattern of the vehicle and an imaging mode of the imaging device.

The plurality of vehicles may be operable to travel simultaneously in the plant growing area and communicate with each other to aid in prevention of collisions.

20 The motion pattern to be used in an imaging session may be determined based on data including at least one of the following: imaging data collected in one or more preceding imaging sessions performed by at least one first and second type imaging devices; and data provided by an external information source.

The motion pattern of the second type imaging device may be periodically or
25 continuously adjusted based on operational data determined based on data collected by the first type imaging device operating simultaneously with the second type imaging device.

The invention also provides a control system for use in monitoring plants' conditions in plant growing areas, configured for data communication with multiple
30 automatic monitoring systems via a communication network and comprising an analyzer configured to be responsive to characterization data pieces received from multiple data collection modules and carry out the following, for each characterization data piece:

- 15 -

identify first or second type image data embedded in the characterization data piece and a respective plant growing area where said characterization data piece has been collected;

analyze said first or second type image data, and selectively generate at least one
5 of the following: (i) based on analysis of the first type image data, generate operational data to a local control unit of a data collection module to activate second type imaging to be applied in at least a part of the respective plant growing area; and (ii) based on analysis of at least one of the first and second type image data, generate recommendation data to a local plant growth control system of said plant growing area.

10 BRIEF DESCRIPTION OF THE DRAWINGS

In order to better understand the subject matter that is disclosed herein and to exemplify how it may be carried out in practice, embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

15 **Fig. 1** illustrates, by way of a block diagram, a non-limiting exemplary embodiment of a plant inspection system, for monitoring plants' conditions in one or more plant growing areas, in accordance with the present invention;

Figs. 2A-2C illustrate non-limiting exemplary embodiments of the data collection system, for monitoring plants' conditions in one or more plant growing areas, in
20 accordance with the present invention;

Figs. 3A-3K illustrate non-limiting exemplary embodiments of first type imaging devices being wide-area imaging devices, in accordance with the present invention;

Figs. 4A-4C illustrate non-limiting exemplary embodiments of the first or second type data collection modules when including more than one first or second type imaging
25 device, in accordance with the present invention;

Fig. 5 illustrates, by way of a block diagram, a non-limiting exemplary embodiment of a plant growth control system, for controlling growth of plants in one or more plant growing areas, in accordance with the present invention;

Fig. 6 illustrates, by way of a block diagram, a non-limiting exemplary
30 embodiment of a control system configured and operable to control the data collection system and/or the plant growth control system, in accordance with the present invention;

- 16 -

Fig. 7 illustrates, by way of a block diagram, a non-limiting exemplary embodiment of the analyzer being configured and operable to receive and analyze characterization data collected by the data collection system, and to generate the operational data and/or the recommendation data to control the data collection system and/or the plant growth control system respectively, in accordance with the present invention;

Fig. 8 exemplifies a method of the invention for monitoring and/or treating plants in a plant growing area;

Figs. 9A-9C exemplify methods of the invention for building mapping data and navigation in a plant growth area.

DETAILED DESCRIPTION OF EMBODIMENTS

Reference is made to **Fig. 1** illustrating by way of a block diagram a non-limiting exemplary embodiment of a system **100** configured and operable for monitoring plants' conditions in one or more plant growing areas, in accordance with the present invention. As shown, the system **100** includes a data collection system **102** and a control system **104** being in data communication therebetween. The data collection system **102** is configured and operable to provide characterization data about one or more plants in the plant growing area(s) and send the characterization data to the control system **104**. The control system **104** is configured and operable to receive data collected by the data collection system and control operation of the data collection system **102** by utilizing operational data received from an analyzer as will be described further below.

As illustrated, the data collection system **102** includes a plurality of (at least two) data collection modules **102M1**, **102M2**, ..., **102MN**, configured and operable to measure certain parameters of the plant(s) and provide corresponding characterization data **102C1**, **102C2**, ..., **102CN**, being indicative of various parameters of the plants being monitored. The data collection modules include such modules of at least first and second different types, where the first type data collection module **102M1** includes at least one first type imaging device **102D1** having predetermined first optical properties, and the second type data collection module **102M2** includes at least one second type imaging device **102D2** having predetermined second optical properties which are different from the first optical properties of the first type imaging device **102D1**. The first type imaging device is configured as a relatively wide-area imaging device (i.e. it has a field of view wider than

that of the second type imaging device), and the second type imaging device is a relatively high-resolution imaging device (i.e. it has a resolution higher than that of the first type imaging device). When the data collection system includes a plurality of the first type imaging device(s), they are not necessarily identical in their optical properties, i.e. they
5 can have different fields of views and/or different resolutions, inside predefined ranges of fields of view / resolutions. In case more than one first type imaging device are included, they can be operated differently (for example, one or more can take images of the plant growing area and other one or more can be used for navigating other devices in the plant growing area). The same is correct when the data collection system includes a
10 plurality of the second type imaging devices.

The characterization data provided by the first and second type imaging devices, **102C1** and **102C2**, are image data indicative of various parameters of the plants being imaged. Additional types of imaging devices, such as **102DN**, may be optionally included in the data collection modules.

15 As appreciated, the data collection system **102** may include more than the two data collection modules, e.g. *N* data collection modules **102M1** – **102MN**, as illustrated in the figure, configured and operable to provide *N* characterization data pieces **102C1** – **102CN**, as will be further described below.

It is noted that the characterization data pieces collected by the data collection
20 modules can also include information of at least some of the following parameters: image capture location spatial coordinates, image capture optical axis directional coordinates, and time of image capture.

The control system **104** is configured and operable to be in data communication with an analyzer **106** and to be responsive to the operational data **106O** received from the
25 analyzer **106**. Specifically, the operational data **106O** is based on analysis of the image data indicative of one or more plants being imaged by the first type (wide-area) imaging device **102D1**, and is used by the control system **104** to selectively activate the second type imaging device **102D2** to apply the second type imaging to at least a part of said one or more plants and provide the characterization data **102C2**. In some exemplary
30 embodiments, as illustrated in the figure, the control system **104** is configured and operable to receive the characterization data **102C**, generally originating from one or more data collection modules, and send the characterization data **102C** to the analyzer **106**. Specifically, the control system **104** is configured and operable to receive and send

- 18 -

the characterization data **120C1** indicative of one or more plants being imaged by the first type imaging device **120D1** to the analyzer **106**.

Alternatively, in some exemplary embodiments, while not illustrated in the figure, the data collection modules can be configured and operable to directly communicate with the analyzer **106** to send the characterization data **102C** thereto, while the operational data generated by the analyzer are sent to the control system **104** to thereby selectively activate a specific data collection module in the data collection system **102**. Either way, the different systems / modules include respective communication utilities enabling the various communications described above. The data communication between the different systems / modules is carried out according to suitable communication techniques known in the art and which do not need to be described in detail, e.g. via wired or wireless data communication.

As shown in the figure, the control system **104** is generally a computer system (hardware and software) configured and operable to communicate with the plurality of the data collection modules of the data collection system and with the analyzer. For example, the control system may be associated with a central system, and may be located in a central station while being configured to communicate with the data collection modules and the analyzer **106**.

In some other exemplary embodiments, though not illustrated, the control system **104** may be a distributed system, such that each data collection module or each sub-group of data collection modules has its own control system associated therewith and being configured and operable between each data collection module or each sub-group of data collection modules and the analyzer **106**. In the latter example, each such control system can be located in a local station while being configured to communicate with the corresponding data collection module(s) and the analyzer **106**, or alternatively, each control system can be integral with each data collection module, sub-group of data collection modules, or imaging device.

In some exemplary embodiments, the central or distributed control system **104** is located in corresponding one or more work stations having a user interface enabling a user to review plant status data **106S** or the operational data **106O** received from the analyzer **106** and selectively and manually activate the second type imaging device **102D2** to apply the second type imaging to at least a part of said one or more plants and provide the characterization data **102C2**.

- 19 -

The analyzer **106** does not necessarily form a constructional part of the system **100**, as illustrated in the figure. The analyzer **106** can be located in a central station or can be a cloud-based service. The analyzer **106** is configured and operable to be in data communication (according to known techniques in the art) with the system **100** and more specifically with the control system **104**. In some exemplary embodiments, the analyzer **106** can form part of the system **100**, as illustrated by the dashed line in the figure. In such a case, the analyzer **106** may be integral with the control system **104**, where both are located in a central station and configured and operable to communicate with the data collection system **102**. In some other exemplary embodiments, the analyzer's functional utilities can be distributed such that some are integral with the control system **104** and some are located in a different central station or in a cloud-based server. In yet some other exemplary embodiments, at least some of the analyzer's functional utilities can be integral with the data collection system **102**, and specifically with the first type data collection module to provide first stage analysis of the collected data thereby managing system resources and saving in overall data collection time. For example, the first type data collection module may be configured with analysis capabilities to provide immediate analysis of the first type images and discard those which are out-of-focus instead of simply transferring them to the control system/analyzer.

The analyzer **106** is configured and operable to be in data communication with the data collection module(s) or the control system, for receiving and analyzing the characterization data **102C** and generating output data indicative of plant status **106S** for each plant being imaged. Accordingly, the analyzer **106** is configured and operable for processing and analyzing the first image data **102C1** from the first type imaging device **102D1** and generating plant status data **106S**, and upon identifying, based on the first image data, a predetermined condition of one or more plants being imaged by the first type imaging device **102D1**, generating the operational data **106O** to the control system **104** to activate either the first type imaging device again, or the second type imaging device to apply the second type imaging, to at least a part of the one or more plants. The analyzer **106** may also be configured and operable for processing and analyzing the first image data **102C1** from the first type imaging device **102D1** and the second image data **102C1** from the second type imaging device **102D1** and generating plant status data **106S**. Again, as described above, activating the first and/or second type imaging device can be subject to a user's decision upon review of the plant status data **106S**. It is also noted that

- 20 -

the plant status data **106S** refers to a plant status determined by the analyzer **106** at any specific time and after analysis of any input from the data collection system **102**, for example, the plant status data **106S** can be updated by the analyzer after receiving and analyzing the characterization data **102C2** received from the second type imaging device
5 **102D2**. Therefore, the plant status data **106S** reflects the plant status in general and can refer, as the case may be, to the plant status after any specific analysis performed by the analyzer **106**.

The analyzer **106** can also be configured and operable to receive and analyze the characterization data **102C2** from the second data collection module **102M2**, or from any
10 other data collection module and generate plant status data **106S**. The analyzer **106** can perform analysis of the inputs and provide one or more outputs including: plant health status; pest recognition (quantification and location); disease recognition (quantification and location); plant structure (number and location of leaves, branches and fruits); flower characteristics (such as pollination status) and quantity; fruit health, ripeness,
15 characteristics and quantity. The outputs may be in the form of tabular data, density maps of parametric data, maps with embedded data such as photographs, recommended treatment maps such as beneficial type and density for spreading and insecticide type and spraying parameters.

The plant status data **106S**, generated by the analyzer **106** based on
20 characterization data from the first and/or second type imaging devices, may include an *image success parameter*. The image success parameter may be based on image parameters such as sharpness of the image, resolution of the image at the object plane, percentage of area of the image in focus, absolute area in focus in the image, quality of illumination in the image, exposure level in the image, part of the plant which is in focus
25 (e.g. flowers, fruit, leaves, tops of leaves, underside of leaves etc.), and others. A successful image may be defined based on an overall image success parameter above a certain threshold, or the image may receive a relative numerical score based on the aggregate of parameters, or the image may receive multiple success scores related to multiple parameters.

30 The success levels of the images in an area of plants can be analyzed by the analyzer **106** to obtain an *area success parameter*. The area may be a plant, a row of plants, the rows on two sides of an aisle, or any other area of plants as selected. The area success parameter may be defined based on the number of successful images within the

- 21 -

area, on the distances between successful images in the area, on the number of successful images of a specific plant part in the area (e.g. number of successfully focused images of flowers), the distribution of successful images, the location of successful images, and others. If the area success level is below a certain threshold, the first and/or second
5 imaging device may be brought to the same area to repeat image collection in at least part of the area, or the imaging device may collect images in new locations within the area.

The system **100** can include one or more vehicles that carry the data collection modules and bring the data collection modules **102M1-102MN** to the desired location in the plant growing area(s), as will be further described below. In some exemplary
10 embodiments, each vehicle carries at least one of the collection modules, being at least one of the first type and second type collection modules. In some exemplary embodiments, the first and second type collection modules, **102M1** and **102M2**, are carried by first and second vehicles, respectively. In some exemplary embodiments, the vehicles are at least one of unmanned aerial vehicle (UAV, drone) unmanned ground
15 vehicle, and cable borne vehicle (The cable-borne vehicle may contain at least one carriage travelling along and supported by, a cable stretched between supports above or between the plant rows).

The system **100** is configured and operable to be located in one or more plant growing area(s), e.g. in an open field or a greenhouse. In some exemplary embodiments,
20 a plurality of data collection systems **102** are located in a plurality of plant growing areas, each data collection system is connected to the same central control system **104** and analyzer **106**. In some exemplary embodiments, a plurality of systems **100**, each including a data collection system **102** and a respective control system **104**, are located in a respective plurality of plant growing areas, where all the systems **100** are connected to
25 the same central analyzer **106**.

Reference is made to **Fig. 2A**, illustrating in more detail, by way of a block diagram, a non-limiting exemplary embodiment of a data collection system **102A** configured and operable for monitoring plants' conditions in one or more plant growing areas, in accordance with the present invention. It is noted that apart from differences
30 listed herein below, the data collection system **102A** has similar functionality as the data collection system **102** described above with reference to Fig. 1.

As described above, the data collection system **102A** is configured and operable to provide characterization data about one or more plants in the plant growing area(s) and

- 22 -

send the characterization data to the control system **104**. In this specific non-limiting example, as shown, the analyzer **106** is integral with the control system **104**, where both can be located in a local or central station and configured and operable to communicate with the data collection system **102A** to receive the characterization data **102C** from the
5 data collection system **102A** and to send thereto, as needed, the operational data **106O**.

The data collection system **102A**, in this example, includes at least the first data collection module **102M1** and the second data collection module **102M2** that include respectively at least one first imaging device **102D1A** and at least one second imaging device **102D2A**, configured and operable as partially described above. Optionally, as
10 shown and as will be described further below, the data collection system **102A** also includes a third data collection module **102M3** including at least one environmental sensing device(s) **102D3A** configured and operable to provide characterization data **102C3** and receive operational data **106O3** as necessary.

The first imaging device **102D1A** includes at least one wide-area imaging device
15 (wide-area camera) and is configured and operable to perform imaging of at least one or more of the following plants' parameters: full height, imaging of the top of the plants, imaging the sides of plants and imaging of other aspects of the cultivated area, as will be described further below. The wide-area imaging device is configured to navigate the plant growing area such that it travels at a suitable distance beside, above or below the plants,
20 for example along a row undergoing inspection, and captures multiple images in order to provide visual information of the plants, e.g. the plants in the row. When the height of the plants is above the height of the vertical field of view of the wide-area imaging device, the wide-area imaging device may perform multiple scans, e.g. along the row, while changing the height and/or angle between scans, in order to collect full imaging coverage
25 of the full height of the plants. The wide-area imaging device may perform imaging of rows of plants on both sides of an aisle in parallel while traveling in the center of the aisle, thus reducing the number of scans required to collect the full imaging data. The wide-area imaging device may scan in a vertical motion while moving forward in an aisle, where multiple images are collected in an essentially vertically shifted direction, and a
30 sequential series of vertically shifted images is collected at a next horizontal location, thus enabling full imaging coverage of the full height of the plants. Sequential images collected during vertical motion may overlap in the vertical axis and images at a similar height from consecutive horizontal locations may overlap in the horizontal axis.

- 23 -

Alternatively, the vertical location of the wide-area imaging device may be varied periodically during a scan in order to perform a sampling pattern of the row of plants. The scan covers different vertical locations along the row but enables sampling the various parts of the plants at multiple locations along each row. For example, a sawtooth or
5 triangular vertical pattern may be performed along the row. Thus, a single scan essentially samples all areas of the row while the overall number of scans of the plant is reduced, thereby increasing the number of rows scanned per unit of time.

In some exemplary embodiments, depending, among others, on the stage of growth, plant height and weather conditions, the scans can be performed for only part of
10 the heights of the plant, for example: the top third of the plant, the crown of the plant and the height of ripening fruit.

The wide-area imaging device may be configured to capture visible light, near infra-red light, multi-spectral light, spectrally filtered light, and/or UV fluorescence. The light source may be selected from ambient light, and/or reflected flash illumination.

15 Additionally, in some embodiments, the first and/or second type imaging devices can be configured and operable to perform imaging using one or more of the following illumination schemes: visual spectrum, IR spectrum, IR, multi-spectral imaging, exciting illumination causing fluorescence response of plants being imaged, exciting illumination causing fluorescence response of insects being imaged.

20 In some embodiments, as described above, the wide-area imaging device (herein below referred to sometimes as “wide-area camera” or “camera”) is located on at least one of unmanned aerial vehicle, unmanned ground vehicle and cable borne vehicle, that travels in parallel to the direction of the row and the at least one wide-area imaging device captures images with the optical axis essentially perpendicular to the direction of travel.

25 The distance between consecutive wide-area images may be smaller than the width of each image, enabling overlap of the images. Thus, with sufficient overlap, at least two images are captured of each element of the plants. The spatial reference data of each image can be recorded during image capture and may include the location of the imaging device in 3-dimensional space and the 3 axes of angular orientation of the
30 imaging device, or a subset of these 6 parameters.

Wide-area images (the characterization data **102C1**) collected from the wide-area imaging device during an imaging session performed during a run (movement) along a movement path at a specific side of a row undergo comparative analysis by the analyzer

106. The comparative analysis can include morphology, color of leaf and plant structure. For this purpose, the analyzer **106** may be configured as or include a machine learning system such as a neural network, where multiple categorized images of plants at various health states are used for the learning process. The analysis can automatically compensate
5 for changes in lighting due to time of day and weather patterns.

The multiple viewing angles enable building a 3-dimensional model of each feature of the plant by the analyzer **106**. A full 3-dimensional model of all the plants in a crop area may be generated. This model enables analysis of multiple characteristics of the plant for analyzing plant health status and also enables recognizing semi-hidden elements
10 such as fruits and stalks of the plants.

In some embodiments, a 3-dimensional outline of each leaf is created from the at least two wide-area images. The leaf outlines are analyzed for leaf size, leaf angle, leaf shape and leaf distortion (including leaf curling). The 3-dimensional analysis enables separating the top side and the bottom side of the leaves. Combining the 3-dimensional
15 information with the color information of the leaves enables separation of variations caused by lighting from variations caused by leaf discoloration.

In some embodiments, a 3-dimensional model of a plant or parts of a plant may be generated using at least one in-focus image and at least one out-of-focus image, where the 3-dimensional outline of the plant or parts thereof is created from at least two images
20 including at least one out-of-focus image, and the details of the surfaces are created from the at least one in-focus image.

The plant shape information is analyzed by the analyzer **106** for detection of areas affected by disease, irrigation deficiency, fertilizer deficiency, and others, and the results of the analysis may be saved in a report for review by the user. Leaf shape and location
25 may be analyzed and compared to a library of leaf distortions and locations, accessible by the analyzer **106**, for detection of pests and diseases including viruses.

The analyzer **106** analyzes the plant information obtained from the wide-area images, for example, leaf outline and leaf color information, and defines suspect locations, usually leaves, that require further inspection.

30 The analyzer **106** may compare the information from the wide-area images to previous wide-area images from previous inspection runs. In cases where abnormalities were detected in previous runs in a specific area, the analyzer verifies whether additional changes to the plant have occurred. If further abnormalities have developed, the analyzer

- 25 -

may define that specific area as a target to be examined again by the data collection system, by a human inspector or by other means. In the case that no further abnormalities have developed, the analyzer may still define the area as a target for examining the presence of beneficial insects or the effectivity of other treatment solutions, as will be
5 further described below.

Based on the analysis of the characterization data **102C1** from the wide-area imaging device(s), the analyzer **106** may generate, as needed, operational data **106O1** for the wide-area imaging device, in the form of navigation data, for performing further scans of at least some locations of the plant growing area. The generation of the operational
10 data **106O1** can be in real-time or between scan runs.

Additionally or alternatively, based on the analysis, the analyzer **106** may generate operational data **106O2** for the second data collection module **102M2** that contains the second type imaging device(s) **102D2A** (high-resolution imaging device), to apply a second type imaging to at least some of the plants or portions of the plants that have been
15 imaged by the wide-area imaging device. For example, the operational data **106O2** may include chosen leaves (and their locations) that are suspected of having disease or pests, and the second data collection module may be utilized to detect, verify or categorize the pest or disease affecting the leaf.

The analyzer **106** may detect multiple accessible plant parts, including leaves, underside of leaves, flowers, fruit and other plant parts, which may be approached by the
20 first or second type imaging devices without encountering other plant parts. This enables inspecting multiple locations on the crop without coming into physical contact with the plant. This is of special importance when there is a need to prevent cross contamination between different areas of the crop to prevent spread of pests and diseases.

25 The operational data **106O** may include navigation data, e.g. calculation of the preferred approach vector, for the second data collection module to use when entering the foliage of the plants, where the second data collection module approaches the target from a position and direction that enables an unencumbered approach for capturing images of stems, flowers, the underside and top side of the leaves and other plant parts. The analyzer
30 **106** analyzes the location and shape of the leaves and defines navigation paths for the second data collection module to approach the more internal areas of the crops and access, for example, the plants' stalks. The operational data **106O2** transferred to the second data collection module may be in the form of at least one image, in the form of a 3-dimensional

- 26 -

coordinate path, or a combination thereof, or any other format containing the required information.

The analyzer **106** can be configured to receive as input the geometrical dimensions and degrees-of-freedom of motion of the second data collection module and combine with
5 the 3-dimensional model of the plant to extract accessible volumes which can be utilized by the second data collection module. Generally, the second data collection module may be an optical module for capturing images, measuring spectral characteristics or measuring other optical characteristics of the parts of the plant. The second data collection module may be an optical module with at least one camera for capturing images of pests,
10 diseases or other detrimental conditions on plant parts.

Data from multiple wide-area inspection runs is collected throughout at least one growing season. Systematic variations of plant parameters (e.g. plant shape, leaf size, leaf shape, leaf color) in the plant vertical axis may be characterized. The data may be parameterized and used as a reference for typical characteristics of a growth season.
15 During subsequent inspection runs, local deviations from systematic variation can be detected and correlated to specific deficiencies, pests and diseases.

As described above, the analyzer **106** may generate operational data **106O2** to selectively activate the second data collection module **102M2** by the control system **104**.

The second imaging device **102D2A** includes at least one high-resolution imaging
20 device (high resolution camera) and is configured and operable to perform imaging of parts of the plants, mainly flowers, leaves, fruit and branches, with the aim of detecting small elements such as pests, diseases and beneficial insects. Accordingly, for example, the optical resolution of the high-resolution imaging device that enables satisfactory imaging of small insects and accurate recognition and classification, can be in the range
25 of 1micron to 100 microns. Such high-resolution images can enable detection, classification and mapping of the presence of detrimental conditions. Also, this enables analysis of the local ratio of beneficial insects to pest insects.

In order to detect many types of pests and diseases, it is preferential to perform imaging of the underside of leaves, as that is the preferred habitat of many such pests,
30 especially at the early stages of the pest development. The underside of leaves is less accessible to imaging from a stand-off position, since plants grow with leaf upper side facing outwards and upwards towards solar illumination. Many pests are sub-millimeter in size, requiring high resolution of microns to tens of microns, in order to detect and

- 27 -

classify the type of pest and its development phase (e.g. egg, larvae, adult). The underside of leaves of many types of plants is not a flat plane at the millimeter scale, requiring any high-resolution imaging solution to be able to cope with, for example, partially hidden pests along protruding veins or, for example, varying distances of different parts of the leaf from a flat focal plane.

The images captured by the high-resolution imaging device **102D2A** are analyzed by the analyzer **106** for detecting presence of pests, diseases and beneficial insects. As such, the analyzer **106** may include an artificial intelligence module trained to recognize such pests, diseases and beneficial insects.

The target locations to be inspected can be provided by an external information source (e.g. the analyzer **106** that provides the operational data **106O2**), can be chosen by the control system **104** or can be predetermined based on previous inspection history from the first or second data collection modules, or can be predetermined based on a path designed to provide effective statistical sampling of the plant growing area.

As described above, the analyzer **106** can be configured to analyze previously captured wide-area images of the plants and determine candidate locations that are considered suspicious for possible presence of pest or disease.

The wide-area imaging device and the high-resolution imaging device may be carried by the same or different vehicles.

As described above, the analysis of the wide-area images may define preferred targets and provide calculated navigation/access paths for accessing those targets. For example, navigation data, such as approach vectors, can be included with the operational data **106O2** for the high-resolution imaging device to inspect the targets while providing for minimum physical interaction with the plant.

In some embodiments, a series of wide-area images covering most of the areas of a row of plants is analyzed by the analyzer **106** for suspicious locations on plants which show a possible presence of pests, disease or other detrimental conditions. The analysis provides a series of preferred target locations which may include flowers, leaves, fruits and branches of different plants along the row. The analysis may provide information on an approach path for accessing the preferred targets. Furthermore, the analyzer may preferably select certain targets located in close proximity to enable inspection from one approach path. The analyzer may also provide an optimal sequence for inspecting the preferred targets. If the time required for inspecting the preferred suspicious targets is less

- 28 -

than a predefined time, the analyzer may add additional targets to optimize a uniform coverage of the plant area up to a predefined maximum time.

The target objects may be defined in advance by the analyzer as part of an inspection path, where specific areas of the crop are defined for specific types of samples.

- 5 For example, when inspecting a row of plants, the analyzer may define areas of the row where leaves are to be examined (in x, y, z coordinates), areas where fruit are to be examined, areas where flowers are to be examined and areas where branches are to be examined. Leaves may be examined on their top side, their bottom side or both. The procedure for automatically defining the areas to be examined may take into account the
- 10 age of the plants, the height of the plants, previous history of findings on the plants, the season, the past weather history, the future weather forecast, the allotted time for inspecting the area of plants and other factors. The analyzer may preferably select locations where in a single approach, multiple targets may be accessed, for example a location where the top side of a leaf, a branch and a bottom side of a leaf can all be viewed
- 15 from a single access path. The exact plant part to be inspected may also be determined autonomously by the data collection module with the high-resolution imaging device.

Images captured by the wide-area and/or high-resolution imaging device are typically stored in a database accessible by the system and can be utilized later for analysis and comparison.

- 20 If a disease or pest is found at the specified target, the approach images may be utilized by the analyzer for improving correlations between wide-area images of a plant and the locations in which diseases and pests are present. The images may include at least one of an image of the disease or pest, an image of the plant part containing the disease or pest, an image of the plant including the vicinity of the plant part. The quality of
- 25 analysis of wide-area images by the analyzer may thus be continuously improved based on at least one image of the high-resolution imaging device. The quality of analysis of wide-area images by the analyzer may be further continuously improved based on at least two images with different field of view and resolution of the high-resolution imaging device.

- 30 The target information transferred to the high-resolution imaging device may be in the form of x-y-z coordinates, in the form of at least one target reference image, where the target reference image covers a field of view including a portion of the plants

- 29 -

surrounding the target to be imaged, in the form of a 3-dimensional path, a combination thereof or any other format containing the required information.

In some embodiments, the high-resolution imaging device is carried by an unmanned vehicle which travels or flies in the area of crops, preferably along rows of
5 crops, and is periodically brought into proximity to the plants in order to view flowers, leaves, fruit or branches. The analyzer may at least partially be located on the vehicle carrying the wide-area or high-resolution imaging device, or it may be located in a separate location while communicating with a controller on the vehicle.

In some embodiments, a vehicle with a wide-area imaging device performs
10 inspection of an area of crops in a pre-defined path. A vehicle with a high-resolution imaging device, follows the wide-area imaging device in a pre-defined path with a pre-defined time lag in order to prevent physical contact between the vehicles. The path of the high-resolution imaging device may be divided into sub-sections and additional vehicles with high-resolution imaging devices may be allocated in each sub-section with
15 appropriate time lags.

In some embodiments, the data from the wide-area inspection is analyzed by the analyzer and an additional augmented high-resolution inspection path is defined by the analyzer for the high-resolution imaging device to perform after completion of the pre-defined path.

20 In some embodiments, the wide-area data is continuously analyzed by the analyzer and where required, the analyzer defines a local augmentation of the high-resolution inspection path. The time lag between the wide-area imaging device and high-resolution imaging device is pre-defined to be sufficient to enable high-resolution imaging device path changes to be implemented in a forward location relative to the
25 instantaneous location of the vehicle. The total inspection time of the high-resolution imaging device is thus increased by addition of the augmented inspection sections.

In some embodiments, the high-resolution imaging device performs the pre-defined high-resolution inspection path without interruption and maintains a minimal time lag behind the wide-area imaging device, while the additional augmented sections
30 are performed by a second high-resolution imaging device which travels with a time lag in relation to the first high-resolution imaging device.

In some embodiments, the area to be inspected may be divided into sections, where a vehicle with a wide-area imaging device performs wide-area data collection of

- 30 -

the sections. The wide-area data of the first section is analyzed, and a high-resolution data collection path is defined by the analyzer for a vehicle with a high-resolution imaging device, which enters the section and inspects it after the wide-area imaging device has moved on to a second section. The wide-area imaging device proceeds to inspect the
5 second section, the wide-area data is analyzed and a path for the high-resolution imaging device is defined by the analyzer. The high-resolution imaging device performs inspection of the second section after the wide-area imaging device has moved to the third section. This cycle is repeated until all sections have been inspected.

Depending on the required time for performing the high-resolution inspection of
10 a section, additional vehicles with high-resolution imaging devices may be operated simultaneously within each section in order to minimize the time lag between completion of the wide-area inspection and the high-resolution inspection of a section. The high-resolution inspection path can be divided into sub-sections in order to prevent overlap and possible physical contact between the vehicles of the high-resolution imaging devices.

15 In some embodiments, more than one vehicle with a wide-area imaging device may be operated in different sections, thus enabling a shorter inspection time of the inspected area. In each section one or more high-resolution imaging devices may be operated. Thus, multiple sets of wide-area and high-resolution imaging devices may be used in parallel to cover the area to be inspected.

20 In some embodiments, the high-resolution imaging device travels a pre-determined movement path of continuous scanning of the foliage at pre-determined heights and upon completion, receives from the analyzer coordinates of a path of targets based on information from a wide-area imaging device scan including specific flowers, leaves and other plant parts. The high-resolution imaging device may follow the path and
25 capture images in continuous motion or capture images after stopping in proximity to the targets. The targets may also be determined by the analyzer using data collected during the pre-determined path of the high-resolution imaging device.

In some embodiments, the high-resolution imaging device receives coordinates of a path of targets from the analyzer based on information from a wide-area imaging device
30 scan including specific flowers, leaves and other plant parts. The high-resolution imaging device may follow the path and capture images in continuous motion or capture images after stopping in proximity to the targets.

- 31 -

In some embodiments, the high-resolution imaging device travels along the foliage at a distance which enables continuous imaging of the plants and when a potential target is recognized, the high-resolution imaging device approaches the target and performs high-resolution imaging of the target location.

5 In some embodiments, the analyzer may determine the plant parts on which pests and diseases were found in images collected by a high-resolution imaging device and combine this information with imaging device coordinate information to provide the coordinates of plant parts with verified diseases and pests. The analyzer may then combine the coordinates of plant parts with verified diseases and pests, with the wide-
10 area images collected of the same area to improve the disease and pest prediction based on wide-area images.

 In some embodiments, wide-area and high-resolution imaging devices may be located on the same vehicle. At least one wide-area imaging device may be mounted on the vehicle and at least one high-resolution imaging device may be mounted on the same
15 vehicle. In one embodiment, a high-resolution imaging device is located aft of a wide-area imaging device in relation to the vehicle's direction of travel. The imaging devices operate simultaneously, where the wide-area imaging device captures wide-area images of the plant from a distance, for example a distance of tens of centimeters, while the high-resolution imaging device captures high resolution images from a distance of centimeters,
20 preferably at angles that enable imaging of the undersides of leaves and inside flowers. The high-resolution imaging device may include an optical probe which protrudes into the foliage of the plants. The wide-area images may be analyzed, and real time information may be provided for optimizing operation of the high-resolution imaging device, such as minimization of physical contact with fruit, stems or other parts of the
25 plants. The information may be utilized for determining a preferred operation of the high-resolution imaging device to be used, for example to optimize the perpendicularity of the angle of the optical axis of the device in relation to the angle of leaves to be imaged. The information may also be used to perform rotation of the device to achieve improved perpendicularity. The information may be used to adjust the height of the imaging
30 devices. The adjustments can be performed at a high frequency with short time lag, thus enabling continuous optimized high-resolution data collection without need for slowing down the forward motion of the vehicle.

- 32 -

In some embodiments, two wide-area imaging devices and two high-resolution imaging devices are located on the vehicle, enabling simultaneous imaging of two rows of plants on either side of the vehicle. The vehicle travels essentially along the middle of the aisle between the plants and the wide-area imaging devices image plants on both sides of the vehicle. The high-resolution imaging devices perform imaging of both sides of plants with information inputs from the wide-area imaging devices. The high-resolution imaging devices may consist of optical probes which protrude into the foliage of the plants on both sides of the vehicle. The length and angle of the optical probes may be adjusted to compensate for variations in the depth of the plants' foliage and for presence of stiff plant parts which are to be avoided. The information from the wide-area imaging devices is used to perform optimization of the operation of the two high-resolution imaging devices. The adjustments can be performed at a high frequency with short time lag, thus enabling continuous optimized high-resolution data collection without need for slowing down the forward motion of the vehicle. The data collection system **102A** may include, as shown, a third data collection module **102M3** configured and operable to provide environmental data about the plant growing area. Accordingly, the third data collection module includes one or more environmental sensing devices **102D3A** configured and operable to measure and provide environmental data such as: temperature parameters, air humidity parameters, wind direction and speed parameters, weather forecast, soil humidity parameters, sunlight parameters, soil nutrient parameters.

The environmental sensing devices **102D3A** provide the environmental characterization data **102C3** to the control system **104** /analyzer **106** which can analyze the data in order to, among others, plan the necessity/time/frequency/path of next inspection runs of the first and/or second imaging devices.

The analyzer **106** receives and analyzes the wide-area images collected by the wide-area imaging device during scans along the sides of rows, for determining characteristics such as morphology, shape and color of the leaf and plant structure. As mentioned above, the analysis may be performed by a machine learning system such as a neural network, where multiple categorized images of plants at various health states are used for the learning process. The analysis automatically compensates for changes in lighting due to time of day and weather patterns. The data may be compared to a database of known conditions for the specific type of plant; the data may be compared to the data collected on the same row in one or more previous runs (imaging sessions).

- 33 -

The analyzer **106** analyzes multiple types of input data received from the data collection system. As mentioned above, the inputs for analysis may include environmental data such as temperature, humidity, sunlight, lighting, shading, also including aggregated data over a history of the growth season and of previous seasons.

- 5 The analysis can take into account characterization data and treatment data from infestations and diseases from previous occurrences and define an optimized treatment for the new occurrence.

The analysis output can include data on quantity, quality and location of flowers; quantity, color, size, quality, ripeness and location of fruit; location and shape of
10 branches.

The analysis output can include calculation of height and biomass of each plant.

In plants, such as tomatoes, where in certain cases the stems are guided to grow at an angle from the base of the stem, the system merges data from multiple wide-area images to form a layout of each plant, including stems, leaves and fruit, and provide a
15 biomass aggregate of each plant.

The analyzer's outputs can be provided in various formats including: tabular data, density maps of parametric data, maps with embedded data such as photographs, treatment recommendation maps such as beneficial type and density for spreading and insecticide type and spraying parameters, as will be further described below, and others.

20 The output may include recommendations to the user on changes in irrigation, fertilization, humidity, temperature, lighting, shading, branch pruning, fruit picking, fruit thinning, irrigation and fertilization plan changes and others. These recommended changes may be regarding adjustments to the parameter for the whole cultivated area or to a specific location in the inspected area. The output may also include recommendations
25 for additional data collection by modules including but not limited to high-resolution imaging device, wide-area imaging device, multi-spectral imaging device, UV fluorescence imaging device and others.

The inspection results of multiple rows of plants may be transformed into a 2-dimensional map by placing inspection results of the vertical sides of the plants in a
30 common plane. For two rows of plants which face each other across an aisle ("adjacent rows"), the results are represented in a single plane with the vertical data rotated into a single continuous plane such that the bases of the two rows meet along a line and the tops of the plants point away from each other. Two layers of plants which are located in the

- 34 -

same row such that the distance between the plants is small (“adjacent plants”), are laid flat while placing the tops of the plants along a common line and the bases pointing away from each other. In such a representation, the 3-dimensional information is transformed into a 2-dimensional plane, whereby the length of the rows is equivalent to a first
5 maximum dimension of the plane and the second orthogonal maximum plane dimension is equivalent to the number of rows multiplied by maximum row height multiplied by 2.

Data such as wide-area images of the full height of rows may be overlaid on the 2-dimensional representation.

Correlations may be carried out between adjacent rows and adjacent plants, and
10 like conditions marked on common locations in parallel.

As mentioned above, the analyzer **106** receives and analyzes the first type image data provided by the first type imaging device(s) (possibly through the control system **104** or in a direct communication therebetween) and may generate operational data **106O1** and/or **106O2** to activate the first and/or second type imaging device to
15 respectively apply first or second type imaging to at least part of the one or more plants (suspect locations/targets) imaged by the first type imaging device. The operational data may include navigation data for the first or second type imaging device, e.g. three-dimensional coordinates in a three-dimensional coordinate system, or an access/movement path in three-dimensional coordinate system, for approaching the
20 suspect locations. In some embodiments, the navigation data is enabled based on location-based services such as GPS or other localization techniques that utilize external localization systems. In this case, the locations of the first and second type imaging devices should be known at all times and communicated to the control system and/or analyzer to enable the analyzer to generate the navigation data for the first and/or second
25 type imaging devices and enable the acquisition of additional characterization data at the suspect locations. External localization/mapping systems may not provide sufficient accuracy to enable accurate plant level navigation at the meter, sub-meter and centimeter level, especially in enclosed areas such as indoor or metal framed greenhouse growing environments.

30 In one particular embodiment of the present invention, as will be described with reference to **Figs. 2B-2C**, the need for an external localization/mapping system is reduced, because the navigation data can be generated based solely on the analysis of the image data provided, specifically the first image data provided by the first type imaging

- 35 -

device(s). In some embodiments, the navigation data may be generated or optimized based on analysis of the second type image data.

In one embodiment, at least one second type imaging device is in the field of view of at least one first type imaging device that take(s) images (wide-area images), record(s) the location of the second type imaging device(s) in relation to the plants and to the first type imaging device(s), and determine(s) the required position of the second type imaging device(s) to access and image a forward located target. In one embodiment, at least one other first type imaging device is in the field of view of the at least one first type imaging device that take(s) images (wide-area images), record(s) the location of the other first type imaging device(s) in relation to the plants and to the at least one first type imaging device(s) taking the image(s), and determine(s) the required position of the imaged other first type imaging device(s) to access and image a forward located target. In one embodiment, at least one first and at least one second type imaging devices are in the field of view of the at least one first type imaging device that take(s) images. In one embodiment, an overlap of adjacent first type images is such that a 3-dimensional model of the plant can be calculated by the control system / analyzer and the three-dimensional (x-y-z) location of the at least one first or second type imaging device can be determined by the control system / analyzer to a high accuracy in relation to the plant parts.

The control system / analyzer analyzes at least the first type images and determines the position change, angle change, focus change and image capture timing for the at least one first or second type imaging device to image/access multiple targets taking into account the continued motion of the first type (the device taking the images) and the first type or second type imaging devices being imaged.

For example, leaf shape information can be calculated from the first type images and used to determine the focus distance setting of the first or second type imaging devices for applying respective first or second type imaging.

Multiple first and/or second type imaging devices with different directions of optical axis can be used for imaging of different plant parts such as leaves, underside of leaves, fruit and flowers. Additionally or alternatively, the at least one first or second type data collection module / imaging device may consist of multiple optical modules with optical axes in different angles and different focal working distances, having different fields of view, magnifications and type of imaging (e.g. visible light, NIR light, multi-spectral or other type of imaging). Different optical modules may be located on a common

- 36 -

vertical support or on multiple supports enabling independent change of height of the different optical modules without mutual physical interference. The at least one first or second type imaging device may include adjustable angle of optical axis, adjustable magnification and/or adjustable focus distance.

5 In one embodiment, at least one second (or first) type imaging device and at least one first type imaging device are located with respect to each other such that the field of view of the first type imaging device includes a portion of the plants being inspected and the at least one second (or other first) type imaging device. The second (or other first) type imaging device may periodically or continuously be in the field of view of the first
10 type imaging device. The control system / analyzer may receive information from at least a second device of the first type imaging devices, the information including, for example, target information containing at least one of target images, x-y-z coordinates, and approach path directions, and controls the second (or other first) type imaging device(s), assign targets (suspect locations) to be imaged by the second (or other first) type imaging
15 device(s) and guides the second (or other first) type imaging device to the targets. The supplied target images provided by the at least second device of the first type imaging devices cover a field of view including a portion of the plants surrounding the target to be imaged, and the target object can be marked in the image data or provided as an additional cropped image. The control system / analyzer compares the target image
20 received from the second first type imaging devices and the instantaneous image obtained by the first type imaging device and guides the second (or other first) type imaging device to the defined target within the first type imaging device's field of view. The control system / analyzer may provide the trigger signal for image capture by the second (or other first) type imaging device based on the images provided by the first type imaging device
25 and may calculate extrapolated relative motion between the second (or other first) type imaging device and the target, or the trigger signal may be given when an image of the first type imaging device shows the second (or other first) type imaging device to be within a predefined distance from the target. The path adjustment of the second (or other first) type imaging device(s) may be provided by motion of the second (or other first)
30 type imaging device(s) or of a vehicle carrying the second (or other first) type imaging device or a joint motion of the first and second (or other first) type imaging device(s), for example the forward motion may be provided by a drone or a ground vehicle carrying the first and/or second (or other first) type imaging device(s) and the vertical and lateral

- 37 -

motion may be provided by an adjustable member holding the second (or other first) type imaging device. The first type imaging device may be located on the vehicle carrying the second (or other first) type imaging device or connected mechanically to the second (or other first) type imaging device.

- 5 The first type imaging device may contain more than one camera located at different locations with essentially similar fields of view. In one configuration, at least two cameras are separated vertically so that forward motion related smearing is similar in the two images and correction for such smearing will be similar. The three-dimensional information extracted from the overlapped images enables the control system / analyzer
10 to measure and control the depth position of the second (or other first) type imaging device in relation to the variable structure of the plants and achieve imaging of the target with a controlled distance.

 The control system / analyzer analyzes the first type image data provided by at least one device of the first type imaging devices and determines the navigation data to
15 apply first and/or second type imaging to the plants. The navigation data includes navigation parameters of a movement path, such as the position change (movement vector data), angle change (optical axis orientation data), focus change and image capture timing (trigger time data) for the at least one second (or other first) type imaging device to image/access one or multiple targets (suspect locations) taking into account the continued
20 motion of the imaging device/vehicle.

 Based on the type of target object, target location and target angle, the control system / analyzer can select the optimal device out of multiple first or second type imaging devices for imaging of different plant parts such as leaves, underside of leaves, fruit and flowers. The at least one first or second type imaging device may include
25 adjustable angle of optical axis, adjustable magnification and/or adjustable focus distance, and the control system / analyzer can select the optimal device out of multiple first or second type imaging devices and adjust the angle of optical axis and/or the distance of the adjustable focus for imaging of different plant parts such as leaves, underside of leaves, fruit and flowers. In order to minimize motion of the first or second type imaging
30 device(s), the control system / analyzer may take into account the expected targets downstream based on previous upstream target locations on the row of plants. Analysis of the first type image data may be indicative of characteristics of the one or more suspect locations, thereby enabling effectively selecting either a first or second type imaging

- 38 -

device to respectively apply first or second type imaging to the one or more suspect locations. For example, the size of the suspect location may affect the selection decision, such that the control system / analyzer selects a second type imaging device for smaller suspect locations and a first type imaging device for larger suspect locations.

5 A few non-limiting examples are shown in the following figures. In **Fig. 2B**, a plant growing area **PGA** is inspected by the system of the invention. Two first type imaging devices **102D1A** and **102D1B** are shown having wide field of view imaging sensors **WA1** and **WA2** that may be identical or different, and scanning along a plant row as generally indicated by the arrows. A Third first type imaging device **102D1C** is also
10 shown having a wide field of view imaging sensor that may be identical or different with respect to **WA1** and **WA2**. Three second type imaging devices **102D2A**, **102D2B** and **102D2C** are also shown, having respectively high resolution imaging sensors **HR1**, **HR2** and **HR3**, that may be identical or different. Two of the second type imaging devices, **102D2A** and **102D2B**, are at least momentarily located within the field of view of the
15 first type imaging device **102D1A**, and the third second type imaging device **102D2C** is at least momentarily located within the field of view of the first type imaging device **102D1B**. One or more first type imaging devices may be at least momentarily located within the field of view of the first type imaging devices **102D1A** or **102D1B**, such as the device **102D1C** located within the field of view of the first type imaging device **102D1A**.
20 As will be further exemplified below, in some embodiments, one or more of the second (or other first) type imaging devices is(are) constantly located in the field of view of at least one first type imaging device, e.g. the second (or other first) type imaging device(s) maintain(s) predetermined spatial relationship(s) SR with the first type imaging device(s) acting at least partially simultaneously in the plant growing area.

25 During an imaging session, the first type imaging device(s) capture(s) images of the plant growing area, either in video or still images or a combination thereof, and provide(s) first image data **FID** to the control system/analyzer, where the first image data includes both data about one or more plants and about one or more portions of at least one plant in the plant growing area, and data about location of the one or more second (or
30 other first) type imaging devices inside the captured image (e.g. with respect to the one or more plants and/or the one or more portions of the at least one plant). In the described example, the first type imaging device **102D1A** can provide image data indicative of the

- 39 -

locations of the second type imaging devices **102D2A** and **102D2B**, and/or of the first type imaging device **102D1C**.

The first image data is continuously and instantly delivered to the control system / analyzer, where it is analyzed and plant status data is generated. Once the analyzer **106** detects that the first image data is indicative of suspect location(s) **SL**, it generates operational data **106O2** (or **106O1**) to activate one or more of the second (or other first) type imaging devices to apply second (or other first) type imaging to the suspect location(s) **SL**. The operational data **106O2** (or **106O1**) will also include navigation data **NAVD**, e.g. in the form of one or more movement vectors, for the one or more second (or other first) type imaging devices to approach the suspect location(s), where the navigation data **NAVD** is generated based solely on the analysis of the first image data, specifically on the portion of the first image data indicative of the location of the second (or other first) type imaging device(s) with respect to the determined suspect locations. To optimize operation of the system, the analyzer/control system can select which and how many second (or other first) type imaging device(s) should be activated and navigated to the suspect location(s) while taking into account several factors such as number of suspect locations, number of second (or other first) type imaging devices, parameters of second (or other first) type imaging devices (e.g. optical axis angle and focus distance), distance between the second (or other first) type imaging device(s) and the suspect location(s).

Accordingly, in the example of **Fig. 2B**, the navigation data **NAVD** is generated based on first image data provided by one or more first type imaging devices where the field of view, and consequently the image data provided, of each of them includes the one or more plants or portions thereof (basis for the suspect locations) and the second (or other first) type imaging device(s) and its(their) location(s) with respect to the suspect location(s). The navigation data **NAVD** may include movement vector data, optical axis orientation data and trigger time data for activating the at least one first or second type imaging devices to respectively apply the first or second type imaging to said one or more suspect locations. When a second type imaging device is selected and navigated to apply imaging to the suspect location(s), the navigation data **NAVD** may be further optimized based on analysis of the collected second type image data, thereby enhancing accuracy and detection of several plant parameters.

- 40 -

In **Fig. 2C**, another non-limiting example is shown, where a first portion of the first image data that is indicative of the one or more plants and/or the one or more portions of the at least one plant and/or the suspect location(s) is provided by one or more first type imaging devices, and a second portion of the first image data that is indicative of the location of one or more second type imaging devices with respect to the one or more plants and/or the one or more portions of the at least one plant and/or the suspect locations is provided by other one or more first type imaging devices. As mentioned earlier, the first image data may be also indicative of the location of one or more other first type imaging devices with respect to the one or more plants and/or the one or more portions of the at least one plant and/or the suspect locations. As shown, a first type imaging device **102D1A** provides a first portion of the image data **FID1** being indicative of the one or more plants and/or the one or more portions of the at least one plant and/or the suspect location(s) **SL**, and a second first type imaging device **102D1B** provides a second portion of the image data **FID2** being indicative of the location of a second type imaging device(s) **102D2A** with respect to the one or more plants and/or the one or more portions of the at least one plant and/or the surroundings of the suspect location(s), where the second portion **FID2** overlaps with at least a portion of the first portion **FID1**. The analyzer **106** receives the first and second portions **FID1** and **FID2** of the first image data, compares them and based on the overlap (that does not necessarily include the suspect location **SL**), generates the navigation data **NAVD** for the second type imaging device(s) **102D2A** to approach the suspect location(s) **SL**.

In one example, multiple consecutive comparison steps of **FID1** and **FID2** can be performed. Initially, based on the overlap between **FID1** and **FID2**, even if the suspect location(s) **SL** and the second type imaging device **102D2A** are not included in the overlapped area, navigation data **NAVD** can be calculated. Then, based on a subsequent first type image data in which at least one of **FID1** and **FID2** is collected again while the second type imaging device **102D2A** is moving towards the suspect location, the accuracy of the navigation data can be improved when the overlapped area between the newly captured image data **FID1** and **FID2** includes the suspect location **SL** and the second type imaging device(s) **102D2A**. Successive improved navigation data can be generated based on successive first type image data as the second type imaging device **102D2A** nears the suspect location **SL**. It is noted again that **FID1** can be provided by more than one first type imaging device having overlapping fields of views that generate overlapping images

- 41 -

of the plant growing area. It is also noted that **FID2** can be provided by more than one first type imaging device having overlapping fields of views that generate overlapping images of the plant growing area and second type imaging device(s).

In one specific example, one or more first type imaging devices navigate the plant
5 growing area and collect a plurality of images that cover the plants in at least a portion of the plant growing area, such as a plant row or a plurality of plant rows, to provide the first portion of the first image data that is indicative of the one or more plants and/or the one or more portions of the at least one plant and/or the suspect location(s). The plurality of images are analyzed by the analyzer and locations of suspect locations are identified and
10 are possibly allocated coordinates that are merged with the first portion of the image data to facilitate subsequent identification of the locations of the suspect locations. Then one first type device having a predetermined spatial relationship with a second type imaging device (possibly located on a common platform/vehicle), and having at least one second type imaging device within its field of view, collects first type images and provides the
15 second portion of the first type image data, that is indicative of the location of the at least one second type imaging device with respect to the one or more plants and/or the one or more portions of the at least one plant and/or the suspect locations. The control system / analyzer compares the first and second first image data portions and generates the navigation data for the at least one second imaging device to navigate the at least second
20 type imaging device to the suspect locations to thereby apply the second type imaging thereof.

Reference is made to **Figs. 3A-3K** schematically illustrating, in block diagrams, non-limiting examples of the wide-area (first type) imaging device, as a first data collection module, according to the present invention.

25 As mentioned above, generally the wide-area imaging device (camera) travels along a movement path extending along a row of plants, in parallel to the plants, with the optical axis of the wide-area camera pointing perpendicularly to the object plane of the plant, i.e. perpendicular to the movement path. This is illustrated in **Figs. 3A1-3A2**. The wide-area imaging device **102D1A** is mounted on a vehicle **200** (an unmanned ground or
30 aerial vehicle) that is capable of moving along horizontal and vertical axes in parallel to the object plane. As shown in the figure, the optical axis **OA** of the camera/sensor **300** of the imaging device points to the left and is perpendicular with respect to the travel / movement path, as well as to the object plane **OP** of the imaged plant.

- 42 -

To minimize image smearing due to the forward motion, high speed flash illuminator **310** can be used, as illustrated in **Fig. 3B**. The flash illuminator **310** may be a part of the first type data collection module being associated with the wide-area camera. The flash illuminator **310** may be operable to provide certain pulse time pattern and/or
5 intensity of the flash illumination selected in accordance with a speed/velocity of the movement and/or a distance between the wide-area camera and the plant being imaged.

In order to reduce the smearing below a required level, for example below 0.1mm at the object plane, the effective sensor exposure time of the wide-area imaging device needs to be reduced with relation to the forward motion speed. The maximum flash
10 illumination pulse time is determined by the equation:

$$dt = dX/V$$

where dX is the allowed smearing, V is the forward motion speed and dt is the maximum flash illumination pulse time.

The required intensity of the flash pulse is determined by one or more of the
15 distance between the object and camera, plant reflectance, camera aperture, sensor size and other factors. In order to reduce the contribution of the ambient light to the image, the camera exposure time needs to be reduced below a level satisfying a condition that
(camera exposure time * ambient light level at object plane) << (flash pulse time
* flash intensity at object plane).

20 This solution requires additional weight of the flash and the additional energy supply.

In some embodiments, the velocity of the forward motion of the camera/vehicle may be varied in an oscillatory manner by sequential acceleration and deceleration such that the forward velocity changes periodically, for example the velocity drops down to a
25 certain value when image capture is required and increases between locations of image capture. The velocity may be varied in a sinusoidal oscillatory manner, in a triangular wave manner, in a sawtooth manner or in some other pattern of oscillatory motion. In some embodiments, the velocity variation may be combined with high intensity flash illumination, where the maximum pulse time requirement may be increased in inverse
30 proportion to the reduction in speed.

In some embodiments, to minimize image smearing due to the forward motion, the optical axis of the camera may be rotated at a controlled angular rate in a direction opposite to the direction of forward motion about an axis essentially perpendicular to the

- 43 -

axis of motion (movement path) and to the optical axis. The camera's optical axis angle may be varied in a sinusoidal oscillatory motion, in a triangular wave motion, in a sawtooth motion or in some other pattern of oscillatory motion, where the required angular velocity is achieved when the optical axis is essentially perpendicular to the row of plants.

As illustrated in **Fig. 3C**, an appropriate angular motion mechanism is provided to implement the above-described rotation of the optical axis of the camera **300**. For example, the wide-area camera **300** can be mounted on such angular motion platform, for example on a gimbal **210**, that enables rotation of the entire camera and accordingly the optical axis of the camera, as illustrated by the arrows, to enable the optical axis to be perpendicular to the object plane at the required angular velocity to minimize the smearing effect.

In some embodiments, as illustrated in **Fig. 3D**, instead of the rotation of the camera (c.g. by mounting it on the gimbal) or in addition to it, the angular motion mechanism is configured for rotation of the optical axis (i.e. an optical path defined by the optical axis). This can be implemented by using a moveable reflective/deflective optical element **220**, such as a mirror, located in the optical axis of the camera, such that angular oscillation of the reflective optical element provides the controlled angular rotation of the optical path relative to the object plane.

The angular velocity of the optical axis rotation is appropriately selected to compensate for the smearing, whether by using a gimbal and/or a reflective optical element as illustrated above, which is determined by the velocity of the forward motion divided by the distance between the rotating element and the object plane. If the rotating element is a mirror or other reflective element, then the angular velocity to compensate for the smearing is determined by the velocity of the forward motion divided by the distance between the rotating reflective element and the object plane, divided by two.

The oscillating motion frequency is the forward motion velocity divided by the required spacing between images (image acquisitions / captures) in the forward motion direction.

In some embodiments, the oscillation of the camera angle may be utilized for compensation of image smearing when the camera/vehicle is operating between two rows of crops, where the camera oscillates through a wide arc larger than 180 degrees for sequential compensation of both rows on either side of the vehicle. During a first direction

of rotation, the camera captures a motion compensated image of a first row. After crossing past the forward direction and during the opposite direction of angular motion, the camera captures a motion compensated image of the second row.

In some embodiments, one or more angular motion mechanisms (e.g. gimbal(s))
5 can be in association with two or more cameras, , , and the cameras optical axes oscillate together thereby enabling reduction of the range of angular oscillation. This may be that case that each camera faces a different row (i.e. optical axes of the camera point to different rows): the first camera captures an image of a first row, while a second camera captures an image of a second row.

10 As illustrated in **Fig. 3E**, two cameras **300A** and **300B**, having respective optical axes **OA1** and **OA2** pointing in opposite directions (i.e. defining opposite fields of view towards oppositely located scenes), are connected to / associated with a single angular motion mechanism **210A**. The cameras capture images of opposite rows in an alternating image acquisition pattern, i.e. during an image acquisition session a first camera **300A**
15 captures an image with appropriately correcting angular motion while the angular motion of the second camera **300B** is in the non-correcting direction, and in a successive image acquisition session the second camera **300B** captures an image with appropriately correcting angular motion when the angular motion of the first camera **300A** is in the non-correcting direction. The angular motion mechanism may be a rotating gimbal or motor
20 on which the at least two cameras are placed with their optical axes being parallel (substantially coinciding) but pointing in opposite directions.

As illustrated in **Fig. 3F**, two cameras **300A** and **300B** are accommodated such that their respective optical axes **OA1** and **OA2** are arranged in a spaced-parallel relationship pointing in parallel directions. The cameras **300A** and **300B** are connected to
25 / associated with a single (common) angular motion mechanism **210A**, e.g. a rotating gimbal or motor, and respective static reflective optical elements **221A** and **221B** are located in the optical axes of the cameras and oriented with respect to the optical axes to deflect the respective optical axes to be perpendicular to respective plants. More specifically, the reflective elements redirect the optical paths defined by the optical axes
30 such that the optical paths extend along the common axis but point to the opposite directions towards opposite rows. The angular motion mechanism oscillates and scans the optical axes angle. The cameras capture images of opposite rows in an alternating pattern when the optical path defined by the axis of each camera is perpendicular to the plant and

- 45 -

the angular rotation velocity is in a compensating condition. This enables a more compact assembly than that illustrated in **Fig. 3E**.

In some embodiments, as illustrated in **Fig. 3G**, the angular motion mechanism includes rotating reflective elements (e.g. mirrors) **220A** and **220B** associated with two cameras, respectively, and a common single axis oscillator turning in opposite directions in oscillatory manner. The two cameras are placed adjacent to each other, with their optical axes being arranged in a spaced-apart parallel relationship pointing to the parallel directions, intersecting with the respective reflective elements **220A** and **220B** each oriented at a 45-degree angle from its respective optical axis. The oscillator performs the angular correction with alternating timing between the two cameras. This enables a more compact assembly than that illustrated in **Fig. 3F**.

As illustrated in **Fig. 3H**, two cameras **300A** and **300B** may be placed in line facing each other, and the angular motion mechanism includes a rotating reflective optical element **220** located between the cameras in their optical axes (substantially coinciding) **OA1** and **OA2**. The oscillating optical element **220** deflects the optical axes **OA1** and **OA2** of the respective cameras **300A** and **300B**, providing alternating image capture conditions where the optical axes are perpendicular to the plants with compensating velocity of angular rotation. This enables a narrower assembly than that illustrated in **Figs. 3E, 3F and 3G**.

In some embodiments, each camera is separately paired with a separate oscillating mirror (not shown).

The camera exposure trigger (i.e. image acquisition pattern) is synchronized with the oscillation angle, where the orientation of the optical axis is essentially perpendicular to the row of plants and the angular velocity is nearly constant. For example, if the oscillator performs a sinusoidal angular scan, the point of maximal velocity in the correcting direction will be at the $\sin(\pi/2)$ point, with a velocity drop-off of under 5% in the range of $\pi/2 \pm (5\% * \pi)$ radians. The required angular velocity is determined by the distance of the camera to the object plane and the velocity of the forward motion of the camera, where the amplitude of the oscillating motion is also determined by the required frequency of oscillation. In the case of sawtooth or other triangular oscillation profile, the connection between the angular velocity, frequency and motion amplitude may be reduced or decoupled.

- 46 -

In some embodiments, as illustrated in **Fig. 3I** a lens **310** between the object and the camera sensor may be moved in an oscillatory motion in an axis compensating for the travel motion. The lateral velocity of the lens is determined by a ratio of the lens-aperture to sensor distance divided by the object to sensor distance multiplied by the forward motion velocity.

In some embodiments, as illustrated in **Fig. 3J**, the camera's sensor **320** (pixel matrix) is moved in an oscillatory motion in an axis compensating for the travel motion. The velocity of motion of the sensor is determined by the forward motion velocity multiplied by the magnification of the optical system of the camera.

In some embodiments, as illustrated in **Fig. 3K**, the oscillator may be an aperture element of the camera placed in the optical axis and located at a Fourier plane relative to the camera sensor plane. The aperture moves parallel to the Fourier plane in the axis compensating for travel motion. The aperture's lateral velocity is determined by a ratio of the aperture to sensor distance divided by the object to sensor distance multiplied by the travel velocity.

In some embodiments, an optical image stabilizer module of any known suitable type may be used for producing a lateral compensating motion. In a case where the optical image stabilizer control is designed for compensating for camera angular vibration, a synthesized oscillatory signal is input to the pitch or yaw angular motion input of the stabilizer module, thereby producing a compensating lateral motion of the camera sensor.

In some embodiments, the at least one camera may be operated as a video camera with video frame rate. In this case, the oscillators are rotated at the video frame frequency, with a possibility to multiply the rotation frequency by an integer in order to meet angular range limitations. If the forward velocity and/or the distance to the object plane are changed, the maximal angular velocity, and therefore also the amplitude of the oscillator motion, are varied to compensate for the smearing, while maintaining the same frequency as the video. The forward motion distance between consecutive images will vary if the forward velocity changes. The forward velocity may be used as a parameter to vary the distance and a level of overlap between sequentially acquired/captured images.

In some embodiments, where smearing is reduced by compensating motion of the optics components or optical axis, flash illumination may be used to further reduce the image smearing.

Reference is made to **Figs. 4A-4C** illustrating non-limiting examples of the first data collection module type and/or the second data collection module type when including more than one first and/or second imaging device type (e.g. a wide-area imaging device / high-resolution imaging device).

5 In some embodiments, as illustrated in **Fig. 4A1**, at least two first type imaging devices (**102D1**, **102D2**, ...) are arranged on an unmanned vehicle (ground (**202**) or aerial (**204**)) being mounted on a vertical support/column/beam **205** in a spaced-apart relationship, i.e. at different heights. This enables simultaneous imaging of multiple locations at different heights of the plants on one side of the vehicle. The number of first
10 type imaging devices may be varied according to the height of the plants, the available distance between devices and the plants, and the field of view of the first type imaging devices.

The height of the first type imaging devices may be adjusted by at least one height adjustment mechanism **207** (shown in **Fig. 4A1**) to obtain controlled overlap between the
15 fields of view of the first type imaging devices. The heights and spacing between the first type imaging devices, and optionally the height of the vehicle, may be adjusted continuously or periodically by the height adjustment mechanism **207**, based on information from the control system **104** and/or based on data analysis provided by the analyzer **106**, in order to maintain required overlap between the captured images.

20 As illustrated in **Fig. 4A2**, the vertical support/column/beam **205** may be configured to carry two groups of vertically spaced first type imaging devices accommodated and oriented towards opposite directions to perform imaging of plants on both sides of the aisle, thus enabling collection of images covering the full height of all plants on both sides of an aisle.

25 In some embodiments, the wide-area camera is carried by a drone, where the angle rotation velocity of the camera's optical axis may be provided by intentionally controlled yaw of the drone. In a specific example of a multiple rotor drone, the yaw motion is introduced by changing the balance of torque provided by different rotors. In a standard controlled flight, the rotation moment around the central axis of rotation provided by the
30 counter clockwise (CCW) rotating rotors is equal to the rotation moment caused by the clockwise (CW) rotating rotors. If the torque is increased on the CW rotating rotors, the drone rotates in the CW direction about its central axis of rotation. To generate the intentional yaw for correcting the image smear, the torque is raised and lowered in one of

- 48 -

the CW or CCW sets relative to the other set in a cyclical pattern. Alternatively, the torque may be raised in one set of rotors, returned to normal, and then raised in the other rotor set, then returned to normal, and repeated in a cyclical pattern. For example, if the requirement is an oscillation with frequency of 25Hz, an oscillating signal, preferably
5 sinusoidal, is added to the motor supply of the CW rotors which raises and lowers the torque of the CW motors sinusoidally. This causes the drone to yaw periodically at this frequency.

In order to achieve the required angular velocity amplitude, the rotational inertia of the drone needs to be designed accordingly.

10 In some embodiments, as illustrated in **Fig. 4B**, instead of utilizing the standard rotors for yaw control, additional rotors (**400A**, **400B**) may be added to the existing rotors. At least one pair of rotors may be added at the outer edges of the drone **204**. The axes of the additional rotors are in a horizontal plane essentially perpendicular to, and at a radius from, the central axis of rotation, where the torque provided by the first rotor **400A** creates
15 a force which rotates the drone in the CW yaw direction while the second rotor **400B** rotates the drone in the CCW yaw direction. The torque provided by the horizontal axis rotors is varied periodically in order to generate an oscillating net rotation force and thus an oscillating yaw about the central axis of rotation.

In some embodiments, two pairs of rotors are added, where one pair is added in
20 the front of the drone and a second pair is at the aft of the drone. Within each pair of rotors, one rotor creates a CW force about the central axis of rotation and the second creates a CCW force. The torque provided by the horizontal axis rotors is varied periodically to generate an oscillating net rotation force and thus an oscillating yaw about the central axis of rotation.

25 In some embodiments, a rotatable weight is added above or below the drone, preferably near the central axis of rotation. The moment of inertia of the weight is designed to be relatively large in relation to the moment of inertia of the drone about the central axis of rotation. Rotating the weight, for example in a CW direction, will cause the drone to which it is attached to rotate in a CCW yaw direction.

30 In order to reduce drag to yaw motion, circumferential cowlings may be added around the rotors with a vertically neutral airfoil-like cross-section.

In **Figs. 4C1-4C3**, at least one first type imaging device and at least one second type imaging device are located on a vehicle with a predetermined spatial relationship

- 49 -

therebetween, such that each of the second type imaging devices is, continuously or intermittently or periodically, within the field of view of at least one of the first type imaging devices. As described above with reference to **Figs. 2B-2C**, this configuration enables navigating the second type imaging device(s) to suspect locations based solely
5 on first type images obtained by the first type imaging device(s).

In one embodiment, all of the first type (**102D1A-102D1C**) and second type (**102D2A-102D2D**) imaging devices illustrated are mounted on vertical posts **205A** and **205B** with a height adjustment mechanism **207** (enabling the height of each one of the imaging devices to be adjusted as necessary), on the vehicles **202A-202B**. The second
10 type imaging devices are located aft of the first type imaging devices with respect to the motion direction, such that the first type imaging devices capture first type images that are analyzed (by the control system/analyzer), and whenever a suspect location is identified, the control system/analyzer generates navigation data to bring the second type imaging device(s) to the suspect location(s) while the vehicle can be moving at a velocity
15 which the control system / analyzer takes into account in order to calculate the navigation path to the suspect location(s). Multiple second type imaging devices may be placed on multiple vertical posts (not shown) to enable full vertical range of each of the devices without physical interference between them.

The height adjustment mechanism ensures that the one or more second type
20 imaging devices is(are) always within the field of view of at least one first type imaging device. Alternatively, the height adjustment mechanism can determine at each time point where are the first and second type imaging devices with respect to each other, such that even when the second imaging device is momentarily out of the field of view of the first type imaging device, the height adjustment mechanism generates location adjustment
25 data that can be taken into account for bringing the second type imaging device back into the field of view of the first type imaging device and/or for generating the navigation data for the second type imaging device to bring it to the suspect location.

In one embodiment, as shown in **Fig. 4C3**, the first type imaging device(s) and second type imaging device(s) are located on a common platform, where the platform is
30 capable of directional motion (e.g. ground-based vehicle, airborne vehicle or cable-borne vehicle) and the platform enables motion of the devices in multiple degrees of freedom (e.g. by a rotating multi-segment arm, or by rotation and translation motion of a drone).

- 50 -

When the angle of view of the camera is large, additional considerations need to be made when calculating the optimal angular velocity for smear compensation. In this case, the distance between the camera and the plant row at the edge of the field of view, in the forward motion axis, is larger than the distance at the center of the image. The angular velocity calculated from the distance to the center of the image will be excessive in relation to the required correction at the edges of the image. Therefore, a compensating angular velocity intermediate to the velocities calculated from the edge and the center will be used. The result will be a slight smearing over-compensation at the edges of the image and slight under-compensation at the center of the image. It should be understood that the effective exposure time is appropriately controlled, as the uncorrected angular smearing is multiplied by the effective exposure time. For example, the angular rotation correction may reduce the smearing at the center and edges of the image by an order of magnitude in relation to the same effective exposure time. Additional flash illumination may be provided to compensate for the uncorrected angular smearing.

Narrowing the width of the image in the forward motion axis reduces the differential smearing between the center and edge of the image.

The surface of the plant is a 3-dimensional structure. The technique of the invention enables imaging of different parts of the plant with different levels of illumination. In order to enable building an image with sufficient details on multiple plant surfaces, multiple illumination levels may be utilized, where different plant surfaces reach useable illumination levels at different exposures. This may be achieved by capturing multiple images, each with a different exposure time and/or different illumination intensity level. A preferred image may be chosen for further analysis based on maximal area with sufficient exposure, or properly exposed areas from multiple images may be combined into a composite image.

Also, different parts of the 3-dimensional surface of the plant may be imaged with varying exposure levels. In order to enable building an image with sufficient details on multiple plant surfaces, multiple exposure levels may be utilized, where different plant surfaces reach useable exposure levels at different conditions. Similarly, this may be achieved by capturing multiple images, each with a different exposure time and/or flash illumination intensity level. A preferred image may be chosen for further analysis based on maximal area with sufficient exposure or properly exposed areas from multiple images may be combined into a composite image.

- 51 -

The exposure level may be varied step-wise in a systematic manner. For example, if 3 levels of exposure are required, images n , $n+3$, $n+6$, ... are set to a first exposure level, images $n+1$, $n+4$, $n+7$, ... are set to a second exposure level and images $n+2$, $n+5$, $n+8$, ... are set to a third exposure level. The multiple images may be captured with a shortened delay between images creating overlap, enabling building a composite image from multiple images with essentially the same field of view. In some embodiments, where the imaging utilizes oscillations to compensate for smearing, a series of images at different exposure levels may be captured during each cycle when the angular velocity is in sufficient compensating condition. For example, if the oscillation is sinusoidal, images taken within a narrow band about the peak angular velocity, may be captured within - 5% and +5% of the optimal angular velocity as described above.

The image capture frequency may be set to enable the distance between consecutive images during motion to be smaller than the width of each image. This enables utilization of a subset of the images with a specific exposure level while providing coverage of the full area of the plants. This may also enable building a 3-dimensional model of the plants with multiple effective exposure levels of each part of the plant. Plant parts which are located deeper within the foliage may thus be imaged with sufficient exposure level at specific angles, enabling building a more complete 3-dimensional model of the plant. An improved quality 3-dimensional model of the plants may be built using multiple images from multiple angles and with multiple levels of exposure.

The exposure levels of the captured images may be analyzed during operation, for example at the start of an imaging session with respect to a row of plants, and adjustments may be made to the exposure levels and/or to the number of exposure level steps for the subsequent images in the imaging session. The analysis of the images may be performed by a processor located on the vehicle performing the imaging or on a local or remote station communicating with the vehicle. The factors which may affect the required levels of exposure may include distance from plants, depth of foliage, density of foliage, ambient light, surface reflectivity of parts of the plants, angle of optical axis, angle of illumination and others.

The variation in level of exposure may be achieved by varying the exposure time, peak intensity level of the illumination pulses, by shortening the length of the illumination pulses, by shifting the delay between exposure time and illumination pulse or by changing both the length and the peak level of the pulses.

- 52 -

The 3-dimensional model of the plant enables forming a 3-dimensional layout of the branch topology. The branch topology is mapped and analyzed by the analyzer **106**, and operational data indicative of optimal locations for execution of branch and leaf pruning and trimming can be defined for achieving optimal plant growth and maximal production output of the crop. The information for pruning and trimming may be transferred to a plant growth control system, as will be described further below, or to a separate system for autonomous branch and leaf pruning, where the system utilizes the information for pruning specific branches and leaves. In some embodiments, the system for autonomous pruning may receive the 3-dimensional layout of the branch topology and define the optimal trimming locations independently. In some embodiments, the system for autonomous pruning may utilize a wide-area imaging device of the invention and detect and define the branches to be pruned independently.

The 3-dimensional model of the plant also enables forming a 3-dimensional fruit map of the location, size, color, ripeness, and density of fruit in the crop area. The fruit map is analyzed by the analyzer **106**, and operational data indicative of optimal locations for fruit thinning can be defined for achieving optimal plant growth and maximal production output of the crop. The information for fruit thinning may be transferred to a plant growth control system, as will be described further below, or to a separate system for autonomous fruit thinning, where the system utilizes the information for thinning specific fruit. In some embodiments, the system for autonomous fruit thinning may receive the 3-dimensional fruit map of the fruit and define the optimal thinning locations independently. In some embodiments, the system for autonomous fruit thinning may utilize a wide-area imaging device of the invention and detect and define the fruit to be thinned independently. The 3-dimensional fruit map is analyzed by the analyzer **106**, and operational data indicative of optimal locations for fruit picking can be defined for achieving optimal and maximal production output of the crop. The information for fruit picking may be transferred to a separate system for autonomous fruit picking, where the system utilizes the information for picking specific fruit. In some embodiments, the system for autonomous fruit picking may receive the 3D layout of the fruit and define the optimal picking locations independently.

The 3-dimensional model of the plant may also include 3-dimensional information on the poles, wires and strings supporting the plants. The analysis by the analyzer **106** can include recording of support pole locations and angles; guide wire continuity, location

- 53 -

and angles; relation between guide-wires and branch locations. A 3D layout of the supporting structure may be formed and analyzed, and inconsistencies in the distribution and shape (e.g. sag) may be detected. A map of required corrective actions may be provided for the user. The information may be further processed and specific locations
5 may be provided to a high-resolution imaging device of the invention for verification of issues.

Reference is made to **Fig. 5**, illustrating, by way of a block diagram, a non-limiting exemplary embodiment of a system **108** configured and operable for controlling plant growth in one or more plant growing areas, in accordance with the present invention. The
10 plant growth control system **108** is configured for example to apply a treatment or distribute beneficial insects to plants, as will be described below.

The system **108** is configured to be in data communication with the analyzer **106** either directly or indirectly through the control system **104**, as shown in the figure, to receive recommendation data **106R** for controlling the plant growth in the growing
15 area(s), where the recommendation data is generated by the analyzer **106** based on the analysis of the characterization data **102C** (any characterization data received from any one of the data collection modules of the data collection system), as described above.

It is noted that the plant growth control system **108** can form an integral part of the system **100** or **100A** described above, or can be a separate system configured and
20 operable to communicate with the analyzer **106** or the control system **104** of the system **100** or **100A**, such that a system **100B** is formed by the system **100** (or **100A**) and the system **108**.

It should also be noted that in some embodiments, the system **100** or **100A** described above, can be configured and operable to generate recommendation data for
25 intervention, e.g. by the analyzer **106**, and to forward the recommendation data to an external plant growth control system communicating therewith, or to a work station (not shown) enabling a user to observe the recommendation data and decide about a suitable intervention.

The plant growth control system includes one or more plant growth modules
30 **108D1, 108D2, ..., 108MN**, each configured to receive a respective recommendation data **106R** generated by the analyzer **106**, to thereby selectively apply one or more specific treatments to the plant(s). Generally, the term recommendation data **106R** represents any portion of a recommendation data directed to any one of the plant growth modules

- 54 -

described further below. After or while applying treatment to the plant(s), the one or more plant growth modules can optionally send feedback data **108F** to the control system. The feedback data **108F** can be processed, at the analyzer, in addition to the characterization data in order to determine about the need for further treatments. In some cases, the control system **104** may activate a first or second type data collection module to inspect the results of the applied treatment, immediately thereafter, and provide corresponding feedback data. Generally, the characterization data provided by the data collection modules, after a treatment has been performed to a specific location in the plant growing area, is sufficient for further decision making about the need of additional treatments.

10 In some embodiments, particularly when forming an integral part of the system **100** (or **100A**), the plant growth modules can be carried by one or more unmanned vehicles that bring the plant growth modules near the specific plant(s) to be treated as identified in the recommendation data **106R**, in a way similar to the data collection modules/devices of the data collection system **102**. The vehicles are controlled by the control system **104** (whether it is distributed or centralized), or by a local control system (not shown) included in the plant growth control system **108**, such that the plant growth control system **108** is operated automatically and autonomously.

20 The plant growth modules include one or more of the following: a sprayer for delivering insecticide or other treatment, a beneficial biological agent(s) distributor, a leaf and branch pruning module, a fruit thinning module, a fruit picking module, a humidifier for adjusting humidity conditions, an air conditioner for adjusting temperature in the plant(s) surrounding, a light source and shading mechanism for adjusting lighting conditions required for the growth of the plants.

The analyzer **106** analyzes the received characterization data, be it for example the characterization data **102C1** from the first data collection module **102M1** and/or the characterization data **102C2** from the second data collection module **102M2** and/or characterization data **102C3** in the form of environmental data from the third data collection module **102M3** and/or characterization data **102CN** from another data collection module **102MN** and possibly also data from an external source, such as a weather forecast, or any combination thereof. Upon determining that certain conditions are met, such as existence or condition of pest insects, beneficial insects, fungi, insect generated liquid drops, insect webs, and diseases, the analyzer generates the respective recommendation data to the suitable plant growth module. Furthermore, the analyzer may

- 55 -

generate prediction data of expected evolution of the existing conditions based on the characterization data, environmental data and weather forecast and may generate proactive recommendation data to the suitable plant growth module.

The recommendation data **106R** may be indicative of one or more of the following: treatment data indicative of a plant treatment plan, and environmental data indicative of an environmental condition change in the plant growing area. The plant treatment data may be generated for the whole plant growth area or locally for a part of the growth area, and can be indicative of one or more of the following: insecticide spraying, beneficial insect spreading, irrigation planning, fertilization planning, fruit picking or thinning, leaf and branch pruning, plant trellising, temperature change, humidity change, lighting change.

The analysis of the characterization data may include analysis of presence of multiple types of pest insects and the corresponding beneficial insects used to treat the pests, and analysis of the local ratio of beneficials to pests as well as a global aggregate score. The score may include a correlation of the density of the beneficials to density of the pests to determine the efficiency of previous treatment. For example, if the overall aggregate level of beneficials to pests is low, a general distribution of beneficials will be recommended. If the overall amount of beneficials in the cultivated area is sufficient, but the local ratio of beneficials to pests is low in specific areas, the analysis may indicate a compensating treatment to increase the beneficial density in areas where the ratio is low. A map can be generated with the required type of treatment and beneficial density per area.

Reference is made to **Fig. 6** illustrating, by way of a block diagram, a non-limiting exemplary embodiment of a control system **104** configured and operable to be responsive to operational data received from the analyzer and to control the data collection system and/or the plant growth control system, in accordance with the present invention. In the figure, various functional modules of the control system are illustrated.

The control system is generally a computer system having data input and output utilities, memory and data processing utility, and is configured to be in data communication with the data collection system and the analyzer and with the plant growth control system whenever provided, through one or more communication modules **104A** exploiting communication techniques and protocols known in the art. The control system can be configured as a local station communicating with a local data collection system

- 56 -

and/or a local plant growth control system in the plant growing area (e.g. a single greenhouse), or as a central station communicating with one or more local data collection systems and/or one or more local plant growth control systems located respectively in one or more plant growing areas. The control system is configured to activate one or more data collection modules/devices either separately or collectively, sequentially or simultaneously.

A characterization data receiver module **104B** is configured to continuously receive characterization data received from the one or more data collection modules of the data collection system, this includes image data **104B1** collected by the first and second type imaging devices, environmental data **104B2** collected by sensors of the environmental sensing module and other sensor readings of plants. In addition, the characterization data received includes time, location and/or angular direction data indicative of real time action, time, angular direction and location of each data collection module and/or device. In some embodiments, the characterization data receiver module is configured and operable to partially process the characterization data before sending it to the analyzer. The characterization data receiver module can be configured to receive feedback data from the plant growth modules, or a separate receiver module can be included in the control system.

An operational data receiver module **104C** is configured to receive the operational data from the analyzer. The operational data is generated by the analyzer based on the analysis of the characterization data. The operational data receiver can include data collection path calculator **104C1** configured and operable to calculate the path(s) (navigation data) for one or more data collection modules to perform targeted imaging and/or measurements from part(s) or all of the plant growing area(s) covered, and a plant treatment path calculator **104C2** configured and operable to calculate the path(s) for one or more plant growth modules/devices to apply targeted treatment to part(s) or all of the plant growing area(s) covered. It is noted that the path calculation (navigation data) may alternatively be performed at the analyzer, or at least partially performed at the analyzer, where the control system generates and allocates the specific paths for the specific data collection modules and/or the plant growth modules. For example, the analyzer provides a map of areas requiring a specific treatment and the control system calculates the optimal allocation of plant growth modules and their optimal path of travel. It is again noted that

- 57 -

the analyzer can be an integral part of the control system and as such the functions performed by the analyzer can be referred to the control system.

A control data generator **104D** provides, through the communication module **104A**, the operational data to the data collection modules and/or the plant growth
5 modules.

The control system may also include a memory (data storage utility) **104E** configured and operable to temporarily or permanently save history of the characterization data, the operational data, the navigation data, the recommendation data and/or the feedback data. Possibly, the data storage utility can save data relating to the
10 local plant growing area covered by the local control system.

The control system can also include a user interface module **104F** configured and operable to report to a user at least one or more of the following: collected characterization data, analysis of characterization data, recommended treatment plans data, feedback data from the plant growth control system, planned path(s) for data collection and/or treatment
15 plan(s). The user interface module can also be configured and operable to enable the user to modify and/or adjust the recommended treatment plans data, planned path(s) for data collection and/or treatment plan(s).

Reference is made to **Fig. 7** illustrating, by way of a block diagram, a non-limiting exemplary embodiment of the analyzer **106** configured and operable to receive and
20 analyze the characterization data collected by the data collection system, to generate the operational data and/or the navigation data and/or the recommendation data to control the data collection system and/or the plant growth control system respectively, in accordance with the present invention. In the figure, various functional modules of the analyzer are illustrated.

The analyzer **106** is generally a data processing utility and includes functional modules configured and operable to analyse the characterization data and provide as an output the operational, navigation and recommendation data described above. The analyzer **106** includes a communication module **106A**, a characterization data processor module **106B**, operational data generator **106C**, and a treatment plan generator **106D**, and
30 includes or is in data communication with a database **106E**.

The communication module **106A** is configured and operable to enable input/output communication with the rest of the system parts, according to known communication techniques. The characterization data processor and analyzer **106B** is

- 58 -

configured and operable to analyze the characterization data being collected. The analysis results include 3-dimensional plant information **106B1** deduced from the analysis of the characterization data obtained from images captured by the wide-area detection module(s), pest and/or beneficial and/or disease recognition **106B2** based on images and data collected by various modules, environmental conditions determination **106B3**, and plant status description/recognition **106B4**, where the plant status includes, for example, one or more of the following: relative growth status (e.g. slow growth), hydration condition (e.g. lack of water), plant shape (e.g. broken stem), and plant health. The analysis may be based on machine learning techniques as described above. It may be based on comparison with past analysis results, on comparison with accessible knowledgebase available on the internet such as images of plants and plants parts (flowers, fruit, etc.), and/or on user input. The pest and/or beneficial and/or disease recognition **106B2** and plant status description/recognition **106B4** may be analysed using information generated by the 3-dimensional plant information generation **106B1**, as well as the received characterization data **102C**. As mentioned above with reference to Fig. 6, the analyzer may also include (while not specifically shown in Fig. 7), the data collection path calculator and/or the plant treatment path calculator, or parts thereof, that generate the respective navigation data based on the analysis of the first type image data.

Based on the analysis, the operational data and treatment plan generators, **106C** and **106D**, are configured and operable to generate operational data for the data collection system and recommendation data for the plant growth control system, to thereby apply data collection and/or plant treatment.

The analyzer includes or is configured and operable to access a database **106E** to thereby save the analysis results in the database or retrieve past analysis results to be used in the analysis of the current data. The database can be part of the analyzer or an external utility accessible by the analyzer.

For example, the analyzer can compare data from first type imaging device to data stored in database from previous inspections and then generate operational data for second type of imaging device at locations where data comparison exhibits abnormal change.

The analyzer may process the characterization data and determine objects of interest and calculate coordinates of specific locations to be inspected or treated.

- 59 -

The operational data may include location coordinates and vector information for operation of second type imaging device at specific location.

The analyzer may analyze multiple overlapping images of a plant area and generate 3-dimensional plant shape data, including at least some of: leaves, branches, stalks, flowers and fruit. The images may preferably be wide-area images captured by the first type data collection modules.

The analyzer may analyze the 3-dimensional plant shape data, determine objects of interest and calculate location coordinates and/or unobstructed approach vectors to specific locations.

The operational data may include optimized path between specific locations for second type imaging device, or optimized path connecting multiple specific locations for second type imaging device.

The functionality of the system of the invention and the interaction between the different parts/utilities are further exemplified herein after in non-limiting examples.

The data collection system includes at least one vehicle carrying one or more data collection modules and at least one base station. The at least one vehicle performs inspection runs to inspect the plants in a predefined crop area, where a run includes an aerial or ground path between multiple rows of plants. The path may include all rows of the cultivated area or a subset of rows. During the inspection run, the system collects plant data including, but not limited to, images or other sensor readings of plants, selected images of leaves, flowers, and fruit, and images of the crown of the plants. In one example, a wide-area imaging device and a high-resolution imaging device may be provided and located on separate vehicles. The wide-area imaging device may capture images of diagonal dimensions of between 20 cm and 100 cm or between 100 cm and 500 cm. For example, at least one vehicle with a wide-area imaging device performs an inspection scan of the rows of crops and at least one vehicle with a high-resolution imaging device performs imaging of individual leaves, flowers and fruit. In another example, a vehicle with a wide-area imaging device travels ahead of at least one vehicle with a high-resolution imaging device with a predetermined delay in order to prevent simultaneous operation in the same part of a row. For example, if operating in a greenhouse, wherein the aisles between rows are blocked at one end, the high-resolution imaging device will be timed so as to enter the aisle only after the wide-area imaging device has completed the aisle scan and exited the aisle.

- 60 -

The paths of all the vehicles may be planned in advance. Alternatively, the data from the wide-area imaging device is analyzed and immediate recommendations are made for making changes to the path of the at least one high-resolution imaging device. If the results from the wide-area imaging device show misshapen leaves on a specific
5 plant, at least one sampling point is added on the plant and the high-resolution imaging device is sent to perform high-resolution imaging of the top side and underside of the leaves on the specific plant to determine the presence of pests or whether a viral condition exists.

The base station provides communication, navigation, cleaning and replenishment
10 services to each vehicle. The control system records the at least one vehicle's location during inspection runs. The analyzer analyzes the characterization data and recommends specific treatments to be carried out at different locations in the inspected area, based on pest and disease evolution stage and severity, expected weather conditions, and others.

The control system/analyzer determines a path for the at least one plant growth
15 module, including location, height, width and dose of the treatment. The at least one plant growth module performs the distribution of beneficial biological agents and/or the spraying of insecticides at the specific locations as required. The plant growth modules may be associated with the same base-station as the data collection modules or may use a separate base-station.

20 The automated system **100 (100A)** can be used at multiple crop sites in order to increase the utilization of the system, reduce the cost of ownership and increase profitability. When used at multiple sites growing similar types of crops, the management of the cycling of the system between sites can be done based on a repetitive cycle of adjustable or predetermined frequency. Based on economic and utilization calculations,
25 the analyzer/control system may recommend increased frequency of runs, while changing the run protocol (e.g. reduced percent of rows sampled or reduced number of samples per row) in order to retain the same overall growing- sites cycle frequency. The analyzer/control system may vary the run protocol at a certain crop site, if a detrimental condition is encountered, while minimizing the impact to other sites in the cycle. In one
30 example, this can be achieved by adding additional vehicles to be operated by the control system.

Multiple vehicles may be operated to work in parallel to decrease the total operating time of the system. In one example, multiple vehicles carrying multiple data

- 61 -

collection modules may be operated in parallel and the control system/analyzer provides the vehicles with non-intersecting travel paths. In addition, the vehicles may communicate with each other to aid prevention of collisions. The control system/analyzer may utilize information provided by some of the data collection modules in order to
5 optimize the paths of other data collection modules.

The plant monitoring and/or treatment system can be designed to be easily transported between crop sites, either as a towable wagon or on a towable wagon.

In one specific non-limiting embodiment, the automated system is operated in greenhouses. The wagon is wheeled into a greenhouse and placed at an optionally
10 predetermined location. An operator/user uses a control panel, connected to the control system, and chooses an inspection plan. The at least one vehicle departs autonomously from the base station in a predetermined inspection plan. The vehicles return periodically, if needed, to charge or exchange their batteries. The inspection plan may include the timing for battery replenishment, taking into account the specific payload of the vehicle
15 and the weather conditions. If the vehicles are drones, the drones take off autonomously from their landing pads in a predetermined inspection plan. The drones return periodically, if needed, to charge or exchange their batteries. The inspection plan may include the timing for battery replenishment, taking into account the specific payload of the drones and the weather conditions.

20 Inspection runs (imaging sessions) are performed periodically and the results are compared from run to run. The inspection runs may include data collection from a combination of at least some of: wide-area imaging device, high-resolution imaging device, infra-red imaging device, environmental sensors located in the crop area (e.g. including temperature sensors, humidity sensors). If required, the analyzer may
25 immediately, during or following a run, recommend that the vehicle return to a specific location and perform additional data collection. This may occur, for example, when a detrimental effect is seen in the morphology of leaves in a specific area, as sampled by a wide-area imaging device, and the analyzer determines that high resolution samples should be carried out on leaves in the specific area, or if the sampled data from the location
30 is found to be insufficient as in the case of a low *area success parameter*.

The inspection plan used in an inspection run is determined by the control system/analyzer, based on a number of factors including stage of plant growth, inspection history of the specific crop area, treatment history of the crop area, weather, size of the

- 62 -

crop area, system time availability, cost of operation and manual inputs from the user. Tradeoffs can be defined for the inspection rate (i.e. number of rows per hour) versus the sampling detail level (e.g. number of samples of leaves and flowers collected per row) depending on the above factors.

5 Inspection runs are carried out at a frequency determined by the typical rate of development of pest infestations and disease development, typically once per week. Depending on the season and environmental conditions such as temperature and humidity, run frequency adjustment can be recommended by the analyzer/control system. The analyzer/control system may also recommend adding a run or varying the protocol
10 of a run to increase the sampling density of a certain area of the growing site in order to verify the effectivity of a specific treatment action previously carried out.

 The analyzer communicates with the control system and/or directly with a vehicle, receives the data and performs analysis, to generate information on the status of the plants and location and severity of detrimental conditions. The analyzer provides operational
15 data in the form of tabular data, density maps of parametric data, maps with embedded data such as photographs, recommended treatment maps such as beneficial type and distribution density and insecticide type and spraying parameters, irrigation parameters, fertilizer parameters and others. The analysis data and data of the collection runs can be saved in the database.

20 Reference is made to **Fig. 8** illustrating a non-limiting exemplary of a flow diagram **10** of a method for monitoring and/or treating plants in a plant growing area, according to the invention. The method can be executed, for example, by any of the systems described above.

 At step **10A**, mapping data of at least part of the plant growing area is provided
25 and data collection path of a first type imaging is defined. In one example, at **10A1**, if mapping data is not available, a mapping run is applied to the at least part of the plant growing area (for example, to the whole plant growing area monitored), and a mapping data of the at least part of the plant growing area is generated and saved for use in future runs.

30 At step **10B**, the first type imaging is applied to at least a part of the plant growing area while moving along the at least part of the plant growing area, and a first type image data (first characterization data) indicative of various parameters of plants being imaged in the at least part of the plant growing area is generated. In one example, the first type

- 63 -

imaging is a wide-area imaging characterized by a wide field of view and low, but sufficient, resolution. If mapping data is not available, the first run of the first type imaging is applied to the at least part of the plant growing area concurrently with collecting mapping data which is saved for use in future runs.

5 At step **10C**, the first type image data is processed and analyzed. Locations including plants or parts of plants in the at least part of the plant growing area may be defined as suspect locations and at least one path to the suspect locations can be defined. As described above, the suspect locations can indicate one or more plant parameters such as diseases, pest presence, need for pruning, need for change in environmental conditions,
10 etc.

 At step **10D**, if suspect locations and corresponding path(s) were defined, one or more of the following can be performed sequentially, partly simultaneously, or fully simultaneously: the first type imaging may be applied again to one or more selective suspect locations; a second type imaging is applied to one or more selective suspect
15 locations. The second type imaging is characterized by a narrower field of view and a higher resolution than the first type imaging.

 In one example, steps **10B** and **10D** (concerning the second type imaging) can be applied partly simultaneously, with a time delay, or fully simultaneously with a path difference, between the first and second type imaging types, such that the first type
20 imaging is applied and analyzed, and a path for the second type imaging is continuously adjusted/redefined (augmented) while the first type imaging is running.

 At step **10E**, further data collection from the at least part of the plant growing area can be applied and the data is analyzed. For example, environmental data of one or more types can be collected, e.g. light conditions, temperature, humidity, etc. The analysis of
25 the collected environmental data can be used to update the suspect locations and accordingly the paths of the ongoing or next runs of the first, second and/or environmental data types.

 At step **10F**, the analysis produces reports of the status of the plants in the plant growing area and possible recommendations for plant treatment. The reports may be in
30 the form of density maps, tabular data and/or additional formats. The recommendations may be regarding plant treatments, procedures, environmental conditions and others. In some embodiments, a user may review the recommendations and perform adjustments.

- 64 -

At step **10G**, one or more plant treatment procedures, such as application of insecticide, delivery of beneficial insects or change in environmental conditions, can be applied to select locations in the at least part of the plant growing area, based on the analysis of the first type imaging, second type imaging or environmental data. The environmental data can include collected data or data fed from external sources such as weather forecasts. The data forming a basis for the analysis can be data collected over at least one run in the past.

At step **10H**, optional targeted steps **10B** to **10E** can be applied, on a regular basis or by demand or based on previous analysis, after the application of a treatment procedure to estimate the treatment efficacy and recommend about further needed treatment(s).

Reference is made to **Figs. 9A-9C**, illustrating methods of building mapping data and navigation in a plant growth area, according to exemplary non-limiting embodiments of the present invention.

Navigation of the data collection modules and/or plant growth modules in the plant growth area utilizes mapping data that is either previously or concurrently built. Acquisition of the mapping data can be, among others, in one of two ways described herein below.

According to a first non-limiting example of a flow diagram **20** of a method, exemplified in **Fig. 9A**, the mapping data is obtained by utilizing triangulation methods by defining a plurality of reference locations throughout the plant growth area and defining any other location in the plant growth area in relation to the reference locations.

At step **20A**, a main reference location is defined in the plant growth area. This can be done, for example, by placing a transceiver at the main reference location. The main reference location can be any location near the plant growth area. In one example, the main reference location is chosen to be the location of the local/central station in the plant growth area.

At step **20B**, a plurality of first reference locations along a first straight line in the plant growth area are defined, for example by placing a respective plurality of first transmitters that communicate with the transceiver at the main reference location and define the relative location of each first reference location with respect to the main reference location.

At step **20C**, a plurality of second reference locations along a second straight line, in the plant growth area, that is orthogonal to the first straight line are defined, for example

- 65 -

by placing a respective plurality of second transmitters that communicate with the transceiver at the main reference location and define the relative location of each second reference location with respect to the main reference location and/or with respect to the first reference locations.

5 At step **20D**, a data collection module carrying a second transceiver communicating with the transceiver at the main reference location and receiving signals from the transmitters, can be brought to navigate the plant growth area to collect data in the row including movement path and plants position and register location of each plant using triangulation.

10 At step **20E**, mapping data of movement paths and all plants in the plant growth area is acquired and can be saved in memory/database for future reference.

 At step **20F**, a navigation path of the data collection and/or plant growth module can be constructed based on the mapping data and the data collection and/or plant growth module, carrying a third transceiver communicating with the transceiver at the main
15 reference location and at least two transmitters, can be brought anywhere to any plant in the plant growth area.

 In **Fig. 9B**, a flow diagram **30** of a second non-limiting example of a method for building the mapping data is shown. It is prevalent that in plant growth areas, such as a greenhouse, plant supporting poles and/or structural poles are positioned within the plant
20 growth area. It is possible to map the locations of the poles and use their locations as reference data for building a navigation path for the data collection and/or plant growth modules.

 This can be performed by at least two cameras operating in stereoscopic mode. At step **30A**, a main reference point is defined within the plant growth area by placing there
25 a stereoscopic camera module. The scan can also be performed with a single camera placed sequentially at multiple predetermined locations.

 At step **30B**, a scan is performed in a horizontal plane using the stereoscopic camera module. The scan can be in 360 degrees, and performed at a height above that of the plants in order to provide a clear field of view of the plant supporting poles and/or
30 structural poles. Improved accuracy can be achieved by scanning from additional locations within the growth area.

- 66 -

At step **30C**, the stereoscopic images are analyzed and pole locations are defined, e.g. by calculating distances and angles between each pole location and the main reference location.

In cases where ambiguity arises in pole location, additional scans can be performed at different locations within the plant growth area.

At step **30D**, mapping data of the location of plant supporting poles and/or structural poles can be created and saved in a memory for future reference. The map of pole location can be transformed into a map of planted rows and spaces between rows.

At step **30E**, navigation path of a data collection and/or plant growth module can be constructed. The data collection and/or plant growth module carrying a camera module can be programmed to navigate in a path along the spaces between rows autonomously, by analyzing images it captures while navigating with the mapping reference data. Optionally, the data collection and/or plant growth module can perform a path verification, e.g. at the entrance to each aisle between rows, by capturing a stereoscopic image of the supporting structure of the specific row and comparing the image to the saved mapping data. The data collection and/or plant growth module can continuously monitor its location along its path by monitoring the poles on one or both sides, in front and behind, by imaging with the camera module, possibly a non-stereoscopic camera.

The data collection and/or plant growth module can maintain its position at the center of the aisle between rows by monitoring the distance to the poles on either side by one or more stereoscopic cameras. In cases where a path is required to be closer to a row of plants on one side of the space, the path can be controlled by a camera which maintains a determined distance from the plant. Other sensors can also be used including acoustic and laser sensors.

The map of planted rows and aisles is utilized as a base and reference for the data collected by the data collection and/or plant growth module.

The pole mapping data can be used in conjunction with a transmission based system such as, but not limited to, Wi-Fi, Bluetooth, ultra-wide-band, radar, acoustic transmitters, where the pole mapping data can be used for guidance for determining the navigation path and the transmission based system is used to electronically record the coordinates of the data collection and/or plant growth module throughout the path and especially during recording of data points with significant findings.

- 67 -

The height of the findings can be determined by the images from the data collection and/or plant growth module, by the transmission-based system using, for example, triangulation, or by various sensors located on the vehicle such as acoustic sonar sensors (transducers), infra-red, laser or others.

5 In **Fig. 9C**, a flow diagram **40** of a third non-limiting example of a method for building the mapping data is shown.

At step **40A**, coordinates of entrance to rows are provided. Image data is collected and used to determine the location and order number of the row being scanned.

In one embodiment, the location data may be generated by analysis of pole
10 locations (as described above).

In another embodiment, the location data is generated by collecting a series of first type image data, for example while the system is in motion perpendicular to the rows near the entrance to the rows. A mosaic image of the entrance of the rows is formed from the first type image data and local coordinate data is generated by analyzing the
15 dimensions in the mosaic image using the known field of view of the images or by integration of the predefined/measured velocity of the first type imaging device(s) or by a combination of the two. The local coordinate data can be verified by comparing to data about nominal row spacings.

In another embodiment, signs including features such as barcodes may be placed
20 at the start of each row, where the signs may contain information such as the row number and start of row coordinate data. The first type imaging device(s) capture images of such signs adjacent to entrances to rows or at other locations adjacent to the crop. The control system / analyzer analyzes the images and adds the information (e.g. row number, location coordinates, etc.) to the collected data associated with the subsequent scan within
25 the row.

External localization information, such as GPS or a surveyor measured reference location, can be added to the local coordinate information of the entrance to the rows in order to provide locations in the crop area in global coordinates.

At step **40B**, first type imaging to is applied to the rows. A first type data collection
30 module, that includes one or more first type imaging devices arranged vertically and/or horizontally with respect to each other, is moved along an imaging path with a predetermined first velocity, typically along a row of plants in the plant growing area, and

- 68 -

the first type imaging device(s) capture(s) images of the plants in the row and provides first type image data. This is repeated for the multiple rows of the crop.

At step **40C**, coordinate mapping of rows is generated. The control system / analyzer analyzes the first type image data together with additional measurements such as multi-axis velocity and acceleration data of the first type data collection module / imaging device. The control system / analyzer generates a mosaic image of the plants from overlapping images in the first type image data. Local coordinate data overlaying the first type image data is generated by analyzing the dimensions in the mosaic image using the known field of view of the images or by integration of the measured velocity of the first type imaging device(s) or by a combination of the two, and verified by comparing to the nominal plant spacings.

The first type image data analysis can be used to determine the location of the central stalks or trunks of the plants. Coordinates of the central stalks or trunks along the row are defined and may be added to the first type image data.

The coordinates of the entrance of a specific row are combined with the in-row coordinates of findings generated within a row. This is repeated for the multiple rows of the crop to cover at least part of the plant growing area. The coordinate mapping data may be saved for future use.

At step **40D**, a list of suspected locations is generated. The control system / analyzer analyzes the first type image data for suspect locations and defines type and coordinates of suspect locations. Target images of the plant area around the suspect locations are generated. The suspect location coordinates include the within row and row number related data. The suspect locations may include larger targets that require imaging by a first type data collection module (“first type suspect locations”) or smaller targets that require imaging by a second type data collection module (“second type suspect locations”).

At step **40E**, navigation path(s) for data collection is(are) generated. The control system / analyzer defines first and/or second type navigation paths between rows and within rows for first and/or second type data collection modules to access the suspect locations. The second type imaging path may also include continuous second type image data collection of plant parts encountered during forward motion between suspect locations. The control system / analyzer may define a first type navigation path for immediate or future review of suspect locations.

- 69 -

At step **40F**, data collection is performed. The first and second type data collection may be performed by independent units or by units carrying both first and second type imaging devices.

The first type data collection module is moved with a first velocity along the first
5 type imaging path and first type image data is generated including the first type suspect locations.

The second type data collection module is moved with a second velocity along the second type imaging path and one or more included first type imaging devices are used to control the approach of the second type imaging devices to the suspect locations.
10 Second type imaging data collected may include both suspect location image data and continuously collected image data of various plant parts. In one embodiment, at least one second type imaging device collects image data of suspect locations in parallel/simultaneously to at least one second type imaging device which continuously collects image data. The second type image data is collected, and coordinates are added
15 by coordinates provided by the control system / analyzer for the suspect locations or by analysis of the first type images of the included first type imaging devices and determination of locations of the central stalks or by integrating the second velocity over time or by a combination of the two.

At step **40G**, output of findings of first and second type data is generated. The first
20 type image data and second type image data are analyzed and various output data formats are generated. The output data may be maps of a part or of a full crop growing area.

As can be well understood, the present invention thus provides a comprehensive technique for automatic quality monitoring and treatment of plants, thereby increasing the plant growing efficiency.

- 70 -

CLAIMS:

1. A monitoring system for monitoring plants' conditions in one or more plant growing areas, the system comprising:

a data collection system configured and operable to provide characterization data
5 about various parameters of plants in said one or more plant growing areas, the data collection system comprising data collection modules of at least first and second different types, the first type data collection module comprising one or more first type imaging devices of predetermined first field of view and first resolution and the second type data collection module comprising one or more second type imaging devices of predetermined
10 second field of view narrower than the first field of view and second resolution higher than the first resolution, the characterization data provided by at least one of the one or more first type imaging devices comprising first type image data indicative of one or more plants in the plant growing area and of location of at least one device of the second type imaging devices with respect to said one or more plants in the plant growing area, the
15 characterization data provided by the one or more second type imaging devices comprising second type image data indicative of one or more portions of plants in the plant growing area;

a control system configured and operable to activate at least one of said one or more first type imaging devices and at least one of said one or more second type imaging
20 devices at least partially simultaneously, and to be in data communication with an analyzer to be responsive to operational data received from the analyzer, the operational data being based on analysis of the first type image data and comprising navigation data to navigate the at least one second type imaging device or at least one device of the first type imaging devices in the plant growing area.

2. The system according to claim 1, wherein said first type image data is further
25 indicative of location of at least one first type imaging device with respect to said one or more plants in the plant growing area.

3. The system according to claim 1 or 2, wherein based on the analysis of the first type image data, location(s) of the one or more plants in the plant growing area are
30 identified and plant location data is generated and utilized for generating said navigation data, the navigation data comprising at least one movement path data.

- 71 -

4. The system according to any one of the preceding claims, wherein based on the analysis of the first type image data, one or more suspect locations in the one or more plants is(are) identified, said navigation data comprising at least one movement path data of the at least one first or second type imaging devices to said one or more suspect
- 5 locations, said movement path data comprising movement vector data, optical axis orientation data and trigger time data for activating the at least one first or second type imaging devices to respectively apply the first or second type imaging to said one or more suspect locations.
5. The system according to claim 4, wherein said at least one second type imaging
- 10 device is activated to apply said second type imaging to said one or more suspect locations, said navigation data being further based on analysis of the second type image data to optimize said at least one movement path data.
6. The system according to any one of claims 3 to 5, wherein said at least one device of said first and second type imaging devices being activated, is operated to apply
- 15 continuous imaging along the at least one movement path.
7. The system according to any one of claims 4 to 6, wherein said analysis of the first type image data is indicative of characteristics of the one or more suspect locations thereby enabling selecting either said first or second type imaging devices to respectively apply said first or second type imaging to said one or more suspect locations.
- 20 8. The system according to any one of the preceding claims, wherein said first type image data is provided by a single device of the one or more first type imaging devices.
9. The system according to claim 8, wherein said first type image data comprises overlapping images obtained by the single first type imaging device.
10. The system according to any one of claims 1 to 7, comprising a plurality of the
- 25 first type imaging devices, said first type image data being provided by two or more devices of the plurality of the first type imaging devices.
11. The system according to claim 10, wherein said portion of the first image data, being indicative of the one or more plants in the plant growing area, is provided by at least one device of the plurality of first type imaging devices, and said portion of the first
- 30 image data, being indicative of the location of at least one of the one or more second type imaging devices with respect to said one or more plants in the plant growing area, is provided by at least second device of the plurality of first type imaging devices.

- 72 -

12. The system according to claim 10 or 11, wherein said navigation data is generated based on analysis of overlapping data between two or more first type images provided respectively by the two or more first type imaging devices.

13. The system according to any one of the preceding claims, comprising a plurality
5 of second type imaging devices part of which having different directions of optical axes or different focal distances.

14. The system according to claim 13, wherein at least one device of the plurality of second type imaging devices has at least one of adjustable angle of optical axis, adjustable magnification or adjustable focus distance.

10 **15.** The system according to any one of the preceding claims, wherein at least one device of said one or more first type imaging devices and at least one device of said one or more second type imaging devices are configured and operable to move in the plant growing area in an independent manner with respect to each other.

16. The system according to any one of claims 1 to 14, wherein at least one device of
15 said one or more first type imaging devices and at least one device of said one or more second type imaging devices are configured to move with respect to each other, in the plant growing area, with a predetermined spatial relationship therebetween, at least a portion of said first type image data, being indicative of the location of the at least one second type imaging device with respect to said one or more plants, is provided by the at
20 least one first type imaging device.

17. The system according to claim 16, wherein said predetermined spatial relationship is a fixed vector value.

18. The system according to any one of the preceding claims, wherein at least one device of the one or more second type imaging devices is periodically or continuously
25 inside the first field of view of at least one device of the one or more first type imaging devices.

19. The system according to any one of the preceding claims, wherein the control system is further configured and operable to perform one or more of the following: activate imaging sessions of at least one device of the second type imaging devices to be
30 performed at least partially simultaneously; and selectively adjust a movement path of at least one of the second type imaging devices during an imaging session, based on the first type image data obtained by the one or more first type imaging devices prior to or during said imaging session performed by the at least one second type imaging device.

- 73 -

20. The system according to any one of the preceding claims, wherein said data collection modules are configured and operable to be in data communication with the analyzer, for communicating the characterization data to said analyzer, thereby enabling generation of output data indicative of plant status for each plant being imaged based on
5 analysis of said characterization data, said output data comprising data indicative of predetermined condition of said one or more plants being imaged by at least one of the first type and second type imaging devices, said operational data further comprising recommendation data to a plant growth control system.

21. The system according to claim 20, wherein said analyzer is configured and
10 operable to analyze first type image data obtained in a certain imaging session performed by the first type imaging device by comparing said first type image data to pre-stored image data obtained in one or more preceding imaging sessions by at least one of the first and second type imaging devices.

22. The system according to any one of the preceding claims, wherein at least one of
15 said control system and analyzer is configured and operable to analyze image data indicative of multiple overlapping images obtained by at least one of the first type imaging devices and second type imaging devices in the plant growing area and generate three-dimensional plant shape data associated with said plant growing area and including at least some of: leaves, branches, stalks, flowers and fruit of the plants in said plant
20 growing area.

23. The system according to claim 22, wherein said multiple overlapping images comprise at least one in-focus image and at least one out-of-focus image obtained by said at least one of the first imaging devices and second imaging devices.

24. The system according to claim 22 or 23, wherein at least one of said control
25 system and analyzer is further configured and operable to analyze said three-dimensional plant shape data and determine one or more suspect locations in the plant growing area.

25. The system according to any one of the preceding claims, comprising one or more vehicles carrying the data collection module(s).

26. The system according to claim 25, wherein at least one vehicle from the one or
30 more vehicles carries at least one of the first type and at least one of the second type data collection modules.

27. The system according to claim 26, wherein said at least one second type imaging device is mounted on the vehicle aft of the at least one first type imaging device in relation

- 74 -

to direction of travel of the vehicle during an imaging session and such that the at least one second type imaging device is continuously or periodically inside the first field of view of the at least one first type imaging device.

28. The system according to claim 27, wherein said first type data collection module
5 comprises a plurality of first type imaging devices located at different locations with overlapped fields of view to provide overlapped images whereby three-dimensional information extracted from the overlapped images enables at least one of the control system and analyzer to measure and control depth position of the at least one second type imaging device in relation to variable parts of the plants to apply the second type imaging
10 with a controlled distance.

29. The system according to claim 25, wherein the first type and second type data collection modules are carried by different vehicles.

30. The system according to any one of claims 25 to 29, wherein said first type data collection module(s) comprise(s) a plurality of first type imaging devices arranged such
15 that their fields of view extend over a vertical distance with a predetermined overlap therebetween.

31. The system according to any one of claims 25 to 30, wherein said second type data collection module(s) comprise(s) a plurality of second type imaging devices arranged such that their fields of view extend over a vertical distance with a predetermined overlap
20 therebetween.

32. The system according to claim 30 or 31, comprising one or more height adjustment mechanisms configured and operable to enable overlap or adjustment of overlap between the fields of view of the imaging devices of the first or second data collection modules.

33. The system according to any one of claims 25 to 30, comprising one or more
25 vertical and lateral adjustment mechanisms configured and operable for adjusting position of the one or more second type imaging device(s) to enable access to plant parts at variable heights and depths relative to the position of the one or more second type imaging device(s).

34. The system according to any one of claims 24 to 33, wherein said one or more
30 vehicles comprise at least one of unmanned aerial vehicle, unmanned ground vehicle and cable-borne vehicle.

- 75 -

35. The system according to any one of the preceding claims, wherein at least some of functional utilities of the control system are incorporated in one or more of the data collection modules.

36. The system according to any one of the preceding claims, having one of the following configurations: (a) the analyzer is integral with the control system; (b) the analyzer is located at a central station being in data communication with the control system; (c) functional utilities of the analyzer are distributed between the control system and a central station; (d) functional utilities of the analyzer are distributed between the one or more of the data collection modules and a central station.

37. The system according to any one of the preceding claims, wherein the operational data further comprises at least one of the following: tabular data, density maps of parametric data, maps with embedded data, recommended treatment maps.

38. The system according to any one of the preceding claims, wherein the data collection system further comprises one or more third type data collection modules comprising one or more sensors configured and operable to monitor one or more environmental conditions of the plant growing area, and provide environmental data indicative of said one or more conditions.

39. The system according to any one of the preceding claims, wherein the characterization data provided by either one or both of the first and second type imaging devices comprise data indicative of one or more the following: whole plant images, leaf images, leaf underside images, flower images, plant crown images, fruit images, branch images, images of supporting wires and poles.

40. The system according to claim 38 or 39, wherein the characterization data provided by the third type data collection modules comprise one or more of the following: temperature parameters, air humidity parameters, wind direction and speed parameters, weather forecast, soil humidity parameters, sunlight parameters, soil nutrient parameters.

41. The system according to any one of claims 20 to 40, wherein the analyzer is configured and operable to carry out the following:

process at least one of the characterization data provided by the first type imaging device and three-dimensional plant shape data associated with said plant growing area and determine one or more of the following plant characteristics: plant structure, plant height, plant biomass, leaf color, leaf outline including at least one of leaf size, leaf angle, leaf shape and leaf distortion, fruit size, fruit location and height from the ground, fruit

- 76 -

orientation, fruit shape, fruit color and fruit ripeness, flower location and height from the ground, flower orientation, flower pollination status; and

analyze said one or more determined plant characteristics in accordance with the one or more predetermined conditions to perform said selective generation of at least one
5 of the operational data to activate and navigate the second type data collection module, and the recommendation data to the plant growth control system.

42. The system according to any one of claims 20 to 41, wherein said analyzer is further configured and operable to be responsive to the characterization data contained in the second type image data, and upon determining that one or more parameters of the
10 plant correspond to one or more predetermined conditions, generate the recommendation data to the plant growth control system.

43. The system according to claim 42, wherein said one or more parameters of the plant determined from the second type image data include one or more of the following: leaf shape, leaf color, leaf discoloring, pest insects, beneficial insects, fungi, insect
15 generated liquid drops, insect webs, diseases and flower pollination status.

44. The system according to any one of claims 20 to 43, wherein said analyzer is configured and operable to utilize the parameters of the plants determined from at least one of the first and second type image data to provide output data indicative of at least a part of the plant growing area, the output data including data indicative of one or more
20 of the following: plant height compared to plant age/growth cycle, plant height distribution, plant biomass, leaf size, color and density distribution, fruit size, ripeness, color, density and height distribution, flower density and height distribution, branch quantity, density and height distribution, specific pest insects density, specific beneficial insects density, ratio of specific beneficial insects to specific pest insects, fungi density,
25 diseases density, flower pollination status.

45. The system according to claim 44, wherein said output data comprises one or more of the following: tabular data, density maps of parametric data, maps with embedded data, recommended treatment maps.

46. The system according to any one of claims 20 to 45, wherein said recommendation
30 data comprises at least one of the following: (i) treatment data indicative of a plant treatment plan including one or more of the following: insecticide spraying, beneficial insect spreading, irrigation planning, fertilization planning, fruit picking, fruit thinning,

- 77 -

leaf and branch pruning, plant trellising, flower pollination; and (ii) environmental data indicative of an environmental condition change in the plant growing area.

47. The system according to any one of claims 20 to 46, wherein at least one of said control system and analyzer is configured for data communication with one or more plant growth modules of the plant growth control system to deliver said recommendation data, the one or more plant growth modules providing at least one of: insecticide spraying, beneficial spreading, irrigation planning, fertilization planning, fruit picking, fruit pruning, leaf and branch pruning, and flower pollination.

48. The system according to claim 46 or 47, wherein said treatment data is in the form of treatment maps that include at least some of the parameters: beneficial insect type, locations and density for spreading and insecticide type, locations and spraying parameters.

49. The system according to any one of the preceding claims, wherein each of the first and second types imaging devices is configured and operable to perform imaging using one or more of the following illumination schemes: visual spectrum, IR spectrum, IR, multi-spectral imaging, exciting illumination causing fluorescence response of plants being imaged, exciting illumination causing fluorescence response of insects being imaged.

50. The system according to any one of claims 25 to 34, wherein the vehicles are configured and operable to travel simultaneously in the plant growing area and communicate with each other to aid in prevention of collisions.

51. The system according to claim 1, wherein at least one device of the first type imaging devices provides a first portion of the first type image data being indicative of one or more plants in the plant growing area, and at least one device of the first type imaging devices provides a second portion of the first type image data being indicative of location of at least one second type imaging device with respect to said one or more plants in the plant growing area; the control system being configured and operable to receive and analyze said first portion of the first type image data to identify one or more suspect locations in the one or more plants, receive and analyze said second portion of the first type image data and compare the second portion with the first portion to generate the operational data comprising the navigation data to navigate the at least one second type imaging device, while inside the field of view of the at least one first imaging device

- 78 -

providing the second portion of the first type image data, to said suspect locations in the plant growing area, to apply the second type imaging thereto.

52. A method for monitoring one or more plants in a plant growing area, the method
5 comprising:

at least partially simultaneously operating at least one first type and at least one second type imaging devices in the plant growing area;

generating first type image data, by at least one first type imaging device, the first type image data being indicative of one or more plants in the plant growing area and of
10 location of at least one first or second type imaging device with respect to said one or more plants in the plant growing area, and communicating said first type image data to an analyzer;

analyzing the first type image data, at the analyzer, to determine one or more suspect locations in said one or more plants and generating plant characterization data
15 and navigation data for navigating at least one first or second type imaging device to said suspect locations, and

carrying out at least one of the following: (1) activating and navigating the at least one first or second type imaging device to image said one or more suspect locations and respectively generate first or second type image data; (2) activating one or more plant
20 treatment procedures with respect to said one or more suspect locations; and (3) affecting one or more environmental conditions within the plant growing area.

53. The method according to claim 52, wherein said first type image data is obtained by a plurality of first type imaging devices having overlapping fields of view.

54. The method according to claim 53, wherein a first portion of the first type image
25 data being indicative of the one or more plants is obtained by at least first one of the plurality of first type imaging devices, and a second portion of the first type image data being indicative of location of at least one first or second type imaging device with respect to said one or more plants is obtained by at least second one of the plurality of first type imaging devices.

55. The method according to claim 54, wherein said second portion of the first type
30 image data is obtained by the at least second one of the plurality of first type imaging devices while having a predetermined spatial relationship with the at least one second type imaging device.

- 79 -

56. The method according to any one of claims 52 to 55, wherein said second type image data is communicated to the analyzer and combined with previously collected first type or second type image data and external information for generating the plant treatment procedure.

5

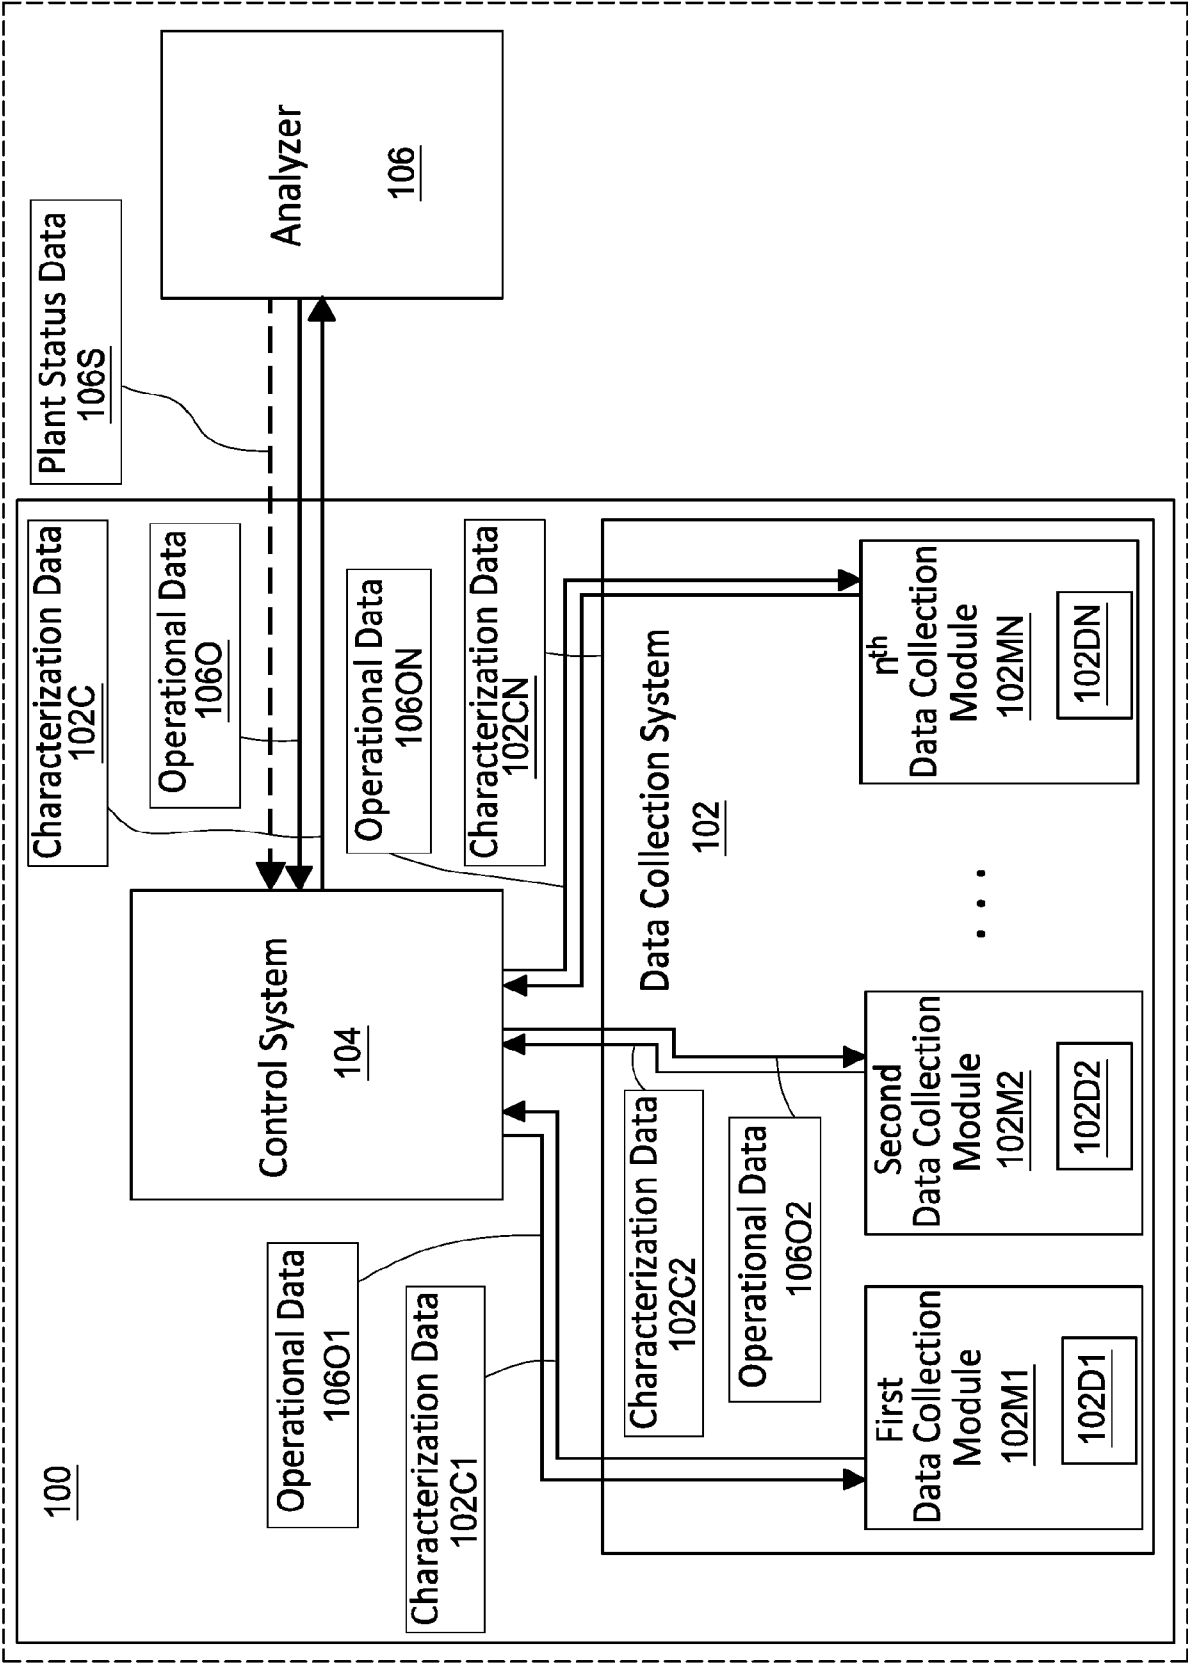


Fig. 1

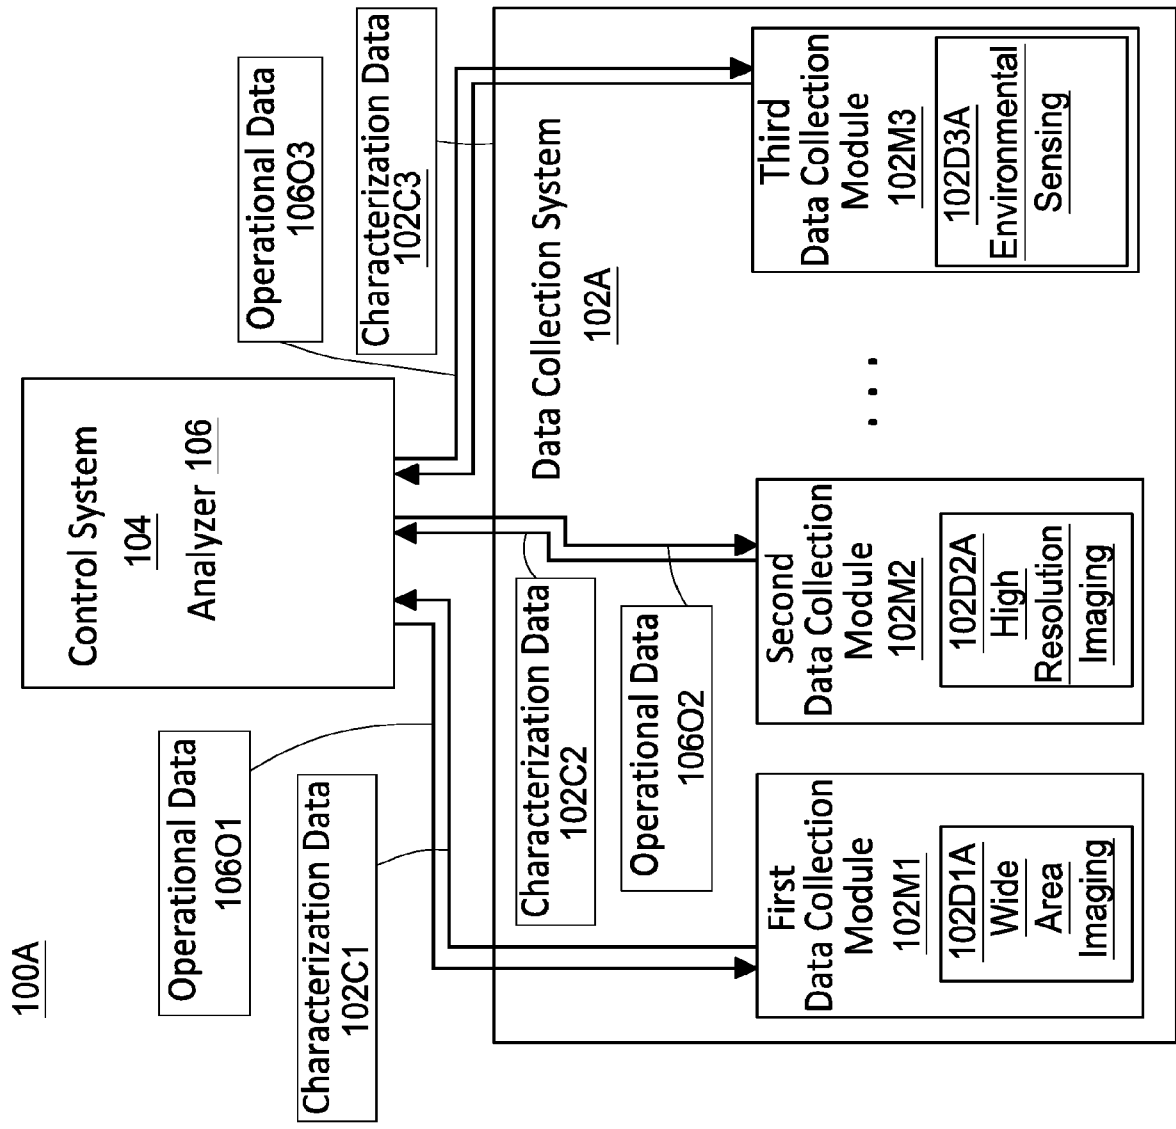


Fig. 2A

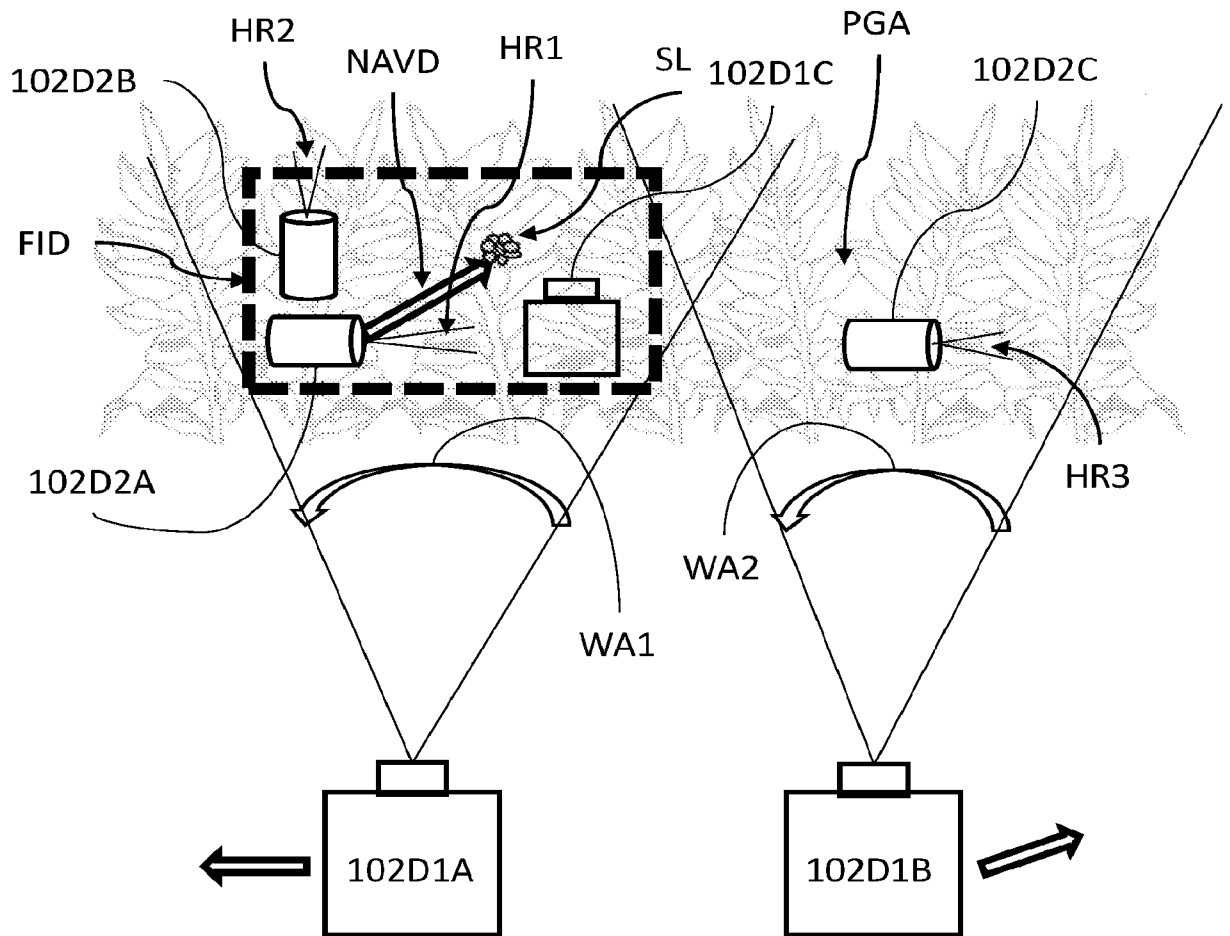


Fig. 2B

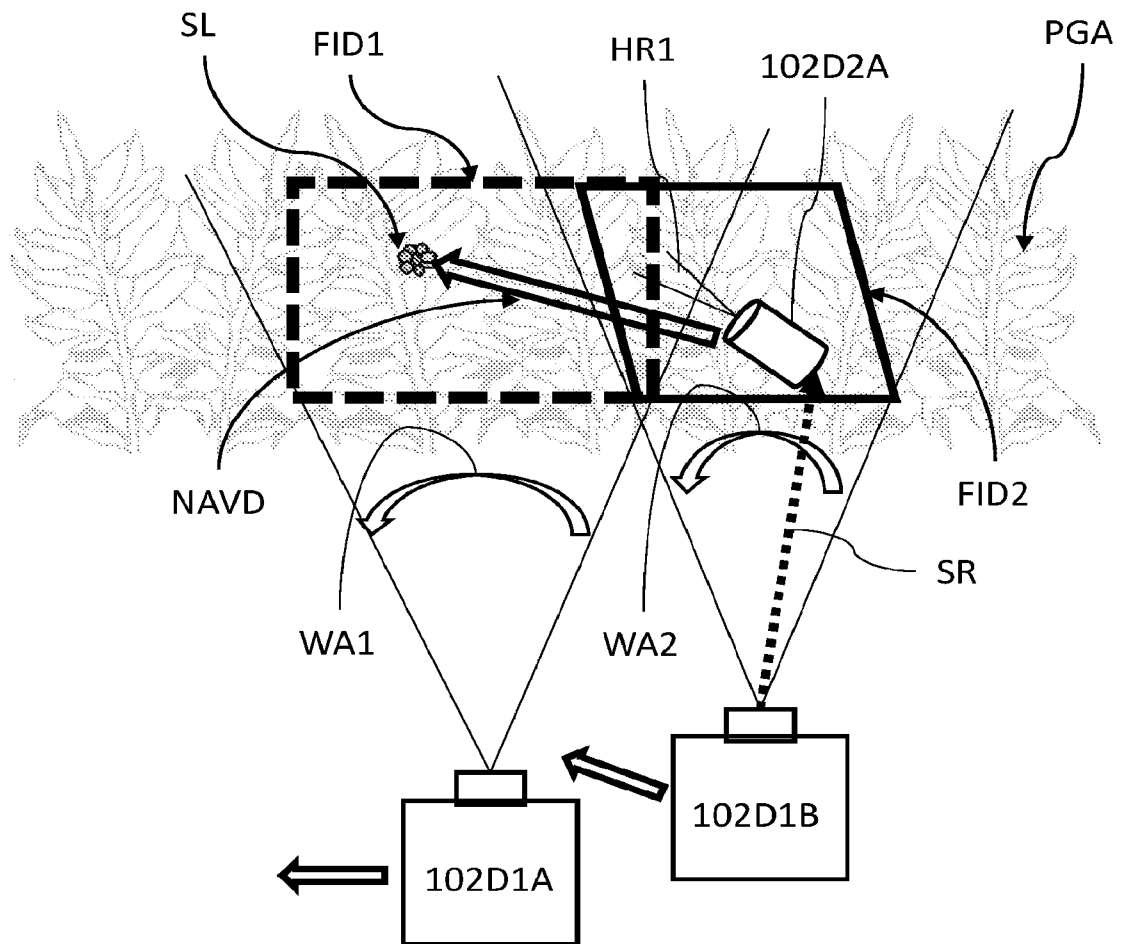
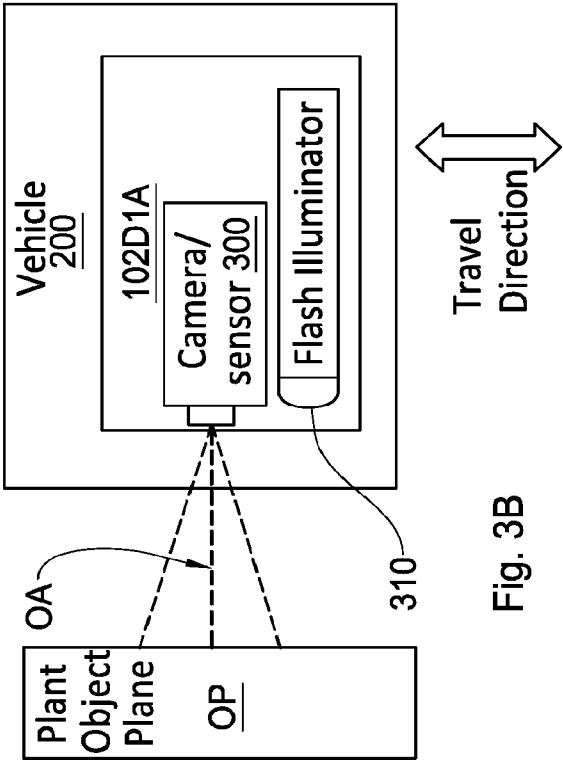
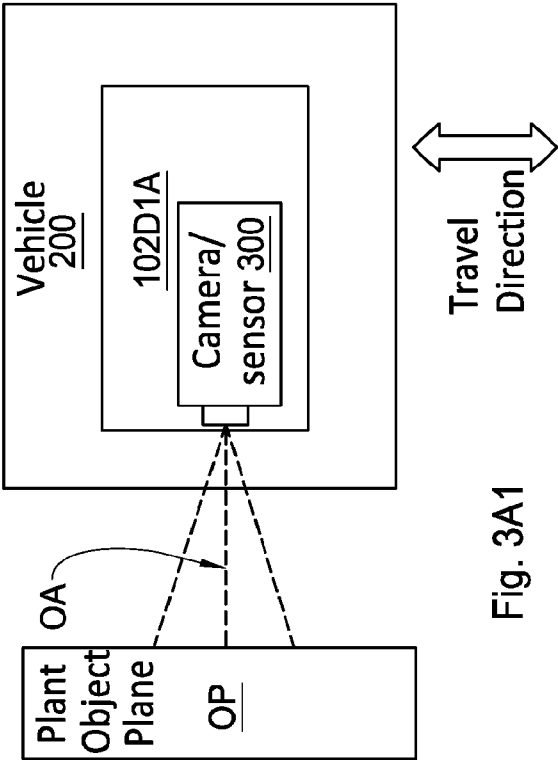
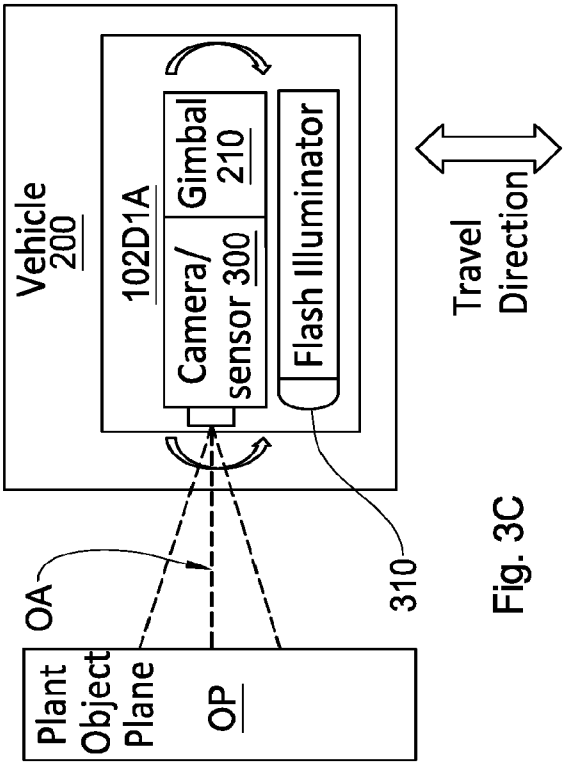
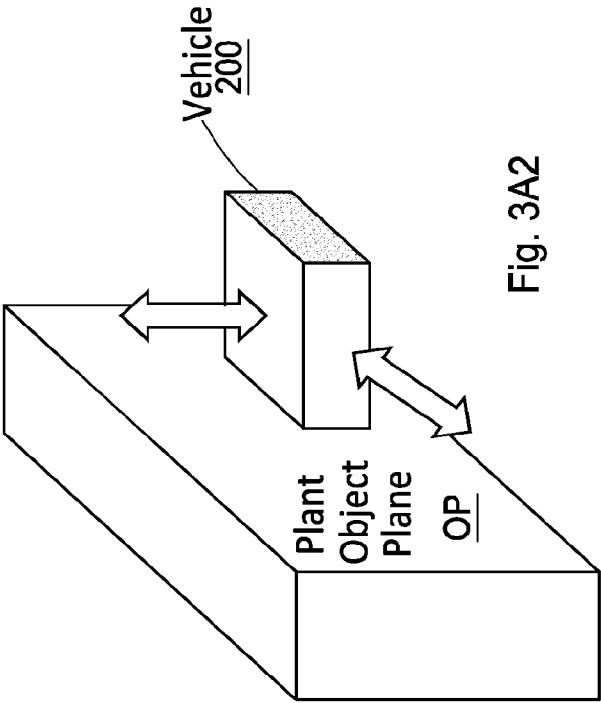


Fig. 2C



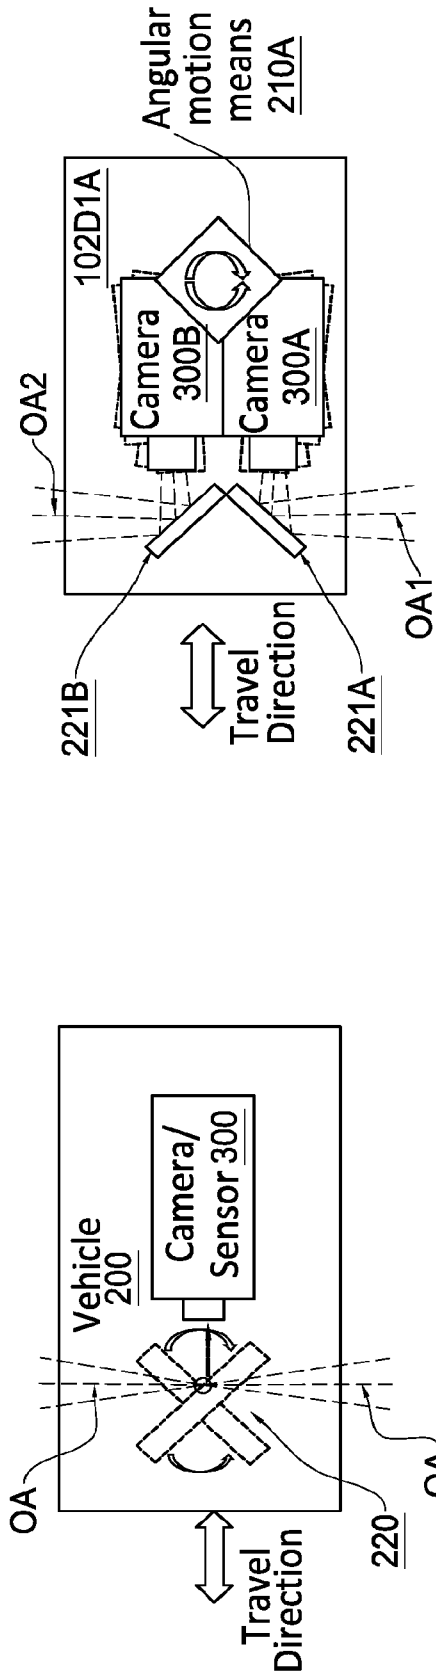


Fig. 3D

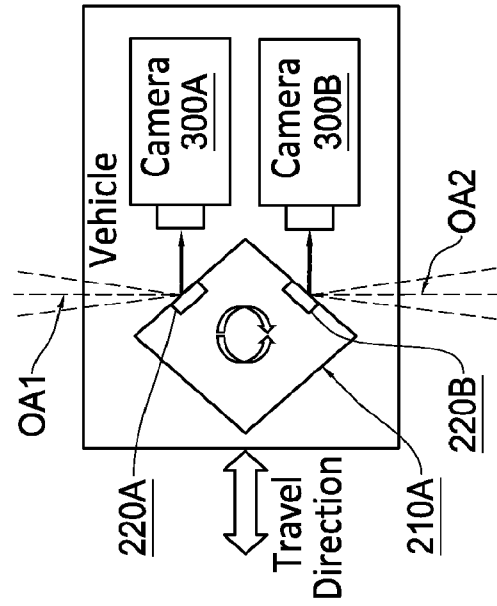


Fig. 3G

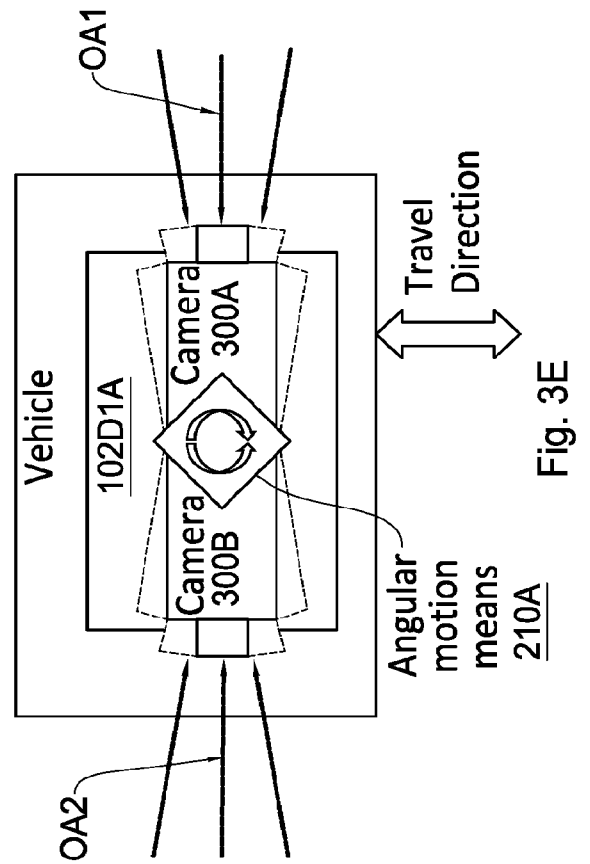
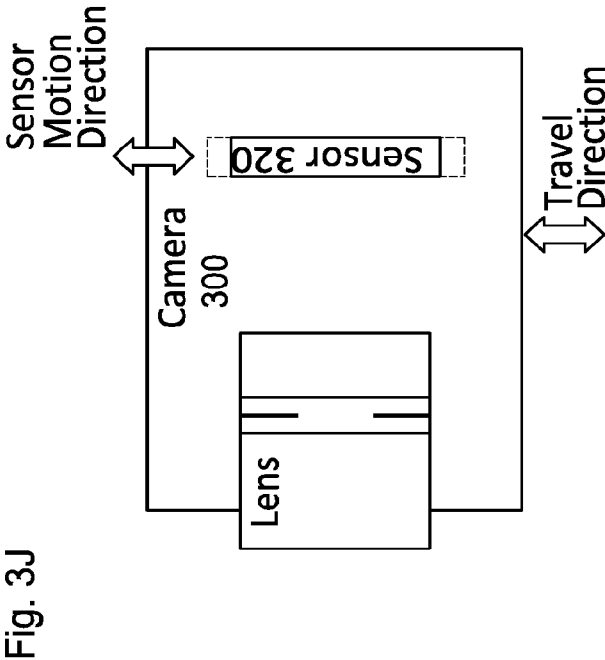
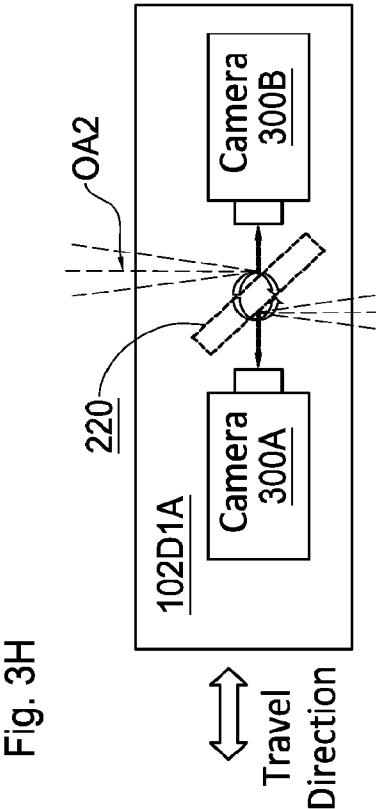
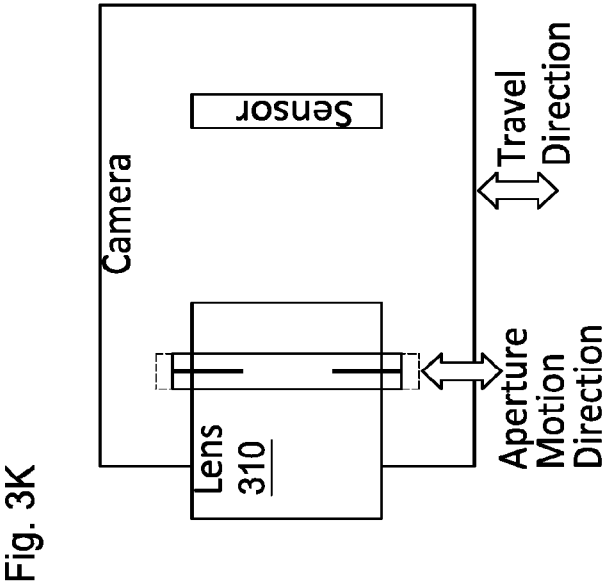
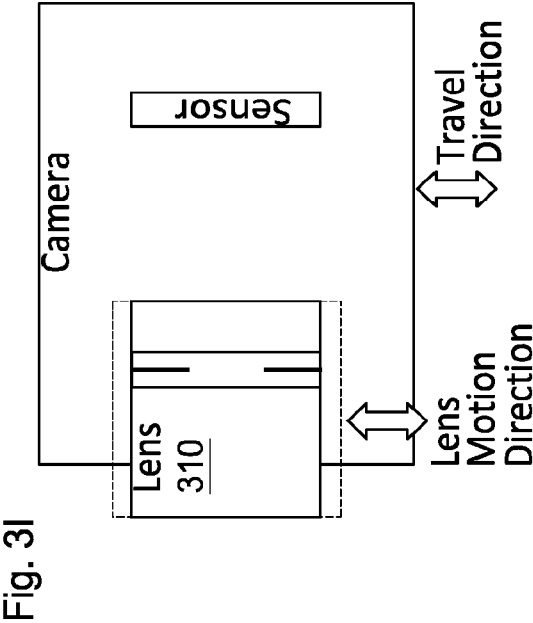


Fig. 3E

Fig. 3F



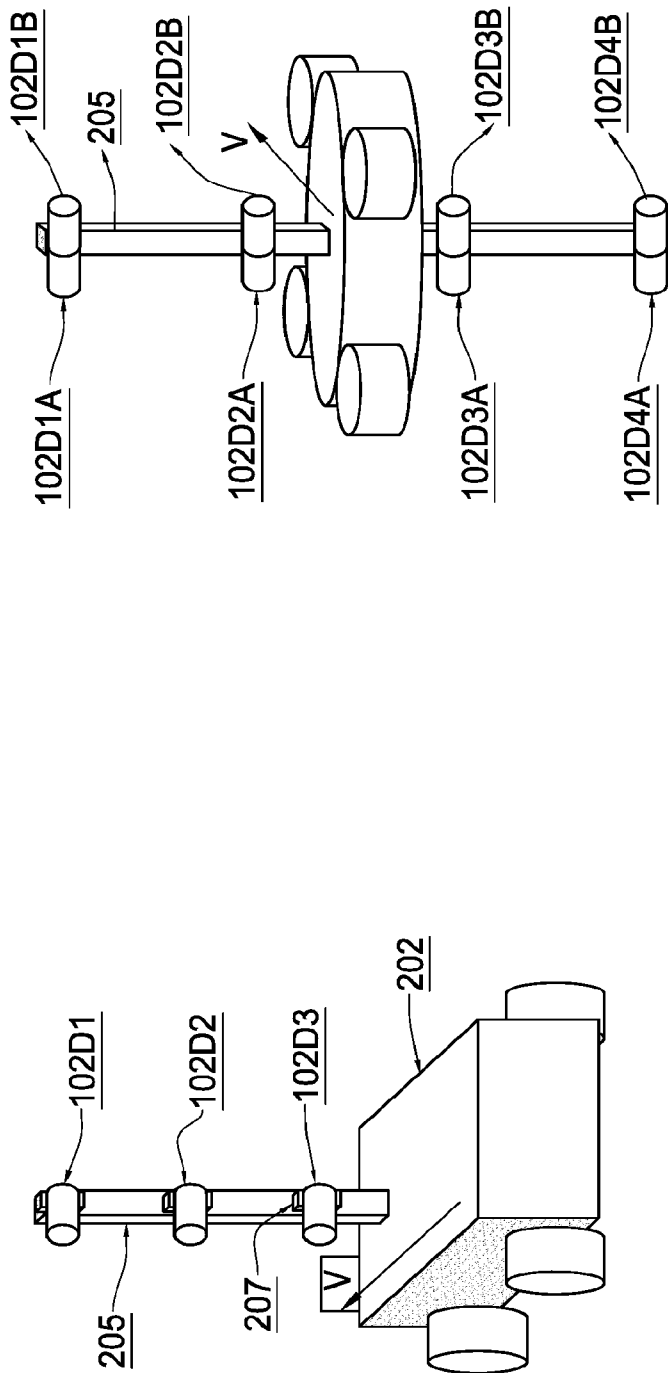


Fig. 4A1

Fig. 4A2

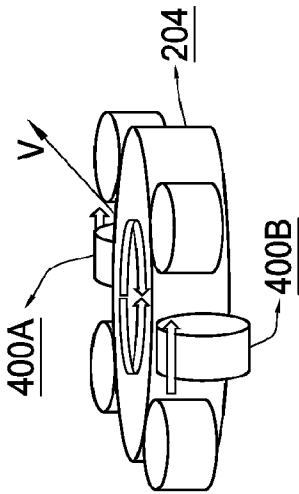


Fig. 4B

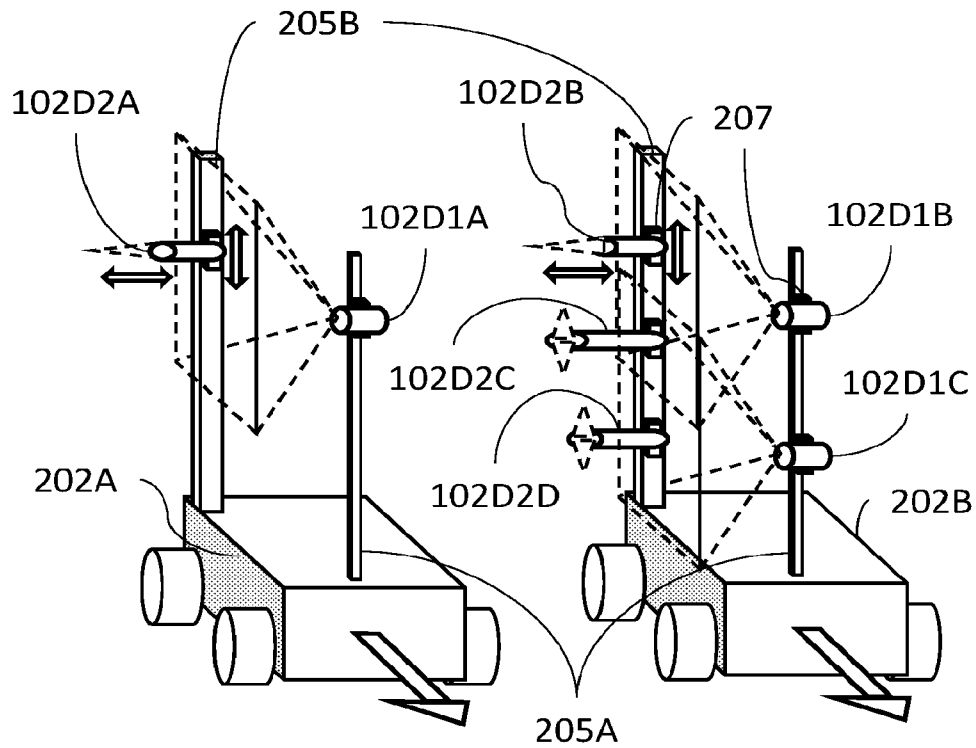


Fig. 4C1

Fig. 4C2

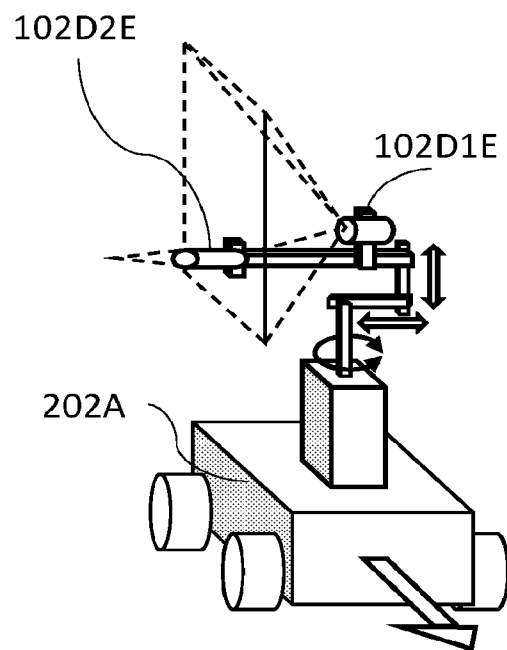


Fig. 4C3

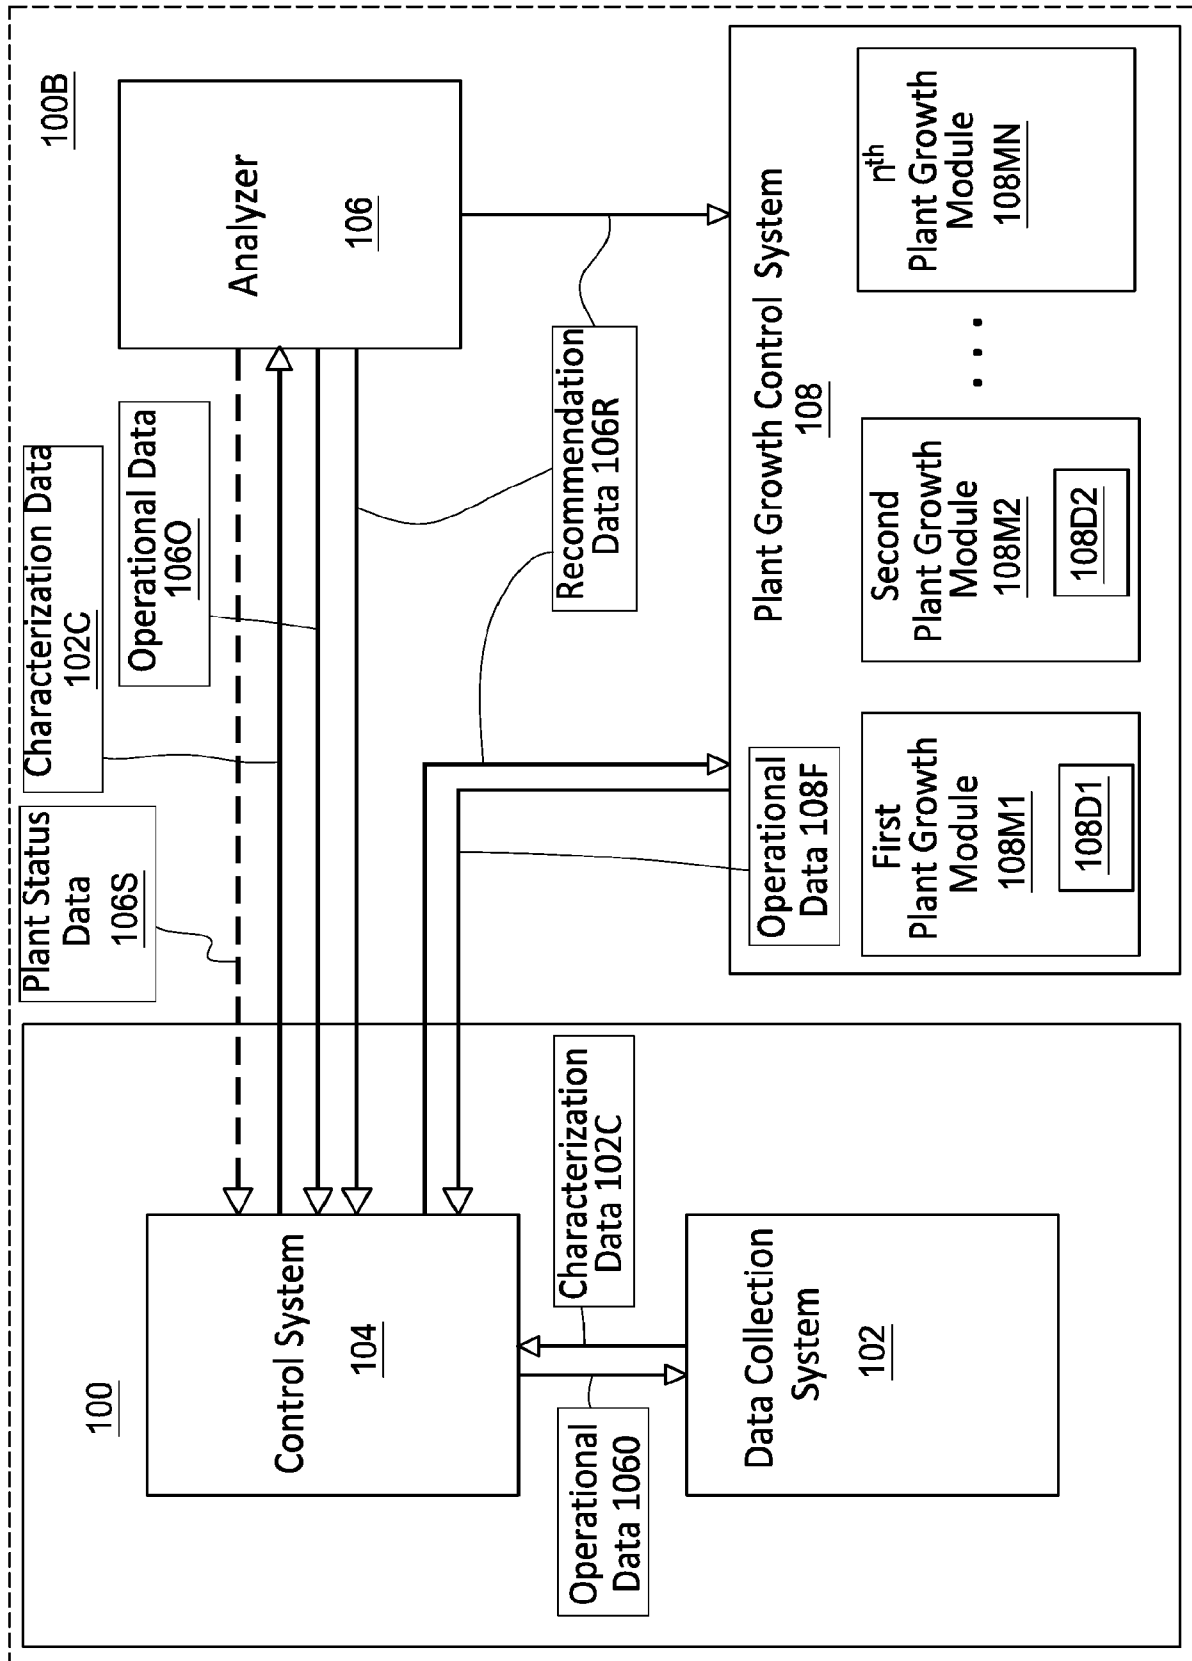


Fig. 5

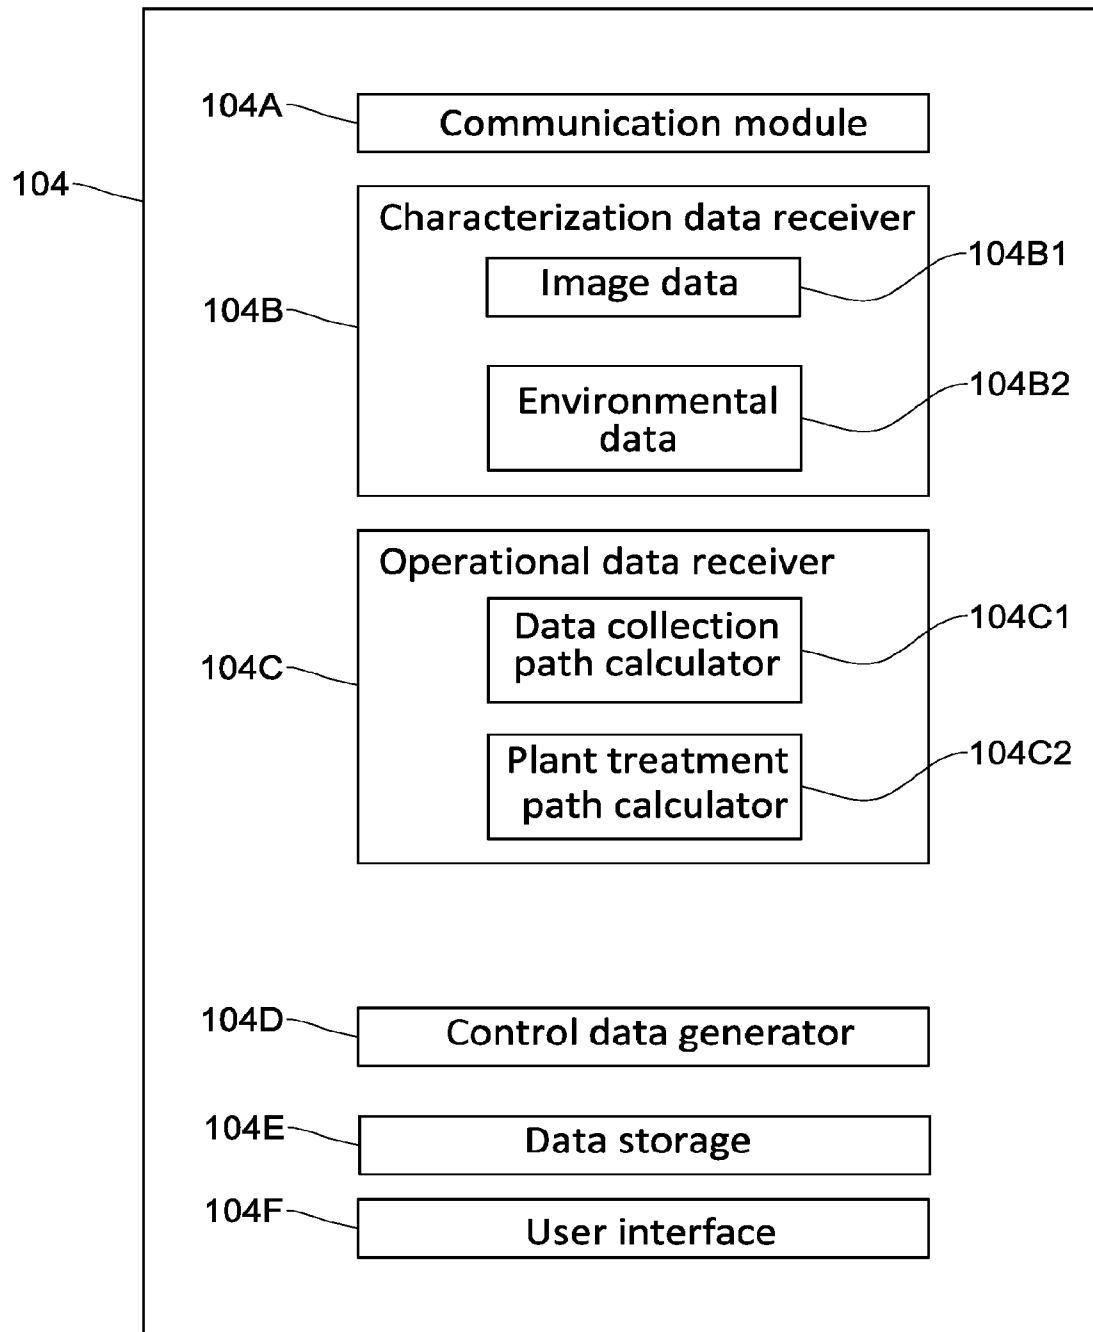


Fig.6

12/16

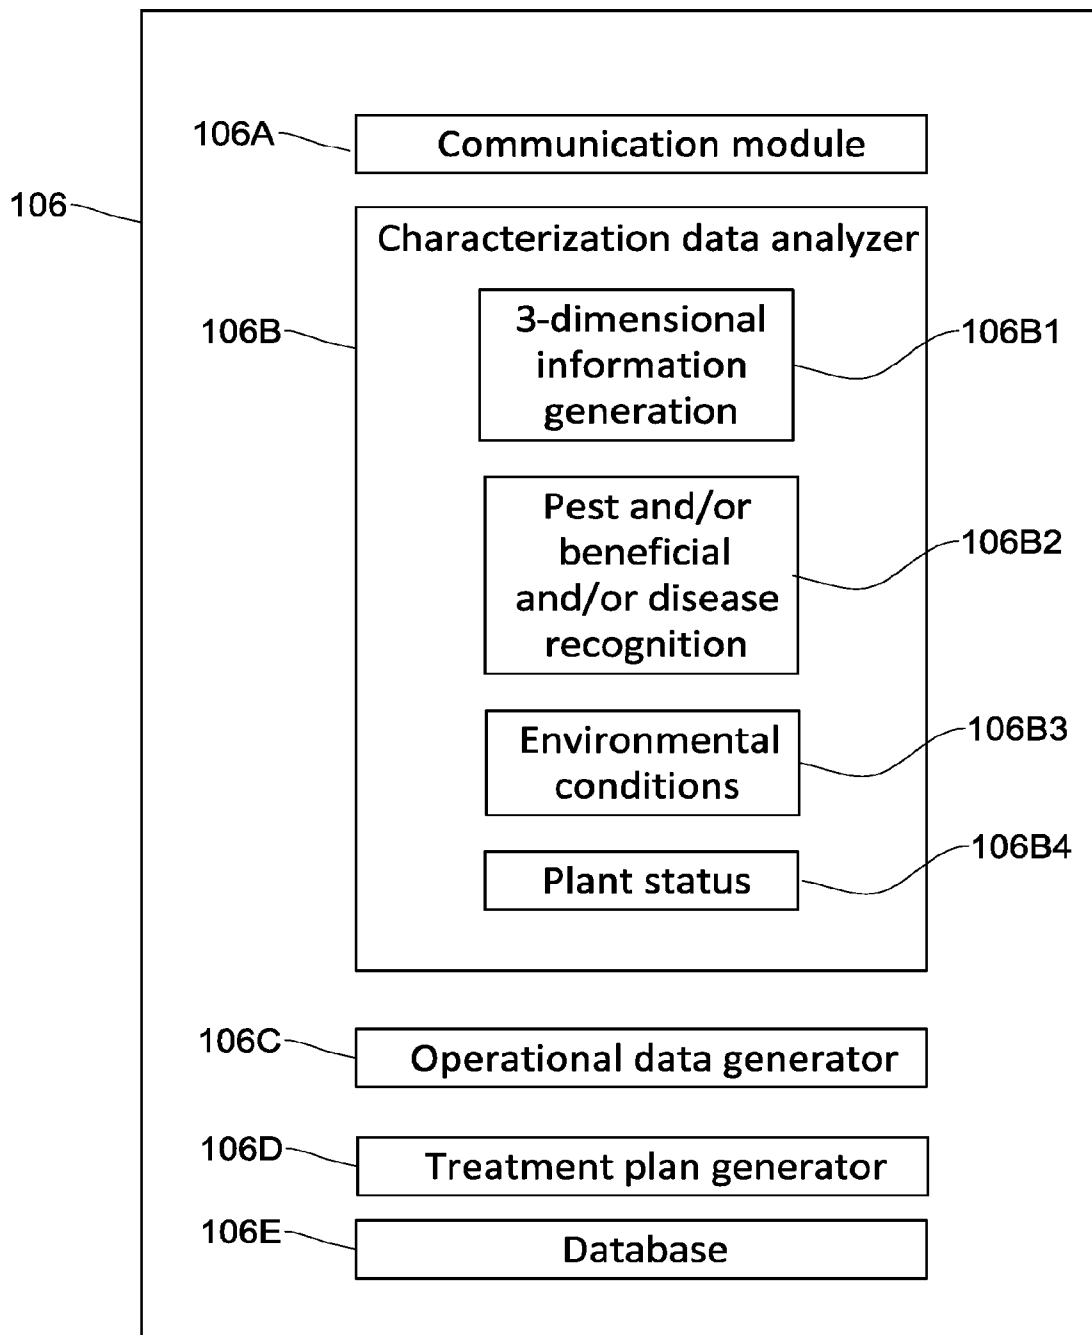


Fig.7

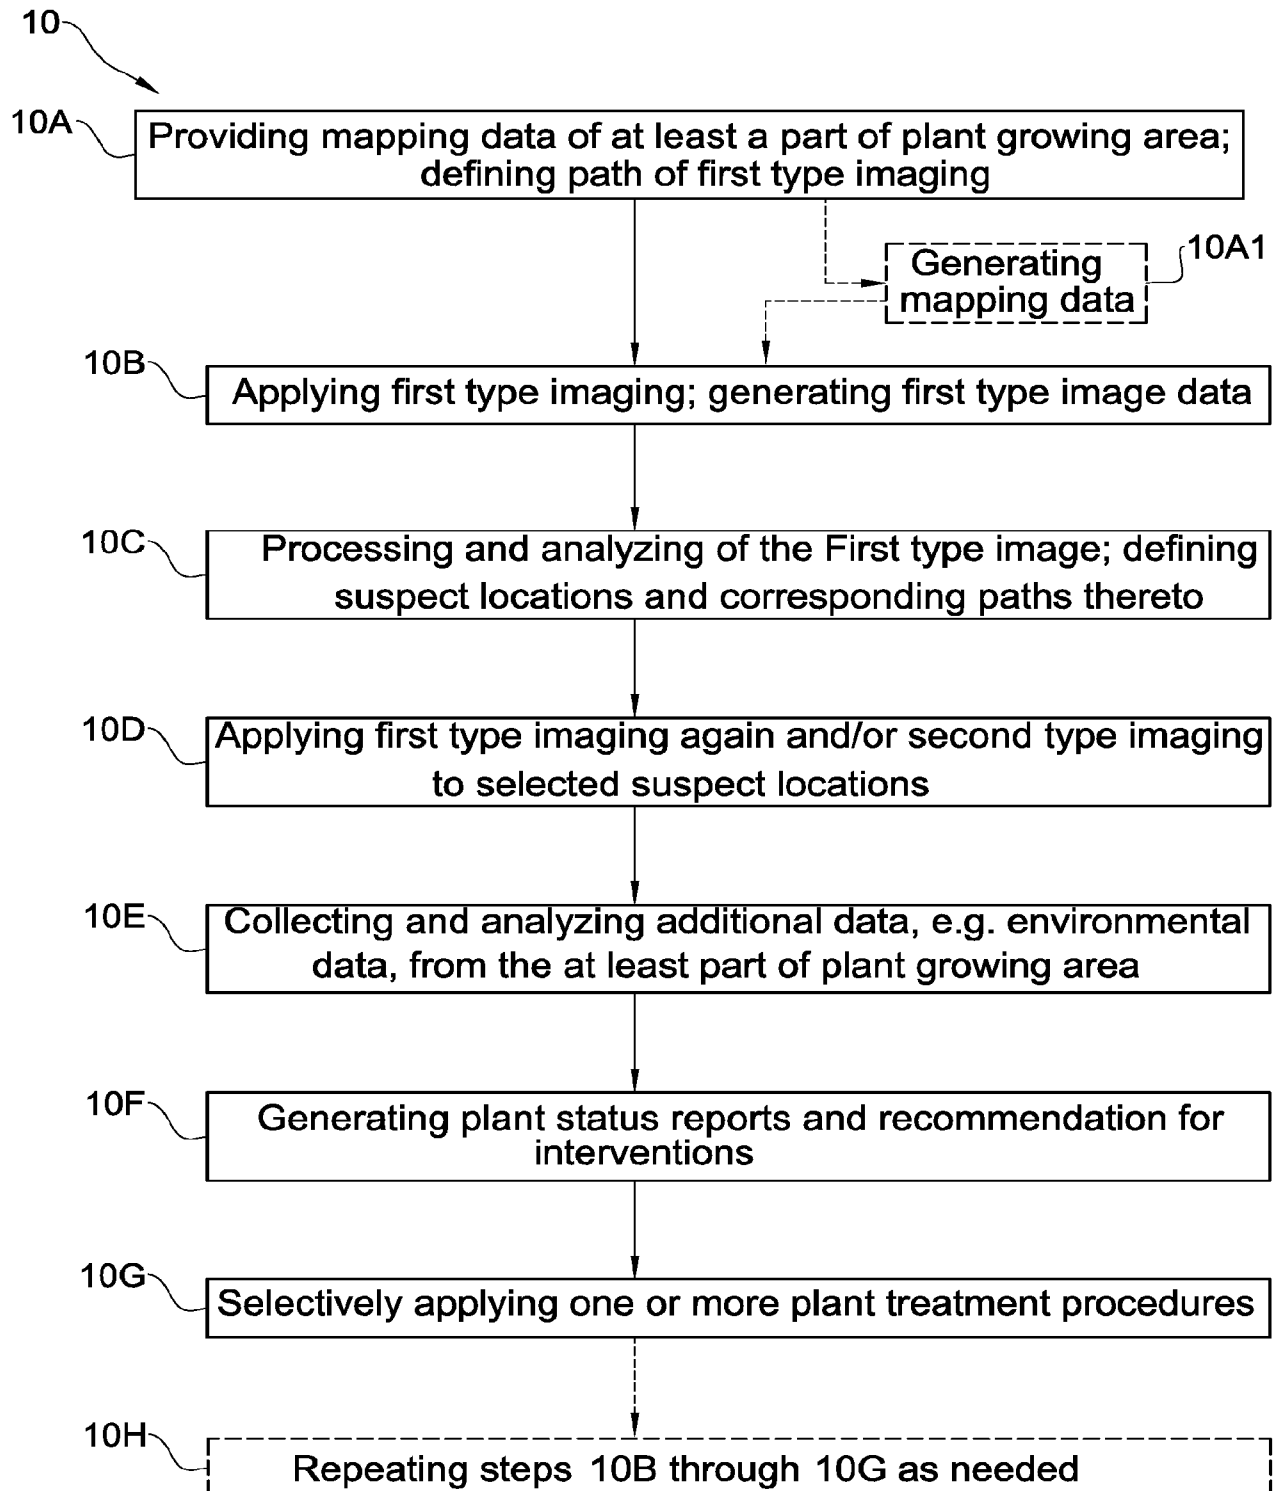


Fig. 8

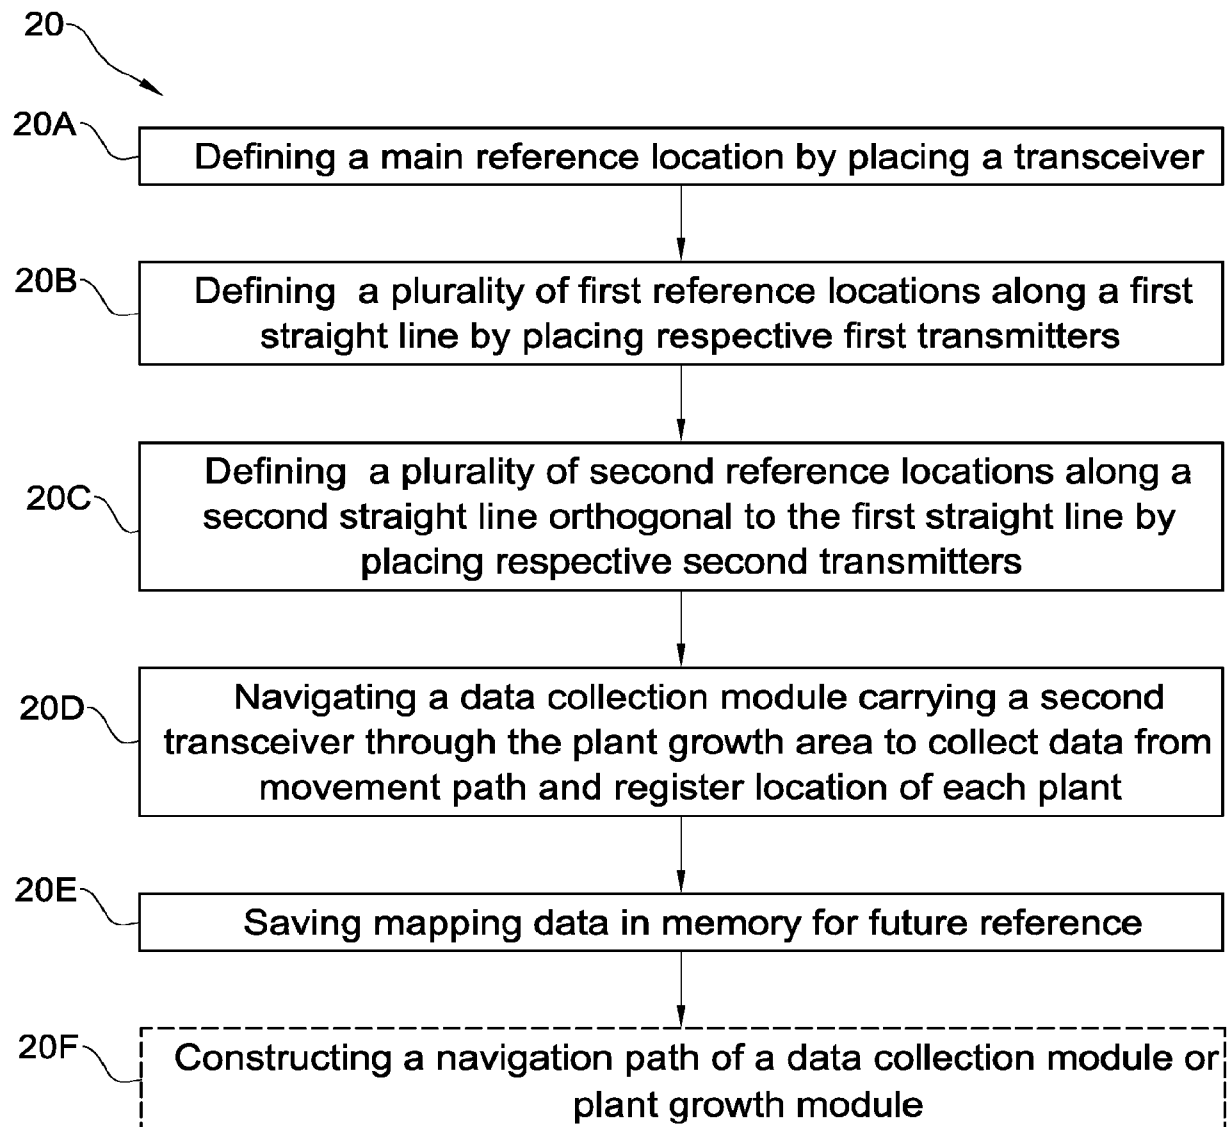


Fig. 9A

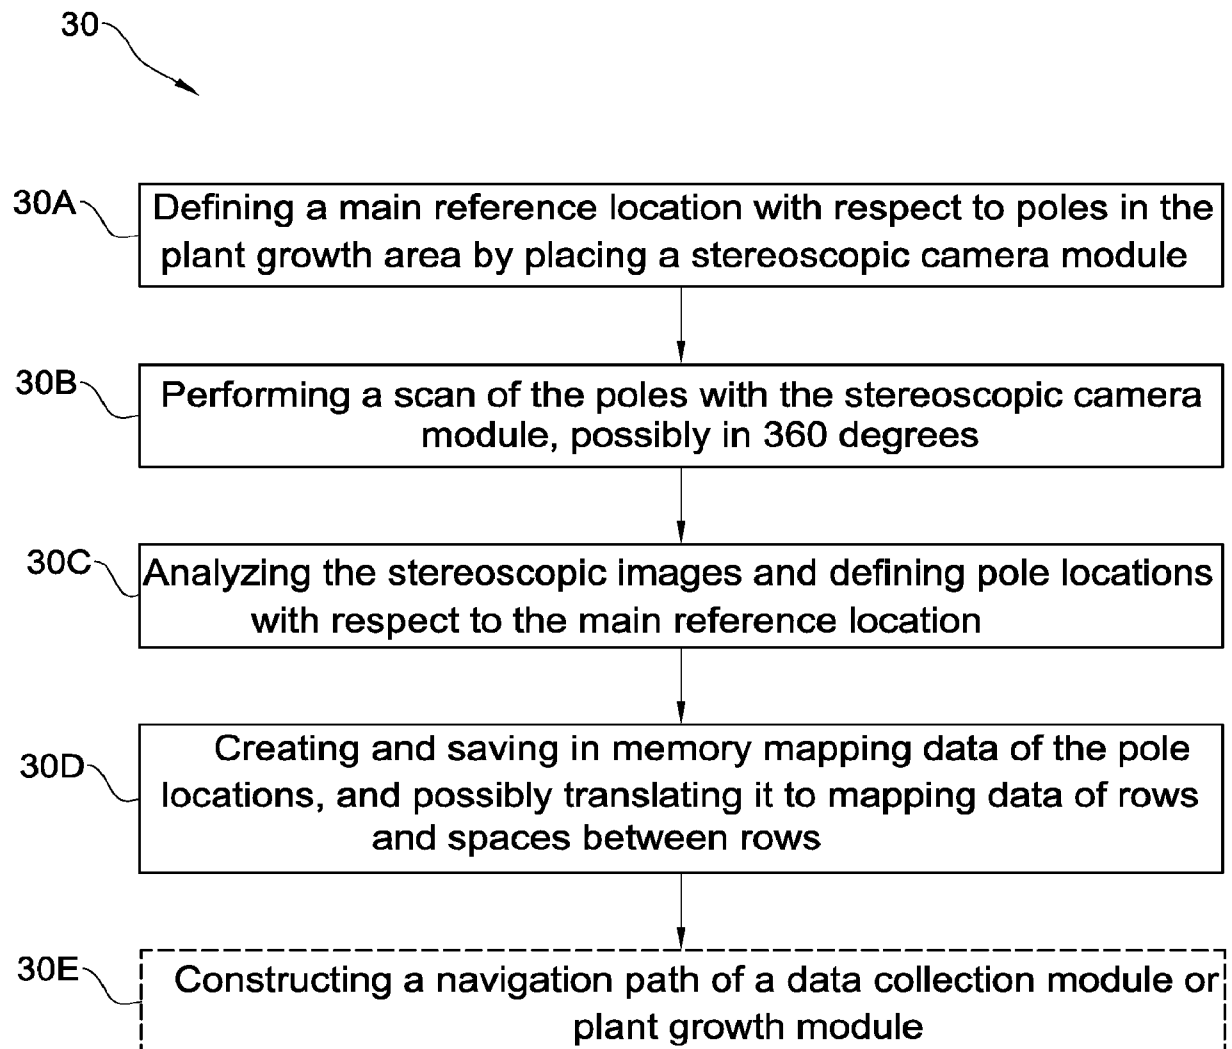


Fig. 9B

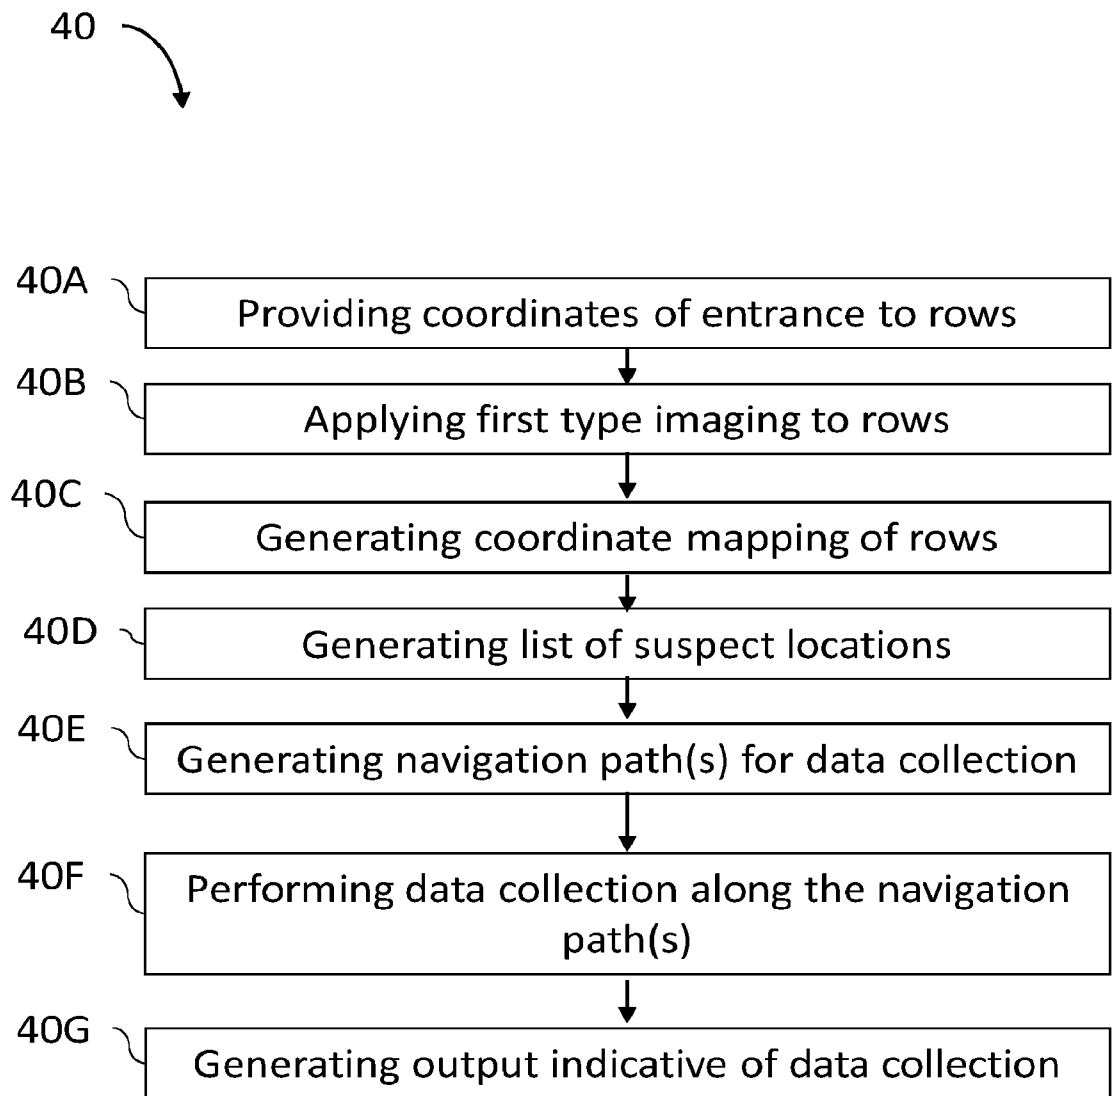


Fig. 9C

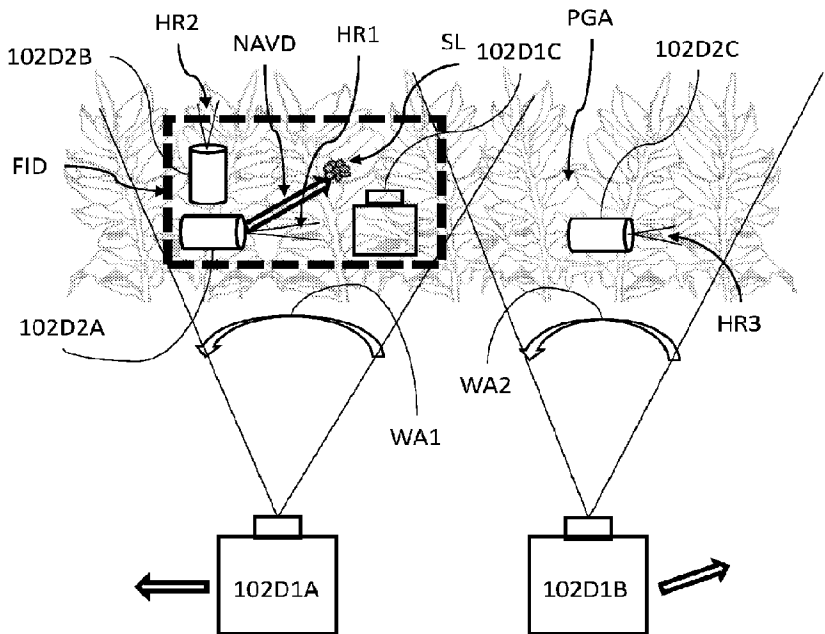


Fig. 2B