

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199648591 B2**
(10) Patent No. **701802**

(54) Title
Compositions and thermal mass transfer donor elements for use in producing signage articles

(51)⁶ International Patent Classification(s)
B41M 005/38 C09D 133/06
B60R 013/10 G02B 005/128

(21) Application No: **199648591** (22) Application Date: **1996.01.26**

(87) WIPO No: **WO96/24493**

(30) Priority Data

(31) Number	(32) Date	(33) Country
08/386279	1995.02.09	US

(43) Publication Date : **1996.08.27**

(43) Publication Journal Date : **1996.10.17**

(44) Accepted Journal Date : **1999.02.04**

(71) Applicant(s)
Minnesota Mining and Manufacturing Company

(72) Inventor(s)
Lisa Platt Nelson; Hsin-Hsin Chou; Christopher E Kunze

(74) Agent/Attorney
SPRUSON FERGUSON

(56) Related Art
US 4818591
US 5320898
WO 94/19710

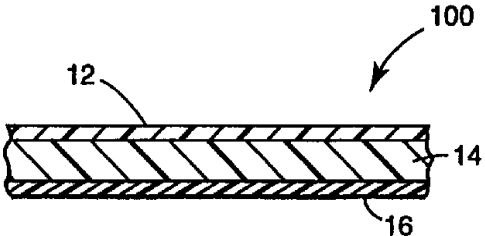
OPI DATE 27/08/96 APPLN. ID 48591/96
AOJP DATE 17/10/96 PCT NUMBER PCT/US96/01104



AU9648591

L

f)

(51) International Patent Classification ⁶ : B41M 5/38, G02B 5/128, B60R 13/10, C09D 133/06		A1	(11) International Publication Number: WO 96/24493 (43) International Publication Date: 15 August 1996 (15.08.96)
(21) International Application Number: PCT/US96/01104 (22) International Filing Date: 26 January 1996 (26.01.96) (30) Priority Data: 08/386,279 9 February 1995 (09.02.95) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: NELSON, Lisa, Platt; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). CHOU, Hsin-Hsin; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). KUNZE, Christopher, E.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (74) Agents: HANSON, Karl, G. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: COMPOSITIONS AND THERMAL MASS TRANSFER DONOR ELEMENTS FOR USE IN PRODUCING SIGNAGE ARTICLES			
(57) Abstract Coatable thermal mass transfer precursor compositions, suitable for producing thermal mass transfer donor elements, are described, the coatable compositions comprising a) a polyalkylene binder precursor; b) an acrylic binder precursor; c) an effective amount of a pigment to provide the desired color to a thermal mass transfer composition using the coatable composition; and d) a diluent (preferably water) in which the polyalkylene binder precursor, acrylic binder precursor, and pigment are all dispersed therein. Signage articles produced using the donor elements are also described.			
			

**COMPOSITIONS AND THERMAL MASS TRANSFER
DONOR ELEMENTS FOR USE IN PRODUCING SIGNAGE ARTICLES**

Background of the Invention

5 **1. Field of the Invention**

The present invention relates to thermal mass transfer compositions and articles for use in producing signage articles. In particular the present invention relates to the use of thermal mass transfer compositions which employ a binder which does not significantly absorb ultraviolet radiation, thereby avoiding
10 substantial heat absorption and degradation of the binder, and including durable, stable pigments which do not exhibit significant color change or loss of brightness.

2. Related Art

Thermal mass transfer processes use a donor sheet (commonly denoted a
15 "ribbon" or "foil") and a receptor sheet or substrate. The thermal mass transfer donor sheet normally comprises a carrier layer and a colorant layer with at least a thermally transferable colorant (a dye or preferably a pigment) in a heat softenable binder. The colorant layer typically consists of a pigment dispersed in a binder (the binder transferring with the pigment during thermal transfer). Thermal mass
20 transfer sheets are used with the donor surface (colorant layer) in intimate contact with a receptor material, and the donor sheet is heated in an imagewise manner (e.g., by thermal printheads, irradiation as by a laser or high intensity radiation transmitted through a mask or stencil) to transfer the image forming material. In the thermal mass transfer system, the colorant layer is softened by the imagewise
25 heating (and sometimes a receptor layer on the receptor sheet is contemporaneously softened), and the softened area is transferred to the receptor sheet. The ultimate use of the substrate having the transferred image thereon frequently dictates the durability requirements of the image.

Thermal mass transfer is useful for preparing outdoor durable signage
30 articles, such as automobile registration tags which are adhered to license plates.

See, for example, Patent Cooperation Treaty applications WO 94/19710 (claiming priority from United States serial nos. 08/017,573 and 08/033,627) and WO 94/19769 (claiming priority from United States serial nos. 08/017,573 and 08/033,625), both published September 1, 1994. For the articles described therein, thermal mass transferred indicia was printed onto a specially formulated
 5 polyurethane "multifunction" layer, an attribute of which was to eliminate the need for a cover layer for resin-based binder printed indicia. Many commonly used binders employ large amounts of UV stabilizers and UV absorbers, which tend to produce heat in the binders and cause their early degradation, thereby decreasing brightness and/or increasing color change.

There is a need in the signage art, particularly those meant for outdoor usage, to be able to
 10 apply color images to many different substrates without loss of brightness or color change, and without having to use complex processes.

Summary of the Invention

The present invention overcomes many deficiencies of the prior art in providing good quality, durable (i.e. minimal color change and minimal loss of brightness) thermal mass transfer images. The
 15 durability of thermal mass transfer images produced by the methods of the invention is improved by use of thermal mass transfer precursor compositions including dispersions of organic and/or inorganic pigments. As used herein, the term thermal mass transfer precursor composition means a coatable, film-forming composition (preferably aqueous) comprising binder precursors and pigments. Binder precursors are present in the coatable compositions, whereas the term binder means the solid
 20 remnants of the binder precursors. The term thermal mass transfer composition means a solid composition present either on an inventive donor element or as an image on a substrate.

In accordance with one aspect of the present invention there is described a coatable, film-forming thermal mass transfer precursor composition comprising:

- a) a polyalkylene latex binder precursor;
- 25 b) an acrylic latex binder precursor wherein the polyalkylene binder and acrylic binder are present at a solids weight ratio of polyalkylene binder to acrylic binder ranging from about 1.5:1.0 to about 15:1.0;
- c) an effective amount of a pigment to provide the desired color to a thermal mass transfer composition using the coatable composition; and
- 30 d) a diluent in which the polyalkylene binder precursor, acrylic binder precursor, and pigment are all dispersed,

wherein the pigment and the acrylic binder precursor are present at a solids weight ratio of pigment to acrylic binder precursor ranging from about 0.5:1.0 to about 1.5:1.0, and the polyalkylene binder precursor is present in an amount sufficient to provide the desired UV and visible light
 35 transparency to the thermal mass transfer composition.

It will be understood that optional ingredients such as emulsifiers, dispersing aids, surfactants and the like, will normally be included in commercial embodiments of the inventive coatable, film-forming compositions, as further described herein, as long as the resulting thermal mass transfer composition (other than pigments, dyes, or colorants) is substantially UV transparent.



The term polyalkylene not only includes polyethylene, polypropylene, polybutadiene, and the like, but also polyalkylene-like oligomers and polymers having a high percentage of methylene units, such as oligomeric compositions comprising the reaction product of a low molecular weight organic acid, such as acrylic acid, and a high molecular weight alcohol or short chain diol.

5 As used herein the term acrylic includes copolymers and terpolymers of an alkylene monomer and an acidic copolymerizable monomer. Examples of alkylene monomers include ethylene, propylene, and the like, and examples of acidic copolymerizable monomers include acrylic acid and alkylacrylic acids such as methacrylic acid, ethacrylic acid, and the like.

The term coatable means the compositions of the invention have viscosity no greater than 50 centipoise, measured using a Brookfield viscometer, #2 spindle, at room temperature (about 20°C).

Another aspect of the invention is a thermal mass transfer donor element comprising a carrier and a thermal mass transfer composition adhered to the carrier, the thermal mass transfer composition comprising:

- a) a polyalkylene binder;
- 15 b) an acrylic latex binder precursor wherein the polyalkylene binder and acrylic binder are present at a solids weight ratio of polyalkylene binder to acrylic binder ranging from about 1.5:1.0 to about 15:1.0,

- c) an effective amount of a pigment to provide the desired color to a thermal mass transfer composition;

20 wherein the pigment and the acrylic binder are present at a solids weight ratio of pigment to acrylic binder ranging from about 0.5:1.0 to about 1.5:1.0, and the polyalkylene binder is present in an amount sufficient to provide the desired UV and visible light transparency and gloss to the thermal mass transfer composition. The carrier is preferably a film, more preferably a polymeric film.

A further aspect of the invention is a signage article comprising a thermal mass transfer composition in the form of indicia adhered to a substrate, the thermal mass transfer composition comprising:

- a) a polyalkylene binder;
- b) an acrylic latex binder precursor wherein the polyalkylene binder and acrylic binder are present at a solids weight ratio of polyalkylene binder to acrylic binder ranging from about 1.5:1.0 to about 15:1.0,

- 30 c) an effective amount of a pigment to provide the desired color to a thermal mass transfer composition;

wherein the pigment and the acrylic binder are present at a solids weight ratio of pigment to acrylic binder ranging from about 0.5:1.0 to about 1.5:1.0, and the polyalkylene binder is present in an amount sufficient to provide the desired UV and visible light transparency and gloss to the thermal mass transfer composition.



The compositions and donor elements of the invention may be used in conventional processes for providing a thermal mass transfer image on a substrate. Thus, another aspect of the invention is a signage article comprising a thermal mass transfer composition of the invention adhered to a substrate, thus forming a

5 colorant layer. The thermal mass transfer processes used to produce these articles typically comprises the steps of placing the colorant layer of a thermal mass transfer donor element in contact with a second surface, and transferring at least a portion of the thermal mass transfer composition from the donor element to the second surface by heating at least a portion of the thermal mass transfer donor layer.

10 Preferred substrates are paper, metal, and polymeric, with polymeric substrates particularly preferred, for example the polymeric surface of a retroreflective sheeting. Particularly preferred signage articles include outdoor durable signage such as highway signs, automobile registration validation stickers and window stickers, and license plates. The colorant layer of signage articles of the invention

15 may be exposed or buried beneath one or more polymeric (particularly polymethylmethacrylate (PMMA)) or glass cover layers, but for uses where prolonged outdoor exposure is expected, a cover layer is particularly desirable.

The colorant layer thickness in articles of the invention is preferably from about 1 to about 10 micrometers, more preferably from about 2 to about 8

20 micrometers, and most preferably from about 3 to about 6 micrometers. The colorant layer (on both the thermal mass transfer donor elements and the signage articles of the invention) has a softening or melting temperature between 50°C and 140°C, preferably from 60°C and 120°C, more preferably from 65°C and 110°C and most preferably from 70°C and 100°C.

25 In donor elements of the invention which employ a polymeric film carrier (preferably polyethylene terephthalate (PET)), the polymeric film preferably has a thickness ranging from about 1 to about 10 micrometers, more preferably from about 2 to about 6 micrometers

In formulating the coatable, film-forming compositions of the invention it is

30 important, particularly if transparent colors are desired in the signage articles of the invention, to prevent agglomeration of the pigment particles. Thus, another aspect

of the invention is a method of formulating a coatable, film-forming composition, the composition suitable for use in producing a thermal mass transfer donor element, the method comprising the steps of:

- a) adding water to a quantity of a pigment dispersion employing moderate agitation to form
5 a first intermediate;
- b) adding methanol to the first intermediate to form a second intermediate;
- c) adding an acrylic dispersion to the second intermediate to form a third intermediate; and
- d) adding a polyalkylene emulsion to the third intermediate to form the coatable
composition, wherein the amount of water and methanol is sufficient to afford the composition a
10 weight percentage solids ranging from about 1 to about 20 weight percent, and the pigment
dispersion, the acrylic latex, and the polyalkylene emulsion are present in a solids weight ratio of
about 1:1:4.

The invention will be more fully understood with reference to the following detailed description of the invention.

Brief Description of the Drawing

FIG. 1 is a cross-sectional view (enlarged) of an illustrative thermal mass transfer donor element in accordance with the present invention;

FIG. 2 is a cross-sectional view (enlarged) of an illustrative retroreflective signage article in accordance with the present invention; and

FIG. 3 is a cross-sectional view (enlarged) of an illustrative paper signage article in accordance with the present invention.

The figures are not to scale and are merely illustrative of the invention.

Description of Preferred Embodiments

I. Coatable, Film-forming Thermal Mass Transfer Precursor Compositions

A. Binder Precursors and Binders

Thermoplastic acrylic latex binder precursors useful in the invention primarily function (in binder form) to provide the necessary adhesion of the thermal



mass transfer composition to the substrate. The acrylic latex binder precursors also provide binders which retain their optical properties over prolonged time periods of exposure to outdoor conditions, especially when protected from abrasion via a plastic or glass cover layer. Tests for color change and brightness retention are included on the Test Methods Section. The acrylic latex binder precursors, after drying and film formation, also provide a high degree of water resistance for all substrates, and corrosion resistance for metal substrates.

Useful thermoplastic acrylic latex binder precursors are available as aqueous dispersions, typically and preferably having a percent solids ranging from about 10 to 80 weight percent, a pH ranging from about 6.0 to 8.0, an acid number ranging from about 30 to about 80, more preferably from about 60 to 80, a viscosity ranging from about 5 to about 500 centipoise measured at 25°C using a Brookfield viscometer, # 2 spindle, and glass transition temperature ranging from about 20 to about 70°C, more preferably from about 25 to about 60°C. Preferred acrylic film-forming aqueous dispersions are those known under the trade designations CARBOSET XL-11 and CARBOSET 514H, from BFGoodrich, Cleveland, Ohio, wherein the XL-11 version is 30 weight percent solids, and has a viscosity of 50 centipoise, a pH of 6.7, an acid number of 75, and glass transition temperature of 55°C, and the 514H version, which is 40 weight percent solids, has a viscosity of 350 centipoise, a pH of 7.0, an acid number of 65, and glass transition temperature of 28°C.

The polyalkylene binder precursor has the function (in binder form) of a wax-like component. Thermally mass transferred compositions of the invention preferably comprise at least one polyalkylene binder, typically and preferably derived from an aqueous film-forming dispersion comprising 0.01 to 5 micrometer solid particulate (preferably optically clear). Preferred polyalkylene binder precursors are micrometer-size particulates, and may include any transparent, fine solid polyalkylene particles that are not soluble and yet easily dispersible to form the coatable, film-forming thermal mass transfer precursor compositions of the invention. Polyethylene polymers having low differentials in their indices of refraction from acrylic binders are preferred. The low differential is preferred for

refractive index matching in order to reduce the light scattering in the colorant layer.

Since the polyalkylene latex and acrylic latex binder precursors are immiscible, the minor component of the two (the acrylic binder) forms islands in the film formed by the major component (the polyalkylene binder). Therefore, the ratio of these two ingredients must be carefully optimized in the coatable, film-forming compositions of the invention to provide proper cohesiveness of the dried thermal mass transfer composition for high resolution imaging. Since both acrylic and polyalkylene binders are thermoplastic, they both contribute to the necessary adhesion to the receptor during thermal mass transfer printing.

The polyalkylene binder also functions like a wax-like material in that it assists in allowing the transferred image to conform to a rough surface, such as paper, or around and between glass beads in encapsulated lens retroreflective sheeting. The polyalkylene material and optional particulates also provide the benefit of reducing printer head energy input during the thermal mass transfer process.

The polyalkylene binder precursors are available as dispersions and emulsions having viscosities ranging from about 10 to about 70 centipoise, pH ranging from about 7 to 10, a percent solids ranging from about 10 to about 80 weight percent, and are typically and preferably clear and transparent.

One exemplary polyalkylene latex binder precursor is that known under the trade designation POLY EMULSION 330 N35, available from Chemical Corporation of America, East Rutherford, NJ, which is a 35 weight percent solids emulsion of the film-forming polyethylene latex known under the trade designation AC-330 from Allied Chemical Corporation. The emulsion has a nonionic charge, a viscosity of 50 centipoise maximum, a pH ranging from about 8.5 to about 9.5, and is clear and transparent.

To further reduce the cohesion of the colorant layer, non-film-forming, non-thermoplastic solid particulates may be employed. Preferred acrylic, non-film-forming particulates are 10 percent solids dispersion in deionized water of polymers

of stearyl methacrylate hexane diol diacrylate, preferably present at a 1:1 weight ratio.

Other optional non-film-forming solid particulates may be preferred for tailoring higher resolution and lower imaging energy (i.e., the energy required to transfer the composition from the PET or other donor to the intended receptor). These include but are not limited to TiO_2 , MgO , ZnO , CaCO_3 , SiO_2 , micas, and the like.

The inventive coatable, film-forming compositions preferably comprise from about 0.5:1.0 to about 1.5:1.0 weight ratio pigment dispersion to acrylic latex binder precursor dispersion, and a weight ratio of pigment dispersion to polyalkylene latex binder precursor dispersion ranging from about 0.1:1.0 to 0.33:1.0. In the thermal mass transfer compositions of the invention (solid) the weight ratio of pigment to acrylic binder ranges from about 0.5:1.0 to about 1.5:1.0, while the weight ratio of pigment to polyalkylene binder ranges from about 0.1:1.0 to about 0.33:1.0.

Preferably, the thermal mass transfer compositions of the invention have a melting point (mp) or softening point (sp) ranging from about 50° to about 140°C to enhance the thermal mass transfer efficiency. Melting points below about 50°C indicate a composition which may become tacky and blocking when not intended, while melting points above 140°C would possibly degrade the carrier during coating and oven drying and would certainly increase the thermal energy requirement to transfer the composition to the intended substrate.

B. Pigments

Pigments useful in the invention may be organic or inorganic. Suitable inorganic pigments include carbon black and titania (TiO_2), while suitable organic pigment include phthalocyanines, anthraquinones, perylenes, carbazoles, monoazo- and diazobenzimidazolone, isoindolinones, monoazonaphthol, diarylidepyrazolone, rhodamine, indigoid, quinacridone, disazopyranthrone, dinitraniline, pyrazolone, dianisidine, pyranthrone, tetrachloroisoindolinone, dioxazine, monoazoacrylide, anthrapyrimidine. It will be recognized by those

skilled in the art that organic pigments may be differently shaded, or even different color, depending on the functional groups attached to the main molecule.

However, many of the listed organic pigments have exhibited good weatherability in simulated outdoor use in that they retain much of their initial brightness and color,

5 as exemplified herein below.

Commercial examples of useful organic pigments include those known under the trade designations PB 1, PB 15, PB 15:1, PB 15:2, PB 15:3, PB 15:4, PB 15:6, PB 16, PB 24, and PB 60 (blue pigments); PB 5, PB 23, and PB 25 (brown pigments); PY 3, PY 14, PY 16, PY 17, PY 24, PY 65, PY 73, PY 74, PY 10
10 83, PY 95, PY 97, PY 108, PY 109, PY 110, PY 113, PY 128, PY 129, PY 138, PY 139, PY 150, PY 154, PY 156, and PY 175 (yellow pigments); PG 1, PG 7, PG 10, and PG 36 (green pigments); PO 5, PO 15, PO 16, PO 31, PO 34, PO 36, PO 43, PO 48, PO 51, PO 60, and PO 61 (orange pigments); PR 4, PR 5, PR 7, PR 9, PR 22, PR 23, PR 48, PR 48:2, PR 49, PR 112, PR 122, PR 123, PR 149,
15 PR 166, PR 168, PR 170, PR 177, PR 179, PR 190, PR 202, PR 206, PR 207, and PR 224 (red); PV 19, PV 23, PV 37, PV 32, and PV 42 (violet pigments); and PBLACK (black), several of which are available from Heucotech, Fairless Hills, PA as aqueous dispersions under the trade designation AQUIS II. Other useful commercially available aqueous pigment dispersions include those known under the
20 trade designations AQUALOR (available from Penn Color Inc, Doylestown, PA; MICORLITH-WA (available from CIBA-GEIGY Corporation, Pigments Division, Oak Brook, IL); SUNSPERSE, FLEXIVERSE, and AQUATONE (available from Sun Chemical Corporation, Dispersions Division, Amelia, OH; and HEUCOSPERSE III (available from Heucotech LTD, Fairless Hills, PA).

25

II. Thermal Mass Transfer Donor Elements

The thermal transfer donor element constructions of the present invention comprise a thermally mass transferable colorant layer comprising a dried version of a coatable composition of the invention coated onto a carrier. FIG. 1 illustrates
30 such a donor element 100, having colorant layer 12 coated onto a carrier 14, in this

embodiment a thin (4.5 micrometer thick) polyethylene terephthalate (PET) film. An optional anti-stick/release coating 16 is also illustrated.

Suitable carrier materials for the thermal mass transfer donor element may be any flexible material to which a transparent dried colorant composition or opaque white/metallic pigment layer may be adhered. Suitable carriers may be smooth or rough, transparent or opaque, and continuous (or sheet-like). They are preferably essentially non-porous. Non-limiting examples of materials that are suitable for use as a carrier include polyesters, especially PET, polyethylene naphthalate, polysulfones, polystyrenes, polycarbonates, polyimides, polyamides, cellulose esters, such as cellulose acetate and cellulose butyrate, polyvinyl chlorides and derivatives, and the like. The substrate generally has a thickness of 1 to 500 micrometers, preferably 2 to 100 micrometers, more preferably 3 to 10 micrometers. Particularly preferred carriers are white-filled or transparent PET or opaque paper.

By "non-porous" in the description of the invention it is meant that ink, paints and other liquid coloring media or anti-stick compositions will not readily flow through the carrier (e.g., less than 0.05 ml per second at 7 torr applied vacuum, preferably less than 0.02 ml per second at 7 torr applied vacuum).

In a preferred embodiment an anti-stick/release coating is applied to the back side of the donor element (i.e., the side opposite the thermally transferable colorant layer) to improve handling characteristics of the donor element, reduce friction, and prevent the donor element from sticking to the print substrate. Suitable anti-stick/release materials include, but are not limited to, silicone materials including poly(lower alkyl)siloxanes such as polydimethylsiloxane and silicone-urea copolymers, and perfluorinated compounds such as perfluoropolyethers.

The thermal mass transfer donor elements of the invention are suitable for image production in desktop publishing, direct digital non-critical color proofing, short and long run sign manufacture, and so forth, especially when the graphic image is intended to be weatherable and durable. As used herein the terms durable and durability refer to characteristics such as solvent and chemical resistance, abrasion resistance, bond maintenance of the thermal mass transfer composition to

the substrate, and maintenance of color brightness and (for retroreflective substrates) retroreflective brightness. The terms weatherable and weatherability refer to the characteristics such as maintenance of retroreflective brightness, resistant to dirt, resistance to yellowing and the like, all of these in normal use
5 conditions in the outdoors, where sunlight, temperature, and other environmental parameters may affect performance.

In formulating the coatable, film-forming compositions of the invention, it is important that the pigment particles remain unagglomerated to produce transparent colored images. One method, detailed in the examples, utilizes a ball mill. A more
10 preferred method is to formulate the coatable, film-forming compositions of the invention in the following manner. To formulate a 10 percent solids composition (in a diluent consisting of 1:1 weight ratio of deionized water/methanol) of a 1:1:4 weight ratio composition of (1) the pigment dispersion known under the trade designation PB 15:3; (2) the acrylic latex known under the trade designation
15 CARBOSET 514H; and (3) the polyethylene emulsion known under the trade designation POLYEMULSION AC 330 N35, one proceeds by first adding the pigment dispersion under moderate mixing conditions to a flask, followed by the addition of the deionized water. With continued moderate stirring, the methanol is introduced, followed by the acrylic dispersion and then the polyethylene emulsion.
20 If the proper order of addition is followed, no "shocking" or agglomeration of the pigment occurs, so that ball milling is unnecessary. Changing solvents from ethanol to methanol prevents less viscosity build in the composition (ethanol causes swelling of the polymers making it difficult to coat the composition onto the desired carrier).

Coating of the coatable, film-forming thermal mass transfer precursor
25 compositions of the invention onto the carrier may be accomplished by many standard web coating techniques such as imprint gravure, single or double slot extrusion coating, and the like. Imprint gravure is particularly useful for patch-type coatings in which there are interspersed regions of opaque white or metal colorants on a ribbon or sheet.

30

III. Signage Articles

The donor elements of the present invention are generally used in thermal mass transfer printing by contacting the transferable colorant layer of the inventive donor element or ribbon with a receptor sheet or film (i.e. a substrate) such that the thermally transferable colorant layer is in contact with the receptor sheet. Heat is applied, either from a thermal stylus or an infrared heat source such as an infrared laser or a heat lamp and the donor layer is transferred to the receptor. The heat may be applied to the back of either the donor ribbon or receptor sheet or may be directly introduced to a transferable donor layer.

Particularly preferred substrates are retroreflective sheetings, such as those known under the trade designation SCOTCHLITE, particularly the 3700, 4200, and 5300 series (all enclosed lens type retroreflective). Enclosed-lens retroreflective sheetings are disclosed in U.S. Pat. No. 2,407,680, incorporated herein by reference. Also useful retroreflective substrates are encapsulated-lens sheetings disclosed in U.S. Pa. Nos. 3,190,178; 4,025,159; 4,896,943; 5,064,272; and 5,066,098, all incorporated herein by reference, and cube corner retroreflective sheeting, such as those disclosed in U.S. Pat. Nos. 3,684,348; 4,801,193; 4,895,428; and 4,938,563, all incorporated herein by reference.

FIG. 2 illustrates in enlarged cross section an illustrative retroreflective signage article embodiment 200 in accordance with the invention, comprising thermal mass transfer composition 22 in the form of desired alpha-numeric indicia, bar codes, logos and the like, a polyvinyl butyral layer 24 in which a plurality of transparent glass microspheres 26 are embedded. Other organic layers, such as glyptal, alkyd, ethylene and/or propylene acrylic acid copolymers, ethylene methacrylic acid copolymer, ionomers, crosslinked and/or uncrosslinked aliphatic polyurethanes, vinyl, PMMA, and the like may also comprise layer 24. A cover material 31 is illustrated over the printed indicia for abrasion resistance, chemical deterioration resistance, and the like, which would be desired by users of the inventive articles in prolonged (i.e., greater than 1 year) outdoor usage, such as license plates, highway signs, street signs, and the like. A reflective layer 28, pressure-sensitive adhesive layer 30, and removable liner 32 complete the structure.



FIG. 3 illustrates in enlarged cross section another illustrative signage article embodiment 300 in accordance with the invention, comprising thermal mass transfer composition 22 in the form of desired alpha-numeric indicia, bar codes, logos and the like, adhered to a non-retroreflective, flexible substrate 34. Suitable non-reflective substrates include, vinyl film, paper having a coating of ethylene/acrylic acid copolymer, and thermoplastic resin coated PET for overhead transparency use.

The following test methods and examples further illustrate the present invention but should not be considered limiting.

TEST METHODS

Accelerated Weatherometer Testing

To simulate real world outdoor exposure conditions to evaluate the brightness retention and color change of thermal mass transfer printed retroreflective sheeting made in accordance with the invention, test articles were inserted in an accelerated weatherometer which employed a water cooled xenon arc light source. The weatherometer was a model 65XWWR or CI 65, available from Atlas Electric Devices Co., and the procedures of ASTM G-26 Type B, BH were followed, test designation 3-1. The weatherometer used a test cycle which consisted of alternating periods of 102 minutes of light at 63°C black panel temperature, then 18 minutes light plus water spray. A 6500 watt xenon lamp was employed, having a irradiance of 0.35 W/m² at 340 nanometers wavelength, which provides a good laboratory simulation of terrestrial sunlight.

Initial Brightness and Brightness Retention

The brightness of the articles was measured at the start and at the end of the exposure periods (500 and 1000 hours) with a retroluminometer as described in U.S. Defensive Publication T987,003 at an observation angle of 0.2° and an entrance angle of -4.0°.

Color Retention

L*a*b* Scan Color Matching Test

Since color is the first stimulus that the consumer perceives, resulting in an immediate evaluation of print quality, color consistency is one of the principal quality attributes of thermal mass transfer printed matter. To determine the color change of the thermal mass transfer compositions of the invention after a certain accelerated weatherometer time duration, a spectrophotometer known under the trade designation SPECTROPLUS C.A.T., available from Color and Appearance Technology Co., Princeton, NJ was used.

The spectrophotometer is designed to measure the reflectance color of objects. The spectrophotometer measuring geometry used was 0°/45°. This geometry provided for viewing the samples similar to normal visual evaluation, with 0° illumination, or perpendicular illumination of the sample, in 45° viewing of the sample. 45° circumferential viewing effectively excludes the specular (glossy) reflectance. This geometry essentially eliminated the effect of the sample directionality or print texture.

The spectrophotometer used operates essentially as follows. Light from a halogen lamp passes through a series of filters and lenses to simulate D65 daylight and eliminate heat, and is focused on the sample in a circular pattern. (Print color was read in "Illuminant D65", which represents daylight with a correlated color temperature of approximately 6500° Kelvin.) Light diffusely reflected from the sample is collected 45° to the sample by a series of independent photodetectors stationed at various points around the sample, each photodetector sensing a different wavelength band. The information from each photodetector is then fed to a personal computer via an analog-to-digital converter. The computer processes measurement data at 10 nanometer intervals across the visual spectrum, from 400 to 700 nanometers.

For the color determination tests, the 10° CIE Standard Observer was used. (CIE stands for the Commission International de l'Eclairage, an international commission on illumination). The "Standard Observer" is the spectral response characteristic of the average observer defined by the CIE. Two such sets of data are defined, the 1931 data for the 2° visual field (distance viewing) and the 1964 data for the annular 10° visual field (approximately arms length viewing). A much better agreement

with the average visual assessment can be obtained by making use of the 10° standard observer, and thus this was the observer used in these tests.

For each color of sample tested, a sample was scanned by the spectrophotometer. This scan produced a numerical description of the colored sample, a fingerprint, which never changes. However, since it does not consider the lighting condition and the observer, the CIE $L^*a^*b^*$ does not completely describe the visual appearance of the color. A mathematical means of translating fingerprints into a set of three numbers (XYZ), tristimulus values, was developed. The tristimulus values describe color as a normal observer sees it under a specific lighting condition.

Because the tristimulus values (XYZ) do not provide either uniform or logical estimates of perceived color intervals or color relationships, scales based on the CIE standard observer were transformed into the "opponent-colors" theory of color vision. The 1976 CIE $L^*a^*b^*$ is one such transformation. The opponent-colors theory maintains that the interaction between the eye and the brain decodes the experience of a color into three specific signals. One of these signals is lightness-darkness (L^*), one is red-green (a^*) and one is yellow-blue (b^*). This color system was chosen for use in these tests because it is believed to be understandable by both the color scientist and the novice. Thus all instrument color readings were taken on a SPECTROPLUS C.A.T. spectrophotometer, in Illuminant D65, with 10° observer, in 1976 CIE $L^*a^*b^*$ color space.

Each sample tested was placed into the instrument sample port. Two complete spectrophotometer readings (scans) were taken, completely emptying and repeating the layout procedure each time. The procedure was repeated until two readings consistent with each other to within less than 0.3 unit range were obtained. If not, the procedures were repeated with more attention to detail. All samples presented to the spectrophotometer for color difference determination were at ambient temperature. The samples were in all cases read within four hours of printing. (Samples left in an uncontrolled condition may exhibit unwanted changes, and samples that have been left standing for a long period of time are not acceptable for spectrophotometer readings.)

In interpreting the results from the spectrophotometer, the opponent-color scales give measurements of color in units of approximate visual uniformity throughout

the color space. L* measures lightness and varies from 100 for perfect white, to zero for black, approximately as the eye would evaluate it. a* and b*, the chromaticity dimensions, give understandable designations of color as follows: a* measures redness when plus, gray when zero, and greenest when minus; and b* measures yellowness when plus, gray when zero, and blueness when minus. Color change in the Examples herein is reported as ΔE^* , which is defined as:

$$\Delta E^* = [(\Delta L^*)^2 + (\Delta a^*)^2 + (\Delta b^*)^2]^{1/2},$$

where it is preferred that ΔE^* be as low as possible, preferably no more than 10 after 500 hours of weatherometer exposure, particularly preferably no more than 5 after 500 hours of weatherometer exposure.

The data for all Tables I-IV employed the thermal mass transfer composition and donor element described in Example I printed onto a retroreflective sheeting known under the trade designation 3M SCOTCHLITE Brand Reflective License Plate Sheeting, product series 3750, which was an enclosed-lens retroreflective sheeting consisting of a polyvinyl butyral binder layer in which glass beads are completely embedded, an aluminum reflective layer, a PSA layer and a paper liner. In all of the Examples (Tables I-IV), block images were thermal mass transfer printed onto the exposed binder of the retroreflective sheeting using a Zebra 140 thermal mass transfer printer, available from Zebra Technologies Corp., Chicago, IL. The data for Tables I and III were generated with a glass cover layer over the printed indicia, while the data for Tables II and IV were generated with the printed indicia having a polymethylmethacrylate (PMMA) cover layer, 0.003 inch (0.076 mm) thick.

Articles were tested in duplicate for both the brightness and color change tests. Percent retention of brightness was determined for each sample by dividing the end values by the start values and multiplying the result by 100.

EXAMPLES

In Examples 1, 2, and 3 which follow, the thermal mass transfer donor elements all consisted of a colored thermal mass transfer composition of the invention adhered to a 4.5 micrometer thick PET film having an anti-stick coating

on its backside. The PET film having anti-stick coating was obtained from Toray Chemical Co., Japan. Except where indicated the thermal mass transfer composition was derived from an aqueous coatable composition of the invention comprising a waterborne acrylic dispersion obtained from BFGoodrich, Cleveland, Ohio, known under the trade designation CARBOSET 514H, a polyethylene emulsion known under the trade designation POLYEMULSION 330 N35 obtained from Chemical Corporation of America, and at least one aqueous surfactant-based pigment dispersion from Heucotech known under the trade designation AQUIS II, as detailed in each example. The coatable compositions were ball milled for at least 24 hours before they were coated to decrease the particle size to much less than 1 micrometer and thus increase the light transparency of the printed compositions. The coatable compositions were coated onto the polyester film by a wire wound bar (other methods to deposit thin films (such as gravure printing, flexographic printing, and the like may be used) and dried at elevated temperature of 80°C for 1 minute. The resulting coated carrier film was spliced into a color proofing donor element used in a color proofing machine known under the trade designation RAINBOW DESKTOP COLOR PROOFER, available from 3M. In Examples 1, 2, and 3 the donor element was placed into the proofer and an image was thermal mass transfer printed onto a retroreflective sheeting precursor composed of glass beads fully embedded in polyvinyl butyral binder. Resolution was greater than 200 dots per inch (dpi), which indicated the adhesion to the retroreflective sheeting was good.

Example 1:

A coatable composition of the invention was prepared as above described using the pigment dispersion known under the trade designation Pigment Blue 15:3 dispersed in an aqueous surfactant stabilized dispersion from Heubach (also known under the trade designation AQUIS II BW 3571: 45% pigment, 51% solids). The composition comprised a 1:1:4 weight ratio of PB 15:3 dispersion/514H/330 N35 (10% solids in 1:1 weight ratio ethanol/deionized water). The coatable composition of the invention was coated onto the Toray 4.5 micrometer thick polyester film with a #20 wire would bar to produce a 3.3 micrometer thick thermal mass transfer

composition layer (colorant layer). The film was spliced into the proofer donor element and the thermal mass transfer composition of the invention thermally mass transferred to the polyvinyl butyral top film. The colorant layer showed good adhesion to the polyvinyl butyral retroreflective sheeting precursor film and

5 excellent transparency as defined by the following relationship:

$$\text{Transparency} \propto \log_{10}(I_0/I_s)$$

wherein I_0 is the original light intensity and I_s is the scattered light intensity, and wherein the higher the value of the logarithm, the better the transparency.

As a comparison of the transparency and transmission optical density (TOD) of thermally mass transferred compositions of the invention with a known composition, three commercially available waxed-based thermal transfer ribbons available from Calcomp, Co., a Sanders Corp., of Anaheim, CA, were used to transfer a block of color to a PET film. Table A compares TOD (measured using a MacBeth TR927 densitometer) and transparency (measured using a MacBeth RD918 analyzer) for the comparative images with images produced using the ribbons of Example 1.

The data of Table A illustrate that although the images produced using the inventive compositions and thermal transfer articles have greater transmission optical density (TOD) than the comparative example, the inventive thermally mass transferred compositions exhibited greater transparency, an unexpectedly good result.

Table A

Thermal	<u>Calcomp</u>		<u>Invention</u>	
	<u>TOD</u>	<u>Transparency</u>	<u>TOD</u>	<u>Transparency</u>
25 <u>Transfer Colorant</u>				
yellow	0.40	1.07	0.85	1.60
magenta	0.53	1.51	0.85	1.69
cyan	0.81	1.39	2.73	1.93

30

Example 2

Example 1 was repeated with the following exceptions: a polyalkylene-like binder precursor consisting of i) an ethylene acrylic acid (EAA) copolymer dispersion known under the trade designation 50T4983 from Morton International (25% solids) and ii) a polymerized version of stearyl methacrylate hexane diol diacrylate (SMA-HDDA), obtained as an aqueous dispersion from 3M, was used instead of the polyethylene dispersion; and the acrylic dispersion known under the trade designation CARBOSET XL-11 from BFGoodrich was used rather than the CARBOSET 514H.

10 The following coatable composition was coated onto a new piece of the same polyester carrier used in Example 1 using a #18 wire wound bar to produce a 3 micrometer thick thermal mass transfer composition layer (colorant layer): a 1:1 weight ratio of compositions (a) and (b), wherein a) 1:1 weight ratio PB 15:3 dispersion/50T4983 (10% solids in a 4:1 weight ratio of ethanol/deionized water + 15 1 weight percent NH_4OH), and b) 1:1 weight ratio SMA-HDDA (10% solids in deionized water/XL 11 (10% solids in a 4:1 weight ratio ethanol/deionized water)). The film was spliced into the donor element used in the same color proofing machine used in Example 1, and the thermal mass transfer composition of the invention thermally mass transferred to the polyvinyl butyral top film. The colorant 20 layer showed good adhesion to the polyvinyl butyral retroreflective sheeting precursor film and excellent transparency.

Example 3 (Four Color Imaging on Retroreflective Sheetting)

The retroreflective sheeting, acrylic dispersion, and polyethylene dispersion 25 of Example 1 were used in preparing the following four coatable compositions of the invention in the following proportions at a 10 weight percent solids in a 1:1 weight ratio of ethanol/deionized water.

Color: Yellow

30 Pigment used: AQUIS II PY 150, also known as YW 3338, a 35 weight percent solids pigment

Coatable composition: 1:1:4 weight ratio of PY 150
dispersion/CARBOSET 514H/POLYEMULSION 330 N35

Color: Magenta

5 Pigment used: AQUIS II PR 122, also known as RW 3115
Coatable Composition: 1:1:4 weight ratio of PR 122/CARBOSET
514H/POLYEMULSION 330 N35

Color: Cyan

10 Pigment used: AQUIS II PB 15:3, also known as BW 3571
Coatable composition: 1:1:4 weight percent PB 15:3/CARBOSET
514H/POLYEMULSION 330 N35

Color: Black

15 Pigment used: AQUIS II PIGMENT BLACK (also known as KW 3750, a
55 weight percent solids composition)
Coatable composition: 1:1:4 PIGMENT BLACK/CARBOSET
514H/POLYEMULSION 330 N35

20 Each coatable composition was coated onto a separate 4.5 micrometer thick
PET film having an antistick coating (Toray) using a #20 wire wound bar to
produce a thermal mass transfer layer (colorant layer) having a thickness of 3.3
micrometers. Each coated carrier film was spliced into the proofing donor element
used in the proofer described in Example I, each in its appropriate spot. An image
25 was prepared in such a way that anytime colorant was transferred it was transferred
at 100% energy because the proofing machine was not designed for thermal mass
transfer. This limited the number of colors able to be printed to red, magenta, blue,
cyan, green, yellow, and black. Printing using a dot growth technique would no
doubt produce more varied colors.

30

Accelerated Weatherometer Test Results: Brightness and Color Change

As mentioned previously, the coatable composition of Example I was prepared with various pigments, separate thermal mass transfer donor elements formed on separate pieces of the Toray PET film carrier, and the thermal mass transfer compositions of the invention thermal mass transferred as a block of color to separate pieces of retroreflective sheeting known under the trade designation 3M SCOTCHLITE Reflective License Plate Sheeting, product series 3750, from 3M. The colored sheetings were then subjected to the accelerated weatherometer test and the brightness retention and color change measured after 500 and, in some examples, 1000 hours. This data is presented in Tables I-IV; in Tables I and II, the designation ΔE^* denotes the color change as in the test described above, while in Tables III and IV the designation "CPL" denotes candelas per lux per square meter which is a measure of brightness. As can be seen from the data, the brightness retention was excellent in all the samples (except the black pigments, in which brightness is not a concern), and color change was minimal or within acceptable values. Brightness retention is preferably at least 50 percent after 500 hours accelerated weatherometer testing, more preferably at least 75 percent after 1000 hours of accelerated weatherometer testing.

Various modifications and alterations of this invention will become apparent to those skilled in the art without departing from the scope thereof. It should be understood, therefore, that the scope of this invention is not to be limited to the illustrative embodiments set forth herein, but is to be determined by the limitations set forth in the claims and equivalents thereof.

Table I

(Color Change - Images Covered by Glass)

5

PIGMENT	EXAMPLE	Exposure Time (Hr)	Color Change (ΔE^*)
PB 15:3	1A	500	2.03
	1B	500	4.54
	1A	1000	2.66
PY 150	2A	500	3.93
	2B	500	4.54
	2A	1000	2.66
PR 122	3A	500	3.44
	3B	500	4.38
	3A	1000	3.68
PBLACK	4A	500	2.3
	4B	500	0.88
	4A	1000	0.74

Table II

10

(Color Change- Image Covered by PMMA Film)

PIGMENT	EXAMPLE	Exposure Time (Hr)	Color Change (ΔE^*)
PB 15:3	1A	500	1.22
	1B	500	1.30
	1A	1000	2.30
PY 150	2A	500	3.66
	2B	500	3.73
	2A	1000	3.43
PR 122	3A	500	1.88
	3B	500	2.27
	3A	1000	3.09
PBLACK	4A	500	1.29
	4B	500	0.64
	4A	1000	1.10

15

Table III**(Brightness Retention-Images Covered by Glass)**

5

PIGMENT	EXAMPLE	ORIGINAL BRIGHTNESS (CPL)	Exposure Time (Hr)	FINAL BRIGHTNESS (CPL)	% BRIGHT- NESS RETEN- TION
PB 15:3	1	16	-	-	-
	1A	-	500	15	93
	1B	-	500	17	108
	1A	-	1000	14	87
PY 150	2	60	-	-	-
	2A	-	500	58	97
	2B	-	500	56	94
	2A	-	1000	54	90
PR 122	3	20	-	-	-
	3A	-	500	24	121
	3B	-	500	24	121
	3A	-	1000	22	110

Table IV

10

(Brightness Retention-Images Covered by PMMA Film)

PIGMENT	EXAMPLE	ORIGINAL BRIGHTNESS (CPL)	Exposure Time (Hr)	FINAL BRIGHTNESS (CPL)	% BRIGHT- NESS RETEN- TION
PB 15:3	5	12.9	-	-	-
	5A	-	500	14.3	111
	5B	-	500	13.3	103
	5A	-	1000	14.5	112
PY 150	6	55	-	-	-
	6A	-	500	53.8	98
	6B	-	500	55	100
	6A	-	1000	53	96
PR 122	7	26.4	-	-	-
	7A	-	500	24	91
	7B	-	500	24.3	92
	7A	-	1000	24.2	92

The claims defining the invention are as follows:

1. A coatable, film-forming thermal mass transfer precursor composition comprising:
 - a) a polyalkylene latex binder precursor;
 - b) an acrylic latex binder precursor wherein the polyalkylene binder and acrylic
5 binder are present at a solids weight ratio of polyalkylene binder to acrylic binder ranging from about 1.5:1.0 to about 15:1.0;
 - c) an effective amount of a pigment to provide the desired color to a thermal mass transfer composition using the coatable composition; and
 - d) a diluent in which the polyalkylene binder precursor, acrylic binder precursor, and
10 pigment are all dispersed,

wherein the pigment and the acrylic binder precursor are present at a solids weight ratio of pigment to acrylic binder precursor ranging from about 0.5:1.0 to about 1.5:1.0, and the polyalkylene binder precursor is present in an amount sufficient to provide the desired UV and visible light transparency to the thermal mass transfer composition.
- 15 2. Composition in accordance with claim 1 wherein the diluent comprises a major portion of water.
3. Composition in accordance with claim 1 or claim 2 wherein a combination of the polyalkylene latex, the acrylic latex, and the diluent is substantially UV transparent.
4. Composition in accordance with any one of claims 1-3 wherein the polyalkylene binder
20 precursor is selected from the group consisting of polyethylene, polypropylene, polybutadiene, and polyalkylene-like oligomers and polymers having a high weight percentage of methylene units.
5. Composition in accordance with claim 4 wherein the polyalkylene-like oligomers and polymers having a high weight percentage of methylene units are selected from the group consisting of compositions comprising the reaction product of a low molecular weight organic acid and a high
25 molecular weight alcohol or short chain diol.
6. Composition in accordance with claim 5 wherein the low molecular weight organic acid is methacrylic acid and the high molecular weight alcohol is stearyl alcohol.
7. Composition in accordance with claim 5 wherein the low molecular weight organic acid is acrylic acid and the short chain diol is hexane diol.
- 30 8. Composition in accordance with any one of claims 1-7 wherein the acrylic binder precursor is selected from the group consisting of copolymers and terpolymers of an alkylene monomer and an acidic copolymerizable monomer.
9. Composition in accordance with claim 8 wherein the alkylene monomer is selected from the group consisting of ethylene and propylene.
- 35 10. Composition in accordance with claim 8 or claim 9 wherein the acidic copolymerizable monomer is selected from the group consisting of acrylic acid, methacrylic acid, and ethacrylic acid.
11. A thermal mass transfer donor element comprising a carrier and a thermal mass transfer composition adhered to the carrier, the thermal mass transfer composition comprising:
 - a) a polyalkylene binder;



b) an acrylic latex binder precursor wherein the polyalkylene binder and acrylic binder are present at a solids weight ratio of polyalkylene binder to acrylic binder ranging from about 1.5:1.0 to about 15:1.0,

c) an effective amount of a pigment to provide the desired color to a thermal mass transfer composition;

wherein the pigment and the acrylic binder are present at a solids weight ratio of pigment to acrylic binder ranging from about 0.5:1.0 to about 1.5:1.0, and the polyalkylene binder is present in an amount sufficient to provide the desired UV and visible light transparency and gloss to the thermal mass transfer composition.

12. Thermal mass transfer donor element in accordance with claim 11 wherein the carrier is a polymeric film.

13. Thermal mass transfer donor element in accordance with claim 11 or claim 12 which is substantially UV transparent except for said pigment.

14. Thermal mass transfer donor element in accordance with any one of claims 11-13 wherein the polyalkylene binder is selected from the group consisting of polyethylene, polypropylene, polybutadiene, and polyalkylene-like oligomers and polymers having a high weight percentage of methylene units.

15. Thermal mass transfer donor element in accordance with claim 14 wherein the polyalkylene-like oligomers and polymers having a high weight percentage of methylene units are selected from the group consisting of compositions comprising the reaction product of a low molecular weight organic acid and a high molecular weight alcohol or short chain diol.

16. Thermal mass transfer donor element in accordance with claim 15 wherein the low molecular weight organic acid is methacrylic acid and the high molecular weight alcohol is stearyl alcohol.

17. Thermal mass transfer donor element in accordance with claim 15 wherein the low molecular weight organic acid is acrylic acid and the short chain diol is hexane diol.

18. Thermal mass transfer donor element in accordance with any one of claims 11-17 wherein the acrylic binder is selected from the group consisting of copolymers and terpolymers of an alkylene monomer and an acidic copolymerizable monomer.

19. Thermal mass transfer donor element in accordance with claim 18 wherein the alkylene monomer is selected from the group consisting of ethylene and propylene.

20. Thermal mass transfer donor element in accordance with claim 18 or claim 19 wherein the acidic copolymerizable monomer is selected from the group consisting of acrylic acid, methacrylic acid, and ethacrylic acid.

21. A signage article comprising a thermal mass transfer composition in the form of indicia adhered to a substrate, the thermal mass transfer composition comprising:

a) a polyalkylene binder;

b) an acrylic latex binder precursor wherein the polyalkylene binder and acrylic binder are present at a solids weight ratio of polyalkylene binder to acrylic binder ranging from about 1.5:1.0 to about 15:1.0,



c) an effective amount of a pigment to provide the desired color to a thermal mass transfer composition;

wherein the pigment and the acrylic binder are present at a solids weight ratio of pigment to acrylic binder ranging from about 0.5:1.0 to about 1.5:1.0, and the polyalkylene binder is present in an amount sufficient to provide the desired UV and visible light transparency and gloss to the thermal mass transfer composition.

22. Signage article in accordance with claim 21 wherein the substrate is selected from the group consisting of paper, metal, and polymeric materials.

23. Signage article in accordance with claim 22 wherein the polymeric material is a polymeric surface of a retroreflective sheeting.

24. Signage article in accordance with claim 23 wherein the polymeric surface of a retroreflective sheeting comprises polyvinyl butyral.

25. Signage article in accordance with claim 23 wherein the signage article is outdoor durable and weatherable.

26. Signage article in accordance with any one of claims 21-25 further comprising a transparent cover material layer over the thermal mass transfer composition.

27. Signage article in accordance with any one of claims 21-26 wherein the thermal mass transfer composition has a thickness ranging from about 1 to about 10 micrometers.

28. Signage article in accordance with claim 27 wherein the thermal mass transfer composition has a thickness ranging from about 2 to about 8 micrometers.

29. Signage article in accordance with claim 27 wherein the thermal mass transfer composition has a thickness ranging from about 3 to about 6 micrometers.

30. Signage article in accordance with any one of claims 21-29 wherein the article exhibits a protected color change defined by ΔE^* of no more than 5 after exposure for 500 hours.

31. Signage article in accordance with any one of claims 21-29 wherein the article exhibits a protected brightness retention of at least 50 percent after accelerated weatherometer exposure for 500 hours.

32. Signage article in accordance with any one of claims 21-29 wherein the article exhibits a protected brightness retention of at least 75 percent after accelerated weatherometer exposure for 1000 hours.

33. A method of formulating a coatable, film-forming composition, the composition suitable for use in producing a thermal mass transfer donor element, the method comprising the steps of

- a) adding water to a quantity of a pigment dispersion employing moderate agitation to form a first intermediate; b) adding methanol to the first intermediate to form a second intermediate;
- c) adding an acrylic dispersion to the second intermediate to form a third intermediate; and d) adding a polyalkylene emulsion to the third intermediate to form the coatable composition, wherein the amount of water and methanol is sufficient to afford the composition a weight percentage solids ranging from about 1 to about 20 weight percent, and the pigment dispersion, the acrylic latex, and the polyalkylene emulsion are present in a solids weight ratio of about 1:1:4.



34. A coatable, film-forming thermal mass transfer precursor composition substantially as herein described.

35. A thermal mass transfer donor element substantially as herein described and as shown in Fig. 1 of the accompanying drawings.

5 36. A signage article substantially as herein described and as shown in either one of Figs. 2 or 3 of the accompanying drawings.

Dated 10 December, 1998

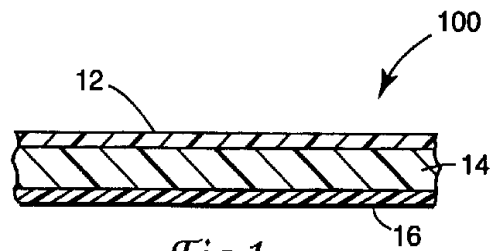
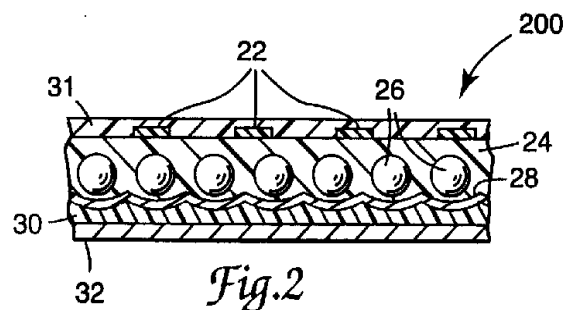
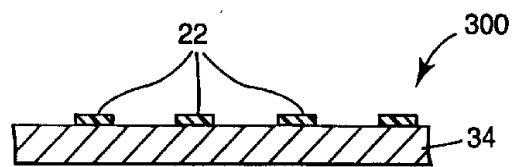
Minnesota Mining and Manufacturing Company

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

10

5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
21

*Fig. 1**Fig. 2**Fig. 3*