

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 August 2011 (18.08.2011)

PCT

(10) International Publication Number  
**WO 2011/100629 A2**

(51) International Patent Classification:

H04L 29/06 (2006.01) H04L 12/24 (2006.01)  
H04L 9/32 (2006.01) H04L 12/58 (2006.01)

Drive, Morrisville, NC 27560 (US). **MARSICO, Peter, Joseph** [US/US]; 1415 Preston Spring Lane, Chapel Hill, NC 27516 (US).

(21) International Application Number:

PCT/US2011/024645

(74) Agent: **HUNT, Gregory, A.**; Jenkins, Wilson, Taylor & Hunt, P.A., Suite 1200 University Tower, 3100 Tower Boulevard, Durham, NC 27707 (US).

(22) International Filing Date:

11 February 2011 (11.02.2011)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/304,310 12 February 2010 (12.02.2010) US

(71) Applicant (for all designated States except US): **TEK-ELEC** [US/US]; 5200 Paramount Parkway, Morrisville, NC 27560 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WALLACE, Donald, E.** [US/US]; 3127 Buttercup Lane, Evergreen, CO 80439 (US). **KANODE, Mark, Edward** [US/US]; 3204 Colby Chase Drive, Apex, NC 27539 (US). **SPRAGUE, David, Michael** [US/US]; 14252 Wyndfield Circle, Raleigh, NC 27615 (US). **MCCANN, Thomas, M.** [US/US]; 10560 Clubmont Lane, Raleigh, NC 27617 (US). **KARMARKAR, Kedar, Kashinath** [IN/IN]; C/o Sanjay Revalkar, Flat No 6, Meghali Co-op HSG Society, Damle Path, Off Law College Road, Erandwana, Pune 411004 (IN). **TOMAR, Mahesh** [IN/US]; 216 Union Ridge

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHODS, SYSTEMS, AND COMPUTER READABLE MEDIA FOR DIAMETER NETWORK MANAGEMENT

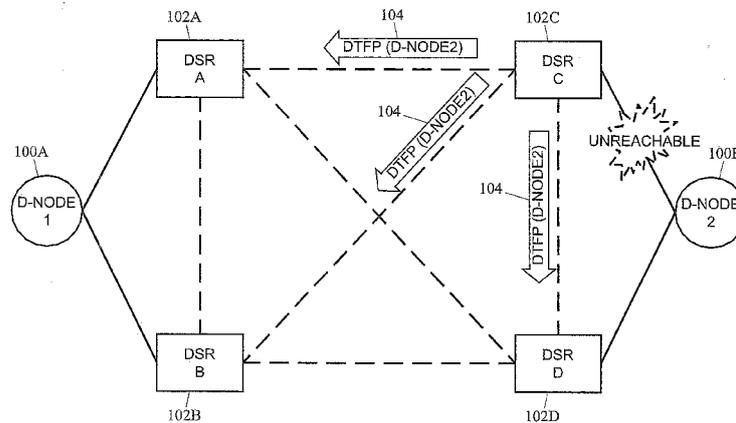


FIG. 1A

(57) Abstract: According to one aspect, the subject matter described herein includes a method for providing Diameter network management information in a communications network. The method includes steps occurring at a Diameter signaling router (DSR). The method also includes determining whether successful Diameter communications are available with a first Diameter application. The method further includes in response to determining that successful Diameter communications are not available with the first Diameter application, generating a first Diameter network management message (DNMM) indicating that successful Diameter communications are not available with the first Diameter application. The method also includes sending the first DNMM to a second Diameter node.

WO 2011/100629 A2

**Published:**

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*



“Methods, Systems, And Computer Readable Media For Providing Local Application Routing At A Diameter Node,” Attorney Docket No. 1322/399/8 (Serial No. not yet assigned);

5 “Methods, Systems, And Computer Readable Media For Answer-Based Routing Of Diameter Request Messages,” Attorney Docket No. 1322/399/9 (Serial No. not yet assigned);

10 “Methods, Systems, And Computer Readable Media For Performing Diameter Answer Message-Based Network Management At A Diameter Signaling Router (DSR),” Attorney Docket No. 1322/399/10 (Serial No. not yet assigned);

“Methods, Systems, And Computer Readable Media For Multi-Interface Monitoring And Correlation Of Diameter Signaling Information,” Attorney Docket No. 1322/399/11 (Serial No. not yet assigned);

15 “Methods, Systems, And Computer Readable Media For Diameter Protocol Harmonization,” Attorney Docket No. 1322/399/12 (Serial No. not yet assigned); and

20 “Methods, Systems, And Computer Readable Media For Diameter Application Loop Prevention,” Attorney Docket No. 1322/399/14 (Serial No. not yet assigned).

#### TECHNICAL FIELD

The subject matter described herein relates to methods, systems, and computer readable media for communications in a communications network. More particularly, the subject matter described herein relates to methods,  
25 systems, and computer readable media for Diameter network management.

#### BACKGROUND

Diameter is an authentication, authorization and accounting (AAA) protocol for computer networks and is a successor to Radius. The Diameter  
30 base protocol is defined in IETF RFC 3588, which is incorporated by reference herein in its entirety. Diameter messages use a per user framework and exist in the format of request-answer messages. Diameter

answer messages travel back to the request source via the same path through which the request message was routed using hop-by-hop transport.

Congestion and other communication issues (e.g., link failure) can prevent or hinder Diameter messages from reaching an appropriate destination. If a Diameter request message or a corresponding answer message is lost or undelivered, problems can arise. For example, Diameter messages may be used to authenticate subscribers for service access. If subscribers are not authenticated, the subscribers may be denied service access. Hence, to reduce problems associated with Diameter message delivery, it is important that Diameter nodes are made aware of network management information, such as node availability information, path availability information, and congestion information.

Accordingly, there exists a need for methods, systems, and computer readable media for Diameter network management.

15

#### SUMMARY

According to one aspect, the subject matter described herein includes a method for providing Diameter network management information in a communications network. The method includes steps occurring at a Diameter signaling router (DSR). The method also includes determining whether successful Diameter communications are available with a first Diameter application. The method further includes in response to determining that successful Diameter communications are not available with the first Diameter application, generating a first Diameter network management message (DNMM) indicating that successful Diameter communications are not available with the first Diameter application. The method also includes sending the first DNMM to a second Diameter node.

According to another aspect, the subject matter described herein includes a system for providing Diameter network management information in a communications network. The system includes a Diameter signaling router (DSR). The DSR includes a Diameter communications interface. The system also includes a network management module for determining whether successful Diameter communications are available with a first

30

Diameter application, for, in response to determining whether successful Diameter communications are not available with the first Diameter application, generating a first Diameter network management message (DNMM) indicating that successful Diameter communications are not available with the first Diameter application, and for sending the first DNMM to a second Diameter node.

The subject matter described herein may be implemented in software in combination with hardware and/or firmware. For example, the subject matter described herein may be implemented in software executed by a processor. In one exemplary implementation, the subject matter described herein may be implemented using a computer readable medium having stored thereon computer executable instructions that when executed by the processor of a computer control the computer to perform steps. Exemplary computer readable media suitable for implementing the subject matter described herein include non-transitory devices, such as disk memory devices, chip memory devices, programmable logic devices, and application specific integrated circuits. In addition, a computer readable medium that implements the subject matter described herein may be located on a single device or computing platform or may be distributed across multiple devices or computing platforms.

As used herein, the term "node" refers to a physical computing platform including one or more processors and memory.

As used herein, the terms "function" or "module" refer to software in combination with hardware (such as a processor) and/or firmware for implementing features described herein.

As used herein, the term "Diameter application" refer to software in combination with hardware (such as a processor) and/or firmware for implementing or using a Diameter protocol. For example, a Diameter application may be software executed by a processor for performing home subscriber server (HSS) functions, such as subscriber authentication.

## BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the subject matter described herein will now be explained with reference to the accompanying drawings, wherein like reference numerals represent like parts, of which:

5            Figures 1A is a network diagram illustrating a DSR in a communications network providing Diameter network management information indicating a Diameter node is unreachable according to an embodiment of the subject matter described herein;

10           Figures 1B is a network diagram illustrating a DSR in the communications network requesting Diameter network management information for a Diameter node according to an embodiment of the subject matter described herein;

15           Figure 1C is a network diagram illustrating a DSR in the communications network providing Diameter network management information indicating a Diameter node is reachable according to an embodiment of the subject matter described herein;

20           Figure 2A is a network diagram illustrating a DSR in a communications network providing Diameter network management information indicating all realms are unreachable according to an embodiment of the subject matter described herein;

             Figure 2B is a network diagram illustrating a DSR in the communications network requesting Diameter network management information for all realms according to an embodiment of the subject matter described herein;

25           Figure 2C is a network diagram illustrating a DSR in the communications network providing Diameter network management information indicating all realms are reachable according to an embodiment of the subject matter described herein;

30           Figure 3A is a network diagram illustrating a DSR in a communications network providing Diameter network management information indicating a realm is unreachable according to an embodiment of the subject matter described herein;

Figure 3B is a network diagram illustrating a DSR in the communications network requesting Diameter network management information for a realm according to an embodiment of the subject matter described herein;

5 Figure 3C is a network diagram illustrating a DSR in a communications network providing Diameter network management information indicating a realm is reachable according to an embodiment of the subject matter described herein;

Figure 4 is a message flow diagram illustrating a Diameter network management information broadcast according to an embodiment of the  
10 subject matter described herein;

Figure 5 is a message flow diagram illustrating a Diameter network management information broadcast according to another embodiment of the subject matter described herein;

15 Figure 6 is a block diagram illustrating an exemplary DSR for providing Diameter network management information according to an embodiment of the subject matter described herein; and

Figure 7 is a flow chart illustrating exemplary steps for providing Diameter network management information according to an embodiment of  
20 the subject matter described herein.

#### DETAILED DESCRIPTION

Reference will now be made in detail to exemplary embodiments of the subject matter described herein, examples of which are illustrated in the  
25 accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

Figures 1A-1C are network diagrams illustrating examples of Diameter network management in an exemplary communications network according to embodiments of the subject matter described herein.

30 In the embodiments illustrated in Figures 1A-1C, the exemplary communications network may include Diameter signaling routers (DSRs) **102A-D** and Diameter nodes **100A-B**. DSRs **102A-D** may be any suitable entities for routing or relaying Diameter signaling messages between

Diameter nodes. For example, a DSR **102** may be a Long Term Evolution (LTE) signaling router, an LTE Diameter signaling router, a Diameter signaling agent, a Diameter proxy agent, a Diameter relay agent, a Diameter routing agent, a Diameter translation agent, or a Diameter redirect agent.

- 5 DSR **102** may include functionality for processing various messages. In one embodiment, DSR functionality, including the network management functionality described herein, may be implemented by one or more modules (e.g., a network management module and a routing module).

Diameter nodes **100A-B** may be nodes capable of implementing or  
10 using a Diameter protocol. For example, Diameter nodes **100A-B** may each be a mobility management entity (MME), a home subscriber server (HSS) and/or authentication, authorization, and accounting (AAA) server, a Bearer Binding and Event Reporting Function (BBERF), a policy charging enforcement function (PCEF), a policy charging and rules function (PCRF), a  
15 subscriber profile repository (SPR), a serving gateway (SGW), a packet data network gateway (PDN GW), a Diameter peer node, a Diameter agent, a network node, a policy engine, a policy server, an application function (AF), an application server, a Diameter signaling agent, a LTE node, an Internet protocol (IP) multimedia subsystem (IMS) network node, a Diameter  
20 message processor, a server, a node, a database, a computing platform, or a DSR **102**.

DSRs **102A-D** may include one or more processors for performing various functions, e.g., a plurality of message processors. In one  
25 embodiment, DSRs **102A-D** may include one or more processors for communicating with various Diameter nodes **100A-B** via one or more 3rd Generation Partnership Project (3GPP) LTE communications interfaces. For example, a DSR **102** may communicate messages between an MME and an HSS via one or more LTE S6 interfaces. In a second example, a DSR **102** may exchange or communicate messages between an SPR via one or more  
30 LTE Sp interfaces.

In another embodiment, DSRs **102A-D** may include one or more processors for communicating with Diameter nodes **100A-B** via one or more other (e.g., non-LTE) communications interfaces. For example, a DSR **102**

may communicate with IP multimedia subsystem (IMS) nodes, such as call session control functions (CSCFs), using IMS-related interfaces. For instance, DSR **102** may receive Diameter messages from a CSCF via a Cx Diameter interface.

5 Referring to the embodiment illustrated in Figure 1A, DSR **102C** may determine and provide Diameter network management information indicating a Diameter node is unreachable. In one embodiment, DSR **102C** may provide Diameter network management information dynamically and/or in response to a Diameter message. For example, DSR **102C** may provide  
10 Diameter network management information in response to network conditions occurring, such as detection of a Diameter connection failure or congestion. In another example, DSR **102C** may provide Diameter network management information in response to receiving a Diameter network management message (DNMM) or a Diameter request message.

15 In one embodiment, DSR **102C** may determine that a Diameter message cannot be communicated to Diameter node **100B** via DSR **102C**. For example, DSR **102C** may attempt to relay a Diameter request message to an application or subsystem associated with Diameter node **100B**. Using response timers and/or other methods (e.g., timers, heartbeat packets  
20 and/or link probes), DSR **102C** may detect or determine that Diameter node **100B** is currently unreachable.

In general, a DSR **102** according to an embodiment of the subject matter described herein, such as DSR **102C**, may determine whether successful Diameter communications are available with a Diameter  
25 application and/or another Diameter node. Determining whether successful Diameter communications are available with a Diameter application and/or another Diameter node may include determining whether the Diameter node is unreachable due to a link failure, a Diameter connection failure, a Diameter protocol error, congestion, or any other cause which may be  
30 indicate the unavailability of Diameter level communications with a node.

In some embodiments, in response to determining whether successful Diameter communications are available with a Diameter application and/or another Diameter node, DSR **102** may use this information in generating

DNMMs or other Diameter network management information. DSR **102** may communicate the Diameter network management information to various destinations, e.g., other Diameter nodes (e.g., peer DSR **102**) in the communications network and/or internal Diameter message processors associated with DSR **102**.

In the example illustrated in Figure 1A, in response to determining that Diameter node **100B** is currently unreachable, DSR **102C** may generate a DNMM. The DNMM may include information indicating that Diameter node **100B** is unreachable via DSR **102C**. For example, DSR **102C** may generate a Diameter transfer prohibited (DTFP) message **104** indicating that a Diameter message cannot be communicated to Diameter node **100B** via DSR **102C**. In another embodiment, DSR **102C** may generate DTFP message **104** in response to receiving a Diameter request message (e.g., a DRST message) inquiring about a Diameter node that is currently unavailable.

DSR **102C** may send or initiate sending the DNMM or copies of the DNMM to one or more nodes, e.g., Diameter nodes **100A-B** or DSRs **102A-D**. In one embodiment, a peer DSR **102A** may receive the DNMM. In response to receiving the DNMM, peer DSR **102A** may determine a different path for sending Diameter messages towards Diameter node **100B** and may send the Diameter messages to Diameter node **100B** via a different path. For example, as illustrated in Figure 1A, DSR **102C** may send DTFP messages **104** to its peer nodes, such as DSR **102A**, **102B**, and **102D**. In response, the peer nodes (e.g., DSRs **102A**, **102B**, and **102D**) may configure Diameter message routing or relaying information so as to steer Diameter message traffic destined for Diameter node **100B** away from DSR **102C**. For instance, after receiving DTFP message **104**, Diameter message traffic destined for Diameter node **100B** may be relayed via DSR **102D**.

Referring to the embodiment illustrated in Figure 1B, after receiving a DNMM indicating that Diameter node **100B** is unreachable via DSR **102C**, DSR **102A** may periodically or aperiodically poll DSR **102C** with a DNMM requesting information regarding whether DSR **102C** is able to reach Diameter node **100B**. For example, DSR **102A** may generate a Diameter

route set test (DRST) message **106** requesting information regarding route availability status for reaching Diameter node **100B** via DSR **102C**. DSR **102A** may send the DNMM towards DSR **102C**.

DSR **102C** may receive DRST message **106** or another Diameter request message and may indicate route availability status of Diameter node **100B** via DSR **102C**. In one embodiment, indicating route availability status may include providing no response. For example, as illustrated in Figure 1B, no answer from DSR **102C** (represented by box **108**) may indicate that DSR **102C** is still unable to reach Diameter node **100B**. In another embodiment, indicating route availability status may include providing a response. For example, DSR **102C** may respond to DRST message **106** with a message indicating route availability status. For instance, a response message may indicate that DSR **102C** is able to reach Diameter node **100B**. In another instance, a response message may indicate that DSR **102C** is unable to reach Diameter node **100B**.

Referring to the embodiment illustrated in Figure 1C, DSR **102C** may determine that a Diameter message can be communicated to Diameter node **100B** via DSR **102C**. For example, a network operator may repair a connection or link failure between Diameter node **100B** and DSR **102C**. After the repair, using one or more methods (e.g., timers, heartbeat packets and/or link probes), DSR **102C** may detect or determine that Diameter node **100B** is currently reachable via DSR **102C**.

In one embodiment, in response to determining that Diameter node **100B** is currently reachable, DSR **102C** may generate a DNMM. The DNMM may include information indicating that Diameter node **100B** is reachable via DSR **102C**. For example, in response to route availability status information changing (e.g., a Diameter node **100** becoming reachable), DSR **102C** may generate a Diameter transfer allowed (DTFA) message **110** indicating that a Diameter message can be communicated to Diameter node **100B** via DSR **102C**. In another embodiment, DSR **102C** may generate DTFA message **110** in response to receiving a Diameter request message (e.g., a DRST message).

DSR **102C** may send or initiate sending DNMMs to one or more nodes. In one embodiment, peer DSR **102A** may receive the DNMM. In response to receiving the DNMM, peer DSR **102A** may send Diameter messages to Diameter node **100B** via DSR **102C**. For example, as  
5 illustrated in Figure 1C, DSR **102C** may send DTFA messages **110** to peer nodes, such as DSRs **102A**, **102B**, and **102D**. In response, the peer nodes (e.g., DSRs **102A**, **102B**, and **102D**) may configure Diameter message routing or relaying information so as to steer Diameter message traffic destined for Diameter node **100B** to DSR **102C**. For example, after  
10 receiving DTFA message **110**, Diameter message traffic may be steered towards DSR **102C**.

Figures 2A-2C are network diagrams illustrating additional examples of Diameter network management in an exemplary communications network according to embodiments of the subject matter described herein. Except as  
15 disclosed herein, the exemplary network of Figures 2A-2C is essentially the same as the network described in reference to Figures 1A-1C.

In the embodiments illustrated in Figures 2A-2C, the exemplary network includes realms **200A-B**. Realms **200A-B** may be entities that include one or more Diameter nodes. In one embodiment, realms **200A-B**  
20 may include a cluster including Diameter nodes, a network segment including Diameter nodes, a domain including Diameter nodes, a subnet including Diameter nodes, an address space including Diameter nodes, a geographical location including Diameter nodes, a logical location including Diameter nodes, a logical group including Diameter nodes, or a physical  
25 group including Diameter nodes.

DSRs **102** may be associated with realms **200A-B**. For example, as illustrated in Figure 2A-2C, links may connect DSR **102C** and realms **200A-B** and different Diameter connections and/or links may connect DSR **102D** and realms **200A-B**. Using these connections, DSR **102C** and DSR **102D**  
30 may communicate Diameter messages towards nodes of realms **200A-B**.

Referring to the embodiment illustrated in Figure 2A, DSR **102C** may provide Diameter network management information indicating realms **200A-B** are unreachable. In one embodiment, DSR **102C** may determine that a

Diameter message cannot be communicated to realms **200A-B**. For example, using one or more methods (e.g., timers, heartbeat packets and/or link probes), DSR **102C** may detect or determine that realms **200A-B** are currently unreachable via DSR **102C**.

5           In one embodiment, in response to determining that realms **200A-B** are currently unreachable, DSR **102C** may generate a DNMM. The DNMM may include information indicating that realms **200A-B** and/or nodes of realms **200A-B** are unreachable via DSR **102C**. For example, DSR **102C** may generate a Diameter transfer cluster prohibited (DTCP) message **202**  
10           indicating that a Diameter message cannot be communicated to realms **200A-B** and/or nodes of realms **200A-B** via DSR **102C**. In another embodiment, DSR **102C** may generate DTCP message **202** in response to receiving a Diameter request message (e.g., a Diameter cluster route set test (DCRST) message).

15           DSR **102C** may send or initiate sending DNMMs to one or more nodes. In one embodiment, a peer DSR **102A** may receive the DNMM. In response to receiving the DNMM, peer DSR **102A** may determine a different path for sending Diameter messages to realm **200A** or realm **200B** and may send the Diameter messages via a different path. For example, as  
20           illustrated in Figure 2A, DSR **102C** may send a DTCP message **202** to peer nodes, such as DSR **102A**, **102B**, and **102D**. In response, the peer nodes (e.g., DSR **102A**, **102B**, and **102D**) may configure Diameter message routing or relaying information so as to steer Diameter message traffic destined for realm **200A** or realm **200B** generally away from DSR **102C**. For  
25           instance, after receiving the DTCP message, Diameter message traffic destined for realm **200B** may be relayed via DSR **102D**.

          Referring to the embodiment illustrated in Figure 2B, after receiving a DNMM indicating that realms **200A-B** are unreachable via DSR **102C**, DSR **102A** may periodically or aperiodically poll DSR **102C** with a DNMM  
30           requesting information regarding whether DSR **102C** is able to reach realms **200A-B**. For example, as illustrated in Figure 1B, DSR **102A** may generate a Diameter cluster route set test (DCRST) message **204** requesting information regarding route availability status for reaching realms **200A-B** via

DSR **102C**. DSR **102A** may send DCRST message **204** towards DSR **102C**.

DSR **102C** may receive DCRST message **204** or another Diameter request message and may indicate route availability status of realms **200A-B** via DSR **102C**. In one embodiment, indicating route availability status may include providing no response. For example, as illustrated in Figure 2B, no answer from DSR **102C** (represented by box **206**) may indicate that DSR **102C** is still unable to reach realms **200A-B**. In another embodiment, indicating route availability status may include providing a response. For example, DSR **102C** may respond to DCRST message **204** with a message indicating route availability status. For instance, a response message may indicate that DSR **102C** is able to reach realms **200A-B**. In another instance, a response message may indicate that DSR **102C** is unable to reach realms **200A-B**.

Referring to the embodiment illustrated in Figure 2C, DSR **102C** may determine that a Diameter message can be communicated to realms **200A-B**. For example, a network operator may repair a Diameter connection or link failure between each realm **200** and DSR **102C**. After the repair, using one or more methods (e.g., timers, heartbeat packets and/or link probes), DSR **102C** may detect or determine that realms **200A-B** are currently reachable via DSR **102C**.

In one embodiment, in response to determining that realms **200A-B** are currently reachable, DSR **102C** may generate a DNMM. The DNMM may include information indicating that realms **200A-B** and/or nodes **100** of realms **200A-B** are reachable via DSR **102C**. For example, as illustrated in Figure 2C, in response to route availability status information changing (e.g., realms **200A-B** becoming reachable), DSR **102C** may generate a Diameter transfer cluster allowed (DTCA) message **208** indicating that a Diameter message can be communicated to realms **200A-B** and/or nodes of realms **200A-B** via DSR **102C**. In another embodiment, DSR **102C** may generate DTCA message **208** in response to receiving a Diameter request message (e.g., a DCRST message).

DSR **102C** may send or initiate sending DNMMs to one or more nodes. In one embodiment, peer DSR **102A** may receive the DNMM. In response to receiving the DNMM, peer DSR **102A** may send Diameter messages to realm **200A** or realm **200B** via DSR **102C**. For example, as  
5 illustrated in Figure 2C, DSR **102C** may send a DTCA message **208** to peer nodes, such as DSRs **102A**, **102B**, and **102D**. In response, the peer nodes (e.g., DSR **102A**, **102B**, and **102D**) may configure Diameter message routing or relaying information so as to steer Diameter message traffic destined for realm **200A** or realm **200B** to DSR **102C**. For example, after  
10 receiving DTCA message **208**, Diameter message traffic destined for realm **200B** may be steered to DSR **102C**.

Figures 3A-3C are network diagrams illustrating further examples of Diameter network management in an exemplary communications network according to embodiments of the subject matter described herein. Except as  
15 disclosed herein, the exemplary communications network of Figures 3A-3C is essentially the same as the network described in reference to Figures 1A-2C.

Referring to the embodiment illustrated in Figure 3A, DSR **102C** may provide Diameter network management information indicating realm **200A** is  
20 unreachable. In one embodiment, DSR **102C** may determine that Diameter messages cannot be communicated to realm **200A** via DSR **102C**. For example, using response timers and/or other methods (e.g., timers, heartbeat packets and/or link probes), DSR **102C** may detect or determine that realm **200A** is currently unreachable via DSR **102C**.

In one embodiment, in response to determining that realm **200A** is  
25 currently unreachable, DSR **102C** may generate a DNMM. The DNMM may include information indicating that realm **200A** and/or particular nodes **100** of realm **200A** are unreachable via DSR **102C**. For example, DSR **102C** may generate a Diameter transfer cluster prohibited (DTCP) message **202**  
30 indicating that a Diameter message cannot be communicated to realm **200A** via DSR **102C**. In another embodiment, DSR **102C** may generate DTCP message **202** in response to receiving a Diameter request message (e.g., a Diameter cluster route set test (DCRST) message).

DSR **102C** may send or initiate sending the DNMMs to one or more Diameter nodes. In one embodiment, peer DSR **102A** may receive the DNMM. In response to receiving the DNMM, peer DSR **102A** may determine a different path for sending Diameter messages to realm **200A** and may send the Diameter messages towards realm **200A** via a different path. For example, as illustrated in Figure 3A, DSR **102C** may send DTCP messages **202** to peer DSRs, such as DSR **102A**, **102B**, and **102D**. In response, the peer DSRs (e.g., DSR **102A**, **102B**, and **102D**) may configure Diameter message routing or relaying information so as to steer Diameter message traffic destined for realm **200A** generally away from DSR **102C**. For instance, after receiving the DTFP message, Diameter message traffic destined for realm **200A** may be relayed via DSR **102D**.

Referring to the embodiment illustrated in Figure 3B, after receiving a DNMM indicating that realm **200A** is unreachable via DSR **102C**, DSR **102A** may periodically or aperiodically poll DSR **102C** with a DNMM requesting information regarding whether DSR **102C** is able to reach realm **200A**. For example, as illustrated in Figure 1B, DSR **102A** may generate a DCRST message **204** requesting information regarding route availability status for reaching realm **200A** via DSR **102C**. DSR **102A** may send DCRST message **204** towards DSR **102C**.

DSR **102C** may receive DCRST message **204** or another Diameter request message and may indicate route availability status of realm **200A** via DSR **102C**. In one embodiment, indicating route availability status may include providing no response. For example, as illustrated in Figure 3B, no answer from DSR **102C** (represented by box **206**) may indicate that DSR **102C** is still unable to reach realm **200A**. In another embodiment, indicating route availability status may include providing a response. For example, DSR **102C** may respond to DCRST message **204** with a message indicating route availability status. For instance, a response message may indicate that that DSR **102C** is able to reach realm **200A**. In another instance, a response message may indicate that that DSR **102C** is unable to reach realm **200A**.

Referring to the embodiment illustrated in Figure 3C, DSR **102C** may determine that a Diameter message can be communicated to realm **200A** via DSR **102C**. For example, a network operator may repair a failed Diameter connection or link between realm **200A** and DSR **102C**. After the  
5 repair, using one or more methods (e.g., timers, heartbeat packets and/or link probes), DSR **102C** may detect or determine that realm **200A** is currently reachable via DSR **102C**.

In one embodiment, in response to determining that realm **200A** is currently reachable, DSR **102C** may generate a DNMM. The DNMM may  
10 include information indicating that realm **200A** and/or particular nodes **100** of realm **200A** are reachable via DSR **102C**. For example, as illustrated in Figure 2C, in response to route availability status information changing (e.g., realm **200A** becoming reachable), DSR **102C** may generate a Diameter transfer cluster allowed (DTCA) message **208** indicating that a Diameter  
15 message can be communicated to realm **200A** and/or particular nodes **100** of realm **200A** via DSR **102C**. In another embodiment, DSR **102C** may generate DTCA message **208** in response to receiving a Diameter request message (e.g., a DCRST message).

DSR **102C** may send or initiate sending the DNMMs to one or more  
20 nodes. In one embodiment, peer DSR **102A** may receive the DNMM. In response to receiving the DNMM, the peer DSR may send Diameter messages towards realm **200A** via DSR **102C**. For example, as illustrated in Figure 3C, DSR **102C** may send a DTCA message **208** towards peer DSRs, such as DSR **102A**, **102B**, and **102D**. In response, the peer DSRs (e.g.,  
25 DSR **102A**, **102B**, and **102D**) may configure Diameter message routing or relaying information so as to steer Diameter message traffic destined for realm **200A** to DSR **102C**. For example, after receiving DTCA message **208**, Diameter message traffic destined for realm **200A** may be steered to DSR **102C**.

30 Figure 4 is a message flow diagram illustrating a Diameter network management information broadcast according to an embodiment of the subject matter described herein. In the embodiment illustrated in Figure 4, Diameter peer node **400** and Diameter peer node **402** may be connected for

communicating messages. For example, Diameter peer node **400** and Diameter peer node **402** may be capable of exchanging messages without using a DSR **102** as an intermediate.

DSR **102** may include or have access to a rules database **404**. Rules database **404** may include any suitable data structure for storing or maintaining network management rules. For example, rules database **404** may include information for generating and/or providing network management information, e.g., DTFP messages, DTFA messages, DTCP messages, DTCA messages, DRST messages, and DCRST messages.

Diameter node **100** represents a node capable of implementing or using a Diameter protocol. For example, Diameter node **100** may be an HSS for providing authorization and authentication for subscribers.

Referring to the embodiment illustrated in Figure 4, at step 1, a Diameter request message destined for Diameter node **100** may be sent to DSR **102** from Diameter peer node **400**. After receiving the Diameter request message, DSR **102** may determine information for relaying or routing the Diameter request message to Diameter node **100**. For example, DSR **102** may determine that Diameter node **100** is reachable. The Diameter request message may be sent from DSR **102** to Diameter node **100**.

The Diameter request message may be received at Diameter node **100**. Diameter node **100** may examine message and determine that it unable to perform request. For example, the Diameter request message may be for a particular Diameter application or subsystem, such as an Diameter authentication application. In this example, Diameter node **100**, or a Diameter application executing at Diameter node **100**, may not have available resources to handle the request. In another example, Diameter node **100** may not include an appropriate Diameter application or subsystem to handle the Diameter request message. Diameter node **100** may generate a Diameter response message indicating that an error has occurred, e.g., message may include an error code or other information.

At step 2, a Diameter response message including an error code may be sent from Diameter node **100** to DSR **102**. The Diameter response

message may be received at DSR **102**. DSR **102** may examine or analyze the Diameter response message. In one embodiment, DSR **102** may use rules database **404** in analyzing the Diameter response message. Using information from rules database **404** and information from the Diameter response message (e.g., an error code), DSR **102** may generate a DNMM. The DNMM may include the error code from the Diameter response message and/or information for indicating that Diameter node **100** is unable to handle particular Diameter request messages. In one embodiment, after generating the DNMM, the Diameter response message including the error code may be sent from DSR **102** towards Diameter peer node **400**. In another embodiment, the Diameter response message including the error code may be sent before a DNMM is generated.

At step 3, the generated DNMM may be sent from DSR **102** to one or more Diameter nodes, such as Diameter peer node **402**. Diameter peer node **400** and Diameter peer node **402** may receive the respective messages and may use the messages for making subsequent decisions. For example, Diameter node **402** may use the information from the DNMM and may send Diameter request messages towards a different Diameter node other than Diameter node **100**. Similarly, Diameter node **400** may use the information from the Diameter response message and may send Diameter request messages towards a different Diameter node other than Diameter node **100**.

Figure 5 is a message flow diagram illustrating a Diameter network management broadcast according to another embodiment of the subject matter described herein. Except as disclosed herein, nodes depicted in Figure 5 is essentially the same as described in reference to Figure 4.

Referring to the embodiment illustrated in Figure 5, at step 1, a Diameter request message destined for Diameter node **100** may be sent to DSR **102** from Diameter peer node **400**. After receiving the Diameter request message, DSR **102** may determine information for relaying or routing the Diameter request message towards Diameter node **100**. For example, DSR **102** may determine that Diameter node **100** is reachable.

The Diameter request message may be sent from DSR **102** towards Diameter node **100**.

In one embodiment, DSR **102** may initiate a response timer. The response timer may be used for triggering actions in response to an amount  
5 of time elapsing. For example, rules database **404** may include preconfigured time amounts for receiving a response to particular Diameter request messages. If the response timer expires before a corresponding response message is received, DSR **102** may perform one or more actions, e.g., send or broadcast a DNMM to other nodes (e.g., Diameters **100**). The  
10 DNMM may include information indicating an error and/or information for indicating that Diameter node **100** is unable to handle particular Diameter request messages.

In one embodiment, DSR **102** may generate a Diameter Watchdog Request (DWR) message (e.g., Diameter message code 280) in response to  
15 failing to observe or detect Diameter communications with Diameter node **100** within a predetermined period of time. The DWR message may be communicated from DSR **102** to Diameter node **100**. Failure to receive an associated Diameter Watchdog Answer (DWA) message from Diameter node **100** within a predetermined timeout period may be used to confirm that  
20 a network management issue exists. DSR **102** may use this information in generating DNMMs or other Diameter network management information. DSR **102** may communicate the Diameter network management information to various destinations, e.g., other Diameter nodes (e.g., peer DSR **102**) in the communications network and/or internal Diameter message processors  
25 associated with DSR **102**.

In one embodiment, where an associated DWA message is received from Diameter node **100**, DSR **102** may examine the DWA message and extract message information, e.g., error information stored in one or more AVPs in the message, such as information in an error-message AVP, a  
30 failed AVP, an Origin\_State\_ID AVP, et cetera. DSR **102** may use this information in generating DNMMs or other Diameter network management information. DSR **102** may communicate the Diameter network management information to various destinations.

At step 3, the generated DNMM may be sent from DSR **102** to one or more nodes, such as Diameter peer node **400** and Diameter peer node **402**. Diameter peer node **400** and Diameter peer node **402** may receive the DNMM and may use the messages for making subsequent decisions. For example, Diameter node **402** may use the information from the DNMM and may send Diameter request messages towards a different Diameter node other than Diameter node **100**.

Figure 6 is block diagram illustrating an exemplary DSR **102** for providing Diameter network management information according to an embodiment of the subject matter described herein.

Referring to the embodiment illustrated in Figure 6, DSR **102A** includes one or more message processors (MPs) **600A-D** for sending, receiving, and/or processing various messages, such as Diameter messages. MPs **600A-D** may include one or more communications interfaces for communicating signaling messages (e.g., Diameter messages and DNMMs) and/or inter-MP messages. For example, MPs **600A-D** may send and receive Diameter request messages between external entities, e.g., Diameter node **100A** and Diameter node **100B**. MPs **600A-D** may also send and receive messages (e.g., Diameter messages and other non-Diameter messages) between internal entities. For example, MP **600A** may screen a Diameter message and relay it to MP **600C** for further processing.

MPs **600A-D** may include or have access to one or more network management (NM) modules, e.g., NM modules **602A-D**. NM module **602A-D** may include any functionality described herein associated with determining, generating, and/or providing Diameter NM information. In one embodiment, NM modules **602A-D** may perform one or more steps for answer-based NM broadcasting. For example, NM module **602D** may determine or initiate determining whether a node or a group of nodes (e.g., a realm) is reachable via DSR **102C**. For instance, NM module **602D** may use response timers for determining whether a response to a request message is received in a timely manner. NM module **602D** may also generate or initiate generating a DNMM. The DNMM may include NM information, such as node availability information, Diameter application availability information,

path availability information, and congestion information. NM module **602D** may also send or initiate sending DNMMs towards various entities, e.g., MPs **600A-C**, Diameter nodes **100A**, DSR **102B**, DSR **102C**, and DSR **102D**.

5 In one embodiment, MPs **600A-D** and NM modules **602A-D** may include functionality for handling particular messages. For example, NM module **602A** at MP **600A** may handle communications with Diameter node **100A** and NM module **602D** at MP **600D** may handle communications with Diameter node **100B**.

10 MPs **600A-D** and/or NM modules **602A-B** may include or have access to one or more databases, such as NM rules databases **404A-D**. NM rules databases **404A-D** may include any suitable data structure for storing or maintaining information usable for determining when to provide NM information and rules for determining which entities receive the NM information. In one embodiment, rules database **404** or another database  
15 may store Diameter NM information for various nodes and/or realms, e.g., congestion information and path availability status.

In one embodiment where a DSR **102** includes multiple processors (e.g., a distributed architecture), each processor (e.g., an MP **600**) may be capable of providing Diameter NM. For example, MPs **600A-D** may provide  
20 DNMMs between each other. In another example, MP **600A** may provide DNMMs to particular entities (e.g., Diameter node **100A**) and/or locations (e.g., Realm **200A**) and MP **600B** may provide DNMMs to other entities (e.g., Diameter node **100B**) and/or locations (e.g., Realm **200B**).

25 Figure 7 is a flow chart illustrating exemplary steps for providing according to an embodiment of the subject matter described herein. In one embodiment, one or more exemplary steps described herein may be performed at or performed by DSR **102**. In another embodiment, one or more exemplary steps described herein may be performed at or performed by a NM module located at various nodes, e.g., Diameter node **100B**.

30 Referring to the embodiment illustrated in Figure 7, at step **700** a DSR determines whether successful Diameter communications are available with a first Diameter application. For example, as illustrated in Figure 1A, DSR **102C** may determine that Diameter node **100B** is unreachable via DSR

**102C** and that communications with a Diameter application executing at Diameter node **100B** are unavailable.

At step **702**, in response to determining that successful Diameter communications are not available with a first Diameter application, the DSR  
5 generates a first Diameter network management message (DNMM) indicating that successful Diameter communications are not available with the first Diameter application. For example, as illustrated in Figure 1A, DSR **102C** may generate a DTFP message **104** indicating that a Diameter node **100B** is unreachable via DSR **102C** and/or indicating that communications  
10 with a Diameter application executing at Diameter node **100B** are unavailable.

In one embodiment, a DNMM may include global Diameter network management information or a portion thereof. For example, a DNMM may indicate availability status for all Diameter applications, nodes **100**, and/or  
15 realms **200** associated with a communications network. In another example, a DNMM may indicate availability status for all Diameter applications, nodes **100**, and/or realms **200** associated a DSR **102**. In yet another example, a DNMM may indicate availability status for particular Diameter applications, nodes **100** and/or particular realms **200** associated a DSR **102**.

20 In one embodiment, a DNMM may be a DTFP message, a DTFA message, a DRST message, a DCTP message, a DTCA message, and a DCRST message.

At step **704**, the first DNMM may be sent to a second Diameter node associated with the DSR. For example, as illustrated in Figure 1A, DSR  
25 **102C** may send a DTFP message **104** towards peer DSRs, such as DSR **102A**, **102B**, and **102D**. In response, the peer DSRs (e.g., DSR **102A**, **102B**, and **102D**) may configure Diameter message routing or relaying information so as to steer Diameter message traffic destined for the Diameter application executing at Diameter node **100B** generally away from  
30 DSR **102C**.

While various network management functionality is disclosed above in relation to particular DSRs **102** (e.g., DSR **102A** and DSR **102C** of Figures 1A-3C), it will be understood that such functionality is illustrative and that a

given DSR **102** (e.g., DSR **102B** and DSR **102D** of Figures 1A-3C) or other appropriate Diameter node may include similar, different, and/or additional functionality.

5 It will be understood that various details of the subject matter described herein may be changed without departing from the scope of the subject matter described herein. Furthermore, the foregoing description is for the purpose of illustration only, and not for the purpose of limitation.

## CLAIMS

What is claimed is:

1. A method for providing Diameter network management information in a communications network, the method comprising:  
5 at a Diameter signaling router (DSR):
  - determining whether successful Diameter communications are available with a first Diameter application;
  - in response to determining that successful Diameter communication are not available with the first Diameter application, generating a first Diameter network management message (DNMM)  
10 indicating that successful Diameter communications are not available with the first Diameter application; and
  - sending the first DNMM to a second Diameter node.
2. The method of claim 1 wherein determining whether successful  
15 Diameter communications are available with the first Diameter application includes sending a Diameter request message to the first Diameter application and determining that successful Diameter communications are not available with the first Diameter application in response to receiving a response message indicating an error or  
20 communications issue.
3. The method of claim 1 wherein determining whether successful Diameter communications are available with the first Diameter application includes sending a Diameter request message to the first Diameter application and determining that successful communications  
25 with the first Diameter application are not available in response to failing to receive, at the DSR, a response in a predetermined amount of time.
4. The method of claim 3 wherein a Diameter request message is a Diameter watchdog request (DWR) message.
- 30 5. The method of claim 1 comprising:
  - at the second Diameter node:
    - receiving the first DNMM;

- in response to receiving the first DNMM, generating a Diameter network management request message requesting information regarding availability status of the first Diameter application via the DSR; and
- 5            sending the Diameter network management request message to the DSR.
6.    The method of claim 1 comprising:  
at the second Diameter node:  
          receiving the first DNMM; and
- 10            in response to receiving the first DNMM, determining a different path for sending a Diameter message towards the first Diameter application and sending the Diameter message to the first Diameter application via a different path.
7.    The method of claim 5 comprising:  
15            at the DSR:  
          receiving the Diameter network management request message; and  
          in response to receiving the Diameter network management request message, indicating to the second Diameter node availability status of the first Diameter application via the DSR.
- 20            8.    The method of claim 7 wherein indicating to the second Diameter node availability status of the first Diameter application via the DSR includes one of providing no response indicating that availability status has not changed, providing a response, providing a response indicating that a Diameter message cannot be communicated to the first Diameter application via the DSR, and providing a response indicating that a Diameter message can be communicated to the first Diameter application via the DSR.
- 25            9.    The method of claim 1 wherein the DSR comprises a Diameter relay agent, a Diameter redirect agent, a Diameter translation agent, or a Diameter proxy agent and wherein the first and second Diameter nodes each comprise a mobility management entity (MME), a home subscriber server (HSS) and/or authentication, authorization, and
- 30

- accounting (AAA) server, a Bearer Binding and Event Reporting Function (BBERF), a serving gateway (SGW), a packet data network gateway (PDN GW), a policy charging enforcement function (PCEF), a policy charging and rules function (PCRF), a subscriber profile repository (SPR), a Diameter peer node, a Diameter agent, a network node, a policy engine, a policy server, an application function (AF), an application server, a Diameter signaling agent, a long term evolution (LTE) node, an Internet protocol (IP) multimedia subsystem (IMS) network node, a server, a node, a database, a computing platform, or a second DSR.
- 5
- 10
10. The method of claim 1 comprising:  
at the DSR and after determining that successful Diameter communications are not available with the first Diameter application:  
determining whether successful Diameter communications have become available with the first Diameter application;  
15 in response to determining that successful Diameter communications have become available with the first Diameter application, generating a second DNMM indicating that successful Diameter communications have become available with the first Diameter application; and  
20 sending the second DNMM towards the second Diameter node.
11. The method of claim 1 wherein determining whether successful Diameter communications are available with the first Diameter application includes determining that Diameter messages cannot be communicated to a realm associated with the first Diameter application and wherein the first DNMM indicates that Diameter messages cannot be communicated to the realm via the DSR.
- 25
12. The method of claim 11 comprising:  
30 at the second Diameter node:  
receiving the first DNMM indicating that Diameter message cannot be communicated to the realm via the DSR; and

in response to receiving the first DNMM, determining a different path for sending a Diameter message to the realm and sending the Diameter message to the realm via a different path.

- 5 13. The method of claim 11 wherein the realm comprises one of a cluster including Diameter nodes, a network segment including Diameter nodes, a domain including Diameter nodes, a subnet including Diameter nodes, an address space including Diameter nodes, a geographical location including Diameter nodes, a logical location including Diameter nodes, a logical group including Diameter nodes, or a physical group including Diameter nodes.
- 10 14. The method of claim 1 wherein the first DNMM comprises one of a Diameter transfer prohibited (DTFP) message, a Diameter transfer allowed (DTFA) message, a Diameter route set test (DRST) message, a Diameter transfer cluster prohibited (DTCP) message, a Diameter transfer cluster allowed (DTCA) message, or a Diameter cluster route set test (DCRST) message.
- 15 15. A system for providing Diameter network management information in a communications network, the system comprising:  
a Diameter signaling router (DSR), the DSR comprising:  
20 a Diameter communications interface; and  
a network management module for determining whether successful Diameter communications are available with a first Diameter application, for, in response to determining that successful Diameter communications are not available with the first Diameter application, generating a first Diameter network management message (DNMM) indicating that successful Diameter communications are not available with the first Diameter application, and for sending the first DNMM to a second Diameter node.
- 25 16. The system of claim 15 wherein the network management module determines whether successful Diameter communications are available with the first Diameter application by sending a Diameter request message to the first Diameter application and determines that successful Diameter communications are not available with the first
- 30

- Diameter application in response to receiving a response message indicating an error or communications issue.
17. The system of claim 15 wherein the network management module determines whether successful Diameter communications are available with the first Diameter application by sending a Diameter request message to the first Diameter application and using a response timer for determining whether a corresponding response is received in a predetermined amount of time.
18. The system of claim 17 wherein a Diameter request message is a Diameter watchdog request (DWR) message.
19. The system of claim 15 wherein the network management module receives a Diameter network management request message transmitted by the second Diameter node in response to receiving the first DNMM, and, in response to receiving the Diameter network management request message, indicates to the second Diameter node availability status of the first Diameter application via the DSR.
20. The method of claim 19 wherein indicating to the second Diameter node availability status of the first Diameter application via the DSR includes one of providing no response indicating that availability status has not changed, providing a response, providing a response indicating that a Diameter message cannot be communicated to the first Diameter application via the DSR, and providing a response indicating that a Diameter message can be communicated to the first Diameter application via the DSR.
21. The system of claim 15 wherein the DSR comprises a Diameter relay agent, a Diameter redirect agent, a Diameter translation agent, and a Diameter proxy agent and wherein the first and second Diameter nodes each comprise a mobility management entity (MME), a home subscriber server (HSS) and/or authentication, authorization, and accounting (AAA) server, a Bearer Binding and Event Reporting Function (BBERF), a serving gateway (SGW), a packet data network gateway (PDN GW), a policy charging enforcement function (PCEF), a policy charging and rules function (PCRF), a subscriber profile

- repository (SPR), a Diameter peer node, a Diameter agent, a network node, a policy engine, a policy server, an application function (AF), an application server, a Diameter signaling agent, a long term evolution (LTE) node, an Internet protocol (IP) multimedia subsystem (IMS) network node, a server, a node, a database, a computing platform, or a second DSR.
- 5
22. The system of claim 15 wherein, after determining that successful Diameter communications are not available with the first Diameter application, the network management module determines whether successful Diameter communications have become available with the first Diameter application, and, in response to determining that successful Diameter communications have come available with the first Diameter application, generates a second DNMM indicating that successful Diameter communications have become available with the first Diameter application, and sends the second DNMM to the second Diameter node.
- 10
- 15
23. The system of claim 15 wherein determining whether successful Diameter communications are available with the first Diameter application includes determining whether Diameter messages can be communicated to a realm associated with the first Diameter application and wherein the first DNMM indicates that Diameter messages cannot be communicated to the realm via the DSR.
- 20
24. The system of claim 15 wherein the first DNMM includes a Diameter transfer prohibited (DTFP) message, a Diameter transfer allowed (DTFA) message, a Diameter route set test (DRST) message, a Diameter transfer cluster prohibited (DTCP) message, a Diameter transfer cluster allowed (DTCA) message, or a Diameter cluster route set test (DCRST) message
- 25
25. The system of claim 23 wherein the realm includes a cluster including Diameter nodes, a network segment including Diameter nodes, a domain including Diameter nodes, a subnet including Diameter nodes, an address space including Diameter nodes, a geographical location including Diameter nodes, a logical location including
- 30

Diameter nodes, a logical group including Diameter nodes, or a physical group including Diameter nodes.

26. A non-transitory computer readable medium having stored thereon executable instructions that when executed by the processor of a computer control the computer to perform steps comprising:

5

at a Diameter signaling router (DSR):

determining whether successful Diameter communications are available with a first Diameter application;

10

in response to determining that successful Diameter communications are not available with the first Diameter application, generating a first Diameter network management message (DNMM) indicating that successful Diameter communications are not available with the first Diameter application; and

sending the first DNMM to a second Diameter node.

15

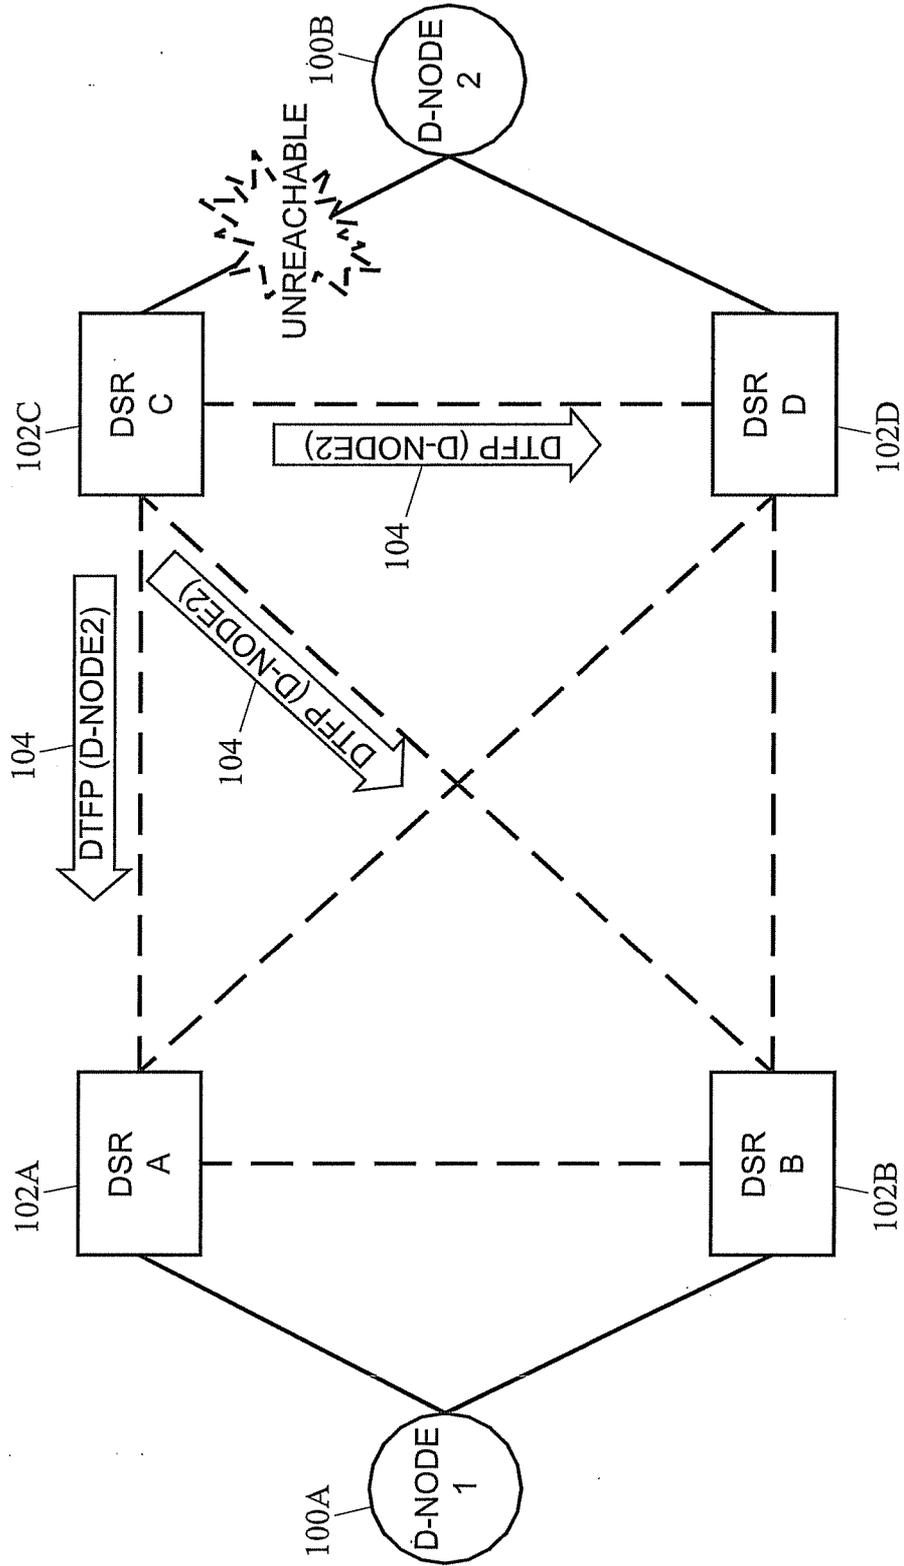


FIG. 1A

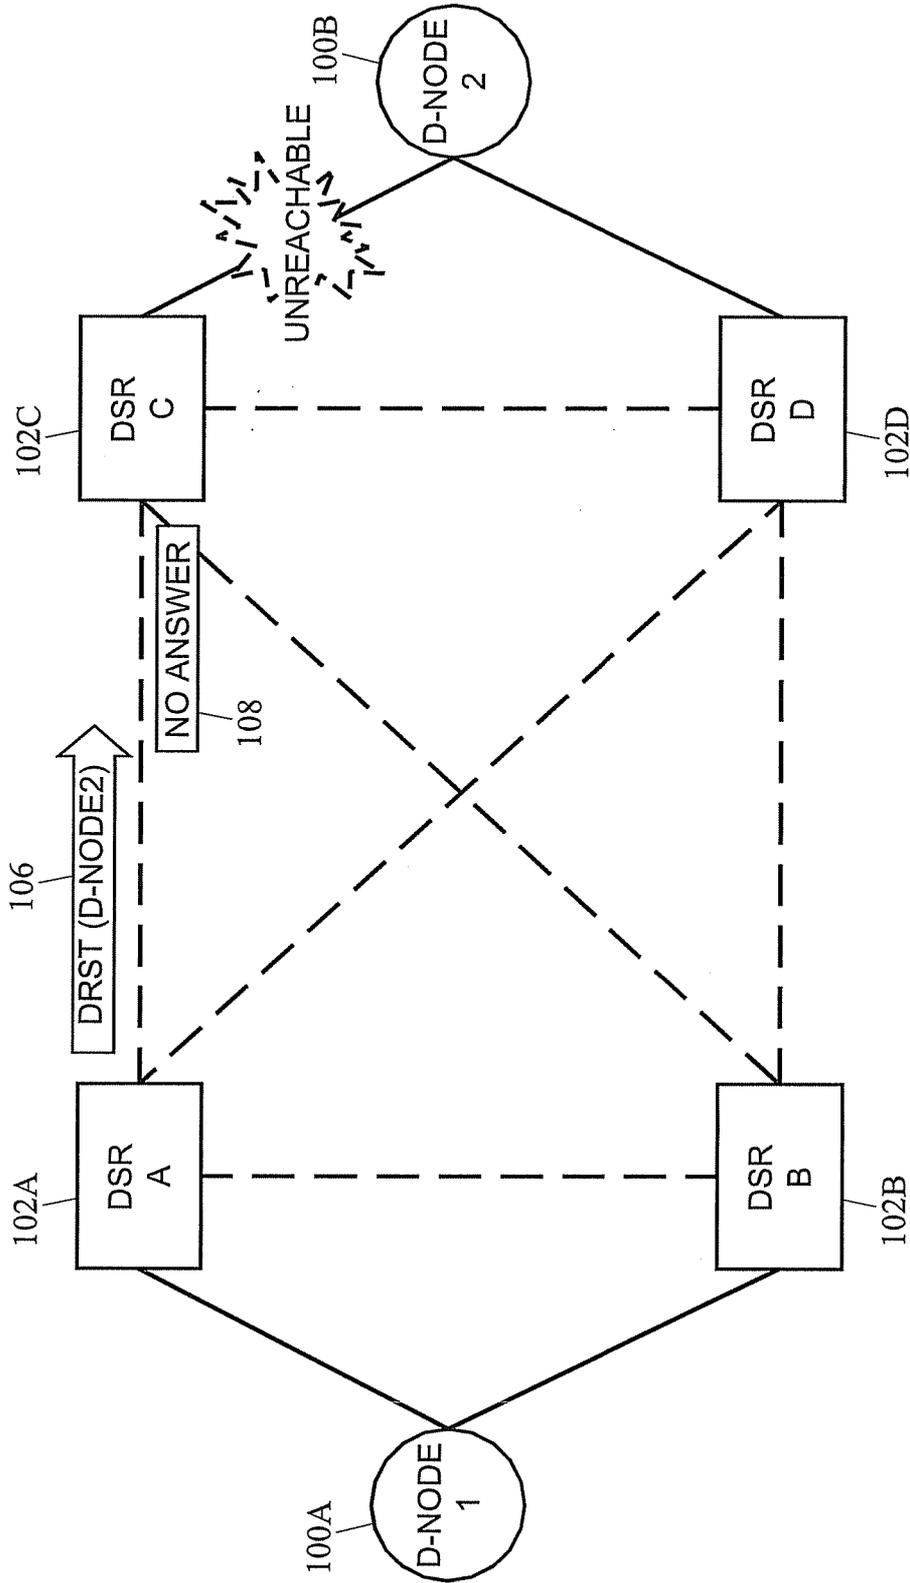


FIG. 1B

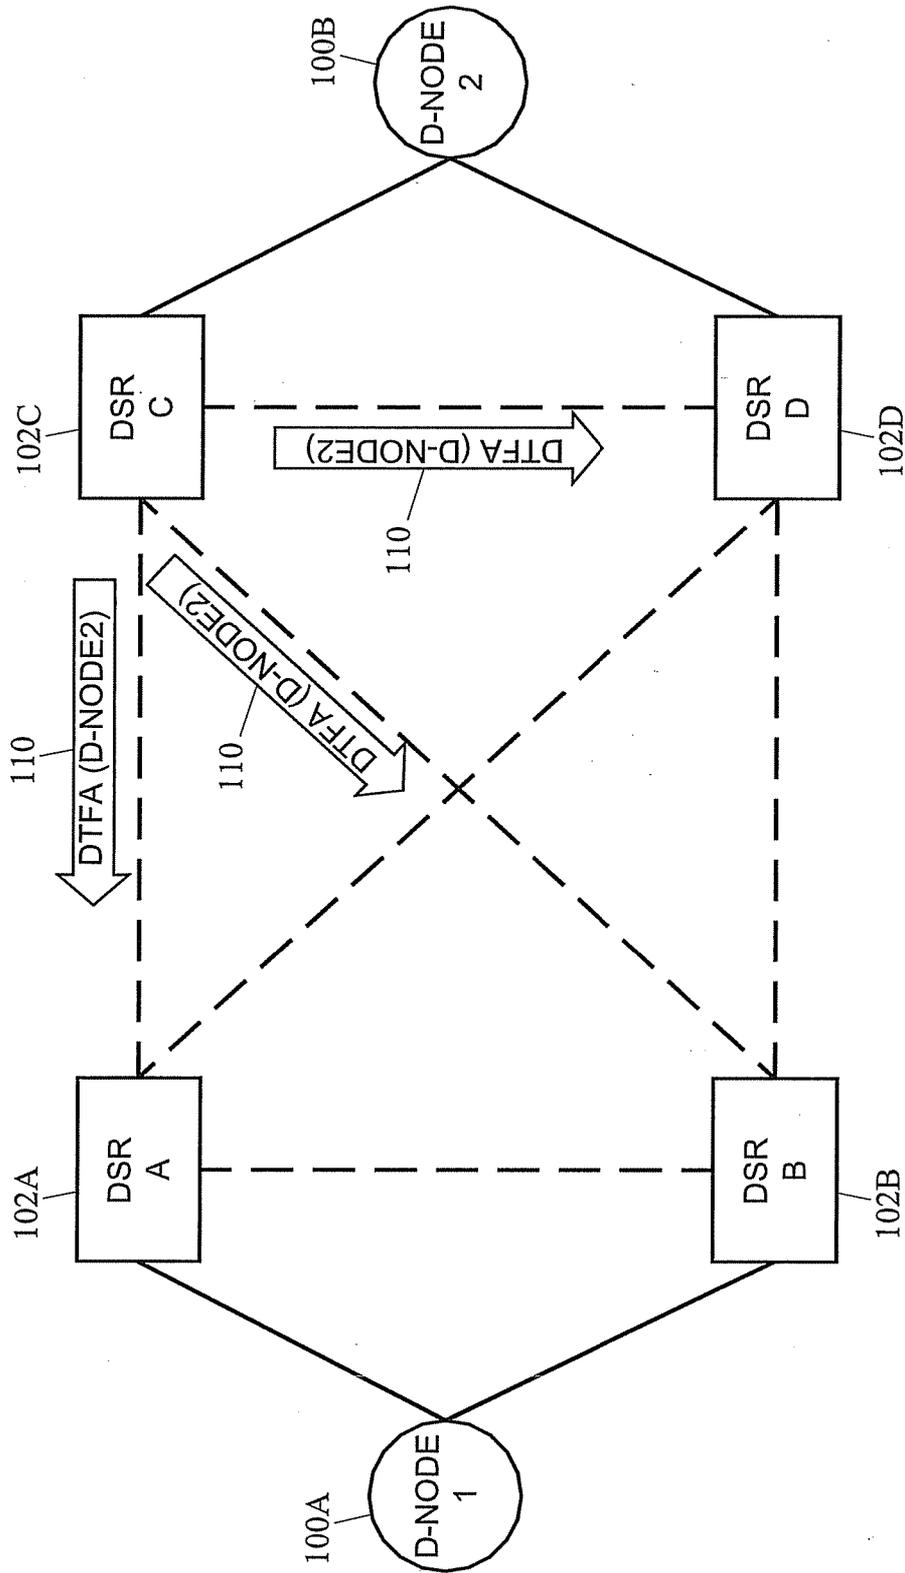


FIG. 1C

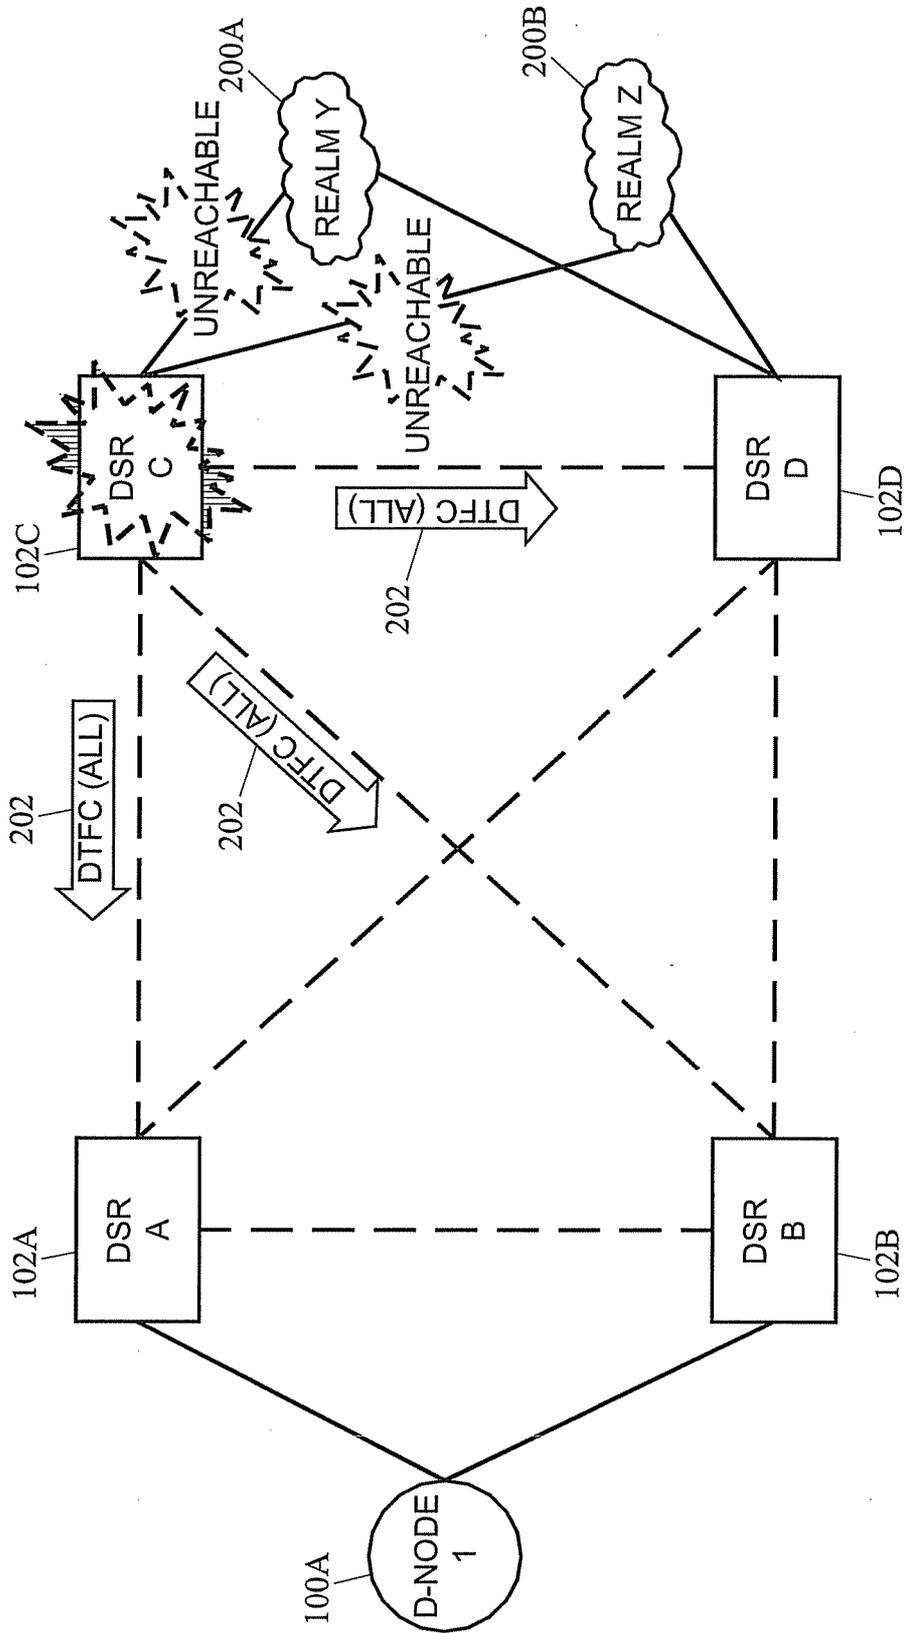


FIG. 2A

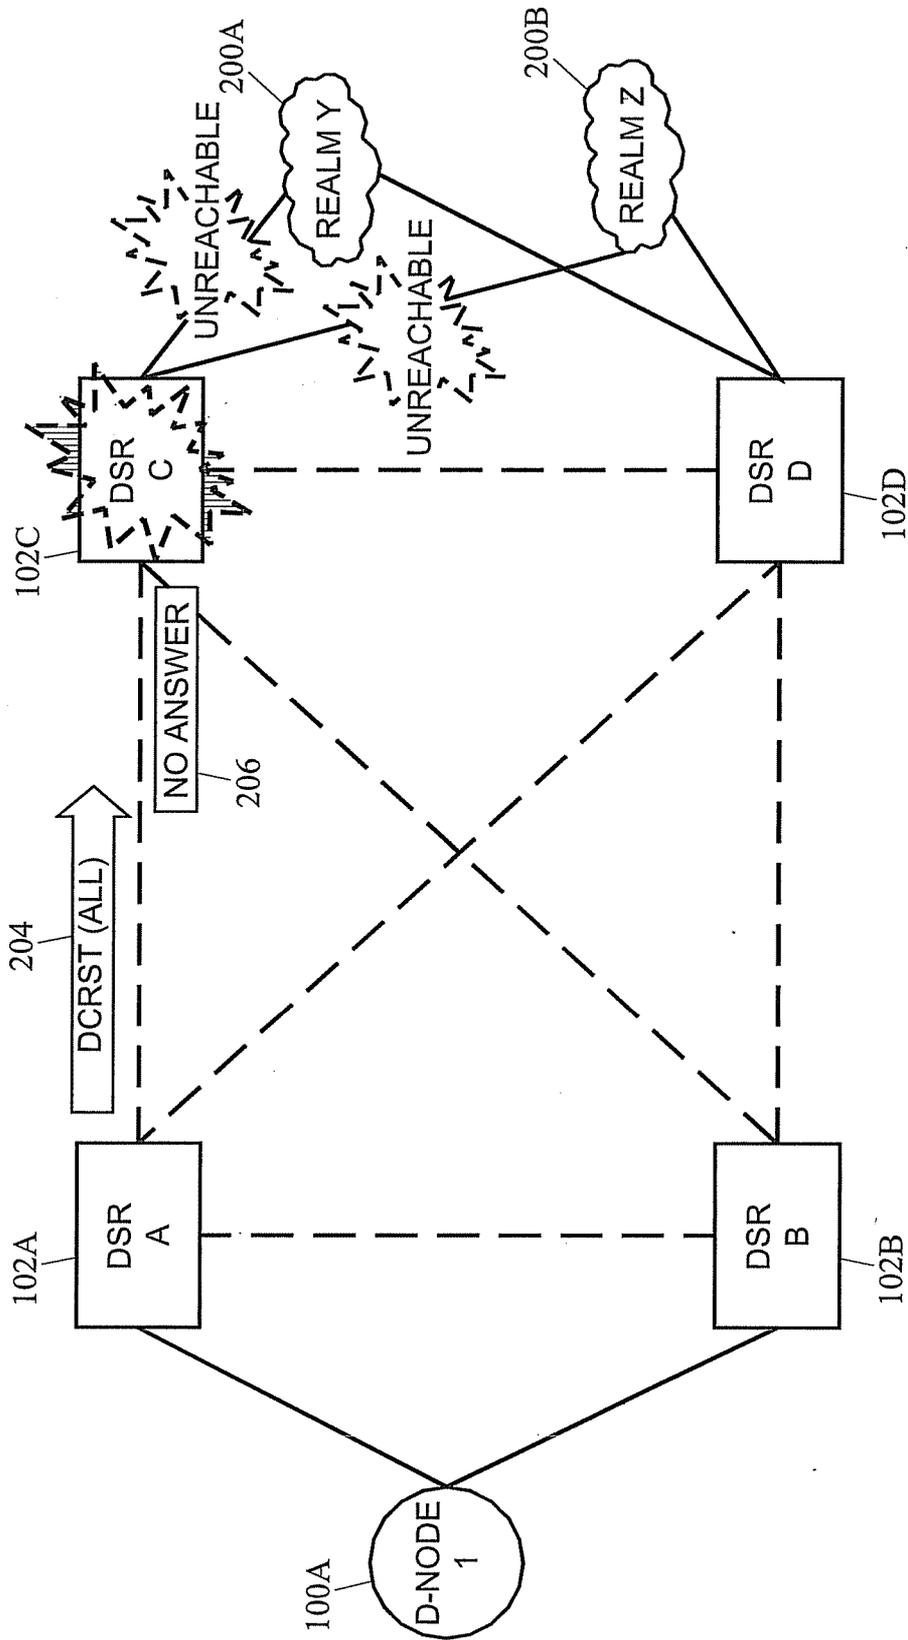


FIG. 2B

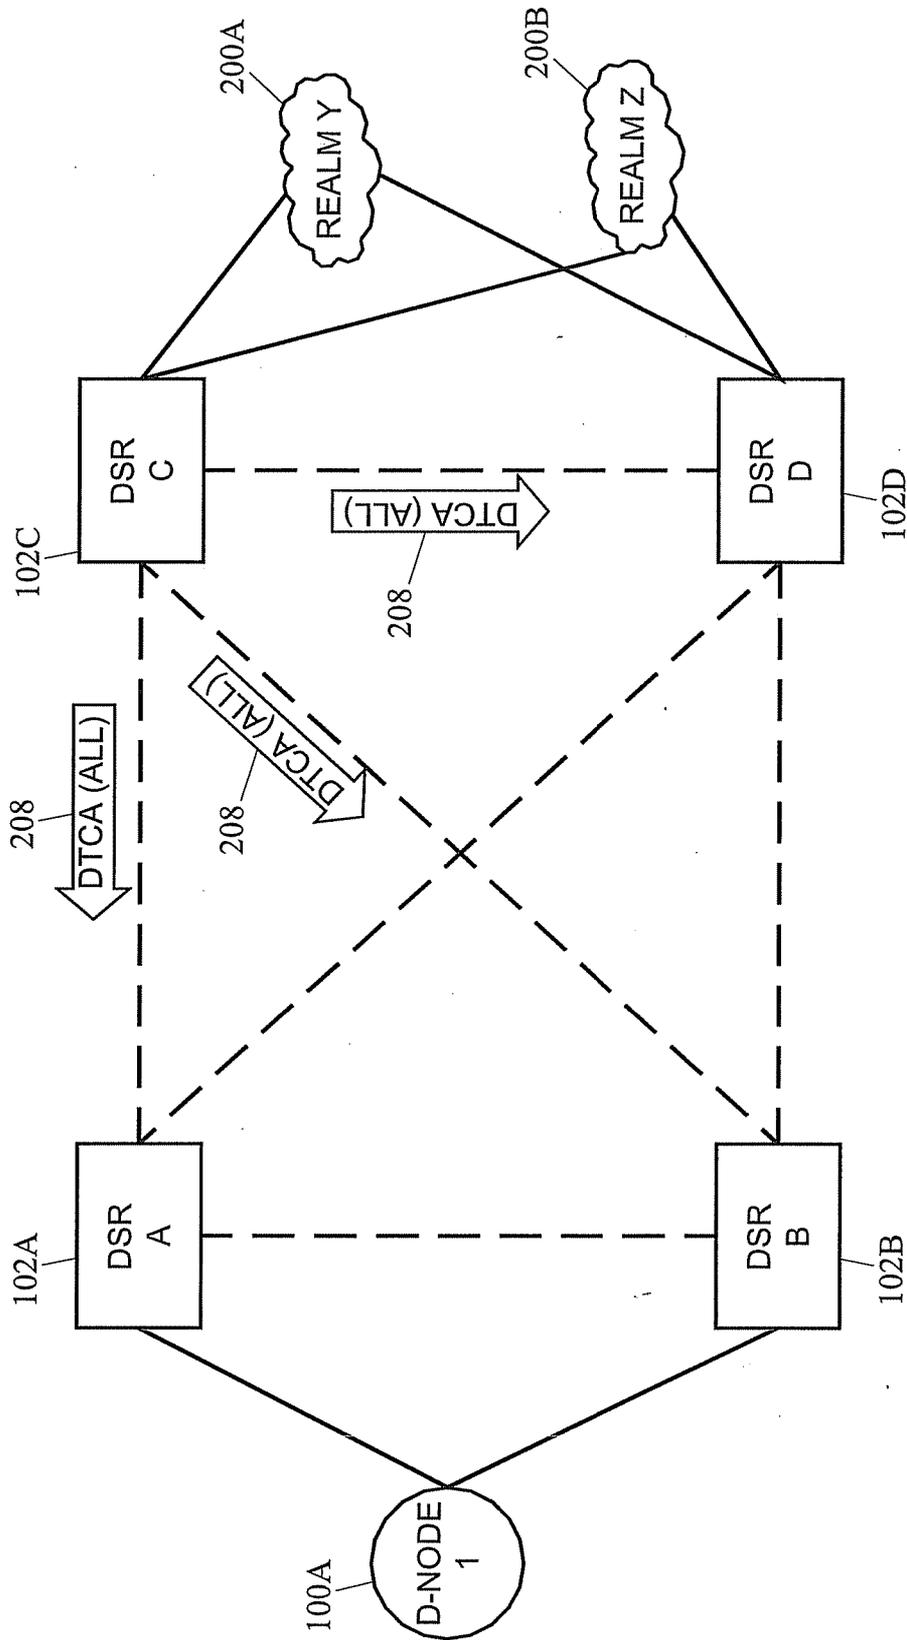


FIG. 2C

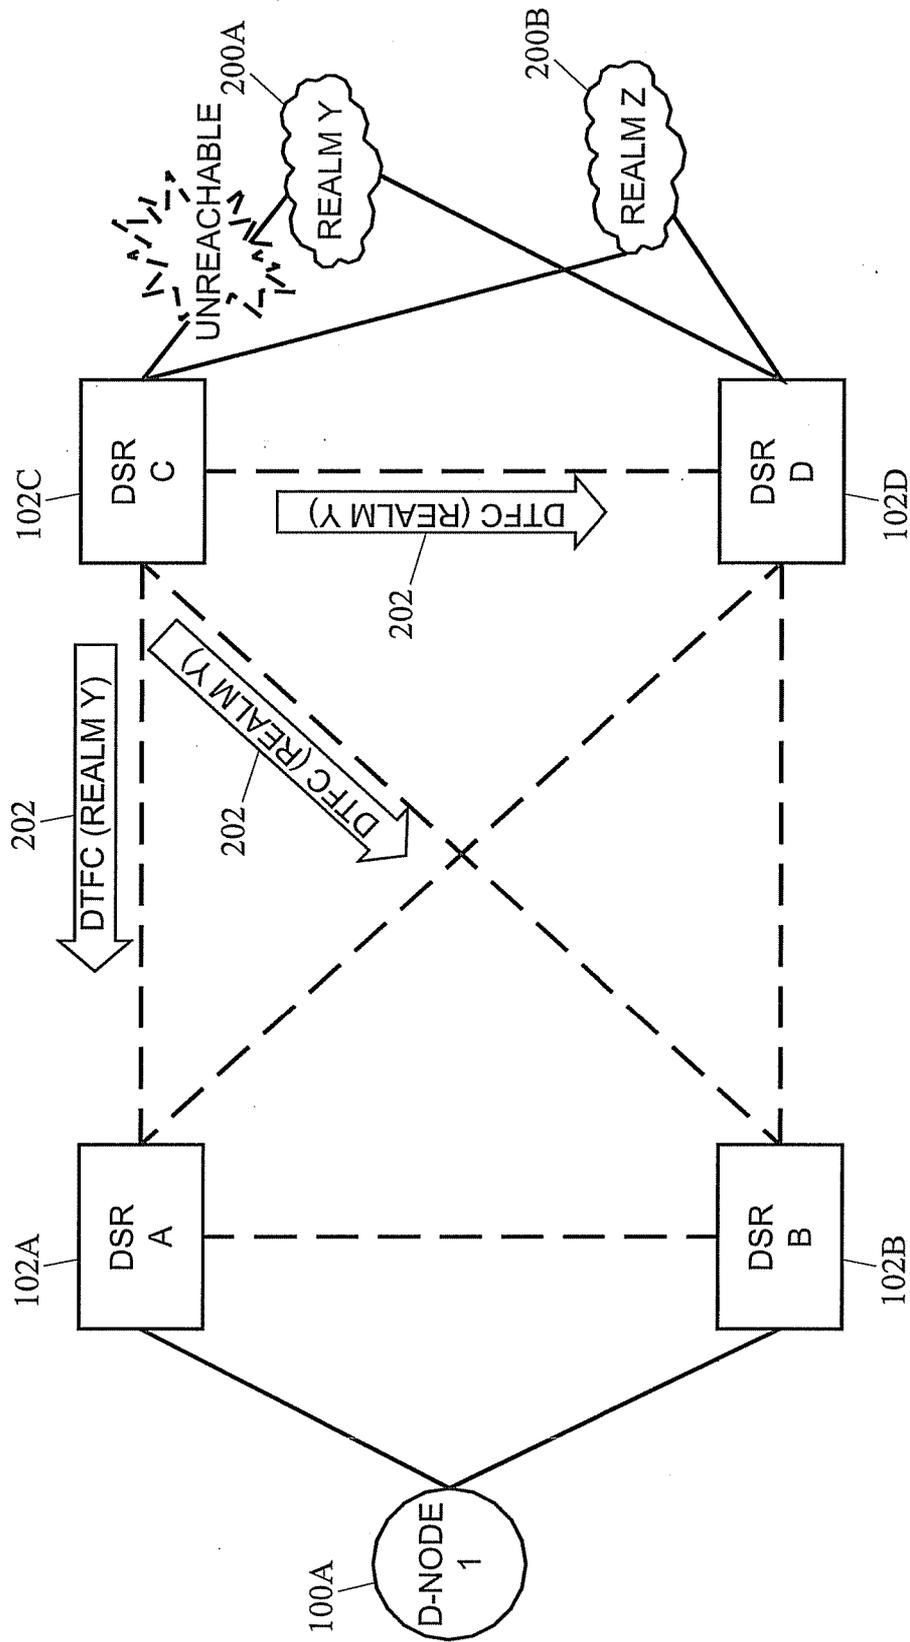


FIG. 3A

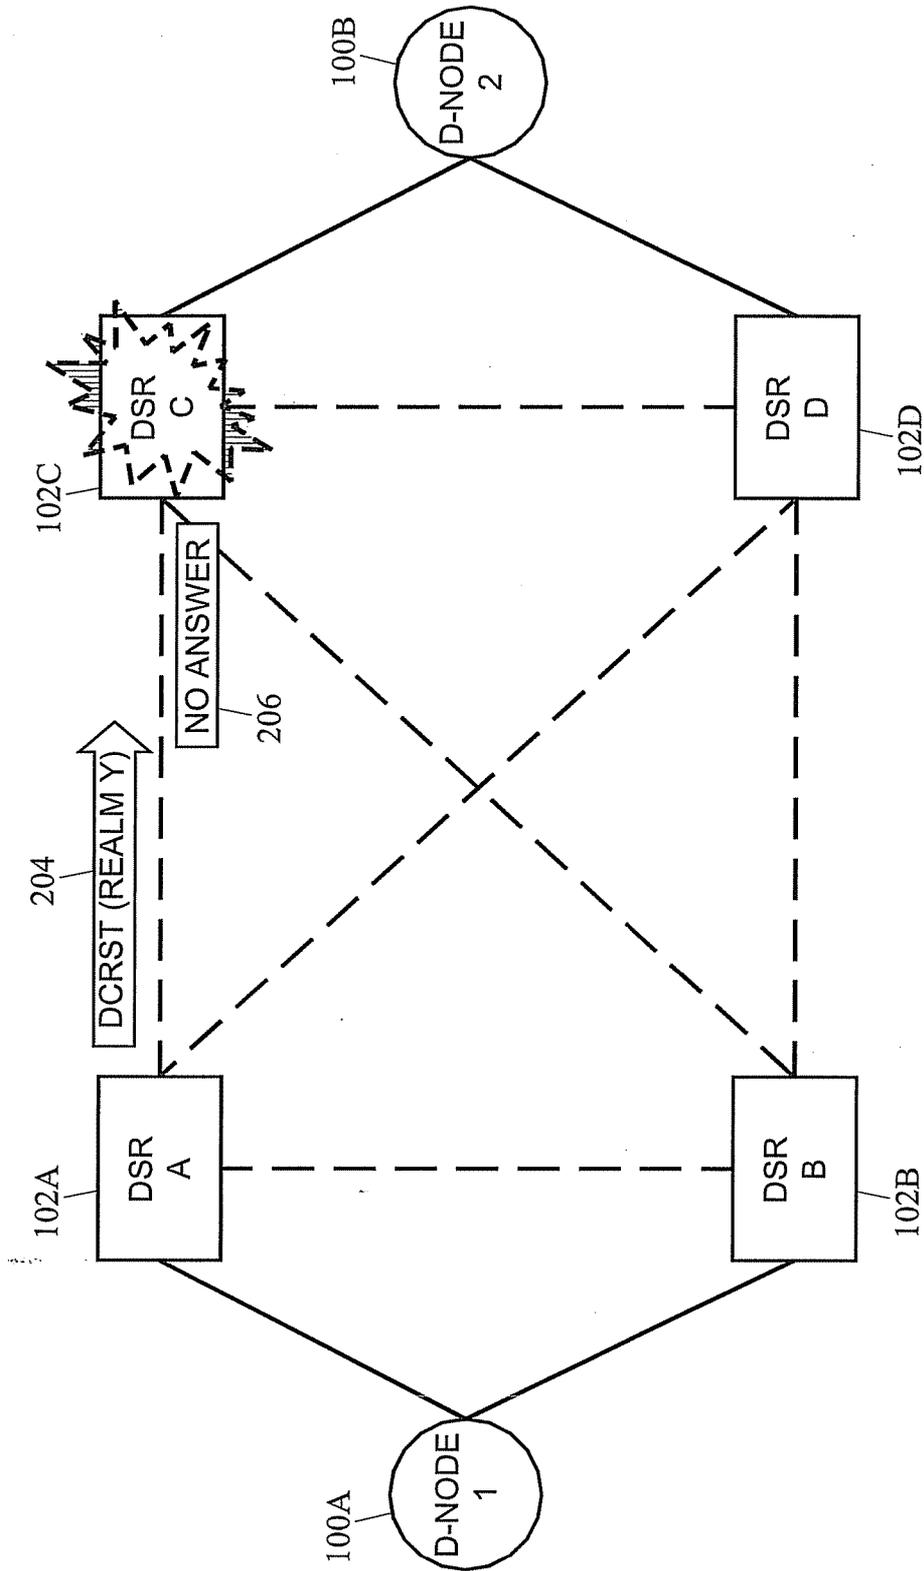


FIG. 3B

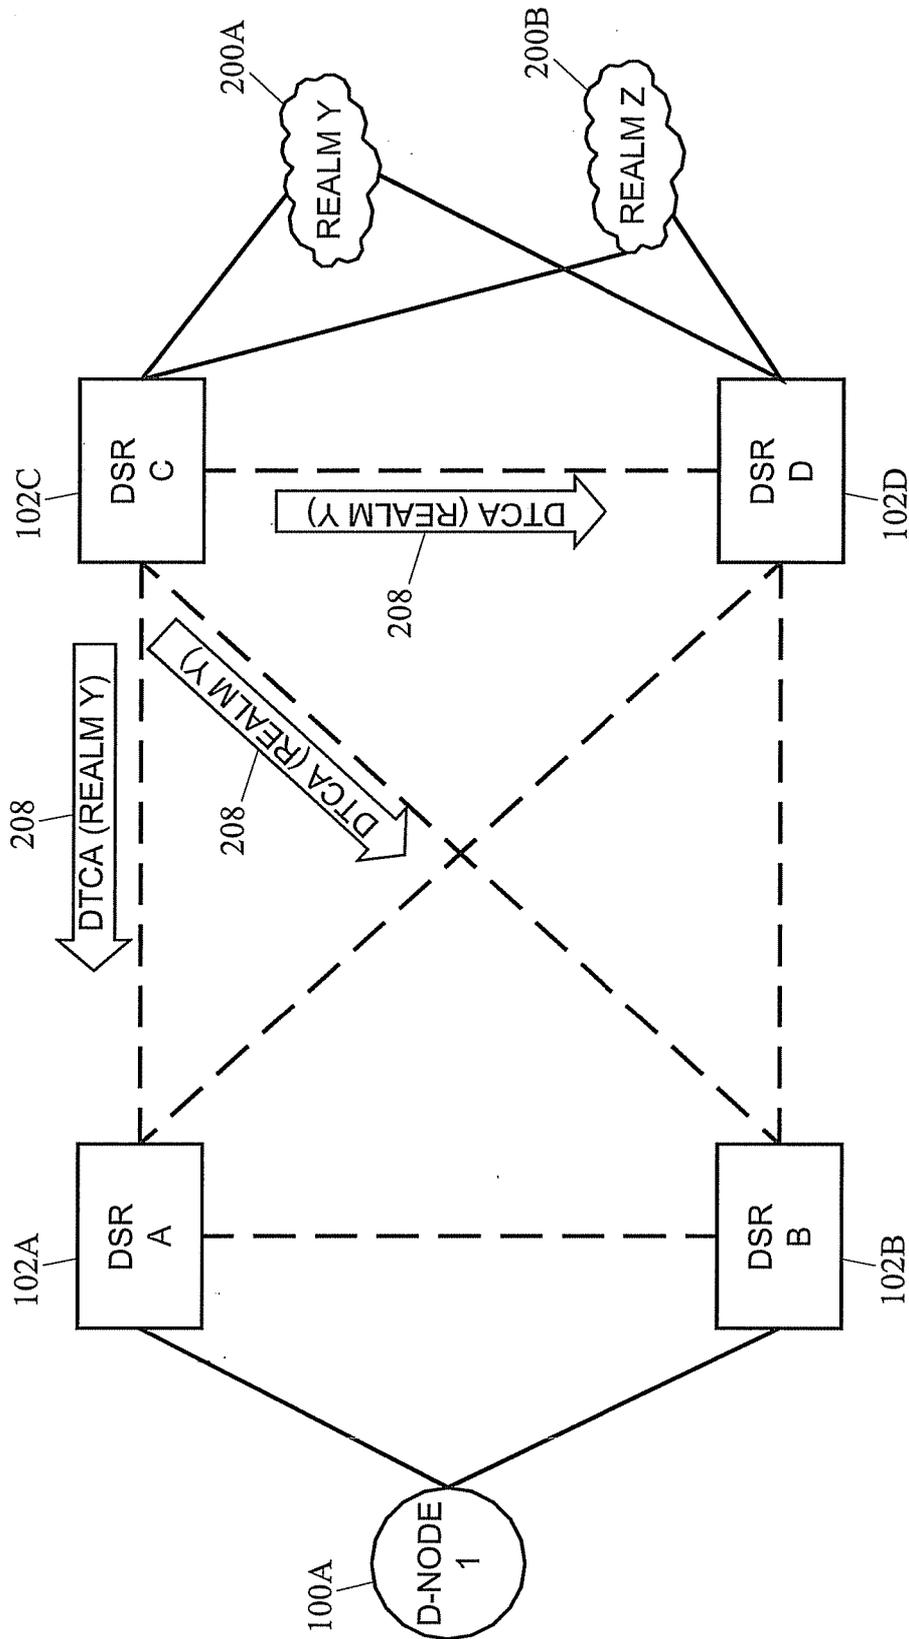


FIG. 3C

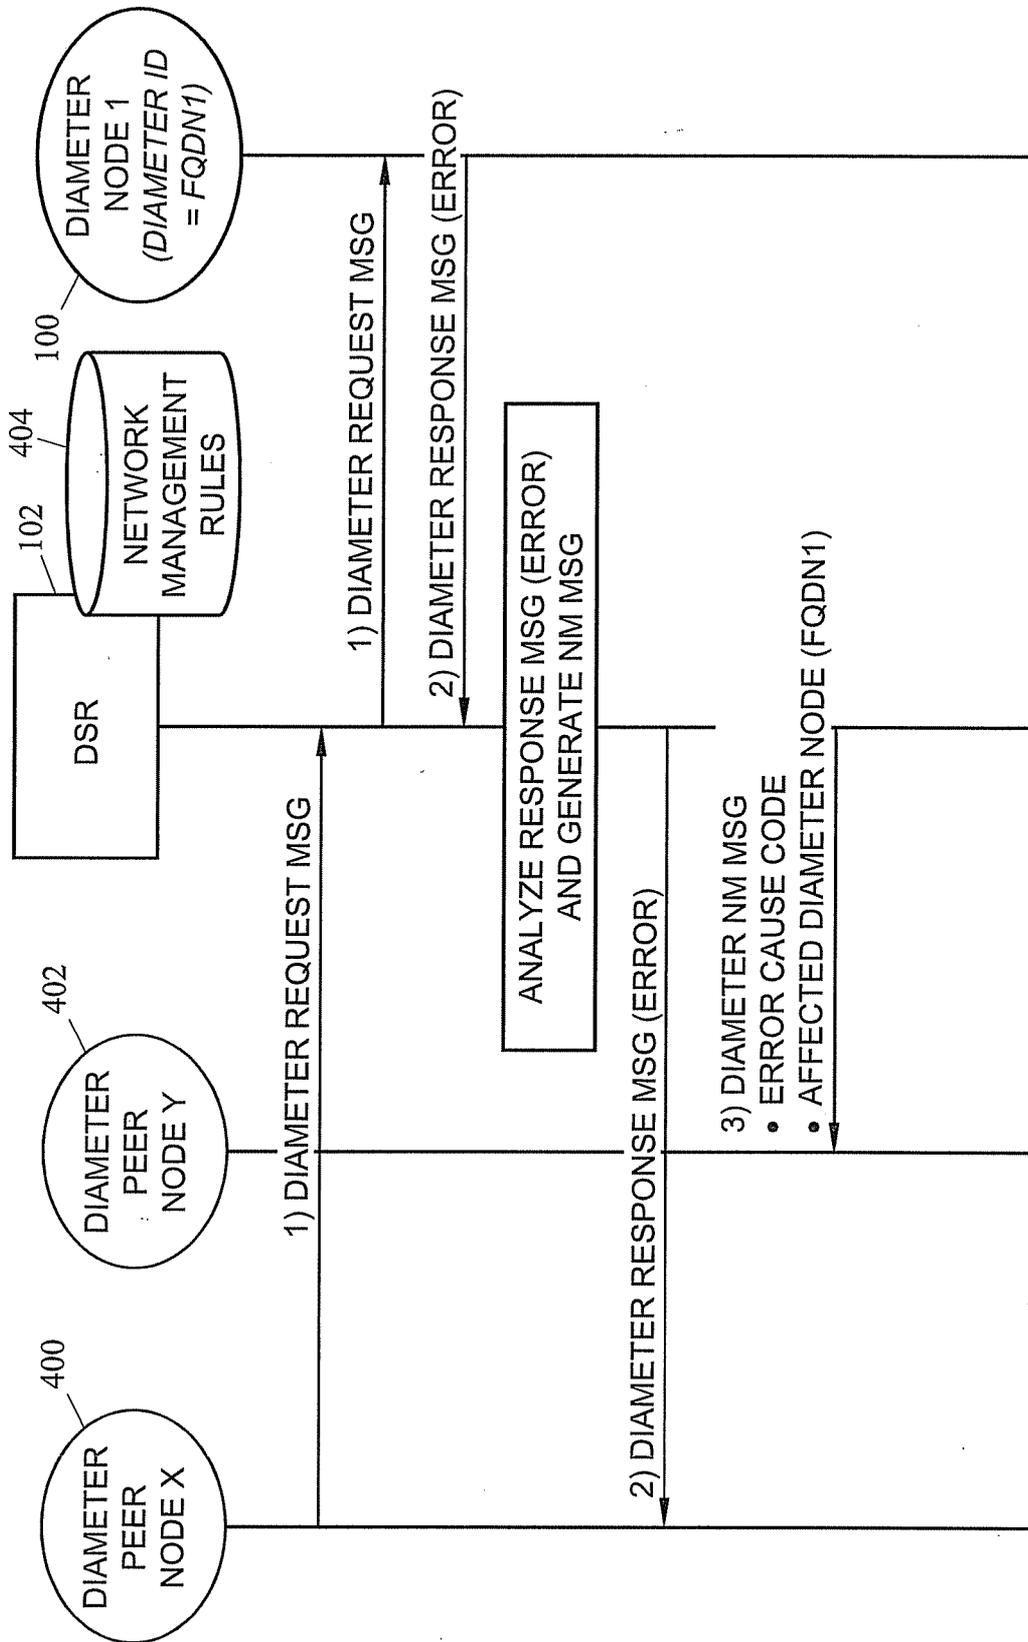


FIG. 4

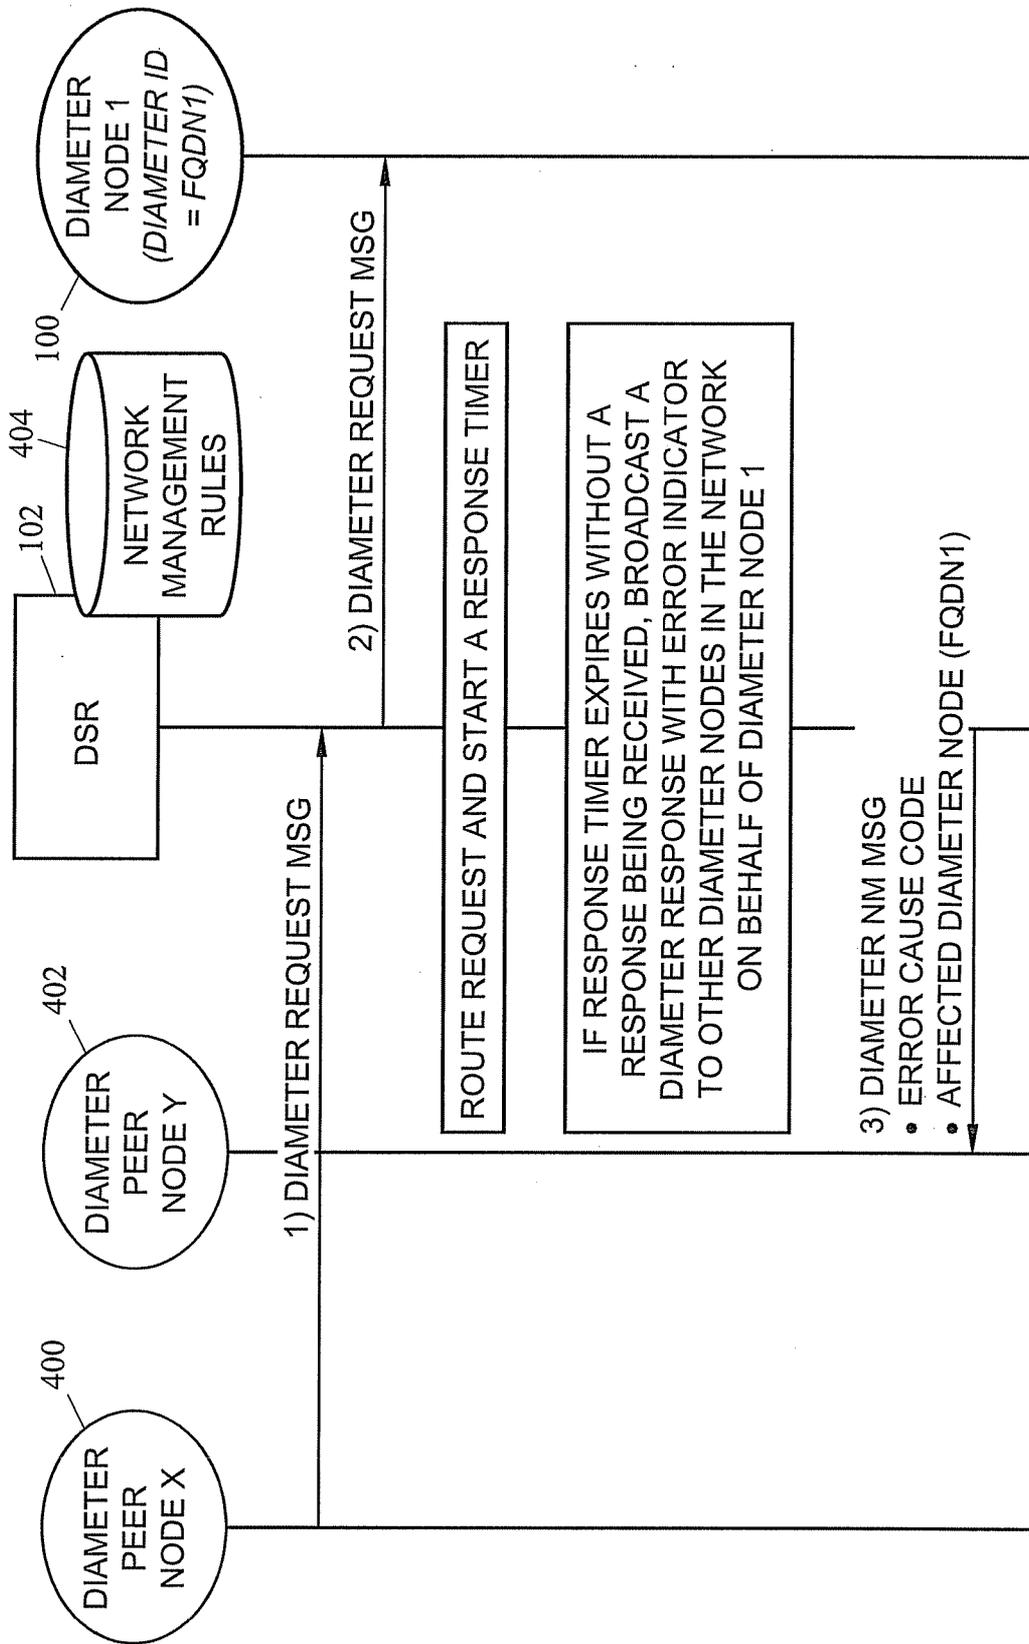


FIG. 5

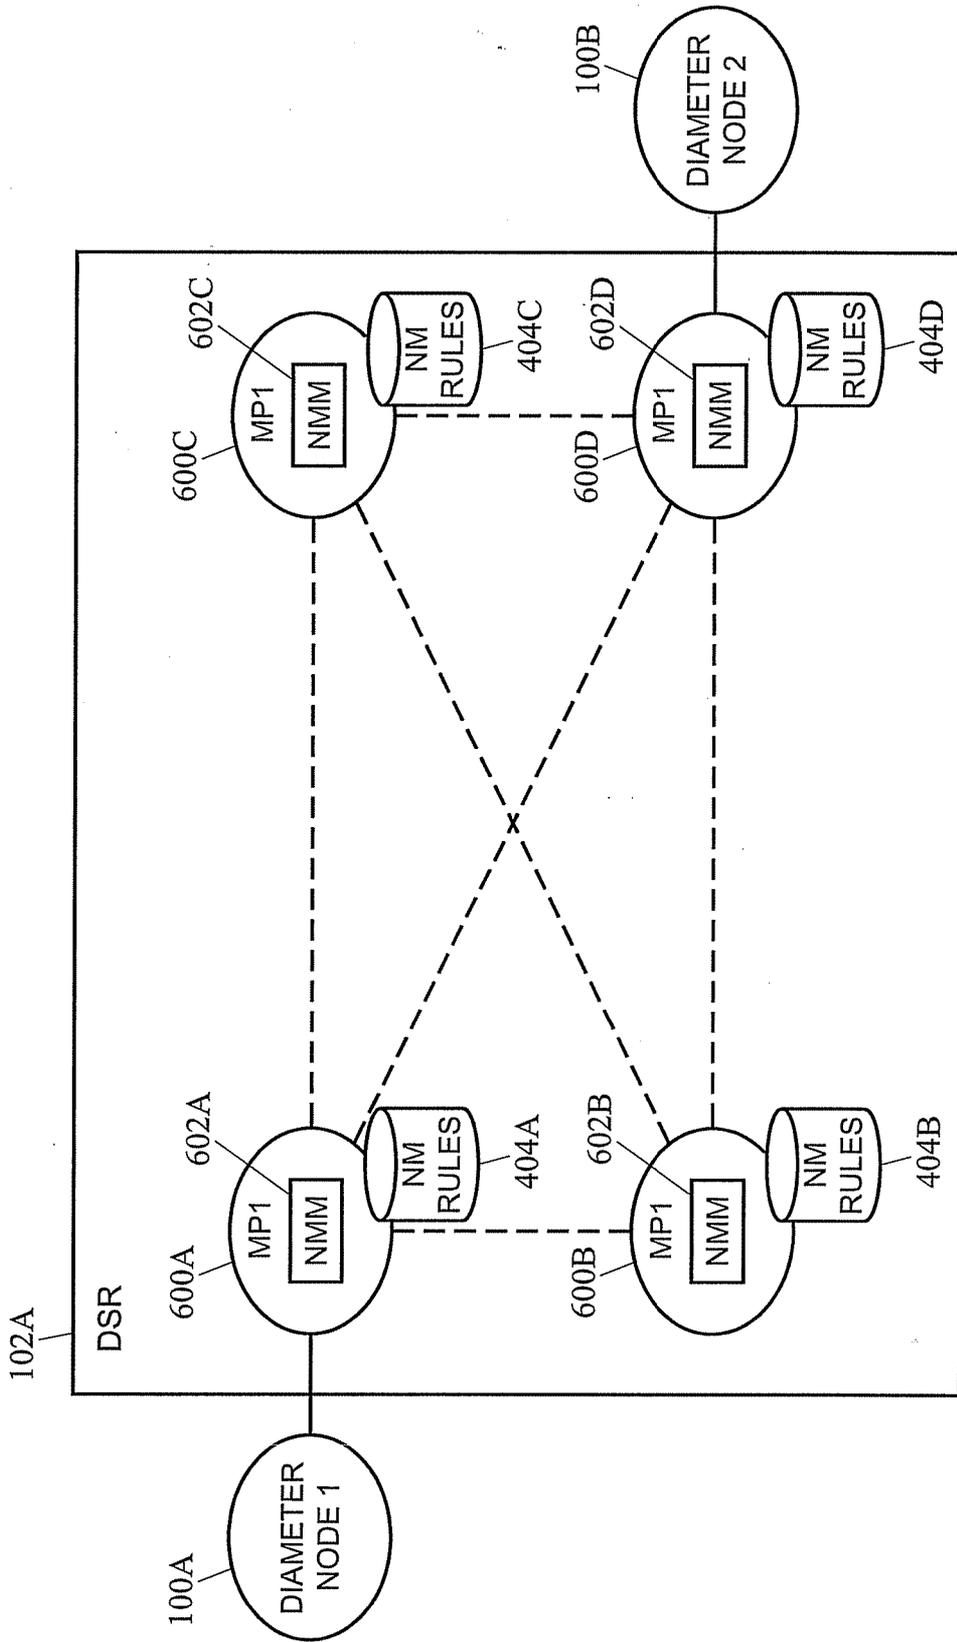


FIG. 6

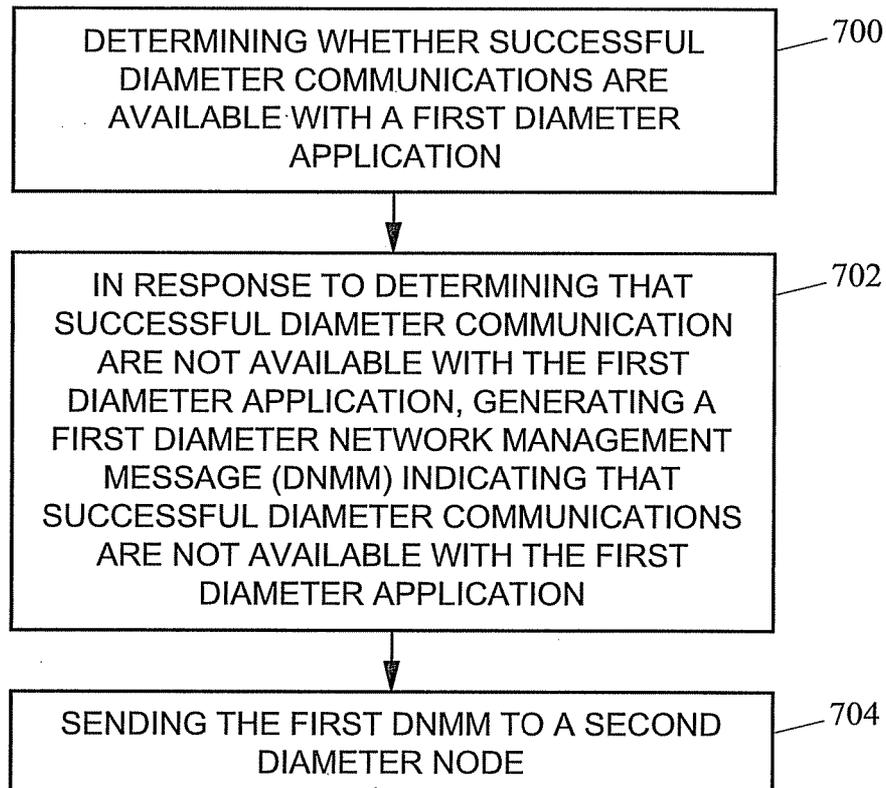


FIG. 7