

(43) International Publication Date
22 September 2016 (22.09.2016)

- (51) **International Patent Classification:**
A61F 13/494 (2006.01) *A61F 13/495* (2006.01)
- (21) **International Application Number:**
PCT/US2016/023078
- (22) **International Filing Date:**
18 March 2016 (18.03.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/134,632 18 March 2015 (18.03.2015) US
- (71) **Applicant:** THE PROCTER & GAMBLE COMPANY
[US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio
45202 (US).
- (72) **Inventors:** SURUSHE, Abhishek, Prakash; Sulzbach
Strasse 40, 65824 Schwalbach am Taunus (DE).
RAYCHECK, Jeromy, Thomas; One Procter & Gamble
Plaza, Cincinnati, Ohio 45202 (US). MARTYNUS, Cor-
nelia, Beate; Sulzbach Strasse 40, 65824 Schwalbach am
Taunus (DE). SAUER, Andrew, James; One Procter &
Gamble Plaza, Cincinnati, Ohio 45202 (US). SEITZ,
Aaron, Duane; One Procter & Gamble Plaza, Cincinnati,
Ohio 45202 (US).

(74) **Agent:** KREBS, Jay A.; c/o THE PROCTER & GAMBLE
COMPANY, Global Patent Services, One Procter &
Gamble Plaza, C8-229, Cincinnati, Ohio 45202 (US).

(81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** ABSORBENT ARTICLE WITH LEG CUFFS

(57) **Abstract:** A disposable absorbent article may include a chassis that in-
cludes a topsheet, a backsheet, and an absorbent core disposed between the
topsheet and the backsheet; and a leg gasketing system. The leg gasketing
system may include an inner cuff and an outer cuff; the inner cuff may in-
clude an inner cuff folded edge and an inner cuff material edge and the outer
cuff may include an outer cuff material edge such that the web of material is
folded laterally outward to form the inner cuff folded edge. The leg gasketing
system may also include a leg gasketing system pocket with an opening on an
inboard longitudinal edge of the pocket.

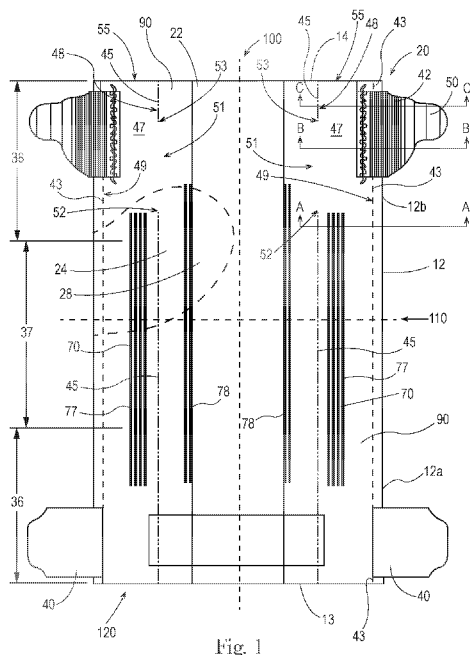


Fig. 1

ABSORBENT ARTICLE WITH LEG CUFFS

FIELD OF INVENTION

This invention relates to absorbent articles (*e.g.*, diapers, adult incontinence articles, feminine hygiene pads) having improved leg cuffs that yield improved functional characteristics (*e.g.*, reduced leakage, fecal material containment).

BACKGROUND OF THE INVENTION

The most common mode of failure for absorbent articles occurs when body exudates leak out of the gaps between the article and the wearer's legs and/or waist. When fecal material (*e.g.*, runny bowel movement, a mixture of bowel movement and urine, etc.) is not absorbed into the topsheet and core of absorbent article, the fecal material can leak out of the gaps between the article and the wearer's legs or waist. In situations where a wearer exudes a higher quantity of fecal material - which is absorbed by the absorbent core more slowly than urine - the fecal material may move laterally along the body-side surface of the absorbent article and reach the barrier leg cuff. After the fecal material reaches the barrier leg cuffs, it may travel longitudinally along the barrier leg cuffs. Due to the movement of the wearer and/or a shortage of available space under the barrier cuffs and/or within the absorbent article, the fecal material may leak out of the gaps between the article and the wearer's legs and/or waist. This results in soiling, wetting, or otherwise contaminating the wearer's clothing or other articles (*e.g.*, bedding, furniture, caregiver clothing, etc.) that come in contact with the wearer's leaky absorbent article.

Accordingly, it is of continued interest to provide an economically viable disposable absorbent article with the ability to minimize the negative effects of bodily extrudate leaks, while also making it easier to clean the wearer when the soiled disposable absorbent article is removed. To that end, it is of continued interest to provide a disposable absorbent article having sufficient retention capability to safely and cleanly retain bodily extrudate away from the wearer's clothing and/or skin throughout the expected time of article use.

SUMMARY OF THE INVENTION

In one aspect, a disposable absorbent article for wearing about the lower torso of a wearer includes a first waist region, a second waist region, a crotch region disposed between the first and second waist regions; a first waist edge and a second waist edge; and a first longitudinal edge and a second longitudinal edge, the disposable absorbent article including a topsheet; a backsheet; an absorbent core disposed between the topsheet and the backsheet; and a leg gasketing system, wherein the leg gasketing system includes a web of material forming an inner cuff and a portion of an outer cuff; wherein the inner cuff includes an inner cuff folded edge and an inner cuff material edge and the outer cuff includes an outer cuff material edge; such that the web of material is folded laterally outward to form the inner cuff folded edge; wherein at least a portion of the web of material between the outer cuff material edge and the inner cuff folded edge is attached to the backsheet in the first waist region, the second waist region and the crotch region; and at least a portion of the web of material between the inner cuff folded edge and the outer cuff material edge is attached to the topsheet in the crotch region and the first waist region; and the web of material between the inner cuff folded edge and the outer cuff material edge is unattached to the topsheet in at least a portion of the second waist region, forming a leg gasketing system pocket, wherein the leg gasketing system pocket includes an opening on an inboard longitudinal edge of the leg gasketing system pocket.

In another aspect, a disposable absorbent article for wearing about the lower torso of a wearer includes a first waist region, a second waist region, a crotch region disposed between the first and second waist regions; a first waist edge and a second waist edge; and a first longitudinal edge and a second longitudinal edge, the disposable absorbent article including a topsheet; a backsheet; an absorbent core disposed between the topsheet and the backsheet; and a leg gasketing system, wherein the leg gasketing system includes an inner cuff and an outer cuff, the outer cuff formed from the backsheet and a separate web of material; wherein the leg gasketing system extends from the first waist edge to the second waist edge; and at least a portion of the web of material is attached to the backsheet in the first waist region, the second waist region and the crotch region; at least a portion of the web material is attached to the topsheet in the crotch region and the first waist region; and the web of material is

unattached to the topsheet in at least a portion of the second waist region, forming a leg gasketing system pocket with an opening on an inboard longitudinal edge of the leg gasketing system pocket.

In another aspect, a disposable absorbent article for wearing about the lower torso of a wearer includes a first waist region, a second waist region, a crotch region disposed between the first and second waist regions; a first waist edge and a second waist edge; and a first longitudinal edge and a second longitudinal edge, the disposable absorbent article including a topsheet; a backsheet; an absorbent core disposed between the topsheet and the backsheet; and a leg gasketing system, wherein the leg gasketing system includes an inner cuff and an outer cuff; wherein the outer cuff includes at least one longitudinally oriented elastic, and a leg gasketing system pocket that includes an inner longitudinal edge and an outer longitudinal edge; and wherein in at least a portion of the second waist region, the leg gasketing system pocket includes an opening along the inner longitudinal edge.

In another aspect, a package includes at least ten disposable absorbent articles for wearing about the lower torso of a wearer, the disposable absorbent articles including: a first waist region, a second waist region, a crotch region disposed between the first and second waist regions; a first waist edge and a second waist edge; and a first longitudinal edge and a second longitudinal edge, the disposable absorbent articles including: a topsheet; a backsheet; an absorbent core disposed between the topsheet and the backsheet; and a leg gasketing system, wherein the leg gasketing system includes a web of material forming an inner cuff and a portion of an outer cuff; wherein the inner cuff includes an inner cuff folded edge and an inner cuff material edge and the outer cuff includes an outer cuff material edge; such that the web of material is folded laterally outward to form the inner cuff folded edge; wherein at least a portion of the web of material between the outer cuff material edge and the inner cuff folded edge is attached to the backsheet in the first waist region, the second waist region and the crotch region; and at least a portion of the web of material between the inner cuff folded edge and the outer cuff material edge is attached to the topsheet in the crotch region and the first waist region; and the web of material between the inner cuff folded edge and the outer cuff material edge is unattached to the topsheet in at least a portion of the second waist

region, forming a leg gasketing system pocket, wherein the leg gasketing system pocket includes an opening on an inboard longitudinal edge of the leg gasketing system pocket.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims pointing out and distinctly claiming the present invention, it is believed the same will be better understood by the following drawings taken in conjunction with the accompanying specification wherein like components are given the same reference number.

FIG. 1 is a schematic plan view of an exemplary absorbent article.

FIG. 2 is a schematic cross sectional view of the absorbent article of FIG. 1, the cross section taken along the line A-A.

FIG. 3 is a schematic cross sectional view of the absorbent article of FIG. 1, the cross section taken along the line B-B.

FIG. 4 is a schematic cross sectional view of the absorbent article of FIG. 1, the cross section taken along the line C-C.

DETAILED DESCRIPTION OF THE INVENTION

DEFINITIONS:

As used herein, the following terms shall have the meaning specified thereafter:

“Disposable,” in reference to absorbent articles, means that the absorbent articles are generally not intended to be laundered or otherwise restored or reused as absorbent articles (*i.e.*, they are intended to be discarded after a single use and, preferably, to be recycled, composted or otherwise discarded in an environmentally compatible manner).

“Absorbent article” refers to devices which absorb and contain body exudates and, more specifically, refers to devices which are placed against or in proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. Exemplary absorbent articles include diapers, training pants, pull-on pant-type diapers (*i.e.*, a diaper having a pre-formed waist opening and leg openings such as illustrated in U.S. Patent No. 6,120,487), refastenable diapers or pant-type diapers, incontinence briefs and undergarments,

diaper holders and liners, feminine hygiene garments such as panty liners, absorbent inserts, and the like.

“Proximal” and “Distal” refer respectively to the location of an element relatively near to or far from the longitudinal or lateral centerline of a structure (*e.g.*, the proximal edge of a longitudinally extending element is located nearer to the longitudinal centerline than the distal edge of the same element is located relative to the same longitudinal centerline).

“Body-facing” and “garment-facing” refer respectively to the relative location of an element or a surface of an element or group of elements. “Body-facing” implies the element or surface is nearer to the wearer during wear than some other element or surface. “Garment-facing” implies the element or surface is more remote from the wearer during wear than some other element or surface (*i.e.*, element or surface is proximate to the wearer’s garments that may be worn over the disposable absorbent article).

“Longitudinal” refers to a direction running substantially perpendicular from a waist edge to an opposing waist edge of the article and generally parallel to the maximum linear dimension of the article. Directions within 45 degrees of the longitudinal direction are considered to be “longitudinal”

“Lateral” refers to a direction running from a longitudinal edge to an opposing longitudinal edge of the article and generally at a right angle to the longitudinal direction. Directions within 45 degrees of the lateral direction are considered to be “lateral.”

“Disposed” refers to an element being located in a particular place or position.

“Joined” refers to configurations whereby an element is directly secured to another element by affixing the element directly to the other element and to configurations whereby an element is indirectly secured to another element by affixing the element to intermediate member(s) which in turn are affixed to the other element.

“Film” refers to a sheet-like material wherein the length and width of the material far exceed the thickness of the material. Typically, films have a thickness of about 0.5 mm or less.

“Water-permeable” and “water-impermeable” refer to the penetrability of materials in the context of the intended usage of disposable absorbent articles. Specifically, the term “water-permeable” refers to a layer or a layered structure having pores, openings, and/or interconnected void spaces that permit liquid water, urine, or synthetic urine to pass through its thickness in the absence of a forcing pressure. Conversely, the term “water-impermeable”

refers to a layer or a layered structure through the thickness of which liquid water, urine, or synthetic urine cannot pass in the absence of a forcing pressure (aside from natural forces such as gravity). A layer or a layered structure that is water-impermeable according to this definition may be permeable to water vapor, *i.e.*, may be “vapor-permeable.”

5 “Extendibility” and “extensible” mean that the width or length of the component in a relaxed state can be extended or increased.

“Elasticated” and “elasticized” mean that a component comprises at least a portion made of elastic material.

“Elongatable material,” “extensible material,” or “stretchable material” are used
10 interchangeably and refer to a material that, upon application of a biasing force, can stretch to an elongated length of at least about 110% of its relaxed, original length (*i.e.* can stretch to 10 percent more than its original length), without rupture or breakage, and upon release of the applied force, shows little recovery, less than about 20% of its elongation without complete rupture or breakage as measured by EDANA method 20.2-89. In the event such an
15 elongatable material recovers at least 40% of its elongation upon release of the applied force, the elongatable material will be considered to be “elastic” or “elastomeric.” For example, an elastic material that has an initial length of 100mm can extend at least to 150mm, and upon removal of the force retracts to a length of at least 130mm (*i.e.*, exhibiting a 40% recovery). In the event the material recovers less than 40% of its elongation upon release of the applied
20 force, the elongatable material will be considered to be “substantially non-elastic” or “substantially non-elastomeric”. For example, an elongatable material that has an initial length of 100mm can extend at least to 150mm, and upon removal of the force retracts to a length of at least 145mm (*i.e.*, exhibiting a 10% recovery).

“Elastomeric material” is a material exhibiting elastic properties. Elastomeric
25 materials may include elastomeric films, scrims, nonwovens, and other sheet-like structures.

“Pant” refers to disposable absorbent articles having a pre-formed waist and leg openings. A pant may be donned by inserting a wearer's legs into the leg openings and sliding the pant into position about the wearer's lower torso. Pants are also commonly referred to as “closed diapers”, “prefastened diapers”, “pull-on diapers”, “training pants” and
30 “diaper-pants.”

ABSORBENT ARTICLE:

The present disclosure is directed to a disposable absorbent article with a leg gasketing system and a leg gasketing system pocket with an opening towards the interior (towards the longitudinal centerline 100) of the article, wherein the pocket reduces runny bowel movement leaks.

FIG. 1 is a plan view of an exemplary, non-limiting embodiment of an absorbent article 20 of the present invention in a flat, uncontracted state. The garment-facing surface 120 of the absorbent article 20 is facing the viewer. The absorbent article 20 includes a longitudinal centerline 100 and a lateral centerline 110. The absorbent article 20 may comprise a chassis 22. The absorbent article 20 and chassis 22 are shown to have a first waist region 36, a second waist region 38 opposed to the first waist region 36, and a crotch region 37 located between the first waist region 36 and the second waist region 38. The waist regions 36 and 38 generally comprise those portions of the absorbent article 20 which, when worn, encircle the waist of the wearer. The waist regions 36 and 38 may include elastic elements such that they gather about the waist of the wearer to provide improved fit and containment. The crotch region 37 is the portion of the absorbent article 20 which, when the absorbent article 20 is worn, is generally positioned between the legs of the wearer.

The outer periphery of chassis 22 is defined by longitudinal edges 12 and waist edges (first waist edge 13 in first waist region 36 and second waist edge 14 in second waist region 38). The longitudinal edges 12 may be subdivided into a front longitudinal edge 12a, which is the portion of the longitudinal edge 12 in the first waist region 36, and a rear longitudinal edge 12b, which is the portion of the longitudinal edge 12 in the rear waist region 38. The chassis 22 may have opposing longitudinal edges 12 that are oriented generally parallel to the longitudinal centerline 100. However, for better fit, longitudinal edges 12 may be curved or angled to produce, for example, an “hourglass” shape diaper when viewed in a plan view. The chassis 22 may have opposing lateral edges 13, 14 that are oriented generally parallel to the lateral centerline 110.

The chassis 22 may comprise a liquid permeable topsheet 24, a backsheet 26, and an absorbent core 28 between the topsheet 24 and the backsheet 26. The absorbent core 28 may

have a body-facing surface and a garment facing-surface. The topsheet 24 may be joined to the core 28 and/or the backsheet 26. The backsheet 26 may be joined to the core 28 and/or the topsheet 24. It should be recognized that other structures, elements, or substrates may be positioned between the core 28 and the topsheet 24 and/or backsheet 26. In certain
5 embodiments, the chassis 22 comprises the main structure of the absorbent article 20 with other features may added to form the composite absorbent article structure. While the topsheet 24, the backsheet 26, and the absorbent core 28 may be assembled in a variety of well-known configurations, preferred absorbent article configurations are described generally in U.S. Patent Nos. 3,860,003; 5,151,092; 5,221,274; 5,554,145; 5,569,234; 5,580,411; and
10 6,004,306.

TOPSHEET:

The topsheet 24 is generally a portion of the absorbent article 20 that may be positioned at least in partial contact or close proximity to a wearer. Suitable topsheets 24
15 may be manufactured from a wide range of materials, such as porous foams; reticulated foams; apertured plastic films; or woven or nonwoven webs of natural fibers (e.g., wood or cotton fibers), synthetic fibers (e.g., polyester or polypropylene fibers), or a combination of natural and synthetic fibers. The topsheet 24 is generally supple, soft feeling, and non-irritating to a wearer's skin. Generally, at least a portion of the topsheet 24 is liquid pervious,
20 permitting liquid to readily penetrate through the thickness of the topsheet 24. One topsheet 24 useful herein is available from BBA Fiberweb, Brentwood, TN as supplier code 055SLPV09U. The topsheet 24 may be apertured.

Any portion of the topsheet 24 may be coated with a lotion or skin care composition as is known in the art. Non-limiting examples of suitable lotions include those described in
25 U.S. Patent Nos. 5,607,760; 5,609,587; 5,635,191; and 5,643,588. The specific examples are not limiting, as any lotion or skin care composition known in the art may be utilized. The topsheet 24 may be fully or partially elasticized or may be foreshortened so as to provide a void space between the topsheet 24 and the core 28. Exemplary structures including elasticized or foreshortened topsheets are described in more detail in U.S. Patent Nos.
30 4,892,536; 4,990,147; 5,037,416; and 5,269,775.

ABSORBENT CORE:

The absorbent core 28 may comprise a wide variety of liquid-absorbent materials commonly used in disposable diapers and other absorbent articles. Examples of suitable absorbent materials include comminuted wood pulp, which is generally referred to as air felt creped cellulose wadding; melt blown polymers, including co-form; chemically stiffened, modified or cross-linked cellulosic fibers; tissue, including tissue wraps and tissue laminates; absorbent foams; absorbent sponges; superabsorbent polymers; absorbent gelling materials; or any other known absorbent material or combinations of materials. In one embodiment, at least a portion of the absorbent core is substantially cellulose free and contains less than 10% by weight cellulosic fibers, less than 5% cellulosic fibers, less than 1% cellulosic fibers, no more than an immaterial amount of cellulosic fibers or no cellulosic fibers. It should be understood that an immaterial amount of cellulosic material does not materially affect at least one of the thinness, flexibility, and absorbency of the portion of the absorbent core that is substantially cellulose free. Among other benefits, it is believed that when at least a portion of the absorbent core is substantially cellulose free, this portion of the absorbent core is significantly thinner and more flexible than a similar absorbent core that includes more than 10% by weight of cellulosic fibers. The amount of absorbent material, such as absorbent particulate polymer material present in the absorbent core may vary, but in certain embodiments, is present in the absorbent core in an amount greater than about 80% by weight of the absorbent core, or greater than about 85% by weight of the absorbent core, or greater than about 90% by weight of the absorbent core, or greater than about 95% by weight of the core.

Exemplary absorbent structures for use as the absorbent core 28 are described in U.S. Patent No. 4,610,678; 4,673,402; 4,834,735; 4,888,231; 5,137,537; 5,147,345; 5,342,338; 5,260,345; 5,387,207; 5,397,316; and 5,625,222.

BACKSHEET:

The backsheet 26 is generally positioned such that it may be at least a portion of the garment-facing surface 120 of the absorbent article 20. Backsheet 26 may be designed to

prevent the exudates absorbed by and contained within the absorbent article 20 from soiling articles that may contact the absorbent article 20, such as bed sheets and undergarments. In certain embodiments, the backsheet 26 is substantially water-impermeable. Suitable backsheet 26 materials include films such as those manufactured by Tredegar Industries Inc. of Terre Haute, IN and sold under the trade names X15306, X10962, and X10964. Other suitable backsheet 26 materials may include breathable materials that permit vapors to escape from the absorbent article 20 while still preventing exudates from passing through the backsheet 26. Exemplary breathable materials may include materials such as woven webs, nonwoven webs, composite materials such as film-coated nonwoven webs, and microporous films such as manufactured by Mitsui Toatsu Co., of Japan under the designation ESPOIR NO and by EXXON Chemical Co., of Bay City, TX, under the designation EXXAIRE. Suitable breathable composite materials comprising polymer blends are available from Clopay Corporation, Cincinnati, OH under the name HYTREL blend P18-3097. Such breathable composite materials are described in greater detail in PCT Application No. WO 95/16746 and U.S. Patent No. 5,865,823. Other breathable backsheets including nonwoven webs and apertured formed films are described in U.S. Patent No. 5,571,096. An exemplary, suitable backsheet is disclosed in U.S. Patent No. 6,107,537. Other suitable materials and/or manufacturing techniques may be used to provide a suitable backsheet 26 including, but not limited to, surface treatments, particular film selections and processing, particular filament selections and processing, etc.

Backsheet 26 may also consist of more than one layer. The backsheet 26 may comprise an outer cover and an inner layer. The outer cover may be made of a soft, non-woven material. The inner layer may be made of a substantially liquid-impermeable film. The outer cover and an inner layer may be joined together by adhesive or any other suitable material or method. A particularly suitable outer cover is available from Corovin GmbH, Peine, Germany as supplier code A18AH0, and a particularly suitable inner layer is available from RKW Gronau GmbH, Gronau, Germany as supplier code PGBR4WPR. While a variety of backsheet configurations are contemplated herein, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention.

EARS/FASTENERS:

The absorbent article 20 may include front ears 40 and/or back ears 42. The ears 40, 42 may be extensible, inextensible, elastic, or inelastic. The ears 40, 42 may be formed from nonwoven webs, woven webs, knitted fabrics, polymeric and elastomeric films, apertured films, sponges, foams, scrims, and combinations and laminates thereof. In certain embodiments the ears 40, 42 may be formed of a stretch laminate such as a nonwoven/elastomeric material laminate or a nonwoven/elastomeric material/nonwoven laminate. Stretch laminates may be formed by any method known in the art. For example, the ears 40, 42 may be formed as a zero strain stretch laminate, which includes at least a layer of non-woven material and an elastomeric element. The elastomeric element is attached to the layer of non-woven material while in a relaxed or substantially relaxed state, and the resulting laminate is made stretchable (or more stretchable over a further range) by subjecting the laminate to an activation process which elongates the nonwoven layer permanently, but the elastomeric element temporarily. The nonwoven layer may be integral with at least a portion of the chassis 22, in which case the elastomeric element may be attached to the nonwoven layer and the non-woven/elastomeric element laminate is subsequently activated. Alternatively, the nonwoven layer may be a separate component, in which case the elastomeric element is attached to the nonwoven layer to form the laminate, which is then coupled to the main portion. If one or more layers of the side panel are provided separately, the laminate may be activated either before or after attachment to the main portion. The zero strain activation processes is further disclosed in U.S. Patent Nos. 5,167,897 and 5,156,793. A suitable elastic ear may be an activated laminate comprising an elastomeric film (such as is available from Tredegar Corp, Richmond, VA, as supplier code X25007) disposed between two nonwoven layers (such as is available from BBA Fiberweb, Brentwood, TN as supplier code FPN332).

The ears 40, 42 may be discrete or integral. A discrete ear is formed as separate element which is joined to the chassis 22. An integral ear is a portion of the chassis 22 that projects laterally outward from the longitudinal edge 12. The integral ear may be formed by cutting the chassis form to include the shape of the ear projection.

The absorbent article 20 may also include a fastening system 50. When fastened, the fastening system 50 interconnects the first waist region 36 and the rear waist region 38 resulting in a waist circumference that may encircle the wearer during wear of the absorbent article 20. The fastening system 50 may comprises a fastener such as tape tabs, hook and loop fastening components, interlocking fasteners such as tabs & slots, buckles, buttons, snaps, and/or hermaphroditic fastening components, although any other known fastening means are generally acceptable. Some exemplary surface fastening systems are disclosed in U.S. Patent Nos. 3,848,594; 4,662,875; 4,846,815; 4,894,060; 4,946,527; 5,151,092; and 5,221,274. An exemplary interlocking fastening system is disclosed in U.S. Patent No. 6,432,098. The fastening system 50 may also provide a means for holding the article in a disposal configuration as disclosed in U.S. Pat. No. 4,963,140. The fastening system 50 may also include primary and secondary fastening systems, as disclosed in U.S. Pat. No. 4,699,622. The fastening system 50 may be constructed to reduce shifting of overlapped portions or to improve fit as disclosed in U.S. Patent Nos. 5,242,436; 5,499,978; 5,507,736; and 5,591,152.

LEG GASKETING SYSTEM:

The absorbent article 20 may include a leg gasketing system 70. FIGS. 2, 3 and 4 depict schematic cross sectional views of the exemplary leg gasketing system 70 of FIG. 1. FIG. 2 is schematic cross sectional view through line A-A of FIG. 1. FIG. 3 is schematic cross sectional view through line B-B of FIG. 1. FIG. 4 is schematic cross sectional view through line C-C of FIG. 1. In the various embodiments, the leg gasketing system 70 may be constructed of one or more webs of material 90 and include an inner cuff 71 that has an inner cuff folded edge 72 and an inner cuff material edge 73. The leg gasketing system 70 may further include an outer cuff 74 that includes portions of the topsheet and/or backsheet in its construction. The outer cuff 74 may include an outer cuff material edge 76.

In one embodiment, each leg gasketing system 70 comprises a single, continuous web of material 90 in conjunction with part of the chassis 22 (*e.g.*, backsheet 26 and/or topsheet 24). An embodiment having a single web of material (in addition to part of the chassis) to form both inner and outer cuff may provide a cost advantage over embodiments having more

than one web of material. Further, an embodiment having one web of material may be more aesthetically pleasing, as few mechanical bonds are visible. In other embodiments, the leg gasketing system 70 may be formed from more than one web of material (*e.g.*, multiple webs of material that are joined together to become one web of material, or multiple distinct webs of material that are separate from the disposable absorbent article chassis and form part of the leg gasketing system). Herein, locations (*e.g.*, folded edge, material edge, etc.) on the leg gasketing system 70 are detailed in reference to “a web of material” or “a portion of the web of material.” The recitations of “a web of material” or “the web of material” refer to leg gasketing system embodiments that may be formed from a single, continuous web of material, multiple webs of material that are joined together to become one web of material, or multiple distinct webs of material that are separate from the disposable absorbent article chassis and form part of the leg gasketing system. All such embodiments are contemplated.

In one embodiment, at least a portion of the leg gasketing system 70 is attached to the chassis 22 in the first waist region 36, the second waist region 38 and the crotch region 37. The attachment to the chassis 22 (*e.g.*, topsheet 24 and/or backsheet 26) is made through utilization of one or more outer cuff bonds 43. In one embodiment, one or more of the outer cuff bonds 43 are continuous, or substantially continuous (*e.g.*, in a continuously intermittent pattern) from the first waist edge 13 to the second waist edge 14. As seen in the exemplary embodiment of FIGS. 2-4, an outer cuff bond 43 attaches the web of leg gasketing material 90 to the backsheet 26. The outer cuff bond 43 may take the form of glue, heat bond, pressure bond, CPW bond, or any other bonding method known in the art. In the exemplary embodiments of FIGS. 2-4, the outer cuff bond 43 takes the form of a glue bond.

Further, at least a portion of the web material 90 is attached at a second location to the chassis 22 in the crotch region 37 and the first waist region 36. The attachment to the web of material 90 in this second location is made through utilization of one or more cuff separation bonds 45. As seen in FIGS. 1-4, the cuff separation bond 45 attaches at least a portion of the web material 90 to the topsheet 24 in the crotch region 37 and the first waist region 36, and a portion of the second waist region 38. However, in other embodiments, the cuff separation bond 45 may attach at least a portion of the web material 90 directly or indirectly to the backsheet 26 in the crotch region 37 and the first waist region 36, and a portion of the second

waist region 38. The cuff separation bond 45 may take the form of glue, heat bond, pressure bond, CPW bond, or any other bonding method known in the art. In the exemplary embodiments of FIGS. 1-4, the cuff separation bond 45 takes the form of a glue bond.

As seen in FIGS. 1-4, the web material 90 is unattached to the topsheet 24 in at least a portion of the second waist region 38. Due to the web of material 90 being unattached to the topsheet 24 in at least a portion of the second waist region 38, a leg gasketing system pocket 47 is formed in at least a portion of the second waist region of the leg gasketing system 70. The leg gasketing system pocket 47 includes an inboard longitudinal edge 48 and an outboard longitudinal edge 49, which define lateral dimensions of the leg gasketing system pocket. In one embodiment, the inboard longitudinal edge 48 is coterminous with a line that the cuff separation bond 45 runs along in the longitudinal direction. In one embodiment, the outboard longitudinal edge 49 is coterminous with a line that the outer cuff bond 43 runs along in the longitudinal direction. In another embodiment, the outboard longitudinal edge 49 is coterminous with a line that the most outboard bond of the outer cuff 74 runs along in the longitudinal direction.

In one embodiment, the leg gasketing system pocket 47 includes an opening 51 which runs a distance along the inboard longitudinal edge 48 of the leg gasketing system pocket 47. The opening 51 is created by a break in the cuff separation bond 45. Referring to FIG. 1, the cuff separation bond 45 runs in the longitudinal direction of the absorbent article, and is continuous, or substantially continuous (*e.g.*, in a continuously intermittent pattern) in the first waist region 36 and the crotch region 37. The continuous cuff separation bond 45 continues into the second waist region 38, but then stops for a defined distance and then starts again along the same longitudinal line. The distance in which the cuff separation bond 45 stops along that longitudinal line is the distance in which the web of material 90 is unattached to the topsheet 24. Accordingly, this distance is the length of the opening 51 which runs along the inboard longitudinal edge 48 of the leg gasketing system pocket 47. The opening 51 has an inboard lateral edge 52 and an outboard lateral edge 53 where the cuff separation bond 45 starts and stops along the longitudinal line that the cuff separation bond 45 runs along. As illustrated in FIG. 1, the length of the opening 51 can be determined by measuring

the distance between inboard lateral edge 52 and outboard lateral edge 53, taken along the longitudinal line that the cuff separation bond 45 runs along.

In another embodiment, the leg gasketing system pocket 47 includes an opening 51 which again runs a distance along the inboard longitudinal edge 48 of the leg gasketing system pocket 47. The opening 51 is created by a series of breaks in the cuff separation bond 45. Referring to FIG. 1, the cuff separation bond 45 runs in the longitudinal direction of the absorbent article, and is continuous in the first waist region 36 and the crotch region 37. The continuous cuff separation bond 45 continues into the second waist region 38, but then becomes an intermittent bond pattern (*e.g.*, stop-start-stop-start) for a defined distance and then becomes continuous again along the same longitudinal line. The distance in which the cuff separation bond 45 becomes an intermittent bond pattern along that longitudinal line is the distance in which the web of material 90 is intermittently attached to the topsheet 24. This intermittent pattern for a distance of the cuff separation bond 45 creates series of small pockets, together referred to herein as a leg gasketing system pocket.

In other embodiments, the pocket and opening can occur in the first waist region, the second waist region, or in the crotch region as needed for the specific type of exudates and the particular situation where leakage prevention is desired. For instance, a wearer who sleeps on their belly (front) may benefit from the pocket and opening being located in the front waist region, as to stop urine leakage out of the front waist during sleep. Likewise, it may be important to create the opening on the crotch region for users wearing the article in the standing position as to contain exudates that are likely to locate centrally in the article due to the force of gravity when in a standing position.

In some embodiments, the opening 51 measures between about 5mm and about 100mm in the longitudinal direction, or any range or distance within the range of about 5mm to about 100mm; in some embodiments the opening measures about 75mm; and in other embodiments the opening measures between about 1mm and about 20mm. In one embodiment, the length of the opening 51 is between about 1% and about 75% of the overall longitudinal length of the leg gasketing system pocket 47 (or any range or percentage within the range of about 1% to about 75%). The overall longitudinal length of the leg gasketing system pocket 47 is the distance from the furthest longitudinally inboard portion of the

pocket to the furthest longitudinally outboard position of the pocket. In some embodiments, the furthest longitudinally outboard position of the pocket 47 is the second waist edge of absorbent article, and in other embodiments, the pocket 47 may end longitudinally short of the second waist edge. For the embodiment shown in FIG. 1, the overall longitudinal length of the leg gasketing system pocket 47 is the distance from the inboard lateral edge 52 of the opening 51 to the second waist edge 14 of the absorbent article 20, taken along the longitudinal line that the cuff separation bond 45 runs along. In other words, for the exemplary embodiment shown in FIG. 1, the longitudinal dimensions of the leg gasketing system pocket 47 are defined by the inboard lateral edge 52 of the opening 51 and the second waist edge 14. In one embodiment, the overall longitudinal length of the leg gasketing system pocket 47 measures between about 5mm and about 200mm in the longitudinal direction, or any range or distance within the range of about 5mm to about 200mm; in some embodiments, about 100mm, about 75mm, or about 50mm; and in other embodiments the overall longitudinal length measures between about 1mm and about 20mm. In one embodiment, the outboard edge of the opening 51 of the leg gasketing system pocket 47 is positioned about 5 mm inboard from the second waist edge 14 in the longitudinal direction and the inboard edge of the opening is positioned about 100 mm inboard from the second waist edge 14 in the longitudinal direction. In other embodiments, the inboard/outboard edges of the opening can be any range or distance within the range of about 5 mm to about 200 mm inboard from the second waist edge 14 in the longitudinal direction; in some embodiments, the outboard edge of the opening is about 100 mm, about 75 mm, about 50 mm, about 20 mm, or about 1 mm inboard from the second waist edge 14 in the longitudinal direction; in some embodiments, the inboard edge of the opening is about 200 mm, about 100 mm, about 75 mm, about 50 mm or about 20 mm inboard from the second waist edge 14 in the longitudinal direction.

The overall lateral width of the leg gasketing system pocket 47 is the distance from the furthest laterally inboard portion of the pocket to the furthest laterally outboard portion of the pocket. For the embodiment shown in FIG. 1, the overall lateral width of the leg gasketing system pocket 47 is the distance from the inboard longitudinal edge 48 of the leg gasketing system pocket to the outboard longitudinal edge 49 of the leg gasketing system

pocket, taken along a line that is parallel to the second waist edge 14 and centered in the middle of the opening 51 of the leg gasketing system pocket. In other words, for the exemplary embodiment shown in FIG. 1, the lateral dimension of the leg gasketing system pocket 47 (*i.e.*, the width) is defined by inboard and outboard longitudinal edges 48, 49 of the leg gasketing system pocket 47. In one embodiment, the overall lateral width of the leg gasketing system pocket 47 measures between about 5mm and about 60mm in the lateral direction, or any range or distance within the range of about 5mm to about 60mm; in some embodiments, about 30mm, about 25 mm, or about 20mm; and in other embodiments, the overall lateral width measures between about 1mm and about 20mm. In one embodiment, the overall lateral width of the leg gasketing system pocket 47 is between about 1% and about 75% of the overall longitudinal length of the leg gasketing system pocket 47 (or any range or percentage within the range of about 1% to about 75%). In one embodiment, the length of opening 51 is between about 20% and about 100% of the overall lateral width of the leg gasketing system pocket 47 (or any range or percentage within the range of about 20% to about 100%).

When a wearer of an absorbent article has a runny bowel movement, many times the runny bowel movement spreads upon defecation and leaks out of the absorbent article in an area between the leg cuffs and wearer's legs, or in an area between the waist region and the wearer's back. Leaks of this type often happen because the snug fit between user's body and the attached absorbent article do not allow enough room for the runny bowel movement to remain contained within the absorbent article during the wearer's movement. One advantage of the leg gasketing system pocket 47 as detailed herein, in combination with the leg gasketing system(s) as detailed herein, are the additional pocketed areas that provide extra void volumes within the leg cuffs for containment of bodily extrudate (*e.g.*, fecal material). When the wearer moves, a portion of the bodily extrudate will migrate into the leg gasketing system pocket 47 for containment and be held/trapped between two layers of nonwoven within the leg gasketing system before it can leak out in an area between the wearer's back and the back waist region of the absorbent article or an area between the leg cuffs and wearer's legs of the absorbent article. Thus, the leg gasketing system pocket 47 detailed herein reduces leaks. Moreover, leg gasketing system pocket 47 provides additional void

volume within the leg cuffs to receive the fecal material which helps in isolating the fecal material from wearer's skin.

In one embodiment, the leg gasketing system pocket 47 is free of elastic members 77. In one embodiment, the leg gasketing system pocket 47 contains one or more snap back elastic members. In one embodiment, the leg gasketing system pocket 47 has a second opening 55 along the second waist edge 14 of the absorbent article. In one embodiment, the leg gasketing system pocket 47 is sealed along the second waist edge 14.

In some embodiments, the pocket 47 includes a thermal or compression bond that defines at least a portion of the perimeter of the pocket (*e.g.*, the entire perimeter of the pocket), such that the at least a portion of the pocket 47 (*e.g.*, the entire pocket), can be made visible to a wearer or caregiver as to signal the functionality of the pocket 47 prior to use.

In some embodiments, the pocket 47 extends to the lateral edge of the chassis and creates channels for facilitating the flow of runny bowel movement. This open channel area can be sealed by any suitable bonding technique such as glue, mechanical bonds, thermal bonds, or the like.

In some embodiments, the pocket 47 can be used as an effective feature for a caregiver in applying the absorbent article easily on wearer. The pocket 47 can be used for inserting the fingers and spreading the absorbent article during application on the wearer, therefore providing ease of application. The lateral distance between the left and right pockets measures between about 120 mm and about 250 mm, or any range or distance within the range of about 120 mm to about 250 mm; in some embodiments, the lateral distance between the left and right pockets measures about 120 mm, about 150 mm, or about 200 mm; and in other embodiments the lateral distance between the left and right pockets is measured about 210 mm, or about 250 mm.

In another embodiment, the hydrophobic properties, such as Low Surface Tension Strikethrough or Hydro Head, can be increased in at least a portion of the pocket 47, in such a way that prevents exudates from leaking through the materials that comprise the pocket. Accordingly, this will maintain separation of the contained fecal material from the wearer. Increasing hydrophobic properties can be accomplished by applying coatings, inks, glues,

silicones, additional materials, or any combination thereof, or by any other means known in the art.

In one embodiment, the outer cuff 74 and inner cuff 71 are the same color. In one embodiment, the outer cuff 74 and inner cuff 71 are different colors. In one embodiment, there is an additional printing on one or more of the cuffs of the leg gasketing system 70. In embodiments with printing on both the inner and outer cuffs, the printing may be the same or different on each cuff.

In another embodiment, the leg gasketing system 70 includes a printed zone that outlines or defines at least a portion of the pocket 47 such that the benefit can be signaled prior to use.

In one embodiment, the outer cuff 74 comprises elastic members 77 positioned in a lateral array. As illustrated in FIGS. 2-4, the elastics 77, 78 are attached to the portion of the web of material that forms the outer cuff by elastics adhesive 79. In such an embodiment, the elastics are positioned between the web of material 90 and the backsheet 26. The outer cuff 74 may comprise at least two elastic members 77, at least three elastic members 77, at least four elastic members 77, at least five elastic members 77, or at least six elastic members 77. In some embodiments, the elastics adhesive 79 in the outer cuff 74 is present in the crotch region 37, but not present in the portion of the second waist region 38 that forms the leg gasketing system pocket 47.

In one embodiment, the inner cuff 71 comprises an array of elastic members 78 positioned in a lateral array between the inner cuff folded edge 72 and the inner cuff material edge 73. The elastics are attached to the portion of the web of material 90 that forms the inner cuff by elastics adhesive 79. In such an embodiment, the elastics are positioned between 1) the portion of the web of material between the inner cuff folded edge 72 and the inner cuff material edge 73, and 2) the portion of the web material between the inner cuff folded edge 72 and the outer cuff material edge 76. The inner cuff 71 may comprise at least one elastic member 78, at least two elastic members 78, at least three elastic members 78, at least four elastic members 78, or at least five elastic members 78. In one embodiment, the elastic members 78 may be disposed between the inner cuff folded edge 72 and the outer cuff material edge 76.

In one embodiment, the outer cuff 74 comprises at least one more elastic member 77 than the inner cuff 71 elastic member(s) 78. In one embodiment, the inner cuff material edge 73 is laterally outboard the outer cuff material edge 76.

In one embodiment, the elastic members 77 and 78 are spaced at least 2mm apart from one edge of the member to the other edge of the member, optionally at least 3mm apart; optionally at least 3.5mm apart; optionally at least 4mm apart; optionally at least 4.5mm apart; optionally at least 5mm apart; optionally at least 5.5mm apart; optionally at least 6mm apart; optionally at least 6.5mm apart; optionally at least 7mm apart; optionally at least 7.5mm apart; optionally at least 8mm apart; optionally at least 8.5mm apart; optionally at least 9mm apart; optionally at least 9.5mm apart; optionally at least 10mm apart; optionally at least 10.5mm apart; optionally at least 11mm apart; optionally at least 11.5mm apart; optionally at least 12mm apart. In one embodiment, the outermost elastic members 77 and 78 are less than about 2mm from the outer cuff material edge 76 and inner cuff material edge 73; optionally less than about 1.5mm, less than about 1mm.

In one embodiment, the outer cuff 74 has four elastic members 77 that are about 4mm apart. The outer cuff 74 may have four elastic members that are about 2mm/7mm/2mm apart. The outer cuff 74 may have three elastic members 77 that are about 6mm apart. The outer cuff 74 may have two elastic members that are about 12mm apart. The outer cuff 74 may have two elastic members that are about 3mm/6mm/3mm apart, as spaced from the outer cuff material edge 76. In any embodiment, the elastic members may be about 2mm from the outer cuff material edge 76, optionally about 0mm from the outer cuff material edge.

In one embodiment, the height of the inner cuff 71 is at least about 10mm, at least about 20mm, at least about 30mm, at least about 32mm, at least about 35mm, at least about 38mm. In one embodiment, the height of the outer cuff 74 is at least about 15mm, at least about 23mm, at least about 25mm, at least about 27mm, at least about 30mm. The height of the inner cuff is measured from inner cuff folded edge 72 to the first point of connection to a material beyond the inner cuff material edge 73 in the crotch region. The outer cuff height is measured from the outer cuff material edge 76 to the first point of connection the inner cuff 71 has to a material beyond the inner cuff material edge 73 in the crotch region. Thus, the inner and outer cuffs are measured from their respective edges (inner cuff folded edge 72 and

outer cuff material edge 76) to the point where the inner cuff is connected to the first material beyond the inner cuff material edge.

In another embodiment, the descriptions of the invention including the pocket 47 and opening 51 that allow for trapping exudates can be used in conjunction with an article that does not contain an absorbent core. This is useful for a product that is designed to be used in the medical industry as it can enable the collection of exudates for analysis easier without the exudates being absorbed into the product.

CONSTRUCTION MATERIALS:

The leg gasketing system 70 may be manufactured from a wide variety of materials such as polypropylene, polyester, rayon, nylon, foams, plastic films, formed films, and elastic films. The leg gasketing system 70 may also include absorbent materials including absorbent glue, if desired. A number of manufacturing techniques may be used to manufacture the leg gasketing system 70. For example, the leg gasketing system 70 may be woven, non-woven, spunbonded, carded, or the like.

In one embodiment, at least one material of the leg gasketing system 70 is made from a substantially liquid impervious material. The material may be selected from the group consisting of an SMS nonwoven, SMMS nonwoven material, or a nonwoven component layer comprising “N-fibers”.

Various nonwoven fabric webs may comprise spunbond, meltblown, spunbond (“SMS”) webs comprising outer layers of spunbond thermoplastics (e.g., polyolefins) and an interior layer of meltblown thermoplastics. In one embodiment of the present invention, the leg gasketing cuff 70 comprises a nonwoven component layer having fine fibers (“N-fibers”) with an average diameter of less than 1 micron (an “N-fiber layer”) may be added to, or otherwise incorporated with, other nonwoven component layers to form a nonwoven web of material. In some embodiments, the N-fiber layer may be used to produce a SNS nonwoven web or SMNS nonwoven web, for example.

The leg gasketing cuff 70 may comprise a first nonwoven component layer comprising fibers having an average diameter in the range of about 8 microns to about 30 microns, a second nonwoven component layer comprising fibers having a number-average

diameter of less than about 1 micron, a mass-average diameter of less than about 1.5 microns, and a ratio of the mass-average diameter to the number-average diameter less than about 2, and a third nonwoven component layer comprising fibers having an average diameter in the range of about 8 microns to about 30 microns. The second nonwoven component layer is disposed intermediate the first nonwoven component layer and the third nonwoven component layer.

The N-fibers may be comprised of a polymer, e.g., selected from polyesters, including PET and PBT, polylactic acid (PLA), alkyds, polyolefins, including polypropylene (PP), polyethylene (PE), and polybutylene (PB), olefinic copolymers from ethylene and propylene, elastomeric polymers including thermoplastic polyurethanes (TPU) and styrenic block-copolymers (linear and radial di- and tri-block copolymers such as various types of Kraton), polystyrenes, polyamides, PHA (polyhydroxyalkanoates) and e.g. PHB (polyhydroxybutyrate), and starch-based compositions including thermoplastic starch, for example. The above polymers may be used as homopolymers, copolymers, e.g., copolymers of ethylene and propylene, blends, and alloys thereof. The N-fiber layer may be bonded to the other nonwoven component layers by any suitable bonding technique, such as the calender bond process, for example, also called thermal point bonding.

In some embodiments, the use of an N-fiber layer in a nonwoven web may provide a low surface tension barrier that is as high as other nonwoven webs that have been treated with a hydrophobic coating or a hydrophobic melt-additive, and still maintain a low basis weight (e.g., less than 15 gsm or, alternatively, less than 13 gsm). The use of the N-fiber layer may also provide a soft and breathable (i.e., air permeable) nonwoven material that, at least in some embodiments, may be used in single web layer configurations in applications which previously used double web layer configurations. Furthermore, in some embodiments, the use of the N-fiber layer may at least reduce the undesirable migration of hydrophilic surfactants toward the web and, therefore, may ultimately result in better leak protection for an associated absorbent article. Also, when compared to an SMS web having a similar basis weight, the use of a nonwoven web comprising the N-fiber layer may decrease the number of defects (i.e., holes or pinholes through the mechanical bond site) created during the

mechanical bonding process. N-fibers are further discussed in WO 2005/095700 and US Patent Application Serial No. 13/024,844.

In one embodiment, the inner cuff 71 web of material has a hydrostatic head of greater than about 2mbar, greater than about 3mbar, greater than about 4mbar. In one
5 embodiment, the outer cuff 74 web of material has a hydrostatic head of less than about 200mbar, less than about 100mbar, less than about 75mbar, less than about 50mbar, less than about 25mbar, less than about 15mbar.

In one embodiment, the folded outer cuff web of material has a basis weight of 10gsm; optionally 13 gsm; optionally 15gsm; optionally 18 gsm.

10 In one embodiment, the inner cuff 71 web of material has an opacity of from about 15% to about 50% hunter opacity; optionally from about 20% to about 45% hunter opacity. In one embodiment, the outer cuff 74 web of material has an opacity of from about 45% to about 75% hunter opacity; optionally from about 50% to about 70% hunter opacity; optionally less than about 75% hunter opacity; optionally less than about 70% hunter opacity.

15 In one embodiment, the inner cuff 71 web of material has an air permeability of less than about $50 \text{ m}^3/\text{m}^2/\text{min}$; optionally less than about $45 \text{ m}^3/\text{m}^2/\text{min}$. In one embodiment, the outer cuff 74 web of material has an air permeability of greater than about $5 \text{ m}^3/\text{m}^2/\text{min}$; optionally greater than about $10 \text{ m}^3/\text{m}^2/\text{min}$; optionally greater than about $15 \text{ m}^3/\text{m}^2/\text{min}$; optionally greater than about $20 \text{ m}^3/\text{m}^2/\text{min}$.

20 In one embodiment, the inner cuff 71 web of material has a WVTR of less than about $5500 \text{ g/m}^2/24 \text{ hrs}$; optionally less than about $5400 \text{ g/m}^2/24 \text{ hrs}$. In one embodiment, the outer cuff 74 web of material has a WVTR of greater than about $4250 \text{ g/m}^2/24 \text{ hrs}$; optionally greater than about $4500 \text{ g/m}^2/24 \text{ hrs}$; optionally greater than about $5000 \text{ g/m}^2/24 \text{ hrs}$; optionally greater than about $5250 \text{ g/m}^2/24 \text{ hrs}$; optionally greater than about $5500 \text{ g/m}^2/24$
25 hrs.

The gasketing cuffs 70 may be substantially inelastic or may be elastically extensible to dynamically fit at the wearer's leg. The gasketing cuff 70 may be formed by one or more elastic members 77 and 78 (such as elastic strands) operatively joined to the topsheet 24, backsheet 26, or any other suitable substrate used in the formation of the absorbent article 20.

30 Suitable gasketing cuff construction is further described in U.S. Patent No. 3,860,003

The inner barrier cuff 71 may span the entire longitudinal length of the absorbent article 20. The inner barrier cuff 71 may be formed by a flap and an elastic member 78 (such as elastic strands). The inner barrier cuff 71 may be a continuous extension of any of the existing materials or elements that form the absorbent article 20.

5 The inner barrier cuff 71 may comprise a variety of substrates such as plastic films and woven or nonwoven webs of natural fibers (e.g., wood or cotton fibers), synthetic fibers (e.g., polyester or polypropylene fibers), or a combination of natural and synthetic fibers. In certain embodiments, the flap may comprise a nonwoven web such as spunbond webs, meltblown webs, carded webs, and combinations thereof (e.g., spunbond-meltblown
10 composites and variants). Laminates of the aforementioned substrates may also be used to form the flap. A particularly suitable flap may comprise a nonwoven available from BBA Fiberweb, Brentwood, TN as supplier code 30926. A particularly suitable elastic member is available from Invista, Wichita, KS as supplier code T262P. Further description of diapers having inner barrier cuffs and suitable construction of such barrier cuffs may be found in U.S.
15 Patent Nos. 4,808,178 and 4,909,803. The elastic member 78 may span the longitudinal length of the inner barrier cuff 71. In other embodiments, the elastic member 78 may span at least the longitudinal length of the inner barrier cuff 71 within the crotch region 37. It is desirable that the elastic member 78 exhibits sufficient elasticity such that the inner barrier cuff 71 remains in contact with the wearer during normal wear, thereby enhancing the barrier
20 properties of the inner barrier cuff 71. The elastic member 78 may be connected to the flap at opposing longitudinal ends. In certain embodiments, the flap may be folded over onto itself so as to encircle the elastic member 78.

The inner barrier cuff 71 and/or outer cuff 74 may be treated, in full or in part, with a lotion, as described above with regard to topsheets, or may be fully or partially coated with a
25 hydrophobic surface coating as detailed in U.S. Application No. 11/055,743, which was filed February 10, 2005. Hydrophobic surface coatings usefully herein may include a nonaqueous, solventless, multicomponent silicone composition. The silicone composition includes at least one silicone polymer and is substantially free of aminosilicones. A particularly suitable hydrophobic surface coating is available from Dow Corning MI, Salzburg as supplier code
30 0010024820.

EXAMPLES:

		Opacity		Air Permeability		WVTR		Hydrohead		32 dyne Strikethrough	
		%		m ³ /m ² /min		g/m ² /24 hrs		mbar		sec	
Product	Lot No.	Outer Cuff	Inner Cuff	Outer Cuff	Inner Cuff	Outer Cuff	Inner Cuff	Outer Cuff	Inner Cuff	Outer Cuff	Inner Cuff
Prototype N-Fiber	NA	58.7 ± 2.2	37.6 ± 3.2	26.8 ± 5.6	36.9 ± 4.6	5905 ± 129	5224 ± 87	16.8 ± 2.1	12.3 ± 1.3	21.0 ± 3.5	9.2 ± 1.5
Prototype SMS	NA	65.8 ± 1.8	39.0 ± 1.0	65.6 ± 11.5	38.5 ± 3.8	5748 ± 276	5193 ± 145	16.3 ± 1.8	10.0 ± 1.7	15.6 ± 1.9	7.6 ± 1.4
Pampers BabyDry	0089U011390422	80.1 ± 0.4	38.8 ± 3.8	2.1 ± 1.0	56.1 ± 6.3	4063 ± 67	5252 ± 157	> 200	6.7 ± 0.8	> 100	10.1 ± 0.5
Luvs	1047U011390518	85.3 ± 1.2	36.4 ± 3.4	3.1 ± 1.9	90.2 ± 9.3	304 ± 144	5244 ± 26	>200	6.5 ± 1.0	> 100	11.8 ± 1.4
Huggies Little Movers	BI006912B	80.1 ± 1.0	45.4 ± 4.2	2.6 ± 0.4	45.0 ± 15.7	3673 ± 190	5581 ± 90	>200	8.3 ± 1.3	> 100	14.3 ± 3.5
Huggies Supreme	NM1275U1F0755	72.7 ± 2.2	53.6 ± 2.3	4.4 ± 1.1	145.2 ± 23.2	375 ± 77	5688 ± 85	>200	9.2 ± 1.8	> 100	14.6 ± 3.1

* Results are expressed as the average ± one standard deviation

5 * Prototype N-Fiber is a 13 gsm SMNS available from Polymer Group Inc

* Prototype SMS is a 15 gsm SMS (Spunbonded-Meltblown-Spunbonded) nonwoven available from Fibertex under the Comfort Line

TEST METHODS:

10 Opacity Method

Opacity is measured using a 0° illumination/45° detection, circumferential optical geometry, spectrophotometer with a computer interface such as the HunterLab LabScan XE running Universal Software (available from Hunter Associates Laboratory Inc., Reston, VA) or equivalent instrument. Instrument calibration and measurements are made using the standard white and black calibration plates provided by the vendor. All testing is performed in a room maintained at 23 ± 2 °C and 50 ± 2 % relative humidity.

The spectrophotometer is conFIG.d for the XYZ color scale, D65 illuminant, 10° standard observer, with UV filter set to nominal. The instrument is standardized according to the manufacturer's procedures using the 0.7 inch port size and 0.5 inch area view. After calibration, the software is set to the Y opacity procedure which prompts the operator to
5 cover the sample with either the white or black calibration tile during the measurement.

Articles are pre-conditioned at $23\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ and $50\% \pm 2\%$ relative humidity for two hours prior to testing. To obtain a specimen, the article is stretched flat on a bench, body facing surface upward, and the total longitudinal length of the article is measured. A testing site on the inner and outer cuffs is selected at the longitudinal midpoint of the article. Using
10 scissors, a test specimen is cut 60 mm long by the entire height of the inner cuff centered at the longitudinal midpoint of the left cuff. Next, a second test specimen is cut, this time from the outer cuff, 60 mm long by the entire height of the outer cuff, centered at the longitudinal midpoint of the left outer cuff. In like fashion, inner and outer cuff specimens are prepared from the cuffs on the right side of the article.

The specimen is placed over the measurement port. The specimen should completely cover the port with the surface corresponding to the inner-facing surface of the cuff directed toward the port. The specimen is gently extended until taut in its longitudinal direction so that the cuff lies flat against the port plate. Adhesive tape is applied to secure the cuff to the port plate in its extended state for testing. Tape should not cover any portion of the
20 measurement port. The specimen is then covered with the white standard plate. A reading is taken, then the white tile is removed and replaced with the black standard tile without moving the specimen. A second reading is taken, and the opacity is calculated as follows:

$$\text{Opacity} = (\text{Y value}_{(\text{black backing})} / \text{Y value}_{(\text{white backing})}) \times 100$$

Specimens from five identical articles (10 inner cuff (5 left and 5 right) and 10 outer
25 cuff (5 left and 5 right)) are analyzed and their opacity results recorded. The average opacity for the inner cuffs and the outer cuffs are calculated and report separately, each to the nearest 0.01%.

Water Vapor Transmission Rate Method

Water Vapor Transmission Rate (WVTR) is measured using the wet cup approach. A cylindrical cup is filled with water, maintaining a constant headspace between the water surface and a specimen sealed over the cup's upper opening. The vapor loss is measured gravimetrically after heating the assembled cup for a specified time in an oven. All testing is performed in a room maintained at $23\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ and $50\% \pm 2\%$ relative humidity.

Articles are preconditioned at $23\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ and $50\% \pm 2\%$ relative humidity for two hours prior to testing. The article stretched flat on a bench, body facing surface upward, and the total longitudinal length of the article is measured. A testing site on the inner and outer cuffs is selected at the longitudinal midpoint of the article. Using scissors, a test specimen is cut 60 mm long by the entire height of the inner cuff centered at the longitudinal midpoint of the left cuff. Next, a second test specimen is cut, this time from the outer cuff, 60 mm long by the entire height of the outer cuff, centered at the longitudinal midpoint of the left outer cuff. In like fashion, inner and outer cuff specimens from the cuffs on the right side of the article are prepared.

Glass straight walled, cylindrical vials, 95 mm tall with a 17.8 mm internal diameter at the opening are used as WVTR test vials. Each test vial is filled with distilled water accurately to a level $25.0\text{ mm} \pm 0.1\text{ mm}$ from the upper lip of the vial's opening. The specimen is placed, inner-facing surface of the cuff downward, over the vial's opening. The specimen is gently pulled taut and secured around the vial's circumference with an elastic band. The specimen is further sealed by wrapping Teflon tape around the vial's circumference. A preferred Teflon tape is a thread sealant tape 0.25" wide available from McMaster Carr (cat. No. 4591K11) or equivalent. The Teflon tape is applied up to the top edge of the vial but should not cover any portion of the vial's opening. The mass of the vial assembly (vial + specimen + sealing tape) is weighed to the nearest 0.0001 gram. This is the starting mass.

The vial assemblies are placed upright in a mechanical convection oven (e.g. Lindberg/BlueM oven available from ThermoScientific or equivalent) maintained at $38 \pm 1\text{ }^{\circ}\text{C}$ for 24 hours, taking care to avoid contact between the water in the vials and the specimens. After 24 hours has elapsed, the vial assemblies are removed from the oven and

allowed to come to room temperature. The mass of each vial assembly is measured to the nearest 0.0001 gram. This is the final mass.

The WVTR is calculated using the following equation:

$$\text{WVTR (g/m}^2\text{/24 hrs)} = ([\text{starting mass (g)} - \text{final mass (g)}] / \text{surface area (m}^2\text{)}) / 24 \text{ hrs}$$

5 Specimens from five identical articles (10 inner cuff (5 left and 5 right) and 10 outer cuff (5 left and 5 right)) are analyzed and their WVTR results recorded. The average WVTR for the inner cuffs and the outer cuffs are each reported separately to the nearest 1 g/m²/24 hrs.

10 Air Permeability Test

 Air permeability is tested using a TexTest FX3300 Air Permeability Tester (available from Advanced Testing Instruments, Greer, SC) with a custom made 1 cm² circular aperture (also available from Advanced Testing Instruments) or equivalent instrument. The instrument is calibrated according to the manufacturer's procedures. All testing is performed
15 in a room maintained at 23 °C ± 2 C° and 50 % ± 2 % relative humidity.

 The articles are pre-conditioned at 23 °C ± 2 C° and 50% ± 2% relative humidity for two hours prior to testing. To obtain a specimen, the article is stretched flat on a bench, body facing surface upward, and the total longitudinal length of the article is measured. A testing site on the inner and outer cuffs is selected at the longitudinal midpoint of the article. Using
20 scissors, a test specimen is cut 60 mm long by the entire height of the inner cuff centered at the longitudinal midpoint of the left cuff. Next, a second test specimen is cut, this time from the outer cuff, 60 mm long by the entire height of the outer cuff, centered at the longitudinal midpoint of the left outer cuff. In like fashion, inner and outer cuff specimens are prepared from the cuffs on the right side of the article.

25 The specimen is centered over the measurement port. The specimen should completely cover the port with the surface corresponding to the inward-facing surface of the cuff directed toward the port. The specimen is gently extended in its longitudinal direction until taut so that the cuff lies flat across the port. Adhesive tape is applied to secure the cuff across the port in its extended state for testing. Tape should not cover any portion of the
30 measurement port. The test pressure is set to allow air to pass through the specimen. For

non-woven cuffs the pressure is typically set for 125 Pa and for cuffs containing films typically 2125 Pa is used. The sample ring is closed and the measuring range is adjusted until the range indicator shows green to indicate that the measurement is within the accepted limits of the instrument. The air permeability is recorded to the nearest $0.1 \text{ m}^3/\text{m}^2/\text{min}$.

5

Hydrostatic Head Test

Hydrostatic head is tested using a TexTest FX3000 Hydrostatic Head Tester (available from Advanced Testing Instruments, Greer, SC) with a custom made 1.5 cm^2 circular measurement port (also available from Advanced Testing Instruments). Two annular sleeve rings, the same dimensions as the gaskets around the measurement ports, are cut from the standard protective sleeves for fine nonwovens (part FX3000-NWH, available from Advanced Testing Instruments). The sleeve rings are then adhered with two-sided adhesive tape to the sample facing surfaces of the upper and lower gaskets of the TexTest instrument to protect the specimen during clamping. Standardize the instrument according to the manufacturer's procedures. All testing is performed in a room maintained at about $23 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$ and about $50 \% \pm 2 \%$ relative humidity.

Precondition the articles at about $23 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$ and about $50\% \pm 2\%$ relative humidity for two hours prior to testing. To obtain a specimen, lay the article stretched flat on a bench, body facing surface upward, and measure the total longitudinal length of the article. Select a testing site on the inner and outer cuffs, at the longitudinal midpoint of the article. Using scissors cut a test specimen 70 mm long by the entire height of the inner cuff centered at the longitudinal midpoint of the left cuff. Next cut a second test specimen, this time from the outer cuff, 70 mm long by the entire height of the outer cuff, centered at the longitudinal midpoint of the left outer cuff. In like fashion, prepare inner and outer cuff specimens from the cuffs on the right side of the article.

Place the specimen centered over the port of the upper test head. The specimen should completely cover the port with the surface corresponding to the outward-facing surface of the cuff directed toward the port (inner-facing surface will then be facing the water). Gently extend the specimen taut in its longitudinal direction so that the cuff lies flat

against the upper test plate. Adhesive tape is applied to secure the cuff to the test plate in its extended state for testing. Tape should not cover any portion of the measurement port.

Fill the TexTest syringe with distilled water, adding the water through the measurement port of the lower test plate. The water level should be filled to the top of the lower gasket. Mount the upper test head onto the instrument and lower the test head to make a seal around the specimen. The test speed is set to 3 mbar/min for samples that have a hydrostatic head of 50 mbar or less and a speed of 60 mbar/min for samples with a hydrostatic head above 50 mbar. Start the test and observe the specimen surface to detect water droplets penetrating the surface. The test is terminated when one drop is detected on the surface of the specimen or the pressure exceeds 200 mbar. Record the pressure to the nearest 0.5 mbar or record as >200 mbar if there was no penetration detected.

A total of five identical articles (10 inner cuff and 10 outer cuff specimens) are analyzed and their hydrostatic head results recorded. Calculate and report the average hydrostatic head for the inner cuffs and the outer cuffs and report each to the nearest 0.1 mbar.

Low Surface Tension Fluid Strikethrough Time Test

The low surface tension fluid strikethrough time test is used to determine the amount of time it takes a specified quantity of a low surface tension fluid, discharged at a prescribed rate, to fully penetrate a sample of a web (and other comparable barrier materials) which is placed on a reference absorbent pad.

For this test, the reference absorbent pad is 5 plies of Ahlstrom grade 989 filter paper (10cm x 10cm) and the test fluid is a 32 mN/m low surface tension fluid.

This test is designed to characterize the low surface tension fluid strikethrough performance (in seconds) of webs intended to provide a barrier to low surface tension fluids, such as runny BM, for example.

Lister Strikethrough Tester: The instrumentation is like described in EDANA ERT 153.0-02 section 6 with the following exception: the strike-through plate has a star-shaped orifice of 3 slots angled at 60 degrees with the narrow slots having a 10.0 mm length and a 1.2mm slot width. This equipment is available from Lenzing Instruments (Austria) and from

W. Fritz Metzger Corp (USA). The unit needs to be set up such that it does not time out after 100 seconds.

Reference Absorbent Pad: Ahlstrom Grade 989 filter paper, in 10 cm x 10 cm areas, is used. The average strikethrough time is 3.3 ± 0.5 seconds for 5 plies of filter paper using the

32 mN/m test fluid and without the web sample. The filter paper may be purchased from Empirical Manufacturing Company, Inc. (EMC) 7616 Reinhold Drive Cincinnati, OH 45237.

Test Fluid: The 32 mN/m surface tension fluid is prepared with distilled water and 0.42 $\pm$ 0.001 g/liter Triton-X 100. All fluids are kept at ambient conditions.

Electrode-Rinsing Liquid: 0.9% sodium chloride (CAS 7647-14-5) aqueous solution (9g NaCl per 1L of distilled water) is used.

Test Procedure

- All testing is performed in a room maintained at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about 50 % $\pm$ 2 % relative humidity. The Ahlstrom filter paper and test articles are conditioned in this controlled environment for 24 hours and 2 hours before testing.

All testing is performed in a room maintained at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about 50 % $\pm$ 2 % relative humidity. The Ahlstrom filter paper and test articles are conditioned in this controlled environment for 24 hours and 2 hours before testing.

- Ensure that the surface tension is 32 mN/m $\pm$ 1 mN/m. Otherwise remake the test fluid.

- Prepare the 0.9% NaCl aqueous electrode rinsing liquid.

- Ensure that the strikethrough target (3.3 ± 0.5 seconds) for the Reference Absorbent Pad is met by testing 5 plies with the 32 mN/m test fluid as follows:

- Neatly stack 5 plies of the Reference Absorbent Pad onto the base plate of the strikethrough tester.

- Place the strikethrough plate over the 5 plies and ensure that the center of the plate is over the center of the paper. Center this assembly under the dispensing funnel.

- Ensure that the upper assembly of the strikethrough tester is lowered to the pre-set stop point.

- Ensure that the electrodes are connected to the timer.
 - Turn the strikethrough tester “on” and zero the timer.
 - Using the 5 mL fixed volume pipette and tip, dispense 5 mL of the 32 mN/m test fluid into the funnel.
- 5 - Open the magnetic valve of the funnel (by depressing a button on the unit, for example) to discharge the 5 mL of test fluid. The initial flow of the fluid will complete the electrical circuit and start the timer. The timer will stop when the fluid has penetrated into the Reference Absorbent Pad and fallen below the level of the electrodes in the strikethrough plate.
- 10 - Record the time indicated on the electronic timer.
- Remove the test assembly and discard the used Reference Absorbent Pad. Rinse the electrodes with the 0.9% NaCl aqueous solution to “prime” them for the next test. Dry the depression above the electrodes and the back of the strikethrough plate, as well as wipe off the dispenser exit orifice and the bottom plate or table surface upon which the filter paper is
- 15 laid.
- Repeat this test procedure for a minimum of 3 replicates to ensure the strikethrough target of the Reference Absorbent Pad is met. If the target is not met, the Reference Absorbent Pad may be out of spec and should not be used.
- After the Reference Absorbent Pad performance has been verified, nonwoven web
- 20 samples may be tested.
- Precondition the test articles at about $23\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ and about $50\% \pm 2\%$ relative humidity for two hours prior to testing. To obtain a specimen, lay the article stretched flat on a bench, body facing surface upward, and measure the total longitudinal length of the article. Select a testing site on the inner and outer cuffs, at the longitudinal midpoint of the article.
- 25 Using scissors cut a test specimen 70 mm long by the entire height of the inner cuff centered at the longitudinal midpoint of the left cuff. Next cut a second test specimen, this time from the outer cuff, 70 mm long by the entire height of the outer cuff, centered at the longitudinal midpoint of the left outer cuff. In like fashion, prepare inner and outer cuff specimens from the cuffs on the right side of the article.

- Place the specimen centered over the port of the strike through plate. The specimen should completely cover the port with the surface corresponding to the body-facing surface of the cuff directed toward the port. Gently extend the specimen taut in its longitudinal direction so that the cuff lies flat against the upper test plate. Adhesive tape is applied to secure the cuff to the test plate in its extended state for testing. Tape should not cover any portion of the measurement port.

- Ensure that the upper assembly of the strikethrough tester is lowered to the pre-set stop point.

- Ensure that the electrodes are connected to the timer. Turn the strikethrough tester “on” and zero the timer.

- Run as described above.

- Repeat this procedure for three articles. Average the six values and report as the 32 mN/m low surface tension strikethrough time to the nearest 0.1 seconds.

The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numeral values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm”.

All documents cited in the Detailed Description of the Invention are, in relevant part, incorporated herein by reference; the citation of any document is not to be construed as an admission that it is prior art with respect to the present invention. To the extent that any meaning or definition of a term in this written document conflicts with any meaning or definition of the term in a document incorporated by reference, the meaning or definition assigned to the term in this written document shall govern.

While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

All documents cited are, in relevant part, incorporated herein by reference; the citation of any document is not to be construed as an admission that it is prior art with respect to the present invention.

5 While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

CLAIMS

What is claimed is:

1. A disposable absorbent article for wearing about the lower torso of a wearer, the disposable absorbent article comprising: a first waist region, a second waist region, a crotch region disposed between the first and second waist regions; a first waist edge and a second waist edge; and a first longitudinal edge and a second longitudinal edge, the disposable absorbent article comprising:
 - 1.) a topsheet;
 - 2.) a backsheet;
 - 3.) an absorbent core disposed between the topsheet and the backsheet; and
 - 4.) a leg gasketing system, wherein the leg gasketing system comprises a web of material forming an inner cuff and a portion of an outer cuff;
wherein the inner cuff comprises an inner cuff folded edge and an inner cuff material edge and the outer cuff comprises an outer cuff material edge; such that the web of material is folded laterally outward to form the inner cuff folded edge;
wherein at least a portion of the web of material between the outer cuff material edge and the inner cuff folded edge is attached to the backsheet in the first waist region, the second waist region and the crotch region; and at least a portion of the web of material between the inner cuff folded edge and the outer cuff material edge is attached to the topsheet in the crotch region and the first waist region; and the web of material between the inner cuff folded edge and the outer cuff material edge is unattached to the topsheet in at least a portion of the second waist region, forming a leg gasketing system pocket, wherein the leg gasketing system pocket comprises an opening on an inboard longitudinal edge of the leg gasketing system pocket.
2. The disposable absorbent article according to Claim 1, wherein the opening of the leg gasketing system pocket measures between 5 mm and 100 mm in the longitudinal direction.

3. The disposable absorbent article according to any of the preceding claims, wherein the opening of the leg gasketing system pocket measures 75 mm in the longitudinal direction.
4. The disposable absorbent article according to any of the preceding claims, wherein the leg gasketing system pocket has an overall longitudinal length of between 5 mm and 200 mm in the longitudinal direction.
5. The disposable absorbent article according to any of the preceding claims, wherein the opening of the leg gasketing system pocket is between 1% and 75% of the overall longitudinal length of the leg gasketing system pocket.
6. The disposable absorbent article according to any of the preceding claims, wherein the leg gasketing system pocket has an overall lateral width of between 5 mm and 60 mm in the lateral direction.
7. The disposable absorbent article according to any of the preceding claims, wherein the leg gasketing system pocket has an overall lateral width of between 1 mm and about 20 mm in the lateral direction.
8. The disposable absorbent article according to any of the preceding claims, wherein the leg gasketing system pocket is free of elastic members.
9. The disposable absorbent article according to any of the preceding claims, wherein the leg gasketing system pocket contains one or more snap back elastic members.
10. The disposable absorbent article according to any of the preceding claims, wherein the leg gasketing system pocket has a second opening along the second waist edge of the absorbent article.
11. The disposable article according to any of the preceding claims, wherein the opening of the leg gasketing system pocket is a series of intermittent bonds.

12. The disposable absorbent article according to any of the preceding claims, wherein the leg gasketing system pocket has series of intermittent bonds along the second waist edge of the absorbent article.

1/3

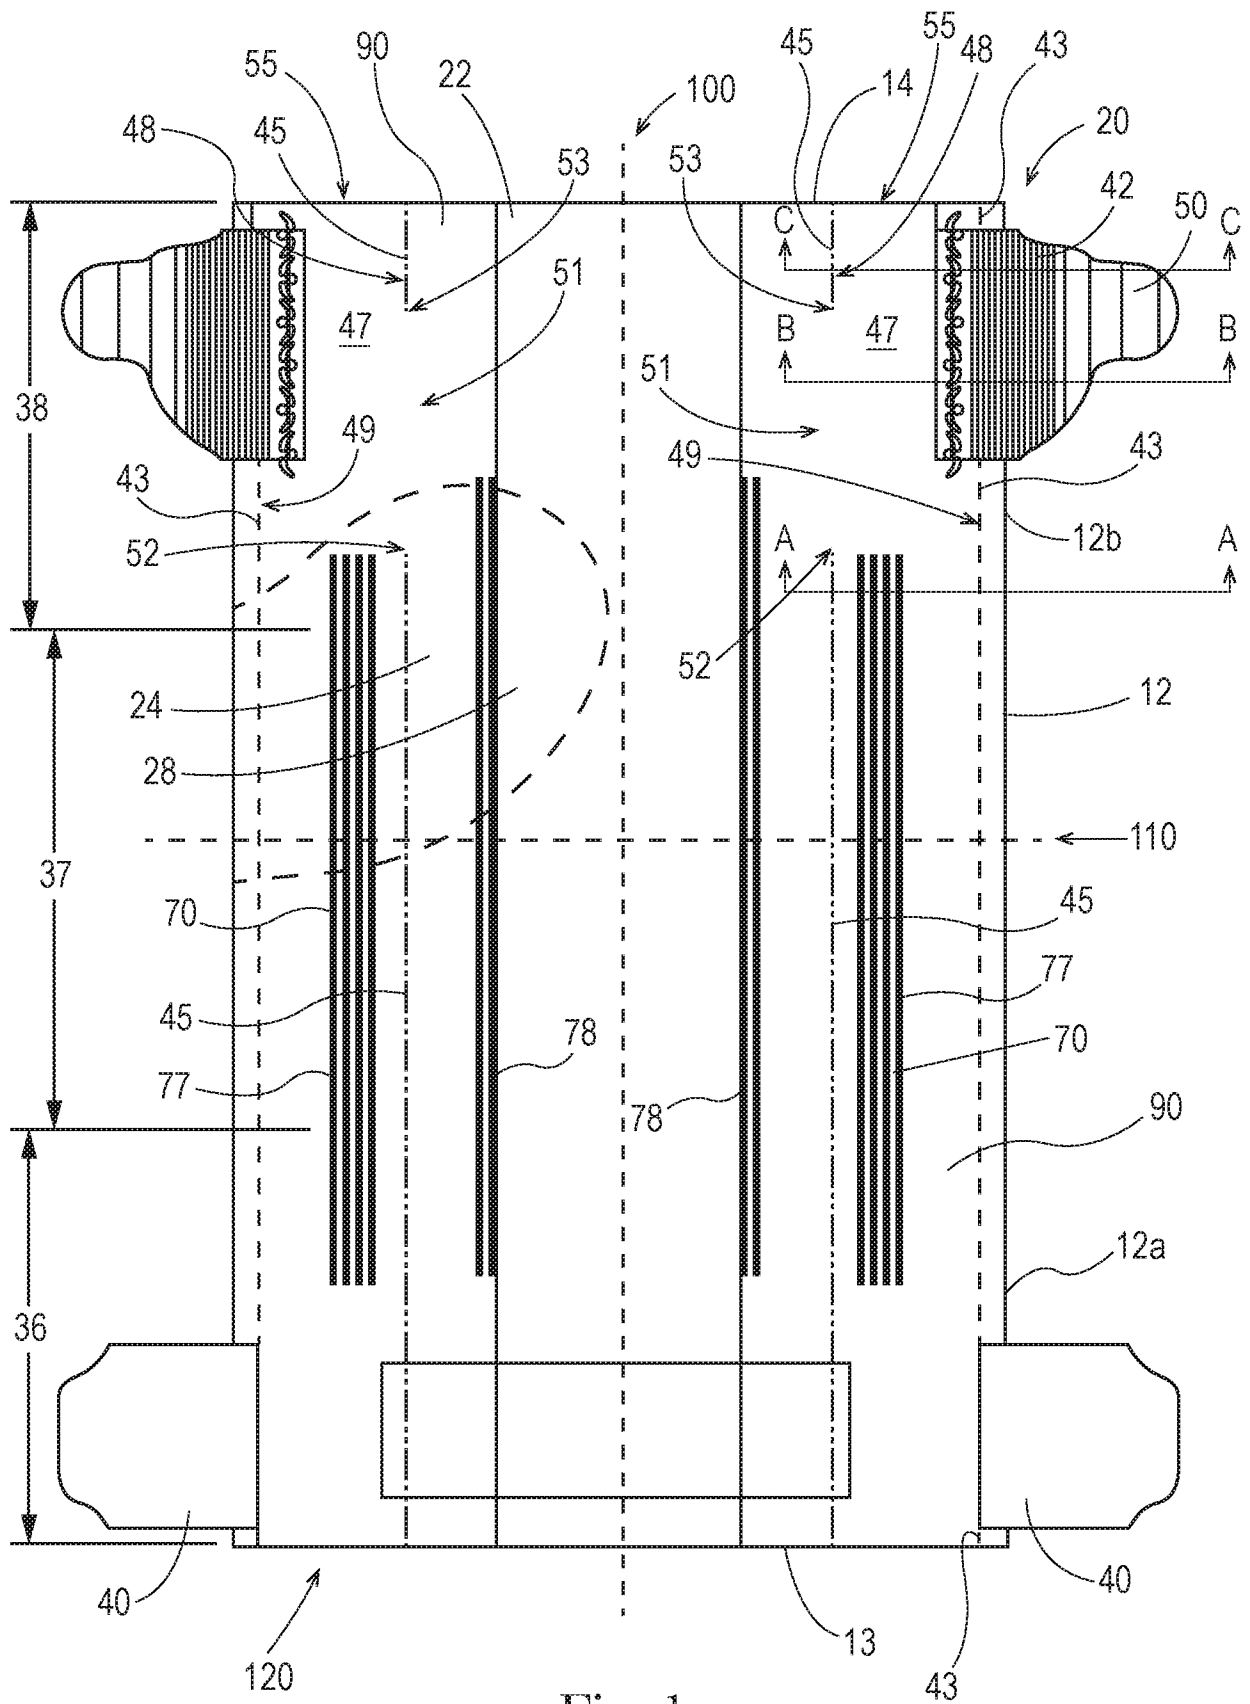


Fig. 1

2/3

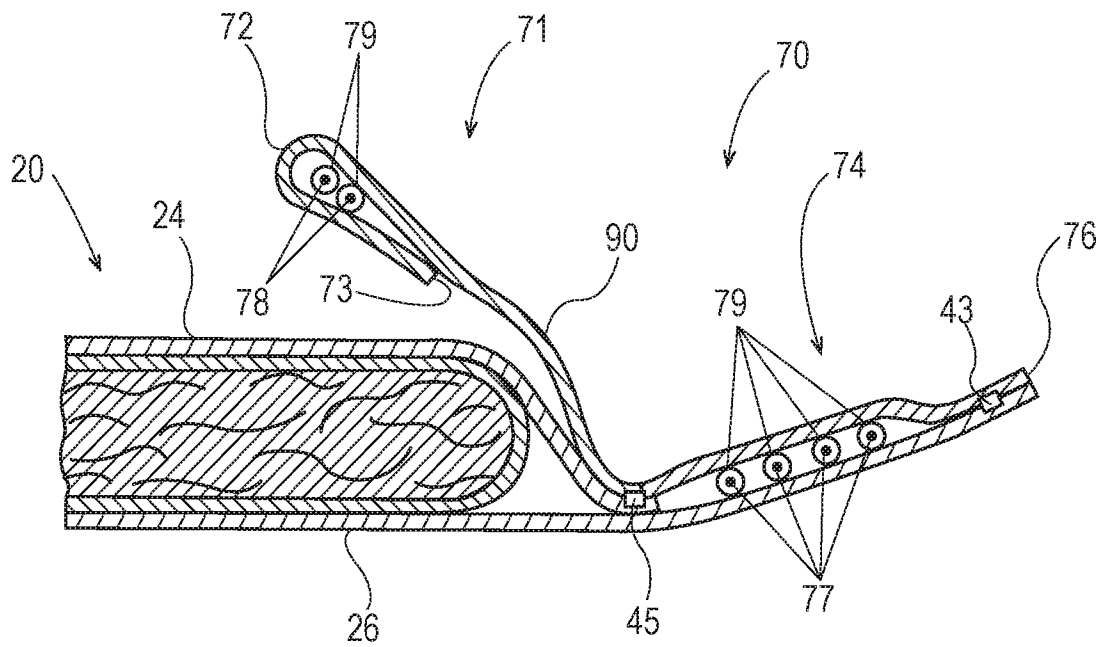


Fig. 2


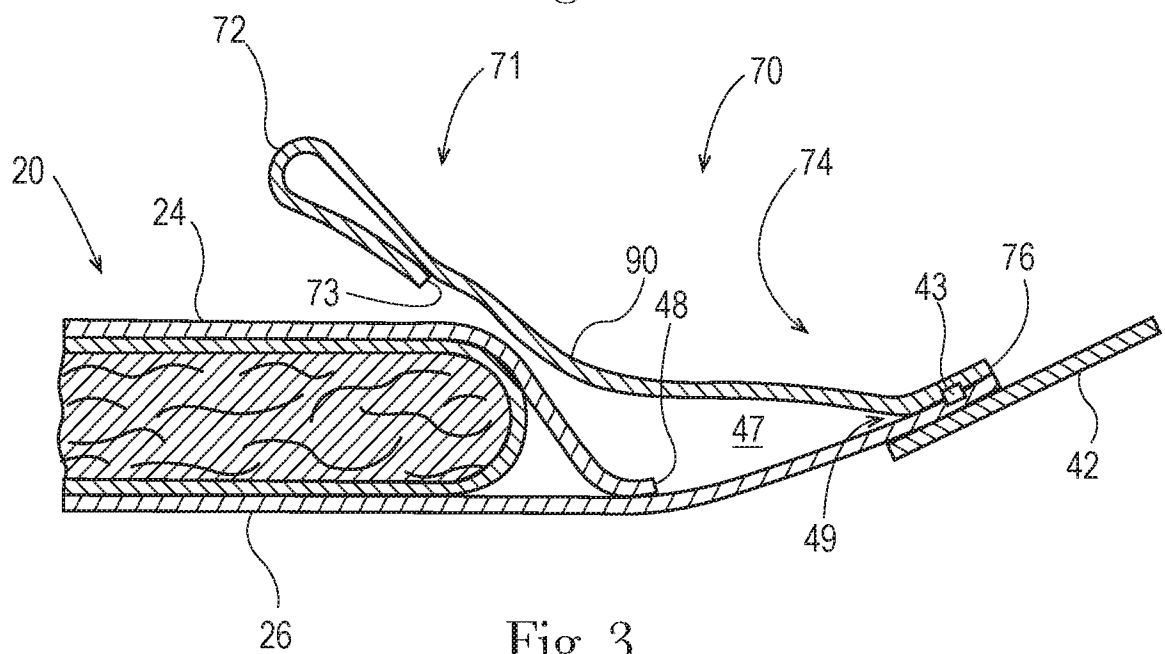


Fig. 3

3/3

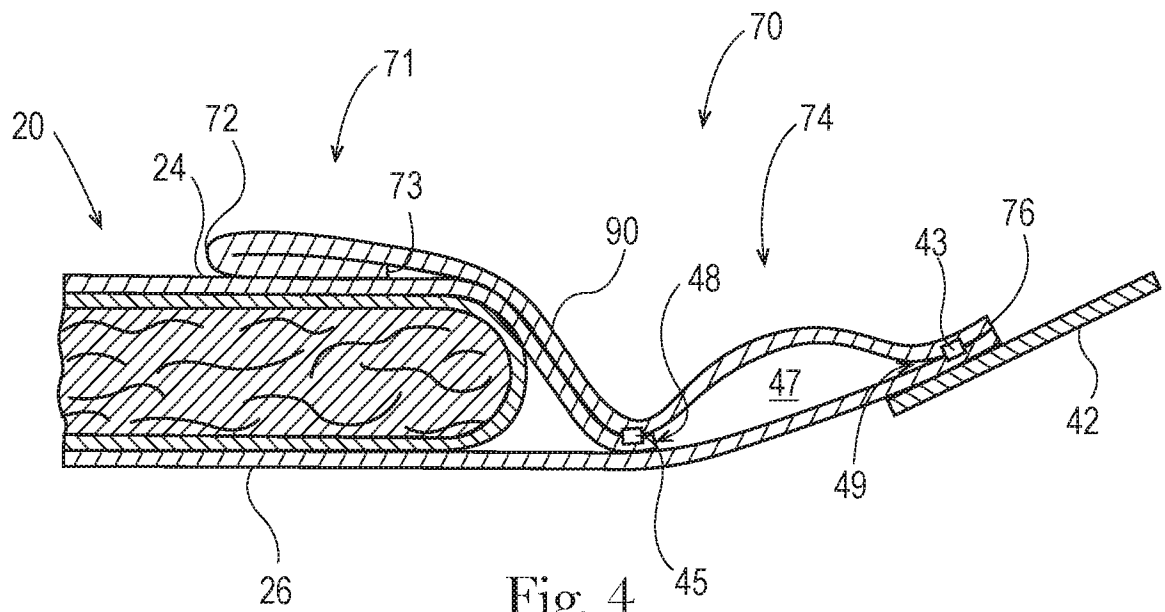

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/023078

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61F13/494 A61F13/495
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2000 288012 A (KAO CORP) 17 October 2000 (2000-10-17) paragraphs [0006], [0007], [0009], [0011], [0016]; figures 1-3 -----	1-7, 10-12
X	EP 1 101 470 A2 (UNI CHARM CORP [JP]) 23 May 2001 (2001-05-23) paragraphs [0017], [0018], [0022], [0023], [0027], [0030]; figures 1-5 -----	1-12
X	WO 2014/147879 A1 (LIVEDO CORP [JP]) 25 September 2014 (2014-09-25) figures 5-9 paragraphs [0065] - [0066] -----	1-8,11
A	JP 2014 012219 A (LIVEDO CORP) 23 January 2014 (2014-01-23) paragraphs [0040], [0043]; figures 4-7 ----- -/--	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 June 2016

Date of mailing of the international search report

30/06/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Beckert, Audrey

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/023078

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2007/015217 A1 (PROCTER & GAMBLE [US]; EHRNSPERGER BRUNO JOHANNES [US]; SAUER ANDREW J) 8 February 2007 (2007-02-08) figures 9, 10, 15 page 22, line 20 - page 23, line 13 page 24, line 6 - line 9 -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/023078

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2000288012 A	17-10-2000	JP 3953228 B2 JP 2000288012 A	08-08-2007 17-10-2000
EP 1101470 A2	23-05-2001	AU 781857 B2 AU 7166100 A CA 2326208 A1 CN 1304712 A CN 101239016 A DE 60019235 D1 DE 60019235 T2 EP 1101470 A2 ID 28428 A JP 3595471 B2 JP 2001145661 A KR 20010051747 A MY 122493 A SG 83827 A1 TW 535571 U US 6682515 B1	16-06-2005 24-05-2001 19-05-2001 25-07-2001 13-08-2008 12-05-2005 26-01-2006 23-05-2001 24-05-2001 02-12-2004 29-05-2001 25-06-2001 29-04-2006 16-10-2001 01-06-2003 27-01-2004
WO 2014147879 A1	25-09-2014	CN 204971876 U JP 2014180345 A KR 20150132184 A TW 201440739 A WO 2014147879 A1	20-01-2016 29-09-2014 25-11-2015 01-11-2014 25-09-2014
JP 2014012219 A	23-01-2014	JP 5681770 B2 JP 2014012219 A	11-03-2015 23-01-2014
WO 2007015217 A1	08-02-2007	CA 2616630 A1 CN 101237841 A EP 1909724 A1 JP 4739416 B2 JP 2009502407 A US 2007032772 A1 US 2012035575 A1 WO 2007015217 A1	08-02-2007 06-08-2008 16-04-2008 03-08-2011 29-01-2009 08-02-2007 09-02-2012 08-02-2007