



(51) International Patent Classification:
A61B 17/70 (2006.01)

(21) International Application Number:
PCT/US2010/024091

(22) International Filing Date:
12 February 2010 (12.02.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/152,610 13 February 2009 (13.02.2009) US
12/432,141 29 April 2009 (29.04.2009) US

(71) Applicant (for all designated States except US): **DEPUY SPINE, INC.** [US/US]; 325 Paramount Drive, Raynham, MA 02767-0350 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MOUMENE, Missoum** [US/US]; 120 Forest Avenue, Newton, MA 02465 (US). **AFSHARI, Payman** [US/US]; 522 Bay Road, South Easton, MA 02375 (US). **FANGER, Jonathan** [US/US]; 70 Forest Street, Raynham, MA 02767 (US). **FLAHERTY, Kevin** [US/US]; 38 Taft Avenue, Mendon, MA 01756 (US).

(74) Agents: **JOHNSON, Philip, S.** et al.; Johnson & Johnson, One Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: DUAL SPRING POSTERIOR DYNAMIC STABILIZATION DEVICE WITH ELONGATION LIMITING ELASTOMER

FIG. 4B

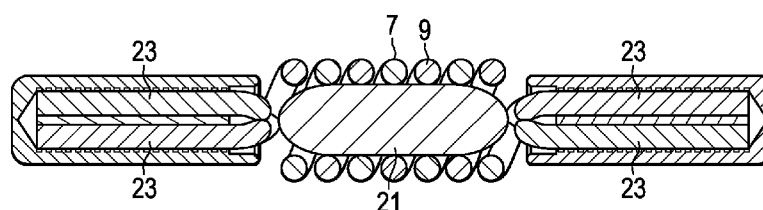

(57) Abstract: A Posterior Dynamic Stabilization device that comprises a dual lead titanium spring, a polymer core component disposed within the spring, and a bone anchor attachment feature, wherein the dual rod comprises an intermediate spring portion comprising first and second springs, each spring having a helical intermediate portion, the helical intermediate portions oriented to form a double helix.



Dual Spring Posterior Dynamic Stabilization Device with Elongation Limiting Elastomer

5

BACKGROUND OF THE INVENTION

The vertebrae in a patient's spinal column are linked to one another by the disc and the facet joints, which control movement of the vertebrae relative to one another. Each
10 vertebra has a pair of articulating surfaces located on the left side, and a pair of articulating surfaces located on the right side, and each pair includes a superior articular surface, which faces upward, and an inferior articular surface, which faces downward. Together the superior and inferior articular surfaces of adjacent vertebra form a facet joint. Facet joints are synovial joints, which means that each joint is surrounded by a capsule of connective tissue and
15 produces a fluid to nourish and lubricate the joint. The joint surfaces are coated with cartilage allowing the joints to move or articulate relative to one another.

Diseased, degenerated, impaired, or otherwise painful facet joints and/or discs can require surgery to restore function to the three joint complex. Damaged, diseased levels in the spine were traditionally fused to one another. While such a technique may relieve pain, it
20 effectively prevents motion between at least two vertebrae. As a result, additional stress may be applied to the adjoining levels, thereby potentially leading to further damage.

More recently, techniques have been developed to restore normal function to the facet joints. One such technique involves covering the facet joint with a cap to preserve the bony and articular structure. Capping techniques, however, are limited in use as they will not
25 remove the source of the pain in osteoarthritic joints. Caps are also disadvantageous as they must be available in a variety of sizes and shapes to accommodate the wide variability in the anatomical morphology of the facets. Caps also have a tendency to loosen over time, potentially resulting in additional damage to the joint and/or the bone support structure containing the cap.

30 Other techniques for restoring the normal function to the posterior element involve arch replacement, in which superior and inferior prosthetic arches are implanted to extend

one another to replace the articulating function of the facet joints. One drawback of current articulating facet replacement devices, however, is that they require the facet joints to be resected. Moreover, alignment of the articulating surfaces with one another can be
5 challenging.

Accordingly, there remains a need for improved systems and methods that are adapted to mimic the natural function of the facet joints.

US Patent Publication No. 2006/0142758 (“Petit”) discloses a linking element that consists of a helical spring and a support member made out of a polymer material. The
10 helical spring is embedded in the support material.

US Patent Publication No. 2004/0215191 (“Kitchen”) discloses a flexible tube comprising at least one lumen that extends the length of the tube. At least one rod of a preformed curvature is present within said one lumen of the tube. As additional rods are placed within the hollow flexible member, increased force is applied to the spine by the
15 device, thereby moving the spine towards the desired curvature.

US Patent Publication No. 2004/0049189 (“Le Couedic”) discloses a device that has two rigid rod-forming parts made of a first material. A connecting body that is made entirely from a second material that is more elastically deformable than said first material interconnects the two rod-forming portions.

US Patent Publication No. 2005/0065514 (“Studer”) discloses a dampening element comprising two spring elements coaxial with or parallel to a longitudinal axis, and two axially end-side connectors. The end-side connectors can be linked to the spring elements such that at least one of the spring elements is connected to the connectors. The two spring elements have different spring rates and one spring element is designed as a tension and
20 compression spring and comprises a spring coil, and the damping element is pre-stressed.

EP Patent Publication No. 0 677 277 (“Moreau I”) discloses a helically split oblong rotating member attached to upper and lower parts. The hollow central part of said member is filled at rest with a viscoelastic cushioning product cast in inter-thread overflow.

stabilizing prosthesis comprising a hollow body of revolution that is radially and/or helically slotted to make it axially flexible, whose internal spaces and slots are filled with a viscoelastic product constituting an elastic shock-absorbing tensioner that is micrometrically adjustable. Yoke systems allow the assembly to be embedded by nuts into anchors and screwed into the bone.

GB Patent Publication No. 2 382 307 (“Sengupta”) discloses an assembly for soft stabilization of the spine comprising a pair of pedicle screws and a helical spring member. The helical spring member may be made from titanium or stainless steel. A plastic sleeve may or may not cover the spring.

US Patent Publication No. 2005/0203517 (“Jahng”) discloses an elastomer cladding on a wire.

US 6,989,011 (Paul) discloses a device containing a spring and two ends, where the ends and the spring are integrally formed.

US 2006/0041259 (Paul) discloses a dynamic device containing at least one spring integrally formed to the substantially solid ends.

US 2003/0109880 (Shirado) discloses a resilient PDS member with anchors.

US 6,761,719 (Justis) discloses a device for stabilizing at least a portion of the spinal column, including a longitudinal member sized to span a distance between at least two vertebral bodies and being at least partially formed of a shape-memory material exhibiting pseudoelastic characteristics at about human body temperature. A number of bone anchors are used to secure the longitudinal member to each of the vertebral bodies. The longitudinal member is reformed from an initial configuration to a different configuration in response to the imposition of stress caused by relative displacement between the vertebral bodies, and recovers toward the initial configuration when the stress is removed to thereby provide flexible stabilization to the spinal column. During reformation of the longitudinal member, at least a portion of the shape-memory material transforms into stress-induced martensite. In a particular aspect of the invention, the longitudinal member is a plate having a central portion at least partially formed of the shape-memory material, and a pair of connection portions disposed at opposite ends of the central portion for connection to each of the vertebral bodies.

length thereof having an initial amplitude corresponding to the initial configuration and a different amplitude corresponding to the different configuration.

US 2004/0236329 (Panjabi) discloses a dynamic rod device with greater resistance to
5 movement during the central zone and lower resistance to movement as it extends beyond the central zone, i.e. neutral zone theory.

US 2005/0171543 (Timm) discloses a pedicle based dynamic stabilization system.

US 2006/0036240 (Colleran) discloses a dynamic device allowing controlled motion and disc off loading.

10 US 2008/0033435 (Studer) discloses a dynamic device with two springs and a dampening element where the two springs have different spring constants.

US 2006/0282080 (Albert) discloses a dynamic device with a spring element.

SUMMARY OF THE INVENTION

The present invention provides a Posterior Dynamic Stabilization (PDS) device that
15 regulates physiologic spinal elongation and compression. Regulation of elongation and compression are critical requirements of Posterior Dynamic Stabilization devices. Elongation and compression of the device allow the pedicles to travel naturally as the spine flexes and extends. This interpedicular travel preserves a more natural center of rotation unlike some conventional PDS devices that simply allow bending. The present invention incorporates
20 two components: 1) a spring that allows elongation/compression, and 2) a polymer core component that serves to increase the stiffness of the device in shear, bending, and tension, and also prevents soft tissue ingrowth.

Preferred embodiments of the device of the present invention feature a single-level device used for Posterior Dynamic Stabilization that comprises a dual-helix titanium spring, a
25 polymer core component disposed within the spring, and a pair of bone anchor attachment features.

The dual helix spring has numerous parameters that can be altered to adjust the overall device stiffness, and which may include: wire diameter, spring overall diameter, spring pitch and material of construction. The spring can take many forms that allow it to be linked to a

terminate in linear sections running substantially parallel to the axis of the spring coil. This, however, is not a requirement and the coil could terminate in any means that can attach to a bone anchor.

5 The polymer core component regulates the response of the spring by limiting its elongation. The polymer component also has numerous parameters that can be altered to adjust the overall device stiffness, which may include: clearance of polymer core with inner diameter of spring, length, and material of construction. In a preferred embodiment, the polymer component fills the inner diameter of the spring. However, this component could
10 take many forms.

The attachment feature allows the spring component of the device to attach to a bone anchor. An attachment feature is typically located at each end of the device and together they flank the centrally located spring. The attachment feature can be integral to the spring or it can be a separate component that allows it to mate to bone anchors such as a screw or a
15 hook. In some embodiments, the attachment feature is a rod, preferably having an open bore opening from its inner end.

Therefore, in accordance with the present invention, there is provided a posterior dynamic stabilization device comprising;

- 20 a) a first end attachment feature adapted for attachment to a first bone anchor,
- b) a second end attachment feature adapted for attachment to a second bone anchor,
- c) an intermediate spring portion comprising first and second springs, each spring having a helical intermediate portion, the helical intermediate portions oriented to form a double helix.
- 25 Preferably, the double helix defines an internal space and the device further comprises:
- d) a polymer core located at least within the internal space of the double helix.

DESCRIPTION OF THE FIGURES

FIG. 1 discloses a first embodiment of the device of the present invention.

FIG. 3 discloses the device of FIG. 1 modified with a smaller diameter wire in the spring section.

FIGS. 4a-b disclose side and cross-section views of the device of FIG. 1.

5 FIG. 5 discloses a multi-level embodiment of the device of the present invention.

FIG. 6 discloses a device of the present invention preferably used for topping off.

FIG. 7 discloses the device of FIG. 1 in which the spring unit is overmolded with a second polymer component.

10 FIG. 8 discloses the device of FIG. 7 in which gaps are present between the attachment end features and the central overmolded polymer component.

FIG. 9 discloses a cross-section of FIG. 8.

FIG. 10 discloses an exploded view of an embodiment of the present invention having a solid component inserted into a spring end.

15 FIG. 11 discloses an embodiment in which a set screw locks semi-cylinder portions of an end rod.

FIG. 12 discloses an embodiment in which the set screw locks the spring termination end into the hollow rod.

FIGS. 13 and 14 disclose side and cross-section views of a device having compression caps.

20 FIG. 15 discloses an exploded view of a device of the present invention in which the dual helix contains a polymer core and is flanked by a pair of compression caps.

FIGS. 16a-c disclose various views of a preferred embodiment of the present invention containing an overmolded polymer component.

DETAILED DESCRIPTION OF THE INVENTION

25 Now referring to FIG.1, there is provided a posterior dynamic stabilization device comprising;

- b) a second end attachment feature 3 adapted for attachment to a second bone anchor, and
- c) an intermediate spring portion 5 comprising a first spring 7 and a second spring 9, each spring having a helical intermediate portion 11, the helical intermediate portions oriented to form a double helix.

Now referring to FIGS. 2-3, there is provided a single level device 10 of the present invention, wherein the device is attached to two bone anchors 13 by securing a set screw 15 to the respective attachment feature portions 1,3 of the device. As stated above, various parameters of the device's spring may be changed to modify and alter its stiffness. In this FIG. 3, a smaller wire diameter on the springs 17 is shown. This feature may be combined with other alterations (such as overall diameter of the spring, material, etc) to alter device performance. In this case, the smaller wire diameter decreases the stiffness of the spring (and thus the device). In some embodiments, a kit is provided with various spring geometries and/or with various polymer properties to create a spectrum of rod stiffnesses that can be selected by the surgeon to treat a variety of surgical indications.

Now referring to FIGS. 4a-4b, the polymer component 21 of the device offers some resistance to device elongation as the spring stretches during physiologic spinal elongation and squeezes the polymer core. Therefore, the polymer component contributes to device performance by helping control both elongation and compression of the spring unit.

As shown best in FIG 4b, in some embodiments, the ends 23 of the springs 7,9 are contained within the respective opposing attachment features (in this case, the rods). This containment may be accomplished in a variety of ways. The dual spring ends may also be captured within attachment features that possess geometries other than a rod geometry (such as a square or a block).

Now referring to FIG. 5, multi-level devices of the present invention can be constructed in a variety of configurations by using two or more spring sections. The stiffness at each segment may be the same or it may vary depending on the indication being treated.

posterior dynamic stabilization device comprising;

- a) a first end attachment feature 101 adapted for attachment to a first bone anchor,
- 5 b) a second end attachment feature 103 adapted for attachment to a second bone anchor,
- c) an intermediate attachment feature 105 adapted for attachment to a third bone anchor
- 10 d) a first intermediate spring portion 111 located between the first end attachment feature and the intermediate attachment feature, and comprising a first spring 113 and a second spring 115, each spring having a helical intermediate portion 117, the helical intermediate portions oriented to form a first double helix, and
- 15 e) a second intermediate spring portion 121 located between the second end attachment feature and the intermediate attachment feature, and comprising a third spring 123 and a fourth spring 125, each spring having a helical intermediate portion 127, the helical intermediate portions oriented to form a second double helix.

Now referring to FIG. 6, another embodiment of the present invention features a first
 20 long rod 25 and a short rod segment 27 attached to a central spring 26. This embodiment may be used to address cases in which the surgeon would like to “top off” a fusion. In use, both short rod 27 and the inner portion 31 of the long rod are attached to bone anchors at the terminating level of the construct. The outer portion 33 of the long rod is attached to a bone anchor at a fusion segment. Therefore, in accordance with the present invention, there is
 25 provided the device of the present invention wherein the first rod has a first length and the second rod has a second length, wherein the first length is greater than the second length. Preferably, the first length is at least two times greater than the second length.

As mentioned above, various components of this device can be modified to achieve a desired profile of stiffnesses in tension, shear, and bending. Now referring to FIGS. 7 and 8,

Addition of this “overmolded” polymer component increases the stiffness of the device. This “overmolded” polymer component is further advantageous because it also prevents tissue in-growth, thereby preventing tissue from entering the springs when the spine moves and the springs stretch.

Therefore, and now referring to FIGS. 7-9, in some embodiments, a first polymer core 41 is located within the internal space of the double helix and a second polymer component 35 extends through the double helix to overmold the helix. In some embodiments, the first and second polymer components are integral. In some embodiments, the overmolding extends to only tangentially cover the helix. In other embodiments, the overmolding extends past the helix.

Now referring to FIG. 8, the device may include a gap 37 present as a space between the overmolded polymer component 35 and the inner ends 39 of the rod/anchor attachment portion. Therefore, in some embodiments, the first end attachment feature comprises a first rod, and the second end attachment feature comprises a second rod, and wherein the polymer core and the first rod define a first gap therebetween, and wherein the polymer core and the second rod define a second gap therebetween. The function of the gap is to prevent molding of the rod.

Now referring to FIG. 9, the polymer component can be constructed as a single integral component or as a plurality of separate components. In one embodiment, the polymer core 41 is assembled and a separate outer polymer sheath 43 is either overmolded or assembled. The core and outer sheath may also be manufactured as one integral component using an overmold process.

Therefore, in some embodiments, the polymer core is located within the internal space of the double helix and extends through the double helix to overmold the helix.

The polymer component may be selected from a range of polymers with a range of durometers and stiffnesses. The polymer may be elastomer-based, thermoplastic-based, or may be a composite of the two. In preferred embodiments, the polymer component is selected from silicone rubber or polycarbonate urethane.

manufacturing method, and now referring to FIG. 10, a first tube 51 is threaded over the dual spring 53 to provide a clamping surface. A solid component 55 is then threaded into terminating end 57 of the spring to prevent collapse and allow attachment to the clamping
5 end tube 59. The spring terminates into a tighter coil form 57. The polymer core 61 may be passed through the tighter terminating end of coil in multiple pieces.

Therefore, in accordance with the present invention, in one embodiment, each spring further comprises a first spring termination end 57 having a first diameter, and the device further comprises d) a solid component 55 having a threaded outer surface 63, wherein the
10 solid component is located within the first spring termination end.

Now referring to FIG. 11, in some embodiments, the spring terminates in a linear rod section 65 and mates with a rod end to clamp the spring in place.

Therefore, in accordance with the present invention, in one embodiment, each spring further comprises a first end 65 having a linear rod configuration, and the linear rod fits into a
15 hollow bore (not shown) of the first end attachment feature 69.

In some embodiments, the first end attachment feature 69 comprises first 75 and second 77 semi-cylinders, and the device further comprises d) a set screw 71 passing through a first hole 72a in each of the outer surface 74 of the first semi-cylinder and a second hole 72b in the inner surface 76 of the second semi-cylinder.

20 Now referring to FIG 12, in some embodiments, a linear portion 78 of the terminating spring end mates with parallel bores 79 in the inner end 81 of the rod 83 that are aligned with the rod axis. A set screw 85 with a point 87 at its tip is passed through a transverse hole 89 in the body of the rod to spread the wires away from each other and lock the spring ends in place.

25 Also in accordance with the present invention, in one embodiment each spring further comprises a first end 78 having a linear rod configuration, wherein the linear rod fits into a hollow bore 79 in an inner end 81 of the first end attachment feature, and the device further comprises d) a set screw 85 passing through the first attachment feature to lock the linear rod. Preferably, an end of the set screw is frustoconical.

assembly 91 (or compression cap) that has ends adapted to compress the spring unit. Tapered compression ends of the cap serve to clamp the dual spring in place.

Therefore, also in accordance with the present invention, in one embodiment the device further comprises: d) a compression cap 91 disposed between the first end attachment feature 93 and the intermediate spring portion 95.

FIG. 15 discloses an exploded view of a device of the present invention in which the dual helix contains a polymer core and is flanked by a pair of compression caps. Now referring to FIG. 15, there is provided an exploded view of FIGS. 13 and 14, showing rod ends 101, compression caps 103, a polymer core 105, and a spring 107.

The springs in the double helix may also terminate with a linear end section (not shown), which would allow smaller attachment rod ends to be used.

Now referring to FIGS. 16a-c, there is provided a device of the present invention constructed of five components:

- a) two springs 111, 113 creating a double helix configuration,
- b) two threaded rod ends 115, which are threaded through the helical terminations 117 of the spring on each end, and
- c) a final overmold structure 119 that creates a constant diameter and clamping surface.

The two threaded rod ends could be made from any material and the split 121 in the center allows the spring to somewhat stretch. This split could be located anywhere along the core and have a variety of geometries. The threaded ends 115 of the rods 123 prevent compression of spring during clamping and provide attachment means for the spring. The overmold structure provides the device with a constant overall diameter.

Therefore, in preferred embodiments of the present invention, there is provided a PDS device having a dual lead coil spring design forming a double helix, where the spring wire has a circular cross section. This device achieves its axial stiffness primarily by way of the double helix spring and secondly by way of the polymer core component. Shear and bending

relatively low resistance to axial displacements at low loads, but will become increasingly stiff as the double helix spring engages the polymer core component. Accordingly, there is provided a comprehensive dynamic stabilization system with different devices having
5 different stiffnesses to serve a variety of patients' needs. This system may be particularly useful in multi-level cases, wherein the stiffnesses at adjacent flexible segments may vary.

One skilled in the art will appreciate that the rod of the device may be configured for use with any type of bone anchor, e.g., bone screw or hook; mono-axial or polyaxial.
10 Typically, a bone anchor assembly includes a bone screw, such as a pedicle screw, having a proximal head and a distal bone-engaging portion, which may be an externally threaded screw shank. The bone screw assembly may also have a receiving member that is configured to receive and couple a spinal fixation element, such as a spinal rod or spinal plate, to the bone anchor assembly.

The receiving member may be coupled to the bone anchor in any well-known conventional manner. For example, the bone anchor assembly may be poly-axial, as in the present exemplary embodiment in which the bone anchor may be adjustable to multiple angles relative to the receiving member, or the bone anchor assembly may be mono-axial, e.g., the bone anchor is fixed relative to the receiving member. An exemplary poly-axial bone
20 screw is described U.S. Pat. No. 5,672,176, the specification of which is incorporated herein by reference in its entirety. In mono-axial embodiments, the bone anchor and the receiving member may be coaxial or may be oriented at angle with respect to one another. In poly-axial embodiments, the bone anchor may be biased to a particular angle or range of angles to provide a favored angle the bone anchor. Exemplary favored-angle bone screws are described in U.S.
25 Patent Application Publication No. 2003/0055426 and U.S. Patent Application Publication No. 2002/0058942, the specifications of which are incorporated herein by reference in their entireties.

Therefore, in accordance with the present invention, there is provided a posterior dynamic spinal stabilization system for use in a human spine, comprising:

- 30 a) first and second bone anchors, each anchor having a recess for receiving a rod,
 b) the device of the present invention.

Generally, in using the present invention, two bone anchors such as polyaxial screws are inserted into adjacent pedicles within a functional spinal unit of a patient. The cylinder-bumper-rod assembly of the present invention is then inserted into the patient between the anchors. The first hollow cylinder is attached to the first bone anchor by laying the outer annular surface of the first hollow cylinder into the first bone anchor recess and tightening an appropriate set screw. Similarly, the second end of the first rod is attached to the second bone anchor by laying the second end into the second bone anchor recess and tightening the appropriate set screw. More preferably, this is achieved in a minimally invasive surgery.

In some embodiments, at least one end of the cylinder-bumper-rod assembly has a bullet nose for ease of insertion.

In some embodiments, the assemble may be implanted in accordance with the minimally invasive techniques and instruments disclosed in US Patent No. 7179261; and US Patent Publication Nos. US2005/0131421; US2005/0131422; US 2005/0215999; US2006/0149291; US2005/0154389; US2007/0233097; and US2005/0192589, the specifications of which are hereby incorporated by reference in their entireties.

Therefore, in accordance with the present invention, there is provided a method of implanting a posterior dynamic spinal stabilization system, comprising the steps of:

- a) inserting two bone anchors into adjacent pedicles within a functional spinal unit of a patient, each bone anchor having a recess for receiving a rod,
- b) providing a polyaxial dynamic stabilization DEVICE comprising:

Each component of the design may be made from biocompatible, implantable materials known in the art such as stainless steel, titanium, nitinol, polyetheretherketone (PEEK) or alternative polyaryllketones, carbon fiber reinforced polymers, and high performance elastomers such as silicones, dimethylsiloxanes, silicone-urethanes, polyether-urethanes, silicone-polyether-urethanes, polycarbonate urethanes, and silicone-polycarbonate-urethanes.

Preferably, the coil and rod components are titanium alloy (Ti-6Al-4V) or cobalt-chrome alloy (e.g. Co-Cr-Mo). If a cobalt-chrome alloy is selected, the alloy is preferably in

with a set screw). Preferably, the solid rod component is either titanium alloy or PEEK.

If a metal is chosen as a material of construction, then the metal is preferably selected from the group consisting of nitinol, titanium, titanium alloys (such as Ti-6Al-4V), cobalt-chrome alloys (such as CrCo or Cr-Co-Mo) and stainless steel.

If a polymer is chosen as a material of construction, then the polymer is preferably selected from the group consisting of polycarbonates, polyesters, (particularly aromatic esters such as polyalkylene terephthalates, polyamides; polyalkenes; poly(vinyl fluoride); PTFE; polyarylethyl ketone PAEK; and mixtures thereof.

In some embodiments, the core polymer and/or rod component is made from a composite comprising carbon fiber. Composites comprising carbon fiber are advantageous in that they typically have a strength and stiffness that is superior to neat polymer materials such as polyarylethyl ketone PAEK. In some embodiments, the core is made from a polymer composite such as a PEKK-carbon fiber composite.

Preferably, the composite comprising carbon fiber further comprises a polymer. Preferably, the polymer is a polyarylethyl ketone (PAEK). More preferably, the PAEK is selected from the group consisting of polyetherether ketone (PEEK), polyether ketone ketone (PEKK) and polyether ketone (PEK). In preferred embodiments, the PAEK is PEEK.

In some embodiments, the carbon fiber comprises between 1 vol% and 60 vol% (more preferably, between 10 vol% and 50 vol%) of the composite. In some embodiments, the polymer and carbon fibers are homogeneously mixed. In others, the material is a laminate. In some embodiments, the carbon fiber is present in a chopped state. Preferably, the chopped carbon fibers have a median length of between 1 mm and 12 mm, more preferably between 4.5 mm and 7.5 mm. In some embodiments, the carbon fiber is present as continuous strands.

In especially preferred embodiments, the composite comprises:

- a) 40-99% (more preferably, 60-80 vol%) polyarylethyl ketone (PAEK), and
- b) 1-60% (more preferably, 20-40 vol%) carbon fiber,

wherein the polyarylethyl ketone (PAEK) is selected from the group consisting of polyetherether ketone (PEEK), polyether ketone ketone (PEKK) and polyether ketone (PEK).

More preferably, the composite comprises 60-80 wt% PAEK and 20-40 wt% carbon fiber. Still more preferably the composite comprises 65-75 wt% PAEK and 25-35 wt% carbon fiber.

5 The elastomer core component is preferably made of a thermoplastic, biocompatible, high performance polycarbonate-urethane (PCU). The stiffness, or durometer of the PCU can be tailored to meet the specifications for the dynamic device. In preferred embodiments, the surface of the device components that will be attached to the elastomer are treated prior to attaching the bumper using known surface treatment methods such as surface roughening
10 (e.g. grit blasting), chemical functionalization (e.g. primers), and plasma treatments known in the art. Alternatively or in conjunction with using a surface treatment, an adhesive may be used to enhance bonding, e.g. using cyanoacrylates. In one preferred embodiment, the surfaces of the device components that will be attached to the elastomer will first be roughened using grit blasting, then chemically functionalized using primer, then the elastomer will be
15 overmolded onto the device components.

1. A posterior dynamic stabilization device comprising;
 - a) a first end attachment feature adapted for attachment to a first bone anchor,
 - b) a second end attachment feature adapted for attachment to a second bone anchor,
 - c) an intermediate spring portion comprising first and second springs, each spring having a helical intermediate portion, the helical intermediate portions oriented to form a double helix.
2. The device of claim 1, wherein the double helix defines an internal space and the device further comprises:
 - d) a polymer core located at least within the internal space of the double helix.
3. The device of claim 1 wherein the first and second end attachment features each comprise an inner face, an outer face, and a blind recess opening onto the inner face to form a hollow bore.
4. The device of claim 3 wherein each spring further comprises a first end and a second end, wherein the first end of each spring is attached to the first end attachment feature, and the second end of each spring is attached to the second end attachment feature.
5. The device of claim 4 wherein the first end of each spring is located in the hollow bore of the first end attachment feature, and the second end of each spring is located in the hollow bore of the second end attachment feature.
6. The device of claim 1 wherein the first end attachment feature comprises a first rod, and the second end attachment feature comprises a second rod.
7. The device of claim 6 wherein the first rod has a first length and the second rod has a second length, wherein the first length is greater than the second length.
8. The device of claim 7 wherein the first length is at least two times greater than the second length.

device further comprises:

d) a polymer core located within the internal space of the double helix and extending through the double helix.

5 10. The device of claim 9 wherein the first end attachment feature comprises a first rod, and the second end attachment feature comprises a second rod, and wherein the polymer core and the first rod define a first gap therebetween, and wherein the polymer core and the second rod define a second gap therebetween.

10 11. The device of claim 1 wherein each spring further comprises a first spring end having a first diameter and a second end having a second diameter, wherein each helical intermediate portion has a third diameter, and the third diameter is greater than the first and second diameters.

12. The device of claim 1 wherein each spring further comprises a first spring end having a first diameter, the device further comprising:

15 d) a solid component having a threaded outer surface, the solid component located within the first spring end.

13. The device of claim 1 wherein each spring further comprises a first end having a linear rod configuration.

20 14. The device of claim 13 wherein the linear rod fits into a hollow bore of the first end attachment feature.

15. The device of claim 14 wherein the first end attachment feature comprises first and second semi-cylinders, and wherein the device further comprises:

e d) a set screw passing through each of the first and second semi-cylinders.

25 16. The device of claim 1 wherein each spring further comprises a first end having a linear rod configuration, wherein the linear rod fits into a hollow bore of the first end attachment feature, and wherein the device further comprises:

d) a set screw passing through the first attachment feature to lock the linear rod.

18. The device of claim 1 further comprising:

d) a compression cap disposed between the first end attachment feature and the intermediate spring portion.

5 19. A multi-level posterior dynamic stabilization device comprising;

a) a first end attachment feature adapted for attachment to a first bone anchor,

b) a second end attachment feature adapted for attachment to a second bone anchor,

10 c) an intermediate attachment feature adapted for attachment to a third bone anchor,

15 d) a first intermediate spring portion located between the first end attachment feature and the intermediate attachment feature, and comprising first and second springs, each spring having a helical intermediate portion, the helical intermediate portions oriented to form a first double helix, and

20 e) a second intermediate spring portion located between the second end attachment feature and the intermediate attachment feature, and comprising third and fourth springs, each spring having a helical intermediate portion, the helical intermediate portions oriented to form a second double helix.

1/11

FIG. 1


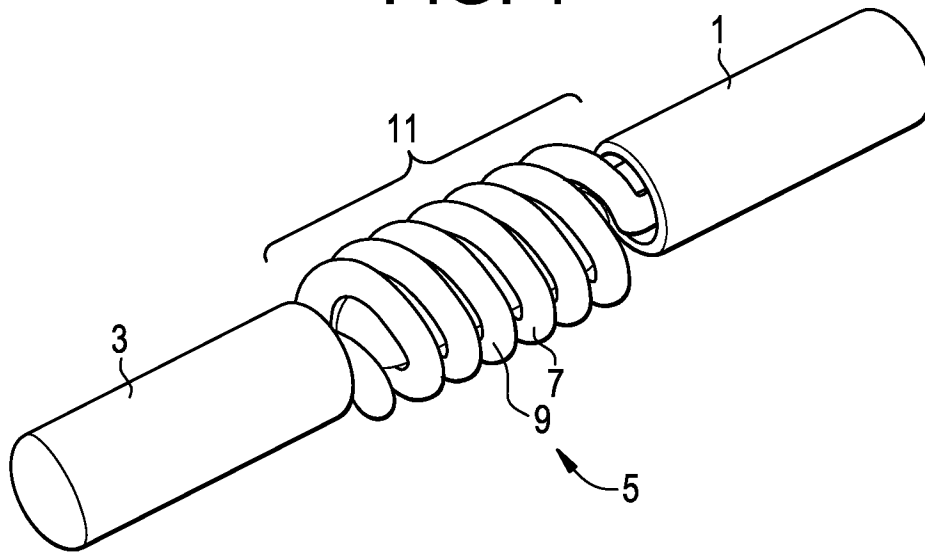


FIG. 2

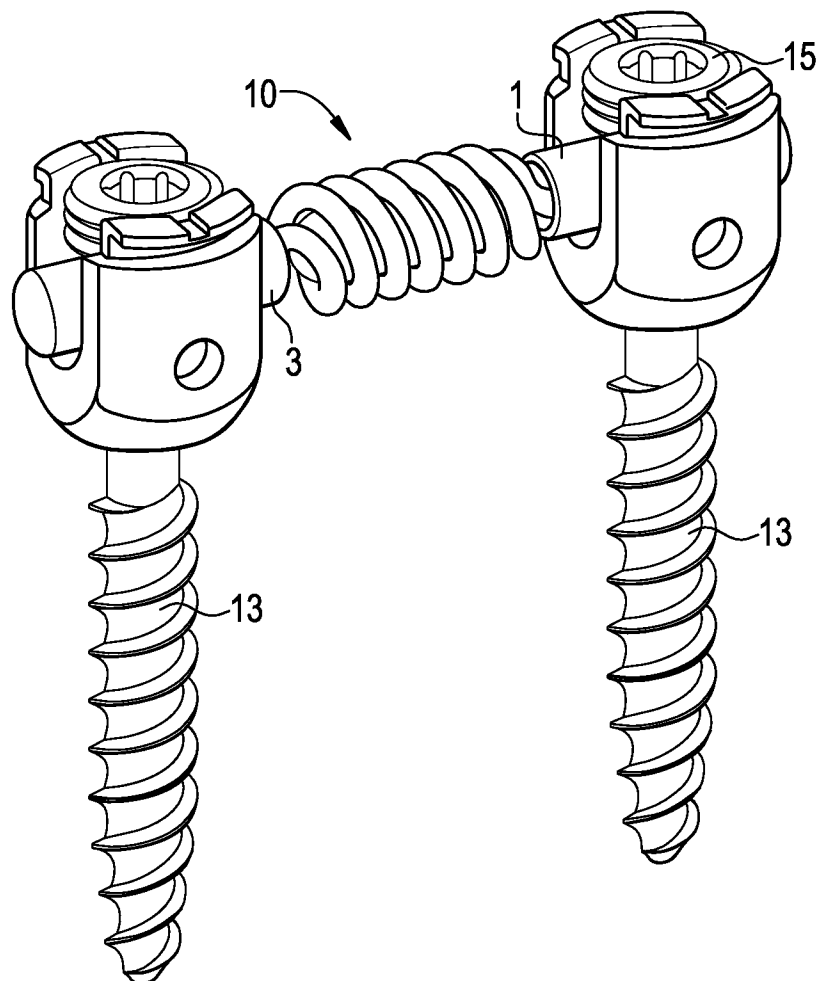

2/11

FIG. 3

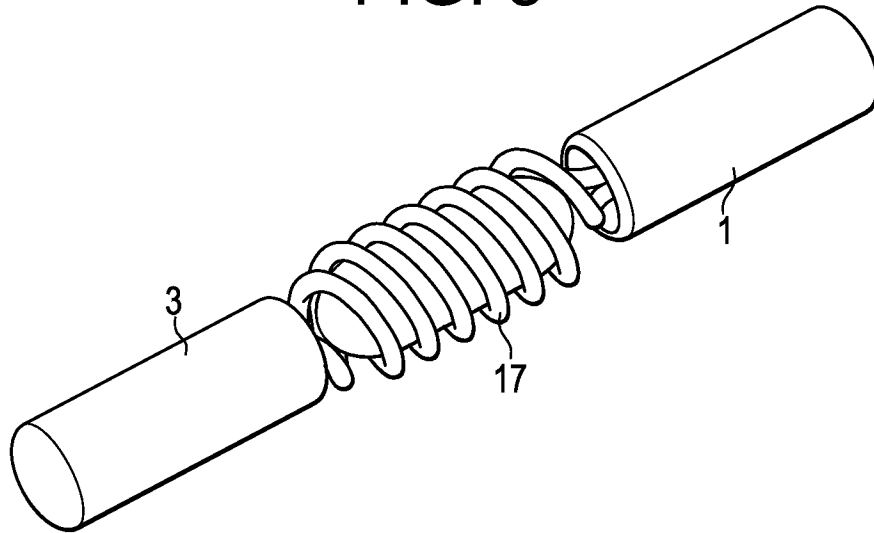


FIG. 4A

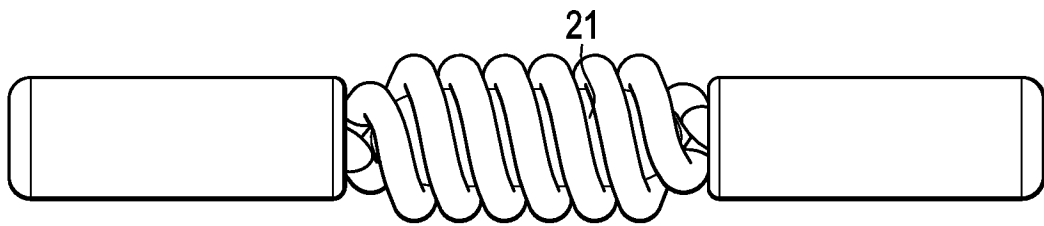


FIG. 4B

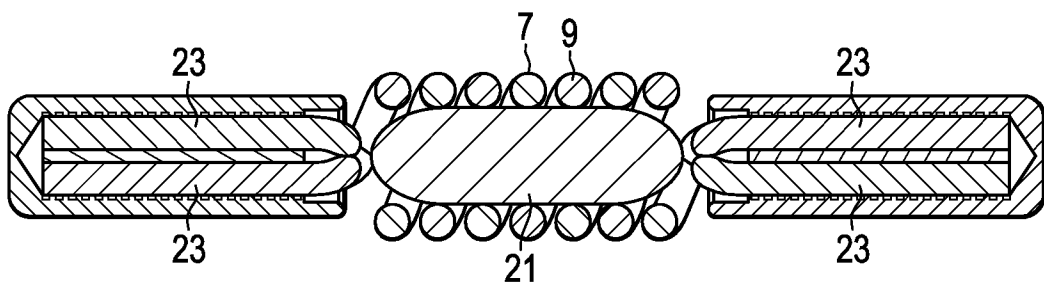


FIG. 5


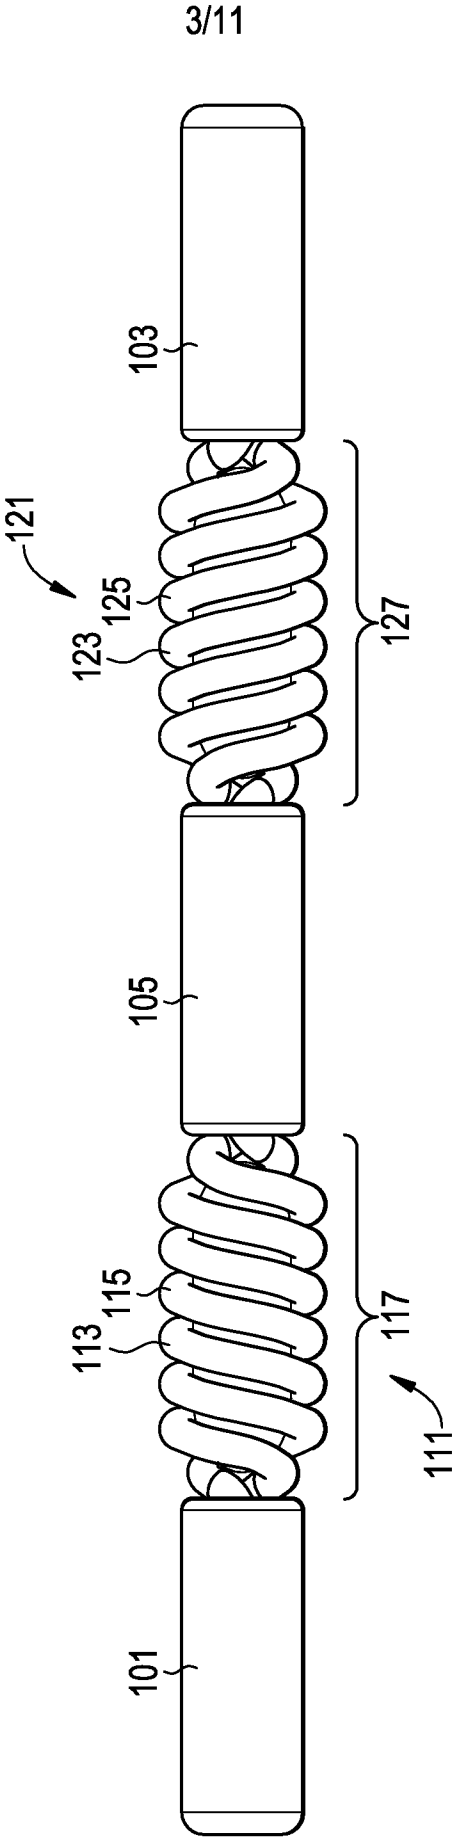


FIG. 6

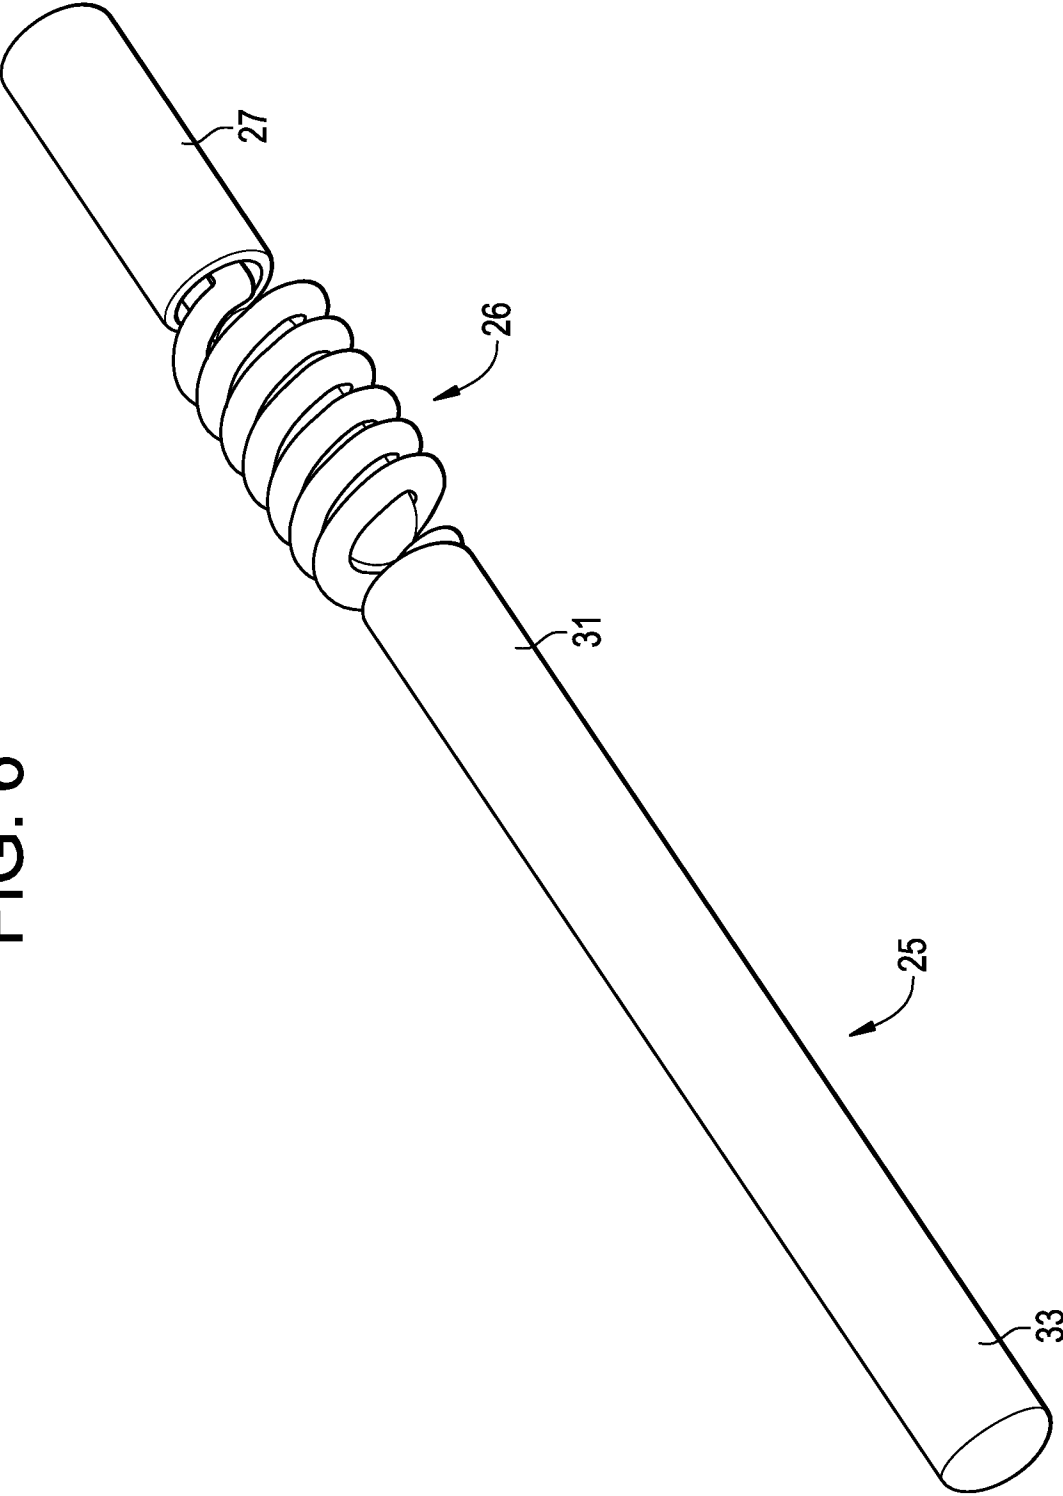

5/11

FIG. 7

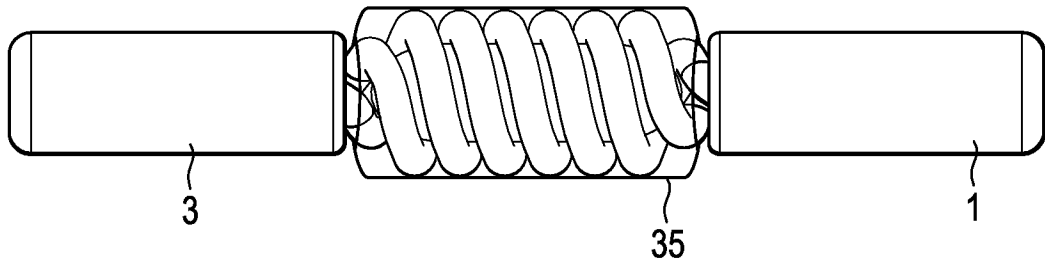


FIG. 8

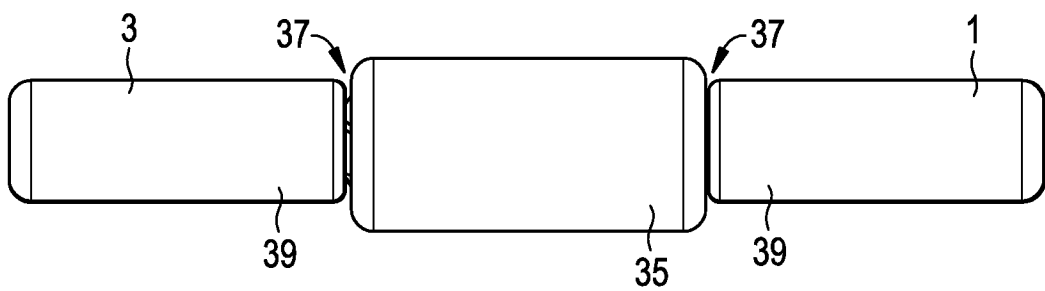
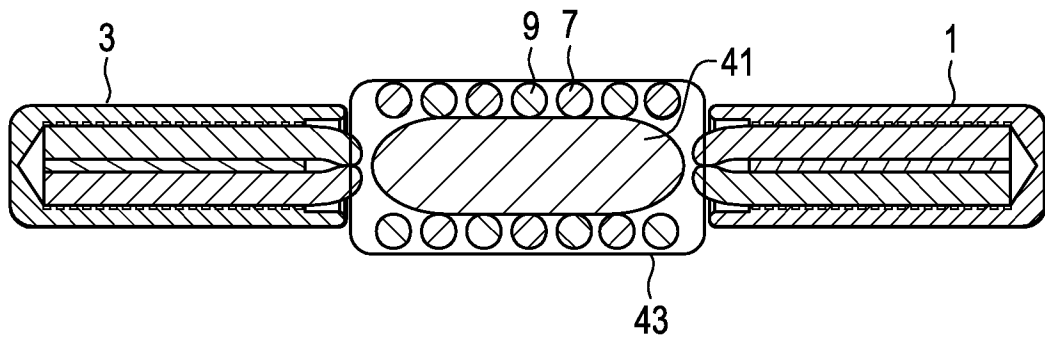


FIG. 9





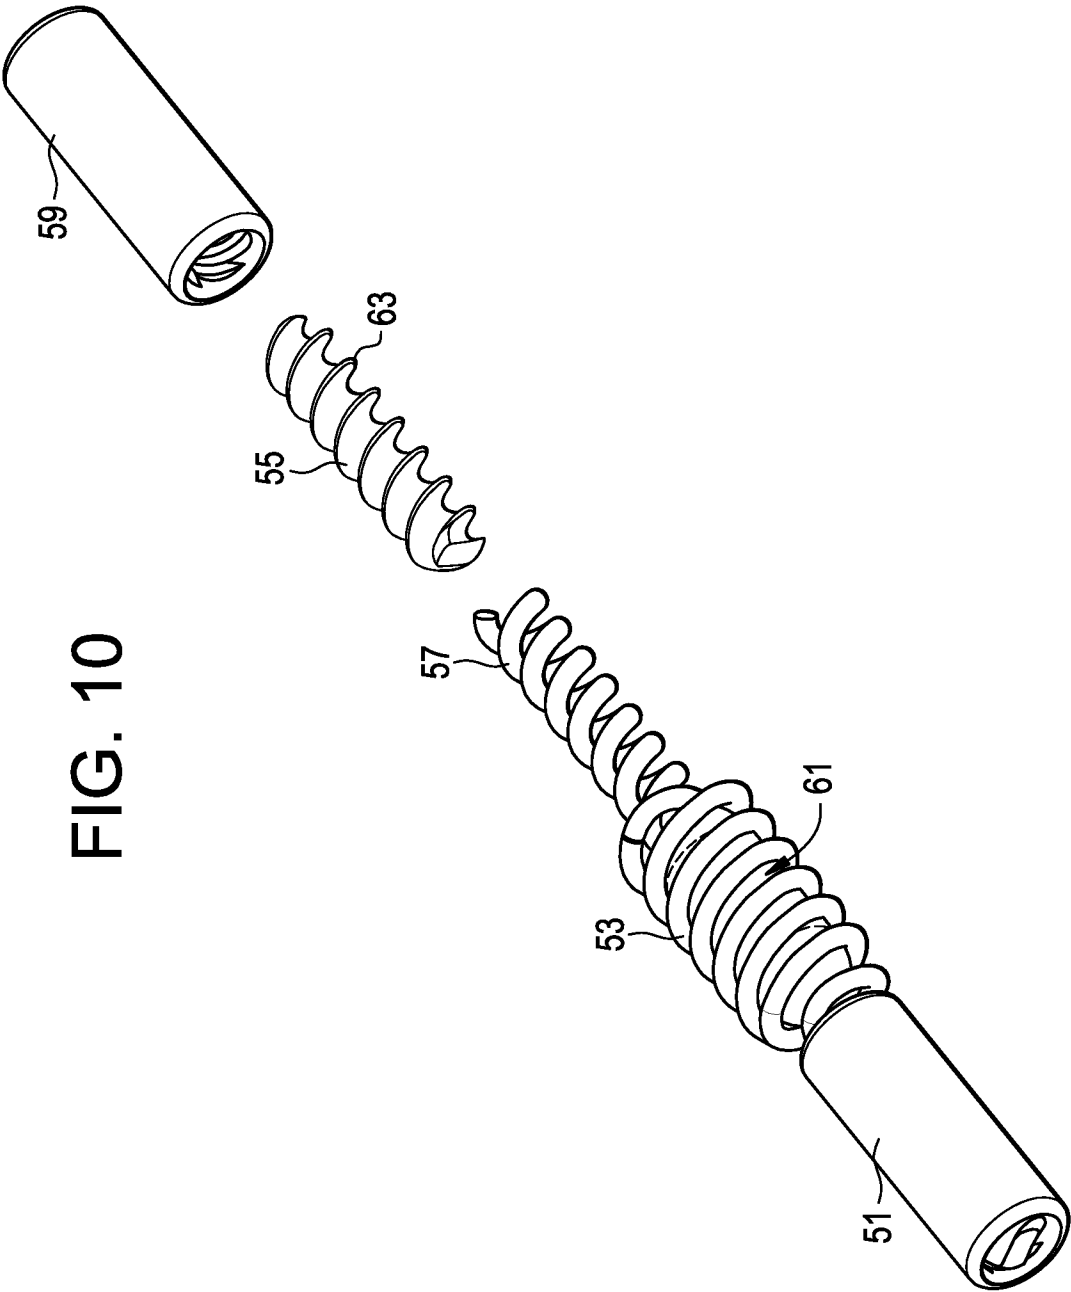


FIG. 11

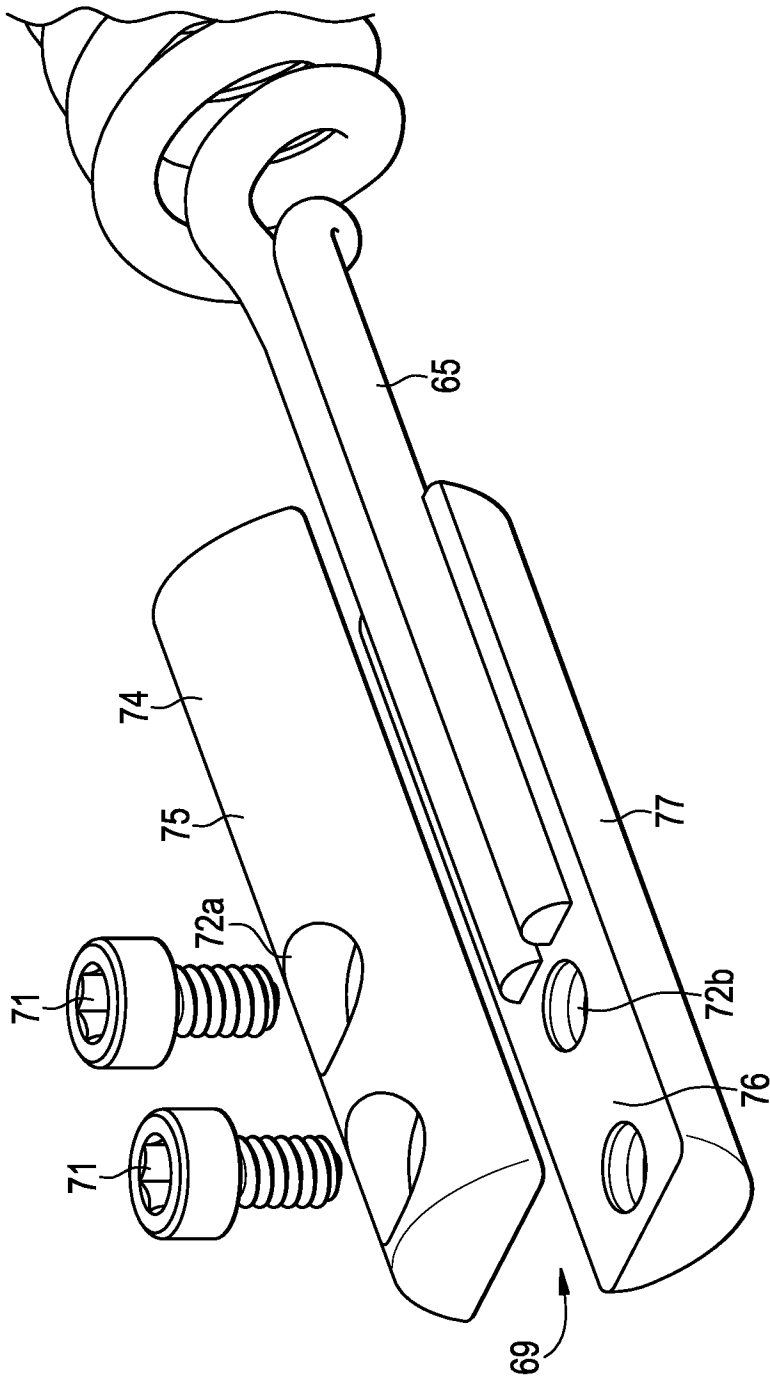

8/11

FIG. 12

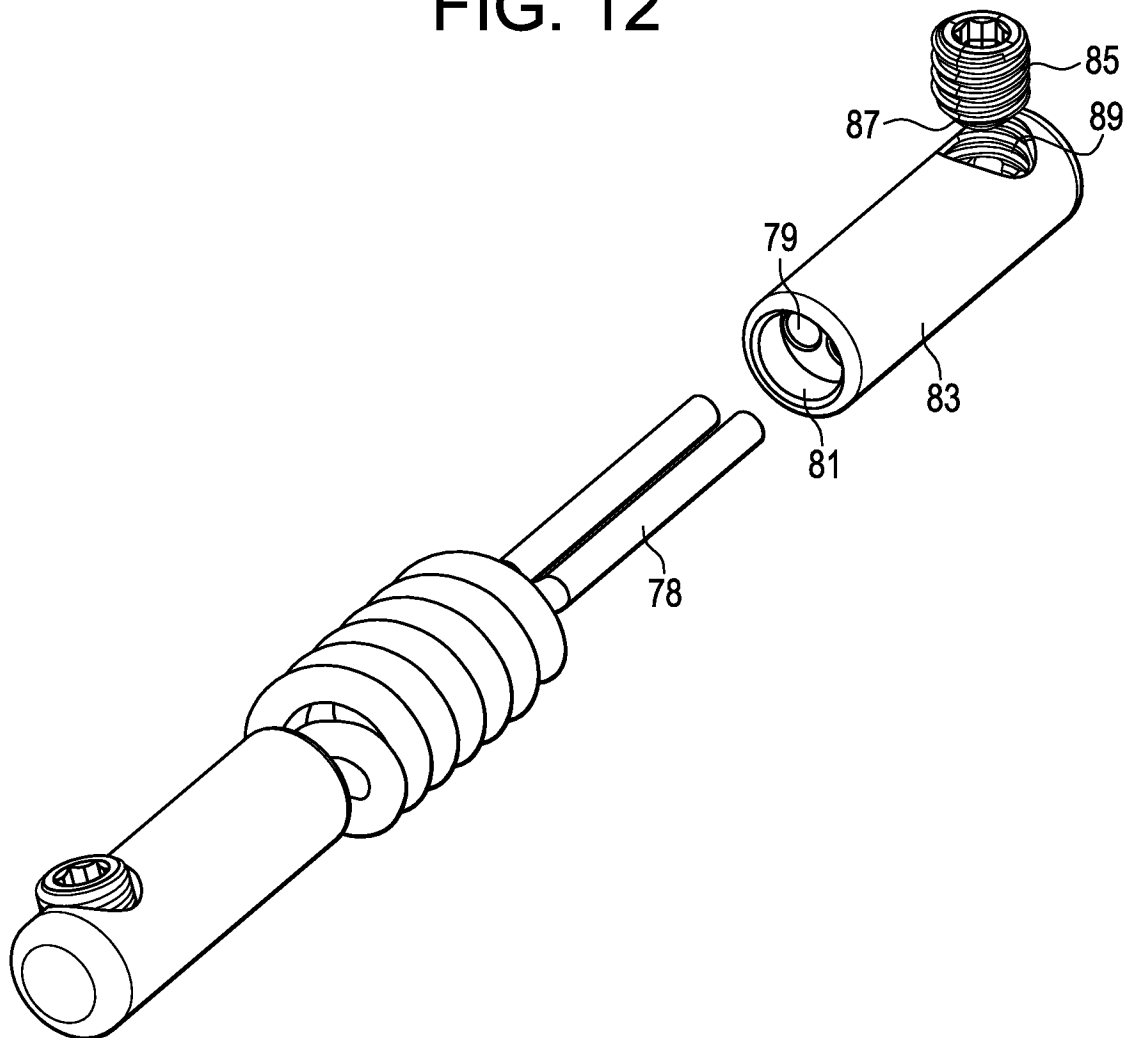

9/11

FIG. 13

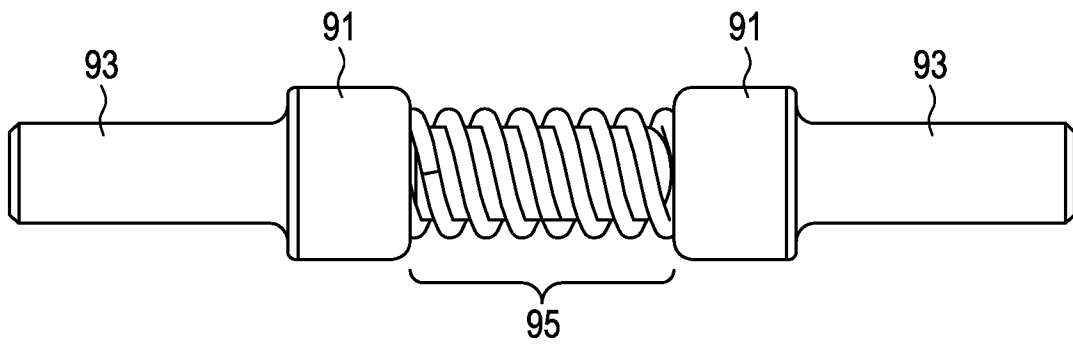


FIG. 14


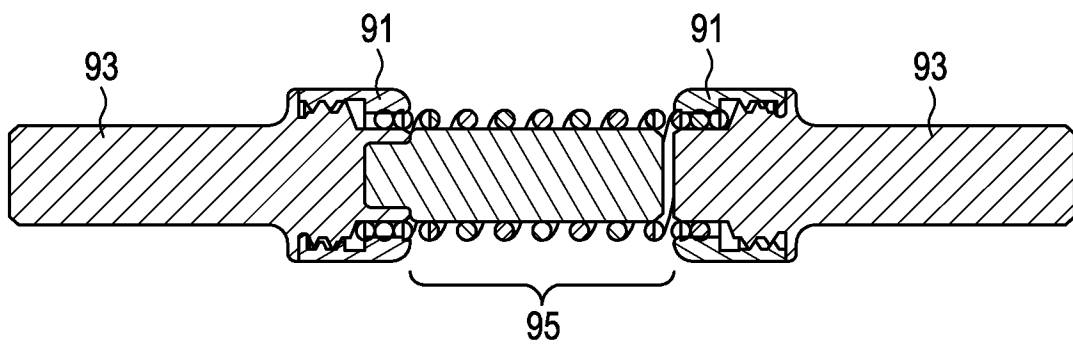


FIG. 15

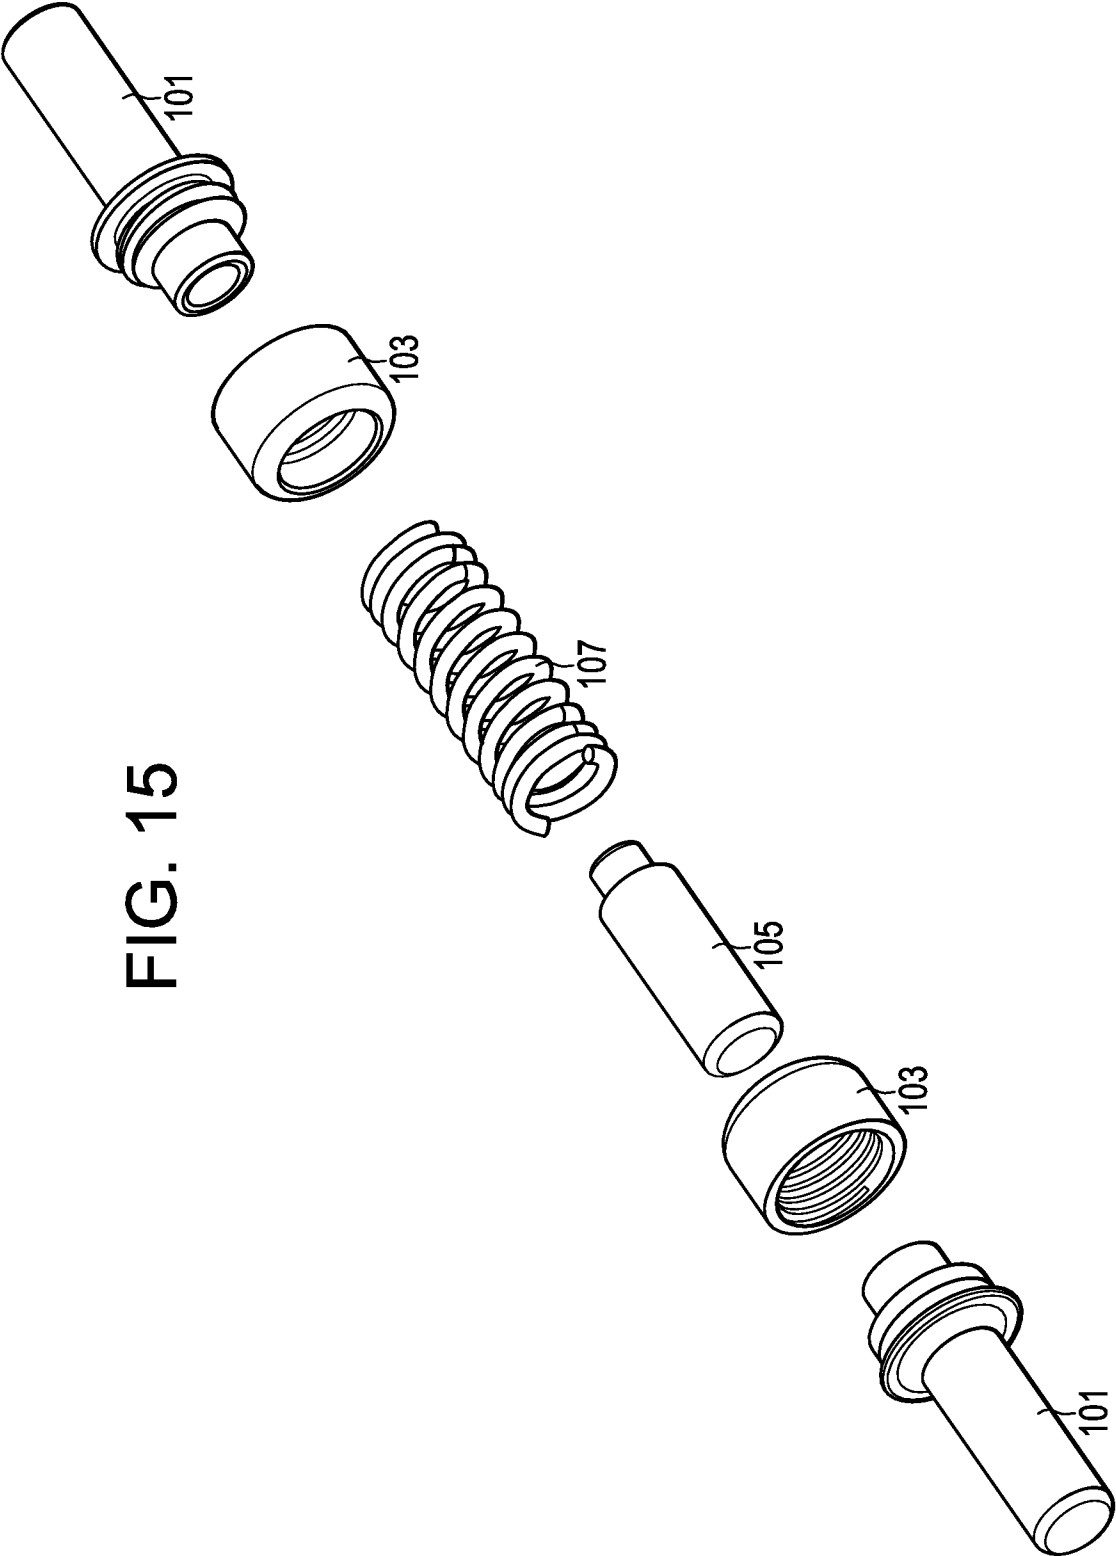

11/11

FIG. 16A

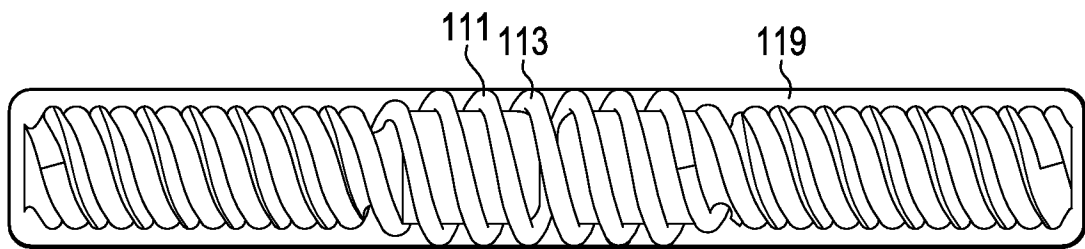


FIG. 16B


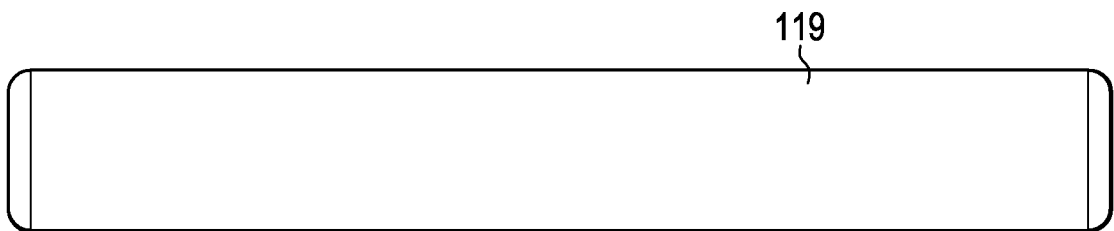


FIG. 16C

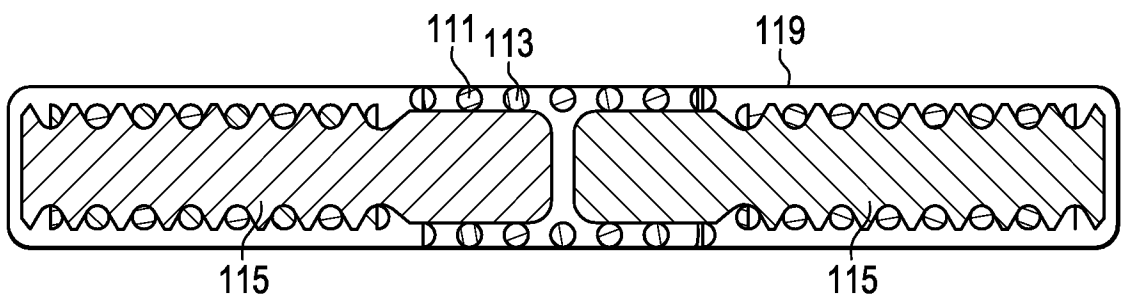

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 10/24091

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61B 17/70 (2010.01)

USPC - 606/257

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC - A61B 17/70 (2010.01)

USPC - 606/257

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC - 606/246,248,255,279,297,294,910,264,265

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST (DB=PGPB,USPT,USOC,EPAB,JPAB); Dialog

Search Terms - spine, dynamic, stabilization, spring, double helix, coil, rod, bore, spiral

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y — A	US 2006/0129147 A1 (BIEDERMANN et al.) 15 June 2006 (15.06.2006) entire document, especially para [0034] to [0037]; Fig 2a-b, 3, 4a-b	1-14, 16-19 ----- 15
Y — A	US 2006/0229612 A1 (ROTHMANN et al.) 12 October 2006 (12.10.2006) entire document, especially para [0046]; Fig 4, 7	1-14, 16-19 ----- 15
Y	US 2008/0269904 A1 (VOORHIES) 30 October 2008 (30.10.2008) para [0150]-[0154]; Fig 29-30, 32, 39	2, 9-10
Y — A	US 6,989,011 B2 (PAUL et al.) 24 January 2006 (24.01.2006) col 7, ln 9-18, col 10, ln 17-24; Fig 3A	13-14, 16-17 ----- 15
Y	US 2007/0270814 A1 (LIM et al.) 22 November 2007 (22.11.2007) Fig 4	18
Y	US 2005/0080414 A1 (KEYER et al.) 14 April 2005 (14.04.2005) para [0004]	17

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 March 2010 (25.03.2010)

Date of mailing of the international search report

16 APR 2010

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774