



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2433155 A1 2002/08/01

(21) **2 433 155**

(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2002/01/08

(87) Date publication PCT/PCT Publication Date: 2002/08/01

(85) Entrée phase nationale/National Entry: 2003/06/26

(86) N° demande PCT/PCT Application No.: US 2002/000312

(87) N° publication PCT/PCT Publication No.: 2002/059406

(30) Priorité/Priority: 2001/01/25 (09/769,974) US

(51) Cl.Int.⁷/Int.Cl.⁷ D02G 1/12, D02G 1/20

(71) Demandeur/Applicant:
MILLIKEN & COMPANY, US

(72) Inventeurs/Inventors:
PASCOE, WILLIAM M., US;
BROWN, ROBERT S., US

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : FIL TEINT PAR SECTIONS

(54) Title: SPACE DYED YARN

(57) Abrégé/Abstract:

This invention relates to a space dyed yarn (119).



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 August 2002 (01.08.2002)

PCT

(10) International Publication Number
WO 02/059406 A1

(51) International Patent Classification⁷: **D02G 1/12**, 1/20

(21) International Application Number: PCT/US02/00312

(22) International Filing Date: 8 January 2002 (08.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/769,974 25 January 2001 (25.01.2001) US

(71) Applicant: **MILLIKEN & COMPANY** [US/US]; Legal Department (M-495), P.O. Box 1926, Spartanburg, SC 29304 (US).

(72) Inventors: **PASCOE, William, M.**; 178 Blue Sky Drive, Inman, SC 29349 (US). **BROWN, Robert, S.**; 6139 Robin Street, Spartanburg, SC 29303 (US).

(74) Agent: **BACON, Jeffery, E.**; Milliken & Company, Legal Department (M-495), P.O. Box 1926, Spartanburg, SC 29304 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

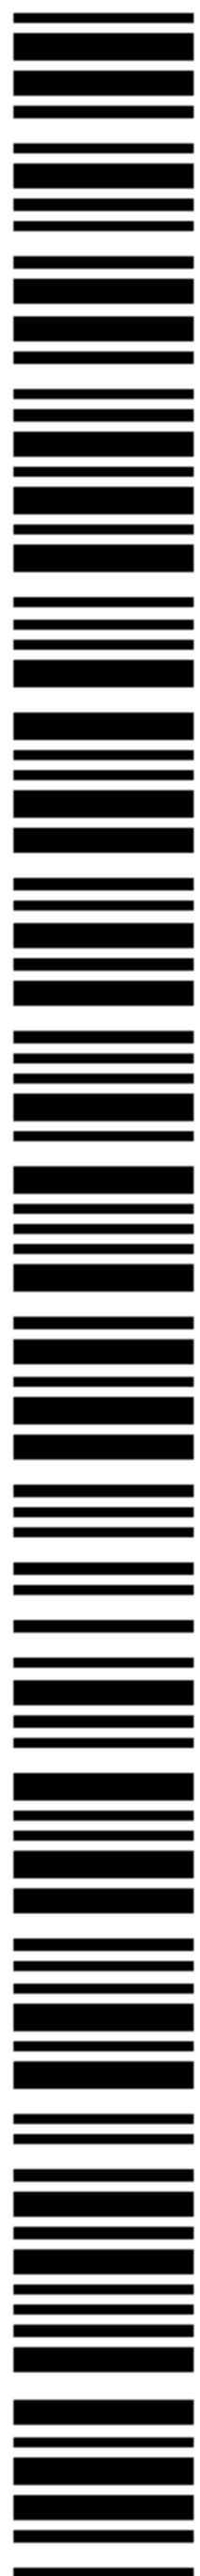

WO 02/059406 A1

(54) Title: SPACE DYED YARN

(57) Abstract: This invention relates to a space dyed yarn (119).

SPACE DYED YARN

This invention relates generally to an improved method and apparatus for the continuous space dyeing of yarn. More specifically, this invention relates to a method and apparatus for spraying dyes or other patterning liquids onto a moving yarn sheet in which a yarn sheet drive roll and liquid application jets are coordinated to provide for the application of several different liquids in accordance with a predetermined pattern and with precision registration, thereby providing the ability to apply such liquids to the moving yarn sheet with no unintended untreated or overlapped sections, and in which the dye that passes through the yarn sheet is collected and recirculated for reuse.

Background of the Invention

The production of yarn having different dyes spaced along its length is termed "space dyeing." Space-dyed yarns are desirable because they easily may be formed into textile fabrics that have an inherent random or pseudo-random pattern imparted by the patterning of the yarns comprising the fabric. While other methods of imparting a similar pattern to textile fabrics are well known, they are more difficult and require more steps than the present invention.

Several methods for space dyeing of yarns are known. Among batch-type processes (in which a predetermined quantity of yarn is treated at one time), for example, it is known to inject yarn packages with a number of different colored dyes to yield a space-dyed product. However, such batch processes are often more costly and require more product handling than continuous processes. Continuous space-dyeing processes (in which moving yarns are individually or collectively treated) are also known. Typically, dye may be applied by a series of rollers, or may be sprayed on individual yarns or yarn sheets. While generally more efficient than package dyeing techniques, these continuous dyeing processes often experience difficulties with dye mist and drips, resulting in unwanted marks and wasted dye liquor. Furthermore, dye overspray from the various colors being applied often mixes together in a single collection system and must be discarded, resulting in added costs for replacement dye as well as for waste handling and disposal.

In addition to the problems recounted above, none of these methods has been able to solve the problems of imperfect registration of the dye pattern. That is, often the yarns produced by these methods exhibit undesirable undyed areas, or areas in which an overlapping of different dyes results in undesirable colorations. Attempts to eliminate undyed areas by providing a constant overspray of dye have resulted in the use of more dye than the instant invention, resulting in a higher cost per pound of yarn, in addition to the necessity of adjusting dye formulations to compensate for the color imparted by the overspray. Such attempts also tend to exacerbate the problem of undesirable overlapping of adjacent dyed areas, and lead to space-dyed yarns in which the overall result is neither predictable nor controllable.

Summary of the Invention

The present invention improves upon the methods discussed above. This invention may be used to apply any type of liquid colorant or patterning agent, including, but not limited to, acid dyes, disperse dyes, or pigments, as well as liquids other than dyes, to a moving yarn sheet. Any liquid yarn treatment agent, including, but not limited to, dye resists, water resists, finishing chemicals, or other treatments may be applied. Liquids may be applied at ambient temperature, or the temperature may be manipulated as desired or required for a particular chemical. Thickeners may be added to the liquids to alter the viscosity as desired or required. For illustrative purposes only, the invention will be described using the application of liquid dyes at ambient temperature. A yarn sheet passes over a yarn driven roll equipped with a sensor which tracks the position of the sheet as it passes through the dyeing apparatus of the instant invention.

Dyeing is controlled by a computer which is programmed to selectively activate and de-activate dye jets in accordance with pattern data in response to position data from the sensor. In this way, dyes are applied precisely at pre-specified locations along the length of the moving yarn sheet. Dyeing takes place when the computer generates a signal that causes an air valve to open, forcing dye liquor from a recirculating dye system to be formed into droplets that are sprayed onto the yarn

sheet. The sensor and computer-controlled dye jets work together so that undyed areas and areas of unwanted overlap of dyes are virtually eliminated, reducing the amount of off-quality yarn produced versus conventional methods.

The invention is not limited as to the yarn that may be processed. Yarns of various sizes (deniers) and kinds, such as filament or spun, and of any fiber type, such as cotton, polyester or nylon, may be processed using the invention. The selection of jet size will vary according to the yarn size, yarn type, yarn composition, speed at which the yarn sheet is run, and pattern effects desired.

The present invention includes a dye overspray collection system that reduces the back-spatter of dye droplets or mist onto portions of the yarn sheet and reduces the quantity of dye that must be discarded due to the commingling of different color dyes. That portion of the dye sprayed in the direction of the yarn sheet that does not strike the sheet and that is not absorbed by the yarn (i.e., the overspray) is intercepted by a wire mesh screen, which reduces splatter onto the rearward-facing surface of the yarn sheet (opposite the dye jets) and allows the droplets to condense and flow down into a dye catch basin. The dye is then sent back to a dye tank, from which dye is drawn and pumped to the dye jet. A separate system is provided for each dye, thereby preventing commingling of different dyes and thereby reducing the amount of dye waste generated. This results in reduced dye costs and reduced costs in waste handling and disposal.

Yet another feature of the instant invention is a drip collection system. A drip collector is positioned under each dye jet to catch drips generated by the jets that might otherwise produce undesirable spotting on the yarn sheet. Dye caught by the drip collectors is directed into the dye catch basin and recirculated for use, as described above.

A further feature of the present invention is a vacuum exhaust system that collects dye mist (small airborne liquid particles of dye) that may be circulating near the yarn sheet, 111 thereby preventing spotting of the yarn sheet by the mist.

Still another feature is a drain which is part of the dye jet system. This drain clears air and foreign particles from the dye jet area, enabling the jet to function properly by reducing spatter and clogging.

Brief Description of the Drawings

The above as well as other features of the invention will become more apparent from the following detailed description of the preferred embodiments of the invention, when taken together with the accompanying drawings, in which:

FIG. 1 is a side view of a space dyeing range embodying the instant invention.

FIG. 2 is a side view of the dye applicator section that is part of the range shown in FIG. 1, with the overspray collection system moved back for machine cleaning or threading.

FIG. 3 is the dye applicator section shown in FIG. 2, with the overspray collection system moved into operating position.

FIG. 4 is a partial cross-sectional view of a portion of the dye applicator section of the dye applicator section of Fig. 3, in which dye is sprayed onto a yarn sheet in response to pattern data, showing an array of five dyeing stations.

FIG. 5 shows a front view of a yarn sheet comprised of individual yarn ends passing over a yarn driven roll equipped with a sensor, as located near the top of the applicator section of FIG. 4.

FIG. 6 is a cross-section of one of the five dyeing stations, and its associated overspray collector, from FIG. 4.

FIG. 7 is a close-up, cross-sectional view of the dye application module shown in FIG. 6; in this Figure, dyeing is not taking place. FIG. 7a is a close-up, cross-sectional view of a portion of the dye application module in which the dye streams and controlling air streams are formed.

FIG. 8 is the dye application module of FIG. 7, but showing the application of dye to a yarn sheet.

FIG. 9 is a perspective view in partial section, as viewed from above, of the air stream/dye stream formation module that is shown in FIGS. 7 and 8.

FIG. 10 is a schematic depiction of the dye flow system.

Description of Preferred Embodiments

This invention includes, but is not necessarily limited to, embodiments having one or more of the following features. A number assigned to a certain element shown in a drawing remains consistent throughout the drawings. Referring to the Figures, **FIG. 1** shows diagrammatically a typical space dyeing range embodying the instant invention. Since dyeing multiple yarns is more practical than dyeing a single yarn at a time, the invention was designed with a creel **101** which holds a plurality of yarn packages **103**.

An individual yarn ("yarn end") **105** from each yarn package **103** is unwound and passed through a first comb **107** which positions each yarn end **105** in uniformly spaced, parallel fashion, so that the yarns do not overlap and are properly spaced to form a yarn sheet **109**. The yarn sheet **109** enters the dye applicator section **111** of the range, which will be described below. After dyeing, the yarn sheet **109** exits the dye applicator section **111** and passes through a drying oven **113**. After exiting the drying oven **113**, the yarn sheet **109** enters a yarn inspection system **115** that counts

the yarn ends **105** to detect any breakage. The yarn ends **105** are then wound by a winder **117** into packages **119**. The packages **119** of dyed yarn are later fixed by an appropriate method, such as by autoclaving, then washed to remove any excess, unfixed dye, and dried. All processes and equipment prior to and following dye applicator section **111** are conventional. Although not shown, it is possible to incorporate the present invention into a continuous process of yarn drawing, dyeing, and heat setting. Such a process could be performed in the order stated, but is not restricted to that particular order.

In the preferred form of the invention POY and FOY multifilament yarns such as polyester, nylon, polypropylene and such are treated by the invention defined below to produce space dyed yarns with a minimum of handling of the yarns to produce the desired result. It is contemplated that monofilament and staple yarns can be produced as herein described, but the best results are achieved on multifilament, synthetic yarns.

As an example of the above, a single ply, 510 denier, 136 filament synthetic POY polyester yarn was processed and dyed by the below described invention to produce a space dyed POY yarn having a denier count of 472. It should be noted that the produced yarn is drawn in the range of 10-20% resulting in a reduced denier yarn having thick and thin portions therein. Another example of a processed and dyed yarn was a small ply, 170 denier, 100 filament POY polyester yarn which when processed and heat set resulted in a space dyed POY polyester single ply yarn of about 145 denier with 100 filaments. As you can see from the above, dense as well as thin yarns can be successfully dyed by the herein disclosed method and apparatus.

FOY yarns can also be readily dyed by the described process but are not drawn like the POY yarn to produce a thinner yarn with thick and thin portions in the yarn. Examples of this are single ply, 600 denier, polyester yarns with 146 filaments and a 100 denier yarn with 36 filaments. These yarns are readily dyed with excellent results. Preferably the FOY yarn was spun drawn before processing rather than FOY yarn produced by other known methods of producing FOY yarn.

Moving now to **FIG. 2**, which depicts in greater detail the dye applicator section **111** of the dyeing range shown in **FIG. 1**, individual yarn ends **105** pass through a first comb **107** of conventional design that arranges the ends into a yarn sheet **109** in which the individual yarn ends are arranged in parallel fashion in the same plane. The yarn sheet **109** passes over a yarn-driven roll **149**, here hidden by housing **121** but shown in **FIG. 4**, and then passes in front of a plurality of dyeing stations **123**, which will be described in greater detail below. Although the instant invention is described in connection with use for space dyeing, which results in yarn with different colors along its length, the invention could also be used to produce uniformly colored yarn. Accordingly, to achieve a desired effect, each dyeing station **123** could apply a different color of dye, or several stations **123** could apply the same color, or all could apply the same color. Spraying a color on top of a different color results in a blend, which may be desirable. To eliminate unintended undyed areas along the length of the yarn sheet, dyed areas should overlap slightly. The extent of such overlap necessary to avoid undyed areas may vary, depending upon machine speed, control system speed, and other factors. The number of individual dyeing stations **123** depends upon the color variety or uniformity desired.

Continuing with **FIG. 2**, an overspray collection system **125** is able to be moved laterally along a track **127**. In this view, the overspray collection system **125** is shown pushed away from the individual dyeing stations **123** to provide access for threading or cleaning the machine. The overspray collection system **125** is equipped with an exhaust **129** that, when the collection system **125** is in place (see **FIG. 3**), collects and removes airborne dye mist generated by the dye application process and thereby prevents spotting of the yarn sheet **109** by the mist.

FIG. 3 shows the dye applicator section **111** described in **FIG. 2** with the overspray collection system **125** moved along its track **127** into operating position in close proximity to the individual dyeing stations **123**.

FIG. 4 depicts a partial cross-sectional view of the left portion of the dye applicator section **111** of **FIG. 3**, showing a plurality of dyeing stations **123** and an overspray collection system **125** in the operating position indicated in **FIG. 3**. Having passed through comb **107** (shown in **FIGS. 1-3**), yarn sheet **109** passes through a second comb **131**, over a first non-rotating rod **133**, and then over the top of a yarn-driven roll **149**. As depicted in **FIG. 5**, a magnetic pulser disk **151**, affixed to one end of roll **149**, turns with roll **149**. A rotary motion digital sensor **153** is associated with disk **151**. Digital sensor **153** reads the position of the disk **151** as the yarn sheet **109** rotates roll **149**. Specific rotational positions, or changes in such rotational positions, of the disk **151** correspond to discrete locations or movements along the length of yarn sheet **109**. The digital sensor **153** sends the positional information to a controller or digital computer **50** which also contains patterning data, and can coordinate the actuation of the individual dye jets at each of the dyeing stations **123** in accordance with such data, using known programming techniques. Accordingly, the dye may be directed onto the yarn sheet **109** in response to actual yarn sheet **109** movement, and not in response to an assumed substrate web speed or the passage of an arbitrary time interval. Further details relating to this technique may be found in U.S. Patent No. 4,923,743 to Stewart, the disclosure of which is hereby incorporated by reference. Either random or pre-determined patterns may be stored in computer **50**.

Also shown in **FIG. 5**, brake **155** is necessary to keep taut the yarn ends **105** comprising yarn sheet **109**. The individual yarn ends **105** are pulled through the space dyeing range by a winder **117** (as shown in **FIG. 1**), and if only the winder **117** were to stop, roll **149** would continue to turn by inertia and would continue feeding the yarn ends **105**, which would then tangle. To stop the yarn ends **105** while maintaining tension, the brake **155** is applied to stop roll **149** (the yarn ends **105** simply will slide over the stopped roll), after which the winder **117** is stopped.

Again referring to **FIG. 4**, dyeing at each of the dyeing stations **123** is performed by forming a stream of dye within the dyeing station **123**, and selectively deflecting and dispersing the dye stream into the yarn sheet path in the form of droplets in

accordance with externally supplied patterning information. Further details of this stream formation/deflection technique may be found in U.S. Patent Nos. 5,211,339 and 5,367,733 to Zeiler, the disclosures of which are hereby incorporated by reference. An air pressure sensor **135** controls the pressure of air flowing to a machine air supply manifold **137** which extends across the width of the yarn sheet and serves as a source for the deflecting air used to redirect and disperse the dye stream generated by the dye jets. Each dyeing station **123** is equipped with a comb **139** to assure that yarn ends **105** remain spaced and in parallel relationship as they pass in front of that dye station. After passing in front of all dyeing stations **123**, yarn sheet **109** passes over a second non-rotating rod **141** and through a last comb **143** to assure proper separation of the yarn ends **105** before ends **105** enter drying oven **113** (see **FIG. 1**). **FIG. 4** also shows water supply hose **145** which supplies water to a plurality of nozzles **147** for washing down the dyeing stations **123** and the overspray collection system **125**, which will be described in more detail hereinbelow in connection with **FIG. 10**.

A cross section of a single dyeing station **123** and its associated overspray collection system is shown in **FIG. 6**. As yarn sheet **109** approaches dyeing station **123** at which an application of dye is desired, as determined by externally supplied patterning data accessible to computer **50**, computer **50** sends appropriate actuation signals through a plurality of wires **157** connected to an array of air valves **159** positioned across the path of yarn sheet **109**. Air valve array **159** is supplied with air by station air supply manifold **177**, which in turn is supplied with air by machine air supply manifold **137** (**FIG. 4**). A plurality of individual air lines **161** run from a respective air valve **159** to the generally "V"-shaped dye application module **163**, a portion of which is air stream/dye stream formation module **164**, in which the dye streams and controlling air streams are formed and interact. As desired, the number of air valves **159** may be increased to provide greater flexibility in side-to-side patterning of yarn sheet **109**; ultimately, each individual air line **161** may be connected to a separately controlled air valve **159**. Dye application module **163** and air stream/dye stream formation module **164** are shown in more detail in **FIGS. 7** and **8**.

A dye pressure sensor **165** regulates the flow of dye through dyeing station **123**. Dye is supplied continuously to dye pressure sensor **165** via dye supply manifold **160**. Liquid dye is delivered to dye application module **163** via dye supply line **167** from dye supply manifold **160**. The yarn sheet **109** is shown in a vertical orientation and the dye spray **169** is shown being delivered in a horizontal orientation; this perpendicular arrangement of yarn sheet **109** and dye spray **169** results in a generally circular spray pattern. Any of these orientations may be varied, as required, so long as care is taken to avoid unintended dye contact on the yarn sheet, as may occur through dye mist settling on the yarn sheet through gravity, through the influence of a draft generated by the movement of the yarn sheet, etc.

As dye liquid is sprayed onto the yarn sheet **109**, some of the dye spray **169** passes between the individual yarns comprising sheet **109**. Positioned opposite module **163** and beyond the plane of yarn sheet **109** is a section of wire screen **171** that intercepts and breaks up the spray, assists in condensing or coalescing dye mist, and serves to shield the rearward side of yarn sheet **109** from back-scattered dye droplets that could be generated by the impact of unimpeded dye spray on the inside wall of collecting chamber **173**. Screen **171** prevents undesirable spotting of the yarn sheet **109**. The openings in the screen **171** must be large enough to be readily cleaned by the washdown nozzles **147** (FIG. 4), but not so large that dye droplets can pass through them without breaking up. Mesh sizes typical of readily available screening materials (e.g., about 100 to about 600 openings per square inch) are likely to be most effective.

The screen **171** is preferably positioned at an angle to the yarn sheet **109** such that the screen is oblique to the yarn sheet rather than parallel to it -- a parallel arrangement tends to result in droplets bouncing straight back from the screen surface toward the rearward side of the yarn sheet **109**. Relative screen angles (with respect to the yarn sheet) of about 25 to about 75 degrees should be satisfactory, with an angle within the range of about 40 to about 50 degrees being a preferred screen angle. It should be noted that, as the relative angle of screen **171**

is increased, the effective size of the openings in relation to the size of dye droplets decreases, due to the oblique presentation angle encountered by the stream of dye droplets. Accordingly, it is possible to use screen mesh openings larger than the droplets while retaining the capability to break up the droplets.

Some of the dye liquid passes through the screen **171** and strikes the back of the overspray collection chamber **173**, while the remainder of the liquid drips off of the screen **171**; in both cases, the dye liquid flows by gravity down the inside wall of overspray collection chamber **173** and into catch basin **175** for recycling (which will be described in association with **FIG. 10**, below).

FIGS. 7 and **7A** are close-up, cross-section views of a dye application module **163** in the inactive state, i.e., when the patterning data specify that no dye should be applied to yarn sheet **109**. Details of **FIGS. 7** and **7A** shall be explained with reference to **FIG. 9**, which shows, in a partial cut-away perspective view, the air stream/dye stream formation module **164** used to selectively direct and disperse the delivery of dye onto the yarn sheet **109**. When dye is not being applied to the yarn sheet **109**, air does not flow through the air lines **161**.

Liquid dye enters the stream formation module **164** through dye supply line **167**, which is operatively attached to module **164** by means of a threaded coupling **22** or similar means. The liquid dye then circulates through the stream formation module **164** by flowing first into dye chamber or trough **18** and then through jet-forming grooves **28** machined into the angled forward wall forming trough **18**, as shown in more detail in **FIG. 9**. The dye flows through dye orifices **181**, and is propelled under pressure across an open area **183** until the liquid dye encounters a deflector bar **185** that directs the liquid backward and downward so that it flows into catch basin **175**.

Looking collectively at **FIGS. 7-9**, the dye channel or trough **18**, formed within stream formation module **164**, communicates with a number of dye conduits **20** along the rear **29** wall **24** of trough **18**. Dye conduits **20** are in fluid communication with

threaded couplings **22** that communicate with the rear wall **24** of the stream formation module **164**. Threaded couplings **22** provide a means for connecting the dye conduits **20** to dye supply lines **167**, that in turn are connected to the dye supply manifold **160** (see **FIGS. 6 and 10**).

Upper planar surface **26** of stream formation module **164** has a plurality of dye grooves **28**, each of which extends from trough **18** to the forward edge of stream formation module **164**, thereby forming an array of dye orifices **181** directed at deflector bar **185**.

The present embodiment uses one dye orifice **181** per yarn end **105**, with the dye spray **169** covering about three yarn ends **105**, but other ratios could be employed. Dye grooves **28** are longitudinally spaced along upper planar surface **26** of stream formation module **164**, preferably at uniform intervals that correspond to the level of lateral patterning detail desired. Most preferably, dye grooves **28** are spaced at uniform intervals corresponding to the spacing of each yarn end **105** comprising yarn sheet **109**. It has been found that about five to about fifteen dye grooves **28** (and yarn ends **105**) per inch are generally satisfactory, although spacings that are outside this range may also be used. To assure uniform application of dye across the width of the yarn sheet, each groove should have the same predetermined uniform cross-sectional area. The selection of dye groove **28** size will vary according to the yarn size and speed at which the yarn sheet is run, and the pattern effects desired. In one embodiment of the present invention, a square groove 0.018 inches per side was used.

Stream formation module **164** also contains individual bored air passages **10** (**FIG. 7**) positioned in spaced parallel fashion under trough **18**. Each bored air passage **10** is connected to a respective air supply line **161** via a friction-fitted tube **14** of appropriate size. At the opposite end of each bored air passage **10** is fitted a second friction-fitted tube **13**, the outside end of which forms an air orifice **12** (**FIG.**

7a). The diameter and cross-sectional shape of these tubes depend upon several factors, including the shape and mass of the dye stream to be controlled. Accordingly, the choice of tube size and shape is somewhat discretionary. Circular tubes having an outside diameter of about 0.050 inch and inside diameter of about 0.033 inch have been used in conjunction with the square 0.018 inch dye orifice **181** described above.

Collectively, air orifices **12** are longitudinally spaced along the lower front of stream formation module **164**, preferably in one-to-one correspondence with dye grooves **28**, so that each air orifice **12** is paired and aligned with a corresponding dye orifice **181**. This arrangement allows the air streams from air orifices **12** to intersect the dye streams emerging from dye orifices **181**, and effectively deflect and disperse the resulting dye spray in the direction of yarn sheet **109**.

The upper cover plate **36** is a block of stainless steel having generally planar upper, lower, front, rear and side surfaces **36a**, **36b**, **36c**, **36d**, and **36e**, respectively. A series of clamping members **38** is arranged to interact with mounting surface **40**. The stream formation module **164** is assembled by placing lower surface **36b** of upper cover plate **36** in parallel mating relationship with planar surfaces **26** of stream formation module **164**, with side surfaces **36e** of the upper cover plate flush with the side surfaces of stream formation module **164** and with the front surface **36c** of upper cover plate **36** flush with front surface **30** of stream formation module **164**. Threaded bolts **42** are then placed through the clearance holes **44** in the clamps **38** and are threaded into the upper fastening holes **46**. Bolts **42** are tightened to cause clamps **38** to produce a liquid-tight seal between the upper cover plate **36** and the mating surfaces of stream formation module **164**. Once assembled, module **164** provides an array of dye conduits for delivering dye and air through the module. The lower surface of upper cover plate **36** encloses dye

grooves **28** to form covered dye conduits extending from trough **18** to dye orifice **181**.

The assembled module **164** is used to spray patterns on a yarn sheet **109**.

FIG. 8 is a close-up, cross-sectional view of the application of a dye spray **169** to a yarn sheet **109**.

The stream formation module **164** is attached through mounting holes **48** (see **FIG. 9**) through the rear wall of stream formation module **164** to a mounting bracket associated with dye application module **163**. As shown in **FIG. 6**, the pressurized dye source is connected to dye supply couplings **22** via dye supply manifold **160** and dye supply lines **167**. Dye can then flow in a continuous path from the dye source, into trough **18**, through the dye conduits formed by dye grooves **28** and out through dye orifices **181**. Trough **18** preferably may be fitted with bottom-located dye bypass drain holes **33** (see **FIG. 9**), to which are connected fittings **189** and dye return conduits **34**. Dye return conduit **34** drains into catch basin **175** for connection to the dye recirculation system (see **FIG. 10**). This bypass arrangement keeps some dye circulating in the system regardless of the output of the dye jets formed by groove **28**, and provides for the capture of dirt and other contaminants in the dye, as well as for the removal of air bubbles in the dye.

More specifically, two general dye flow streams exist in trough **18**. One stream (the supply stream) flows from the exit of each dye supply conduit **20** to the entrance of each dye conduit formed by dye groove **28**. The second flow stream (the bypass stream) flows from the exit of each dye supply conduit **20** to the entrance of each dye bypass drain hole **33**. In the undesirable event that a solid contaminant lodges itself at the entrance to a dye conduit formed by dye groove **28**, thus restricting dye flow through that groove **28**, it can easily be pushed away from the groove entrance and out of the supply stream and into the bypass stream by inserting a properly sized wire into the conduit from the orifice **181**. The solid contaminant would then exit the trough **18** by way of dye bypass drain hole **33**, through the dye return

conduit **34** and into the recirculation system (see **FIG. 10**) where it will be removed through filtration.

The pressurized air source is connected to air supply fittings **14**. When air flow is desired, air can flow in a continuous path from the ultimate source of pressurized air, not shown, through station air supply manifold **177** (**FIGS. 4 and 6**) and an associate electromechanical air valve, indicated at **159** (**FIG. 6**), to air lines **161**, air supply fittings **14**, air supply channels **10**, and out through air orifices **12**.

The operation of a spraying apparatus employing a module of the present invention can be described by considering the operation of a single air conduit/dye conduit pair and with reference to **FIG. 7**. Dye is continuously supplied to trough **18** by dye supply lines **167** and flows out dye orifice **181**. The dye stream emanating from dye orifice **181** flows unimpeded into the surface of diverting lip or blade **185**, which collects the dye in catch basin **175** for disposal or recirculation to dye tank **191** (**FIG. 10**). An air control valve **159** operatively associated with station air supply manifold **177** prevents air from flowing to air supply fitting **14** and through air orifice **12** until patterning data so demands.

When dye from the dye stream is to be applied to the yarn sheet **109**, pulses of air supplied by station air supply manifold **177** are generated by the opening and closing of the individual control valves **159** in accordance with pattern data supplied by computer **50**, and are supplied to the respective air supply fittings **14** via individual hoses **161**. As shown in the detail of **FIG. 7a**, the dye orifice **181** and air orifice **12** are positioned such that the dye is contacted with a pressurized stream of air after it exits from the dye orifice **181**. As a result of the interaction of the higher pressure air stream (e.g., 10-20 p.s.i.g.) with the lower pressure dye stream (e.g., 2-4 p.s.i.g.), the dye stream is broken up into a spray of diverging droplets. The combined momentum of the two streams then carries the droplets to the surface of the yarn sheet **109**. Any droplets of liquid that drip from the dye spray **169** fall into a drip collector **187** and then flow down into the catch basin **175**.

The computer **50** is programmed to apply dye from a certain dyeing station **123** for a certain amount of time, which may be varied as desired to achieve a particular effect. Once the dye spray **169** has been applied for the desired amount of time, the computer **50** sends a signal to the air valve (**159, FIG. 6**) to close, turning off the flow of air through the appropriate hoses **161**, and the dyeing station **123** returns to the inactive state depicted in **FIG. 7**. Because the dye exits the dye orifice **181** outside of the airstream envelope, aspiration of dye from the dye supply conduit is eliminated, thereby eliminating the need to create uniform aspiration across the width of the module.


FIG. 10 shows the dye flow system associated with each dyeing station **123**. A dye tank **191** supplies dye liquid to a pump **193** that pumps the dye liquid to a filter **195** that removes foreign particles from the liquid. After filtering, the dye liquid is directed to dyeing station **123** via dye supply manifold **160**. A dye pressure sensor **165** controls the amount of dye liquid that is supplied to stream formation module **164**. When dyeing is taking place, as shown, dye liquid overspray and drips enter catch basin **175** and recirculate to dye tank **191**. When dyeing is not occurring, the dye liquid is directed by a deflector bar **185** (see **FIG. 7**) into catch basin **175**, whereupon the liquid recirculates to dye tank **191**. Dye tank **191** is equipped with a dye level pressure sensor **197** that controls the amount of dye liquid in tank **191**. When the amount drops to a certain level, dye level pressure sensor **197** causes a dye supply line valve **199** to open, allowing dye liquid from an alternate supply tank (not shown) to flow via dye supply line **201** into dye tank **191** until the level of dye increases to the desired level, at which time dye level pressure sensor **197** causes valve **199** to close. The dye flow system is equipped with a clean water line **203** and valves for automatic clean up, whereby dye in the system is drained and the dyeing system is operated with clean water substituted for dye. Water line valve **205** remains closed during normal dyeing operation, but is opened during automatic clean up to allow water to flow. Dyeing station supply line valve **207** is open during normal dyeing operation to allow for dye circulation. It can be closed during part of the cleaning cycle (e.g., when flushing filter **195**), or opened to allow water to flow to dyeing

station **123** for cleaning. Filter drain valve **209** is closed during normal dyeing operation and opened to drain filter **195** when necessary for cleaning. Waste disposal valve **211** remains closed during normal operation, and is opened to drain dye liquid or clean up water from the dye flow system to a waste disposal means.

Having described the principles of my invention in the form of the foregoing exemplary embodiments, it should be understood by those skilled in the art that the invention can be modified in arrangement and detail without departing from such principles, and that all such modifications falling within the spirit and scope of the following claims are intended to be protected hereunder.

Claims

1. A yarn consisting of: a length of single ply yarn having a continuous pattern of a plurality of space-dyed portions thereon.
2. The yarn of claim 1, whereon said yarn is multifilament, continuous filament synthetic yarn.
3. The yarn of claim 2, wherein said yarn is POY yarn.
4. The yarn of claim 2, wherein said yarn is FOY yarn.
5. The yarn of claim 1, wherein said yarn is composed of staple fibers.
6. The yarn of claim 1, wherein the single ply yarn has thick and thin portions thereon.
7. The yarn of claim 1, wherein the single ply yarn comprises a synthetic yarn.

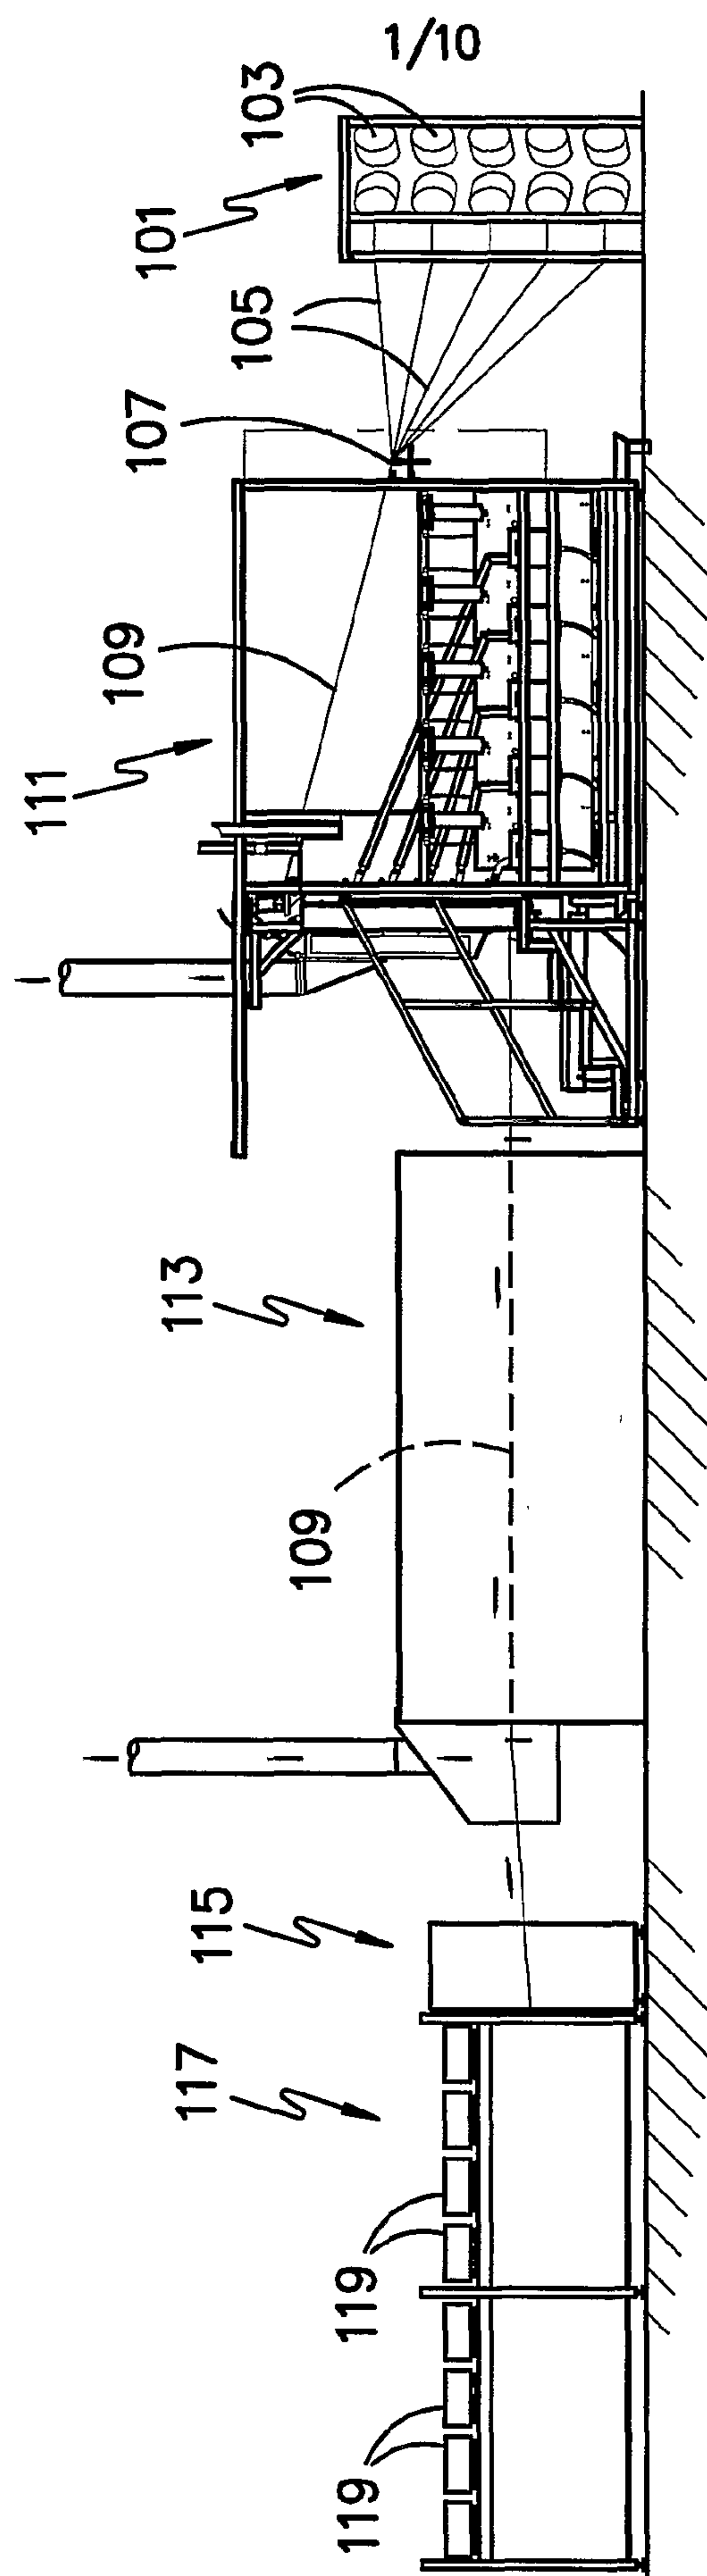*FIG. -1-*

2/10

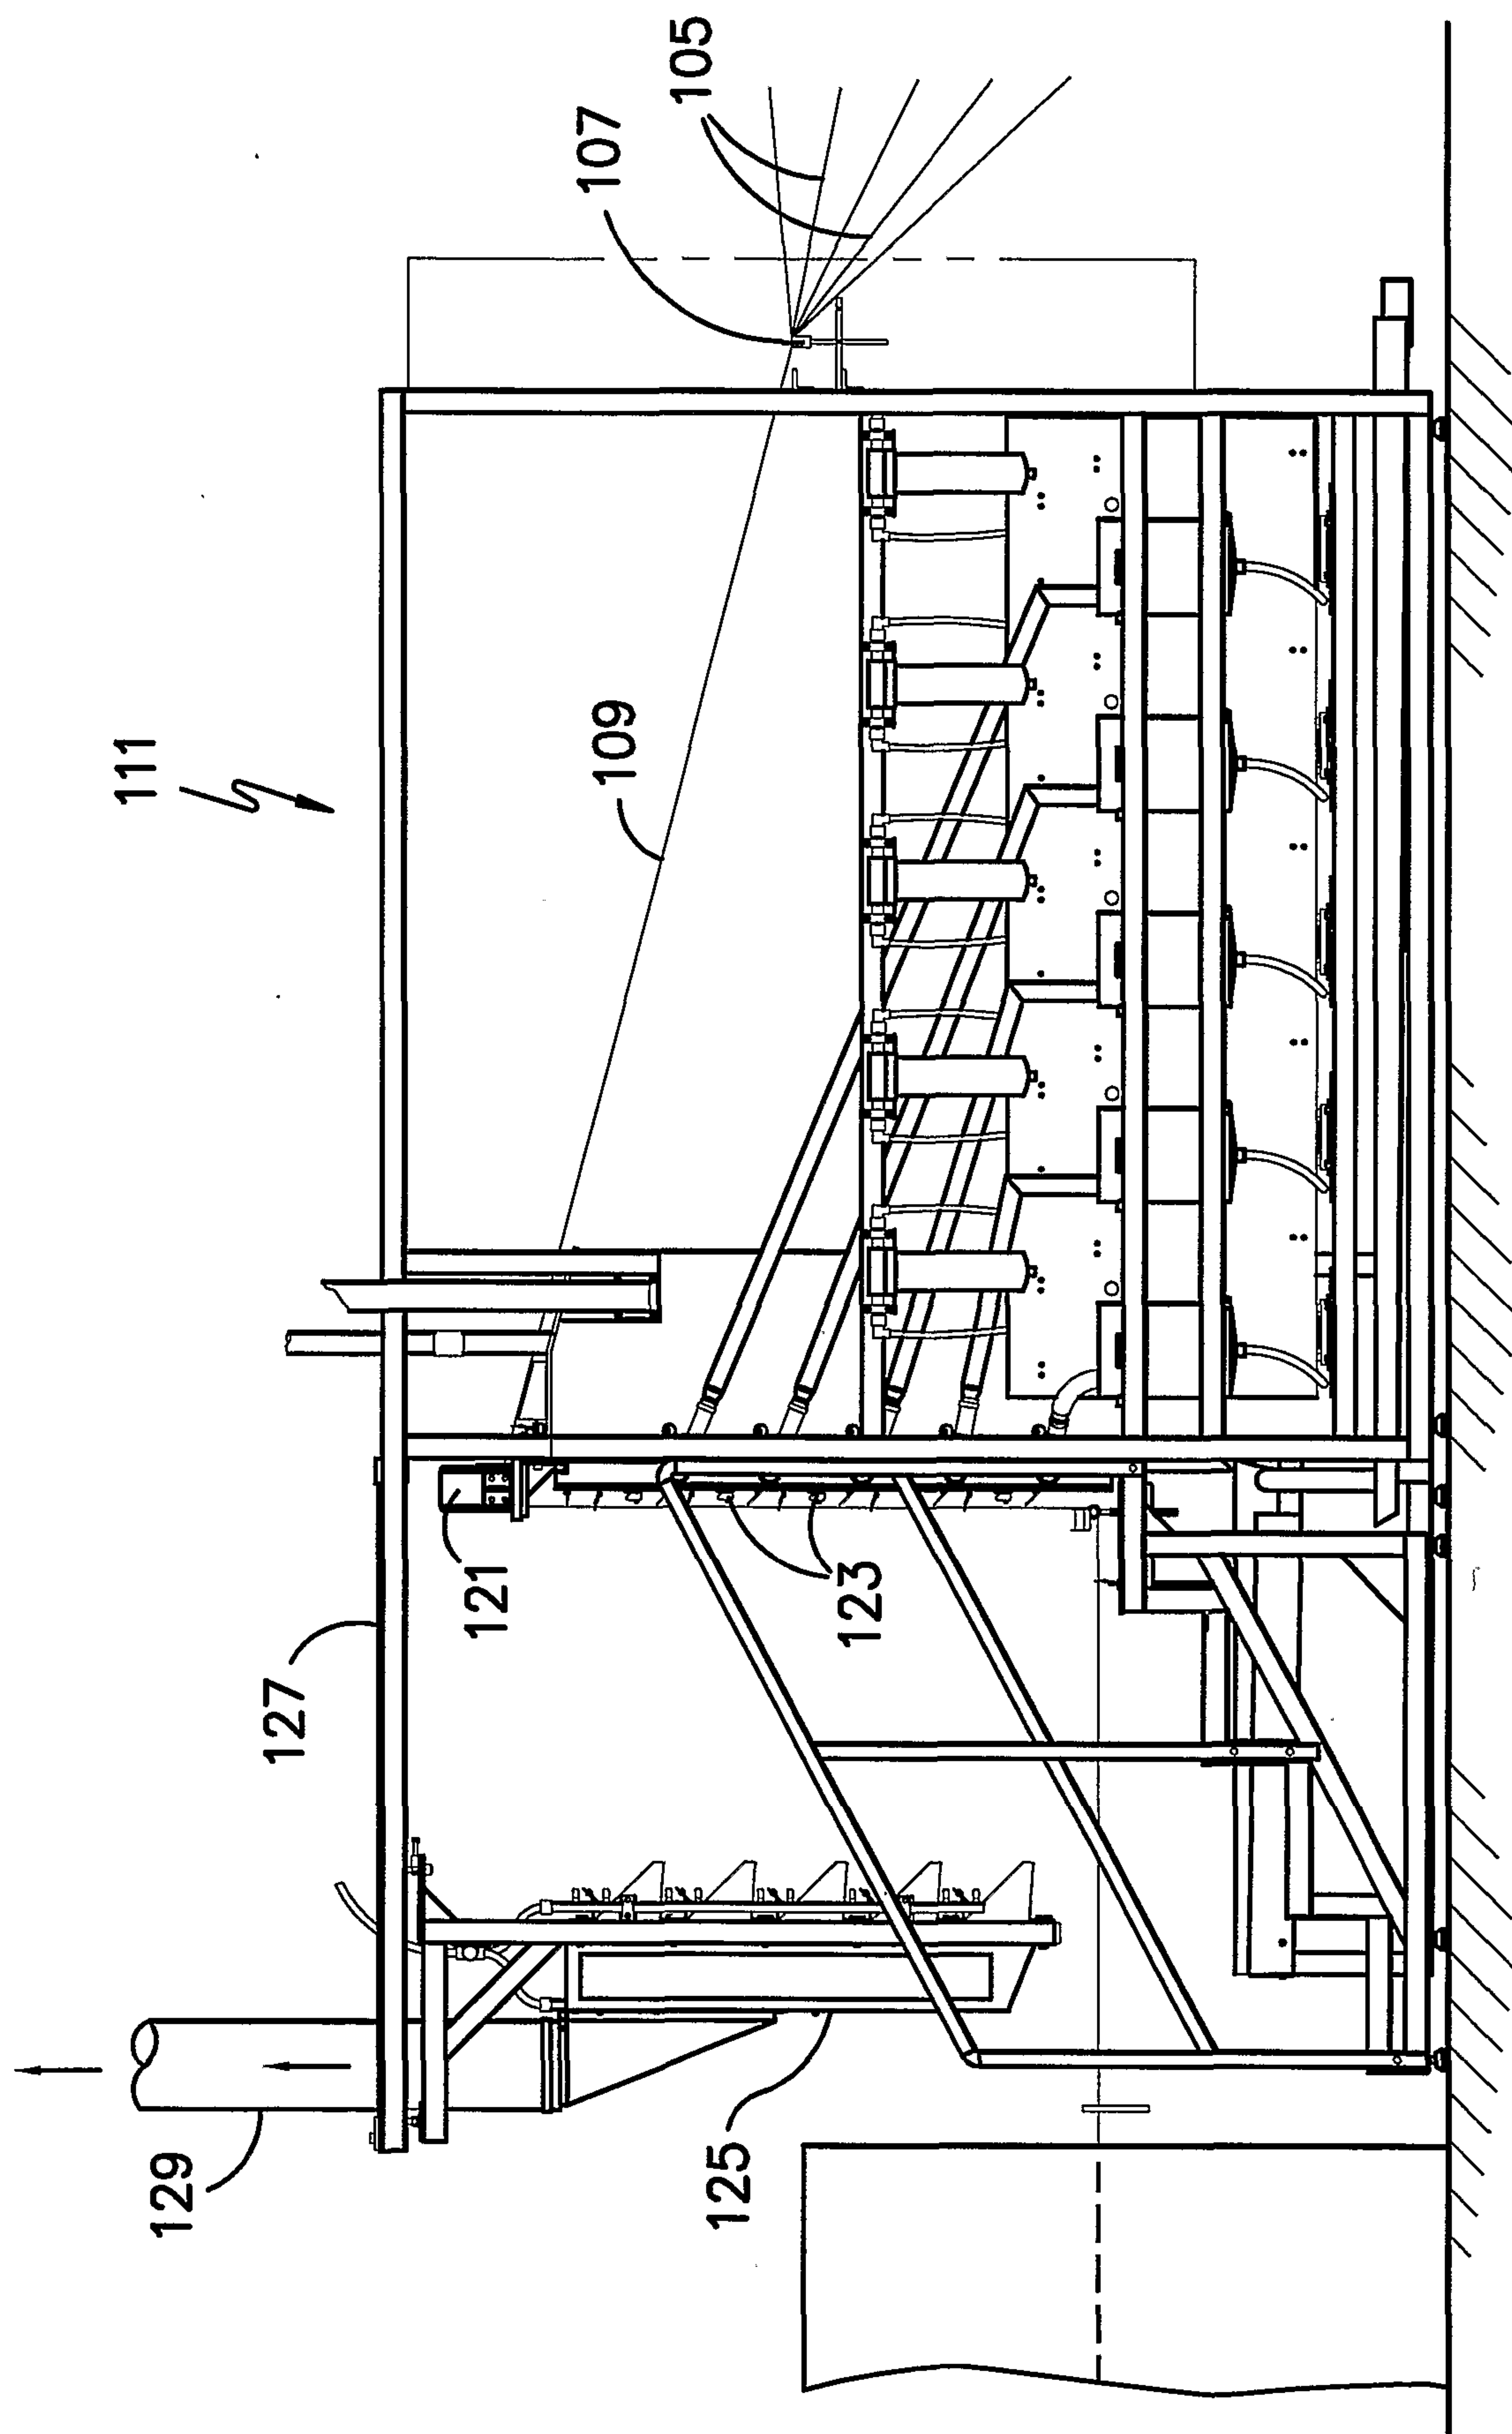
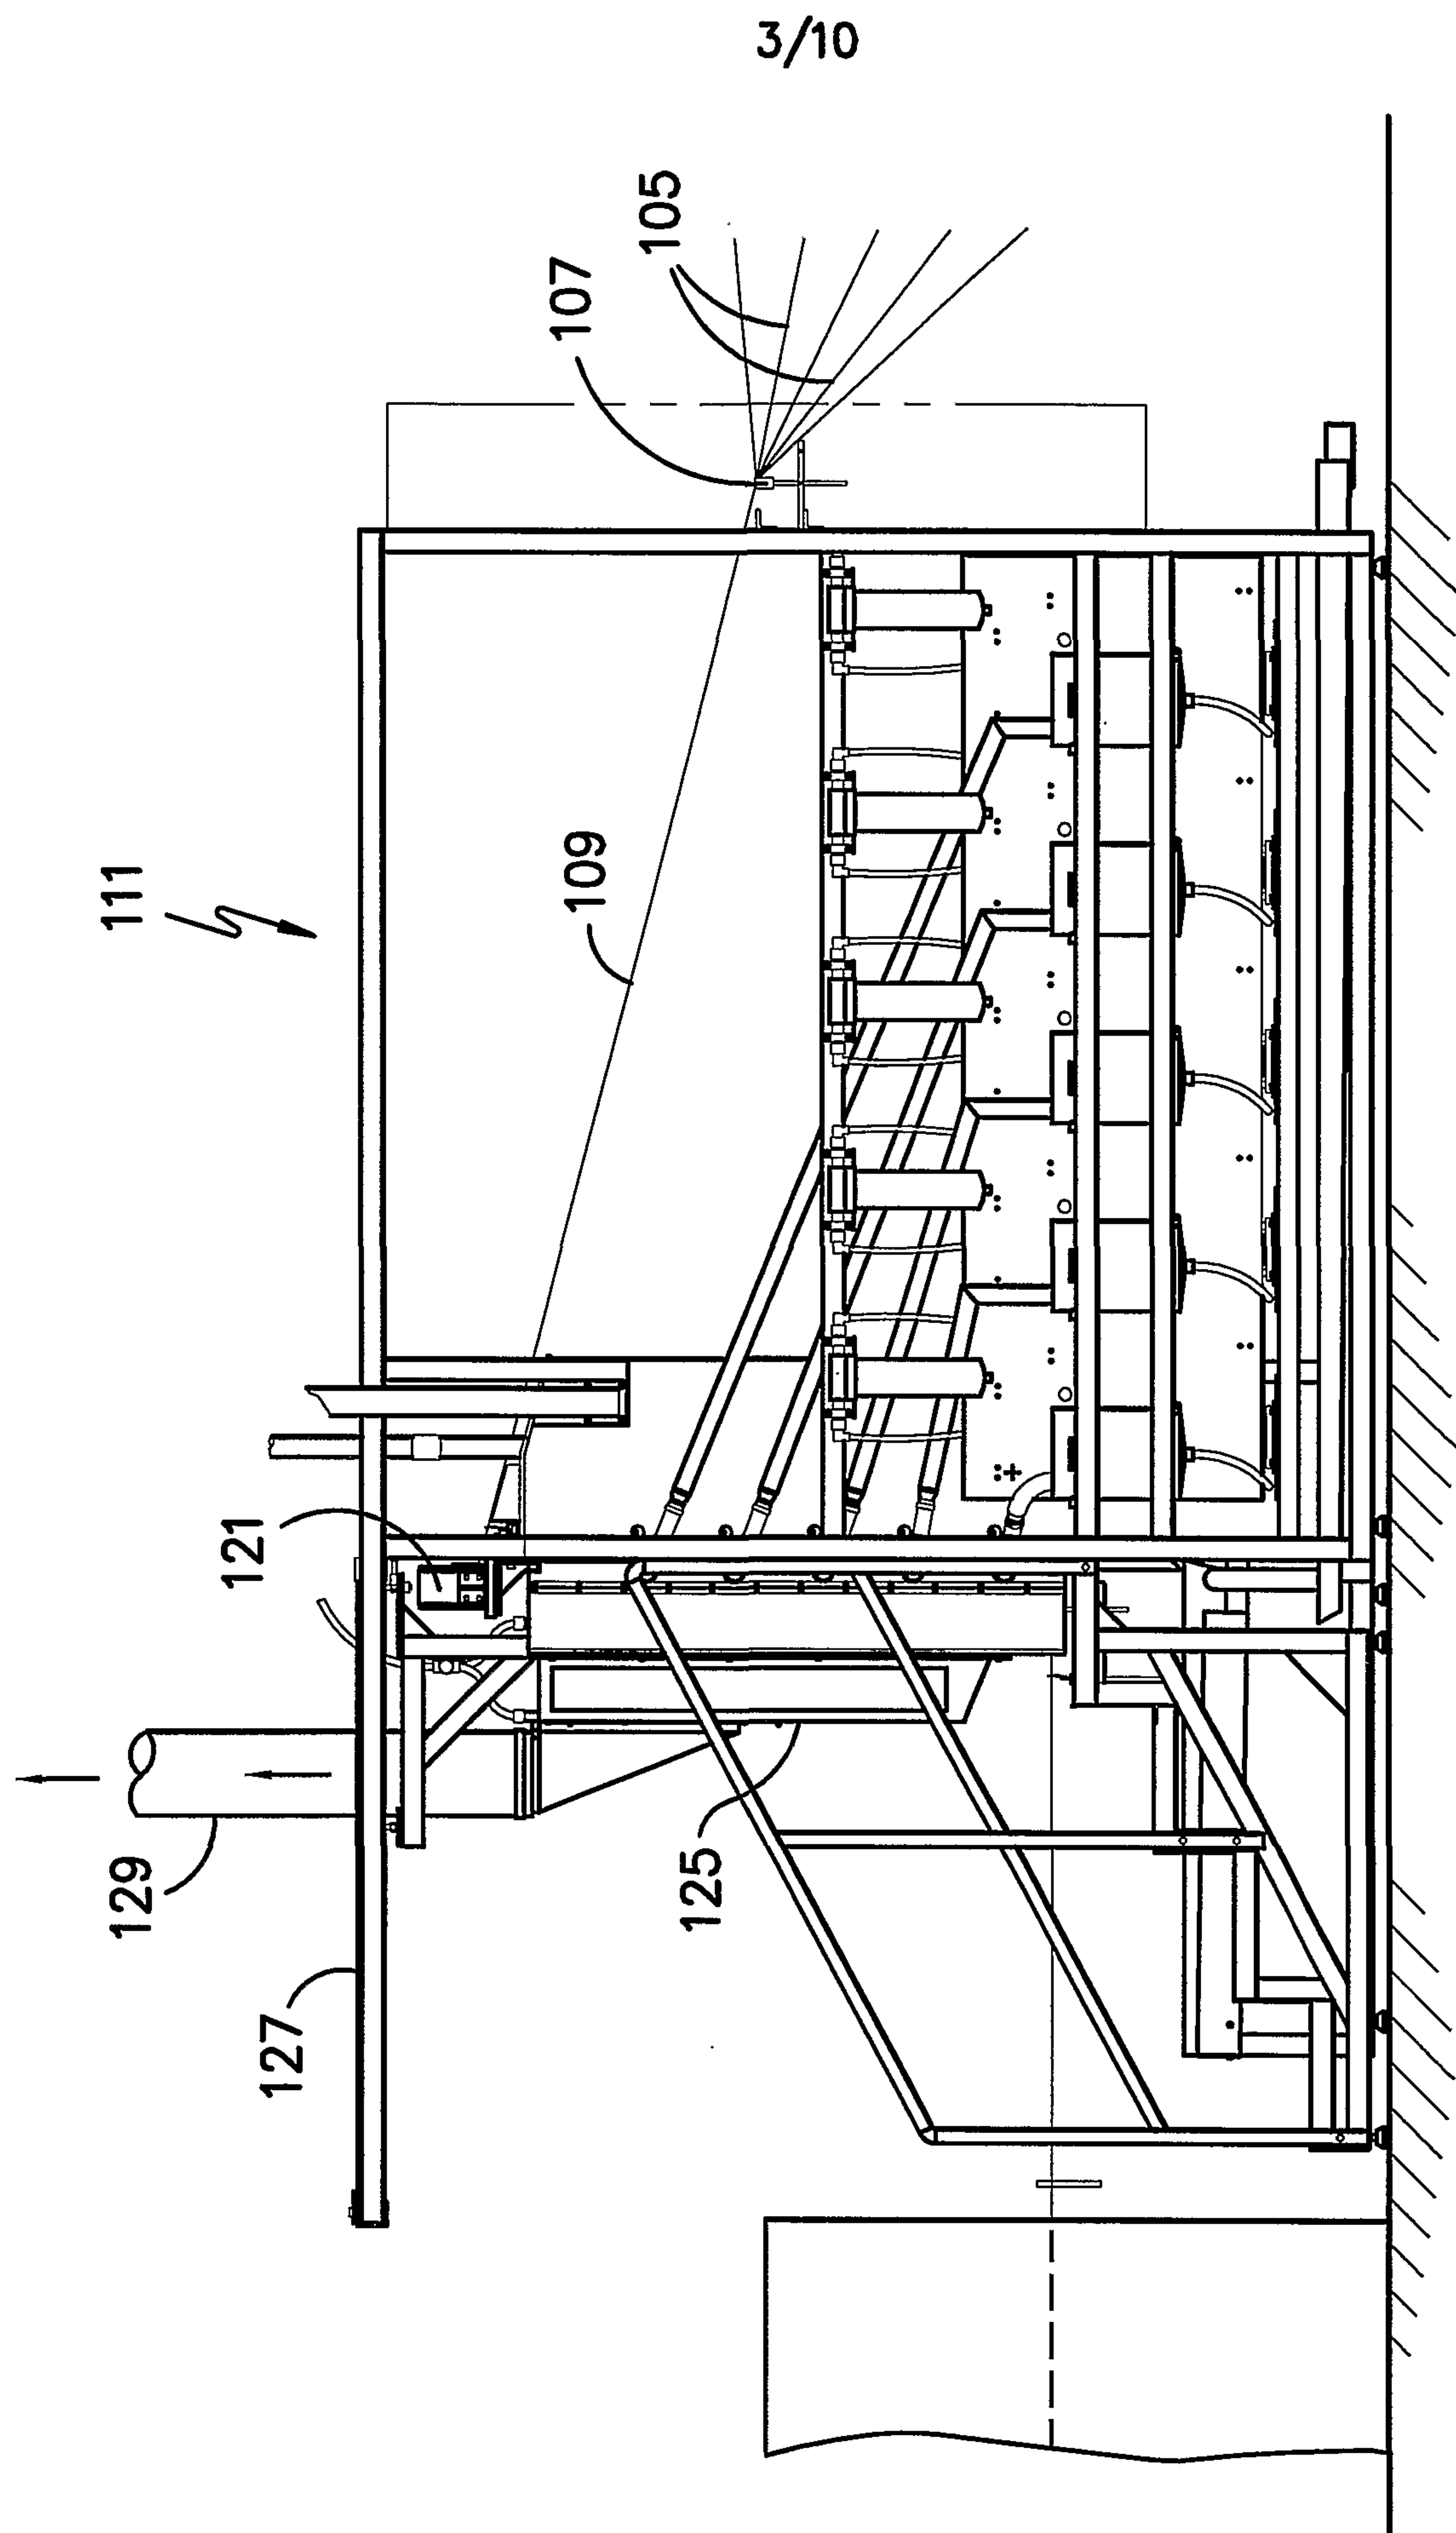
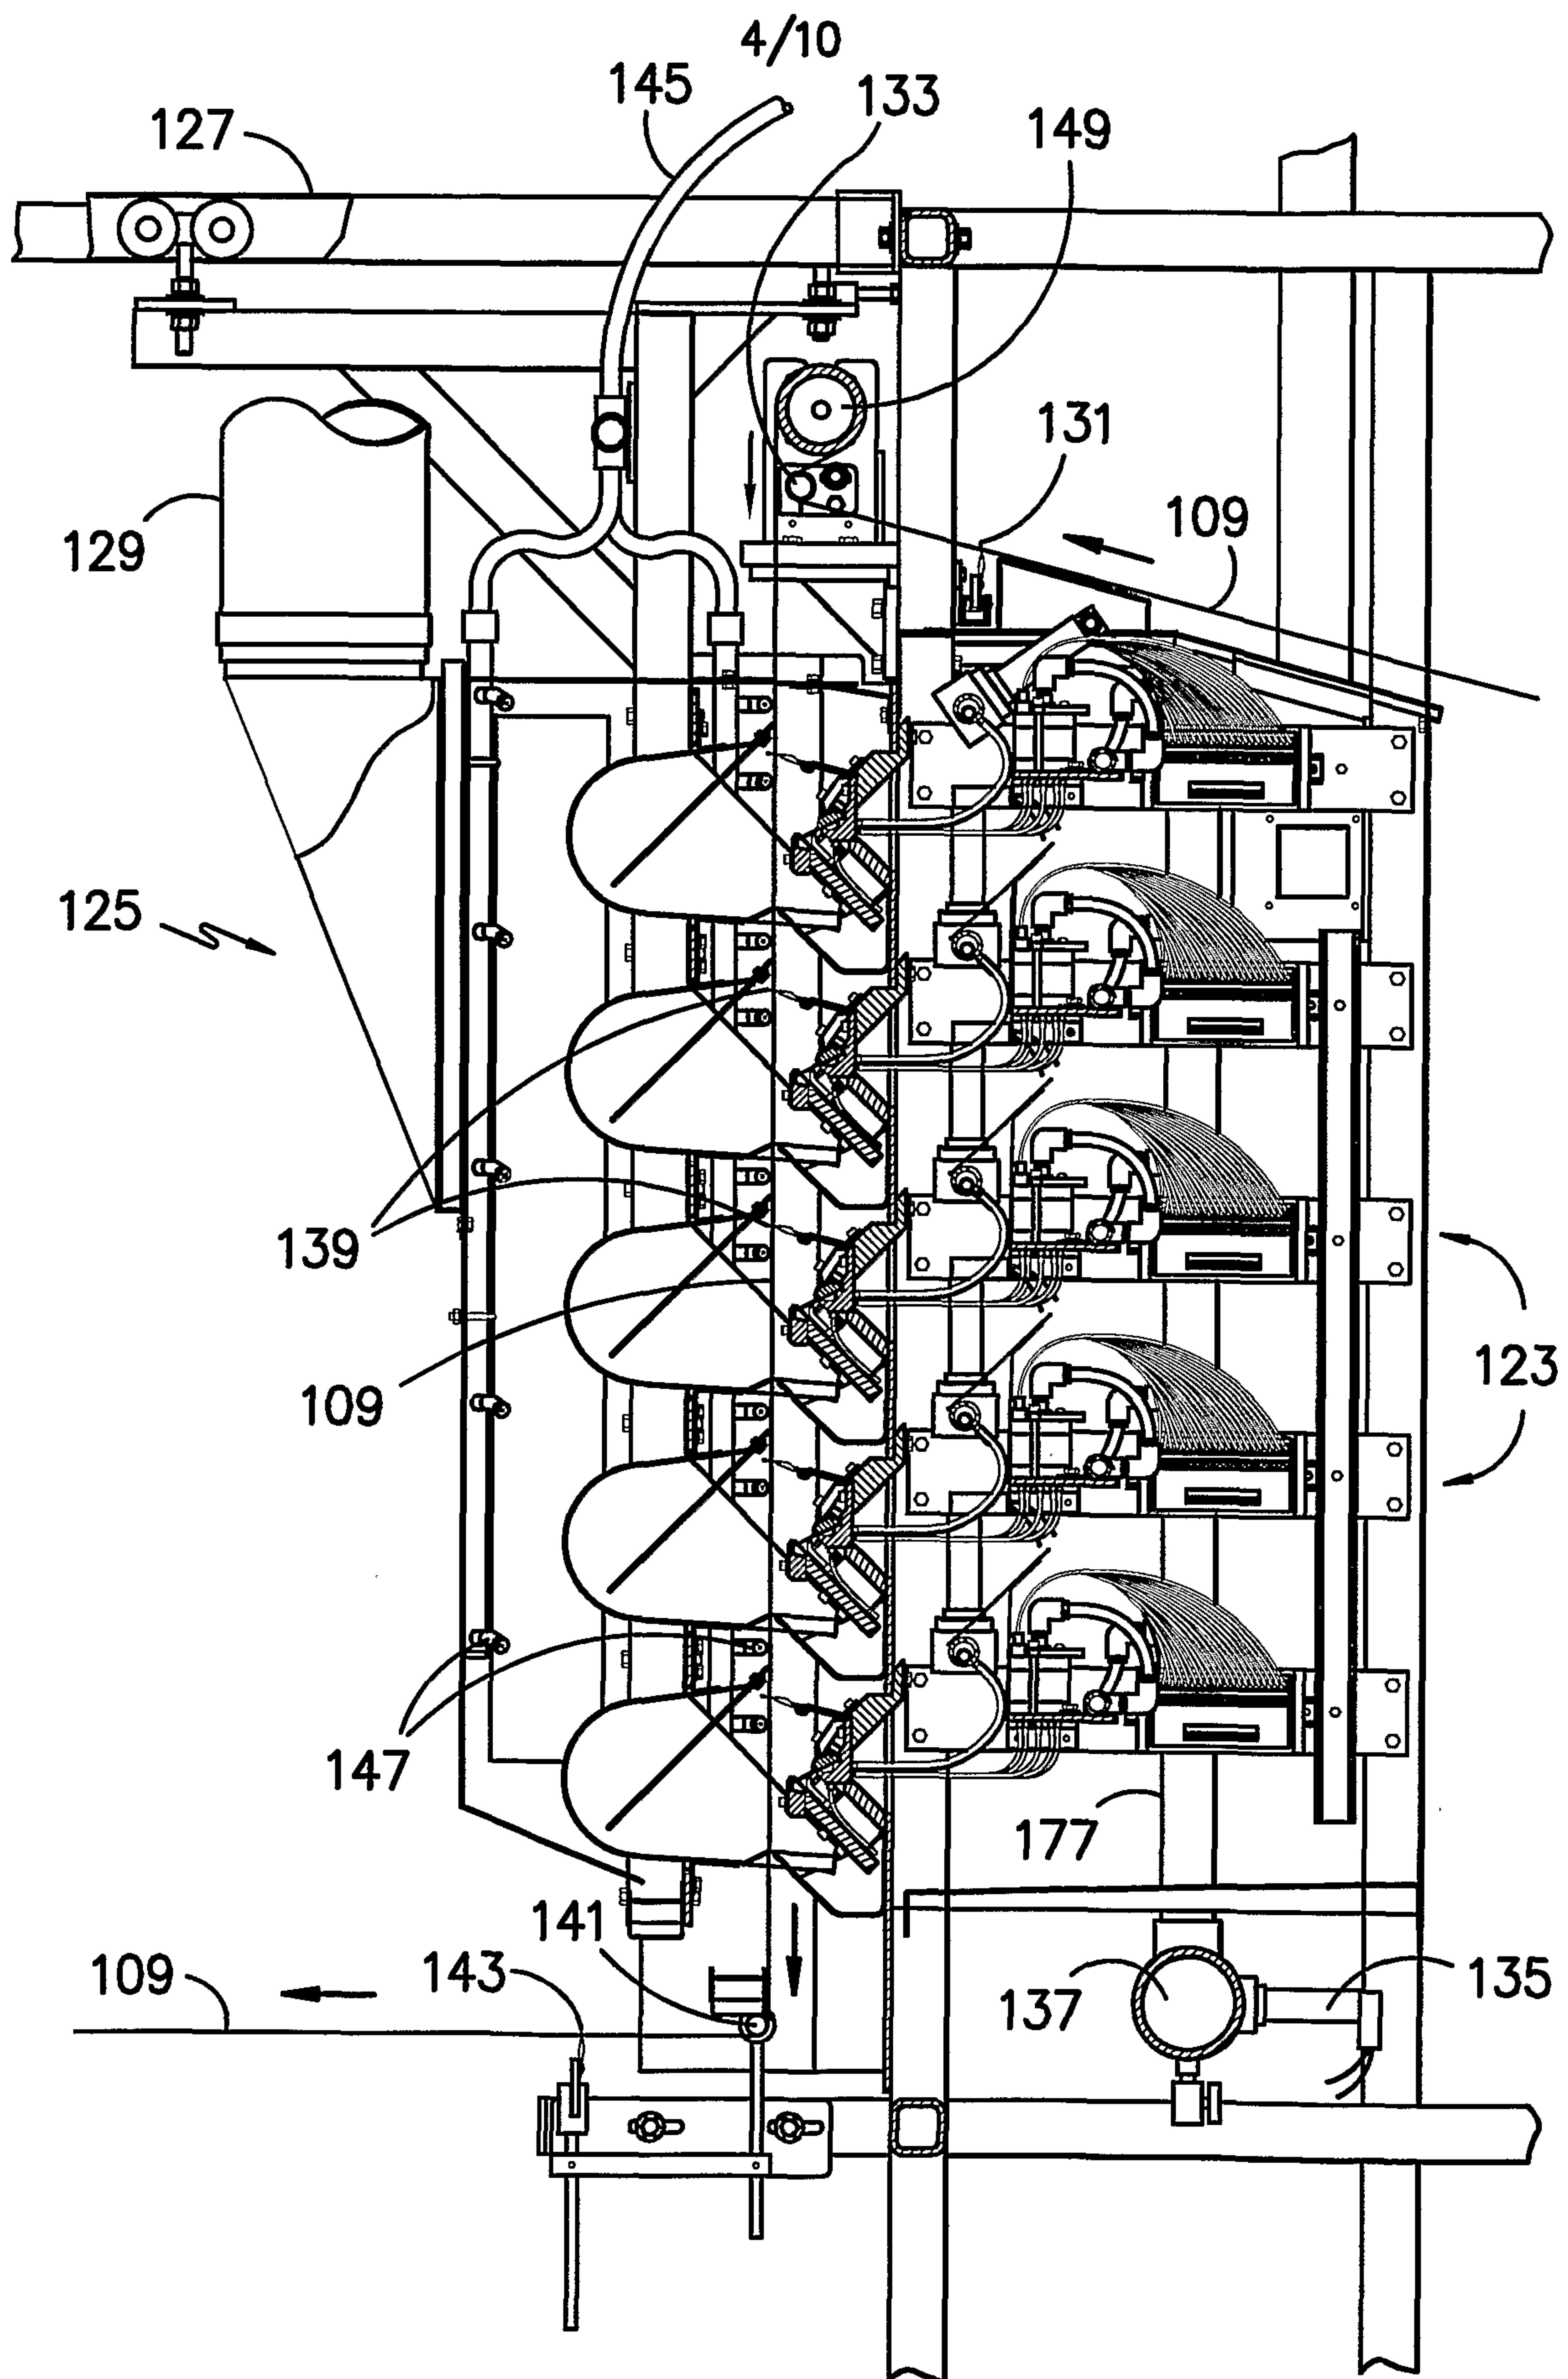
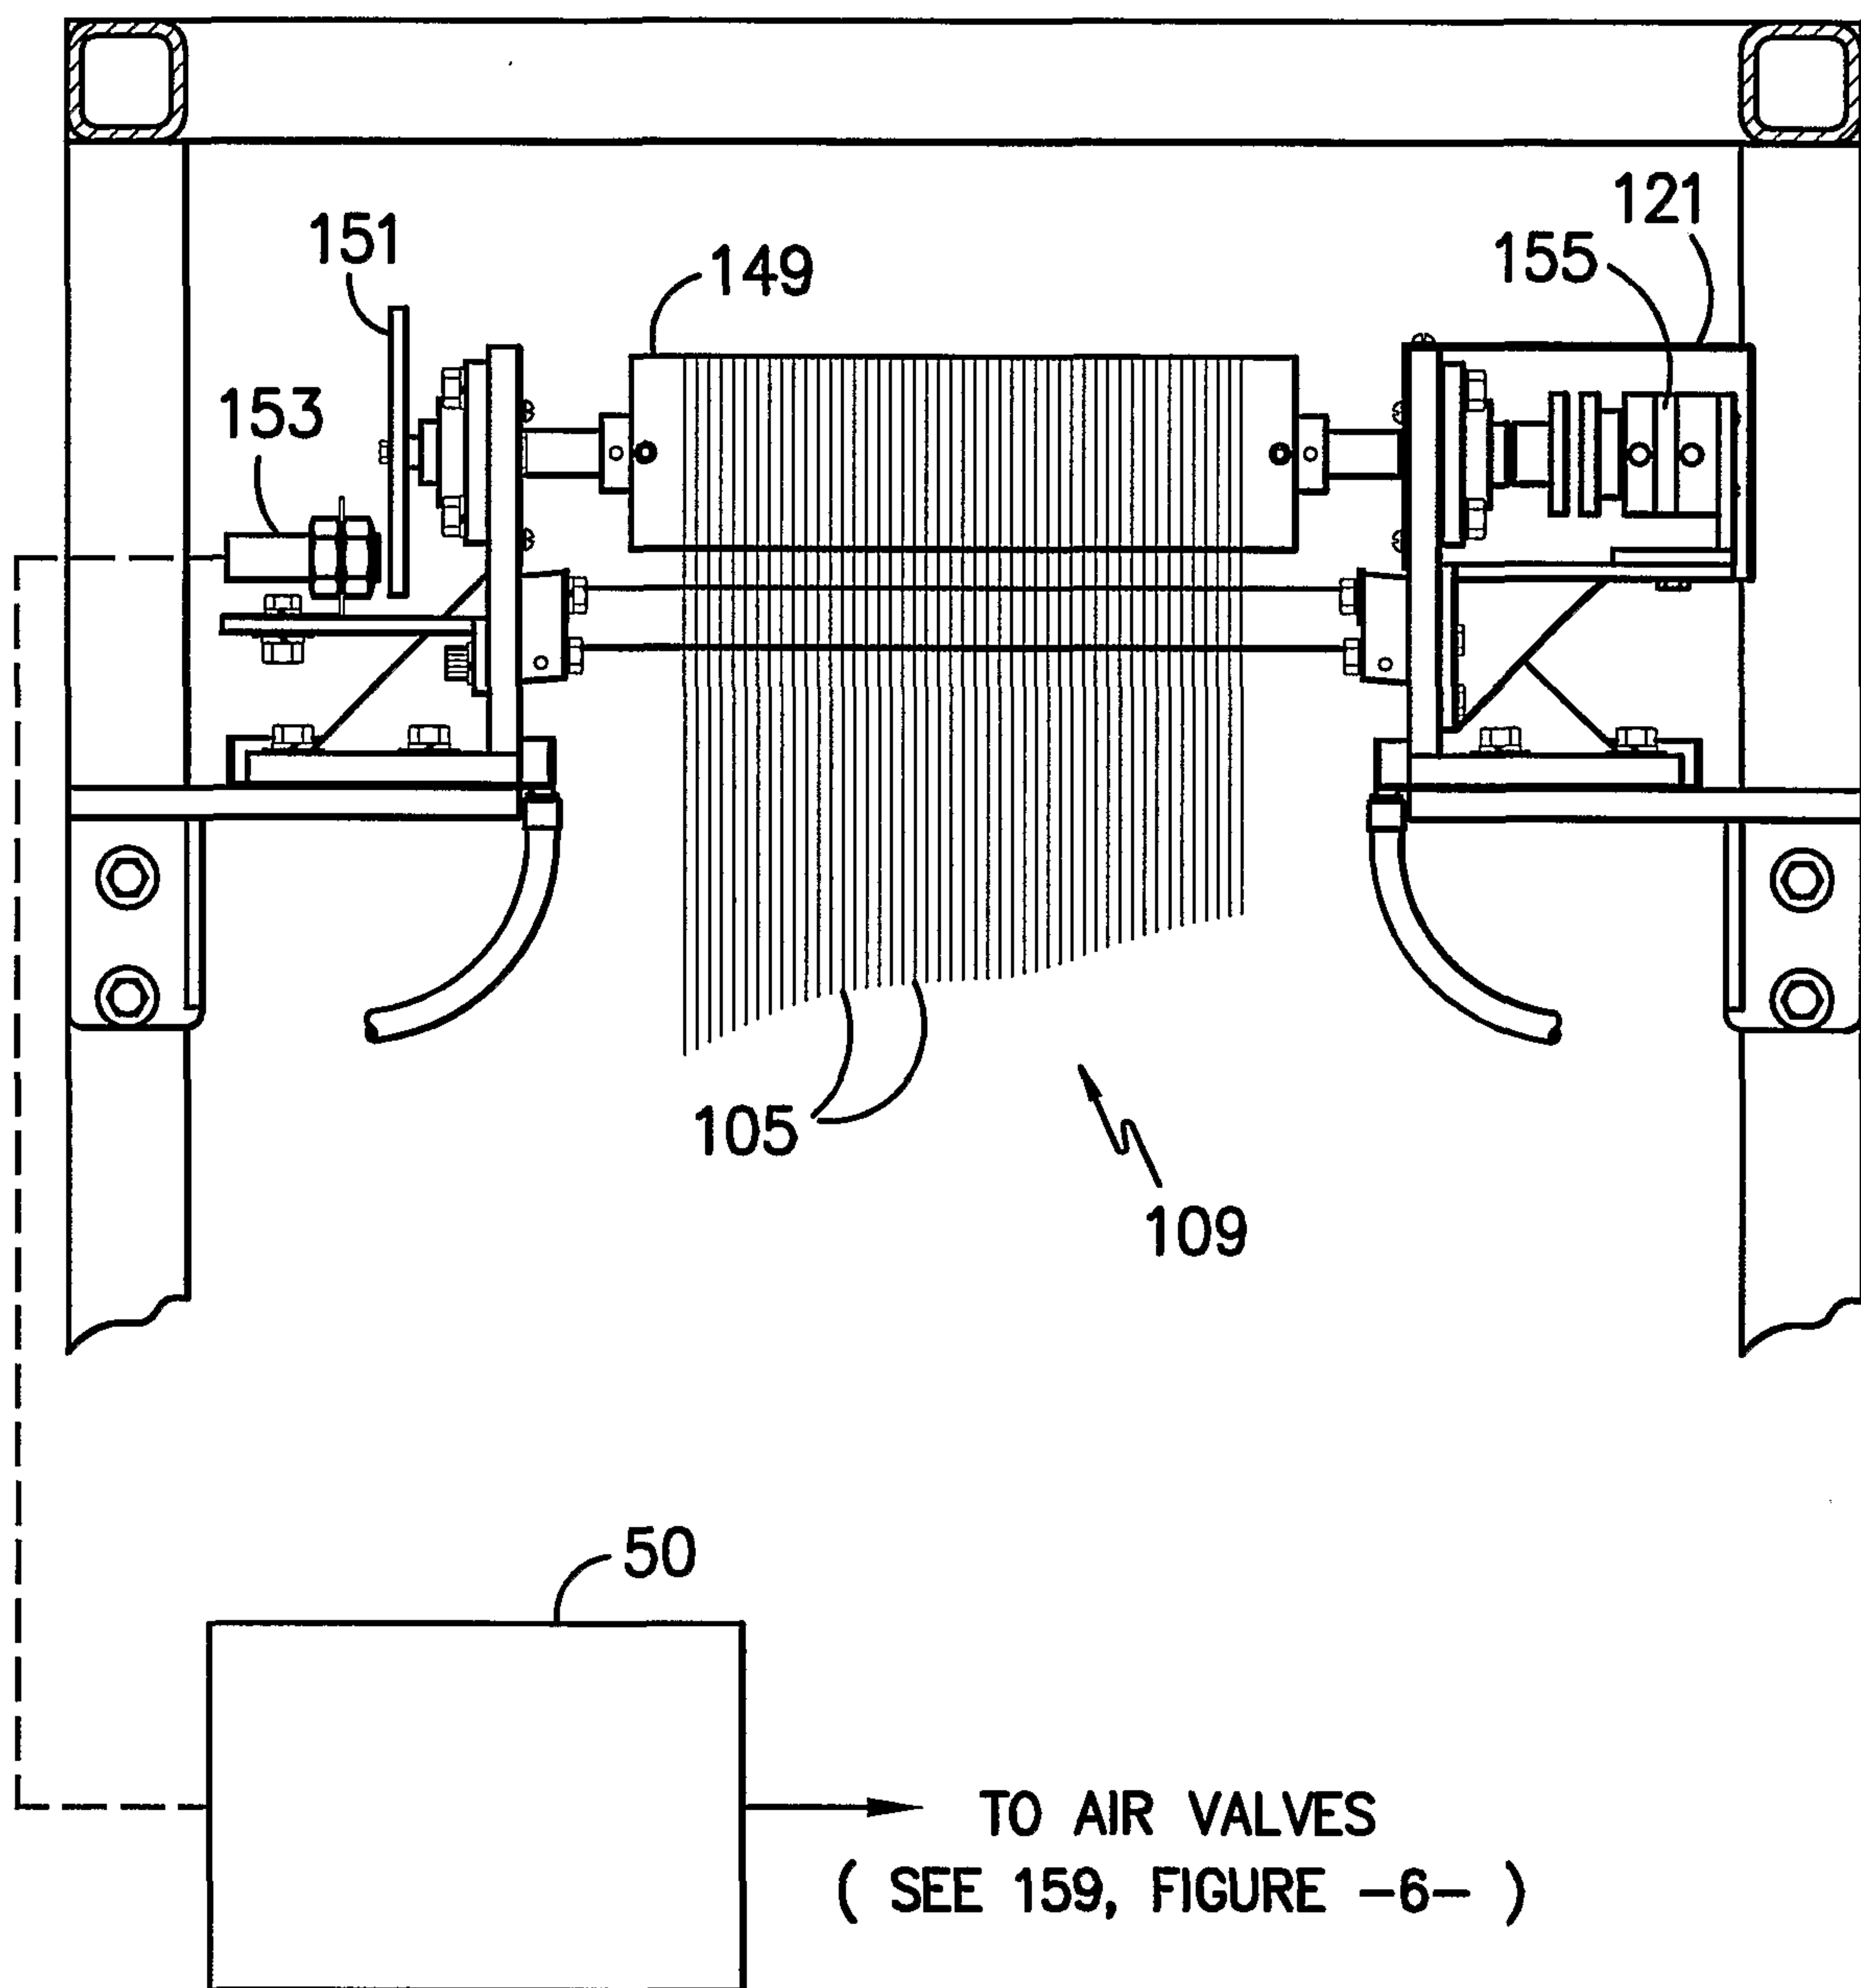


FIG. 2-



*FIG. -4-*

5/10

*FIG. -5-*

6/10

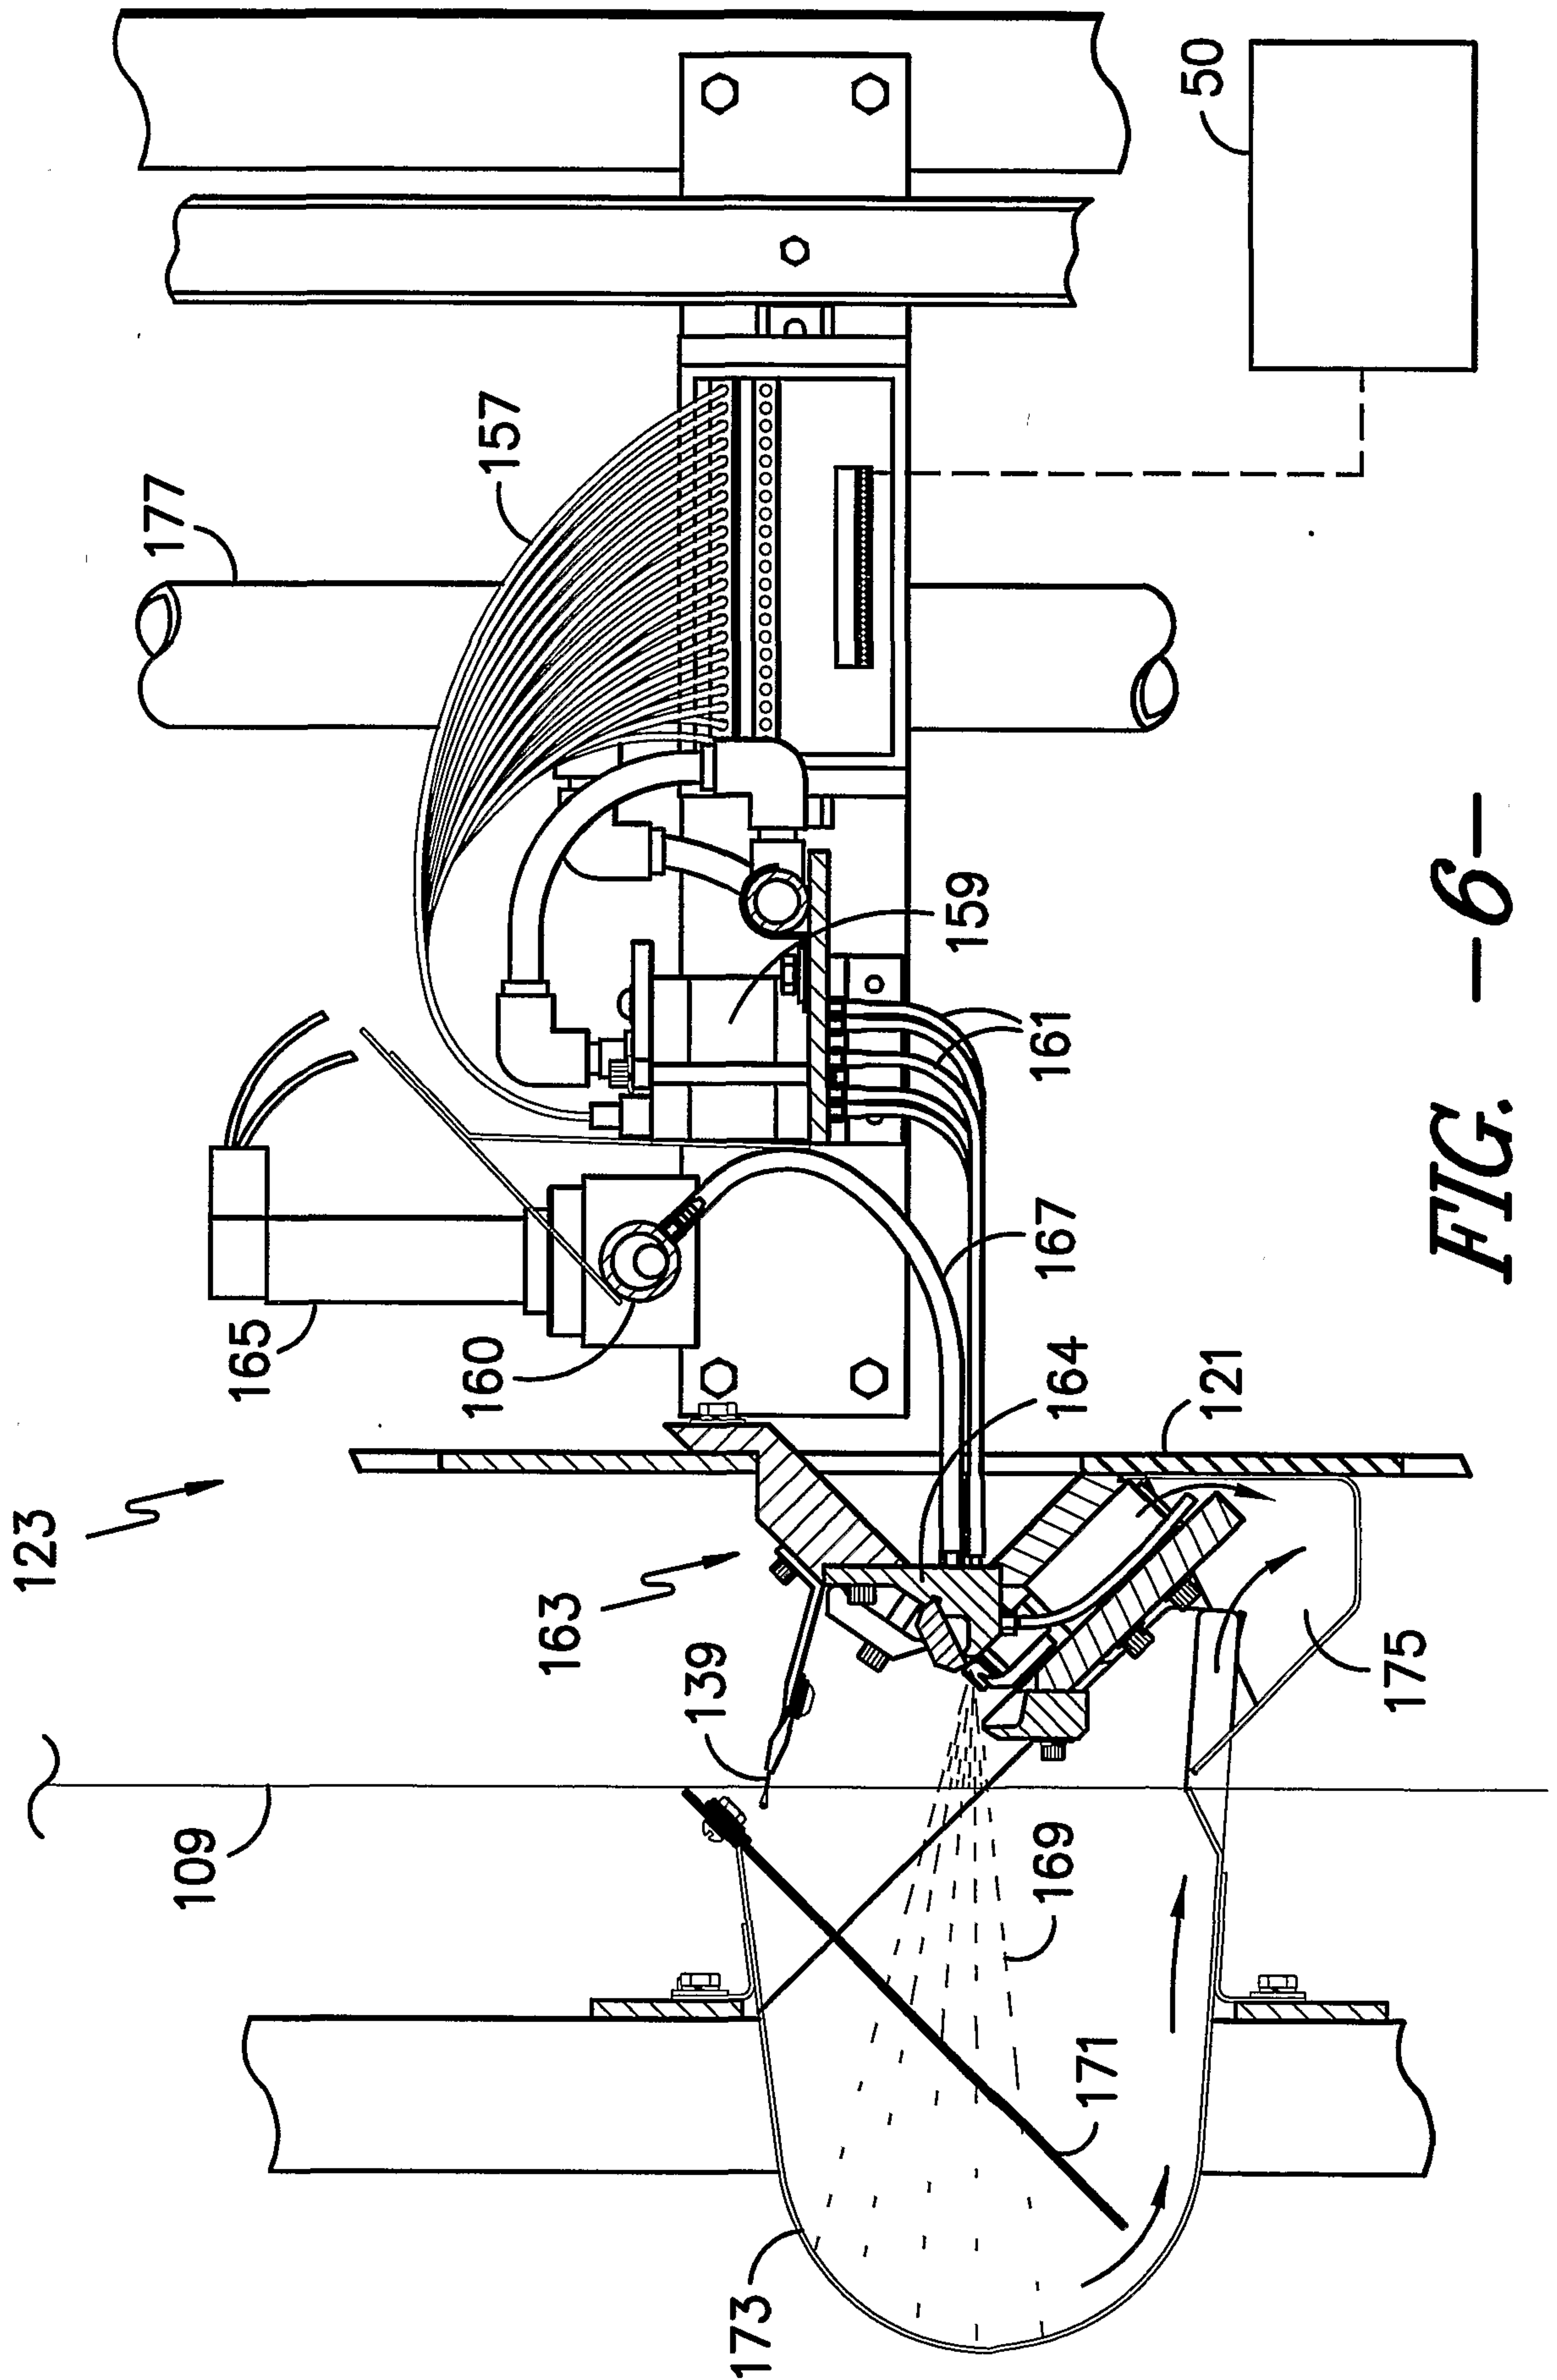


FIG. 6-

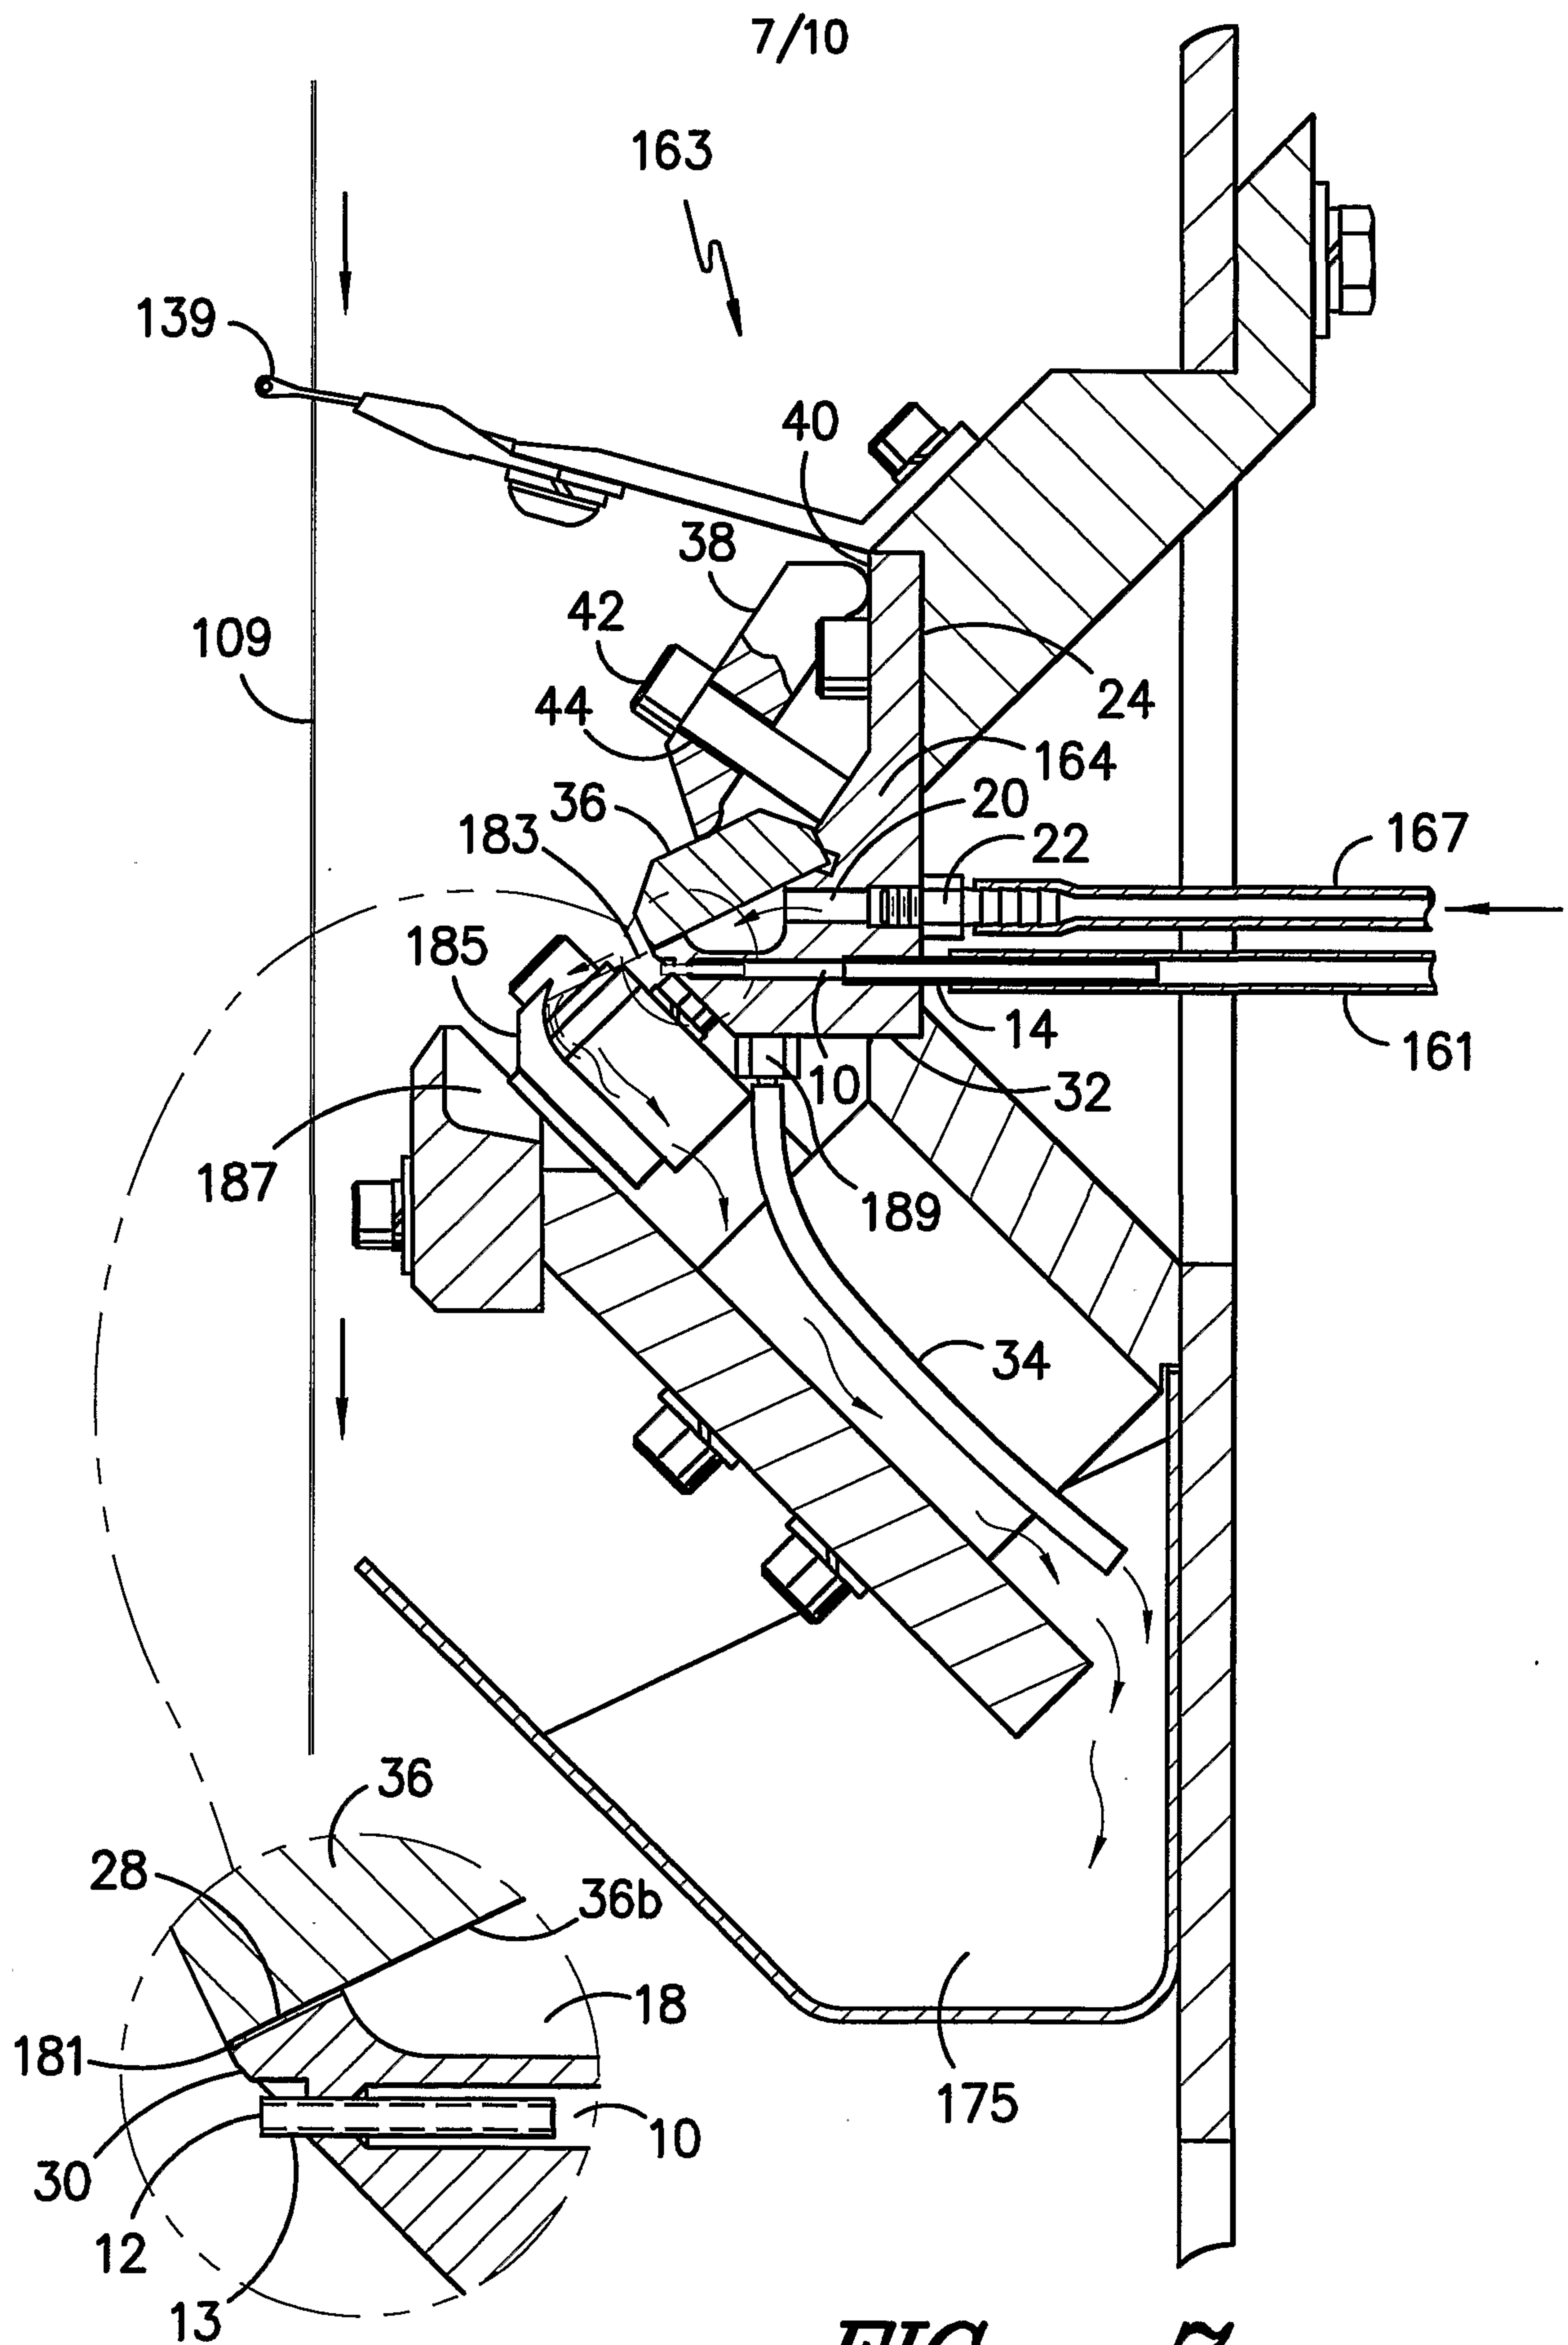


FIG. -7a-

FIG. -7-

8/10



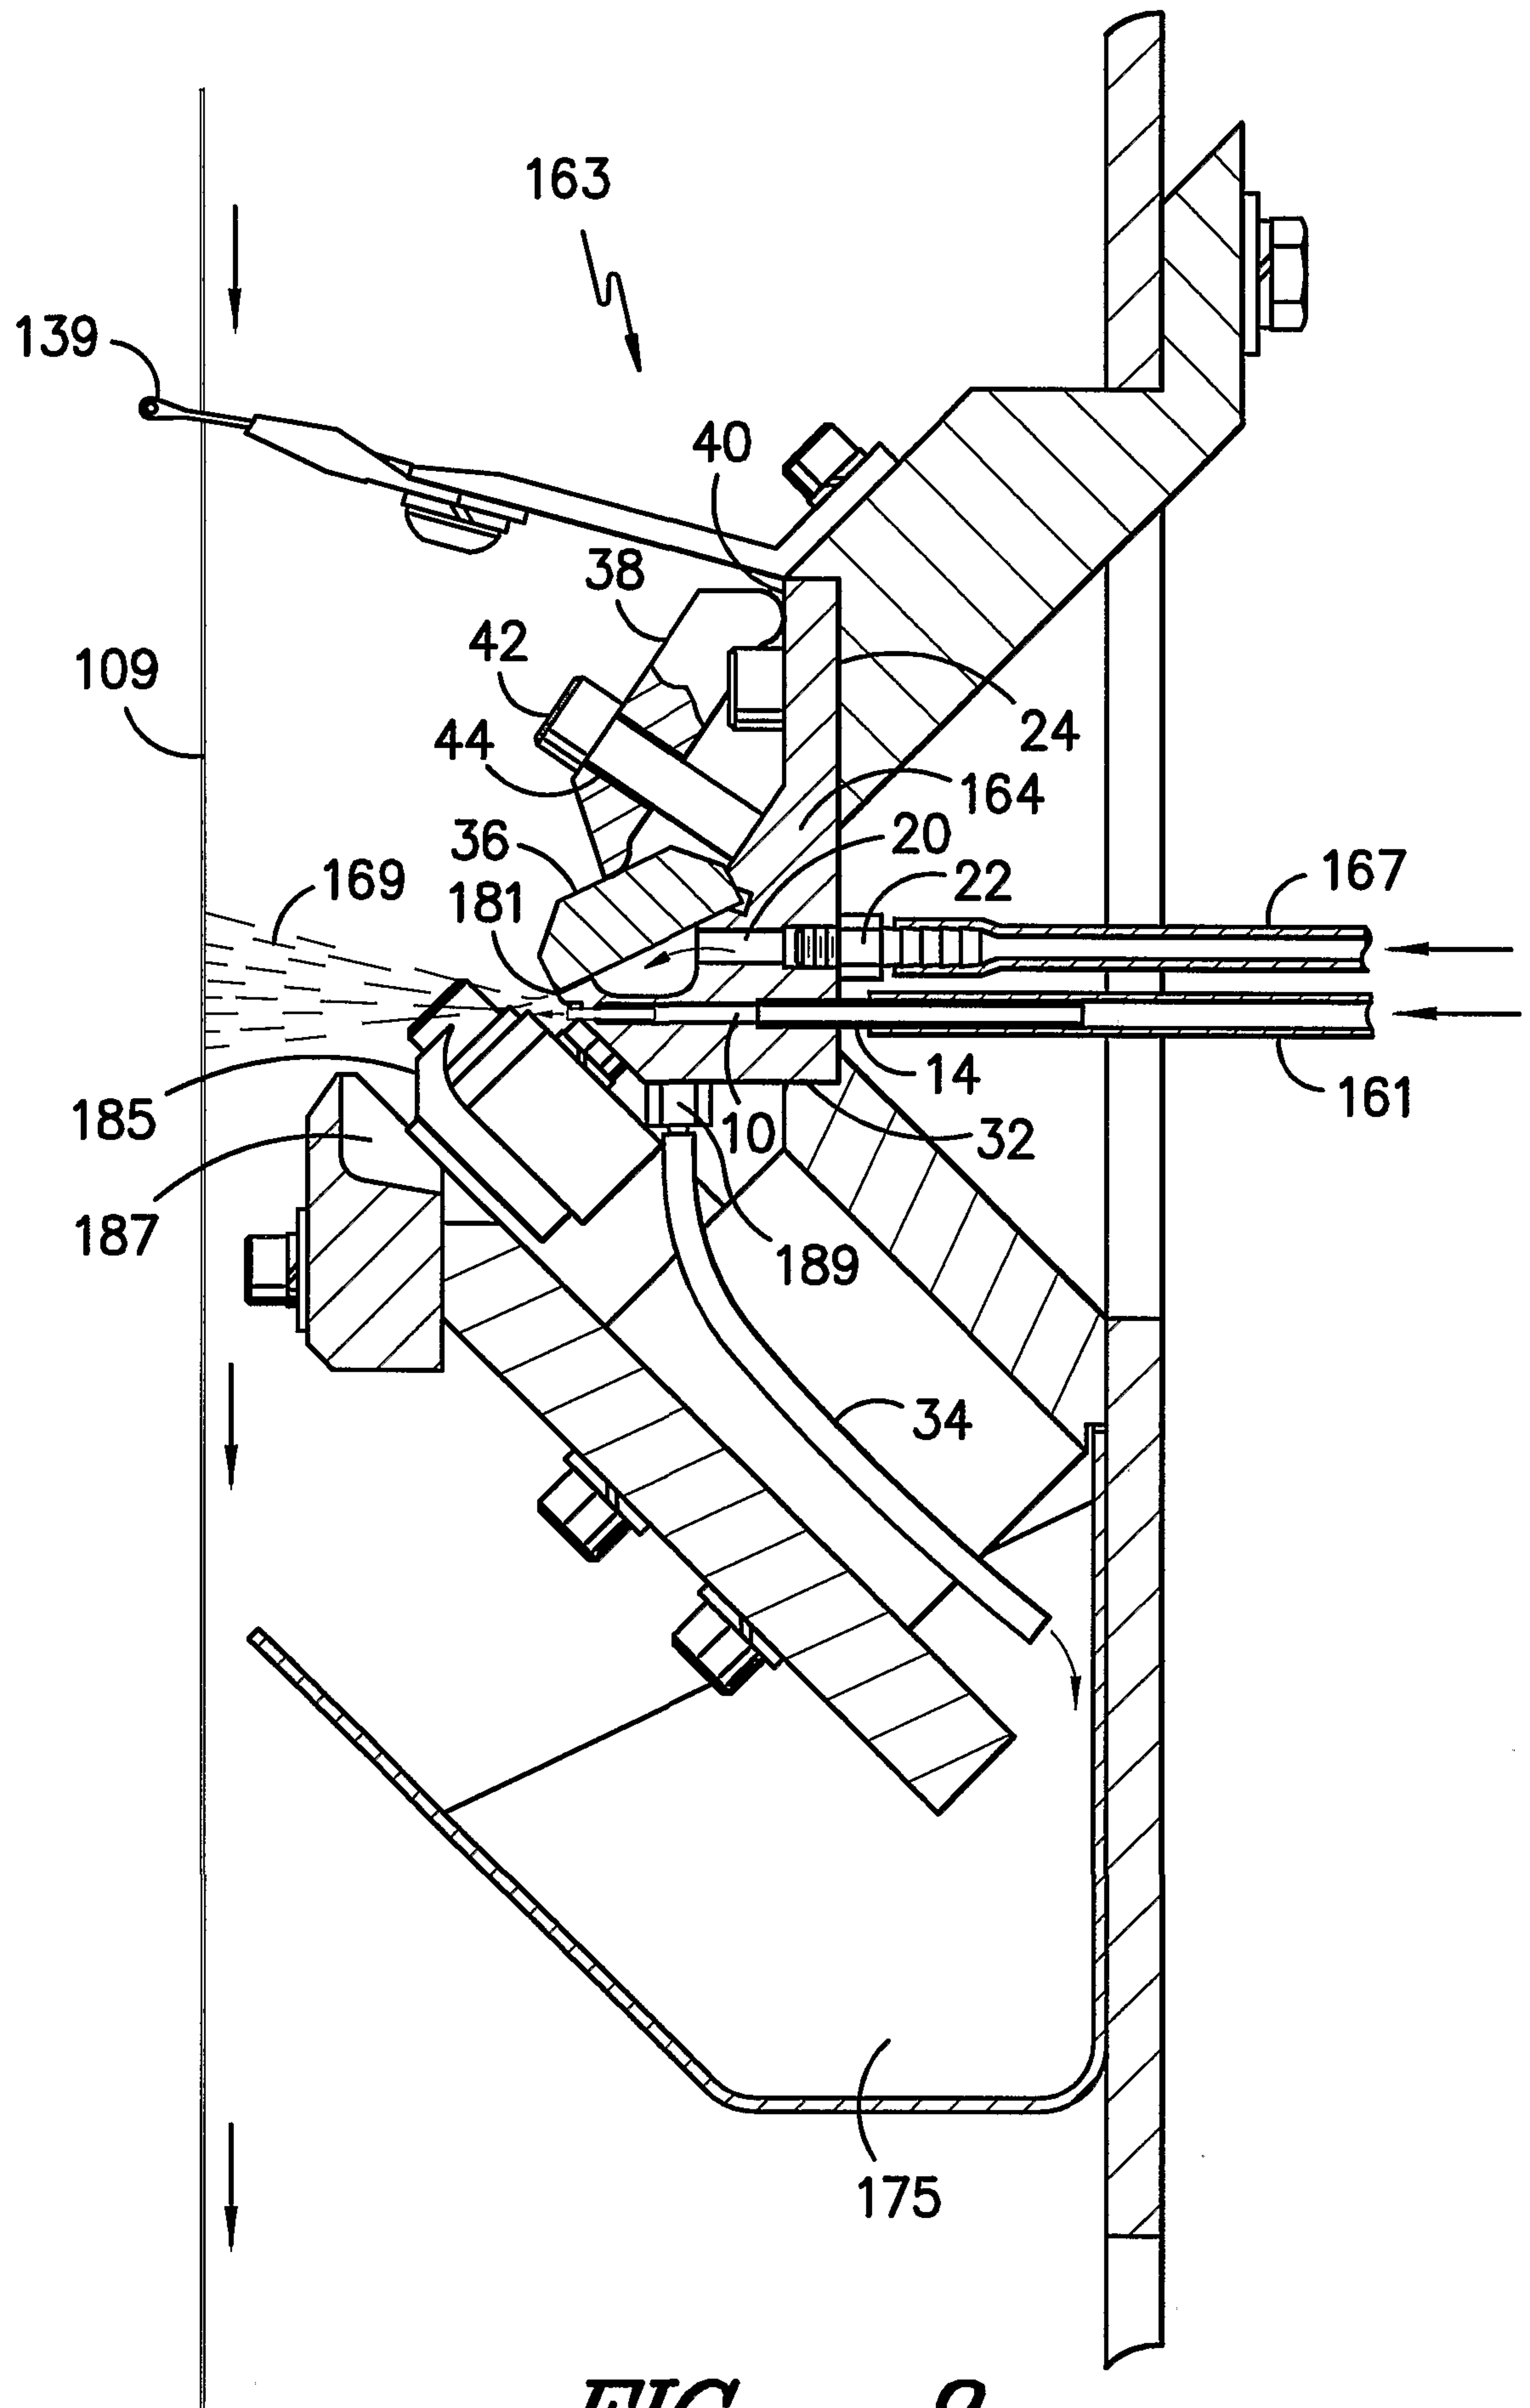


FIG. -8-

9/10

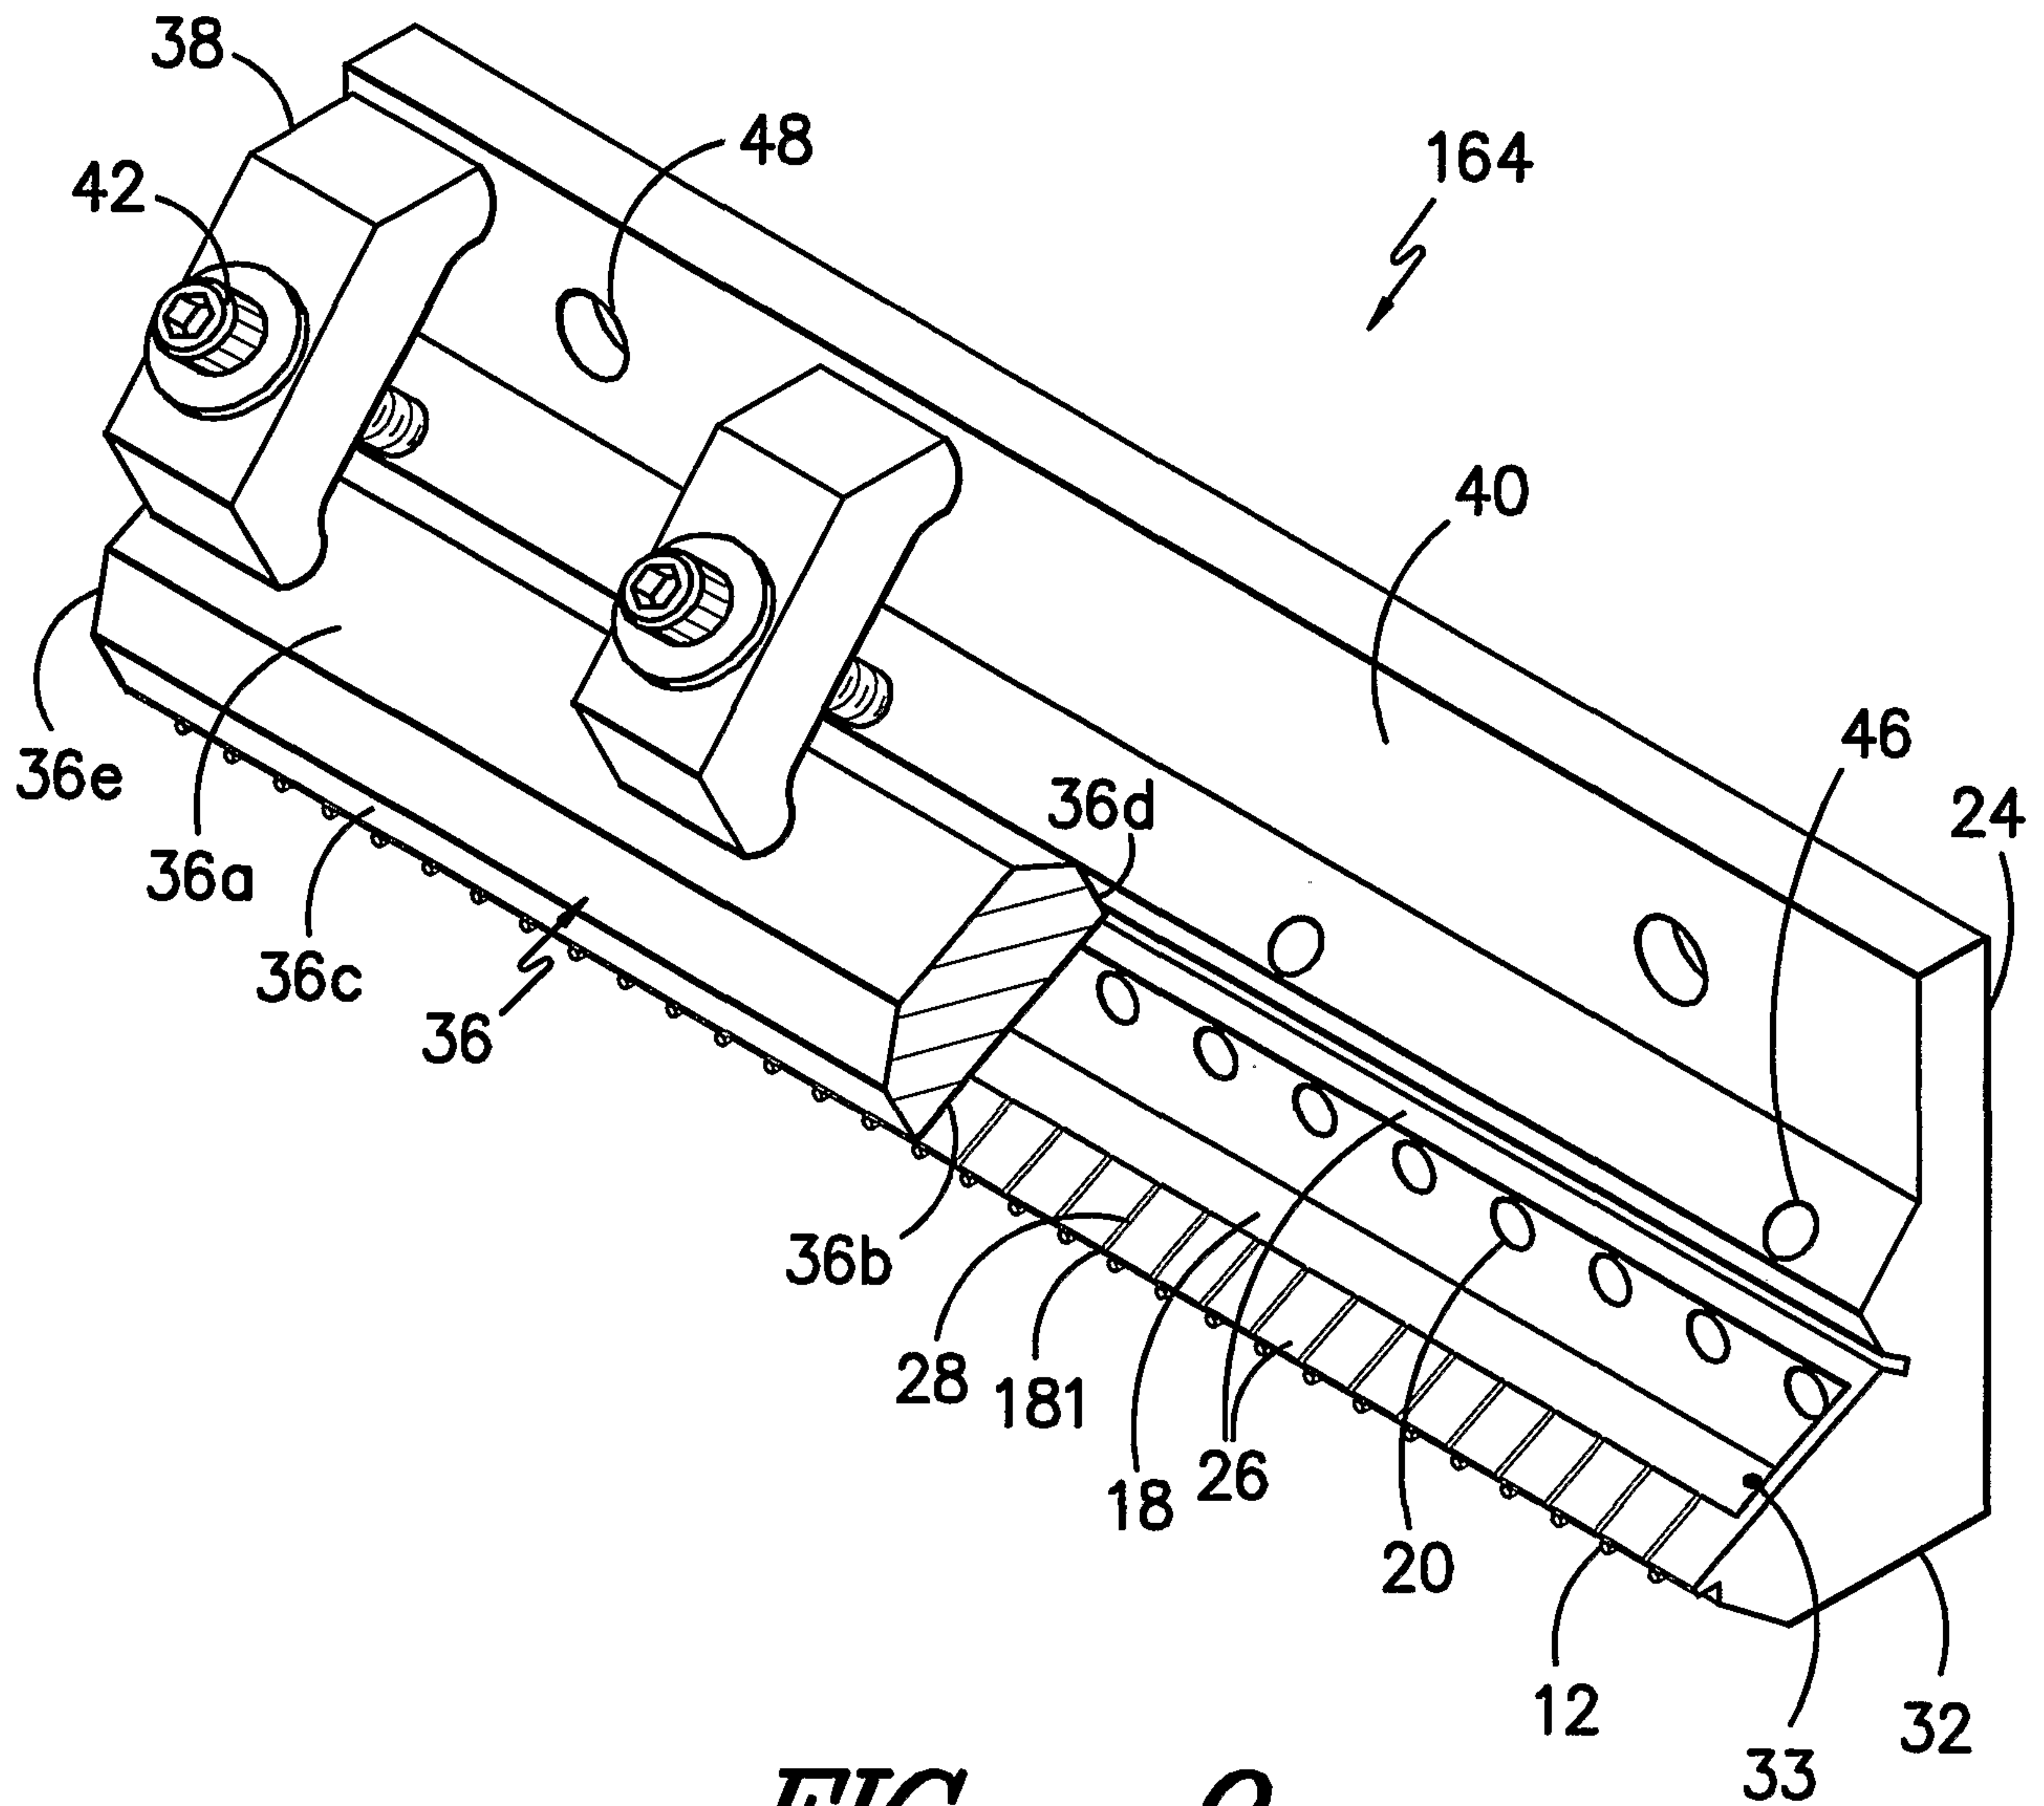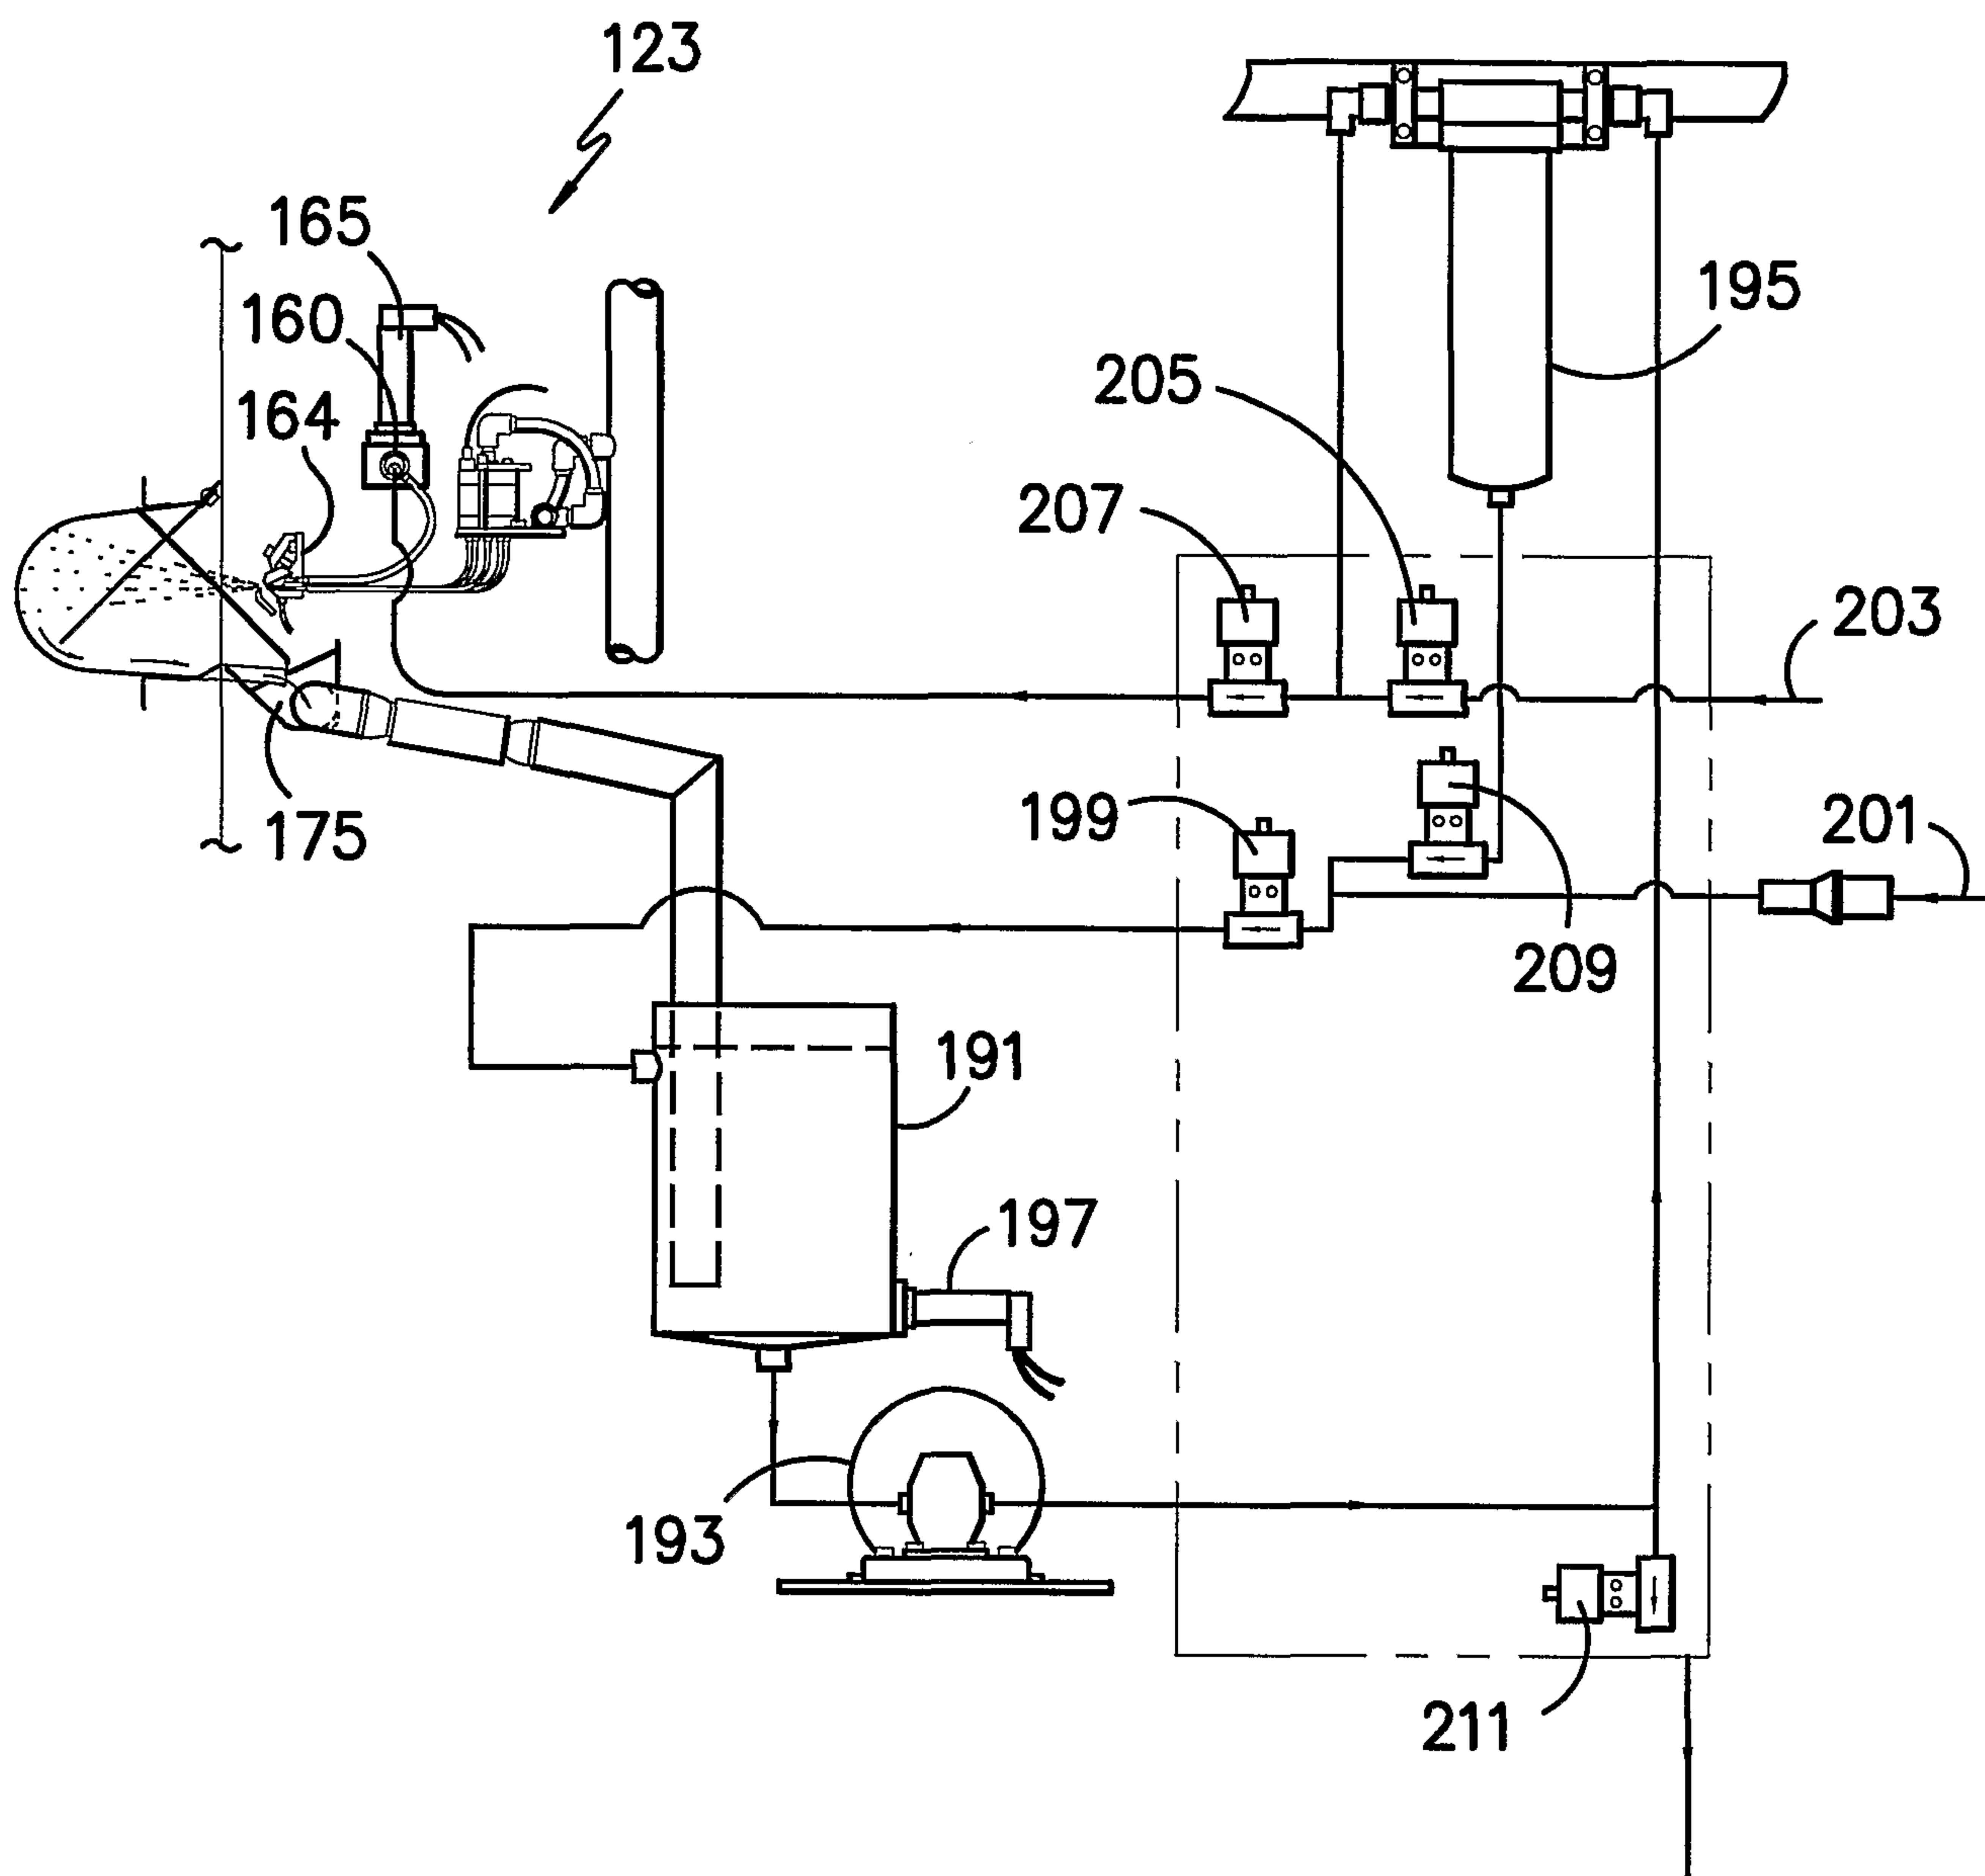

10/10

*FIG. -10-*