

FORM 1
COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952

APPLICATION FOR A STANDARD PATENT

I\We,

DAIDOTOKUSHUKO
KABUSHIKIKAISHA

of 11-18 NISHIKI 1-CHOME
NAKA-KU
NAGOYA-SHI
AICHI-KEN
JAPAN

596030

hereby apply for the grant of a standard patent for an invention entitled:

SIZING MILL AND METHOD OF ROLLING
A ROUND BAR MATERIAL

which is described in the accompanying complete specification

Details of basic application(s):

Number of basic application	Name of Convention country in which basic application was filed	Date of basic application
-----------------------------	---	---------------------------

62-277211	JP	30 OCT 87
-----------	----	-----------

My/our address for service is care of GRIFFITH HACK & CO., Patent Attorneys, 601 St. Kilda Road, Melbourne 3004, Victoria, Australia.

DATED this 07th day of October 1988

DAIDOTOKUSHUKO
KABUSHIKIKAISHA

GRIFFITH HACK & CO.



APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED

9-2-90

TO: The Commissioner of Patents.

MO003407 07/10/88

Australia Patent Declaration Form

Forms 7 and 8

AUSTRALIAPatents Act 1952DECLARATION IN SUPPORT OF A CONVENTION OR NON-CONVENTION
APPLICATION FOR A PATENT OR PATENT OF ADDITIONName(s) of
Applicant(s) In support of the application made by _____
DAIDOTOKUSHUKO KABUSHIKIKAISHATitle for a patent for an invention entitled
SIZING MILL AND METHOD OF ROLLING A ROUND BAR MATERIALName(s) and
address(es)
of person(s)
making
declaration I/We, Minoru Aso, of 7-7-4 Oshizawadai, kasugai-shi,
Aichi-ken, Japan

do solemnly and sincerely declare as follows:-

1. I am/we are the applicant(s) for the patent, or am/are authorised by the abovementioned applicant to make this declaration on its behalf.
2. The basic application(s) as defined by Section 141 of the Act was/were made in the following country or countries on the following date(s) by the following applicant(s) namely:-

Country, filing
date and name
of Applicant(s)
for the or
each basic
application in Japan on 30th October 1987
by DAIDOTOKUSHUKO KABUSHIKIKAISHA
in _____ on _____ 19 _____
by _____

3. The said basic application(s) was/were the first application(s) made in a Convention country in respect of the invention the subject of the application.

4. The actual inventor(s) of the said invention is/are Takeshi Sasaki, of 14-10 Tsutsuzigaoka 3-chome, Chita-shi, Aichi-ken, Japan and Kiyoharu Morita, of 14-6 aza-Kitaishine, ohaza-Shirasawa, Agui-cho, Chita-gun, Aichi-ken, Japan

5. The facts upon which the applicant(s) is/are entitled to make this application are as follows:-
The applicant is the assignee of the actual inventors

DECLARED at Nagoya-shi this 9th day of September 1988

Minoru Aso

Minoru Aso

(12) PATENT ABRIDGMENT (11) Document No. AU-B-23577/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 596030

(54) Title
SIZING MILL AND METHOD OF ROLLING A ROUND BAR MATERIAL

International Patent Classification(s)
(51)⁴ **B21B 001/18 B21B 013/12**

(21) Application No. : **23577/88** (22) Application Date : **07.10.88**

(30) Priority Data

(31) Number (32) Date (33) Country
62-277211 30.10.87 JP JAPAN

(43) Publication Date : **04.05.89**

(44) Publication Date of Accepted Application : **12.04.90**

(71) Applicant(s)
DAIDOTOKUSHUKO KABUSHIKIKAISHA

(72) Inventor(s)
TAKESHI SASAKI; KIYOHARU MORITA

(74) Attorney or Agent
GRIFFITH HACK & CO. MELBOURNE

(56) Prior Art Documents
**US 4070893
GB 2063742
GB 1006943**

(57) Claim

1. A sizing mill including two roll stands arranged along a planned passage line of a roll material, each of said roll stands having

(a) a housing and

(b) a pair of rolls each of which is provided with a groove on the circumferential surface thereof and is rotatably mounted in said housing,

the axial direction of the roll in one of said roll stands differing by 90° from that of the roll in the other of said roll stands and

the groove on each of said rolls consisting of a bottom surface which is a circular arc in cross section, the size of said circular arc being determined such that the angle made

(11) AU-B-23577/88
(10) 596030

-2-

by a line passing the center and one end of said circular arc and a line passing the center and the other end of said circular arc may be equal to a value selected in an interval $90 \sim 140^\circ$, and of both side surfaces which are, in cross section, circular arcs of a radius larger than that of the circular arc of said bottom surface or segments of line.

AUSTRALIA

PATENTS ACT 1952

Form 10

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE

Short Title:

Int. Cl.:

Application Number:
Lodged:

596030

Complete Specification-Lodged:

Accepted:
Lapsed:
Published:

Priority:

Related Art:

TO BE COMPLETED BY APPLICANT

Name of Applicant:

DAIDOTOKUSHUKO
KABUSHIKIKAISHA

Address of Applicant: 11-18 NISHIKI 1-CHOME
NAKA-KU
NAGOYA-SHI
AICHI-KEN
JAPAN

Actual Inventor:

Address for Service: GRIFFITH HACK & CO.,
601 St. Kilda Road,
Melbourne, Victoria 3004,
Australia.

Complete Specification for the invention entitled:
SIZING MILL AND METHOD OF ROLLING
A ROUND BAR MATERIAL

The following statement is a full description of this invention
including the best method of performing it known to me:-

Sizing mill and method of rolling a round bar material

Background of the Invention

1. Field of the Invention

This invention relates to a sizing mill used in order to roll further a metallic material in the form of a round bar, which has been subjected to coarse and intermediate rollings in a hot rolling line, into a finished product of a prescribed diameter.

2. Description of the Prior art

A sizing mill comprises two or three roll stands arranged along a planned pass line of a roll material. Each roll stand is provided with a pair of rolls formed on the outer circumferential surface thereof with respective grooves. The roll material transferred along the planned pass line is passed through the grooves on the rolls in each roll stand. In this manner, the roll material is rolled into a finished material of a prescribed diameter.

In order to raise the accuracy in the diameter of the finished material, the followings are practiced in the company where the inventor is employed. Namely, after the diameter of the finished material is decided, the diameter of the roll material is determined, taking into account of the rate of area reduction. In the next place, the radius of cir-

cular arc in cross section of the bottom surface of the above mentioned groove is determined and the depth of the groove is determined at the same time.

Accordingly, the dimension of the finished material, after being rolled with use of the rolls provided with the grooves specified in the above mentioned manner, lies within regular tolerances if the radius of the roll material is within a prescribed tolerance. However, if there is a deviation beyond the prescribed tolerance in the diameter of the roll material, there appears a problem that a deviation corresponding to this deviation in the diameter of the roll material is brought about also in the diameter of the finished material and this deviation goes beyond an allowable limit.

Furthermore, in the sizing mill including rolls provided with grooves formed in the above mentioned manner, it is necessary to change the dimensions of the groove when a finished material of a different diameter is required. In this case, it is difficult to meet this requirement only by changing the spacing between a pair of rolls. Namely, an angle α made by a line passing the center 140c and one end 140a of such portion 140 of a groove 128 that is a circular arc in cross section and a line passing the center 140c and the other end 140b of the portion 140 as shown in Fig. 15 is set equal to a large value such as 170° . Then the contour defined by the grooves becomes practically a round. In order

to obtain a finished material, for example, of a larger diameter with use of these rolls, the spacing between the bottoms of grooves is extended from W_1 to W_2 . Then, the shoulder dimension between a pair of rolls (the distance between the tangent at one end of the circular arc of the groove on one of the rolls and the tangent at the other end of the circular arc of the groove on the other roll) is increased from X_1 to X_2 . The margin length X resulting from the increased shoulder dimension is very small as is shown. Accordingly, when a roll material is transferred to the rolls with the enlarged spacing between bottom surfaces W_2 , the cross section of the finished material passed between the rolls becomes an ellipse. Therefore, it is difficult to obtain finished materials different in diameter only by changing the spacing between a pair of rolls.

For this reason, it is necessary to change the dimensions of the groove as well in order to obtain finished materials slightly different in diameter. Moreover, it is necessary to change also the diameter of the roll material in accordance the change of the above mentioned dimensions. These changes require the work of cutting the grooves over again and the work of rearranging the rolling processes at stages before the sizing mill. These works require long time and high cost.

Summary of the Invention

A first object of the present invention is to provide a sizing mill which can provide a required finished material in the form of a round bar by rolling a roll material of a diameter larger than that of the finished material.

A second object of the present invention is to provide a sizing mill which can form roll materials into finished materials of a prescribed diameter even if the roll materials deviate largely in diameter.

According to the present invention, a groove on a roll consists of a bottom surface and side surfaces contiguous to both ends of the bottom surface. The bottom surface is a circular arc in cross section. The angle made by a line passing through the center and one end of the circular arc and a line passing through the center and the other end of the circular arc is determined to be a value selected in an interval of $90\sim 140^\circ$. On the other hand, the both side surfaces are determined to be, in cross section, circular arcs of a radius larger than that of the bottom surface or to be segments of line. Accordingly, roll materials of a diameter within a tolerance determined in the same manner as in a conventional case can be accepted to be rolled into finished materials of a prescribed diameter. Moreover, even such accepted roll materials that deviate in diameter beyond the tolerance can be rolled into finished materials of a prescribed diameter.

A third object of the present invention is to provide a sizing mill which can provide required finished materials

slightly different in diameter without requiring to change the diameter of roll materials but only by changing slightly the spacing between a pair of rolls in a roll stand.

According to the present invention, the allowable range of diameter of a roll material is wider when it is required to obtain a finished material of a prescribed diameter. As a result, even when the diameter of the finished material is changed by changing the spacing between the rolls while keeping the diameter of the roll material unchanged, the unchanged diameter of the roll material can stay within the allowable range. Consequently, it becomes possible to provide finished materials of a required diameter without changing the diameter of the roll material but changing slightly the spacing between a pair of rolls in the roll stand.

The change of the diameter of the finished material by a method of this kind can be practiced in a very short time and at a slight cost.

Other objects and advantages of the inventions will become apparent during the following discussion of the accompanying drawings.

Brief Description of the Drawings

Fig. 1 is a plane view showing a sizing mill and the rolling mill at the last stage in a series of finish rolling mill series;

Fig. 2 is a view showing the mills in the direction

shown by an arrow II in Fig. 1;

Fig. 3 is a view showing the sizing mill in the direction shown by an arrow III in Fig. 1;

Fig. 4 is a partial front elevation of a roll stand in partial section;

Fig. 5 is a partial side elevation of the roll stand;

Fig. 6 is a front elevation showing the form of a groove on a roll;

Fig. 7 is a perspective view showing the mutual relationship among a number of rolls of the mills in Fig. 1;

Fig. 8 is a view showing schematically the change of the cross section of a steel billet while it is rolled in order into a finished material;

Figs. 9A through 9D are views for explaining the successive change of the dimension of a roll material while it is rolled by the sizing mill of Fig. 1;

Fig. 10 is a view showing schematically the change of the cross section of the billet while it is rolled in order into a finished material of thickness different from that of the finished material of Fig. 8;

Fig. 11 is a perspective view showing the mutual relationship among rolls when the number of roll stands in the sizing mill is two;

Figs. 12A through 12C are views showing schematically the change of dimensions of the roll material while it is rolled by the sizing mill with the number of roll stands of

two:

Fig. 13 is a plane view showing a different embodiment of a rolling system;

Fig. 14 is a view for explaining the change of the shoulder dimension of the groove when the spacing between rolls is changed in the sizing mill according to the present invention; and

Fig. 15 is a view for explaining the change of the shoulder dimension of the groove when the spacing between rolls is changed in a conventional sizing mill.

Description of the Preferred Embodiments

In Figs. 1 through 3, a sizing mill 1 comprises three roll stands 3, 4 and 5 mounted on a base 2 and a drive means 6 for driving the roll stands. These roll stands 3, 4 and 5 are arranged one by one along a planned passage line A of a roll material. The drive means 6 includes an electric motor 7, a distributing reduction gear 8, a pinion gear box 9 and a spindle carrier 10 for the roll stand 3, a pinion gear box 11 and a spindle carrier 12 for the roll stand 5 and a pinion gear box 13 for the roll stand 4.

In a rolling line including a coarse rolling mill series, an intermediate rolling mill series and a finish rolling mill series, the above mentioned sizing mill 1 is disposed after the finish rolling mill series. In Figs. 1 and 2, the rolling mill at the last stage of the finish rolling

mill series is represented by a reference numeral 15. As is well known, the rolling mill 15 comprises a roll stand 17 mounted on a base 16 and a drive means 18 for the roll stand and the drive means 18 includes an electric motor 19 and a pinion reduction gear 20.

In Figs. 4 and 5, the roll stand 3 is shown in details. As is well known, the roll stand 3 includes a housing 23, four roll chocks 24 mounted in the housing 23 for vertical movement, a pair of rolls 25 and 25 each supported rotatably by the roll chock 24 and a roll distance adjusting means for adjusting the distance between the paired rolls 25 and 25, i.e., a pressing down means 26.

On the outer circumferential surface of each of the rolls 25 and 25 are formed grooves 28 and 28 which define a caliber 29.

The pressing down means 26 comprises an operation axis 30 and work axes 31 and 31 and both axes are connected by gears 32 and 33 for linkage. The operation axis 30 is provided with an adjusting handle 34. The lower portion of the work axis 31 is formed as a hollow cylindrical portion 35, the inside surface of which is formed with a female screw. A pressing down screw 38 is supported for vertical movement by a bearing 37 secured in the housing 23. The outer circumferential surface of the upper portion of the pressing down screw 38 is formed with a male screw which is in threaded engagement with the female screw. The lower end of

the pressing down screw 38 is adapted to oppose the upper roll chock 24 so that the lower end may press down the roll chock. The upper roll chock 24 is, in a well known manner, subjected to an upward biasing force by a spring (not shown) provided inside the housing.

The operation of the above mentioned pressing down means 26 is as follows. When the operation axis 30 is rotated by turning the handle 34, the work axis 31 is rotated via the gears 32 and 33. The rotated axis 31 causes the pressing screw 38 to displace upwards or downwards. As the result of the displacement of the screw 38, the upper roll chock 24 is raised under the biasing force or lowered against the biasing force. Consequently, the mutual distance between the upper and lower rolls 25 and 25 is adjusted. The mutual distance between the rolls can be arbitrarily set by such adjustment of the distance between the rolls. The distance once set up can be stably maintained on account of the constructional feature of the pressing down means 26.

In Fig. 6 is shown the detail form of the aforementioned groove 28. The groove 28 consists of a bottom surface 40 and side surfaces 41 and 41 contiguous to both ends of the bottom surface.

The cross section of the bottom surface 40 is a circular arc. The opening angle of the circular arc θ , i.e., the angle formed by a line passing the center and one end of the circular arc and a line passing the center and the other end of

the circular arc, is set equal to an arbitrary value selected in an interval of $90^\circ \sim 140^\circ$. For example, the opening angle is 120° . In this embodiment, the cross section of the side surface 41 is a segment of line. This, however, may be a circular arc of a radius larger than that of the circular arc of the bottom surface.

Both the roll stands 4 and 5 are constructed similarly as the above mentioned roll stand 3. The roll stand 4 is different only in that a pair of rolls of the roll stand are arranged to the left and right sides of the planned passage line of roll material. The positional relationship of the rolls in each roll stand is as shown in Fig. 7. Namely, the direction of the axial line 25a of the roll 25 in the roll stand 3 differs from the direction of the axial line 44a of a roll 44 in the roll stand 4 by 90° . Furthermore, the direction of the axial line 44a of the roll 44 in the roll stand 4 differs from the direction of the axial line 45a of a roll 45 in the roll stand 5 by 90° . In Fig. 7, grooves of rolls 44 and 45 are represented by reference numerals 46 and 47 respectively. A roll in the roll stand 17 of the aforementioned rolling mill 15 is represented by a reference numeral 48.

Now in reference to Fig. 8, the process is described in which a billet is rolled into a product in the form of a round bar. The billet B is rolled in order by plural roll stands OH~6V in a coarse rolling mill series 51, plural roll

stands 7H~10V in an intermediate rolling mill series 52 and plural roll stands 11H~14V in a finish rolling mill series 53. Notations 0H~14V stands for roll stand numbers of a number of roll stands. In these notations, "H" means that a pair of rolls are horizontally disposed and "V" that a pair of rolls are vertically disposed. The stand 14V is the stand 15 shown in Figs. 1 and 2. The above mentioned billet is rolled by each of the roll stands 0H~14V and takes a cross section of the form as shown in Fig. 8. The principal dimension of the cross section which the billet takes after being rolled by each roll stand is, for example, as indicated by an numeral written under each form of cross section in Fig. 8. The roll material in the form of a round bar which has been rolled by the roll stands 0H~14V is transferred to the sizing mill 1 of Figs. 1~3 as a roll material W. The roll material W is rolled in order by the roll stands 3, 4 and 5 in the sizing mill 1 and made into a finished material in the form of a round bar of a prescribed diameter.

In the next place, two cases are described by way of example where a finished material 24.24 mm in diameter and a finished material 50.64 mm in diameter respectively are to be obtained. As an example is explained a process in which a roll material S45C 26 mm in diameter is rolled, at a temperature of 900°C, into a finished material 24.24 mm in diameter. In the case of this example, the dimensions of grooves and the distances between rolls in each roll stand, i.e., dimen-

sions $R_1 \sim R_3$ and $S_1 \sim S_3$ as shown in Figs. 9A~9D are set equal to the values as listed in Table 1.

Table 1

	roll stand 3	roll stand 4	roll stand 5
radius of circular arc of bottom surface of groove	$R_1=13.00$ mm	$R_2=12.12$ mm	$R_3=12.12$ mm
spacing between bottoms of groove	$S_1=24.24$ mm	$S_2=24.20$ mm	$S_3=24.24$ mm

The roll material W which is 26.00 mm in diameters D_1 and D_1' as shown in Fig. 9A is first rolled by the rolls 25 of the roll stand 3 and compressed to be 24.24 mm ($=S_1$) in the vertical diameter D_2 as shown in Fig. 9B. As a result, the horizontal diameter D_3 becomes 26.53 mm. The roll material is then rolled by the rolls 44 of the roll stand 4 and is compressed to be 24.20 mm ($=S_2$) in the horizontal diameter D_4 as shown in Fig. 9C. As a result, the vertical diameter D_5 is enlarged to 24.64 mm. Next, the roll material is rolled by the rolls 45 of the roll stand 5 and made into a finished material which is 24.24 mm both in vertical and horizontal diameters D_6 .

In the case of the above mentioned rolling, the rate of area reduction is 7.4 % at the roll stand 3, 5.1 % at the roll stand 4 and 1.1 % at the roll stand 5. The overall rate of area reduction (the rate after the roll material W has been rolled into the finished material) is 13.1 %.

The above mentioned steel S45C has an linear expansion

coefficient of 11×10^{-6} . Accordingly, the finished material just after being produced by rolling becomes a product 24 mm in diameter when the finished material is cooled down to ordinary temperature.

Now another process is described in which a billet of a material different from that of the above mentioned billet, for example, of 52100 (equivalent to SUJ2) is rolled, for example, at a temperature of 850 °C and is formed into a finished material of a diameter different from that of the above mentioned finished material, for example, 50.64 mm. In this case, a material in the form of a round bar 53 mm in diameter, which has been rolled by the roll stand 8V in the intermediate rolling mill series 52, is used as a roll material to be fed to the sizing mill. The roll stands 9H~14V which follow the roll stand 8V are removed from the passage line of the material in the form of a round bar. Dummy guides for supporting the material in the form of a round bar are instead arranged where the removed roll stands were situated. The groove of the roll of each roll stand 3, 4 or 5 in the sizing mill 1 is designed so that the dimensions R1~R3 and S1~S3 may be equal to the following values:

R1=26.65 mm, R2=25.50 mm, R3=25.50 mm, opening angle $\theta = 110^\circ$, S1=50.64 mm, S2=50.60 mm and S3=50.64 mm

A groove corresponding to these dimensions is formed on each roll and the distance between rolls is set by the aforementioned roll distance adjusting means 26.

The roll material 53 mm in diameter is rolled by the roll stands 3, 4 and 5 having rolls of dimensions as established above. Those diameters D1~D5 of the roll material which are indicated in the aforementioned Fig. 9 become the following values and the roll material is made into a finished material 50.64 mm in the diameter D6:

D1=53.0 mm, D1'=52.5 mm, D2=50.64 mm, D3=53.56 mm, D4=50.60 mm and D5=51.08 mm

The above mentioned steel 52100 has an linear expansion coefficient of 15×10^{-6} . Accordingly, the finished material just after being produced by rolling becomes a product 50 mm in diameter when the finished material is cooled down to ordinary temperature.

In the case of the above mentioned rolling, the rate of area reduction is 4.4 % at the roll stand 3, 2.8 % at the roll stand 4 and 1.7 % at the roll stand 5. The overall rate of area reduction is 8.7 %.

Next, in the above mentioned sizing mill, a relatively thin (slightly thicker than a product to be rolled) can be rolled into a finished material of prescribed dimensions. Furthermore, a relatively thick material can be rolled as well into a finished material of prescribed dimensions. This point is now described. In a pair of rolls of each roll stand, the groove consists of the bottom surface and the side surfaces contiguous to the both ends of the bottom surface. The cross section of the bottom surface is a circular arc.

The opening angle of the bottom surface, i.e., the angle made by a line passing the center and one end of the circular arc and a line passing the center and the other end of the circular arc, is adjusted to be a value selected in an interval of $90^\circ \sim 140^\circ$. Accordingly, in the case of the roll stand 3 for example, a relatively large margin space is formed between the side surface 41 of the groove 28 on one of the rolls and the side surface 41 of the groove 28 on the other roll as shown by a reference numeral 42 in Fig. 6. Thus, a relatively thin roll material can be rolled without any trouble. Besides, even a thick roll material can be admitted between the above mentioned grooves 28 and 28. As a result, such a thick roll material can be rolled as well. Since rolling is practiced in this manner in each roll stand, either a relatively thin or thick roll material can be rolled into a finished material of a prescribed diameter.

The above mentioned margin space 42 is the larger, the smaller the opening angle is set. Accordingly, the allowable range of the diameter of admissible roll materials becomes the wider. If the opening angle is smaller than 90° , there appears, however, a portion which does not contact with the roll on any occasion while the roll material passed through the roll stands 3, 4 and 5, i.e., a portion which is not rolled. Therefore, the above mentioned opening angle is preferably be determined to be a value larger than 90° . On the other hand, the larger the above mentioned opening angle

is, the smaller the margin space 42 becomes and the narrower the above mentioned allowable range becomes. Consequently, it is appropriate to limit the maximum value of the above mentioned opening angle to 140° , considering a general value of deviation in diameter of roll materials to be fed into the sizing mill.

Next is explained a case in which finished materials different slightly in diameter are formed in the sizing mill shown in Figs. 1 through 7, with the diameter of the roll material transferred to the sizing mill kept unchanged but only by changing the spacing between a pair of rolls in each roll stand. As an example, a case is described where a finished material 48.9 mm or 52.7 mm in diameter is formed in order to provide a product slightly different in diameter from the aforementioned product 50 mm in diameter, for example, a product 48.4 mm or 52.2 mm respectively in diameter. In this case, just the same roll material and the rolls in respective roll stands 3, 4 and 5 that have been used in forming the aforementioned finished material 50.64 mm in diameter are used. Only the aforementioned spacing S_1 , S_2 and S_3 are set equal to the values as listed in Table 2.

Table 2

diameter of finished material	roll stand 3		roll stand 4		roll stand 5		overall R.A.R.
	S1	R.A.R.	S2	R.A.R.	S3	R.A.R.	
48.9mm	48.86	8.4%	48.80	4.4%	48.86	3.0%	15%
52.7mm	52.70	0.27%	52.70	0.73%	52.70	0.14%	1%

R.A.R.:rate of area reduction

With this setting of dimensions, a roll material 53 mm in diameter is rolled by respective roll stands and a finished material 48.9 mm or 52.7 mm in diameter is obtained.

When it is desired to obtain a finished material of a diameter close to the above mentioned 24.24 mm (24.0~25.8 mm for example), a similar process can be taken. Namely, just the same rolls and roll material that have been used in obtaining the finished material 24.24 mm in diameter are used and the spacing between a pair of rolls in each roll stand is set larger for obtaining a finished material of a larger diameter and smaller for obtaining a finished material of a smaller diameter.

The foregoing articles are further explained with reference to Fig. 14 which is drawn in comparison with previously explained Fig. 15. In Fig. 14, the shoulder dimension is X_3 (equal to the aforementioned X_1) when the spacing between bottom surfaces is W_3 (equal to the aforementioned W_1). In order to obtain a finished material of a larger diameter the spacing between bottom surfaces is extended from this value to W_4 (equal to the aforementioned W_2). Then the

shoulder dimension is increased to X_4 . The margin length X' resulting from the increase of the shoulder dimension from X_3 to X_4 is preserved as a much larger value as shown compared with the value in the case of the aforementioned Fig. 15 since the opening angle θ is set equal to a small value (100° in Fig. 14). As a result, an almost round finished material can be obtained even when the spacing between bottom surfaces is set equal to W_4 .

Now the values of the aforementioned opening angle of the groove on the roll and the resulting features are listed in Table 3.

Table 3

diameter of roll material	53mm	53mm	53mm
diameter of finished material	50.50	50.50	50.50
roll stand 3	spacing between bottom surfaces of groove	50.50	50.50
	radius of circular arc	26.50	26.50
	opening angle	120 °	90 °
	rate of area reduction	4.9%	2.9%
roll stand 4	spacing between bottom surfaces of groove	50.45	50.45
	radius of circular arc	25.25	25.25
	opening angle	120 °	90 °
	rate of area reduction	3.5%	3.6%
roll stand 5	spacing between bottom surfaces of groove	50.50	50.50
	radius of circular arc	25.25	25.25
	opening angle	120 °	90 °
	rate of area reduction	1.1%	3.0%
features		Compared with the case of the opening angle 120 °, the variable range of the diameter of rolled material is wider but accuracy in dimension is lower.	Compared with the case of the opening angle 120 °, accuracy in dimension is higher but the variable range is narrower.

Next, the roll stands 3, 4 and 5 are preferably arranged, as for the spacings thereamong, in the following manner. Namely, the adjacent two roll stands are arranged such that the distance between the axis of the roll in one of the roll stands and the axis of the roll in the other roll stand may be less than thirty times the diameter of the roll material. The roll material is prevented from being twisted between the adjacent roll stands by such arrangement of the roll stands while the roll material is rolled in order in the respective roll stands 3, 4 and 5. Accordingly, the roll material is first rolled by the rolls of one of the adjacent roll stands and then by the rolls of the other roll stand. Thus the roll material can be rolled over the whole surface thereof without fail. Strictly speaking, the maximum value of the distance between the roll axes varies according to the torsional rigidity which is different for roll materials. For a steel material frequently used, however, it is possible to prevent such a torsion of the roll material as hindering complete rolling by making the maximum value less than thirty times the diameter of the roll material.

Next, in Fig. 11, similarly as in Fig. 7, is shown the relationship among rolls 25e and 44e in roll stands 3e and 4e which are included in a sizing mill ie.

The distance between the axes of rolls in both roll stands 3e and 4e is preferably less than thirty times the diameter of the roll material in the case of this embodiment

as well.

Figures 12A through 12C show the process in which a roll material is rolled in the sizing mill including the two roll stands. In reference to these figures is explained the case where a roll material 25 mm in diameters $D1e$ and $D1'e$ is rolled into a finished material 24.24 mm in diameter. In this case, each of concerning dimensions is set equal to the following values:

$R1e=12.12$ mm, $R2e=12.12$ mm, $S1e=24.10$ mm, $S2e=24.24$ mm and opening angle $\theta =120^\circ$

The roll material 25 mm in the diameters $D1e$ and $D1'e$ is rolled by the roll stands having rolls with dimensions established above. The roll material is made into a finished material 24.24 mm in the diameter $D4e$ via an intermediate material 24.10 mm in the diameter $D2e (=S1e)$ and 25.18 mm in the diameter $D3e$.

Those members in these figures which can be considered to be same as or equivalent to the members in the previous figures in the light of construction are represented by reference numerals which are same as in the previous figures but with an affixed alphabet e and the explanation of the members is not repeated. (Moreover, same reference numerals with an affixed alphabet f are used in the following figures according to the same idea in order to avoid the repeated explanation of same and equivalent members.)

In Fig. 13 is shown a rolling system by which a product

of practically continuously variable diameter can be formed. The rolling system has three sets of sizing mills 101, 102 and 103. Each of the sizing mills 101~103 is provided with a roll stand set 100A, 100B or 100C. More one roll stand set 100D is prepared separately besides these roll stand sets 100A~100C. Each of the roll stand sets 100A~100D comprises three roll stands which are equivalent in construction to the roll stands 3, 4 and 5 as shown in Figs. 1~3. The roll stand sets differ from one another only in the dimension of the groove on the roll (the radius of the aforementioned circular arc). This dimension is adjusted, before rolling work, such that the roll stand set 100A, for example, is suitable to form a product 24.0~25.8 mm in diameter. Similarly, the dimension is adjusted such that roll stand sets 100B, 100C and 100D are suitable to form products 22.2~23.9, 20.5~22.1 and 30.4~32.8 mm in diameter respectively.

In reference to Table 4, the manufacture of various kinds of products with use of this system is described. Table 4 is an example for the case where products of an arbitrary diameter in an interval 20.5~84.5 mm are manufactured. For manufacturing of such various kinds of products, the orders of various kinds of products are put together collected in advance and a rolling plan is formed. The rolling plan is formed in such a manner that products are manufactured in the increasing order of diameter.

Table 4

order	stand number															sizing mill			dimensions of products	
	0II	0V	1II	2V	3II	4V	5II	6V	7II	8V	9II	10V	11II	12V	13II	14V	101	102	103	
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	100A	100B	100C	20.5φ~22.1φ
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	22.2φ~23.9φ
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	21.0φ~25.8φ
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	□100D	△100B	△100C	25.9φ~27.9φ
5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	28.0φ~30.3φ
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	30.4φ~32.8φ
7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	△100A	△100B	△100C	32.9φ~37.6φ
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	35.7φ~38.6φ
9	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	38.7φ~41.1φ
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	△100D	△100B	△100C	41.5φ~44.9φ
11	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	45.0φ~48.8φ
12	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	48.9φ~52.4φ
13	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	△100A	△100B	△100C	52.5φ~56.8φ
14	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	56.9φ~61.7φ
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	61.8φ~66.5φ
16	○	○	○	○	○	○	○	×	×	×	×	×	×	×	×	×	△100D	△100B	△100C	66.6φ~72.2φ
17	○	○	○	○	○	○	○	×	×	×	×	×	×	×	×	○	○	○	×	72.3φ~78.3φ
18	○	○	○	○	○	○	○	×	×	×	×	×	×	×	×	○	○	○	×	78.4φ~84.5φ

(○ : used, × : not used, □ : used exchangeably, △ : used exchangeably after being cut over)

In the first place, products 20.5~22.1 mm in diameter are manufactured using all the roll stands and all the stand sets 100A~100C mounted in the sizing mills 101~103 as indicated in the line of order 1 in Table 4.

In the next place, the stand set 100C in the sizing mill 103 is removed as shown in the line of order 2 and products 22.2~23.9 mm in diameter are manufactured. While these products are manufactured, the groove on the roll in the removed stand set 100C is cut over again into a shape appropriate to form products 25.9~27.9 mm in diameter.

Next, the stand set 100B of the sizing mill 102 is removed as shown in the line of order 3 and products 24.0~25.8 mm in diameter are manufactured. While these products are manufactured, the groove on the roll in the removed stand set 100B is cut over again into a shape appropriate to form products 28.0~30.3 mm in diameter.

Next, the stand set 100A of the sizing mill 101 is exchanged for the stand set 100D prepared separately as shown in the line of order 4. In the sizing mills 102 and 103 are mounted the stand sets 100B and 100C with rolls which have been appropriately cut over again. In this situation, the roll stands 13H and 14V are not used but all the stand sets 100D, 100B and 100C are used. Thus, products 25.9~27.9 mm in diameter are manufactured.

Furthermore, an operation similar as that in the case of order 2 is carried out in accordance with the line of order 5

and products 28.0~30.3 mm in diameter are manufactured. While these products are manufactured, the rolls of the removed stand set 100C are appropriately cut over again so that the grooves of the rolls may have a shape suitable for manufacturing products 32.9~37.6 mm in diameter with use of the stand set 100C in the next step.

Similar operations as mentioned above are repeatedly carried out according to lines of order in Table 4 and products of required diameters are formed in succession.

The work of exchanging rolls in a rolling installation, in general, takes a relatively long time. Products of much variety in diameter, however, can be obtained by the above mentioned method with a less number of times of exchanging roll stands. Moreover, the work of cutting rolls appropriately over again takes a long time as well. According to the present invention, however, this work can be carried out while the roll stands are not used. Consequently, the rolling work need not be stopped for the work of cutting over and thus can be practiced efficiently.

In passing, Table 5 presents combinations of roll stands in the case where products of variety in diameter are manufactured by a conventional method.

Table 5

order	stand number														dimensions of products	
	0II	0V	1II	2V	3II	4V	5II	6V	7II	8V	9II	10V	11II	12V	13II	14V
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	26
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	□	28
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	30
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	32
5	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	34
6	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	36
7	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	38
8	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	40
9	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	42
10	○	○	○	○	○	○	○	○	○	○	○	○	□	×	×	44
11	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	46
12	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	48
13	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	50
14	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	55
15	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	59
16	○	○	○	○	○	○	○	○	○	○	○	○	□	□	×	65
17	○	○	○	○	○	○	○	□	□	×	×	○	×	×	×	70
18	○	○	○	○	○	○	○	□	□	×	×	○	×	×	×	75
19	○	○	○	○	○	○	○	□	□	×	×	○	×	×	×	80

(○ :used, × :not used, □ :interchangeably used or used with calibers reformed)

In the case of this conventional method, diameters of possible products can vary only stepwise. Besides, the work of exchanging roll stands or of changing calibers is required every time when the diameter of products is changed. These works require to stop the rolling line and lower the efficiency in the rolling work. According to the above mentioned present invention, however, these points can be solved.

As many apparently widely different embodiments of this invention may be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A sizing mill including two roll stands arranged along a planned passage line of a roll material,

each of said roll stands having

(a) a housing and

(b) a pair of rolls each of which is provided with a groove on the circumferential surface thereof and is rotatably mounted in said housing,

the axial direction of the roll in one of said roll stands differing by 90° from that of the roll in the other of said roll stands and

the groove on each of said rolls consisting of a bottom surface which is a circular arc in cross section, the size of said circular arc being determined such that the angle made by a line passing the center and one end of said circular arc and a line passing the center and the other end of said circular arc may be equal to a value selected in an interval 90° ~ 140° , and of both side surfaces which are, in cross section, circular arcs of a radius larger than that of the circular arc of said bottom surface or segments of line.

2. A sizing mill as set forth in claim 1 wherein said pair of rolls are mounted against said housing so that the rolls may displace close to or away from each other and each of said roll stands includes further an adjusting means for adjusting the spacing between said pair of rolls.

3. A sizing mill as set forth in claim 1 wherein the distance between the axial line of the roll in one of said two roll stands and the axial line of the roll in the other of said roll stands is less than thirty times the diameter of said roll material.

4. A sizing mill as set forth in claim 1 wherein another roll stand similar in construction to said roll stands and arranged along said planned passage line of said roll material is provided and the axial direction of the roll in each of a series of said roll stands differs by 90° in order from roll stand to roll stand.

5. A method of rolling a roll material into a finished material using a sizing mill which includes three roll stands arranged along a planned passage line of a roll material, each of said roll stands having a housing, a pair of rolls provided thereon with respective grooves and mounted in said housing for rotation and mutual displacement and an adjusting means for adjusting the spacing between said pair of rolls, the axial direction of the rolls in each of said roll stands differing by 90° in order from roll stand to roll stand, and said groove on each of said rolls consisting of a bottom surface which is an circular arc in cross section and has such a dimension as the angle made by a line passing the center and one end of said circular arc and a line passing the center

and the other end of said circular arc is equal to a value selected in an interval of 90~140° and of both side surfaces which are, in cross section, circular arcs of a radius larger than that of the circular arc of said bottom surface or segments of line.

said method including a step to set the spacing between the grooves on said pair of rolls in each of said roll stands in accordance with the planned diameter of said finished material and a step to pass said roll material into said roll stands where said spacings have been set.

DATED THIS 7TH DAY OF OCTOBER 1988

DAIDOTOKUSHUKO KABUSHIKIKAISHA

By Its Patent Attorneys:

GRIFFITH HACK & CO.

Fellows Institute of Patent
Attorneys of Australia

FIG.1

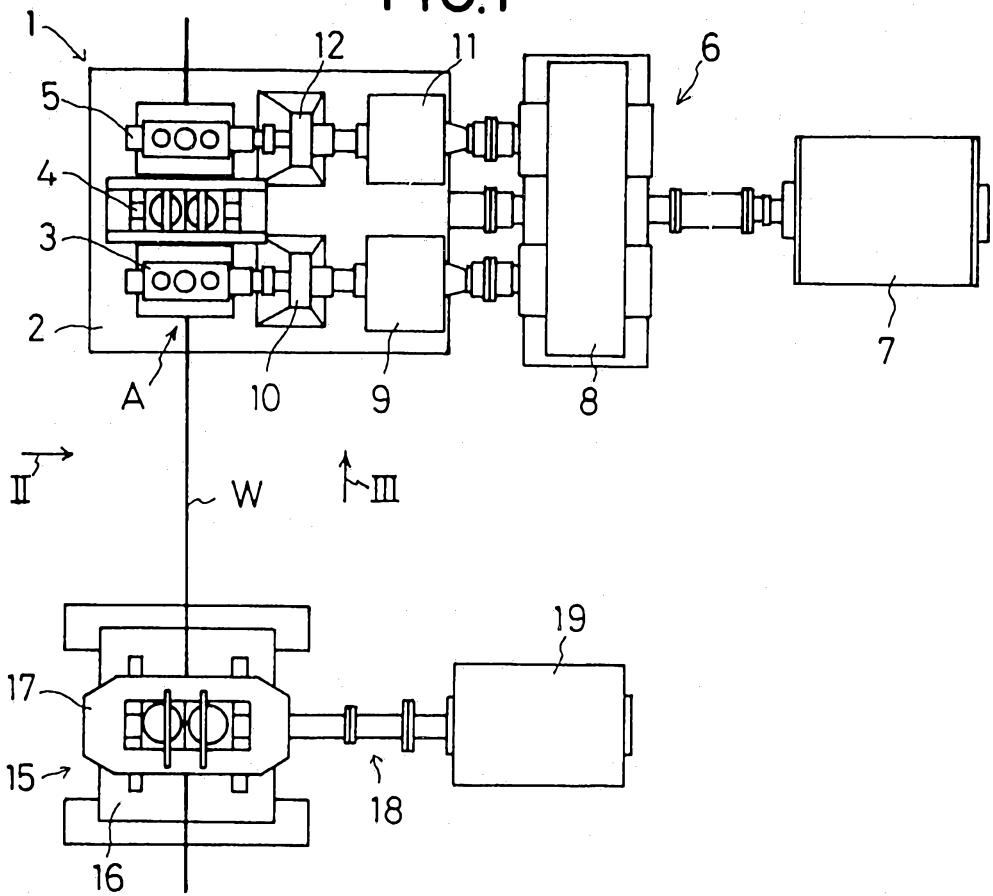


FIG.2

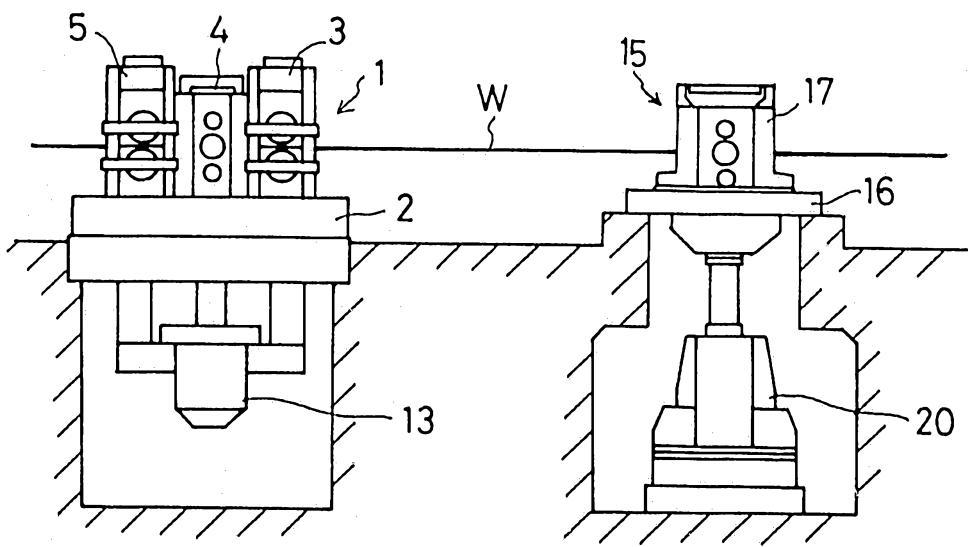


FIG. 3

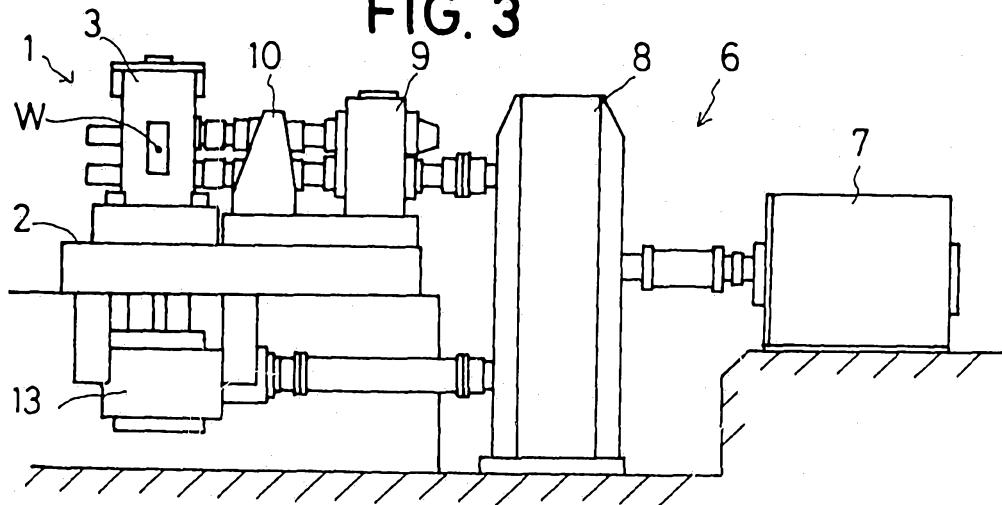


FIG. 4

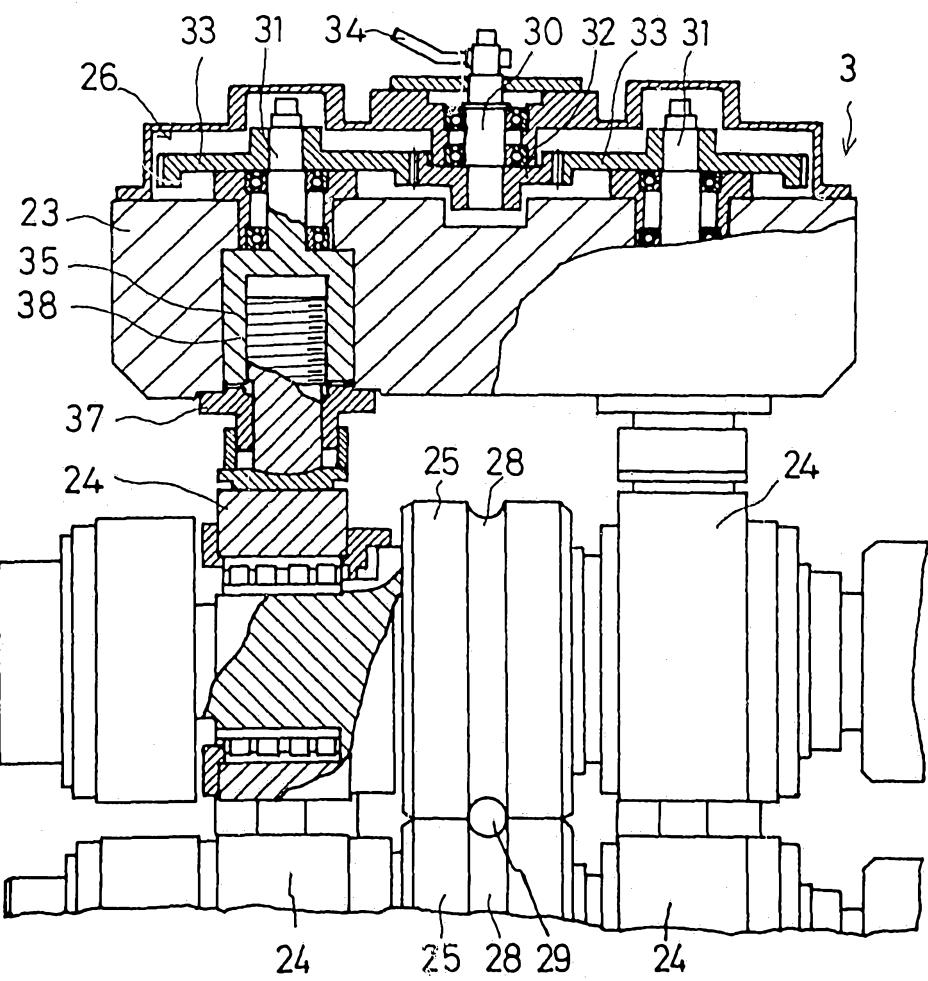


FIG. 5

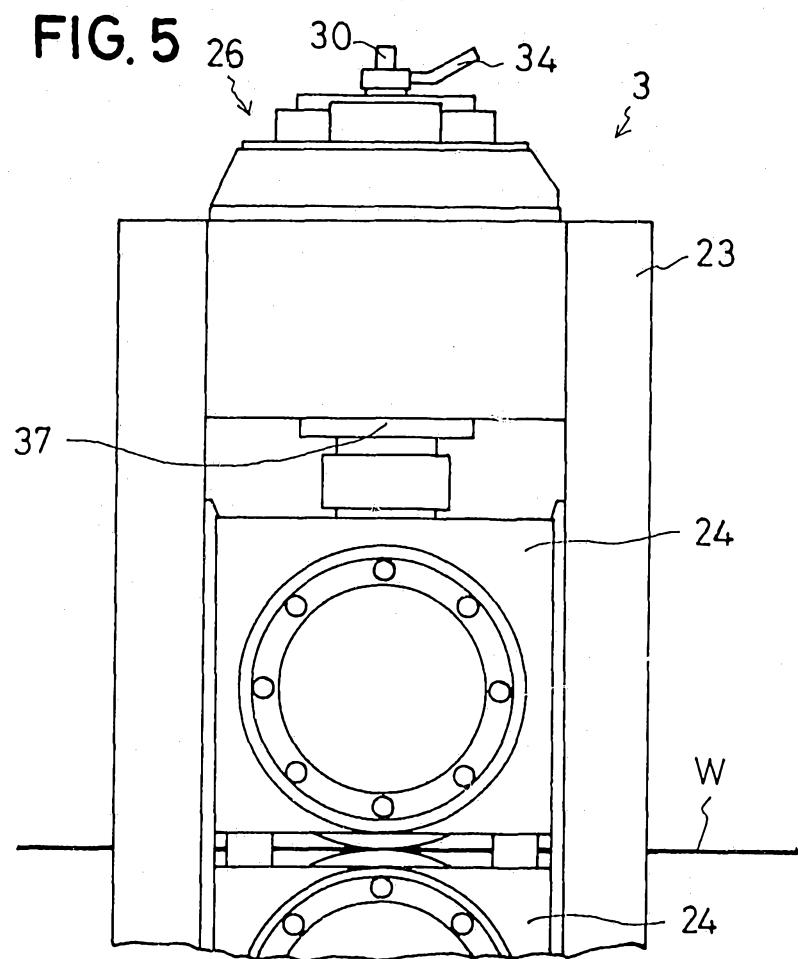


FIG. 6

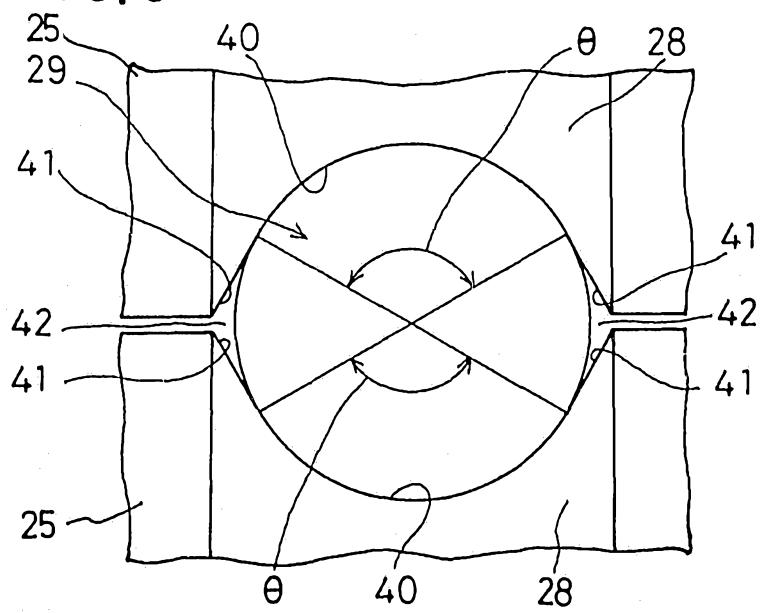


FIG. 7


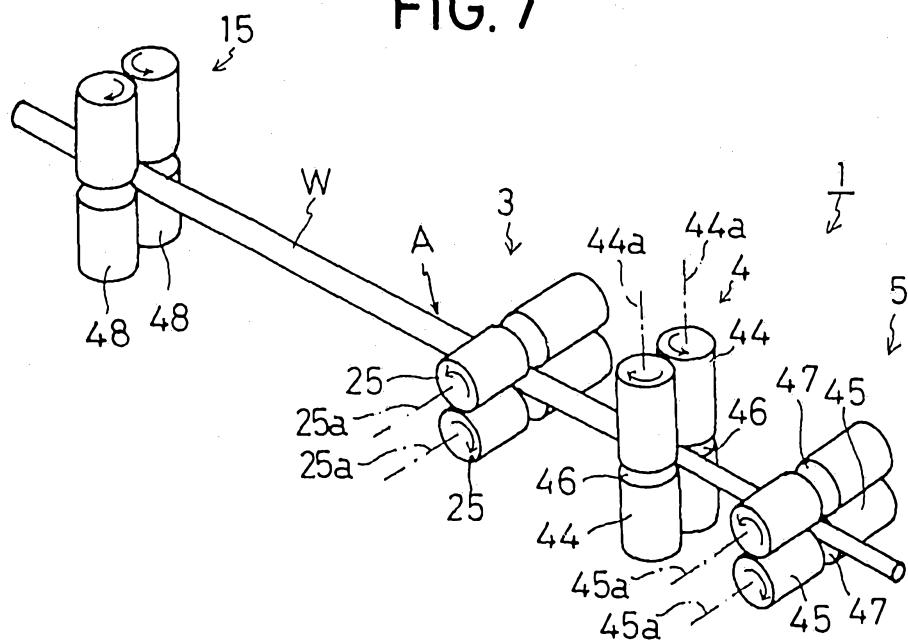


FIG. 8

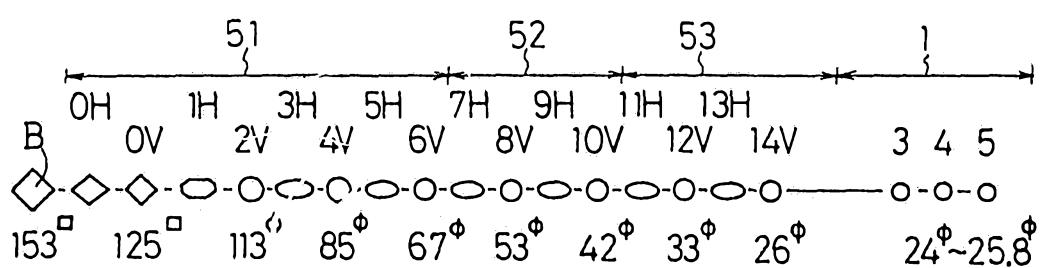

23 577/88

FIG. 9A

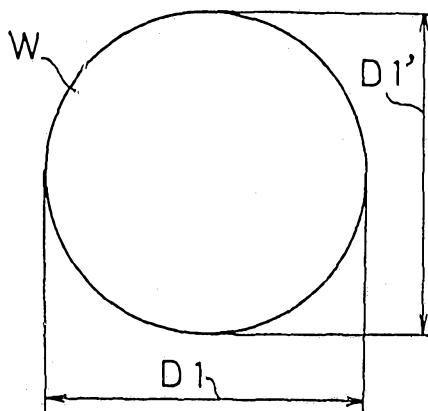


FIG. 9B

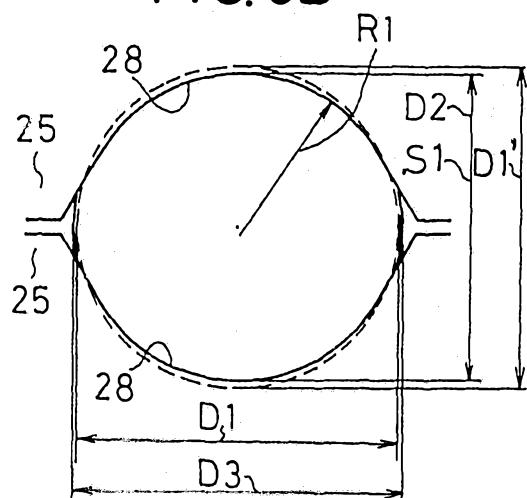


FIG. 9C

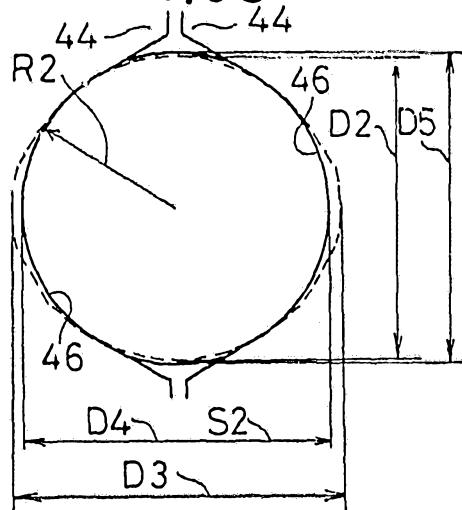


FIG. 9D

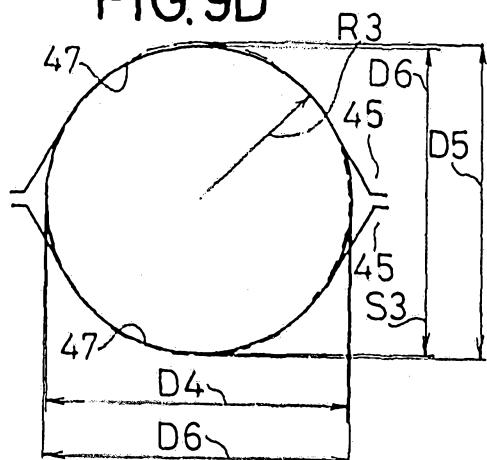
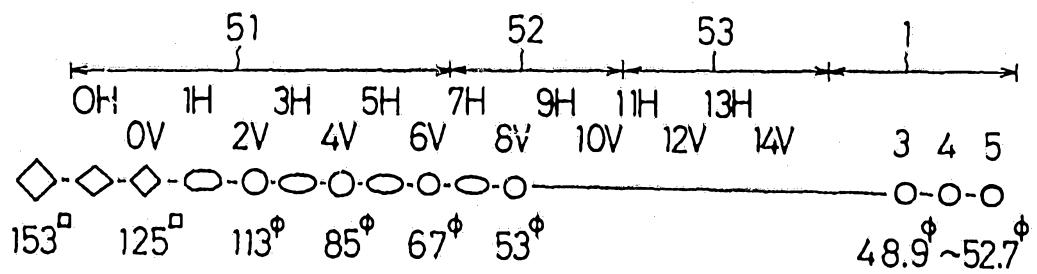


FIG. 10



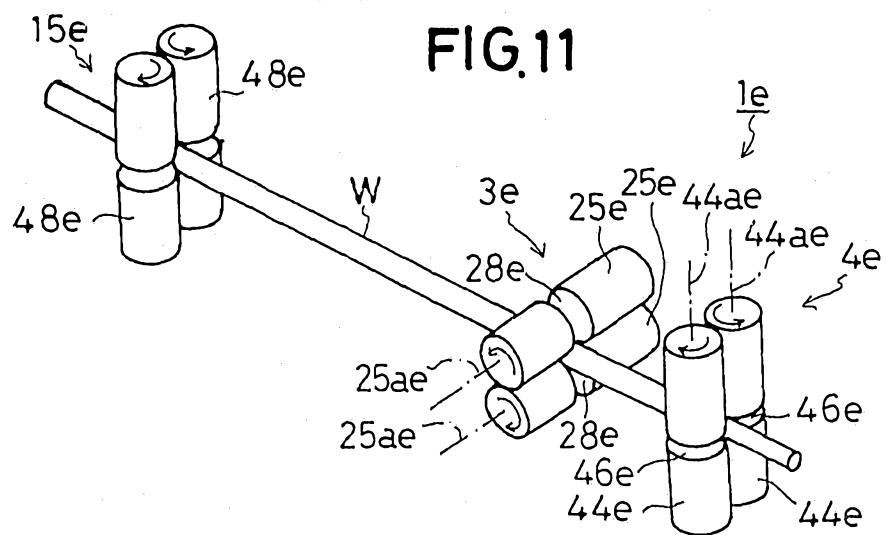


FIG.12A

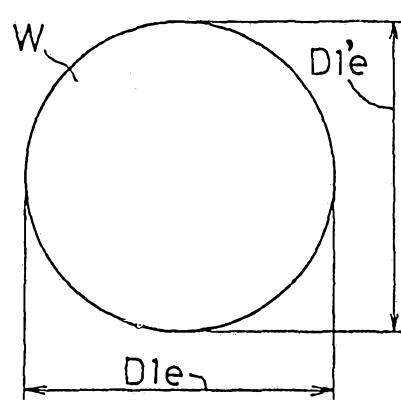


FIG.12B

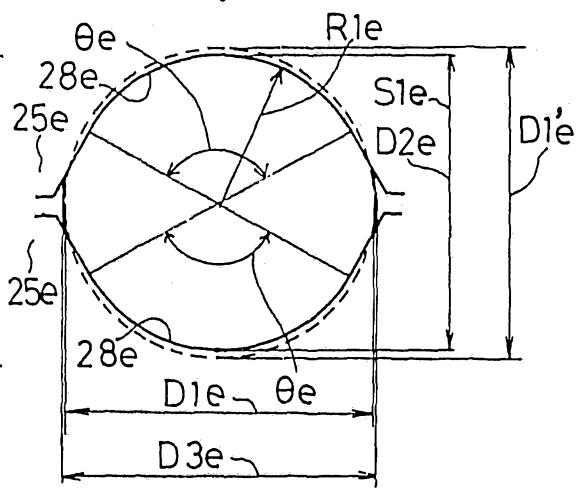


FIG.12C

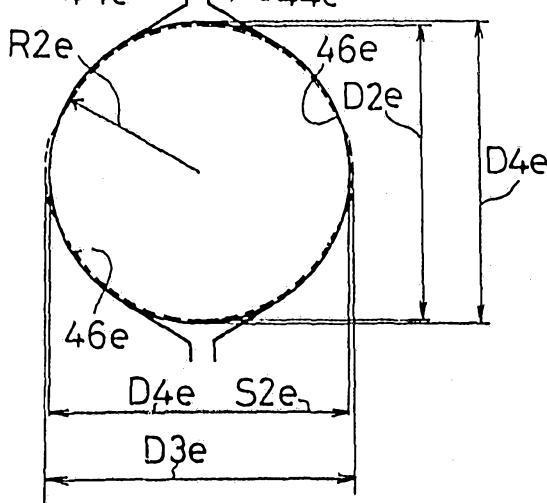


FIG. 13

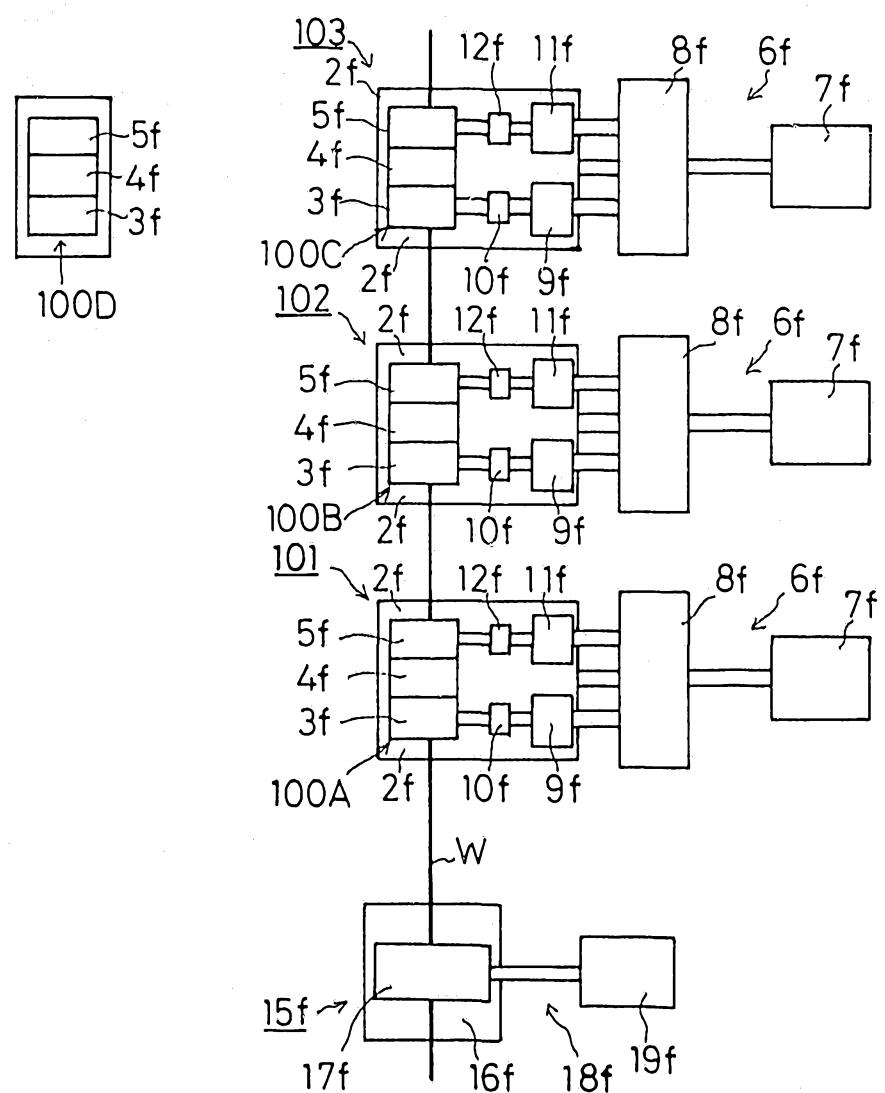


FIG.14

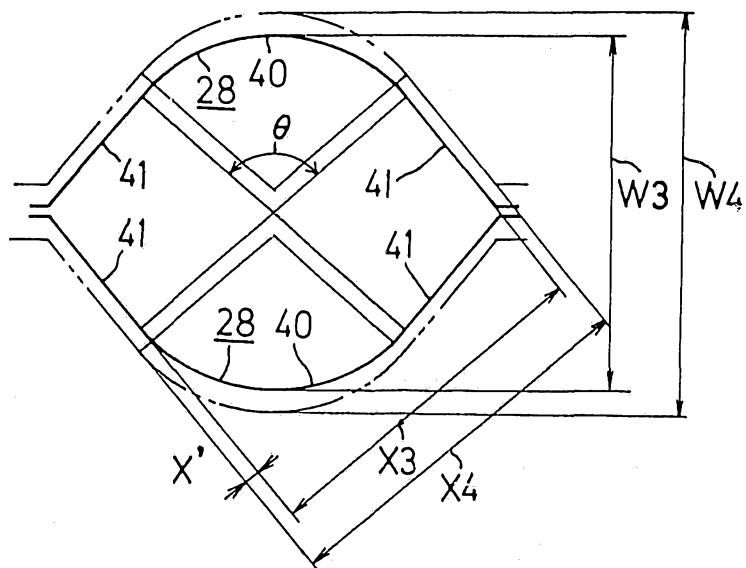


FIG.15

