




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06F 12/00, 13/00	A2	(11) International Publication Number: WO 00/02125 (43) International Publication Date: 13 January 2000 (13.01.00)
(21) International Application Number: PCT/US99/14902 (22) International Filing Date: 30 June 1999 (30.06.99) (30) Priority Data: 09/109,318 1 July 1998 (01.07.98) US (71) Applicant: STORAGE TECHNOLOGY CORPORATION [US/US]; 2270 South 88th Street, MS-4309, Louisville, CO 80028-4309 (US). (72) Inventors: BLENDERMANN, Stephen, H.; 1489 Johnson Court, Boulder, CO 80303 (US). SUTTON, Alan, R.; 3991 75th Street, Boulder, CO 80301 (US). (74) Agents: SCHWARTZ, Paul, M. et al.; Brooks & Kushman, 22nd floor, 1000 Town Center, Southfield, MI 48075 (US).		(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: METHOD FOR SELECTIVELY STORING REDUNDANT COPIES OF VIRTUAL VOLUME DATA ON PHYSICAL DATA STORAGE CARTRIDGES

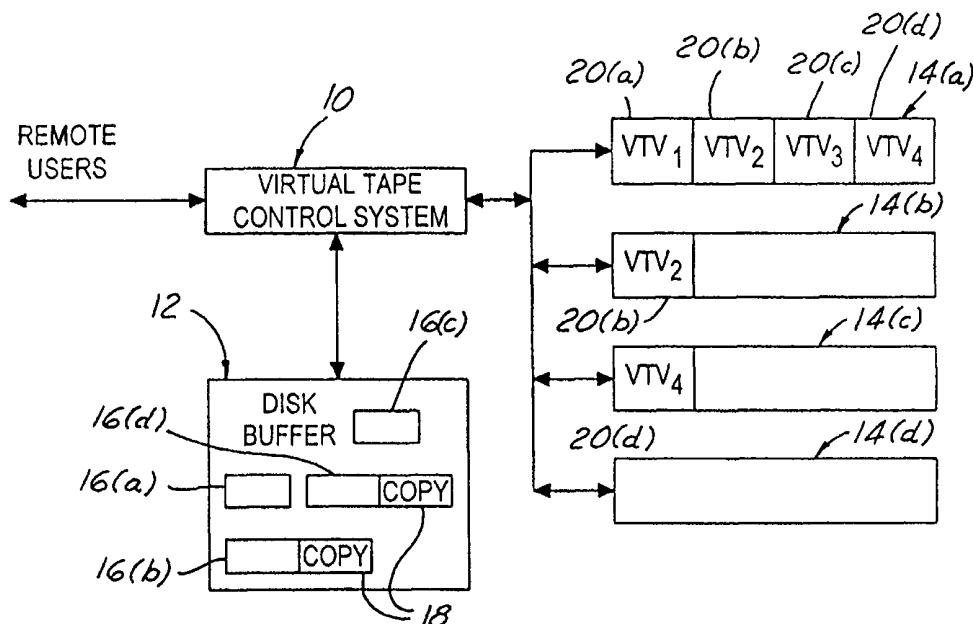

(57) Abstract

The present invention provides a method for selectively storing duplicate copies of a virtual data volume file onto more than one multiple volume cartridge (MVC) based upon a copy indicator provided with a data volume file at the meta data file level. If access is subsequently lost to the main MVC as a result of hardware or tape failure, any copied data stored thereon is automatically recovered by accessing an MVC holding a copy of the data volume file. Thus, the amount of data which could be possibly lost is minimized without otherwise compromising the efficiency and flexibility provided by a multiple virtual volume data storage arrangement.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5 **METHOD FOR SELECTIVELY STORING
REDUNDANT COPIES OF VIRTUAL VOLUME DATA
ON PHYSICAL DATA STORAGE CARTRIDGES**

Technical Field

10 The present invention relates generally to multiple volume cartridge (MVC) devices, and more particularly to an arrangement for storing virtual volume data which minimizes the amount of data which could be lost due to a sudden inability to access a particular MVC.

Background Art

15 Generally, automated cartridge systems (ACS) provide a mechanism by which multiple users in a data processing system can have common access to multiple data storage subsystems, such as different multiple magnetic tape cartridge devices. In such a conventional system, physical data files generated by remote user
20 computer systems are stored individually on different tape cartridges using an addressing arrangement. With such an arrangement, the potential loss of stored data is minimized if the system suddenly loses the ability to access a given tape cartridge as a result of hardware or
25 tape failure, i.e., only the single data file stored on the inaccessible tape is likely to be lost because that is all that is stored on any individual tape cartridge.

- 2 -

However, recently efficiency in mass data access and storage utilization have been improved by employing a disk buffer between the remote users and a set of multiple volume cartridges (MVC) to create
5 virtual data volumes in place of the actual transferred data files. Efficiency and utilization are increased in such a virtual volume arrangement because multiple virtual volumes can be selectively stored on a single cartridge to maximize space utilization.

10 While such a multiple virtual volume arrangement significantly improves utilization and throughput efficiency, the placement of multiple virtual volumes on a single cartridge has produced an undesirable side effect by increasing the amount of data
15 at risk to loss if a MVC hardware or cartridge failure occurs. As a result, a need exists for an improved method for storing multiple virtual volumes which minimizes the amount of data which can be potentially lost without compromising the efficiency in space
20 utilization otherwise provided.

Disclosure of the Invention

It is therefore an object of the present invention to provide an improved method for storing multiple virtual data volumes to one of a plurality of
25 multiple volume cartridges (MVC) which minimizes the amount of data which may be lost if a particular cartridge suddenly becomes inaccessible.

It is another object of the present invention to provide a method for storing multiple virtual data
30 volumes to one of a plurality of MVCs which allows

- 3 -

selective copying of a virtual volume data file to more than one cartridge to minimize the amount of data which could be potentially lost if a particular cartridge suddenly becomes inaccessible.

5 It is still another object of the present invention to provide a method for storing multiple virtual data volumes to one of a plurality of MVCs which allows a user to selectively control copying of a virtual volume data file to different cartridges in
10 order to minimize the amount of data which could be potentially lost if a particular cartridge suddenly becomes inaccessible.

 In accordance with these and other objects, the present invention provides a method for selectively
15 storing multiple virtual data volumes on at least one of a plurality of multiple volume cartridges (MVC) including the steps of a remote user selectively requesting at a data file level that a data volume file to be copied and stored on more than one MVC, storing
20 all data volume files transferred from remote computer systems in a disk buffer located between the remote users and the plurality of MVCs, and automatically determining via a control subsystem whether a received data volume file has been designated for copying to at
25 least one additional MVC. If a received data volume file has been designated for copying, the data volume stored in the disk buffer is written as a virtual data volume to more than one MVC before the data volume file is removed from the disk buffer. A record is maintained
30 by the control subsystem indicating all MVC locations for each stored virtual volume file.

- 4 -

With such an arrangement, a user is advantageously permitted to selectively designate redundant back-up copying of a data volume file at the time of data transfer. If access is lost to a particular MVC, any copied data stored thereon is automatically recovered by accessing an MVC holding a copy of the data volume file. This in turn minimizes the amount of data which could be possibly lost without otherwise compromising the efficiency and flexibility provided by a multiple virtual volume data storage arrangement.

These and other objects, features, and advantages of the present invention will be readily apparent from the following detailed description of the best mode for carrying out the invention when taken in connection with the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a block diagram illustrating a data storage system employing selective virtual volume copying in accordance with the present invention;

Figure 2 is a flowchart showing the overall process of the present invention; and

Figure 3 is a flowchart showing the back-up copy retrieval process of the present invention.

Best Mode for Carrying Out The Invention

The overall method of the present invention will now be described in connection with Figures 1 and 2. More specifically, the present invention includes a suitable storage control subsystem 10 programmed to

- 5 -

store all incoming data volume files transferred from remote user computer systems in a disk buffer 12 as denoted at block 100. At block 102, control subsystem 10 automatically analyzes each received data file to determine whether the remote user has associated particular copy attributes within a meta file external to the data file. Such associating of copy attributes or indicators can be carried out in any manner known to one of ordinary skill in the art. The associating of such copy attributes provides an indication from the remote user that the received data file is to be duplicated by copying and redundantly storing the data file on more than one of the plurality of available multiple volume cartridges (MVC) 14(a)-14(n).

If the associated copy attributes are detected, as indicated at block 104, control subsystem 10 automatically writes the data stored in disk buffer 12 as an associated virtual volume to more than one MVC 14 when prompted during the normal storage phase portion of the storage control routine. Otherwise, the associated virtual volume is only written to a single MVC as denoted at block 106.

For illustrative purposes, Figure 1 shows receipt of four different data volume files 16(a)-16(d) from one or more remote users. As shown, data volumes files 16(b) and 16(d) have been tagged with a copy indicator 18 which indicates that duplicate storage is desired for these two data volume files. As further shown, each of the data volume files is written as a virtual tape volume (VTV) 20 associated with each data volume file 16 from disk buffer 12 to a selected MVC 14(a) in accordance with a predetermined ordering protocol, such as based on an predetermined expiration

- 6 -

date, or a conventional first-in-first-out (FIFO) sequence.

In addition, the VTVs associated with data volume files 16(b) and (d) to be duplicated are individually written to different respective MVCs 14(b) and 14 (c). Each data volume file 16 is individually cleared from disk buffer 12 after being written to the different MVCs. Alternatively, both VTVs could be written to the same back-up MVC 14(b). As indicated at block 108, control subsystem 10 maintains a record of each MVC location for all stored VTVs.

Referring now to Fig. 3, if access to MVC 14(a) subsequently becomes impossible such as due to a hardware or tape failure as denoted at block 110, control subsystem 10 will automatically locate the back-up MVC location of any redundantly stored VTVs at block 112, retrieve all requested VTVs into buffer 12 at block 114, and regenerate new copies of the VTVs by writing the data from buffer 12 to a new MVC 14 at block 116. On the other hand, if the main MVC is accessible at block 110, then the original set of requested VTVs are retrieved into the buffer 12 as shown at block 118.

Thus, the present invention advantageously provides a method for storing data volume files to a MVC which allows a user to select desired data volume files for redundant/back-up storage on more than one MVC, and which automatically retrieves redundant copies to regenerate any data stored on an inaccessible MVC. Through selective redundancy and automatic regeneration, the present invention minimizes the amount of data which could be potentially lost if the system experiences hardware or tape failure.

- 7 -

5 While the best mode for carrying out the invention has been described in detail, those familiar with the art to which this invention relates will recognize various alternative designs and embodiments for practicing the invention as defined by the following claims.

- 8 -

What Is Claimed Is:

1. A method for selectively storing multiple virtual data volumes on at least one of a plurality of multiple volume cartridges comprising:

5 selectively designating at a data file level a data volume file to be copied and stored on more than one multiple volume cartridge;

storing all data volume files transferred from one or more remote computer systems in a disk buffer located between the remote computer systems and the plurality of multiple volume cartridges;

10 automatically determining whether a received data volume file has been designated for copying to more than one multiple volume cartridges;

writing the data volume files stored in the disk buffer to a first one of the multiple volume cartridges as virtual data volumes; and

15 copying the virtual data files corresponding to any data volume files designated for duplicate storage to at least a second multiple volume cartridge before removing the copied data files from the disk buffer.

2. The method of claim 1 further comprising maintaining a record indicating all multiple volume cartridge locations for each stored virtual data file.

25 3. The method of claim 2 further comprising: detecting that the first multiple volume cartridge is inaccessible;


automatically locating and retrieving into the disk buffer a duplicate copy of the virtual data files stored on the inaccessible cartridge; and

30

- 9 -

writing new copies of the retrieved virtual data files to an additional multiple volume cartridge.

4. The method of claim 1 wherein selectively designating at a data file level comprises a remote user associating copy attributes in a meta file for the selected data file.
- 5

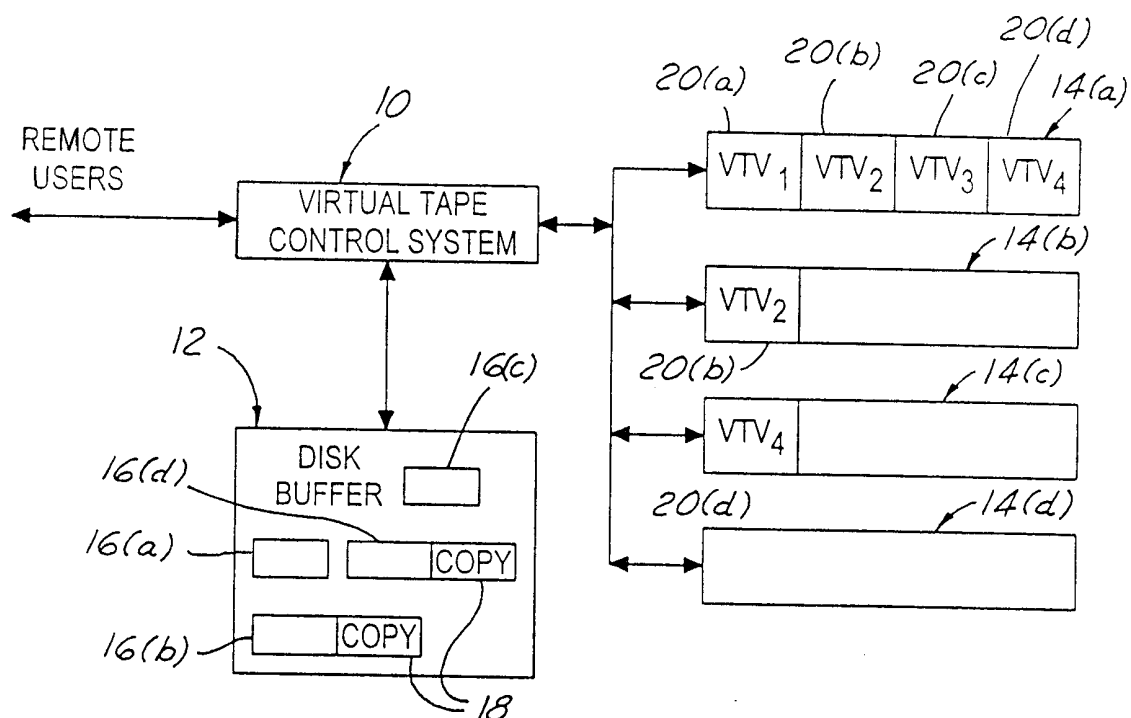FIG. 1

2/2

