



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**01.10.2003 Bulletin 2003/40**

(51) Int Cl.7: **B41J 2/175**

(21) Application number: **02021659.4**

(22) Date of filing: **27.09.2002**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
IE IT LI LU MC NL PT SE SK TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Sasaki, Toyonori**  
**Mizuho-ku, Nagoya-shi, Aichi-ken (JP)**  
• **Iijima, Shota**  
**Mizuho-ku, Nagoya-shi, Aichi-ken (JP)**

(30) Priority: **28.03.2002 JP 2002090322**  
**26.07.2002 JP 2002218192**  
**01.08.2002 JP 2002225294**  
**23.07.2002 JP 2002214079**


(74) Representative: **Prüfer, Lutz H., Dipl.-Phys. et al**  
**PRÜFER & PARTNER GbR,**  
**Patentanwälte,**  
**Harthausen Strasse 25d**  
**81545 München (DE)**

(71) Applicant: **BROTHER KOGYO KABUSHIKI  
KAISHA**  
**Nagoya-shi, Aichi-ken (JP)**

(54) **Ink cartridge and recording device**

(57) An ink cartridge (200) is used mounted in a recording device with a hollow needle (82), a lever, a protruding wall, and an optical sensor. The lever and the optical sensor are located on either side of the hollow needle, but closer to the opening through which the ink cartridge (200) is mounted. The ink cartridge is formed with two grooves open to the front and lower surfaces of the ink cartridge at positions that correspond to the protruding wall and the optical sensor. A light blocking

member is disposed in the groove that corresponds to the optical sensor. When the ink cartridge is mounted into the recording device, one groove accommodates and is guided by the protruding wall. The other groove accommodates the sensor so that the light blocking member protrudes into the optical sensor. Also, the front surface of the ink cartridge abuts the lever, which uncovers the hollow needle so that ink supply hole in the front surface of the ink cartridge is inserted with the hollow needle.

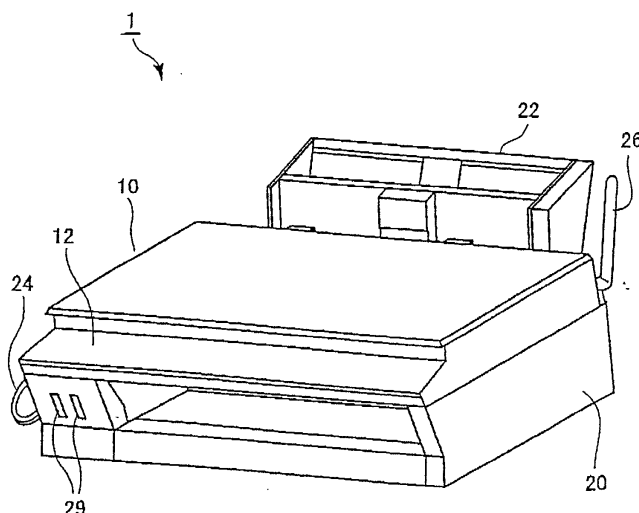

**FIG. 1**

## Description

**[0001]** The present invention relates to a recording device and to an ink cartridge mountable in the recording device.

**[0002]** Ink cartridges are provided for supplying ink required for recording operations to recording devices.

**[0003]** Japanese Patent No. 2,768,817 discloses a recording device with an open portion provided on its front surface. A plurality of ink cartridges for ejecting different colored inks are aligned in the open portion.

**[0004]** United States Patent No. 6,142,617 discloses a recording device with an upwardly-opened open portion. Grooves corresponding to a plurality of ink cartridges are provided in side edges that confront the open portion. The ink cartridges are inserted from above by being aligned with the grooves and dropped into the open portion.

**[0005]** It is desirable to make the recording device more compact. It is also desirable that the ink cartridges also be provided thinner and smaller and also easier to attach to and detach from the recording device.

**[0006]** It is an objective of the present invention to provide a recording device with a more flat ink cartridge mounting portion so that the recording device is more compact and wherein ink cartridges can be easily attached and detached, and to provide an ink cartridge that is thinner and smaller and that can be easily mounted in the ink cartridge mounting portion of the recording device.

**[0007]** In order to achieve the above-described objectives, a combination of a recording device and an ink cartridge according to a first aspect of the present invention includes a recording device and an ink cartridge. The recording device includes an open portion, floor surface, a ceiling surface, a hollow needle, a cover, a lever, a protruding wall, and a sensor portion. The open portion has an opening that opens in a horizontal direction to outside. The floor surface and the ceiling surface extend in the horizontal direction. An ink cartridge mounting portion is defined by the open portion, the floor surface, and the ceiling surface. The hollow needle supplies ink to a recording head. The hollow needle is positioned in confrontation with the open portion and extending in a needle axial direction. The cover selectively covers and uncovers the hollow needle with respect to the open portion. The lever moves the cover to uncover the needle. The lever is positioned nearer the open portion than is the cover. The protruding wall is positioned on the floor surface adjacent to the lever. The protruding wall extends in the needle axial direction. The sensor portion includes a light emitting portion and a light receiving portion in confrontation with each other. The lever and the sensor portion protrude from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction.

**[0008]** The ink cartridge is detachably mounted in the

ink cartridge mounting portion and includes a lower surface, a front surface, a protruding wall, an operation portion, a sensor indentation portion, and a light blocking member. The lower surface is adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device. The front surface has an ink supply hole inserted with the hollow needle. The protruding wall indentation portion accommodates the protruding wall. The operation portion is provided at a position that is adjacent to the protruding wall indentation portion and that corresponds to the position of the lever. The operation portion is for operating the lever. The sensor indentation portion accommodates the sensor portion. The light blocking member moves corresponding to amount of ink remaining in the ink cartridge. The light blocking member is provided in correspondence with the sensor portion so as to protrude into the sensor indentation portion and interpose between the light emitting portion and the light receiving portion when the ink cartridge is mounted in the ink cartridge mounting portion. The sensor indentation portion and the protruding wall indentation portion are formed open at the front surface and the lower surface at a position that sandwiches both sides of the ink supply hole as viewed from the front surface side.

**[0009]** Because the sensor portion and the lever are disposed on either side of the hollow needle, the lever and the mechanism for moving the lever and the cover can be arranged in the recording device without interfering with the sensor portion and the circuit board connected to the sensor portion. As a result, the ink cartridge and the ink cartridge mounting portion can be made more flat. The floor surface of the ink cartridge mounting portion enables more stable sliding of the ink cartridge so that the ink cartridge is easier to mount. The ink cartridge can be accurately mounted with reliable correspondence with the sensor portion.

**[0010]** It is desirable that the recording device include a plurality of ink cartridge mounting portions aligned on the floor surface on substantially the same imaginary plane. Because the plurality of ink cartridge mounting portions are aligned on the same plane, the ink cartridge mounting portions overall can have a more flat configuration.

**[0011]** It is desirable that the ink cartridge mounting portions be positioned below a transport pathway for sheets recorded by the recording head. Because the plurality of ink cartridge mounting portions are disposed beneath the sheet transport pathway, the ink cartridge mounting portions overall can have a more flat configuration.

**[0012]** It is desirable that the recording device further include protrusion portions and the ink cartridge further include an upper surface. The protrusion portions are provided at horizontal ends of the ink cartridge mounting portion and protrude away from the ceiling surface toward the floor surface. The upper surface extends higher toward the ceiling surface at portions that correspond

to in between the protrusion portions of the recording device than at portions that correspond to the protrusion portions. The protrusion portions regulate height wise position of the ink cartridge when the ink cartridge is inserted in the open portion. The protruding wall indentation portion and the operation portion are provided near the portions of the ink cartridge that correspond to the protrusion portions of the recording device. With this configuration, the ink cartridge can be inserted into the open portion without mistakenly inserting the ink cartridge upside down. Also, an ink cartridge is prevented from being mounted in the wrong mounting portion.

**[0013]** It is desirable that the floor surface extend away from the hollow needle farther than the ceiling surface. As a result, when the ink cartridge is inserted into the open portion of the ink cartridge mounting portion, the ink cartridge abuts against the portion of the floor portion that extends beyond the open portion and slides across the floor surface so that the ink cartridge can be easily inserted into the open portion.

**[0014]** An ink cartridge according to a second aspect of the present invention is for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in an needle axial direction; a cover selectively covering and uncovering the hollow needle with respect to the open portion; a lever that moves the cover to uncover the needle, the lever being positioned nearer the open portion than is the cover; a protruding wall positioned on the floor surface adjacent to the lever, the protruding wall extending in the needle axial direction; and a sensor portion. The sensor portion includes a light emitting portion and a light receiving portion in confrontation with each other. The lever and the sensor portion protrude from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction

**[0015]** The ink cartridge according to the second aspect of the present invention is detachably mounted in the ink cartridge mounting portion and includes a lower surface, a front surface, a protruding wall indentation portion, an operation portion, a sensor indentation portion, and a light blocking member. The lower surface is adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device. The front surface has an ink supply hole inserted with the hollow needle. The protruding wall indentation portion accommodates the protruding wall. The operation portion is provided at a position that is adjacent to the protruding wall indentation portion and that corresponds to the position of the lever and that is for oper-

ating the lever. The sensor indentation portion accommodates the sensor portion. The light blocking member moves corresponding to amount of ink remaining in the ink cartridge. The light blocking member is provided in correspondence with the sensor portion so as to protrude into the sensor indentation portion and interpose between the light emitting portion and the light receiving portion when the ink cartridge is mounted in the ink cartridge mounting portion. The sensor indentation portion and the protruding wall indentation portion are formed open at the front surface and the lower surface at a position that sandwiches both sides of the ink supply hole as viewed from the front surface side. With this configuration, the ink cartridge can be configured in a more flat shape. The ink cartridge can be slid more stably across the floor surface of the ink cartridge mounting portion and so can be mounted and detached more easily.

**[0016]** It is desirable that the ink cartridge further include an upper surface that confronts the ceiling surface of the recording device when the ink cartridge is mounted in the recording device. The upper surface extends higher toward the ceiling surface at portions that correspond to in between protrusion portions, which are provided on the ceiling surface at horizontal ends of the ink cartridge mounting portion and that protrude toward the floor surface, than at portions that correspond to the protrusion portions. With this configuration, the ink cartridge can be inserted into the open portion without mistakenly inserting the ink cartridge upside down.

**[0017]** It is desirable that the front surface have a protruding shape that is higher at portions that correspond to in between protrusion portions and lower at portions that correspond to the protrusion portions. The ink supply hole being formed substantially in the horizontal center of the higher portion of the front surface. With this configuration, the diameter of the ink supply hole can be made larger. Therefore, the diameter of the plug mounted in the ink supply hole can be made larger. This makes it easier to pierce the plug with the hollow needle.

**[0018]** When the recording device is configured so that an open portion side tip of the protruding wall is positioned closer to the open portion than is an open portion side tip portion of the sensor portion, it is desirable that an end of the protruding wall indentation portion that is opposite to an end of the protruding wall indentation portion that is open to the front surface be positioned farther from the front surface than is an end of the sensor indentation portion that is opposite to an end of the sensor indentation portion that is open to the front surface. With this configuration, when the ink cartridge is inserted into the ink cartridge mounting portion, the protrusion wall indentation portion and the protrusion begin to guide the ink cartridge so that the sensor indentation portion reaches the sensor portion after the ink cartridge is positioned in its widthwise direction. Therefore, the sensor indentation portion can reliably accommodate the sensor portion.

**[0019]** An ink cartridge according to a third aspect of the present invention is for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in an needle axial direction; a cover selectively covering and uncovering the hollow needle with respect to the open portion; a lever that moves the cover to uncover the needle, the lever being positioned nearer the open portion than is the cover; a protruding wall positioned on the floor surface adjacent to the lever, the protruding wall extending in the needle axial direction; and a sensor portion including a light emitting portion and a light receiving portion in confrontation with each other. The lever and the sensor portion protrude from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction.

**[0020]** The ink cartridge according to the third aspect of the present invention is detachably mounted in the ink cartridge mounting portion. The ink cartridge includes a lower surface, a front surface, a protruding wall indentation portion, and a sensor indentation portion. The lower surface is adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device. The front surface has an ink supply hole inserted with the hollow needle. The protruding wall indentation portion accommodates the protruding wall. The sensor indentation portion accommodates the sensor portion. The sensor indentation portion and the protruding wall indentation portion are formed open at the front surface and the lower surface at a position that sandwiches both sides of the ink supply hole as viewed from the front surface side. With this configuration, the ink cartridge can be configured in a more flat shape. The ink cartridge can be slid more stably across the floor surface of the ink cartridge mounting portion and so can be mounted and detached more easily.

**[0021]** When the recording device includes protrusion portions that protrude away from the ceiling surface toward the floor surface, then It is desirable that the protrusion portions regulate height wise position of the ink cartridge when the ink cartridge is inserted in the open portion. With this configuration, the ink cartridge can be inserted into the open portion without mistakenly inserting the ink cartridge upside down.

**[0022]** An ink cartridge according to a fourth aspect of the present invention is for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that

extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in an needle axial direction; a cover selectively covering and uncovering the hollow needle with respect to the open portion; a lever positioned nearer the open portion than is the cover, the lever, in order to move the cover to uncover the needle, protruding into the ink cartridge mounting portion from a position that is on the floor surface and that is shifted from the needle axial direction in a direction that is parallel with the floor surface; and a protruding wall positioned on the floor surface adjacent to the lever. The protruding wall extends in the needle axial direction. The lever protrudes from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction.

**[0023]** The ink cartridge according to the fourth aspect of the present invention is detachably mounted in the ink cartridge mounting portion and includes a lower surface, a front surface, a protruding wall indentation portion, and an operation portion. The lower surface is adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device. The front surface has an ink supply hole connected with the hollow needle. The protruding wall indentation portion is open to the front surface and the lower surface for accommodating the protruding wall. The protruding wall indentation portion is shifted, with respect to a view from the front surface side, from the ink supply hole in a direction parallel with the lower surface. The operation portion is provided at a position that is adjacent to the protruding wall indentation portion and that corresponds to the position of the lever and that is for operating the lever. With this configuration, the ink cartridge can be configured in a more flat shape. The ink cartridge can be slid more stably across the floor surface of the ink cartridge mounting portion and so can be mounted and detached more easily.

**[0024]** It is desirable that the ink cartridge further include an upper surface that confronts the ceiling surface of the recording device when the ink cartridge is mounted in the recording device. The upper surface extends higher toward the ceiling surface at portions that correspond to in between protrusion portions, which are provided on the ceiling surface at horizontal ends of the ink cartridge mounting portion and that protrude toward the floor surface, than at portions that correspond to the protrusion portions. With this configuration, the ink cartridge can be inserted into the open portion without mistakenly inserting the ink cartridge upside down. A desired single ink cartridge can be easily mounted to and removed from in between a plurality of ink cartridges.

**[0025]** It is desirable that the front surface have a protruding shape that is higher at portions that correspond

to in between the protrusion portions and lower at portions that correspond to the protrusion portions. The ink supply hole is formed substantially in the horizontal center of the higher portion of the front surface. With this configuration, the diameter of the ink supply hole can be made larger. Therefore the diameter of the plug mounted in the ink supply hole can be made larger. This makes it easier to pierce the plug with the hollow needle. The ink cartridge can be easily mounted and removed.

**[0026]** An ink cartridge according to a fifth aspect of the present invention is for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; right and left side surfaces extending from the floor surface to the ceiling surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in an needle axial direction; a cover selectively covering and uncovering the hollow needle with respect to the open portion; a protruding wall positioned on the floor surface, the protruding wall extending in the needle axial direction; and a sensor portion including a light emitting portion and a light receiving portion in confrontation with each other. The sensor portion protrudes from the floor surface into the ink cartridge mounting portion at a position shifted from the needle axial direction in a direction parallel with the lower surface. The sensor portion protrudes from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction.

**[0027]** The ink cartridge according to the fifth aspect of the present invention is detachably mounted in the ink cartridge mounting portion and includes a lower surface, a front surface, a sensor indentation portion, and a light blocking member. The lower surface is adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device. The front surface has an ink supply hole connected with the hollow needle. The sensor indentation portion opens to the front surface and the lower surface for accommodating the sensor portion. The sensor indentation portion is shifted, with respect to a view from the front surface side, from the ink supply hole in a direction parallel with the lower surface. The light blocking member moves corresponding to amount of ink remaining in the ink cartridge. The light blocking member is provided in correspondence with the sensor portion so as to protrude into the sensor indentation portion and interpose between the light emitting portion and the light receiving portion when the ink cartridge is mounted in the ink cartridge mounting portion. With this configuration, the ink cartridge can be configured in a more flat shape. The ink cartridge can be slid more stably across the floor sur-

face of the ink cartridge mounting portion and so can be mounted and detached more easily. The amount of remaining ink can be detected.

**[0028]** When the recording device includes a plurality of ink cartridge mounting portions with a distance between left and right side surfaces of one ink cartridge mounting portion that is different from a distance between left to right side surfaces of another ink cartridge mounting portion, it is desirable that the distance between one of the left and right side surfaces of the ink cartridge mounted in the one ink cartridge mounting portion and the sensor indentation portion be different from the distance between the other one of the left and right surfaces of an ink cartridge mounted in the other ink cartridge mounting portion and the sensor indentation portion. With this configuration, when a plurality of different types of ink cartridges are used, for example for printing in different colors of ink, ink cartridges can be prevented from being mounted in the wrong positions because the sensor portion will not correspond to the ink cartridge if an ink cartridge is mounted in the wrong position.

**[0029]** When the recording device includes protrusion portions that protrude away from the ceiling surface toward the floor surface, it is desirable that the ink cartridge have a height determined by a distance between the protrusion portions and the floor surface of the recording device when the ink cartridge is inserted in the open portion. With this configuration, the ink cartridge can be inserted into the open portion without mistakenly inserting the ink cartridge upside down.

**[0030]** It is desirable that a fixing wall be provided in the sensor indentation portion. The fixing wall includes an internal groove that extends parallel with direction of insertion into the open portion so that the fixing portion is inserted between the light emitting portion and the light receiving portion. The groove accommodates the light blocking member in a movable condition. With this configuration, the amount of ink remaining can be reliably detected while at the same time a flat configuration is achieved.

**[0031]** An ink cartridge according to a sixth aspect of the present invention is for use with a recording device that includes an ink cartridge mounting portion; a connection portion that supplies ink to a recording head; and a sensor portion including a light emitting portion and a light receiving portion in confrontation with each other. The sensor portion protrudes into the ink cartridge mounting portion.

**[0032]** The ink cartridge according to the sixth aspect includes an outer shape portion and a light blocking member. The outer shape portion substantially matches the inside of the ink cartridge mounting portion when the ink cartridge is mounted in the ink cartridge mounting portion. The outer shape portion includes a contour that receives the sensor portion. The light blocking member is disposed within the contour of the outer shape portion. The light blocking member moves corresponding to amount of ink remaining in the ink cartridge to either en-

ter between and move out from between the light emitting portion and the light receiving portion. With this configuration, the ink cartridge has a flat configuration without the light blocking member protruding from the ink cartridge. As a result, the ink cartridge is easily mounted in or removed from the recording device.

**[0033]** It is desirable that a sensor indentation portion receives the sensor portion be provided in the contour. With this configuration, the ink cartridge can be simply produced with a flat shape.

**[0034]** It is desirable that the outer shape further include a sensor indentation portion that is open in a direction for connecting the ink supply hole with a connection portion in the ink cartridge mounting portion. The light blocking member extends in the sensor indentation portion in a direction parallel with a direction for connecting the ink supply hole. With this configuration, the ink cartridge can be simply produced with a flat shape.

**[0035]** It is desirable that a fixing wall be provided in the sensor indentation portion. The fixing wall includes an internal groove that extends parallel with direction of insertion into the open portion so that the fixing portion is inserted between the light emitting portion and the light receiving portion. The groove accommodates the light blocking member in a movable condition. With this configuration, the light blocking member is blocked off from outside so there is no fear of ink leaks. Moreover, the amount of remaining ink can be reliably detected.

**[0036]** An ink cartridge according to a seventh aspect of the present invention is for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; a connection portion that supplies ink to a recording head, the connection portion being positioned in confrontation with the open portion and extending in a connection portion axial direction; and protrusion portions provided at horizontal ends of the ink cartridge mounting portion. The protrusion portions protrude away from the ceiling surface toward the floor surface.

**[0037]** The ink cartridge according to the seventh aspect of the present invention is detachably mounted in the ink cartridge mounting portion and includes a lower surface, a front surface, and an upper surface. The lower surface is adapted to abut against the floor surface and slide from the open portion to a connection portion of the recording device. The front surface has an ink supply hole connectable with the connection portion. The upper surface extends higher toward the ceiling surface at portions that correspond to in between the protrusion portions of the recording device than at portions that correspond to the protrusion portions. With this configuration, the ink cartridge can be configured in a more flat shape. The ink cartridge can be slid more stably across the floor surface of the ink cartridge mounting

portion and so can be mounted and detached more easily. The ink cartridge can be inserted into the open portion without mistakenly inserting the ink cartridge upside down.

**[0038]** When the recording device further includes a spring member that is provided at a position nearer the connection portion side of the ceiling surface than the protrusion portions and that protrudes downward, the It is desirable that an upper surface be provided that corresponds to the protrusion portions and that extends in a direction for inserting the ink cartridge into the ink cartridge mounting portion so as to slidably abut the spring member. With this configuration, the ink cartridge can be slid more stably across the floor surface of the ink cartridge mounting portion and so can be mounted and detached more easily.

**[0039]** It is desirable that the ink cartridge further include an ink-holding portion and a flexible film. The ink-holding portion is disposed in an inner portion that corresponds to the portions of the upper surface that extends higher toward the ceiling surface. The flexible film covers the ink-holding portion. With this configuration, a large amount of ink can be stored even if the ink cartridge has a flat shape.

**[0040]** It is desirable that the front surface have a protruding shape that is higher at portions that correspond to in between protrusion portions and lower at portions that correspond to the protrusion portions. The ink supply hole is formed substantially in the horizontal center of the higher portion of the front surface. Because the ink supply hole has a large diameter, the ink supply hole can be easily connected to the recording device.

**[0041]** An ink cartridge according to an eighth aspect of the present invention is for use with a recording device that includes a hollow needle and an air supply member. The air supply member is adjacent to the hollow needle and has an air supply hole connected to an air pressure source

**[0042]** The ink cartridge according to the eighth aspect of the present invention includes a case, a flexible film, a resilient plug member, an opening portion, a portion that abuts the air supply member. The case is provided therein with an ink chamber. The flexible film forms a portion of the ink chamber. The resilient plug member closes off the ink chamber. The hollow needle pierces the resilient plug member and supplies ink from the ink chamber to the recording device. The opening portion is formed in the case at a position adjacent to the plug member. The opening portion is open to the ink chamber. The portion that abuts the air supply member does so in a manner that the air supply hole covers the opening portion when the ink cartridge is mounted in the recording device. With this configuration, the ink cartridge can be configured in a flat shape. Also the recording head of the recording device can be returned to a good operating condition because a positive pressure can be applied to the ink in the ink cartridge when a purge operation is performed by the recording device.

**[0043]** When the recording device further includes a resilient ring-shaped seal member provided at a tip of the air supply hole that abuts the case of the ink cartridge, then it is desirable that a portion of the case that abuts against the seal member be substantially flat. With this configuration, the air supply hole and the opening portion in the case can be reliably brought into fluid communication.

**[0044]** When the recording device further includes a resilient ring-shaped seal member provided at a tip of the air-supply hole that abuts the case of the ink cartridge, a spring means provided on the air supply hole that urges the seal member toward the case, and a lock means, then it is desirable that the case of the ink cartridge include an indentation portion that engages with the lock means against urging force of the spring means. With this configuration, the indentation portion engages with the lock means of the recording device when the ink cartridge is mounted into the recording device and the front surface of the ink cartridge abuts the air supply hole against the operation of the spring means. As a result, the ink cartridge is maintained at a predetermined position regardless of the urging force of the spring means and the air supply hole and the hollow needle can be maintained in a connected condition.

**[0045]** When the recording device further includes lock means that locks the ink cartridge at a mounted position in the ink cartridge mounting portion, then it is desirable that directions for connecting and disconnecting the ink cartridge to and from the hollow needle and the air supply hole are related so that the air supply hole and the opening portion are in fluid communication after the hollow needle and the resilient plug member connect and the air supply hole and the opening portion separate before the hollow needle and the resilient plug member separate. With this configuration the air supply hole and the opening portion are connected after the hollow needle is inserted into the resilient plug member when the ink cartridge is mounted into the recording device. Also, the hollow needle separates from the resilient plug member after the air supply hole and the opening portion separate when the ink cartridge is removed. Even if the ink cartridge is removed while the air pressure source is operating, ink can be prevented from leaking when the hollow needle is separated from the resilient plug member.

**[0046]** It is desirable that the ink cartridge further include a lower surface, a front surface, a protruding wall indentation portion, and an operation portion in the case that the recording device further includes an open portion with an opening that opens in a horizontal direction to outside, a floor surface that extends in the horizontal direction, a ceiling surface that extends in the horizontal direction, an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface, a cover selectively covering and uncovering the hollow needle with respect to the open portion, a lever positioned nearer the open portion than is the cover,

the lever, in order to move the cover to uncover the needle, protruding into the ink cartridge mounting portion from a position that is on the floor surface and that is shifted from the needle axial direction in a direction that is parallel with the floor surface, and a protruding wall positioned on the floor surface adjacent to the lever, the protruding wall extending in the needle axial direction, the lever protruding from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction, the hollow needle and the air supply hole being disposed at positions in confrontation with the opening portion.

**[0047]** In this case, the lower surface is adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device. The front surface has the opening portion and the ink supply hole. The protruding wall indentation portion opens to the front surface and the lower surface for accommodating the protruding wall. The protruding wall indentation portion is shifted, with respect to a view from the front surface side, from the ink supply hole in a direction parallel with the lower surface. The opening portion is positioned between the ink supply hole and the protruding wall indentation portion. The operation portion is provided at a position that is adjacent to the protruding wall indentation portion and that corresponds to the position of the lever and that is for operating the lever. With this configuration, the ink cartridge can be configured in a more flat shape while the ink cartridge is provided with the operation portion, the indentation portion, the opening portion, and the resilient plug member. Further, the ink cartridge can be slid more stably across the floor surface of the ink cartridge mounting portion and so can be mounted and detached more easily.

**[0048]** An ink cartridge according to a ninth aspect of the present invention is for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; a plurality of ink cartridge mounting portions aligned mutually next to each other on substantially the same planar surface of the floor surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion.

**[0049]** The ink cartridge according to the ninth aspect of the present invention is detachably mounted in the ink cartridge mounting portion and includes a lower surface, a front surface, and a rear end portion. The lower surface is adapted to slide following the floor surface from the open portion side in a direction for connecting the ink supply hole to the connection portion. The front surface has an ink supply hole connecting with the hollow needle. The rear end portion is on a side opposite from the front surface. The rear end portion is exposed from the open portion when the ink cartridge is in a mounted condition. The rear end portion has a width in

a direction in which the plurality of cartridge mounting portions are aligned that is narrower than width of the front surface. Because the rear end portion of the ink cartridge has a narrow width, a space will be opened between the rear end portions of ink cartridges when a plurality of ink cartridges are aligned. The rear end portion of a single desired ink cartridge can be easily grasped and pulled out. Also, when mounting the ink cartridge into the recording device, the user grasps the rear end portion, inserts the ink cartridge into the mounting portion, and slides the ink cartridge over the floor surface to align the ink cartridge between the other ink cartridges.

**[0050]** When the floor surface of the recording device extends further than the ceiling surface in a direction opposite from the hollow needle side, then it is desirable that the rear end portion be located on a portion of the floor surface that extends beyond the ceiling surface. With this configuration, when the ink cartridge is inserted into the open portion of the ink cartridge mounting portion, the ink cartridge abuts against the portion of the floor surface that extends beyond the open portion and slides over the floor surface and so can be easily inserted into the open portion.

**[0051]** An ink cartridge according to a tenth aspect of the present invention is for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; a connection portion that supplies ink to a recording head, the connection portion being positioned in confrontation with the open portion. The floor surface extends further than the open portion in a direction opposite from the connection portion side.

**[0052]** The ink cartridge according to the tenth aspect of the present invention is detachably mounted in the ink cartridge mounting portion and includes a lower surface, a front surface, and a rear end portion. The lower surface is adapted to slide following the floor surface from the open portion side in a direction for connecting the ink supply hole to the connection portion. The front surface has an ink supply hole connecting with the hollow needle. The rear end portion is on a side opposite from the front surface. The rear end portion is located on a portion of the floor surface that protrudes from the open portion. The rear end portion is formed on an upper surface thereof with an upwardly protruding rib for catching by a user's finger. With this configuration, when mounting the ink cartridge, the user can remove the ink cartridge by pressing the rib and sliding its lower surface over the floor surface.

**[0053]** The above and other objects, features and advantages of the invention will become more apparent from reading the following description of the embodiment taken in connection with the accompanying drawings in which:

Fig. 1 is a perspective view showing overall configuration of a multifunction device mounted with an ink cartridge according to an embodiment of the present invention;

Fig. 2 is a perspective view showing the multifunction device of Fig. 1 with an upper cover of a flat bed type retrieval device opened up;

Fig. 3 is a cross-sectional schematic view showing the multifunction device of Fig. 1;

Fig. 4 is a perspective view showing the multifunction device of Fig. 1 with the flat bed type retrieval device removed;

Fig. 5 is a perspective view showing a lower surface of a cover body of the multifunction device;

Fig. 6 is a perspective view showing the multifunction device with the cover body opened up;

Fig. 7 is a perspective view showing the multifunction device with the flat bed type retrieval unit and also the cover body removed;

Fig. 8 is a perspective view schematically showing configuration of a printer engine of the multifunction device;

Fig. 9 is a plan view showing configuration of an ink cartridge accommodation portion of the multifunction device;

Fig. 10 is a perspective view showing configuration of one ink cartridge mounting portion in the ink cartridge accommodation portion;

Fig. 11 is a perspective view showing configuration of a mechanism that is provided below the floor surface of the ink cartridge mounting portion and that is for protecting needles, for locking the condition where the needles are protected, and for preventing ink cartridges from falling out of the ink cartridge mounting portion;

Fig. 12 is a perspective view showing an ink cartridge according to the present embodiment from the rear end;

Fig. 13 is a perspective view of the ink cartridge according to the present embodiment from the front end;

Fig. 14 is a perspective view showing the ink cartridge with its lid separated from its main case;

Fig. 15 is a perspective view showing the main case before a flexible film is attached thereto;

Fig. 16 is an exploded perspective view showing a sensing mechanism provided in an indentation portion of the main case;

Fig. 17 is an operational diagram indicating operation of the sensing mechanism of Fig. 16;

Fig. 18 is an underside view of the main case;

Fig. 19 is a plan view showing the ink cartridge of the present embodiment;

Fig. 20 is a view taken from arrow A of Fig. 19;

Fig. 21 is a cross-sectional view of the ink cartridge taken along line B-B of Fig. 19;

Fig. 22 is a cross-sectional view of the ink cartridge taken along line C-C of Fig. 19;



Fig. 23 is a cross-sectional view of the ink cartridge taken along line D-D of Fig. 19;

Fig. 24 is a cross-sectional view of the ink cartridge taken along line E-E of Fig. 19;

Fig. 25 is a cross-sectional view of the ink cartridge taken along line F-F of Fig. 19;

Fig. 26 is a cross-sectional view of the ink cartridge taken along line G-G of Fig. 19;

Fig. 27 is a cross-sectional view of the ink cartridge taken along line H-H of Fig. 19;

Fig. 28 is a cross-sectional view of the ink cartridge taken along line I-I of Fig. 19;

Fig. 29 is a view showing the relationship between bulging portions formed on partition walls of the ink cartridge mounting portion, height of the ink cartridge, and a curved convex wall formed on the ceiling surface of the ink cartridge mounting portion when the ink cartridge is inserted into a mounting portion opening;

Fig. 30 is a plan view showing a condition wherein a pull-out lock protrusion portion is retracted by an ink cartridge front surface wall when the ink cartridge is inserted into a mounting portion opening of an ink cartridge mounting portion;

Fig. 31 is a cross-sectional view of the condition shown in Fig. 30;

Fig. 32 is a cross-sectional view showing condition wherein a needle protection lock member releases locked condition of a needle protection plate by a lock release portion hitting a needle protection lock release lever when a guide groove of the ink cartridge engages with a guide protrusion wall and the ink cartridge is slid;

Fig. 33 is a cross-sectional view showing condition wherein an ink introduction hollow needle is inserted into an ink supply hole after the front surface of the ink cartridge presses the needle protection plate and the needle plate retracts after the lock of the needle protection plate is released;

Fig. 34 is a cross-sectional view showing condition wherein the front surface of the ink cartridge abuts a rubber cap of a positive pressure application member in association with engagement of a pull-out holding lock protrusion portion into a pull-out holding lock indentation portion after the ink introduction hollow needle is inserted into an ink supply hole;

Fig. 35 is a plan view of the condition shown in Fig. 34;

Fig. 36 is a cross-sectional view showing the ink cartridge in a vacuum packaged condition;

Fig. 37 (a) is a side view showing processes of a method for attaching a flexible film according to the present embodiment to an opening peripheral portion;

Fig. 37 (b) is a side view showing processes of a method for producing the bulging shape in the flexible film;

Fig. 38 is a view showing a modification of the process for producing the bulging shape in flexible film; Fig. 39 (a) is a cross-sectional view showing processes of fitting a rubber plug with a back-flow prevention valve completely into an ink supply hole and a rubber plug for ink injection partially into an ink injection hole, and removing air from an ink accommodation portion and injecting ink;

Fig. 39 (b) shows a plug peak portion of the ink rubber plug for ink injection fitted to the edge of the ink injection hole;

Fig. 40 is a cross-sectional view showing positional relationship of an edge (ink accommodation peripheral portion) of a spherical surface shape at the outer side of a curved portion of the lid, the inner edge of the opening peripheral portion, and the flexible film;

Fig. 41 is a perspective view showing an ink cartridge according to a first modification of the embodiment, wherein a guide groove and a sensor accommodation groove are open to the side walls;

Fig. 42 is a plan view showing a recording device modified for use with the ink cartridge of Fig. 41, wherein the position of the needle protection lock release lever in the ink cartridge mounting portion is changed in correspondence with the modified ink cartridge;

Fig. 43 (a) is a plan view showing an ink cartridge according to a second modification of the embodiment;

Fig. 43 (b) is a perspective view showing the ink cartridge of Fig. 43 (a);

Fig. 44 (a) is a plan view showing an ink cartridge according to a third modification of the embodiment;

Fig. 44 (b) is a perspective view showing the ink cartridge of 44 Fig. (a);

Fig. 45 (a) is a plan view showing an ink cartridge according to a fourth modification of the embodiment;

Fig. 45 (b) is a perspective view showing the ink cartridge of Fig. 45 (a);

Fig. 46 (a) is a plan view showing an ink cartridge according to a fifth modification of the embodiment;

Fig. 46 (b) is a perspective view showing the ink cartridge of Fig. 46 (a);

Fig. 47 (a) is a plan view showing an ink cartridge according to a sixth modification of the embodiment;

Fig. 47 (b) is a side view showing the ink cartridge of Fig. 47 (a);

Fig. 48 (a) is a plan view showing an ink cartridge according to a seventh modification of the embodiment;

Fig. 48 (b) is a side view showing the ink cartridge of Fig. 48 (a) ;

Fig. 49 (a) is a plan view showing an ink cartridge according to an eighth modification of the embodiment;

Fig. 49 (b) is a side view showing the ink cartridge of Fig. 49 (a) ;

Fig. 50 (a) is a plan view showing an ink cartridge according to a ninth modification of the embodiment;

Fig. 50 (b) is a side view showing the ink cartridge of Fig. 50 (a);

Fig. 51 (a) is a plan view showing an ink cartridge according to a tenth modification of the embodiment;

Fig. 51 (b) is a side view showing the ink cartridge of Fig. 51 (a) ;

Fig. 52 (a) is a plan view showing an ink cartridge according to an eleventh modification of the embodiment;

Fig. 52 (b) is a side view showing the ink cartridge of Fig. 52 (a);

Fig. 53 (a) is a plan view showing an ink cartridge according to a twelfth modification of the embodiment;

Fig. 53 (b) is a side view showing the ink cartridge of Fig. 53 (a).

**[0054]** Next, an ink cartridge 200 according to an embodiment of the present invention and a multifunction device 1 that uses the ink cartridge 200 will be described while referring to Figs. 1 to 40.

**[0055]** First, the multifunction device 1 that uses the ink cartridge 200 will be described with reference to Figs. 1 to 11. Fig. 1 shows the multifunction device 1 according to the present embodiment. The multifunction device 1 includes a scanner function, a copy function, and a facsimile function. The multifunction device 1 has a slim and compact configuration including a retrieval unit 10 and an ink jet recording unit 20. The ink jet recording unit 20 is disposed on the retrieval unit 10. A control panel 12 is provided on the retrieval unit 10. The ink jet recording unit 20 is provided with a sheet-supply tray 22. The multifunction device 1 is provided with a telephone 24 and an antennae 26. The telephone 24 is capable of wireless transmission with a cordless handset (not shown) using the antennae 26. The telephone 24 is capable of connecting with a public telephone circuit and serving as a transfer point for the cordless handset (not shown) while the cordless handset is used for a telephone call.

**[0056]** It should be noted that a power source, a main substrate, an NCU substrate, and two media board devices 28 shown in Fig. 7 are provided in the ink jet recording unit 20 in addition to recording mechanisms for performing recording operations. The main substrate is for controlling operations of the multifunction device 1. The NCU substrate is for controlling connection with the public telephone circuit for the facsimile function and the telephone function. Two media slots 29 are provided at the front surface of the ink jet recording unit 20. By inserting an external memory medium into either of the media slots 29, the external medium can be freely de-

tachably mounted in the corresponding one of the media board devices 28. The media board devices 28 retrieve data, such as data taken by a digital camera, from the external memory medium, whereupon the data is used for printing and the like.

**[0057]** As shown in Fig. 2, the retrieval unit 10 is a flat head type retrieval unit and includes a retrieval unit case 14. The retrieval unit case 14 includes a document glass 15 on which a document to be scanned is placed. A contact image sensor 16 is disposed below the document glass 15. Configuration is provided for generating scanning movements of the contact image sensor 16. An upper cover 17 for covering the upper surface of the document glass 15 is provided openable and closable with respect to the retrieval unit case 14.

**[0058]** The control panel 12 is provided on the upper surface to the front of the retrieval unit case 14. An operator inputs commands for operations, such as a copy operation, a facsimile operation, or a scanner operation, of the multifunction device 1 through the control panel 12.

**[0059]** It should be noted that an attachment means (not shown) is provided for enabling the flat head type retrieval unit 10 to be disconnected from the ink jet recording unit 20.

**[0060]** As shown in Fig. 3, the ink jet recording unit 20, which is below the retrieval unit 10, includes a housing 30. The sheet-supply tray 22 protrudes from inside the housing 30 to above the rear portion of the housing 30. A sheet-supply roller 23 is provided in the sheet-supply tray 22 so that one sheet of time can be supplied. A printer engine 60 is provided as a recording portion at a position where sheets are received from the sheet-supply tray 22. A sheet-discharge portion D is provided to the front of the printer engine 60. Sheets recorded on by the printer engine 60 are discharged from the sheet-discharge portion D. It should be noted that a sheet-discharge tray 34 is freely detachably mounted on the sheet-discharge portion D. The sheet-discharge tray 34 serves as a portion of a sheet transport pathway. An ink cartridge holding portion P into which the ink cartridges 200 (Fig. 12) are mounted is disposed between the sheet-discharge portion D and the base of the housing 30. In this way, the ink cartridge holding portion P is disposed at a position lower than the printer engine 60.

**[0061]** As shown in Fig. 4, the housing 30 is covered from above by a cover 40. The cover 40 has an engine cover portion 42 and a cartridge holding cover portion 44. The engine cover portion 42 covers the printer engine 60 from above. The cartridge holding cover portion 44 is provided below the sheet-discharge portion D and covers the ink cartridge holding portion P from above. The front surface of the engine cover portion 42 is opened to form a sheet-discharge port 46. The cartridge holding cover portion 44 is positioned below the pathway along which sheets recorded by the printer engine 60 are transported, that is, below the sheet-discharge tray 34.

**[0062]** As shown in Fig. 3, the cartridge holding cover portion 44 functions as a ceiling surface of the ink cartridge holding portion P. As will be described later, the ink cartridge holding portion P is formed between the cartridge holding cover portion 44 and a cartridge holding portion base wall 32 so that the ink cartridges 200 can be inserted to the rear side of the ink cartridge holding portion P from a front surface opening portion O. A front surface cover 50 is provided to selectively cover (Fig. 4) and open (Fig. 6) the front surface opening portion O. The front surface cover 50 includes an upper surface wall 52 and a front surface wall 54. When the front surface cover 50 is closed as shown in Fig. 4, the upper surface wall 52 is aligned on the same imaginary plane as the cartridge holding cover portion 44 and the front surface wall 54 extends vertically downward from the upper surface wall 52.

**[0063]** As shown in Fig. 5, four curve-shaped protruding ribs 47 are formed on the lower surface of the cartridge holding cover portion 44. The curved shape of the curve-shaped protruding ribs 47 is formed to follow the shape of the upper surface of the four ink cartridges 200 mounted in the ink cartridge holding portion P. Also, a pair of notches 48 are formed in left and right ends of the cartridge holding cover portion 44.

**[0064]** As shown in Fig. 6, a pair of arms 56 provided to the front surface cover 50 are received by the notches 48 when the front surface cover 50 is opened up. As will be described later, five partition walls 110 are aligned on the base wall 32 in the ink cartridge holding portion P. A pivot shaft 57 protrudes from the two end position partition walls 110. The pair of arms 56 of the front surface cover 50 are pivotably attached to the pivot shaft 57 so that the user can freely open and close the front surface cover 50.

**[0065]** Seven vertical ribs 58 are formed to the rear side of the front surface cover 50 so as to extend vertically when the cover 50 is closed. The vertical ribs 58 extend from the front surface wall 54 of the front surface cover 50 to a portion of the upper surface wall 52. Four of the seven vertical ribs 58 are formed at positions that correspond to the widthwise center of the mounted ink cartridges 200. Accordingly, when the front surface cover 50 is closed from the open condition shown in Fig. 6, the corresponding vertical ribs 58 automatically press any partially inserted ink cartridges 200 deep into the ink cartridge holding portion recording sheet P, so that the ink cartridges 200 are accurately inserted even when one of the ink cartridges 200 is incompletely inserted into the ink cartridge holding portion P. Although not shown in the drawings, a plurality of lateral ribs is also formed at the rear surface of the front surface cover 50. The lateral ribs extend in the horizontal direction in intersection with the seven vertical ribs 58 and are for reinforcing the seven vertical ribs 58.

**[0066]** The cartridge holding portion base wall 32 extends further forward than the cartridge holding cover portion 44 in order to guide the ink cartridges 200 into

the front surface opening portion O. The portion of the cartridge holding portion base wall 32 that extends further forward than the cartridge holding cover portion 44 is formed with indentations 102 at positions that correspond to the partition walls 110. The indentations 102 have either a quarter or half circle shape when viewed in plan. The indentations 102 have a narrower width than grasping portions 202 of the ink cartridges 200 housed in the ink cartridge holding portion P so that the user can more easily grasp the ink cartridges 200 housed in the ink cartridge holding portion P using his or her fingers.

**[0067]** Fig. 7 shows the multifunction device 1 with the cover 40 and the front surface cover 50 removed from the ink jet recording unit 20. As can be seen in Fig. 7, the housing 30 has an open upper side and the front surface opening portion O of the ink cartridge holding portion P is the front side of the housing 30. The two media board devices 28 are disposed at positions that correspond to the media slots 29. Also, a positive pressure pump 36 to be described later is disposed behind the media board devices 28.

**[0068]** A black (K) ink cartridge mounting portion Sk, a cyan (C) ink cartridge mounting portion Sc, a yellow (Y) ink cartridge mounting portion Sy, and a magenta (M) ink cartridge mounting portion Sm are aligned in the left-right direction in the ink cartridge holding portion P. The black (K) ink cartridge mounting portion Sk is for mounting a black (K) ink cartridge 200k, the cyan (C) ink cartridge mounting portion Sc is for mounting a cyan (C) ink cartridge 200c, the yellow (Y) ink cartridge mounting portion Sy is for mounting a yellow (Y) ink cartridge 200y, and the magenta (M) ink cartridge mounting portion Sm is for mounting a magenta (M) ink cartridge 200m.

**[0069]** The black (K) ink cartridge 200k, the cyan (C) ink cartridge 200c, the yellow (Y) ink cartridge 200y, and the magenta (M) ink cartridge 200m will be referred to collectively as the ink cartridges 200 hereinafter. Further, the black (K) ink cartridge mounting portion Sk, the cyan (C) ink cartridge mounting portion Sc, the yellow (Y) ink cartridge mounting portion Sy, and the magenta (M) ink cartridge mounting portion Sm will be referred to collectively as the ink cartridge mounting portions S hereinafter.

**[0070]** The ink cartridge holding portion P is configured from the ink cartridge mounting portions S, which are aligned in the left-right direction on the same imaginary plane (on the base wall 32) below the ceiling plate, which configures the cartridge holding cover portion 44 of the cover 40, and below the sheet-discharge tray 34, which serves as a portion of a sheet transport pathway. Accordingly, the ink cartridge holding portion P overall has a flat and substantially parallelepiped shape. Accordingly, the overall configuration of the multifunction device 1 can be formed thin and compact.

**[0071]** Ink supply mechanisms 80, a positive pressure application mechanism 90, and cartridge mounting mechanisms 100 are provided in the ink cartridge

mounting portions S. Each cartridge mounting mechanism 100 is for mounting the corresponding ink cartridges 200 as will be described later. The positive pressure application mechanism 90 is for applying a positive pressure from the positive pressure pump 36 to ink in the mounted ink cartridges 200. The ink supply mechanisms 80 are for supplying ink in the mounted ink cartridges 200 to the printer engine 60. Ink-supply tubes T for supplying ink into the printer engine 60 extend from the ink supply mechanisms 80. That is, a black (K) ink-supply tube Tk extends from the black (K) ink cartridge mounting portion Sk, a cyan (C) ink-supply tube Tc extends from the cyan (C) ink cartridge mounting portion Sc, a yellow (Y) ink-supply tube Ty extends from the yellow (Y) ink cartridge mounting portion Sy, and a magenta (M) ink-supply tube Tm extends from the magenta (M) ink cartridge mounting portion Sm. The black (K) ink-supply tube Tk, the cyan (C) ink-supply tube Tc, the yellow (Y) ink-supply tube Ty, and the magenta (M) ink-supply tube Tm will be referred to collectively as the ink-supply tubes T hereinafter.

**[0072]** Although not shown in the drawings, a waste ink absorbing material is disposed on the housing 30 behind the ink cartridge holding portion P and below the printer engine 60. The printer engine 60 includes an engine housing 62. Although not shown in the drawings, a sheet transport slot is formed in the rear surface of the engine housing 62. The sheet transport slot is for receiving sheets supplied from the sheet-supply tray 22. An engine-side sheet-discharge slot 64 is formed in the front surface of the engine housing 62. The engine-side sheet-discharge slot 64 is for discharging sheets that were recorded on by the printer engine 60 toward the sheet-discharge portion D. The sheet-transport pathway is further defined in the engine housing 62 from the sheet transport slot to the engine-side sheet-discharge slot 64. Printed sheets are discharged onto the sheet-discharge portion D because the engine-side sheet-discharge slot 64 confronts the sheet-discharge port 46 (Fig. 4) while the cover 40 covers the housing 30. A KC tube opening 66 and a YM tube opening 68 are formed in the front surface of the engine housing 62. The KC tube opening 66 is for introducing the black (K) ink-supply tube Tk and the cyan (C) ink-supply tube Tc into the printer engine 60. The YM tube opening 68 is for introducing the yellow (Y) ink-supply tube Ty and the magenta (M) ink-supply tube Tm into the printer engine 60. Although not shown in the drawings, a cable opening for introducing cables connected to the main circuit board into the printer engine 60 is also formed in the front surface of the engine housing 62.

**[0073]** As shown in Fig. 8, a sheet-transport mechanism 76 is provided to the inside to the engine housing 62. The sheet-transport mechanism 76 is made from plural pairs of rollers that transport sheets from the sheet-supply roller 23 along the sheet transport pathway to the engine-side sheet-discharge slot 64. A carriage scan shaft 72 extends above and in a direction that in-

tersects with the sheet transport direction. A carriage 74 is provided on the carriage scan shaft 72 so as to be capable of reciprocal movement following the carriage scan shaft 72. A piezoelectric ink jet head 70 is mounted to the under surface of the carriage 74. Although not shown in the drawings, a group of nozzles is formed for each of the above-described plurality of ink colors. Each nozzle faces downward so it ejects ink downward onto the recording sheet. The four ink-supply tubes T (Tk, Tc, Ty, Tm) and cables are connected to the corresponding nozzle groups to supply the four colors of ink (black, cyan, yellow, and magenta) and drive signals to the piezoelectric ink jet head 70. The carriage 74 scans following the carriage scan shaft 72 and the piezoelectric ink jet head 70 and records in bands with a width that corresponds to the width of the nozzle groups. Each time one scan is completed, the sheet-transport mechanism 76 feeds the sheet by a distance that corresponds to the width of the recording band. A purge unit 78 is provided at a position that is above the carriage scan shaft 72 and that is shifted from the sheet transport pathway. Although not shown in the drawings, the purge unit 78 includes a well-known cap and pump. In certain situations, such as when the nozzles of the piezoelectric ink jet head 70 are clogged, the piezoelectric ink jet head 70 is transported to a position in confrontation with the purge unit 78 and a purge operation is performed wherein the cap covers the nozzles and the pump sucks ink from the nozzles through the cap.

**[0074]** Only the piezoelectric ink jet head 70 is mounted on the carriage 74. Ink from the ink cartridges 200 housed in the ink cartridge holding portion P is supplied to the piezoelectric ink jet head 70 through the tubes T. Also, a pressure head difference is developed between the piezoelectric ink jet head 70 and the ink cartridges 200 because the piezoelectric ink jet head 70 is disposed vertically above the ink cartridge holding portion P. Therefore, a negative pressure, that is, a back pressure operates on the ink in the nozzles of the piezoelectric ink jet head 70 that prevents ink (not shown) from dripping out from the nozzle in the piezoelectric ink jet head 70.

**[0075]** As shown in Fig. 9, the ink supply mechanisms 80, the positive pressure application mechanism 90, and the cartridge mounting mechanisms 100 have substantially the same configuration for each of the four ink cartridge mounting portions S.

**[0076]** As shown in Figs. 9 and 10, each of the ink supply mechanisms 80 is configured from a buffer tank 84 connected to an ink introducing hollow needle 82 and the ink-supply tube T. The ink introducing hollow needle 82 extends toward the front surface opening portion O. The hollow needle 82 is hollow and formed on the sides of its tip end with a pair of holes connected to the inside in the manner of a well-known hollow needle. When an ink cartridge 200 is mounted in the corresponding ink cartridge mounting portion S, the ink introducing hollow needle 82 is inserted into the ink cartridge 200 so that

ink is supplied to the buffer tank 84. The buffer tank 84 temporarily holds ink supplied by the ink introducing hollow needle 82 and filters foreign objects out from the ink. Ink that has been filtered in this manner is then supplied to the piezoelectric ink jet head 70 through the corresponding ink-supply tube T.

**[0077]** The positive pressure application mechanism 90 is for applying a positive air pressure to the ink in the ink cartridges 200. The positive pressure application mechanism 90 is configured from positive pressure application members 91 that are connected to the positive pressure pump 36. It should be noted that the total of four positive pressure application members 91 provided to the four ink cartridge mounting portions S are directly connected to the positive pressure pump 36 through positive pressure application tubes 92. There is a relief valve (not shown) between the positive pressure pump 36 and the positive pressure application tubes 92. Drive of the positive pressure pump 36 forces air flow with substantially equal pressure from the four positive pressure application members 91 toward the ink cartridges 200 through the positive pressure application tubes 92.

**[0078]** As shown in Fig. 10, each of the positive pressure application members 91 is made from a ring-shaped resilient seal member 93 and a support member 96. The support member 96 supports the ring-shaped resilient seal member 93 while a spring 94 urges the ring-shaped resilient seal member 93 toward the front surface opening portion O. The ring-shaped resilient seal member 93 includes a centrally located positive pressure hole 98 in fluid connection with the positive pressure application tubes 92 from the positive pressure pump 36. The positive pressure hole 98 faces the front surface opening portion O.

**[0079]** The cartridge mounting mechanisms 100 include the partition walls 110, the indentations 102 on the cartridge holding portion base wall 32, guide protrusion walls 120, needle protection plates 130, lock members 180 (Fig. 11) of the needle protection plates 130, lock releasing operation ribs 150, pull-out-lock protrusions 160, and residual ink detecting photo sensors 170.

**[0080]** The partition walls 110 are formed at either side of each ink cartridge mounting portion S so as to protrude upward from the cartridge holding portion base wall 32 and so as to extend from the front surface opening portion O into the ink cartridge holding portion P. The partition walls 110 define the width of the ink cartridge mounting portions S. It should be noted that the partition walls 110 positioned in between adjacent ink cartridge mounting portions S also serve to partition the adjacent ink cartridge mounting portions S.

**[0081]** The width of each of the ink cartridge mounting portions S is the size suitable for the width of the corresponding ink cartridge 200 to enable the corresponding ink cartridge 200 to be mounted therein. As will be described later, the widths of the cyan (C) ink cartridge 200c, the yellow (Y) ink cartridge 200y, and the magenta (M) ink cartridge 200m are equivalent. The width of the

black (K) ink cartridge 200k, the black ink of which is more frequently used during printing, is larger than the widths of the cyan (C) ink cartridge 200c, the yellow (Y) ink cartridge 200y, and the magenta (M) ink cartridge 200m in order to provide the black (K) ink cartridge 200k with a larger internal capacity. For this reason, the widths of cyan (C) ink cartridge mounting portion Sc, the yellow (Y) ink cartridge mounting portion Sy, and the magenta (M) ink cartridge mounting portion Sm are equivalent and the width of the black (K) ink cartridge mounting portion Sk is larger than the width of the other ink cartridge mounting portions.

**[0082]** The cartridge holding portion base wall 32 of the ink cartridge mounting portions S extends away from the hollow needle 82 farther forward than the front surface opening portion O. Because the ceiling surface, that is, the cartridge holding cover portion 44, has a length to the position of the front surface opening portion O, the portion of the cartridge holding portion base wall 32 that extends farther forward than the cartridge holding portion base wall 32 is opened from above while the front surface cover 50 is in an open condition and serves to guide the ink cartridges 200 toward the front surface opening portion O while the ink cartridges 200 are being mounted.

**[0083]** All of the cartridge mounting mechanisms 100 have substantially the same configuration, so configuration of a representative cartridge mounting mechanism 100 will be described with reference to Fig. 10 in order to facilitate explanation. The needle protection plate 130, the residual ink detecting photo sensor 170, the lock releasing operation rib 150, and the pull-out-lock protrusion 160 are positioned in this order from the side of the ink introducing hollow needle 82 to the front of the ink introducing hollow needle 82 with respect to the lengthwise extending axis of the ink introducing hollow needle 82. The guide protrusion wall 120, the lock releasing operation rib 150, and the residual ink detecting photo sensor 170 sandwich the lengthwise extending axis of the ink introducing hollow needle 82, wherein the guide protrusion wall 120 and the lock releasing operation rib 150 are on one widthwise side and the residual ink detecting photo sensor 170 is on the other widthwise side. The guide protrusion wall 120 extends in the front-rear direction. The lock releasing operation rib 150 is positioned between the front end and the rear end of the guide protrusion wall 120 in the front-rear direction. The needle protection plate 130 is between the front end and the rear end of the guide protrusion wall 120 in the front-rear direction and is positioned further to the rear than the lock releasing operation rib 150. The residual ink detecting photo sensor 170 is also between the front end and the deep end of the guide protrusion walls 120 in the front-rear direction and is positioned deeper in than the lock releasing operation rib 150.

**[0084]** Referring to Fig. 9, the guide protrusion wall 120 and nearest partition wall 110 are separated by same distance La in the left-right direction in all of the

cartridge mounting portions Sc, Sy, Sm, and Sk. Further, the guide protrusion wall 120 and the residual ink detecting photo sensor 170 are separated by the same distance Lb1 in the cyan (C) ink cartridge mounting portion Sc, the yellow (Y) ink cartridge mounting portion Sy, and the magenta (M) ink cartridge in the left-right direction. However, the guide protrusion wall 120 and the residual ink detecting photo sensor 170 are separated by a larger distance Lb2 in the black (K) ink cartridge mounting portion Sk than the guide-sensor intervening distance Lb1 for the other ink cartridge mounting portions.

**[0085]** Returning to Fig. 6, the partition walls 110 extend upward from the cartridge holding portion base wall 32 to the under surface of the cover 40. As shown more clearly in Fig. 10, three enlarged portions 112 are formed at the upper portion of each partition wall 110. As can be seen in Fig. 112, the enlarged portions 112 protrude away from the cartridge holding cover portion 44 toward the cartridge holding portion base wall 32. The enlarged portions 112 regulate vertical tilt and position of the ink cartridge after the ink cartridge 200 is inserted. The enlarged portion 112 at the front surface opening portion O side end of each partition wall 110 is formed at the lower side with a taper shape for facilitating insertion of the ink cartridge. The enlarged portion 112 formed at the front-rear center of each partition wall 110 includes a spring 114 for urging the ink cartridge 200 downward and regulating vertical movement of the inserted ink cartridge 200.

**[0086]** Again using the representative example of Fig. 10, the guide protrusion wall 120 protrudes upward from the cartridge holding portion base wall 32 at a position adjacent to the lock releasing operation rib 150. The distance La between the guide protrusion walls 120 and the adjacent partition walls 110 is sufficiently smaller than the thickness of the average user's finger to prevent the user from contacting the lock releasing operation rib 150 and releasing the locked condition of the needle protection plates 130. Also, the guide protrusion wall 120 serves to guide the ink cartridge 200 inserted from the front surface opening portion O side to the ink cartridge mounting portions S in the front-rear direction while positioning the ink cartridge 200 in the left-right direction. The guide protrusion wall 120 is formed with its front- and rear-side ends thicker than its center so that the guide protrusion wall 120 contacts the ink cartridge 200 substantially at two points that correspond to the thick portions. Positioning in the left-right direction can be precisely performed. It should be noted that guiding and positioning of the ink cartridge 200 can also be performed by the partition walls 110 or could be performed by cooperative operation of the partition walls 110 and the guide protrusion wall 120.

**[0087]** The residual ink detecting photo sensor 170 is made from an infrared light emitting portion 172 and an infrared light receiving portion 174 and is for detecting the amount of residual ink in the ink cartridge 200. The residual ink detecting photo sensor 170 is connected to

a circuit board disposed beneath the cartridge holding portion base wall 32. The residual ink detecting photo sensor 170 protrudes above the cartridge holding portion base wall 32 from the circuit board. Sensor guards 176, which are for protecting the infrared light emitting portion 172 and the infrared light receiving portion 174 from the ink cartridge 200 when the ink cartridge 200 is inserted, protrude upward from the cartridge holding portion base wall 32 from the sides of the infrared light emitting portion 172 and the infrared light receiving portion 174 that are nearer to the front surface opening portion O. The sensor guards 176 are formed with rounded surfaces at the portion of their confronting faces that are nearest the front surface opening portion O.

**[0088]** The needle protection plate 130 is positioned at the front surface opening portion O side of the ink introducing hollow needle 82 with a space between itself and the ink introducing hollow needle 82. The needle protection plate 130 is for covering the tip of the ink introducing hollow needle 82 from the side confronting the front surface opening portion O. Fig. 11 shows configuration relating to the needle protection plate 130, the lock releasing operation rib 150, and the pull-out-lock protrusion 160 of the representative cartridge mounting mechanism 100 of Fig. 10. The needle protection plate 130 is supported below the cartridge holding portion base wall 32 so as to be pivotable around a needle protection pivot shaft 132 that intersects the front-rear direction. The needle protection plate 130 is movable between a cover position and a release position. In the cover position, the needle protection plate 130 protrudes from an opening 104 formed in the cartridge holding portion base wall 32 to above the cartridge holding portion base wall 32. In the release position, the needle protection plate 130 is retracted within the opening 104. The needle protection plate 130 is constantly urged by a spring 183 toward the cover position. The lock member 180 is supported pivotable around a shaft 184 below the cartridge holding portion base wall 32. A pressing plate 140 rises up from one end of the lock member 180. Operation of the spring 182 moves the lock member 180 in a direction to move the pressing plate 140 into confrontation with the ink introducing hollow needle 82 side surface of the needle protection plate 130. The lock member 180 integrally includes the lock releasing operation rib 150 in between the shaft 184 and the pressing plate 140. The urging force of the spring 182 protrudes the lock releasing operation rib 150 from an opening 106 formed in the cartridge holding portion base wall 32 between the guide protrusion walls 120 and the partition walls 110.

**[0089]** In this condition, when the ink cartridge 200 is inserted from the front surface opening portion O, as will be described later the lower side of the ink cartridge 200 first presses the lock releasing operation rib 150 so that the lock member 180 pivots and the pressing plate 140 retracts downward from the back surface of the needle protection plate 130. When the ink cartridge 200 is

moved further in the front-rear direction of the mounting portion S, the front surface of the ink cartridge 200 presses the needle protection plate 130. However, because the pressing plate 140 was retracted below the back surface of the needle protection plate 130, the needle protection plate 130 is not block from pivoting and so drops into the opening 104 so that the ink cartridge 200 can connect with the ink introducing hollow needle 82.

**[0090]** In the reverse operation, that is, to remove the ink cartridge 200 from the ink cartridge mounting portion S, the spring 183 moves the needle protection plates 130 upright at the position covering the ink introducing hollow needle 82. Then, the lower surface of the ink cartridge 200 separates away from the lock releasing operation ribs 150 and the spring 182 returns the pressing plate 140 to the back surface of the needle protection plate 130.

**[0091]** Unless the lock releasing operation rib 150 is being pressed down, the back surface of the needle protection plate 130 will abut the pressing plate 140 so the ink introducing hollow needle 82 will not be exposed to the front surface opening portion O, even if an external force is applied from the front surface opening portion O side of the needle protection plate 130.

**[0092]** A leak preventing lock member 190 is provided for applying resistance against the urging force by the spring 94 of the positive pressure application members 91, which urges the mounted ink cartridge 200 in a direction to pull out of the ink cartridge mounting portion S. The leak preventing lock member 190 includes the pull-out-lock protrusion 160, which is capable of protruding above the cartridge holding portion base wall 32 from an opening 108 formed in the cartridge holding portion base wall 32. The leak preventing lock member 190 is supported pivotable around a shaft 192 below the cartridge holding portion base wall 32. The leak preventing lock member 190 is urged upward by the spring 182. Normally, the protrusion 160 protrudes upward above the cartridge holding portion base wall 32 from the opening 108 and fits in a leak preventing lock indentation 246 (Fig. 18) to be described later of the ink cartridges 200 that is in its mounted position. However, as will be described later, when the ink cartridge 200 abuts the protrusion 160 by force generated when the ink cartridge 200 is attached or detached, the leak preventing lock member 190 pivots around the shaft 192 so that the protrusion 160 retracts downward and the ink cartridge 200 can be attached or detached.

**[0093]** The cyan, yellow, magenta, and black ink cartridges 200 of the present embodiment all have the shape shown in Fig. 12. That is, all are made from a main case 230 and a lid 210 made from a substantially transparent resin. Overall the ink cartridge 200 has a flat and substantially parallelepiped shape. It should be noted that the cyan, yellow, and magenta ink cartridges 200 (color ink cartridges) have substantially the same size. The black ink cartridge 200 has substantially the same

length as the color ink cartridges 200. However, the width of the black ink cartridge is wider than that of the color ink cartridges.

**[0094]** Next, an explanation will be provided for the ink cartridges 200 of the present embodiment while referring to the representative example shown in Figs. 12 to 39. The main case 230 includes flat side walls 232 on both sides in the left-right direction. The distance between the side walls 232, that is, the width of the main case 230, corresponds to the distance between the partition walls 110 provided to both sides of the ink cartridge mounting portion S.

**[0095]** The lid 210 has a substantially flat shape with a spherical outward curved portion 212, which is curved outward in a spherical shape, provided at its substantial center portion. A flat-shaped protrusion portion 213 is formed from a raised up front end of the lid 210 except at left and right ends. A flat portion 214 is formed at the left and right sides of the protrusion portion 213 and around the spherical outward curved portion 212 of the lid 210. The portion of the flat portion 214 positioned to the left and right of the protrusion portion 213 and of the spherical outward curved portion 212 extends in the lengthwise (front-rear) direction of the ink cartridges 200. When the ink cartridge 200 is inserted into the ink cartridge mounting portion S, the front-rear extending portion of the flat portion 214 slides against the spring 114 in confrontation with the underside of the enlarged portions 112. The curved portion 212 and the protrusion portion 213 protrude in the direction of and are closer to the lower surface of the cartridge holding cover portion 44, that is, the ceiling surface, than are the lower surfaces of the enlarged portions 112, which are positioned on either side of the curved portion 212 and the protrusion portion 213. The curved portion 212 and the protrusion portion 213 extend higher toward the cartridge holding cover portion 44 than the flat portion 214. When the ink cartridge 200 is mounted in the recording device, the curved portion 212 and the protrusion portion 213 regulate height wise position of the ink cartridge 200 when the ink cartridge 200 is inserted through the front surface opening portion O.

**[0096]** The ink cartridge 200 is formed sufficiently longer than the length in the front-rear direction of the cartridge holding cover portion 44 so that the rear end portion protrudes from the cartridge holding cover portion 44 when the ink cartridge 200 is in a mounted condition in the mounting portion S. The rear end portion of the ink cartridge 200 is a grasping portion 202 that is slightly narrower width than the other areas. As shown in Fig. 6, a desired single ink cartridge 200 can be easily grasped and taken out when plural ink cartridges 200 are housed in the ink cartridge holding portion P. Contrarily, an ink cartridge 200 can be grasped and easily mounted even when an ink cartridge 200 is housed adjacent thereto in ink cartridge holding portion P. A rib 217 is formed near the rear end of the lid 210 so as to extend linearly in the left-right direction. Accordingly, by snag-

ging his or her finger on the rib 217 and pulling the ink cartridge 200 forward, the user can pull the ink cartridge 200 out of the ink cartridge holding portion P using a single finger.

**[0097]** As shown in Fig. 13, a protrusion portion 235 is formed on a front surface wall 234 of the main case 230. The protrusion portion 235 protrudes upward at the left-right central region of the front surface wall 234. An ink supply hole 260 is formed in the substantial center of the front surface wall 234. The ink supply hole 260 is a hole for supplying ink from an ink accommodation portion 300 (Fig. 14) provided in the main case 230 to outside. An ink supply rubber plug 262 (Fig. 39(a)) is press-fit mounted in the ink supply hole 260. An ink injection hole 270 is opened next to the ink supply hole 260. An ink injection rubber plug 272 (Fig. 39(a)) is press-fit mounted in the ink injection hole 270. Further, an atmosphere connection hole 280 is also opened in the front surface wall 234. The atmosphere connection hole 280 is a small-diameter, long and thin hole that is in fluid communication with the positive pressure hole 98 of the positive pressure application members 91 when the ink cartridge 200 is mounted in the ink cartridge mounting portion S. Further, a guide groove 236 and a sensor accommodation groove 240 are formed in the front surface wall 234 and across the lower wall of the main case 230 so as to be open in the front surface and the lower surface. The guide groove 236 is an indented portion for engaging with the guide protrusion wall 120 when the ink cartridge 200 is mounted in the ink cartridge mounting portion S. A lock release portion 238 is defined by the lower rear surface of the ink cartridge 200 that is between the guide groove 236 and the nearby side wall 232. The guide groove 236 and the lock release portion 238 are provided near the portions of the ink cartridge 200 that correspond to the enlarged portions 112 of the recording device. The lock release portion 238 functions to press the lock releasing operation rib 150 when the ink cartridge 200 is mounted in the ink cartridge mounting portion S. The sensor accommodation groove 240 is an indented portion in a contour of the outer shape of the ink cartridge 200 and accommodates the residual ink detecting photo sensor 170 when the ink cartridge 200 is mounted in the ink cartridge mounting portion S.

**[0098]** As shown in Fig. 14, the main case 230 includes an ink accommodation portion 300 at its inside and is open at its upper side. Described in more detail, the main case 230 includes the front surface wall 234, the side walls 232, and a rear surface wall 237. The side walls 232 are on left and right sides of the main case 230. The side walls 232 are connected to the front surface wall 234 and the rear surface wall 237. The grasping portions 202 are formed to the rear of the rear surface wall 237. The ink accommodation portion 300 is surrounded by the front surface wall 234, the side walls 232, and the rear surface wall 237. The ink accommodation portion 300 is configured with a flexible film 302 at an ink-holding portion 310 (Fig. 15) to be described

later. The ink-holding portion 310 is formed at the inside of the main case 230. The flexible film 302 is welded onto an opening peripheral edge 312 of the ink-holding portion 310. Ink is held in between the flexible film 302 and the ink-holding portion 310. While the ink cartridge 200 is filled with ink, the flexible film 302 expands upward into a curved surface. The ink supply hole 260 and the ink injection hole 270 are in fluid communication with the inside of the ink accommodation portion 300. Described in more detail, the ink supply hole 260 is in fluid communication with the ink accommodation portion 300 through a small-diameter ink supply connection pathway 268. The ink injection hole 270 is in fluid communication with the ink accommodation portion 300 by the through a small-diameter ink injection connection pathway 278 from the ink injection hole 270.

**[0099]** A substantially rectangular plate shaped tension plate 306 is provided on the flexible film 302 so that its lengthwise direction extends in parallel with the lengthwise (front-rear) direction of the ink cartridge 200. The tension plate 306 is adhered at its lengthwise center portion to the substantial center portion of the flexible film 302 by two-sided adhesive tape.

**[0100]** It should be noted that the lengthwise direction cross sectional shape (Fig. 21) of the case body is the same whether for black or color ink cartridges. Because the tension plate 306 is adhered in the lengthwise direction, an equal tension can be applied by preparing and adhering tension plates 306 with the same length for all color ink cartridges. The length of the tension plate 306 is formed slightly shorter than the dimension of the ink accommodation portion 300 in the lengthwise direction. The material of the tension plate is a film made from resin such as PET film. It should be noted that detailed operation of the tension plate 306 will be described later.

**[0101]** An atmosphere chamber 290 in fluid communication with the atmosphere connection hole 280 is formed in the periphery of the ink accommodation portion 300. Described in more detail, a partition wall 282 is formed at the rear side of the front surface wall 234. The partition wall 282 connects the side walls 232. Also, an outside protrusion wall 211 is formed from the lid 210. The outside protrusion wall 211 is for coupling with the partition wall 282, the side walls 232, and the rear surface wall 237 of the main case 230. When the lid 210 is attached to the main case 230 and the outside protrusion wall 211 is coupled with the partition wall 282, the side walls 232, and the rear surface wall 237, then the atmosphere chamber 290 will be encompassed by the partition wall 282, the side walls 232, and the rear surface wall 237 and moreover defines a region (covered by the lid 210) that surrounds the ink accommodation portion 300. The atmosphere chamber 290 is in a substantially sealed condition in communication with the outside only through the atmosphere connection hole 280. Here, the atmosphere connection hole 280 is a through hole that extends between the front surface wall 234 and the partition wall 282 and that is opened to the



front surface wall 234 and the partition wall 282. Also, the ink supply connection pathway 268 and the ink injection connection pathway 278 penetrate through the partition wall 282 and are in fluid communication with the ink accommodation portion 300. When the lid 210 is attached on the main case 230 and covers the opening of the main case 230, the atmosphere chamber 290 is in fluid communication with atmosphere through only the atmosphere connection hole 280. By applying atmospheric or positive pressure to the atmosphere chamber 290, pressure can be applied to the flexible film 302 of the ink accommodation portion 300 from the external side of the ink accommodation portion 300 so that ink in the ink accommodation portion 300 can be supplied to outside of the ink cartridge 200 through the ink supply hole 260.

**[0102]** It should be noted that a plurality of ribs 292 (Fig. 15) are formed in the inside of the atmosphere chamber 290 so that the strength of the main case 230 is increased.

**[0103]** Fig. 14 shows the inner surface of the lid 210 that is attached to the ink cartridge 200. As is clear from the drawing, the lid 210 is substantially flat. The spherical outward curved portion 212 that is formed in the central portion of the lid 210 has a shape that encompasses the bulge of the flexible film 302. An annular portion of the flat portion 214 has a predetermined width that encompasses the spherical outward curved portion 212 and defines an ink accommodation periphery portion 216 to be described later. A groove-shaped notch 218 is formed so as to cut through the ink accommodation periphery portion 216. When the lid 210 is coupled to the main case 230, a space develops between the ink accommodation periphery portion 216 and the flexible film 302 that is adhered to the opening peripheral edge 312. When the ink cartridge is vacuum packaged in a manner to be described later, the lid 210 and the main case 230 flexibly deform toward each other. Even if the lid side of the ink accommodation periphery portion 216 comes into intimate contact with the flexible film 302, the groove-shaped notch 218 and protrusion wall notches 219 to be described later serve to bring the space between the spherical outward curved portion 212 and the flexible film 302 into fluid communication with the atmosphere chamber 290. Also, a protruding wall 215 is formed at the inner side of the outside protrusion wall 211, which is the outer side of the ink accommodation periphery portion 216. The protruding wall 215 extends and protrudes from the lid 210 so as to encompass the ink accommodation periphery portion 216. The protruding wall 215 is located so as to, when the lid 210 is mounted on the main case 230, encompass the outer periphery of the opening peripheral edge 312 to be described later with reference to Fig. 27. The protruding wall 215 is discontinuous at portions that follow the side walls 232 and that approach and connect to the outside protrusion wall 211. These discontinuous portions of the protruding wall 215 define the protrusion wall notches

219. One protrusion wall notch 219 is located adjacent the groove-shaped notch 218 and the other protrusion wall notch 219 is located opposite from the groove-shaped notch 218 in the left-right direction. The protrusion wall notches 219 also function to bring the space between the spherical outward curved portion 212 and the flexible film 302 into fluid communication with the atmosphere chamber 290 and to prevent positive pressure from the atmosphere connection hole 280 from being blocked by the protruding wall 215.

**[0104]** As shown in Fig. 15, the ink-holding portion 310 is encompassed by the opening peripheral edge 312 and includes an tub portion 320. The tub portion 320 is open at the upper surface. The opening peripheral edge 312 has a circular or ellipsoidal shape that bulges outward at one portion 328. The tub portion 320 includes a curved surface portion 324 that curves downward in a substantial curved shape from a circular (or ellipsoidal) shaped encompassing edge 322. The encompassing edge 322 is positioned at the same height as the opening peripheral edge 312. The substantial center of the curved surface portion 324 is the lowest position. The curved surface portion 324 includes a slanted surface portion 326 that is flat (not curved). The horizontally-extending flat shoulder portion 328, which bulges to the outside of the opening peripheral edge 312, is formed between the opening peripheral edge 312 and the circular (or ellipsoidal) encompassing edge 322. Because the flexible film 302 is attached to the opening peripheral edge 312 so as to cover the tub portion 320, ink is stored between the flexible film 302, the curved surface portion 324 including the slanted surface portion 326, and the flat shoulder portion 328.

**[0105]** The height of the flat shoulder portion 328 substantially matches the height of the opening peripheral edge 312 so that the flexible film 302 bulges only a small amount above the flat shoulder portion 328. With this configuration, while the lid 210 is mounted on the main case 230 the user can visually confirm the color of the ink from above the lid 210 by viewing the color of the ink accumulated between the flat shoulder portion 328 and the flexible film 302. Said differently, when the tub portion 320 is full of ink, the color of the ink in the tub portion 320 appears substantially black because the layer of ink is thick. However, the actual color of the ink can be viewed at the thin ink layer between the flat shoulder portion 328 and the flexible film 302.

**[0106]** The flexible film 302 is preformed into a curved shape that intimately contacts the inner surface of the ink-holding portion 310 when almost no ink is in the ink-holding portion 310. The method for manufacturing the flexible film 302 in this shape will be described later. Because the flexible film 302 is shaped in this manner, the flexible film can softly and gradually deform following the amount of ink from when ink completely fills between the flexible film 302 and the ink-holding portion 310 to when almost no ink is in the ink-holding portion 310. Almost no pressure operates on the ink from the flexible

film itself, for example, by resilient contraction.

**[0107]** An air removing/ink supply groove 332 is formed in the base surface of the tub portion 320. The air removing/ink supply groove 332 is in fluid communication with an ink injection groove 330, which is in fluid communication with the ink injection hole 270 (the ink injection connection pathway 278), and the ink supply hole 260 (the ink supply connection pathway 268). A sensing mechanism 340 is further provided to the base surface of the tub portion 320. The sensing mechanism 340 is for detecting the residual amount of ink remaining on the tub portion 320.

**[0108]** As shown in Fig. 16, the sensing mechanism 340 is made from a sensor lever accommodation groove 350, a sensor lever 360, and a suppressing film 342. The sensor lever 360 is disposed within the sensor lever accommodation groove 350. The suppressing film 342 has a T shape. The sensor lever accommodation groove 350 is opened in the base surface of the tub portion 320. The sensor lever accommodation groove 350 has a base surface 352 that follows the lower surface (Fig. 18) of the main case 230. The sensor lever accommodation groove 350 is formed so as to extend in a direction that is shifted 45 degrees with respect to the lengthwise (front-rear) direction of the case body from the central position of the curved surface portion 324 of the tub portion 320, to bend 45 degrees where it reaches the circular (or ellipsoidal) encompassing edge 322 of the tub portion 320, and then to extend parallel with the lengthwise direction of the case body. The portion of the sensor lever accommodation groove 350 that extends in parallel with the lengthwise direction of the case body is called the groove portion 354 and is open upward at the flat shoulder portion 328. In this way, the sensor lever accommodation groove 350 is open so as to extend in a direction shifted 45 degrees from the lengthwise direction of the case body at positions from the center portion of the curved surface portion 324 of the tub portion 320 to the slanted surface portion 326 and is open so as to extend parallel with the lengthwise direction of the case body at the upper surface of the flat shoulder portion 328. The depth of the sensor lever accommodation groove 350 is substantially fixed at the curved surface portion 324, rapidly increases at the slanted surface portion 326, and again is substantially fixed at the flat shoulder portion 328. The groove portion 354 of the sensor lever accommodation groove 350 extends outside of the tub portion 320, follows the wall that protrudes to the inside of the sensor accommodation groove 240 and reaches the inside of the sensor accommodation groove 240, thereby forming a protrusion portion 372 shown in Fig. 18. Also, the sensor lever accommodation groove 350 has a groove 351 that intersects the lengthwise direction.

**[0109]** The sensor lever 360 has a specific gravity that is higher than the specific gravity of ink and is formed from a black colored resin that can block infrared light. The sensor lever 360 is disposed within the sensor lever

accommodation groove 350. The sensor lever 360 is an elongated plate-shaped member having a pivot fulcrum portion 362, an operation arm portion 364, and a sensing arm portion 366. The pivot fulcrum portion 362 has the shape of a triangular prism. The operation arm portion 364 and the sensing arm portion 366 extend from on opposite sides of the pivot fulcrum portion 362. A semispherical pivot 365 (an ink residual amount detection point) is provided at the end portion of the operation arm portion 364. The sensor lever 360 is disposed within the sensor lever accommodation groove 350 so that the semispherical pivot 365 is disposed in the center position of the curved surface portion 324 of the tub portion 320. As a result, the semispherical pivot 365 is disposed at the lowest position of the curved surface portion 324. The sensing arm portion 366 is bent at a 45 degree angle near its end, thereby forming a bent end portion 367, which is positioned in the groove portion 354 of the sensor lever accommodation groove 350 (the portion opened at the flat shoulder portion 328) and functions as a sensing point. The pivot fulcrum portion 362 is disposed inside the intersecting groove 351 of the sensor lever accommodation groove 350. The apex of the triangular cross section of the pivot fulcrum portion 362 sinks in the ink so as to contact the bottom of the intersecting groove 351. As a result, the sensor lever 360 can pivot with the pivot fulcrum portion 362 as a fulcrum. Here, the weight of the sensing arm portion 366 is greater than the weight of the operation arm portion 364. In this example, the weight of the sensing arm portion 366 is five times or greater than the weight of the operation arm portion 364. For this reason, when sufficient ink remains, the sensing point 367 of the sensor lever 360 is positioned on the base surface 352 of the sensor lever accommodation groove 350 as indicated by solid line in Fig. 17. The semispherical pivot 365 (ink residual amount detection point) ink floats up from the base surface 352 and protrudes over the bottom of the tub portion 320. On the other hand, when ink is used up so that the flexible film 302 moves down toward the tub portion 320, the flexible film 302 presses down the semispherical pivot 365 (ink residual amount detection point) as shown by two-dot chain line in Fig. 17 so that the bent end portion 367 (sensing point) rises up. Because the sensor lever 360 is accommodated in this way in the sensor lever accommodation groove 350, which extends out from the tub portion 320 from under the tub portion 320, the sensor lever 360 does not block the flexible film 302 as the flexible film 302 deforms toward the tub portion 320. Therefore, detection of residual ink can be more reliably performed.

**[0110]** Also, the length L1 of the sensing arm portion 366 of the sensor lever 360 is longer than the length L2 of the operation arm portion 364. In this example, the length L1 of the sensing arm portion 366 is about four times the length L2 of the operation arm portion 364. Accordingly, even if the flexible film 302 lowers the semispherical pivot 365 (ink residual amount detection

point) only a slight bit, the bent end portion 367 will rise up a great deal so that detection using a residual amount detection sensor 70 to be described later can be reliably performed.

**[0111]** The PET film tension plate 306 insures that the sensor lever 360 will reliably operate when almost no ink remains unused so that ink can be used up to the maximum. That is, if the tension plate 306 were not provided, then wrinkles could develop in one portion of the flexible film 302 as the flexible film 302 lowers down in association with reduction in ink and the flexible film 302 comes into intimate contact with the tub portion 320. In this case, the sensor lever 360 would be activated while ink remains between the wrinkled portion and the tub portion 320 so that ink is not used up.

**[0112]** However, in the present embodiment, only the center portion of the tension plate 306, that is, the portion that confronts the semispherical pivot 365 of the sensor lever 360, is connected to the center portion of the flexible film 302. The tension plate 306 rides on top of the bulging flexible film 302 as indicated by solid line in Fig. 17 when there is a great deal of ink in the tub portion 320. The tension plate 306 moves downward in association with reduction in ink. However, when a small amount of ink remains, both ends of the tension plate 306 abut against the inner peripheral surface of the tub portion 320 at a position lower than the opening peripheral edge 312 and higher than the lowest position of the tub portion 320 so that the tension plate 306 is restricted from moving further downward. As a result, although the peripheral portion of the flexible film 302 is in intimate contact following the inner peripheral surface of the tub portion 320, the center portion of the flexible film 302 is raised up because of the tension plate 306. At this time, the center portion of the raised-up flexible film 302 confronts the semispherical pivot 365 of the sensor lever 360 with a spaced opened up therebetween.

**[0113]** When the amount of ink is further reduced, the center portion of the flexible film 302 moves further down against the resilience of the tension plate 306. However, once the amount of ink in the tub portion is reduced to less than a predetermined amount range so that hardly any ink remains, the flexible film 302 overcomes the urging force of the tension plate 306 so that the center portion of the flexible film 302 presses against the semispherical pivot 365 of the sensor lever 360. At this time, the surface area of the peripheral portion of the flexible film 302 that is in intimate contact following the inner peripheral surface of the tub portion 320 gradually increases until the center of the flexible film 302 presses the sensor lever 360. That is, the tension plate 306 prevents wrinkles from being generated in the flexible film 302 along the way. Also, the flexible film 302 moves down while ink is collected in the center portion of the tub portion 320. Therefore, the sensor lever 360 will reliably operate in the condition wherein almost no ink remains unused.

**[0114]** The tension plate 306 need not be formed in

the substantial rectangular shape described above, but could be triangular shaped, star shaped, circular shaped, or any optional shape as long as its shape enables opening a space between the flexible film 302 and the semispherical pivot 365 of the sensor lever 360 when downward movement is restricted as described above. Further, the outer peripheral portion of these different shaped members need not abut the inner peripheral surface of the tub portion 320, but could be placed on the opening peripheral edge 312.

**[0115]** It is desirable that the tension plate 306 have resilience and weight that does not apply influence to the pressure in the ink accommodation portion 300. However, pressure in the ink accommodation portion 300 can be adjusted by appropriately setting the resilience and weight. When there is a great deal of ink, the weight of the tension plate 306 applies positive pressure to the inside of the ink accommodation portion 300 because the tension plate 306 contacts only the center of the flexible film 302. When only a little ink remains, then the tension plate 306 functions as a beam to lift up the central portion of the flexible film 302. As a result, a negative pressure is applied to the ink accommodation portion 300. By adjusting the spring force (which relates to negative pressure when little ink remains), weight (which relates to positive pressure when a great deal of ink remains), and length (which relates to timing of the switch from application of positive pressure to the application of negative pressure) of the tension plate 306, a pressure that is appropriate with the consumption condition of ink can be applied to the ink accommodation portion 300.

**[0116]** In the embodiment, the tension plate 306 is connected to the flexible film 302 so as to move following the flexible film 302 until only a slight amount of ink remains. On the other hand, the tension plate 306 is restricted from moving downward by the tub portion 320 when only a little ink remains and has resilience that urges the flexible film 302 in a direction away from the pivot (ink residual amount detection point) 365. The tension plate 306 allows portions of the flexible film 302 other than portions in confrontation with the pivot (ink residual amount detection point) 365 to follow the tub portion 320 at least after a slight amount of ink remains. However, the tension plate 306 urges portions of the flexible film 302 that confront the pivot (ink residual amount detection point) 365 in the direction away from the pivot (ink residual amount detection point) 365. Moreover, in association with reduction in ink after a slight amount of ink remains, the tension plate 306 approaches toward the pivot (ink residual amount detection point) 365 against the urging of the tension plate 306. In this way, ink can be reliably used up.

**[0117]** As shown in Fig. 16, the T-shaped suppressing film 342 is made from PET and is provided to press the sensor lever 360 downward into the sensor lever accommodation groove from above the sensor lever 360. Explained in more detail, the suppressing film 342 has

an integral fixed portion 342a and resilient plate portion 342b. The resilient plate portion 342b presses the sensing arm portion 366. Of the sensor lever accommodation groove 350, the groove 351 which accommodates the pivot fulcrum portion 362 is formed with a level difference. A pair of holes 344 are formed in the fixed portion 342a. By fitting a pair of protrusions 356 into the pair of holes 344 and crushing the pair of protrusions 356, the fixed portion 342a can be fixed to the tub portion 320. By this, the pivot fulcrum portion 362 is supported in the intersecting groove 351 with a space opened between itself and the T-shaped suppressing film 342. The sensor lever 360 can be freely pivoted with the pivot fulcrum portion 362 as a fulcrum. The resilient plate portion 342b is disposed inserted inside the sensor lever accommodation groove 350 so as to extend toward to the sensing arm portion 366 from the fixed portion 342a. By this, the sensing arm portion 366 moves down by the resilient plate portion 342b. That is, because the semispherical pivot 365 is urged to protrude above the bottom surface of the tub portion 320, the semispherical pivot 365 can be reliably protruded above the base surface of the tub portion 320 even if the ink cartridge is turned upside down during transport of the ink cartridge. It should be noted that the resilience of the resilient plate portion 342b is large enough to block further rising movement of the sensing arm portion 366 in association with reduction in ink.

**[0118]** It should be noted that the portion of the sensor lever accommodation groove 350 that accommodates the sensing arm portion 366 is formed in the slanted surface portion 326. Because the slant of the slanted surface portion 326 is greater than the slant of the spherical surface portion, the sensing arm portion 366 can move upward by a sufficient amount without contacting and being obstructed by the flexible film 302.

**[0119]** As shown in Fig. 18, the lower surface of the main case 230 includes a flat smooth surface 242 capable of sliding with respect to the ink cartridge mounting portions S. The flat smooth surface 242 is connected by the side walls 232 on both sides. The lower surface of the main case 230 is formed with the guide groove 236 and the sensor accommodation groove 240. As shown in Fig. 30, the distance  $L_{ac}$  between the guide groove 236 and the side wall 232 that is nearest in the widthwise direction corresponds to the guide-partition wall intervening distance  $L_a$  in the ink cartridge mounting portions S. As shown in Fig. 35, the guide groove 236 is formed merely with a length  $L_{cc}$  capable of accommodating the guide protrusion walls 120 in the lengthwise direction from the front surface wall 234. More particularly, the guide groove 236 is formed with a length that is at least as long or longer than a length  $L_c$  between the positive pressure application members 91 in the ink cartridge mounting portions S and the side end of the front surface opening portion O of the guide protrusion walls 120. For this reason, the guide groove 236 can accommodate the guide protrusion wall 120 when

the ink cartridge 200 is mounted in the ink cartridge mounting portion S. As shown in Fig. 30, the distance  $L_{bc}$  between the guide groove 236 and the guide protrusion walls 120 corresponds to a guide-sensor inter-distance in the ink cartridge mounting portion S. As shown in Fig. 30, the sensor accommodation groove 240 is formed to merely a length  $L_{dc}$  that corresponds to the distance  $L_d$  between the positive pressure application members 91 in the lengthwise direction from the wall and the residual ink detecting photo sensor 170 so that the residual ink detecting photo sensor 170 can be accommodated when the ink cartridge 200 is mounted in the ink cartridge mounting portion S.

**[0120]** A plurality of ribs 243 are formed in the lower surface of the main case 230. The ribs 243 are for supporting the strength of the tub portion 320 from the under surface of the tub portion 320. It should be noted that a bottom central axis rib 244 is formed in the central position in the widthwise direction of the main case 230 so as to extend in the lengthwise direction of the main case 230. The bottom central axis rib 244 continues to retract the pull-out-lock protrusion 160 (Fig. retrieval unit 10) to below the bottom surface when the ink cartridge 200 slides above the bottom surface of the ink cartridge mounting portion S. The ink cartridge 200 will not pull out from the ink cartridge mounting portion S because the pull-out-lock protrusion 160 engages with the leak preventing lock indentation 246 when the ink cartridge 200 is mounted in the ink cartridge mounting portion S.

**[0121]** A sensor lever accommodation portion 370 forms the inner portion of the sensor lever accommodation groove 350. The sensor lever accommodation portion 370 is formed in the lower surface of the main case 230 so as to protrude out from the tub portion 320. The portion (sensor lever accommodation protrusion portion 372) of the sensor lever accommodation portion 370 that corresponds to the base surface 352 of the sensor lever accommodation groove 350 protrudes in the lengthwise direction at the widthwise center of the sensor accommodation groove 240. The rounded surfaces formed in the confronting faces of the sensor guards 176 facilitate insertion of the protrusion portion 372 in between the sensor guards 176 and the infrared light emitting portion 172 and the infrared light receiving portion 174 of the residual ink detecting photo sensor 170. As shown in Fig. 35, when the ink cartridge 200 is mounted in the ink cartridge mounting portions S and the residual ink detecting photo sensor 170 is housed in the sensor accommodation groove 240, the sensing accommodation protrusion portion is positioned between the infrared light emitting portion 172 and the infrared light receiving portion 174 of the residual ink detecting photo sensor 170. The sensing arm end portion 367 (sensing point) of the sensor lever 360 positioned in the groove portion 354 in the protrusion portion 372 will as a result be positioned between the infrared light emitting portion 172 and the infrared light receiving portion 174. It should be noted that at least the protrusion portion 372 of the main

case is made from a material that is transparent to infrared light.

**[0122]** Fig. 19 is a schematic plan view of the ink cartridge 200 according to the embodiment having the configuration described above. Fig. 19 shows the situation wherein the lid 210 is mounted on the main case 230. Internal configuration is indicated by broken line. Fig. 20 is a view taken from the direction indicated by arrow A of Fig. 19, that is, is a frontal view showing the front surface of the ink cartridge 200. Figs. 21 to 28 are cross-sectional views taken along lines B-B, C-C, D-D, E-E, F-F, G-G, H-H, and I-I, respectively. It should be noted that the flexible film 302 and the ribs (243, 292) are not indicated in the drawings for purposes of clarity. However, the bottom central axis rib 244 is indicated in some of the drawings.

**[0123]** As shown in Figs. 15 and 27, a peripheral wall 231 is formed in the main case 230. The peripheral wall 231 extends from the opening peripheral edge 312, which defines the opening of the tub portion 320, integrally and continuously to the bottom surface side (in the depth direction of the tub portion 320) of the main case 230. A peripheral wall portion 233 is formed connected to the peripheral wall 231, the side walls 232, and the flat smooth surface 242. The peripheral wall portion 233 supports the tub portion 320 from the periphery of the tub portion 320. The peripheral wall 231 and the side walls 232 are separated by an interposed space and are connected together by a plurality of wall-like ribs 292. The flat portion 214 of the lid is coupled to the upper end of the peripheral wall portion 233 and serves as the outer peripheral portion in confrontation with the peripheral wall portion 233. Accordingly, the lower surface of the ink accommodation portion 300 is stabilized by the flat smooth surface 242 even when substantially spherically shaped. Attachment to and removal from the multifunction device 1 is simple. Because the flexible film 302 is adhered to the opening peripheral edge 312 and the lid 210 is connected to the upper end of the peripheral wall portion 233, ink can be reliably sealed in without the adhered portion of the flexible film 302 interfering with the lid 210. Because the peripheral wall portion 233 has a two-layered configuration made from the peripheral wall 231 and the side walls 232, and uses a configuration wherein the peripheral wall portion 233 and the peripheral wall 231 are connected by a plurality of ribs 292, the peripheral wall portion 233 can be prevented from deforming even though the ink cartridge 200 is subjected to vacuum pack processes to be described later. Further, as is clear from Fig. 18, the plurality of ribs 243 are formed so as to connect the lower surface of the tub portion 320 and the peripheral wall portion 233. For this reason, the ribs 243 prevent the tub portion 320 and peripheral wall portion 233 from deforming even if the ink cartridge 200 is subjected to the vacuum pack processes to be described later.

**[0124]** The ink cartridge 200 having the above-described configuration has a flat lower surface. As shown

in Fig. 29, the upper surface has a curved shape that is higher than the height at both ends (side walls 232) in the widthwise direction. The height at both ends in the widthwise direction (the height from the flat smooth surface 242 to the flat portion 214) is substantially the same as the distance between the base wall 32 and the enlarged portion 112 that is formed on the upper portion of the front surface opening portion O side end of the partition walls 110. Accordingly, the ink cartridge 200 can be inserted into the ink cartridge mounting portions S. Also, the ink cartridge 200 can be prevented from being inserted upside down because the height of the spherical outward curved portion 212 and the protrusion portion 213 is higher than the height at both sides in the widthwise direction and because the curve-shaped protruding walls 47 of the ceiling surface of the mounting portions S is formed following the spherical outward curved portion 212 of the ink cartridge 200.

**[0125]** Because the lower surface of the main case 230 is smooth and formed with the peripheral wall portion 233, which extends in the lengthwise direction, the ink cartridge 200 can be mounted by merely inserting the ink cartridge 200 in the ink cartridge mounting portion S and sliding it over the bottom surface while the pull-out-lock protrusion 160 is in a retracted condition. Moreover, the width of the ink cartridge 200 corresponds to the distance between the partition walls 110 of the ink cartridge mounting portion S, the distance  $L_{ac}$  between the guide groove 236 and the side walls 232 nearest in the widthwise direction corresponds to the guide-partition wall intervening distance  $L_a$  in the ink cartridge mounting portion S, and the distance  $L_{bc}$  between the guide groove 236 and the sensor accommodation groove 240 corresponds to the inter-guide-sensor distance  $L_b$  in the ink cartridge mounting portion S. Accordingly, by sliding the cartridge so that the guide groove 236 is guided by the guide protrusion walls 120 when the ink cartridge 200 is inserted into the ink cartridge mounting portion S, the residual ink detecting photo sensor 170 is reliably housed in the sensor accommodation groove 240 and the bent end portion 367 in the sensor accommodation groove 240 is inserted between the infrared light emitting portion 172 and the infrared light receiving portion 174.

**[0126]** It should be noted that as indicated in Figs. 9 and 30, the position of the end portion of the front surface opening portion O side of the guide protrusion walls 120 in the ink cartridge mounting portion S is positioned at a position nearer the front surface opening portion O than the position of the end portion (sensor guard 176) of the front surface opening portion O side of the residual ink detecting photo sensor 170. The end of the guide groove 236 that is opposite from the front surface wall 234 is positioned farther from the front surface wall 234 than the end of the sensor accommodation groove 240 that is opposite from the front surface wall 234. Accordingly, when the ink cartridge 200 is inserted into the ink cartridge mounting portion S and slid over the holding

portion base wall 32, the sensor accommodation groove 240 reaches the residual ink detecting photo sensor 170 after the guide groove 236 accommodates the guide protrusion walls 120. Because the main case 230 reaches the residual ink detecting photo sensor 170 after being positioned in the widthwise direction of the ink cartridge 200 by engagement between guide protrusion walls 120 and the guide groove 236, the bent end portion 367 in the sensor accommodation groove 240 is inserted between the infrared light emitting portion 172 and the infrared light receiving portion 174.

**[0127]** Because the guide protrusion wall 120 is near the lock releasing operation rib 150 in the widthwise direction of the ink cartridge mounting portion S and the guide groove 236 is near the lock release portion 238 in the widthwise direction of the ink cartridge 200, the lock release portion 238 reliably abuts against the lock releasing operation rib 150 and retracts it when the ink cartridge 200 is mounted in the ink cartridge mounting portion S. Moreover, because the spring 114 member presses the ink cartridge 200 downward from above the partition walls 110 in the vicinity of the guide protrusion walls 120, operations for retracting the lock releasing operation rib 150 are more reliable.

**[0128]** As shown in Figs. 29 and 35, the ink cartridge 200 includes the sensor accommodation groove 240 and the guide groove 236 as openings in the front surface wall 234 and in the underside surface at positions that are disposed on either sides of the ink supply hole 260 as viewed from the front surface wall 234 side. The sensor accommodation groove 240 is for accommodating the residual ink detecting photo sensor 170. The guide groove 236 is for accommodating the guide protrusion walls 120. The sensing arm end portion 367 is inserted between the infrared light emitting portion 172 and the infrared light receiving portion 174 and is movably housed in the protrusion portion 372. Because the protrusion portion 372 protrudes into the sensor accommodation groove 240 and the lock release portion 238 is provided adjacent to the guide groove 236, the ink cartridge 200 can be configured flat and can be smoothly and stably moved across the base wall 32 of the ink cartridge mounting portion S. The ink cartridge 200 can be easily attached and detached. Moreover, the amount of residual ink can be reliably detected by merely mounting the ink cartridge 200 in the ink cartridge mounting portion S.

**[0129]** The ink cartridge 200 of the present embodiment is mounted in the ink cartridge mounting portion S as shown in Figs. 30 to 35.

**[0130]** The user pivots the front surface cover 50 open to expose the ink cartridge holding portion P. Then, the user inserts the ink cartridge 200 into the front surface opening portion O of the ink cartridge mounting portion S and slides the lower surface of the ink cartridge 200 over the cartridge holding portion base wall 32. As a result, first as shown in Figs. 30 and 31, the front surface wall 234 retracts the pull-out-lock protrusion 160. After-

ward, as shown in Fig. 32, the pull-out-lock protrusion 160 continues to be retracted by the bottom central axis rib 244 while the cartridge slides forward. The guide groove 236 engages with the guide protrusion walls 120 and is slid further. When the lock release portion 238 of the front surface wall 234 hits the lock releasing operation rib 150, the lock member 180 releases the lock of the needle protection plates 130 (lowers the pressing plate 140). Afterward, as shown in Fig. 33, the needle protection plate 130 retracts when the front surface wall 234 of the ink cartridge 200 presses the needle protection plates 130. When the ink cartridge 200 is moved further forward and is completely inserted into the ink cartridge mounting portion S, the ink introducing hollow needle 82 pierces the ink supply rubber plug 262 (Fig. 39 (a)) in the ink supply hole 260. Afterward, as shown in Figs. 34 and 35, the front surface wall 234 abuts the rubber cap 93 of the positive pressure application members 91. The cartridge is pressed in against the force of the spring 94 of the positive pressure application members 91 until it proceeds a bit further. At this time, it is desirable that the front surface of the cartridge abut against a stopper wall (not shown) so that forward progress of the cartridge is blocked. Afterward, although the cartridge moves back a small bit by the force of the spring 94, the pull-out-lock protrusion 160 engages in the leak preventing lock indentation 246 at the under surface of the cartridge. As a result, the cartridge is locked in place and is prevented from pulling out. In this way, the ink cartridge 200 is mounted in the ink cartridge mounting portion S. Because the front surface wall 234 of the ink cartridge 200 abuts the ring-shaped resilient seal member 93 with a substantially flat portion thereof, the atmosphere connection hole 280 and the positive pressure hole 98 of the ring-shaped resilient seal member 93 are reliably brought into fluid communication without any air leaks.

**[0131]** Because the black ink cartridge has a wider width than the other color ink cartridges, the black ink cartridge cannot be mistakenly inserted into an ink cartridge mounting portion S for a color ink cartridge. On the other hand, the other color ink cartridges can conceivably be mistakenly inserted into the mounting portion for black ink cartridges. However, the widthwise direction distance Lb1 between the guide groove 236 and the sensor accommodation groove 240 in the color ink cartridges is narrower than the widthwise direction distance Lb2 between the guide protrusion wall 120 and the residual ink detecting photo sensor 170 in the housing portion for the black ink cartridge. Accordingly, the front surface of the cartridge will abut against the sensor guards 176 and not proceed any further forward even if the guide groove 236 engages with the guide protrusion wall 120 and the ink cartridge is slid. Even if the width of the color cartridges were large enough to insert between guide protrusion wall 120 in the housing portion for the black cartridge and the partition wall 110 at the side farther from the guide protrusion wall 120, the lock

releasing operation rib 150 cannot be retracted unless the guide groove 236 is engaged with the guide protrusion wall 120. Therefore, the needle protection plate 130 cannot be retracted so the front surface of the cartridge abuts against the needle protection plate 130 and the ink introducing hollow needle 82 cannot be inserted into the ink supply hole 260.

**[0132]** When the ink cartridge 200 is mounted in the ink cartridge mounting portion S, the ink introducing hollow needle 82 supplies ink from inside the ink accommodation portion 300 to the buffer tank 84. The ink from the buffer tank 84 is supplied to the ink jet head 70 through the ink-supply tube T in association with recording operations.

**[0133]** Although the positive pressure pump 36 is stopped during normal printing operations and during waiting times, the inside of the ink cartridge 200 is applied with atmospheric pressure in the atmosphere chamber 290 inside the ink cartridge 200 through the pump 36, the positive pressure application tubes 92, the positive pressure application members 91, and the atmosphere connection hole 280. For this reason, the flexible film 302 deforms in association with reduction in ink without applying pressure to the ink, and the preformed shape of the flexible film 302 substantially follows the tub portion 320 and comes into intimate contact with the tub portion 320. Therefore, the pressure of the ink supplied to the ink jet head 70 can be maintained fairly fixed and ejection of ink from the ink jet head 70 can be stabilized. The amount of remaining ink can be reduced because the flexible film 302 ends up in intimate contact with the tub portion 320, substantially following the tub portion 320. Furthermore, at least a portion of the tub portion 320 is the curved surface portion 324, whose cross-sectional surface area decreases in association with distance from above (the open side) of the tub portion 320. Therefore, the flexible film 302 can easily follow the tub portion 320 when only a little amount of ink remains. The amount of residual ink can be reduced and pressure of the ink supplied is maintained substantially fixed to the very end.

**[0134]** The ink cartridge mounting portion S in which the ink cartridge 200 is mounted is positioned lower than the ink jet head 70 in the vertical direction. For this reason, (refer to Fig. 3) the difference in pressure head constantly applies a negative pressure on the ink in the nozzles of the piezoelectric ink jet head 70 in the same manner as a general ink jet recording device. However, under normal conditions the surface tension of the meniscus of the ink in the nozzles maintains the ink in the nozzle against the negative pressure. After the operation of the well-known purge unit 78, that is, after covering the nozzles with a cap and sucking ink from the nozzles using the pump, the ink with bubbles in the cap when suction operations by the pump are stopped enter the nozzles by the difference in pressure head. There is a chance that defective ejection can occur later when printing operations are performed by the ink jet head 70.

In the present embodiment, the positive pressure pump 36 is operated after purge operations until the cap is opened up. Operation of the positive pressure pump 36 can be started during purge operations as well. As a result, the positive pressure air flow is supplied into the atmosphere chamber 290 in the cartridge. A positive pressure is applied to the ink through the flexible film 302. As a result, a positive pressure can be applied from the cartridge side to ink in the nozzles of the ink jet head 70 and bubbles can be prevented from being drawn into the nozzles. It should be noted that at this time pressure applied by the positive pressure pump 36 can be a pressure sufficient so that bubbles do not enter the nozzles. Although there is no need to apply a pressure large enough to positively press ink out from the nozzles, such a large pressure can be used.

**[0135]** As the ink cartridge 200 is being mounted in the ink cartridge mounting portion S, the atmosphere connection hole 280 abuts against the positive pressure application members 91 after the ink introducing hollow needle 82 pierces the ink supply rubber plug 262 in the pull-out-lock protrusion 160. (Explained in more detail, as shown in Fig. 35, the distance A in the ink cartridge mounting portion S between the needle hole in the ink introducing hollow needle 82 and the front surface of the rubber cap 93 of the positive pressure application member 91 is larger than the distance B that the ink supply rubber plug 262 blocks the inside of the ink supply hole 260 from the front surface of the ink cartridge 200.) When the ink cartridge 200 is pulled out from the ink cartridge mounting portion S, the ink introducing hollow needle 82 pulls out from the rubber plug 262 inside the ink supply hole 260 after the atmosphere connection hole 280 separates from the positive pressure application members 91. Accordingly, even if the ink cartridge 200 pulls out from the ink cartridge mounting portion S while the positive pressure pump 36 is applying positive pressure to the ink cartridge 200, the atmosphere connection hole 280 would first separate from the positive pressure application members 91 while the ink introducing hollow needle 82 remains in its pierced condition. Therefore, ink can be prevented from leaking out from the ink cartridge 200.

**[0136]** When the ink cartridge 200 is mounted in the ink cartridge mounting portion S, then as shown in Fig. 35 the infrared light emitting portion 172 and the infrared light receiving portion 174 of the residual ink detecting photo sensor 170 are accommodated in the sensor accommodation groove 240 so as to sandwich the protrusion portion 372, which accommodates the sensing arm end portion 367 (sensing point) of the sensor lever 360. Accordingly, the sensing arm end portion 367 (sensing point) of the sensor lever 360 is positioned between the infrared light emitting portion 172 and the infrared light receiving portion 174. By doing this, the ink sensing mechanism for detecting the condition of when the ink cartridge 200 runs out of ink is completed. That is, the sensor portion 170 (light emitting portion 172 + light re-

ceiving portion 174) of the ink sensing mechanism of the present embodiment is provided in the ink cartridge mounting portion S. The lever (the black resin sensor lever 360) that senses whether the sensor portion 170 is ON or OFF is provided in the ink cartridge 200 so that the ink sensing mechanism can be completed by mounting the ink cartridge 200 to the ink cartridge mounting portion S.

**[0137]** As explained previously, the sensor lever 360 moves the sensing arm end portion 367 (sensing point) vertically in accordance with the amount of residual ink. When a sufficient amount of ink remains, the sensing arm end portion 367 is positioned between the infrared light emitting portion 172 and the infrared light receiving portion 174 and blocks the infrared light. When the ink is almost all gone, the sensing arm end portion 367 pulls out from between the infrared light emitting portion 172 and the infrared light receiving portion 174 so that the infrared light receiving portion 174 receives infrared light. As a result, a person skilled in the art can easily convert presence or absence of ink into an electric signal and control operations of the recording device. The sensor 170 can be used to detect whether the ink cartridge is mounted, and not merely detect presence or absence of ink.

**[0138]** The ink cartridge 200 of the present embodiment is configured only from resin parts. The basic configuration of the ink cartridge 200 is a film pulled over a resin case with ink held in between. That is, a single sheet of film is pulled across the tub portion 320 of the main case 230 and ink is filled in between the main case 230 and the film. By mounting the lid 210 onto the main case 230, the user is prevented from directly touching the film or breaking the film.

**[0139]** Explained in more detail, the main case 230 is made from resin that has a high resistant to dissolving properties of ink. In this example, the main case 230 is made from non-additive type polypropylene (PP) which has no additives included therein. If additives were included in the polypropylene, the ink could dissolve the additives because the main case 230 (the ink-holding portion 310) contacts the ink directly. On the other hand, the lid 210 is made from additive-type polypropylene (PP) with additives added for maintaining strength because the lid 210 does not contact the ink directly. In this way, the main case 230 and the lid 210 can be coupled together using ultrasonic welding because both are made from the same resin material (PP).

**[0140]** In the present embodiment, the ink accommodation portion 300 is defined between the tub portion 320 and the flexible film 302. The ink can be used up completely because no foam is used to hold the ink. Because the ink cartridge 200 is made only from resin without using any foam, no dioxin is generated when the ink cartridge 200 is burned after the ink is used up. This reduces adverse influence on the environment from waste materials. Also, there is no need to provide tab portions or a spout as would be required if the ink ac-

commodation portion 300 were a bag shape. Therefore, a large amount of ink can be accommodated in the case with only a small volume. According to the present embodiment, the ink accommodation portion 300 can be prepared with a simple configuration of merely preparing a concave holding vessel and covering it with film. This simple configuration can be easily redesigned as needed.

**[0141]** According to the present embodiment, the flexible film 302 is a two-layer configuration. That is, the flexible film 302 is prepared by adhering together an inner layer made from polypropylene (30 $\mu$ m thick), which has heat fusing properties, and an outer layer made from nylon, which has heat resistance and shock resistance. The polypropylene (30 $\mu$ m thick) is a no-additive type with almost no additives included therein. Because the inner layer contacts the ink, the inner layer would dissolve in the ink if the inner layer included additives. However, polypropylene (30 $\mu$ m thick) is extremely weak against mechanical shock. For this reason, the outer layer of nylon is provided to absorb shock. The two-layer configuration made from the inner layer made from polypropylene (30 $\mu$ m thick) and the outer layer made from nylon has the property of stretching when heat is applied and is also permeable to air and other gases. As will be described later, this is extremely desirable to be used for the flexible film 302 of the present embodiment.

**[0142]** According to the present embodiment, the double-layer flexible film 302 described above is formed in a manner to be described below to bulge outward when attached to the ink-holding portion 310. The flexible film 302 is made from an inner layer 302a made from polypropylene (30 $\mu$ m thick) and an outer layer 302b made from nylon.

**[0143]** As shown in Fig. 37 (a), the flexible film 302 is disposed so as to cover the open portion of the tub portion 320 while the flexible film 302 is in a flat condition. Then heat is applied to the opening peripheral edge 312 through the flexible film 302. As a result, only the inner layer 302a melts and is heat fused to the opening peripheral edge 312. Next, as shown in Fig. 37 (b), a vacuum device not shown is connected to the ink supply hole 260, which is in fluid communication with the tub portion 320. The vacuum device is used to exhaust air and other gases from the space between the flexible film 302 and the tub portion 320 to develop a vacuum condition in the space. Atmospheric pressure applied to the flexible film 302 from outside moves the flexible film 302 into intimate contact with the tub portion 320. At the same time that the vacuum is applied, heat is applied to the flexible film 302 overall by an external heat source (not shown) provided above the flexible film 302. As a result, the flexible film 302 plastically deforms into a shape that follows the tub portion 320. As a result, the flexible film 302 is formed so as to cling precisely to the tub portion 320. As a result, the flexible film 302 is formed in a shape that is modeled on the base surface of the tub portion 320. When ink is introduced between



the tub portion 320 and the flexible film 302, the flexible film 302 expands in the direction that separates it from the tub portion 320 so that ink with twice the volume of the tub portion 320 can be accommodated. As ink is used up, the flexible film 302 approaches the tub portion 320. When ink is completely used up, the flexible film 302 completely clings to the tub portion 320. Accordingly, ink can be completely used up.

**[0144]** Although the nylon of the outer layer 302b is positioned at a location that is nearer to the external heat source (not shown) the nylon will not melt because it has heat resistance. On the other hand, the polypropylene layer of the inner layer 302a will merely plastically deform without melting because it is located far from the external heat source. Accordingly, the flexible film 302 will not melt because of the external heat source, which would be a potential problem if the flexible film 302 were made from a single layer of polypropylene.

**[0145]** If an attempt were made to press the flexible film 302 by pressure rolling, there would be a potential risk that wrinkles would form in the flexible film 302 and ink and air might leak. However, these problems do not occur when the above-described method is used.

**[0146]** Moreover, the present embodiment uses a method wherein the curved surface portion 324 itself is used as the mold and the flexible film 302 is stretched to transfer the form of the curved surface portion 324 to the flexible film 302. Accordingly, the curved surface portion 324 can be formed in any optional form and the flexible film 302 can be easily formed to follow that optional form. Accordingly, changes in shape of the tub portion 320 can be easily dealt with. The flexible film 302 can be prevented from sticking to the curved surface portion 324 during the above-described heating process by forming the plurality of ink injection groove 330 and the ink supply groove 332 to be described later or by forming graining on the curved surface portion 324.

**[0147]** Further, fewer processes are required than if a plurality of flexible films 302 were pressed into a bulging shape and then attached to the opening peripheral edge 312. Therefore, the risk of foreign objects entering into the ink accommodation portion 300 is reduced. Moreover, simple facilities will suffice because no separate metal mold for a pressing operation is required.

**[0148]** It should be noted that the inner layer 302a and the outer layer 302b can be made from two types of polypropylene with different characteristics by making the outer layer 302b from additive type polypropylene, which is difficult to melt, instead of nylon, and the inner layer 302a from non-additive type polypropylene.

**[0149]** As shown in Fig. 38, a mold 400 can be provided on the tub portion 320. The mold 400 is provided separately and has a concave shape that is symmetric with the shape of the tub portion 320. In this case, after the flexible film 302 is heat fused to the opening peripheral edge 312 in a flat condition, pressurized air is pushed in between the flexible film 302 and the tub portion 320 through the ink supply hole 260 while heating

up the mold 400. As a result, the flexible film 302 expands and the indented shape of the mold 400 is transferred to the flexible film 302. It should be noted that pressure in the space between the flexible film 302 and the mold 400 can be reduced instead of increasing the pressure inside the internal space between the flexible film 302 and the tub portion 320 by pushing air into the space.

**[0150]** Next, the method of injecting ink in between (ink accommodation portion 300) the tub portion 320 and the flexible film 302 formed in the bulging shape will be explained below with reference to Figs. 39 (a) and 39 (b).

**[0151]** As shown in Fig. 39 (a), a back-flow prevention valve 264 and the ink supply rubber plug 262 (silicone rubber bush) are provided inside the ink supply hole 260. An ink injection rubber plug 272 (silicone rubber bush) is provided inside the ink injection hole 270. The ink injection rubber plug 272 is connected to the ink supply rubber plug 262 by a link portion 266. An ink injection needle insertion indentation 274 and a plug peak 276 are formed in the ink injection rubber plug 272 at mutually offset positions. Although the rubber plugs 262, 272 are pierced by needles in a manner to be described later, the rubber plugs 262, 272 have the quality of closing up the pierced portion by their own resilience after the needles are pulled out.

**[0152]** First, as shown in Fig. 39 (a), the ink supply rubber plug 262 and the ink injection rubber plug 272 are engaged in the ink supply hole 260 and the ink injection hole 270. The ink injection rubber plug 272 is fitted partially in the ink injection hole 270 to the condition wherein the plug peak 276 is separated from the ink injection connection pathway 278. While the front surface wall 234 of the main case 230 is in a posture facing vertically upward, an air-removing hollow needle 502 pierces the ink supply rubber plug 262 and an ink injection needle 504 pierces the ink injection rubber plug 272 until the needles 502, 504 are exposed in the internal indentation portions of the corresponding rubber plugs. The air-removing hollow needle 502 is in fluid communication with an air removing vacuum pump not shown and the ink injection needle 504 is in fluid communication with an ink pump. Air is drawn from inside the ink accommodation portion 300 through the ink supply hole 260 to establish a vacuum inside the ink accommodation portion 300. Then, the ink pump is operated to inject ink into the ink injection hole 270. Because the ink injection needle insertion indentation 274 is so narrow, it is impossible to remove all air remaining in the ink injection needle insertion indentation 274 regardless of how high a vacuum is established. Moreover, when air mixes in the ink accommodation portion 300 there is a danger that the air will bulge out and cause a false detection in the residual amount or obstruct supply of ink to the head. For this reason, the ink injection rubber plug 272 is pressed completely into the ink injection hole 270 after ink injection is completed. As shown in Fig. 39 (b), this

results in the plug peak 276 completely blocking up the ink injection connection pathway 278. Accordingly, the slight amount of air remaining inside the ink injection needle insertion indentation 274 is prevented from entering inside the ink accommodation portion 300.

**[0153]** As shown in Fig. 15, the ink injection groove 330 is in fluid communication with the ink injection hole 270 (the ink injection connection pathway 278) and is formed to suitably follow the curved surface portion 324 so that ink flows around the tub portion 320. When ink is injected, the ink follows the ink injection groove 330 and enters the tub portion 320. Therefore, air removal is enhanced. An air removal/ink supply groove 332 is in fluid communication with the ink supply hole 260 (the ink supply connection pathway 268), is formed to suitably follow the curved surface portion 324, and moreover is in fluid communication with ink injection groove 330. Therefore, air is more easily removed during air removal. That is, even if the flexible film 302 clings intimately to the curved surface portion 324 during air removal, air can be removed from the entire ink accommodation portion 300 because an air-removal space is opened by the air removal/ink supply groove 332. It should be noted that any valley-shaped surface can enhance the ability to remove air from the ink accommodation portion 300. For example, instead of or in addition to the air removal/ink supply groove 332, the tub portion 320 can be formed with a grained surface, wherein valleys are formed between the grains of the grain surface. The valleys are in fluid communication with the ink injection groove 330 and so enhance air removal. Also, the encompassing edge 322 or bumps can be extended around the lowest position of the curved surface portion 324, that is, the semispherical pivot 365 so that ink flow can be positively controlled when ink is supplied to the ink jet head. For example, ink can be easily drawn from the lower position even if only a little ink remains and the force at which the flexible film 302 and the curved surface portion 324 cling to each other can be reduced so that an increase in back pressure can be prevented.

**[0154]** After ink is introduced into the ink accommodation portion 300, the lid 210 is mounted onto the main case 230 and the ink cartridge 200 is completed. Afterward, the ink cartridge 200 is packaged into a vacuum pack. That is, as shown in Fig. 36, the entire ink cartridge 200 is encompassed by a sheet 500 of resin film material and then exhausted to a vacuum condition. Because the ink jet head 70 ejects ink using pressure waves, any bubbles in the ink absorb pressure so that ink may not be properly ejected. The bubbles form and grow over time from air dissolved in the ink. Therefore, the ink cartridge 200 is vacuum packaged in order to restrict the amount of dissolved air in the ink filling the ink cartridge 200.

**[0155]** The ink injected into the ink accommodation portion 300 already has air removed to a certain extent. That is, the amount of air component of the ink is about 30 to 35% of the saturation amount. The ink accommo-

dation portion 300 is filled with this ink and the entire ink cartridge 200 is encompassed within the film material. When a vacuum condition is then established within the film material, the air in the ink passes through the flexible film 302, which is formed from polypropylene and nylon, and the wall of the main case, which is prepared from a resin made from polypropylene, and is drawn inside the vacuum package. Air is further removed from the ink in the ink cartridge. After a few days elapse, the air component of the ink in the ink cartridge can drop to about 20% of a saturation condition. Accordingly, ink with a high level of air removal can be provided to users by providing the ink cartridge to users in a vacuum packaged condition.

**[0156]** When the ink cartridge 200 is mounted in the ink cartridge mounting portion S, the ink introducing hollow needle 82 is inserted into the ink supply rubber plug 262 of the ink supply hole 260. The ink introducing hollow needle 82 is in fluid communication with the ink jet head 70 through the buffer tank 84 and the ink-supply tube T. Air that is dissolved in the ink grows with time into bubbles and clings to the inner walls of buffer tank 84 and the ink-supply tube T. The bubbles can grow even larger during to changes in temperature and the like. The back-flow prevention valve 264 in the ink supply hole 260 is designed to block the ink supply hole 260 even if a slight external pressure is applied. Accordingly, the back-flow prevention valve 264 will close even when bubbles grow in the buffer tank 84 and the ink-supply tube T so that a slight pressure is applied to the back-flow prevention valve 264. On the other hand, the back-flow prevention valve 264 moves freely with respect to the pull of ink by the piezoelectric ink jet head 70. For this reason, although the back-flow prevention valve 264 can supply any amount of ink, the back-flow prevention valve 264 closes from pressure applied by bubbles so that bubbles can be prevented from entering into the ink accommodation portion 300 of the ink cartridge. Accordingly, problems, such as bubbles entering into the ink cartridge and bubbles entering from the ink cartridge into the head and causing defective ejections, can be prevented.

**[0157]** In the present embodiment, the ink injection hole 270 and the ink supply hole 260 are provided separately so that they can be provided so as to open aligned in the left-right direction at the front surface of the ink cartridge. Only a single hole is provided in the front surface of the ink cartridge. If vacuum operations, ink injection, and ink supply were all performed through this hole, then the same rubber plug mounted in the hole would need to be pierced by needles three times. The hole diameter itself would need to be enlarged to insure that the needles pierced three different positions. According to the present invention, each hole can have a small diameter because the holes for ink injection and ink supply are divided separately. The ink cartridge can be formed thin because the holes are aligned in the left-right direction.

**[0158]** So that the ink supply hole 260 can also be used to create a vacuum during ink injection, the position where the air-removing hollow needle 502 pierces the ink supply rubber plug 262 should be different than the position where the ink introducing hollow needle 82 pierces the ink supply rubber plug 262 when the ink cartridge 200 is mounted in the ink cartridge mounting portion S. According to the present embodiment, as shown in Fig. 20 the ink supply hole 260 is formed in the front surface wall 234 in the substantial height wise and widthwise direction center. Because the protrusion portion 235 is formed in the approximate center in the widthwise direction of the front surface wall 234, the height (thickness) of the ink cartridge 200 is greater at the protrusion portion 235 than at the widthwise ends. Therefore, the ink supply hole 260 can be formed with a larger diameter and the ink supply rubber plug 262 can be formed with a larger diameter. The air-removing hollow needle 502 can easily be inserted into a position of the ink supply rubber plug 262 that differs from the position pierced by the ink introducing hollow needle 82.

**[0159]** The ink cartridge 200 according to the present embodiment is sealed in a vacuum package. At this time, pressure is applied that pushes the main case and the lid 210 together. In order to resist this pressure, according to the present embodiment the spherical outward curved portion 212 of the lid 210 and the tub portion 320 are formed in an approximately curved shape and a configuration that is reinforced by ribs is used.

**[0160]** As shown in Fig. 40, according to the present embodiment the spherical outward curved portion 212 of the lid 210 is formed so that the ink accommodation periphery portion 216 at the periphery of the spherical outward curved portion 212 is positioned slightly outside from the internal edge of the opening peripheral edge 312 of the main case side. That is, an inner peripheral edge portion 216a of the ink accommodation periphery portion 216 confronts the intermediate portion of the outer edge and the inner edge of the opening peripheral edge 312. If the inner peripheral edge portion 216a were positioned to the inside of the inner periphery of the opening peripheral edge 312, there is a danger that the inner peripheral edge portion 216a would abut against and damage the flexible film 302 when the lid 210 and the tub portion 320 approach each other under the force from the vacuum pack. However, according to the present embodiment, the lid 210 abuts the position slightly outside from the inner edge of the opening peripheral edge 312, that is, from above the opening peripheral edge 312. The flexible film 302 is firmly welded onto the opening peripheral edge 312 and integrated with the resin of the main case 230. Accordingly, the ink accommodation periphery portion 216 of the lid 210 will not damage the flexible film 302 even if it directly abuts the flexible film 302 on the opening peripheral edge 312.

**[0161]** Next, ink cartridges according to first through twelfth modifications of the embodiment will be described with reference to Figs. 41 to 53 (b).

**[0162]** Fig. 41 shows an ink cartridge 200 according to a first modification of the embodiment, wherein the guide groove 236 and the sensor accommodation groove 240 are shaped open to the side walls 232. In this case, the ink cartridge 200 is guided by sliding the guide groove notch indentation portion 236' to follow the side surface that corresponds to the guide protrusion wall 120. Fig. 42 shows configuration of the recording device 1 modified for the ink cartridge 200 of Fig. 41. The lock releasing operation rib 150 is provided near the guide protrusion wall 120 to the side at which the ink introducing hollow needle 82 is disposed. The portion of the front surface wall 234 of the ink cartridge 200 that corresponds to the position below the atmosphere connection hole 280 functions as the lock release portion 238.

**[0163]** Figs. 43 (a) and 43 (b) show an ink cartridge 200 according to a second modification of the embodiment, wherein the plurality of ribs 243 are arranged in a tortoise shell configuration.

**[0164]** Figs. 44 (a) and 44 (b) show an ink cartridge 200 according to a third modification of the embodiment, wherein the plurality of ribs 243 are arranged in a circle concentric with the encompassing edge 322.

**[0165]** Figs. 45 (a) and 45 (b) show an ink cartridge 200 according to a fourth modification of the embodiment, wherein the plurality of ribs 243 are arranged in a diamond shape;

**[0166]** Figs. 46 (a) and 46 (b) show an ink cartridge 200 according to a fifth modification of the embodiment, wherein the lower surface of the ink cartridge 200 is smooth with no ribs.

**[0167]** Figs. 47 (a) and 47 (b) show an ink cartridge 200 according to a sixth modification of the embodiment, wherein the grasping portion 202 and the side walls 232 are shaped differently than in the embodiment.

**[0168]** Figs. 48 (a) and 48 (b) show an ink cartridge 200 according to a seventh modification of the embodiment, wherein the grasping portion 202 and the side walls 232 are shaped differently than in the embodiment.

**[0169]** Figs. 49 (a) and 49 (b) show an ink cartridge 200 according to an eighth modification of the embodiment, wherein the grasping portion 202 and the side walls 232 are shaped differently than in the embodiment.

**[0170]** Figs. 50 (a) and 50 (b) show an ink cartridge 200 according to a ninth modification of the embodiment, wherein the grasping portion 202 and the side walls 232 are shaped differently than in the embodiment.

**[0171]** Figs. 51 (a) and 51 (b) show an ink cartridge 200 according to a tenth modification of the embodiment, wherein the grasping portion 202 and the side walls 232 are shaped differently than in the embodiment.

**[0172]** Figs. 52 (a) and 52 (b) show an ink cartridge 200 according to an eleventh modification of the embodi-

iment, wherein the portion 212 has a tortoise shell pattern instead of a spherical outward curved shape.

[0173] Figs. 53 (a) and 53 (b) show an ink cartridge 200 according to a twelfth modification of the embodiment, wherein the portion 212 has a square shape instead of a spherical outward curved shape.

[0174] While the invention has been described in detail with reference to a specific embodiment and modifications thereof, it would be apparent to those skilled in the art that various changes and modifications may be made therein without departing from the spirit of the invention, the scope of which is defined by the attached claims.

[0175] For example, the configurations of the needle protection plate 130, the lock member 180, and the leak preventing lock member 190 are not limited to those shown in Fig. 11.

## Claims

1. A combination of a recording device and an ink cartridge, comprising:

a recording device including:

an open portion with an opening that opens in a horizontal direction to outside;

a floor surface that extends in the horizontal direction;

a ceiling surface that extends in the horizontal direction, an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface;

a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in a needle axial direction;

a cover selectively covering and uncovering the hollow needle with respect to the open portion;

a lever that moves the cover to uncover the needle, the lever being positioned nearer the open portion than is the cover;

a protruding wall positioned on the floor surface adjacent to the lever, the protruding wall extending in the needle axial direction; and

a sensor portion including a light emitting portion and a light receiving portion in confrontation with each other, the lever and the sensor portion protruding from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction; and

an ink cartridge detachably mounted in the ink cartridge mounting portion, the ink cartridge including:

a lower surface adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device;

a front surface having an ink supply hole inserted with the hollow needle;

a protruding wall indentation portion that accommodates the protruding wall;

an operation portion provided at a position that is adjacent to the protruding wall indentation portion and that corresponds to the position of the lever and that is for operating the lever;

a sensor indentation portion that accommodates the sensor portion; and

a light blocking member that moves corresponding to amount of ink remaining in the ink cartridge, the light blocking member provided in correspondence with the sensor portion so as to protrude into the sensor indentation portion and interpose between the light emitting portion and the light receiving portion when the ink cartridge is mounted in the ink cartridge mounting portion, the sensor indentation portion and the protruding wall indentation portion being formed open at the front surface and the lower surface at a position that sandwiches both sides of the ink supply hole as viewed from the front surface side.

2. A combination as claimed in claim 1, wherein the recording device includes a plurality of ink cartridge mounting portions aligned on the floor surface on substantially the same imaginary plane.

3. A combination as claimed in claim 2, wherein the ink cartridge mounting portions are positioned below a transport pathway for sheets recorded by the recording head.

4. A combination as claimed in claim 1, wherein:

the recording device further includes protrusion portions provided at horizontal ends of the ink cartridge mounting portion, the protrusion portions protruding away from the ceiling surface toward the floor surface; and

the ink cartridge further including an upper surface that extends higher toward the ceiling surface at portions that correspond to in between

the protrusion portions of the recording device than at portions that correspond to the protrusion portions, the protrusion portions regulating height wise position of the ink cartridge when the ink cartridge is inserted in the open portion, the protruding wall indentation portion and the operation portion being provided near the portions of the ink cartridge that correspond to the protrusion portions of the recording device.

5. A combination as claimed in claim 1, wherein the floor surface extends away from the hollow needle farther than the ceiling surface.

6. An ink cartridge for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in an needle axial direction; a cover selectively covering and uncovering the hollow needle with respect to the open portion; a lever that moves the cover to uncover the needle, the lever being positioned nearer the open portion than is the cover; a protruding wall positioned on the floor surface adjacent to the lever, the protruding wall extending in the needle axial direction; and a sensor portion including a light emitting portion and a light receiving portion in confrontation with each other, the lever and the sensor portion protruding from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction, the ink cartridge being detachably mounted in the ink cartridge mounting portion, the ink cartridge comprising:

a lower surface adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device;  
a front surface having an ink supply hole inserted with the hollow needle;  
a protruding wall indentation portion that accommodates the protruding wall;  
an operation portion provided at a position that is adjacent to the protruding wall indentation portion and that corresponds to the position of the lever and that is for operating the lever;  
a sensor indentation portion that accommodates the sensor portion; and  
a light blocking member that moves corresponding to amount of ink remaining in the ink cartridge, the light blocking member provided

in correspondence with the sensor portion so as to protrude into the sensor indentation portion and interpose between the light emitting portion and the light receiving portion when the ink cartridge is mounted in the ink cartridge mounting portion, the sensor indentation portion and the protruding wall indentation portion being formed open at the front surface and the lower surface at a position that sandwiches both sides of the ink supply hole as viewed from the front surface side.

7. An ink cartridge as claimed in claim 6, the ink cartridge further including an upper surface that confronts the ceiling surface of the recording device when the ink cartridge is mounted in the recording device, the upper surface extending higher toward the ceiling surface at portions that correspond to in between protrusion portions, which are provided on the ceiling surface at horizontal ends of the ink cartridge mounting portion and that protrude toward the floor surface, than at portions that correspond to the protrusion portions.

8. An ink cartridge as claimed in claim 7, wherein the front surface has a protruding shape that is higher at portions that correspond to in between protrusion portions and lower at portions that correspond to the protrusion portions, the ink supply hole being formed substantially in the horizontal center of the higher portion of the front surface.

9. An ink cartridge as claimed in claim 6, wherein, when the recording device is configured so that an open portion side tip of the protruding wall is positioned closer to the open portion than is an open portion side tip portion of the sensor portion, an end of the protruding wall indentation portion that is opposite to an end of the protruding wall indentation portion that is open to the front surface is positioned farther from the front surface than is an end of the sensor indentation portion that is opposite to an end of the sensor indentation portion that is open to the front surface.

10. An ink cartridge for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in an needle axial direction; a cover selectively covering and uncovering the hollow needle with respect to the open portion; a lever that moves the cover to

uncover the needle, the lever being positioned nearer the open portion than is the cover; a protruding wall positioned on the floor surface adjacent to the lever, the protruding wall extending in the needle axial direction; and a sensor portion including a light emitting portion and a light receiving portion in confrontation with each other, the lever and the sensor portion protruding from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction, the ink cartridge being detachably mounted in the ink cartridge mounting portion, the ink cartridge comprising:

a lower surface adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device;  
a front surface having an ink supply hole inserted with the hollow needle;  
a protruding wall indentation portion that accommodates the protruding wall; and  
a sensor indentation portion that accommodates the sensor portion, the sensor indentation portion and the protruding wall indentation portion being formed open at the front surface and the lower surface at a position that sandwiches both sides of the ink supply hole as viewed from the front surface side.

11. An ink cartridge as claimed in claim 10, wherein, when the recording device includes protrusion portions that protrude away from the ceiling surface toward the floor surface, the protrusion portions regulate height wise position of the ink cartridge when the ink cartridge is inserted in the open portion.

12. An ink cartridge for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in an needle axial direction; a cover selectively covering and uncovering the hollow needle with respect to the open portion; a lever positioned nearer the open portion than is the cover, the lever, in order to move the cover to uncover the needle, protruding into the ink cartridge mounting portion from a position that is on the floor surface and that is shifted from the needle axial direction in a direction that is parallel with the floor surface; and a protruding wall positioned on the floor surface adjacent to the lever, the protruding wall extending in the needle axial direc-

tion, the lever protruding from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction, the ink cartridge being detachably mounted in the ink cartridge mounting portion, the ink cartridge comprising:

a lower surface adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device;  
a front surface having an ink supply hole connected with the hollow needle;  
a protruding wall indentation portion open to the front surface and the lower surface for accommodating the protruding wall, the protruding wall indentation portion being shifted, with respect to a view from the front surface side, from the ink supply hole in a direction parallel with the lower surface; and  
an operation portion provided at a position that is adjacent to the protruding wall indentation portion and that corresponds to the position of the lever and that is for operating the lever.

13. An ink cartridge as claimed in claim 12, the ink cartridge further including an upper surface that confronts the ceiling surface of the recording device when the ink cartridge is mounted in the recording device, the upper surface extending higher toward the ceiling surface at portions that correspond to in between protrusion portions, which are provided on the ceiling surface at horizontal ends of the ink cartridge mounting portion and that protrude toward the floor surface, than at portions that correspond to the protrusion portions.

14. An ink cartridge as claimed in claim 13, wherein the front surface has a protruding shape that is higher at portions that correspond to in between protrusion portions and lower at portions that correspond to the protrusion portions, the ink supply hole being formed substantially in the horizontal center of the higher portion of the front surface.

15. An ink cartridge for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; right and left side surfaces extending from the floor surface to the ceiling surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion and extending in an needle axial direction; a cover selectively covering and uncovering

the hollow needle with respect to the open portion; a protruding wall positioned on the floor surface, the protruding wall extending in the needle axial direction; and a sensor portion including a light emitting portion and a light receiving portion in confrontation with each other, the sensor portion protruding from the floor surface into the ink cartridge mounting portion at a position shifted from the needle axial direction in a direction parallel with the lower surface, the sensor portion protruding from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction, the ink cartridge being detachably mounted in the ink cartridge mounting portion, the ink cartridge comprising:

a lower surface adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device;  
a front surface having an ink supply hole connected with the hollow needle;

a sensor indentation portion open to the front surface and the lower surface for accommodating the sensor portion, the sensor indentation portion being shifted, with respect to a view from the front surface side, from the ink supply hole in a direction parallel with the lower surface; and

a light blocking member that moves corresponding to amount of ink remaining in the ink cartridge, the light blocking member being provided in correspondence with the sensor portion so as to protrude into the sensor indentation portion and interpose between the light emitting portion and the light receiving portion when the ink cartridge is mounted in the ink cartridge mounting portion.

16. An ink cartridge as claimed in claim 15, wherein, when the recording device includes a plurality of ink cartridge mounting portions with a distance between left and right side surfaces of one ink cartridge mounting portion that is different from a distance between left to right side surfaces of another ink cartridge mounting portion, a distance between one of the left and right side surfaces of the ink cartridge mounted in the one ink cartridge mounting portion and the sensor indentation portion is different from a distance between the other one of the left and right surfaces of an ink cartridge mounted in the other ink cartridge mounting portion and the sensor indentation portion.

17. An ink cartridge as claimed in claim 16, wherein, when the recording device includes protrusion portions that protrude away from the ceiling surface toward the floor surface, the ink cartridge has a height

determined by a distance between the protrusion portions and the floor surface of the recording device when the ink cartridge is inserted in the open portion.

18. An ink cartridge as claimed in claim 16, wherein a fixing wall is provided in the sensor indentation portion, the fixing wall includes an internal groove that extends parallel with direction of insertion into the open portion so that the fixing portion is inserted between the light emitting portion and the light receiving portion, the groove accommodating the light blocking member in a movable condition.

19. An ink cartridge used in a recording device that includes an ink cartridge mounting portion; a connection portion that supplies ink to a recording head; and a sensor portion including a light emitting portion and a light receiving portion in confrontation with each other, the sensor portion protruding into the ink cartridge mounting portion, the ink cartridge comprising:

an outer shape portion that substantially matches the inside of the ink cartridge mounting portion when the ink cartridge is mounted in the ink cartridge mounting portion, the outer shape portion including a contour that receives the sensor portion; and

a light blocking member disposed within the contour of the outer shape portion, the light blocking member moving corresponding to amount of ink remaining in the ink cartridge to one of enter between and move out from between the light emitting portion and the light receiving portion.

20. An ink cartridge as claimed in claim 19, wherein a sensor indentation portion that receives the sensor portion is provided in the contour.

21. An ink cartridge as claimed in claim 19, wherein the outer shape further includes a sensor indentation portion open in a direction for connecting the ink supply hole with a connection portion in the ink cartridge mounting portion, the light blocking member extending in the sensor indentation portion in a direction parallel with a direction for connecting the ink supply hole.

22. An ink cartridge as claimed in claim 21, wherein a fixing wall is provided in the sensor indentation portion, the fixing wall includes an internal groove that extends parallel with direction of insertion into the open portion so that the fixing portion is inserted between the light emitting portion and the light receiving portion, the groove accommodating the light blocking member in a movable condition.

23. An ink cartridge for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; an ink cartridge mounting portion being defined by the open portion, the floor surface, and the ceiling surface; a connection portion that supplies ink to a recording head, the connection portion being positioned in confrontation with the open portion and extending in a connection portion axial direction; and protrusion portions provided at horizontal ends of the ink cartridge mounting portion, the protrusion portions protruding away from the ceiling surface toward the floor surface, the ink cartridge being detachably mounted in the ink cartridge mounting portion, the ink cartridge comprising:

a lower surface adapted to abut against the floor surface and slide from the open portion to a connection portion of the recording device; a front surface having an ink supply hole connectable with the connection portion; and an upper surface that extends higher toward the ceiling surface at portions that correspond to in between the protrusion portions of the recording device than at portions that correspond to the protrusion portions.

24. An ink cartridge as claimed in claim 23, wherein, when the recording device further includes a spring member that is provided at a position nearer the connection portion side of the ceiling surface than the protrusion portions and that protrudes downward, an upper surface is provided that corresponds to the protrusion portions and that extends in a direction for inserting the ink cartridge into the ink cartridge mounting portion so as to slidingly abut the spring member.

25. An ink cartridge as claimed in claim 23, further comprising:

an ink-holding portion disposed in an inner portion that corresponds to the portions of the upper surface that extends higher toward the ceiling surface; and a flexible film that covers the ink-holding portion.

26. An ink cartridge as claimed in claim 23, wherein the front surface has a protruding shape that is higher at portions that correspond to in between protrusion portions and lower at portions that correspond to the protrusion portions, the ink supply hole being formed substantially in the horizontal center of the higher portion of the front surface.

27. An ink cartridge for use with a recording device that includes a hollow needle and an air supply member, the air supply member being adjacent to the hollow needle and having an air supply hole connected to an air pressure source, the ink cartridge comprising:

a case provided therein with an ink chamber; a flexible film that forms a portion of the ink chamber; a resilient plug member that closes off the ink chamber, the hollow needle piercing the resilient plug member and supplying ink from the ink chamber to the recording device; an opening portion formed in the case at a position adjacent to the plug member, the opening portion being open to the ink chamber; and a portion that abuts the air supply member so that the air supply hole covers the opening portion when the ink cartridge is mounted in the recording device.

28. An ink cartridge as claimed in claim 27, wherein, when the recording device further includes a resilient ring-shaped seal member provided at a tip of the air supply hole that abuts the case of the ink cartridge, a portion of the case that abuts against the seal member is substantially flat.

29. An ink cartridge as claimed in claim 27, wherein when the recording device further includes a resilient ring-shaped seal member provided at a tip of the air-supply hole that abuts the case of the ink cartridge, a spring means provided on the air supply hole that urges the seal member toward the case, and a lock means, the case of the ink cartridge includes an indentation portion that engages with the lock means against urging force of the spring means.

30. An ink cartridge as claimed in claim 27, wherein, when the recording device further includes lock means that locks the ink cartridge at a mounted position in the ink cartridge mounting portion, directions for connecting and disconnecting the ink cartridge to and from the hollow needle and the air supply hole are related so that the air supply hole and the opening portion are in fluid communication after the hollow needle and the resilient plug member connect and the air supply hole and the opening portion separate before the hollow needle and the resilient plug member separate.

31. An ink cartridge as claimed in claim 27, wherein when the recording device further includes an open portion with an opening that opens in a horizontal direction to outside, a floor surface that extends in the horizontal direction, a ceiling surface that extends in the horizontal direction, an ink cartridge



mounting portion being defined by the open portion, the floor surface, and the ceiling surface, a cover selectively covering and uncovering the hollow needle with respect to the open portion; a lever positioned nearer the open portion than is the cover, the lever, in order to move the cover to uncover the needle, protruding into the ink cartridge mounting portion from a position that is on the floor surface and that is shifted from the needle axial direction in a direction that is parallel with the floor surface; and a protruding wall positioned on the floor surface adjacent to the lever, the protruding wall extending in the needle axial direction, the lever protruding from the floor surface into the ink cartridge mounting portion at two positions that sandwich therebetween an imaginary extension of the axial needle extending in the needle axial direction, the hollow needle and the air supply hole being disposed at positions in confrontation with the opening portion, the ink cartridge further comprises:

a lower surface adapted to abut against the floor surface and slide from the open portion to the hollow needle of the recording device;  
 a front surface having the opening portion and the ink supply hole;  
 a protruding wall indentation portion open to the front surface and the lower surface for accommodating the protruding wall, the protruding wall indentation portion being shifted, with respect to a view from the front surface side, from the ink supply hole in a direction parallel with the lower surface, the opening portion being positioned between the ink supply hole and the protruding wall indentation portion; and  
 an operation portion provided at a position that is adjacent to the protruding wall indentation portion and that corresponds to the position of the lever and that is for operating the lever.

- 32.** An ink cartridge for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; a plurality of ink cartridge mounting portions aligned mutually next to each other on substantially the same planar surface of the floor surface; a hollow needle that supplies ink to a recording head, the hollow needle being positioned in confrontation with the open portion, the ink cartridge being detachably mounted in the ink cartridge mounting portion, the ink cartridge comprising:

a lower surface adapted to slide following the floor surface from the open portion side in a direction for connecting the ink supply hole to the connection portion;

a front surface having an ink supply hole connecting with the hollow needle; and  
 a rear end portion on a side opposite from the front surface, the rear end portion being exposed from the open portion when the ink cartridge is in a mounted condition, the rear end portion having a width in a direction in which the plurality of cartridge mounting portions are aligned than is narrower than width of the front surface.

- 33.** An ink cartridge as claimed in claim 32, wherein, when the floor surface of the recording device extends further than the ceiling surface in a direction opposite from the hollow needle side, the rear end portion is located on a portion of the floor surface that extends beyond the ceiling surface.

- 34.** An ink cartridge for use with a recording device that includes an open portion with an opening that opens in a horizontal direction to outside; a floor surface that extends in the horizontal direction; a ceiling surface that extends in the horizontal direction; a connection portion that supplies ink to a recording head, the connection portion being positioned in confrontation with the open portion, the floor surface extending further than the open portion in a direction opposite from the connection portion side, the ink cartridge being detachably mounted in the ink cartridge mounting portion, the ink cartridge comprising:

a lower surface adapted to slide following the floor surface from the open portion side in a direction for connecting the ink supply hole to the connection portion;  
 a front surface having an ink supply hole connecting with the hollow needle; and  
 a rear end portion on a side opposite from the front surface, the rear end portion being located on a portion of the floor surface that protrudes from the open portion, the rear end portion being formed on an upper surface thereof with an upwardly protruding rib for catching by a user's finger.

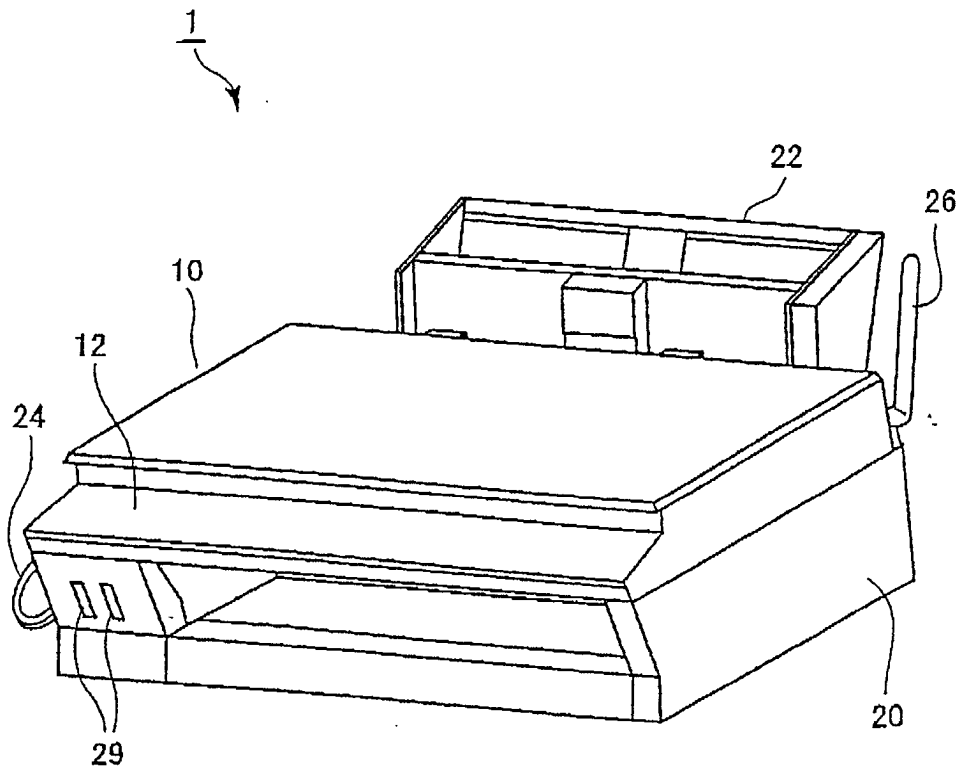


FIG. 1

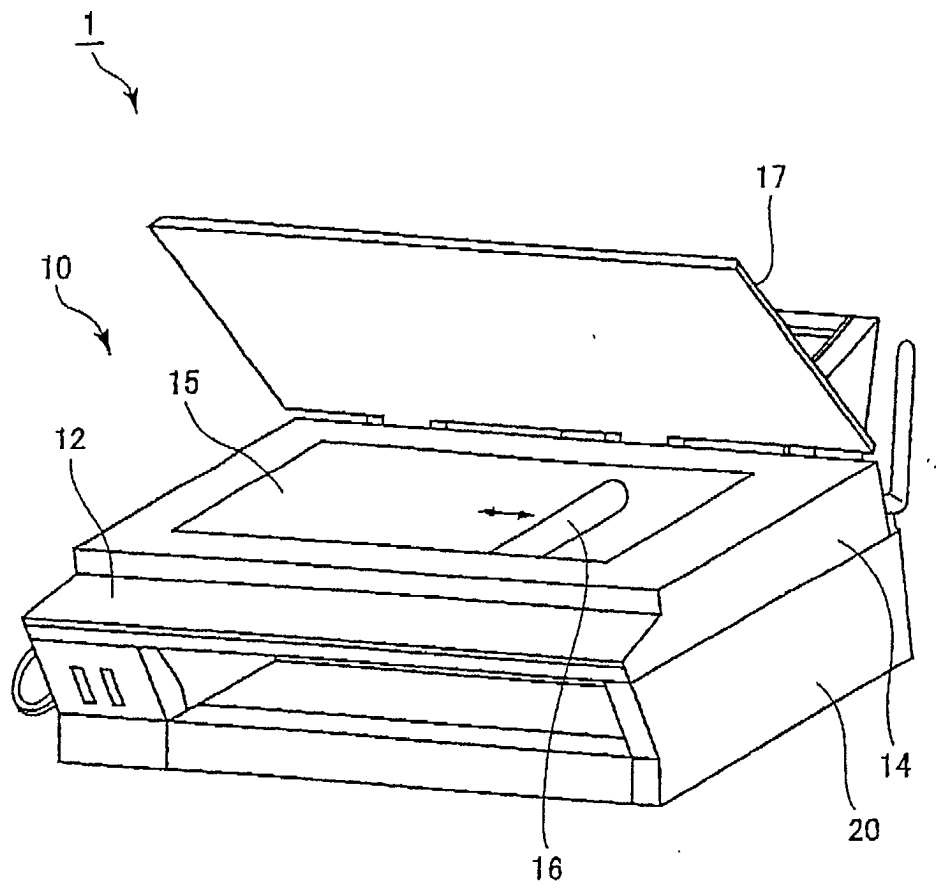


FIG. 2

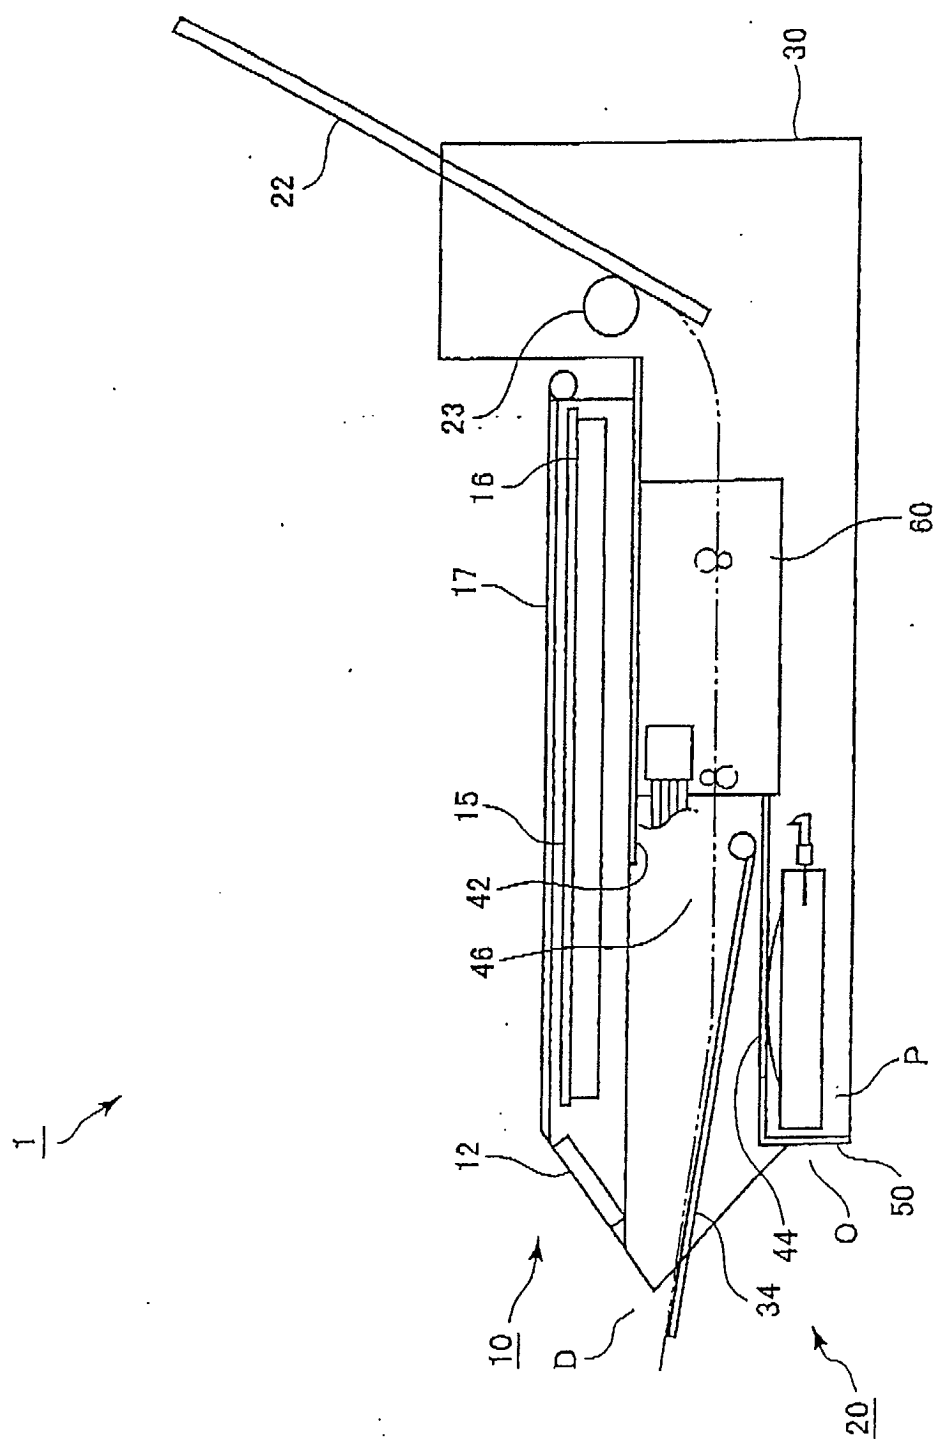


FIG. 3

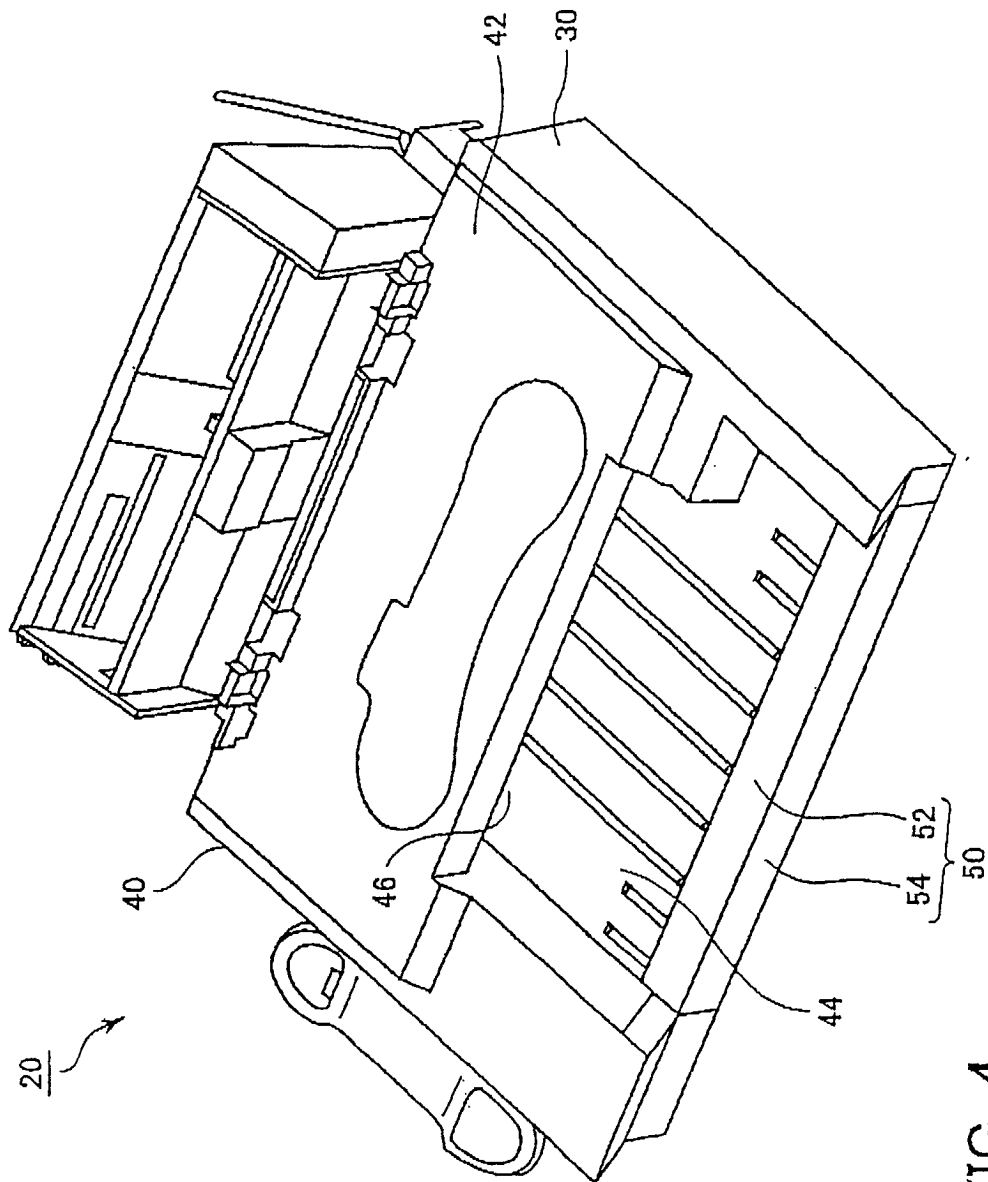


FIG. 4

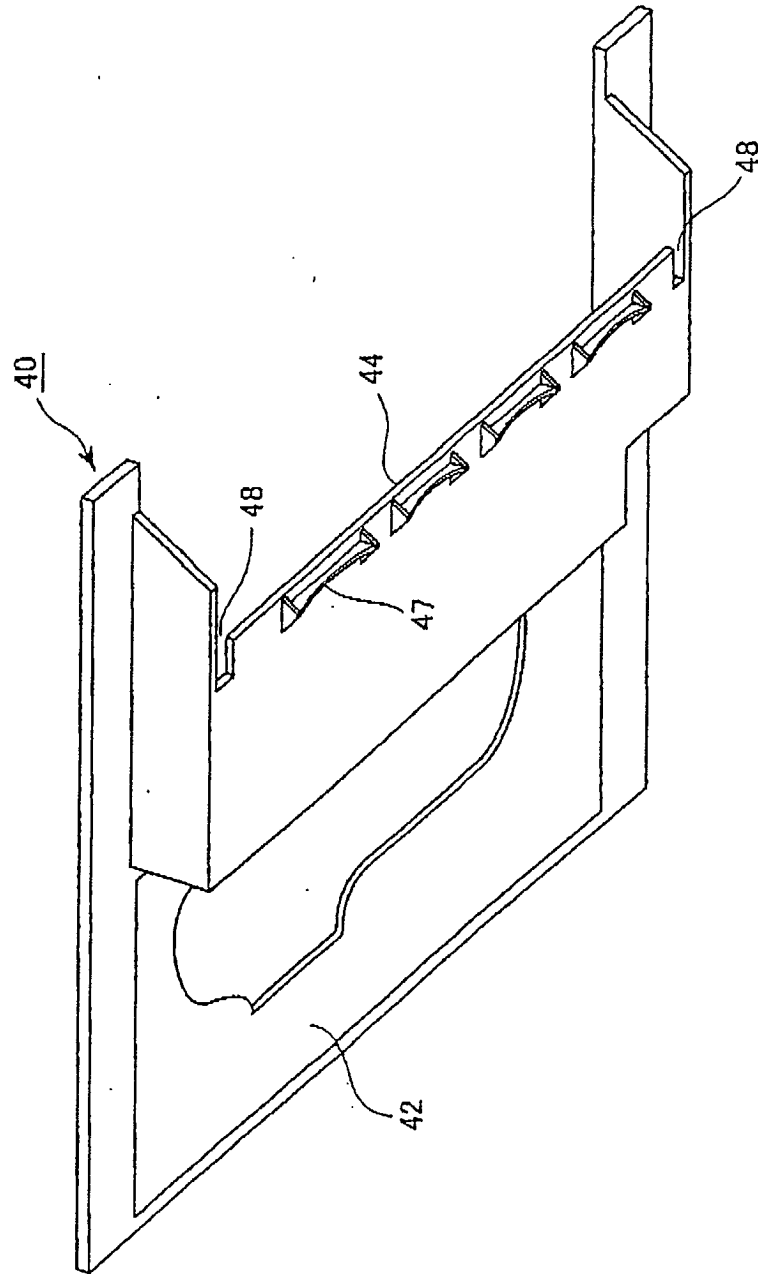


FIG. 5

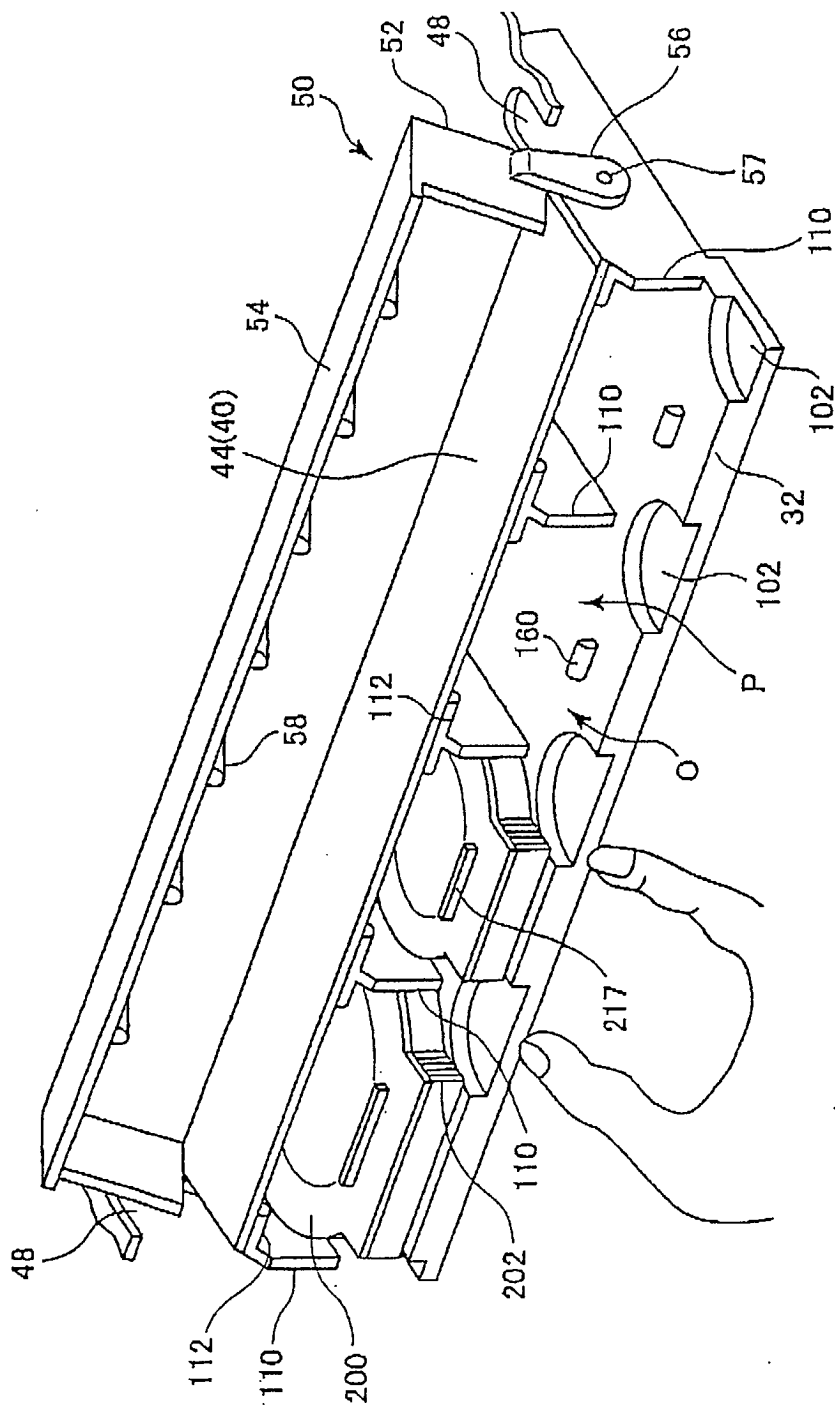


FIG. 6

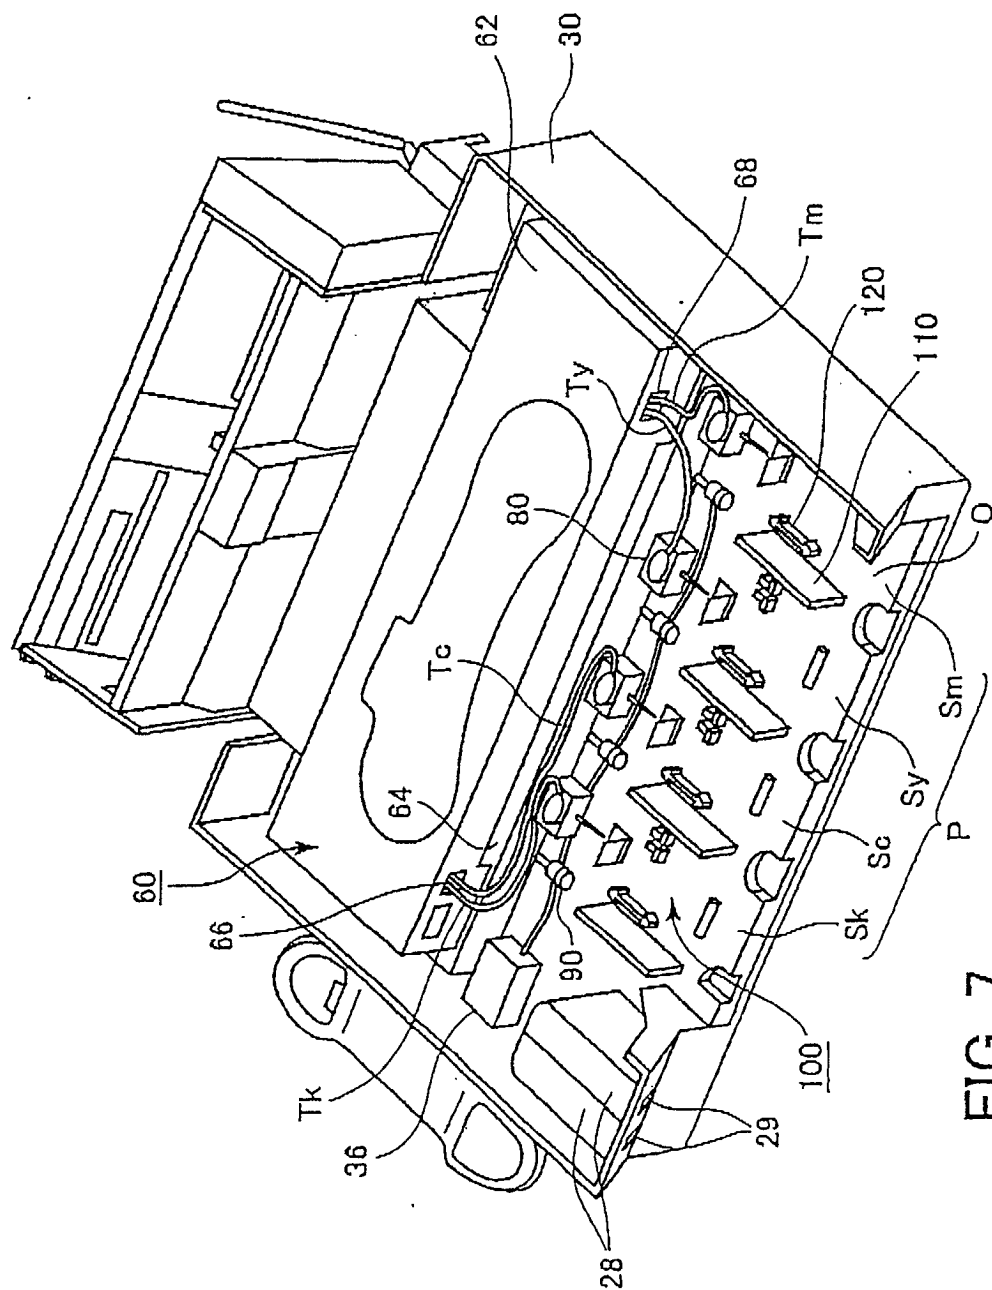


FIG. 7



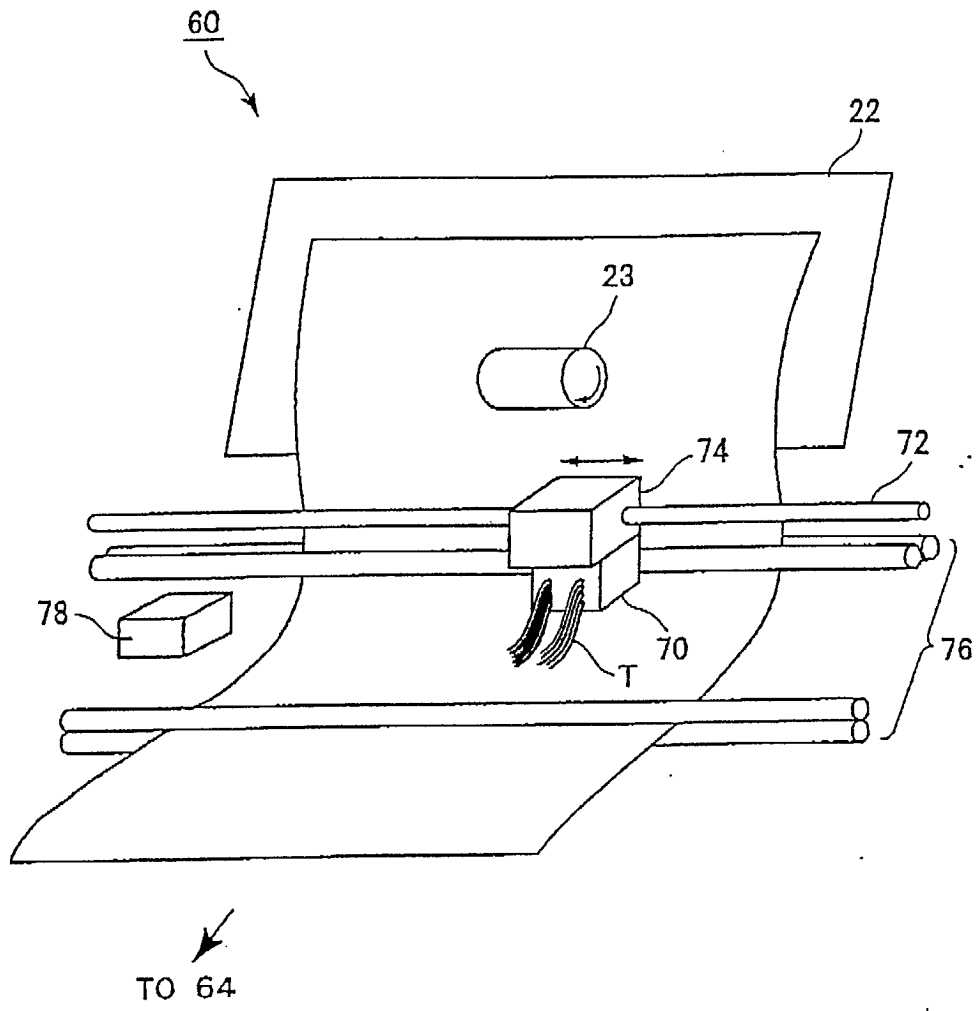


FIG. 8

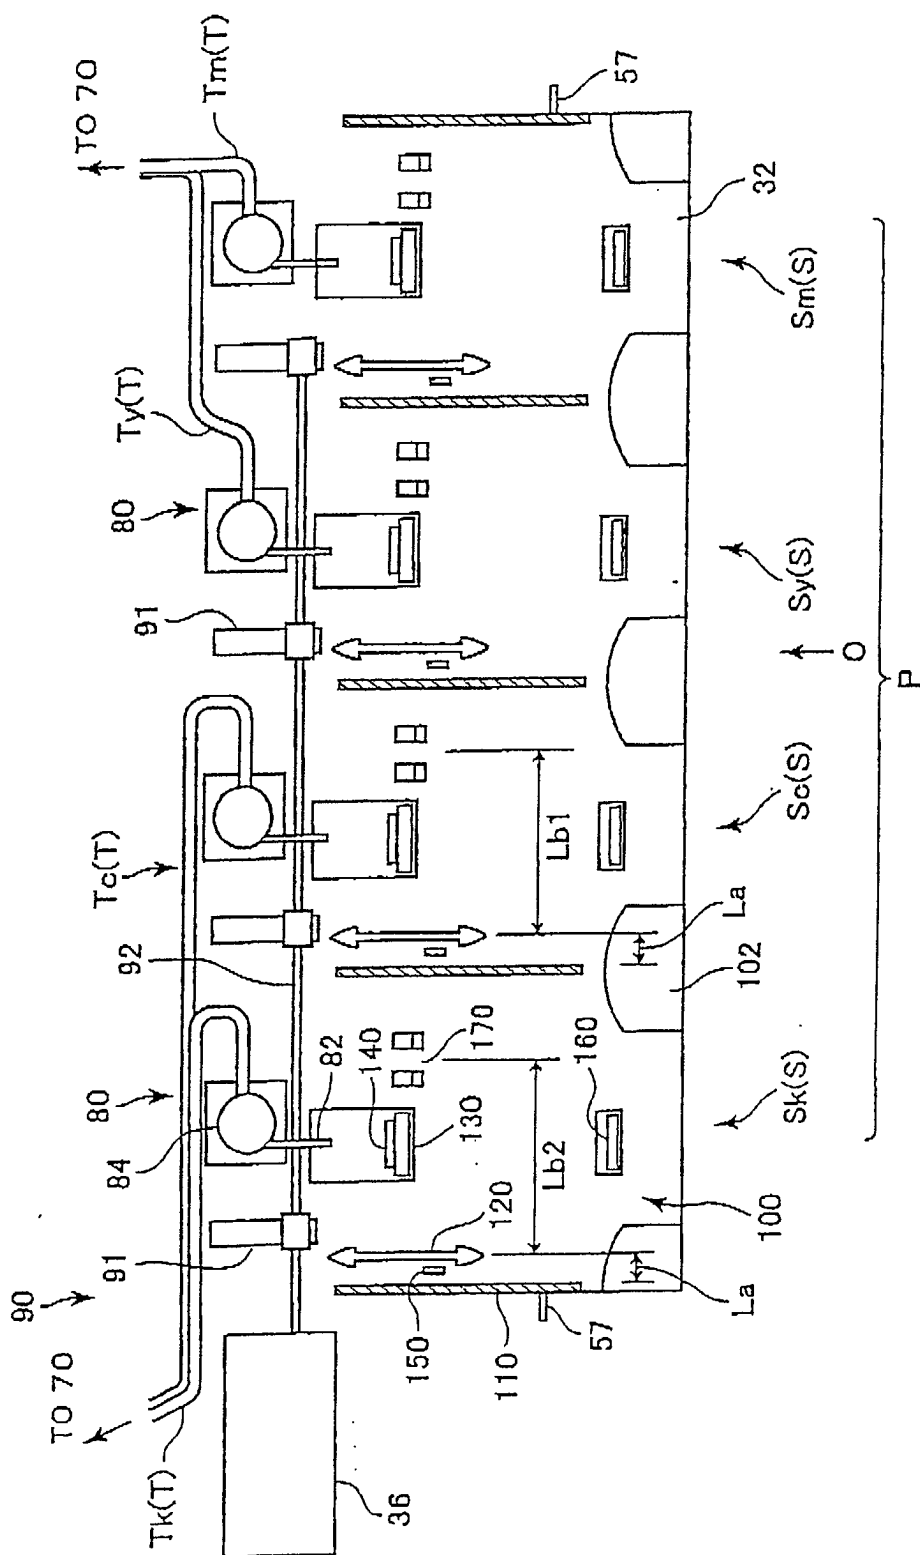


FIG. 9

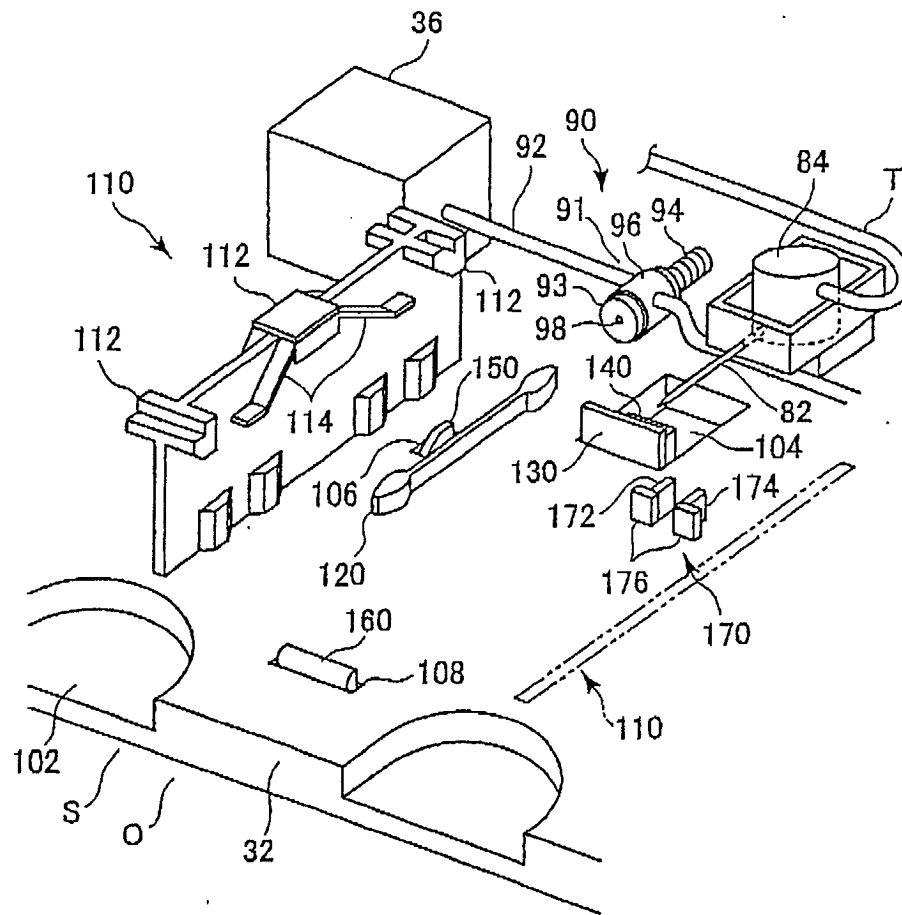


FIG. 10

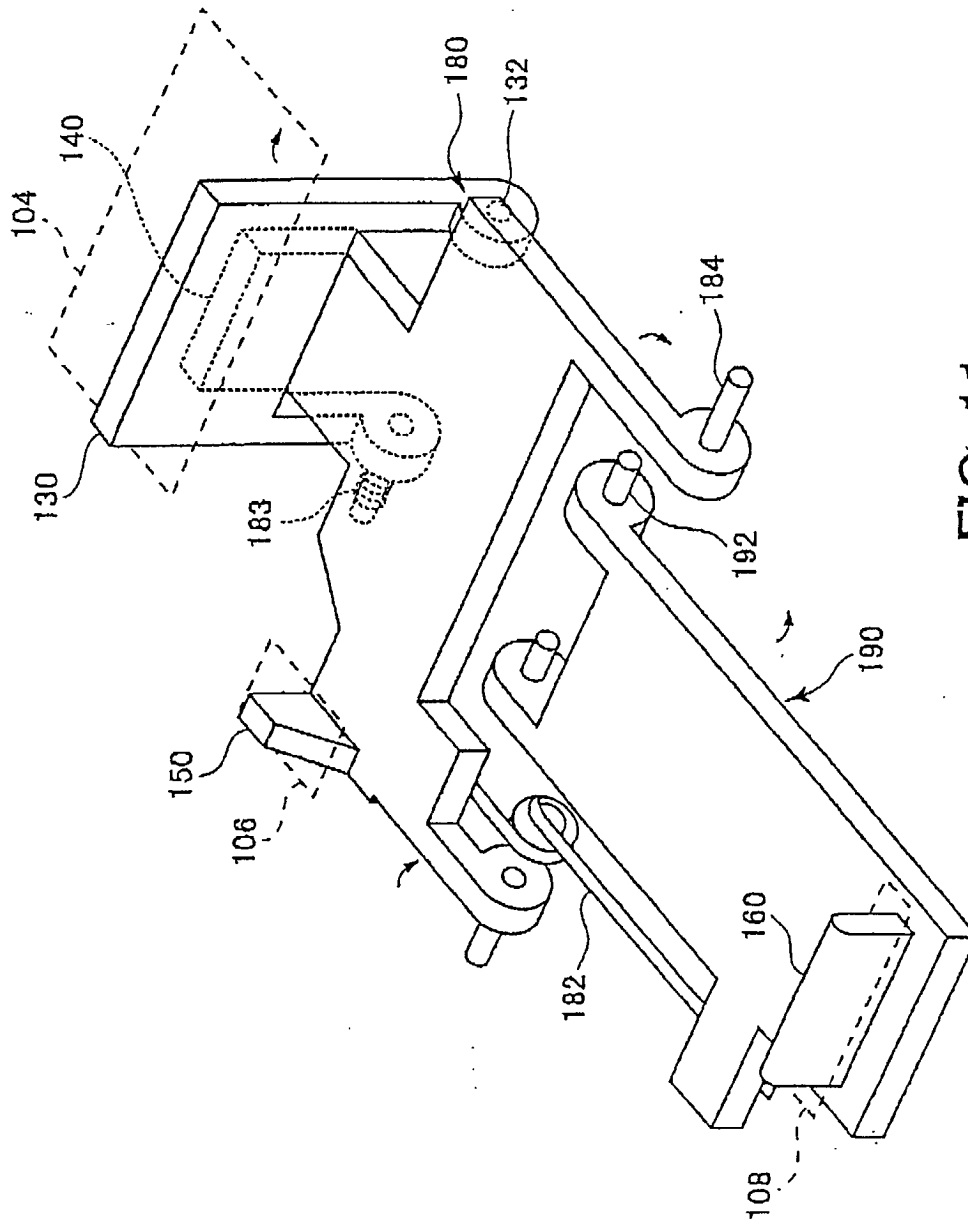


FIG. 11

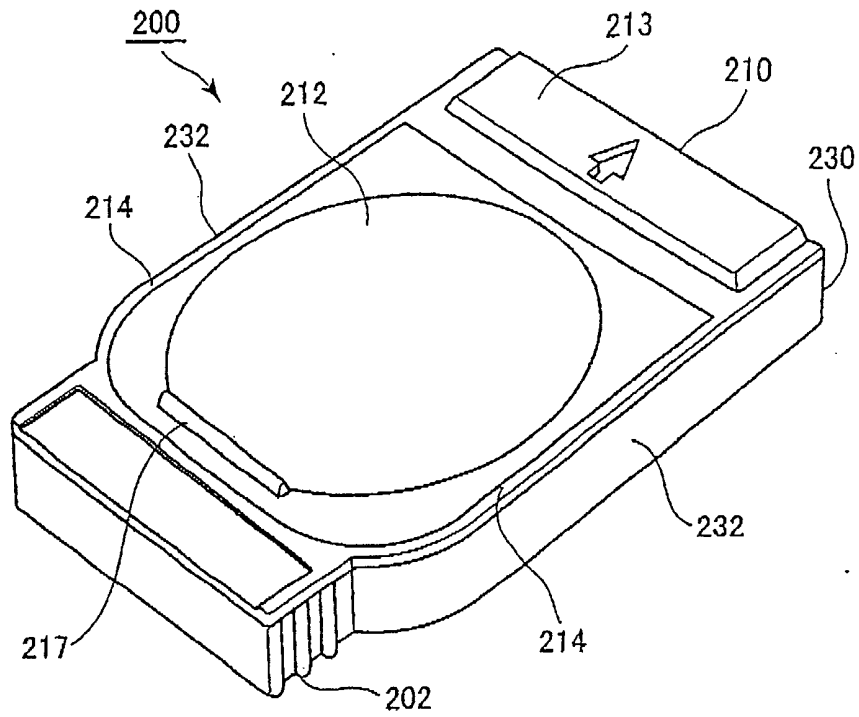


FIG. 12

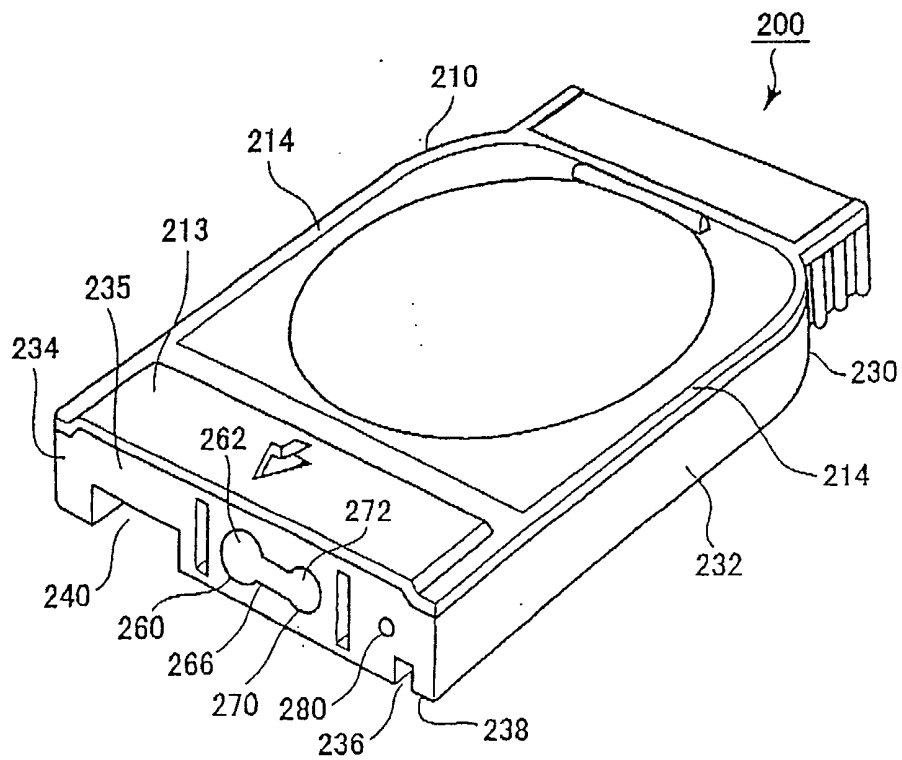


FIG. 13

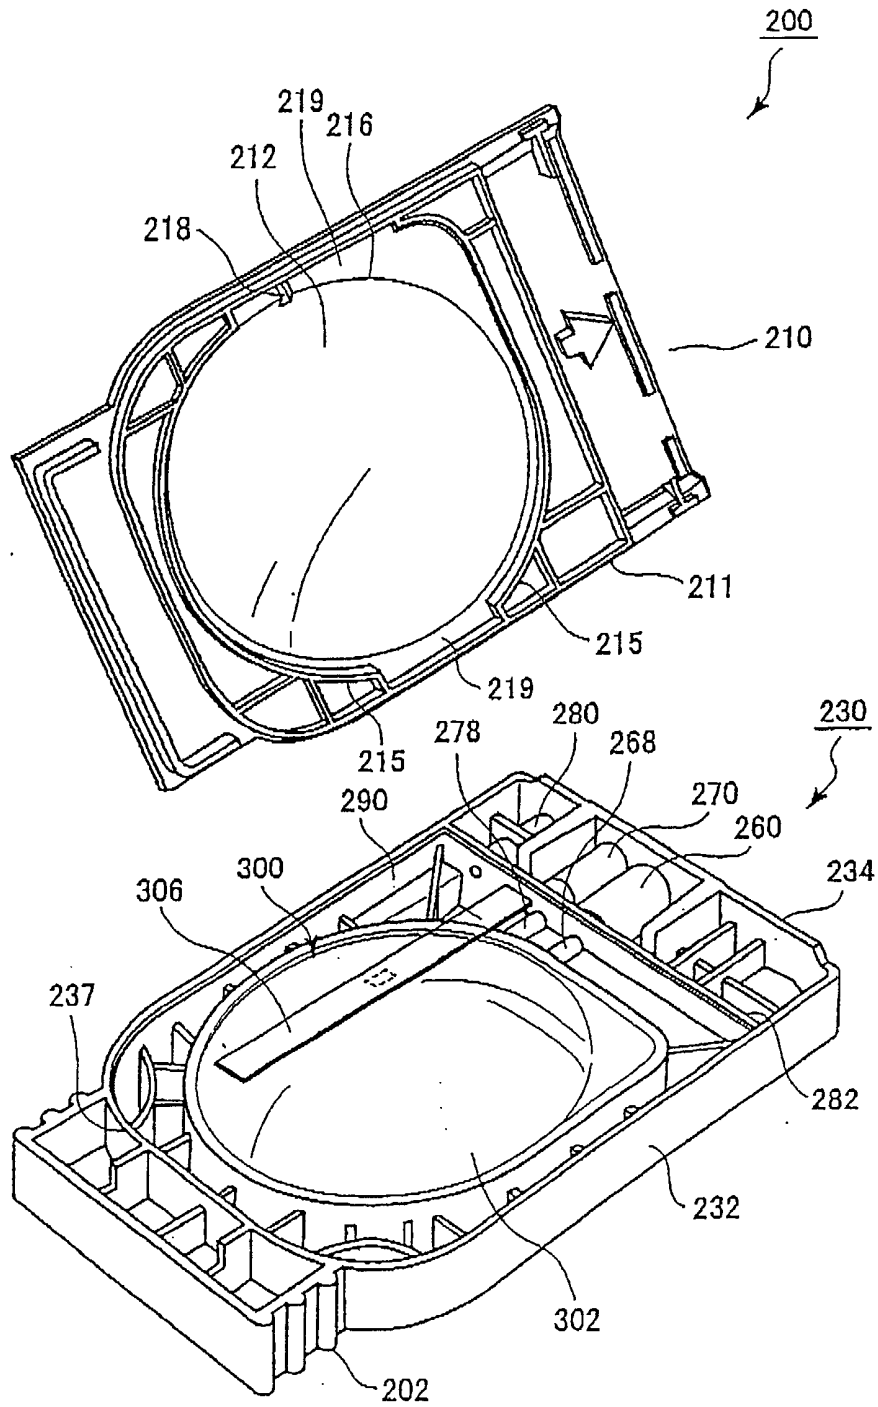


FIG. 14

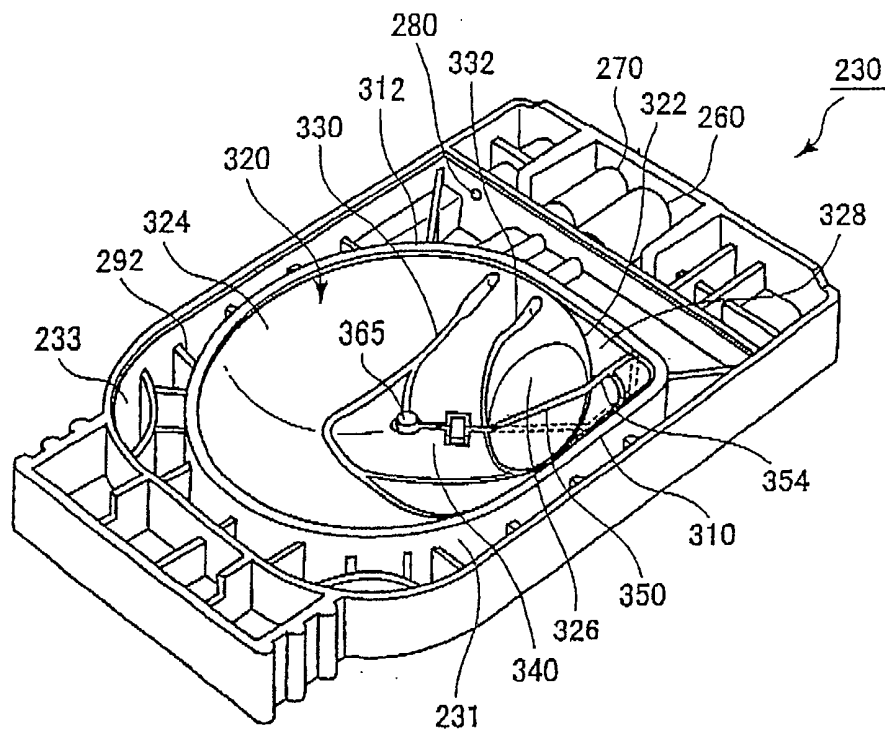


FIG. 15

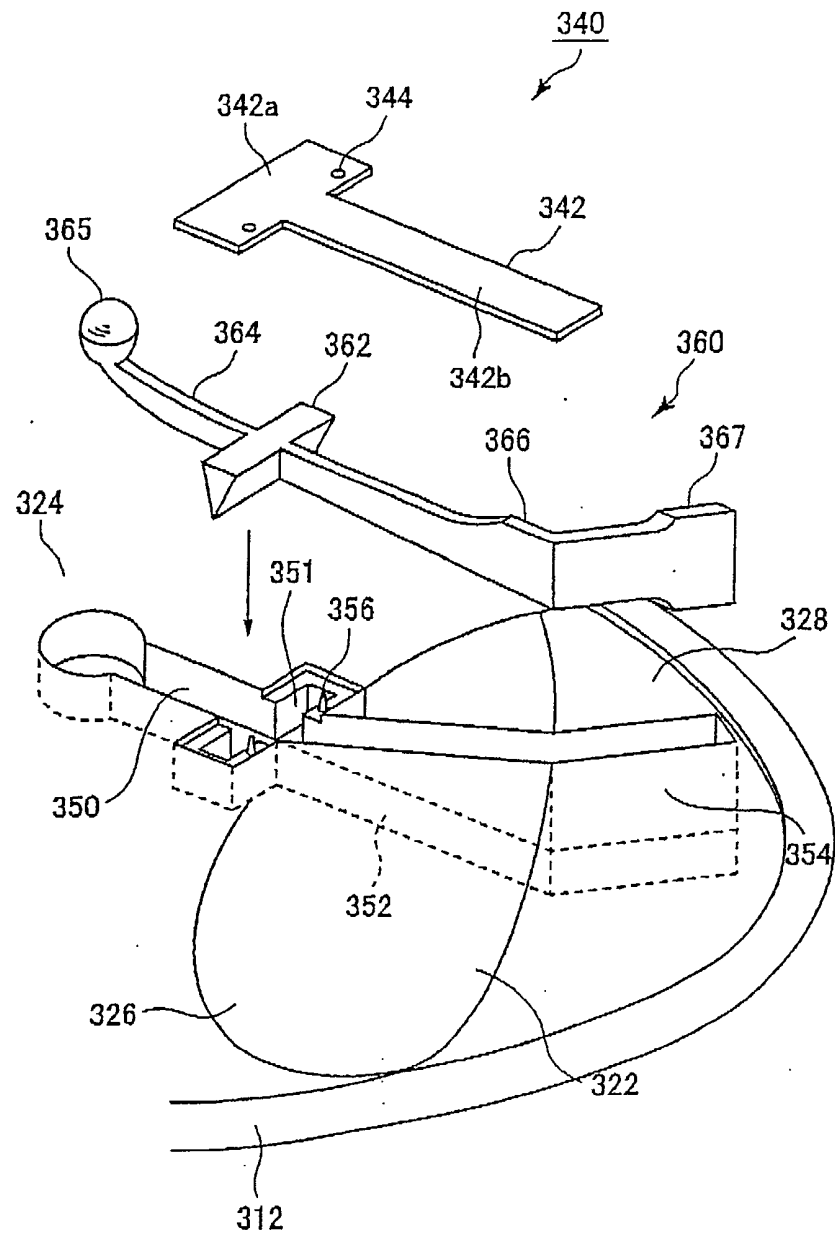


FIG. 16



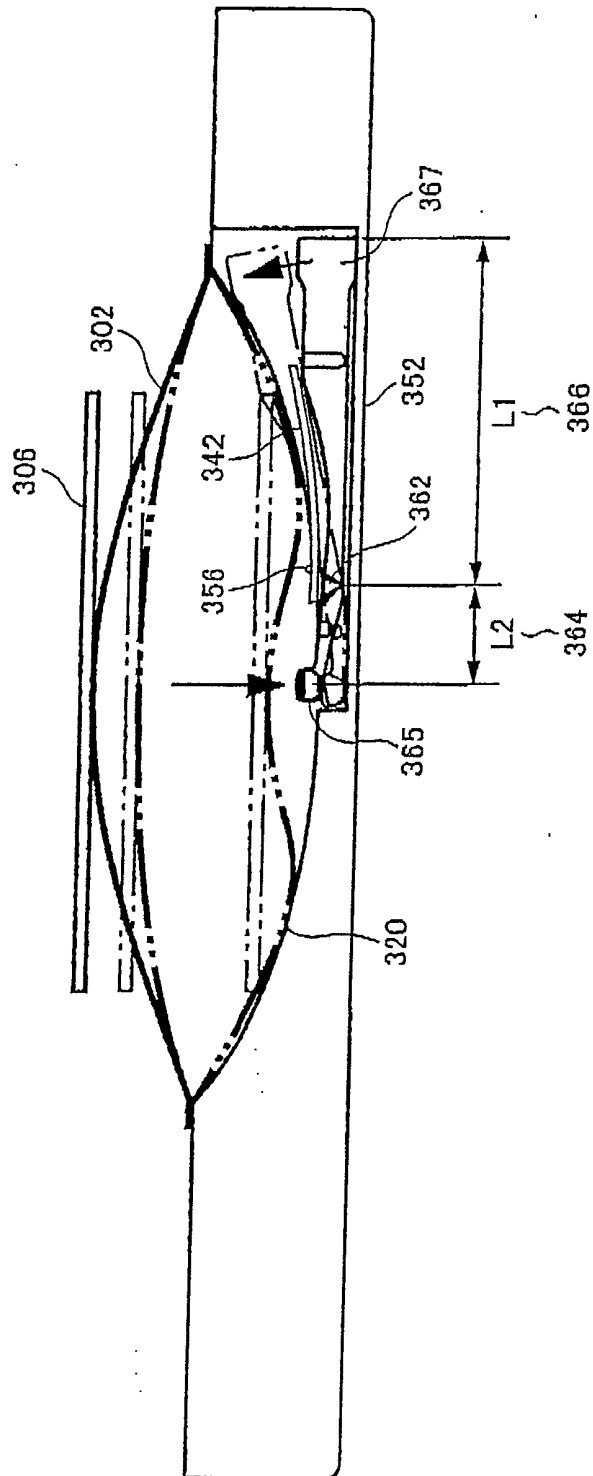


FIG. 17

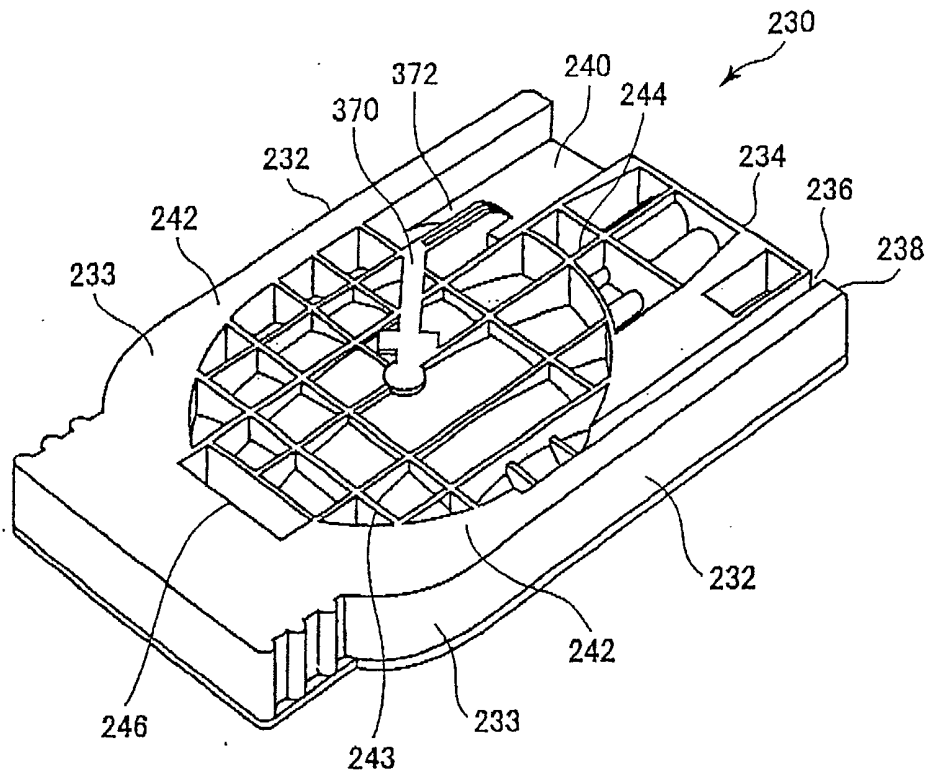


FIG. 18

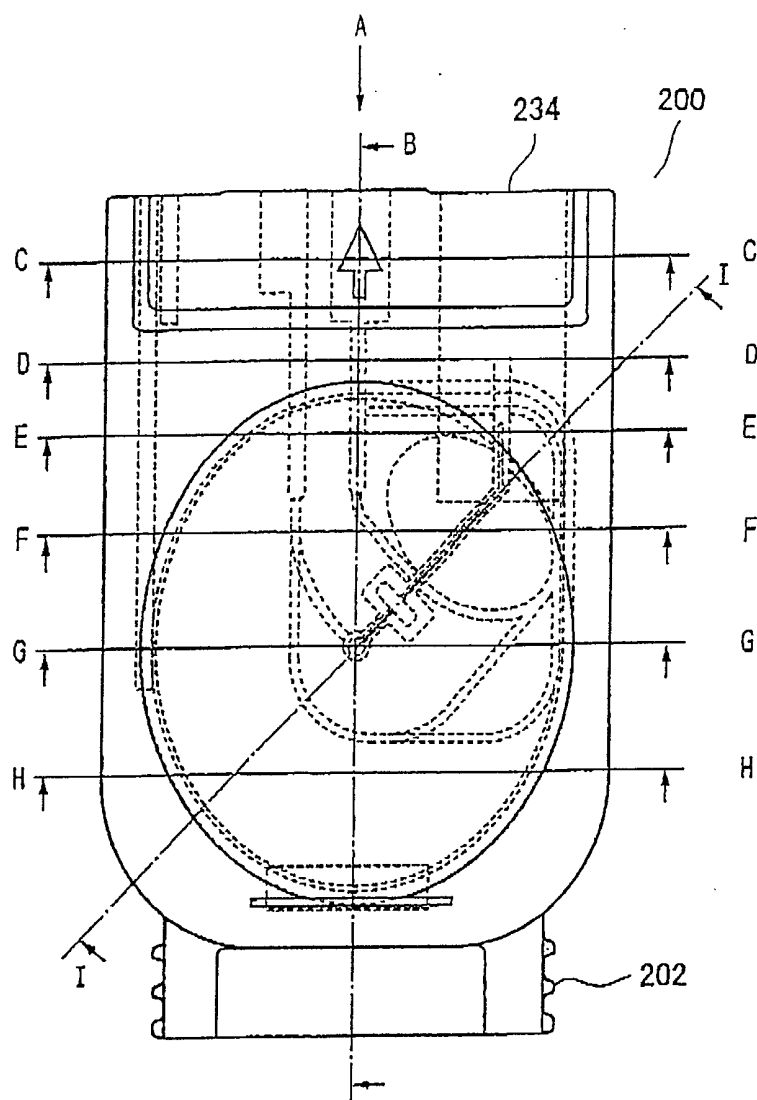


FIG. 19

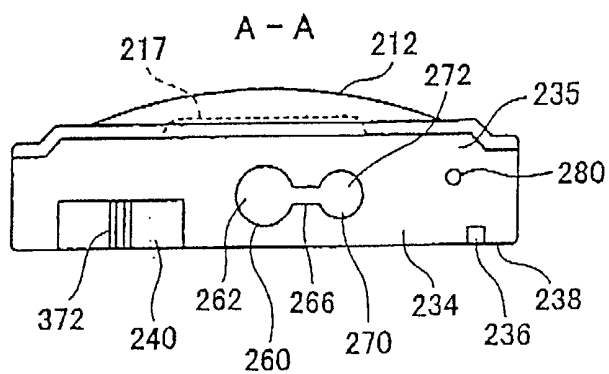


FIG. 20

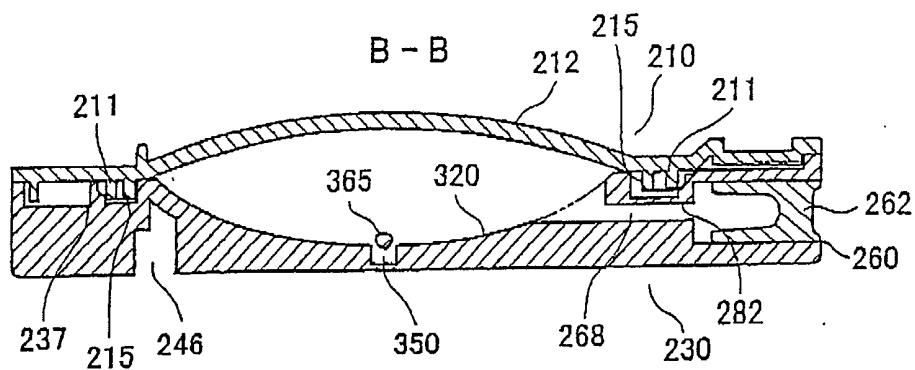


FIG. 21

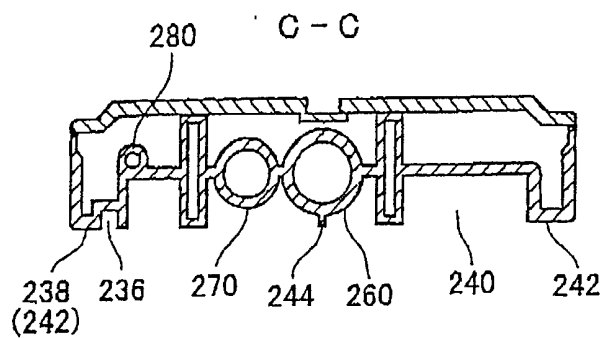


FIG. 22

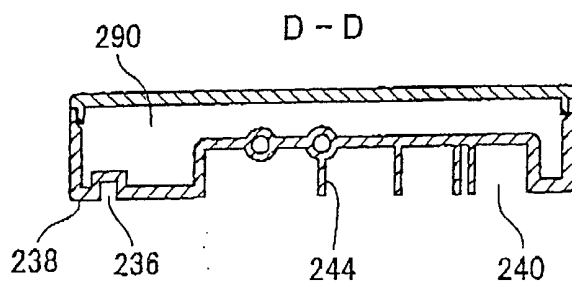


FIG. 23

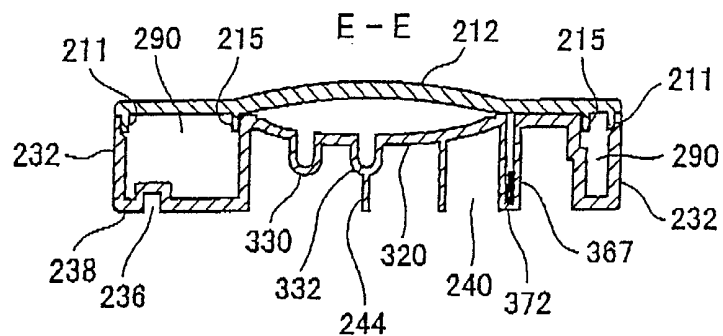


FIG. 24

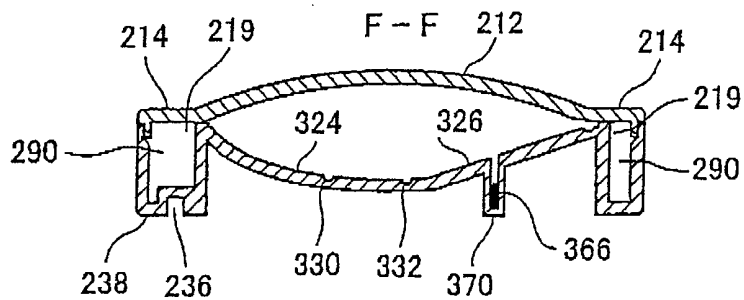


FIG. 25

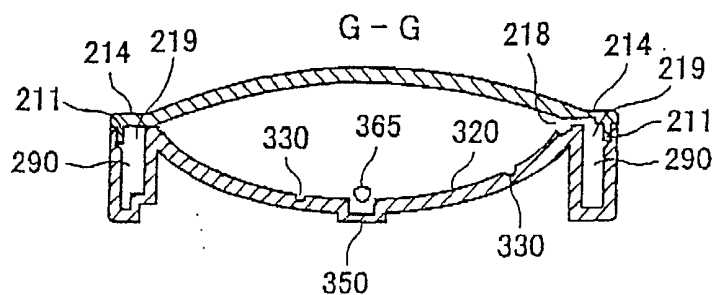


FIG. 26

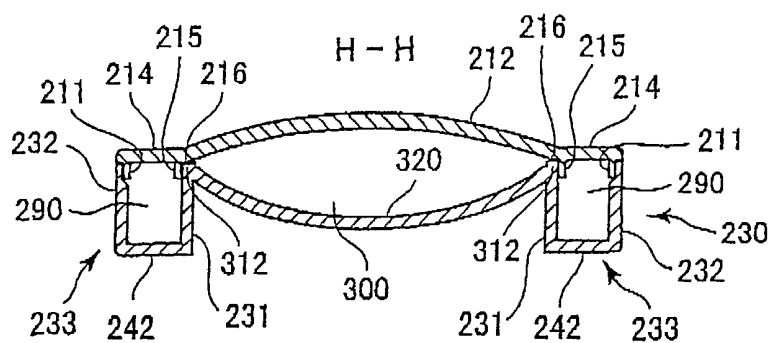


FIG. 27

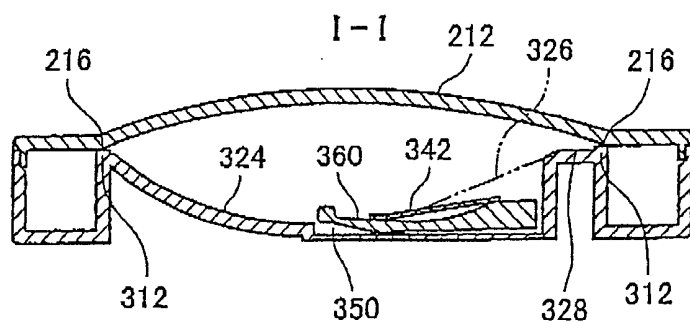


FIG. 28

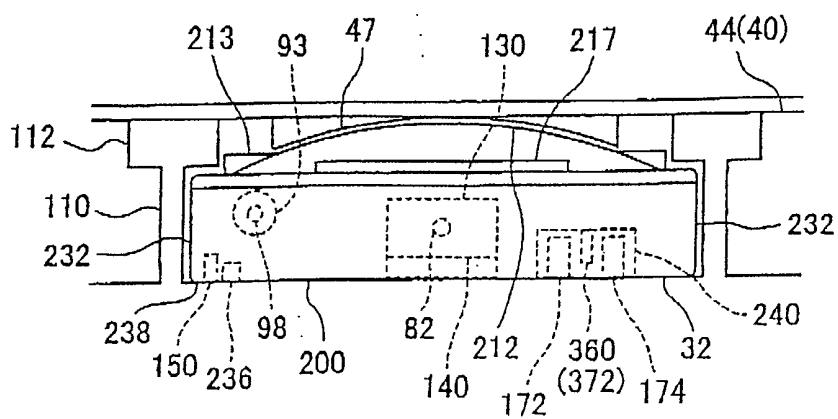


FIG. 29

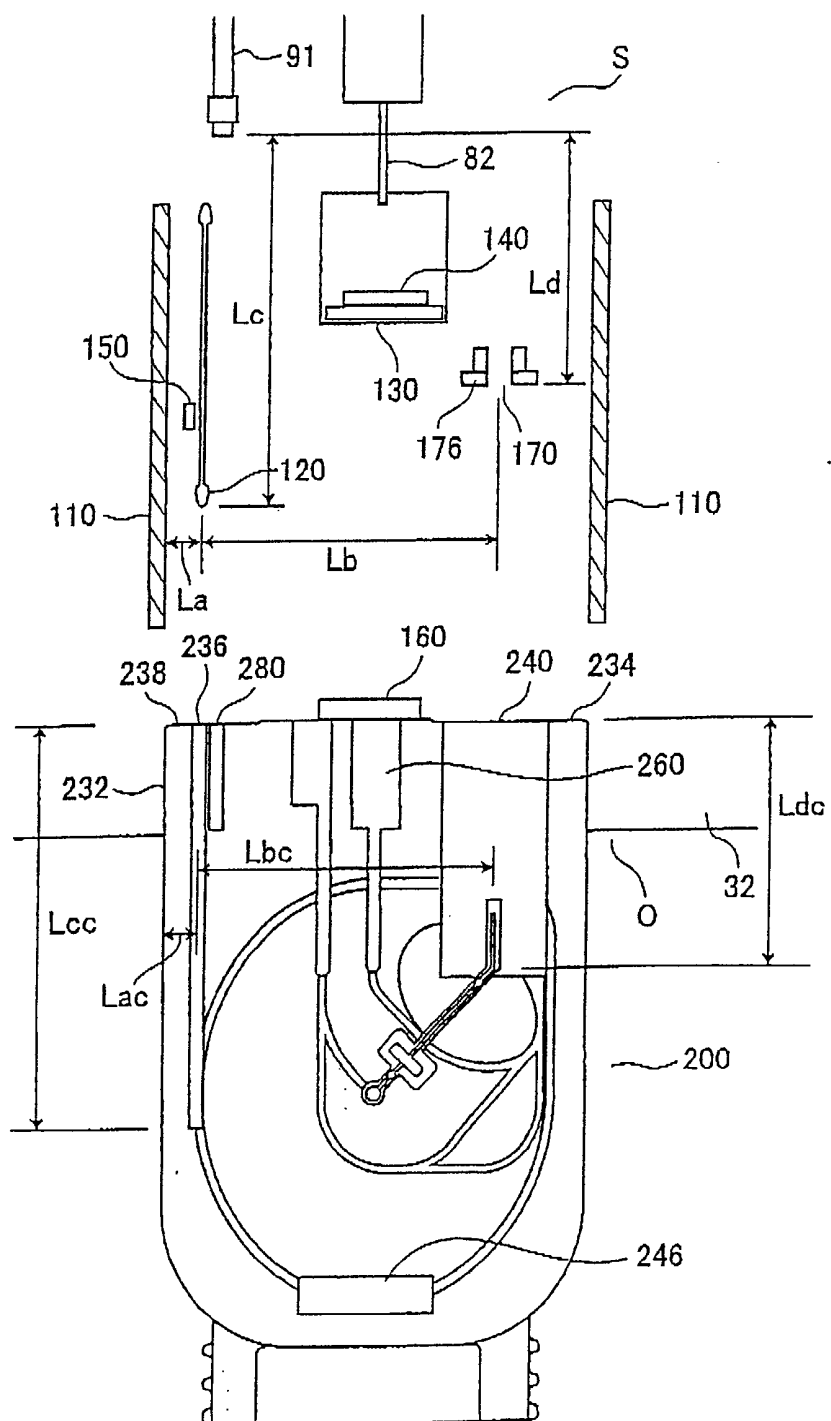


FIG. 30

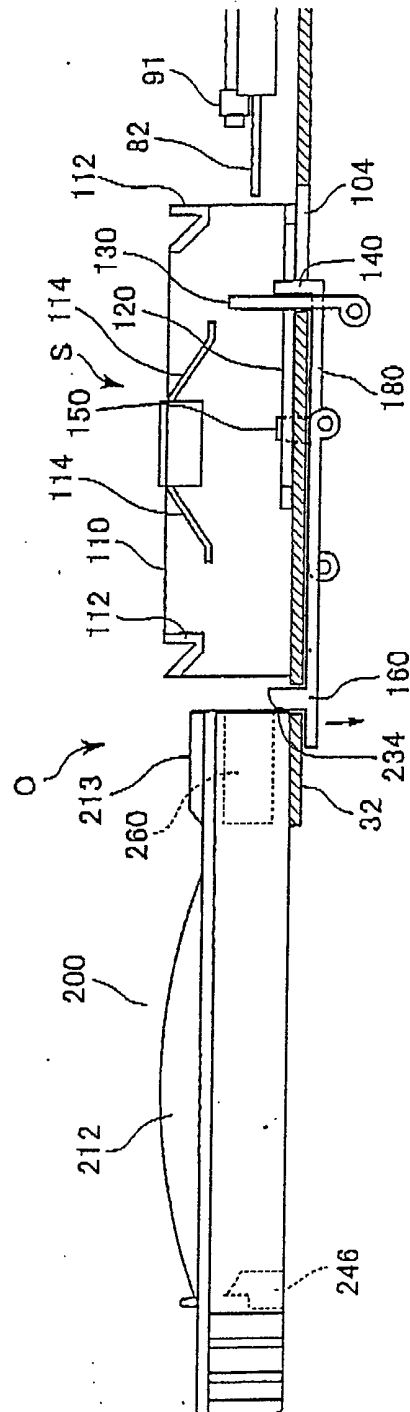


FIG. 31



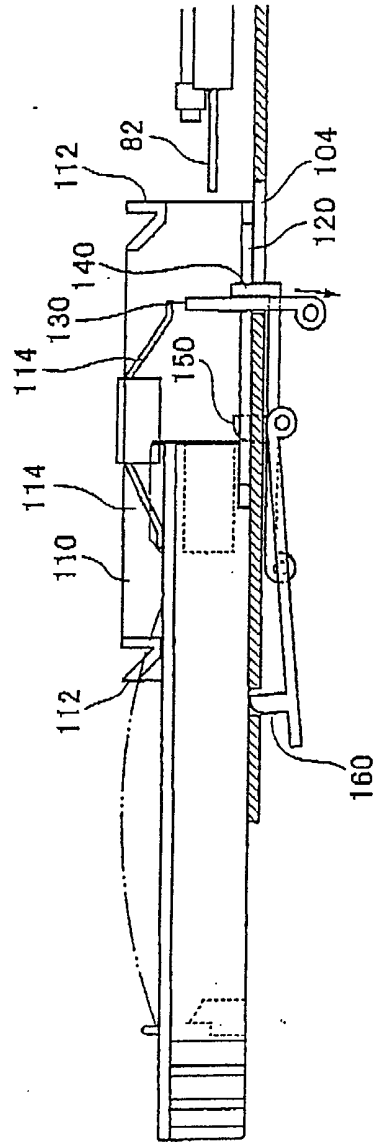


FIG. 32

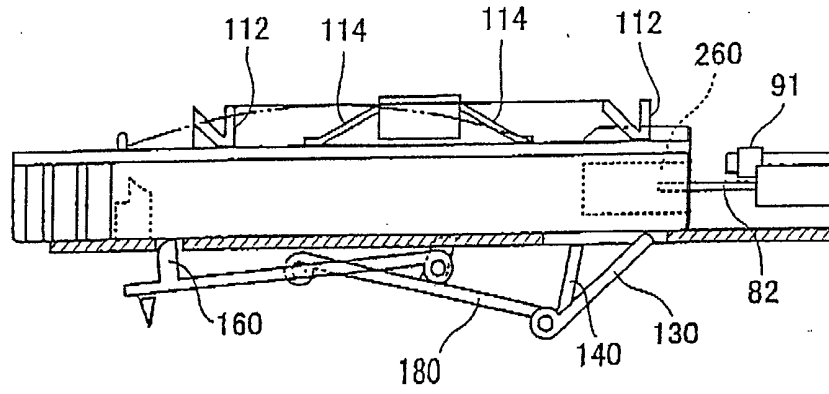


FIG. 33

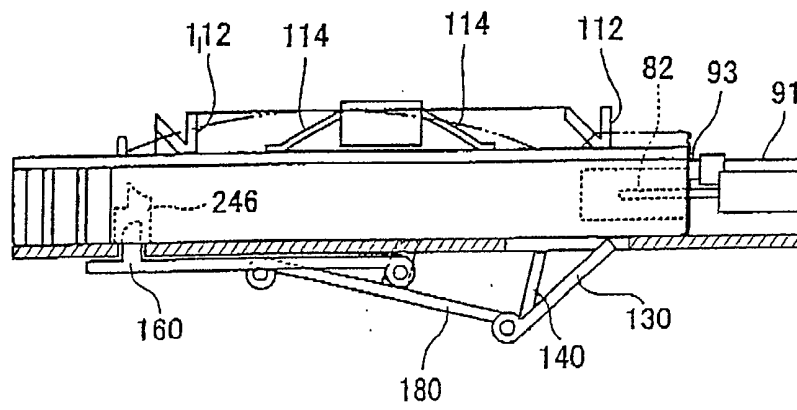


FIG. 34

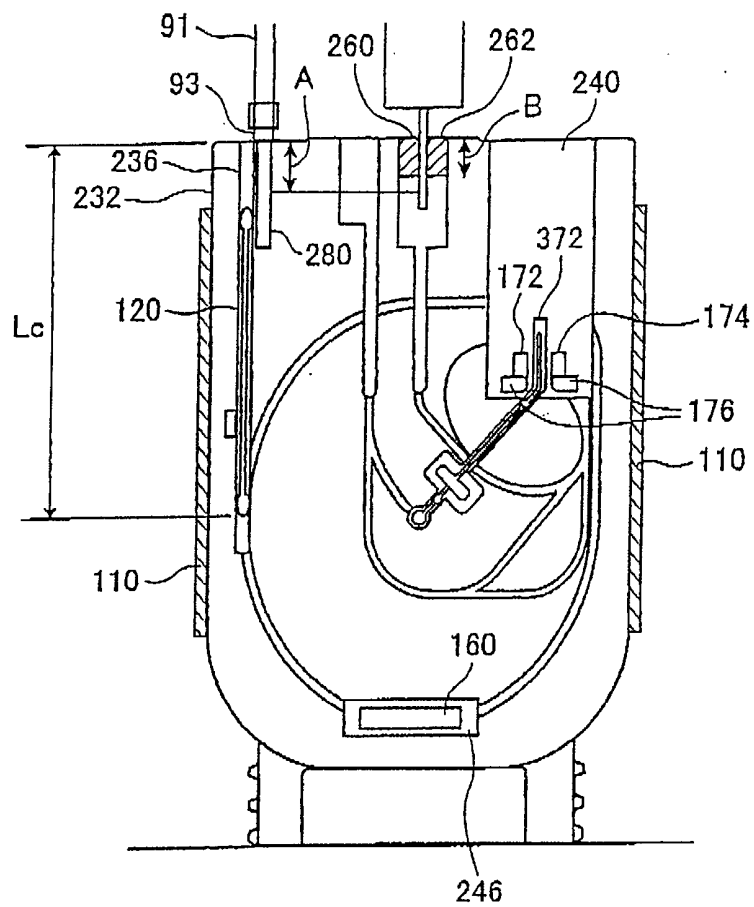


FIG. 35

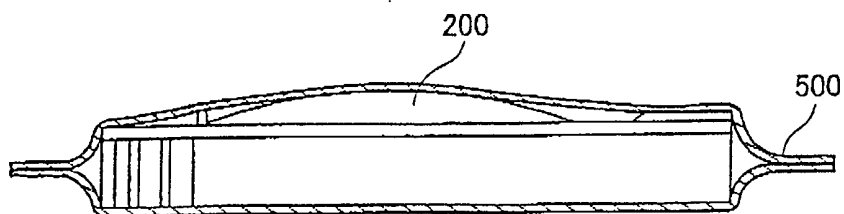


FIG. 36

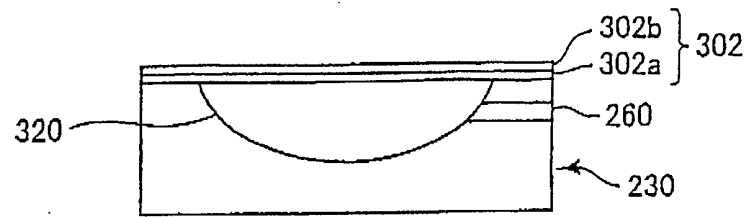


FIG. 37(a)

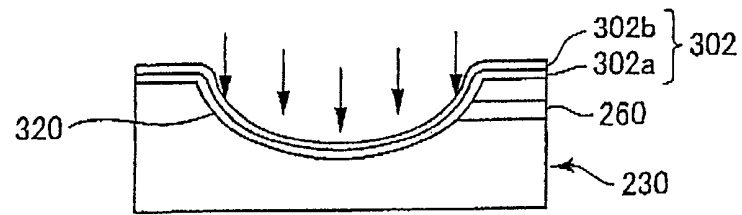


FIG. 37(b)

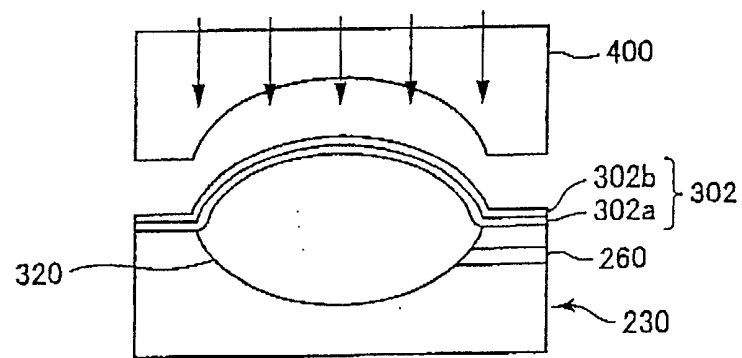


FIG. 38

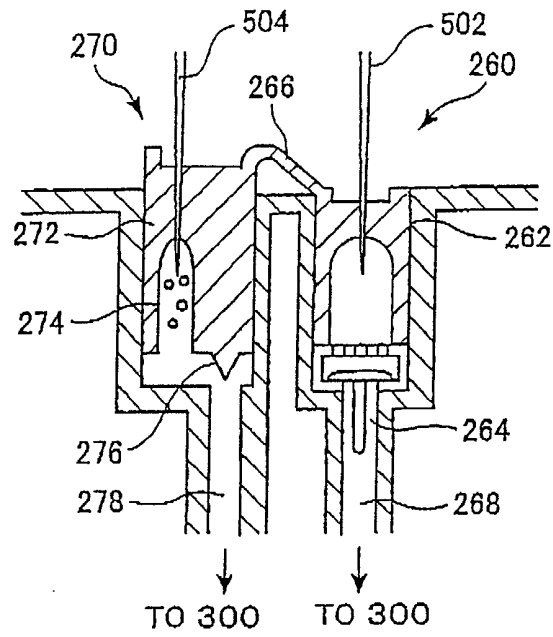


FIG. 39(a)

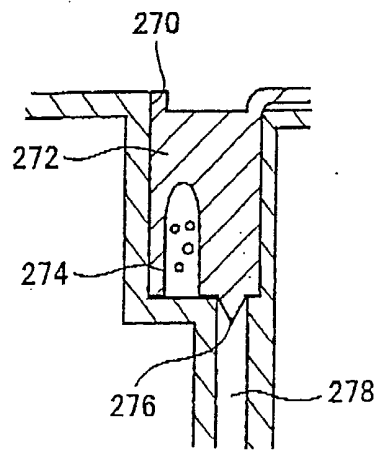


FIG. 39(b)

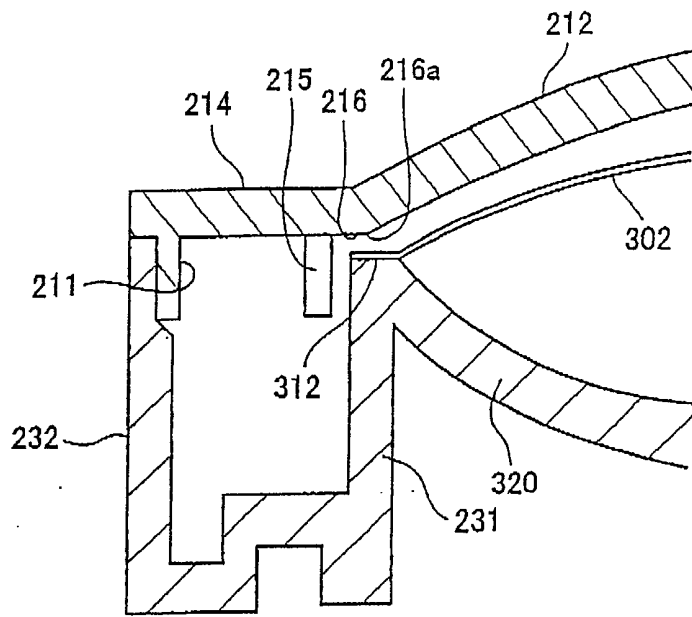


FIG. 40

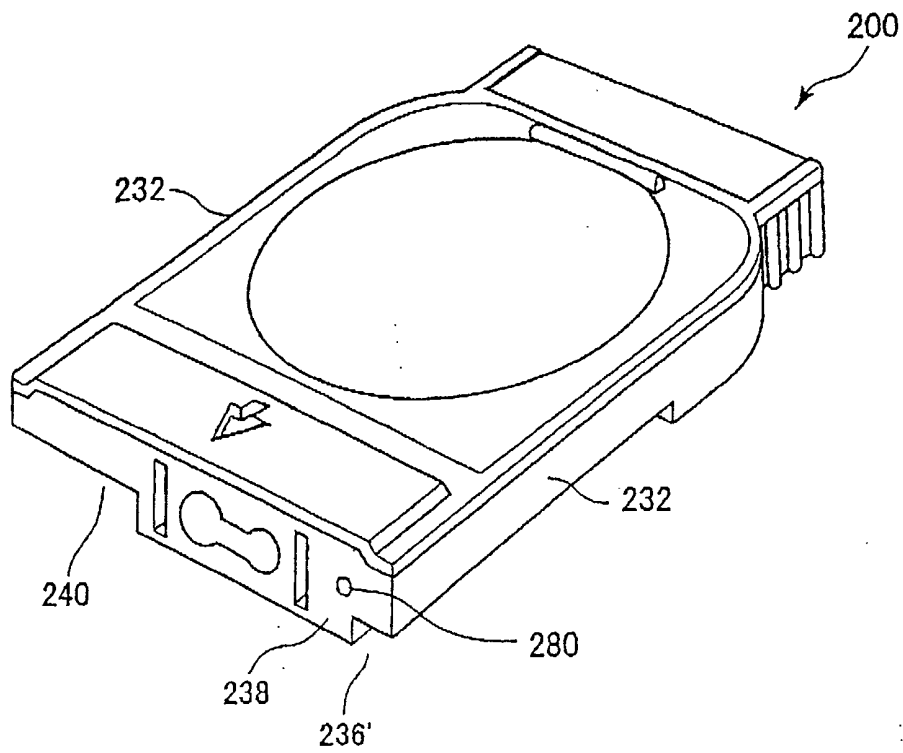


FIG. 41

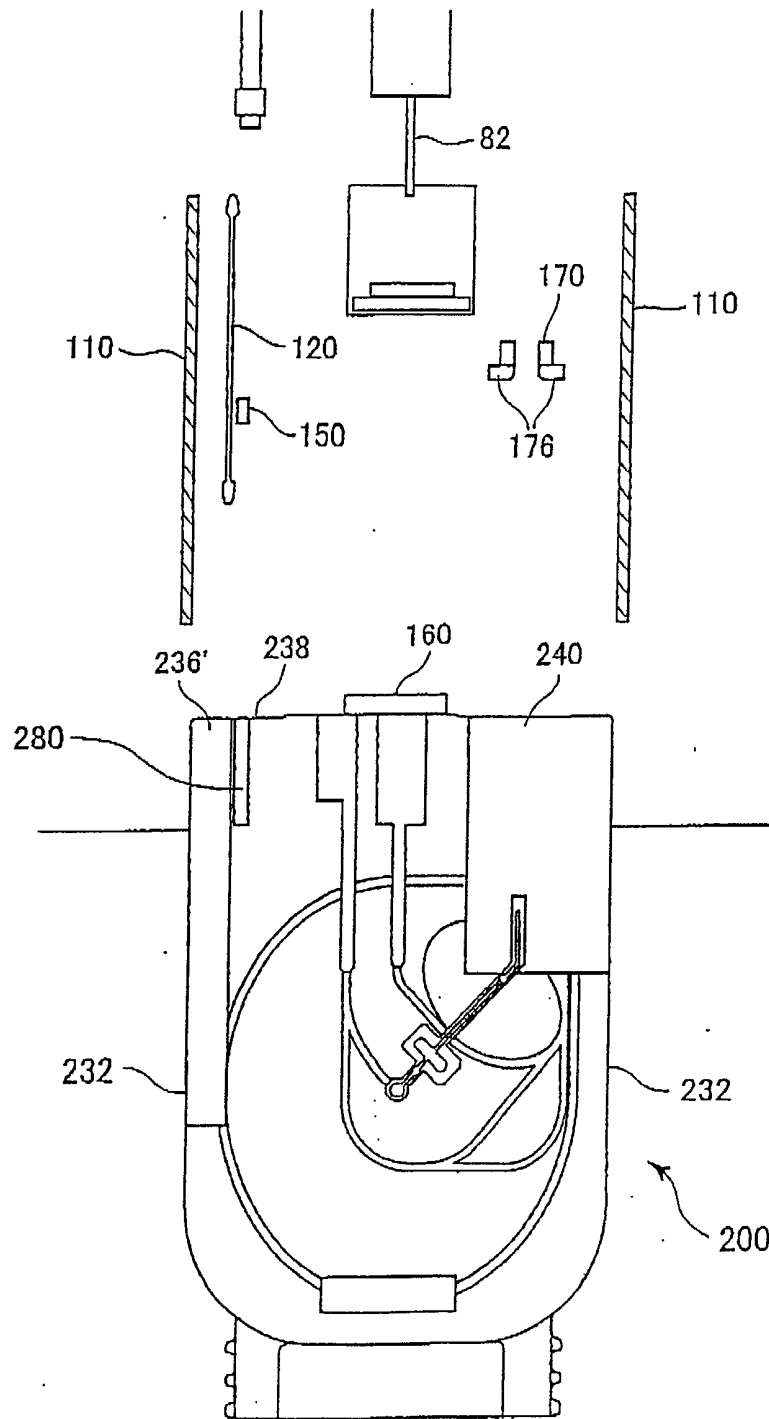


FIG. 42

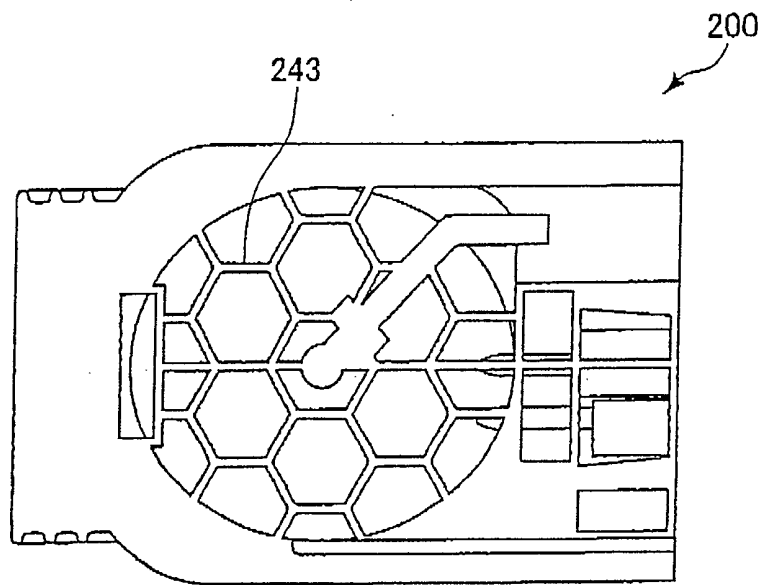


FIG. 43(a)

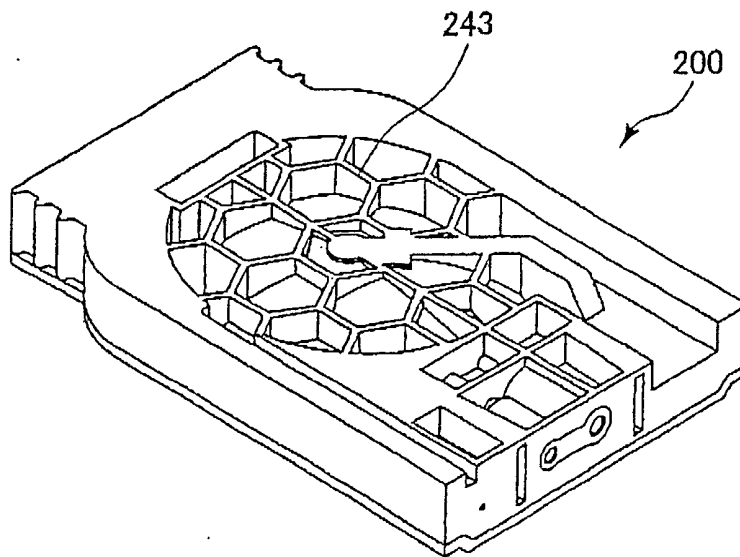


FIG. 43(b)



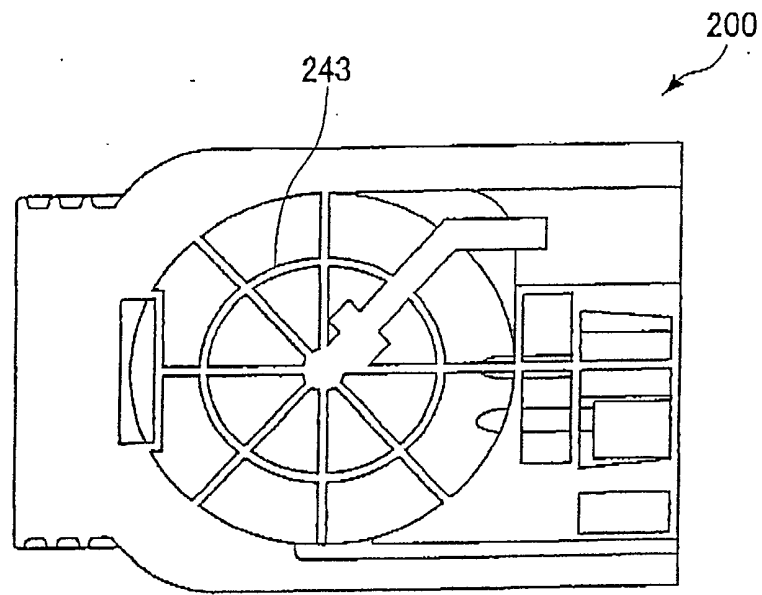


FIG. 44(a)

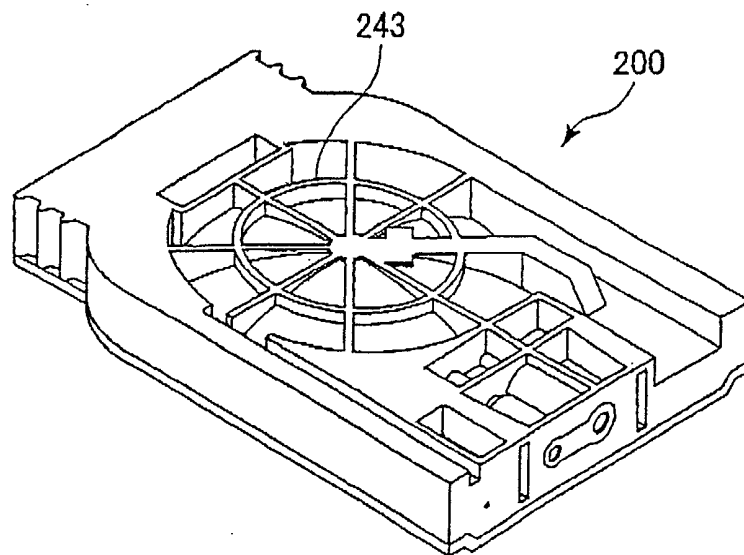


FIG. 44(b)

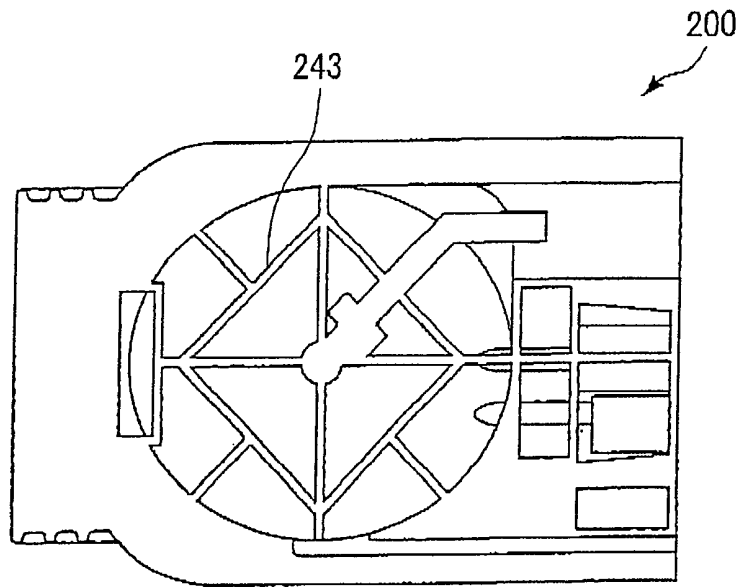


FIG. 45(a)

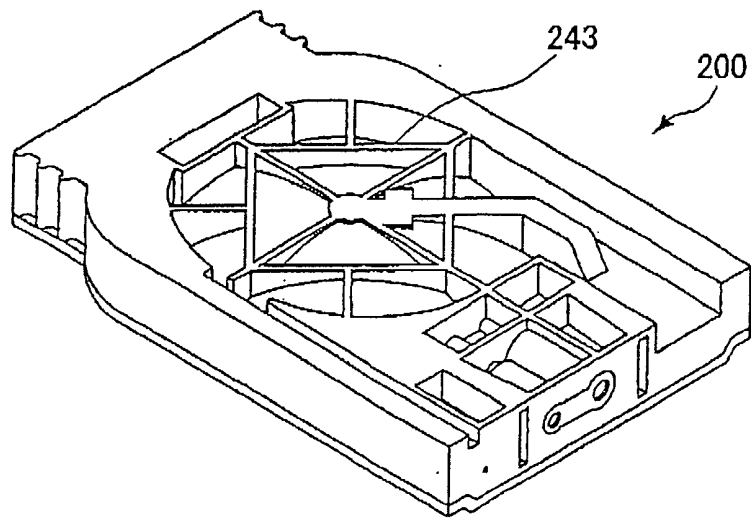


FIG. 45(b)

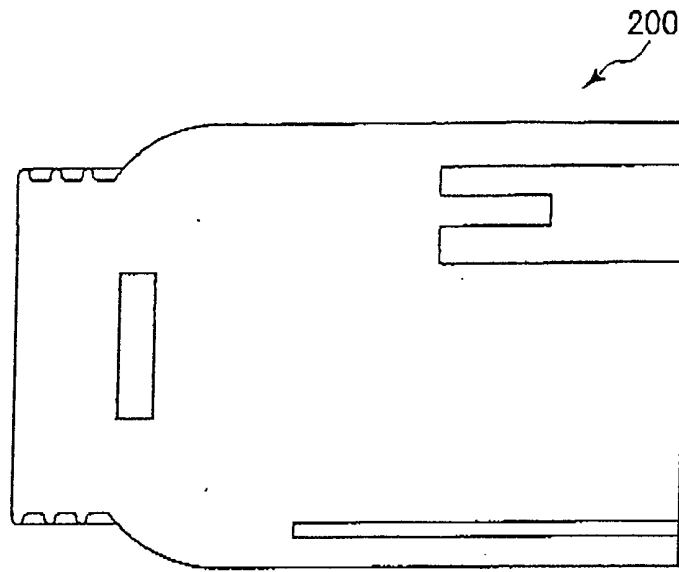


FIG. 46(a)

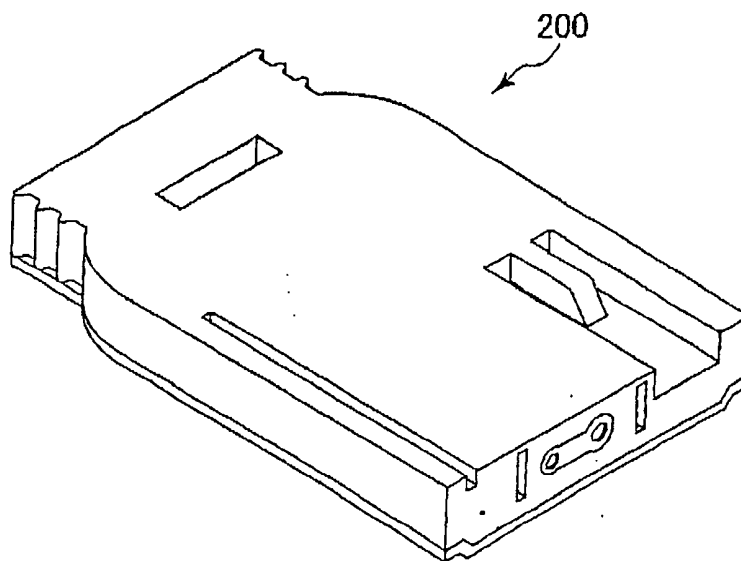


FIG. 46(b)

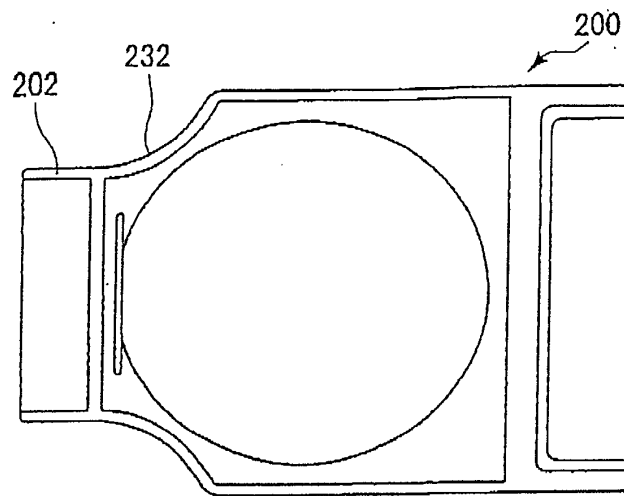


FIG. 47(a)

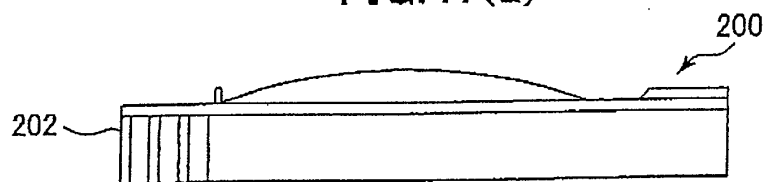


FIG. 47(b)

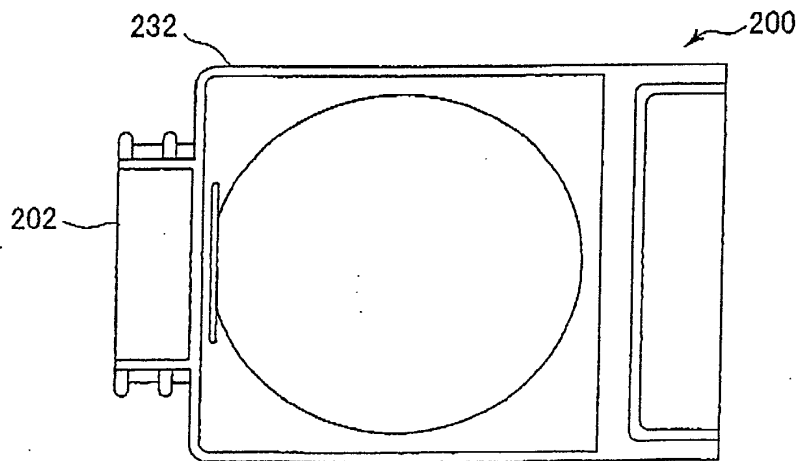


FIG. 48(a)

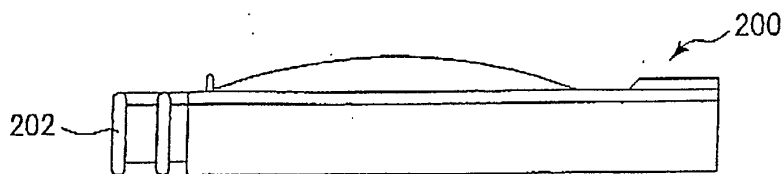


FIG. 48(b)

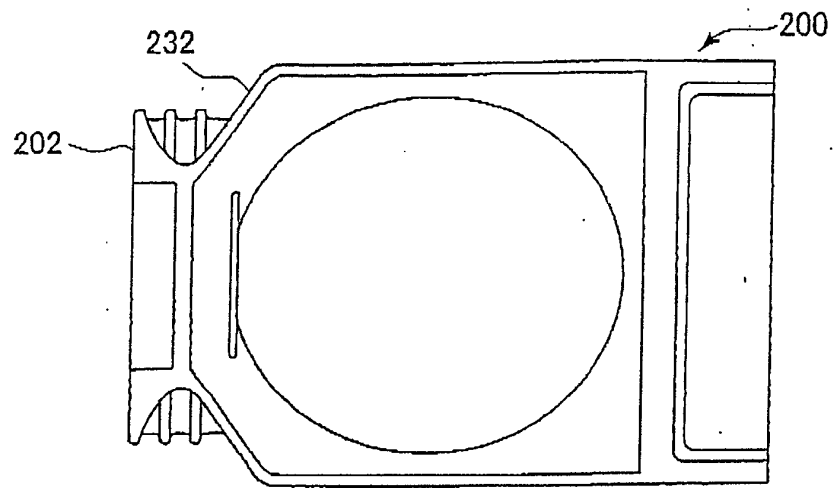


FIG. 49(a)

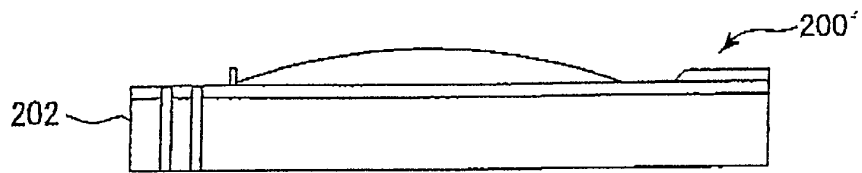


FIG. 49(b)

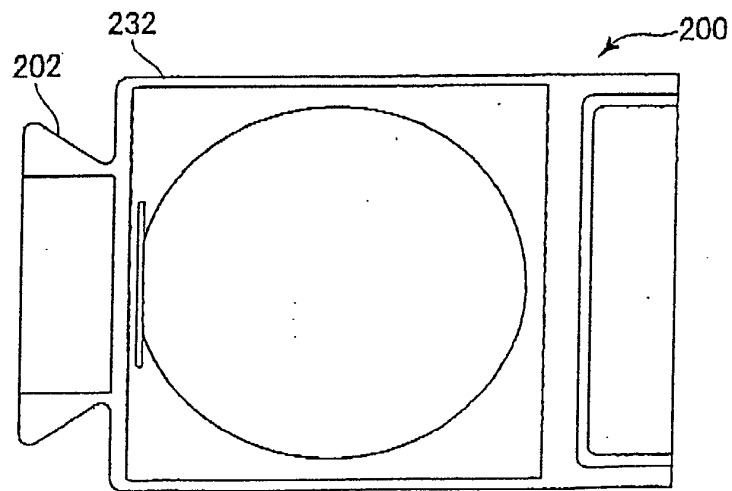


FIG. 50(a)

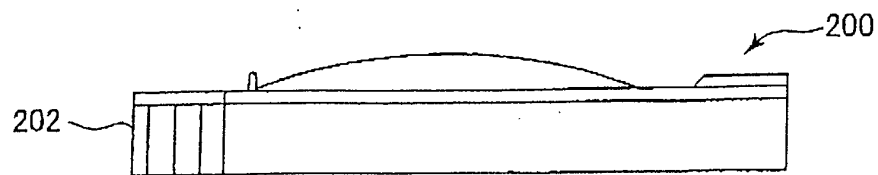


FIG. 50(b)

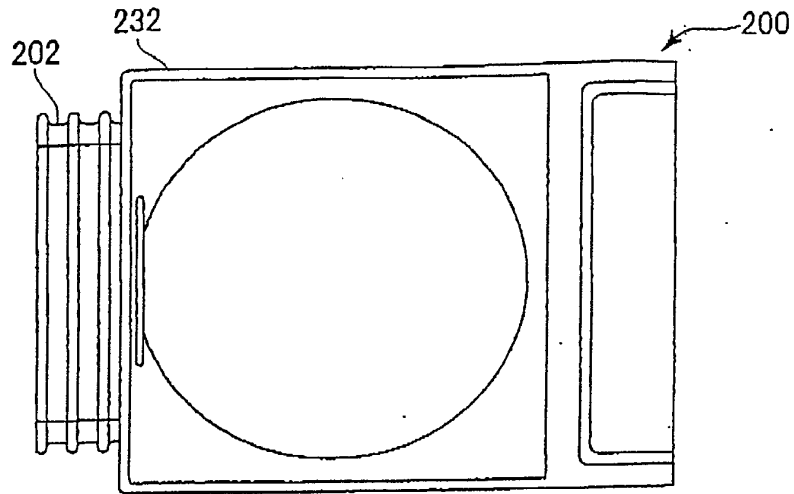


FIG. 51(a)

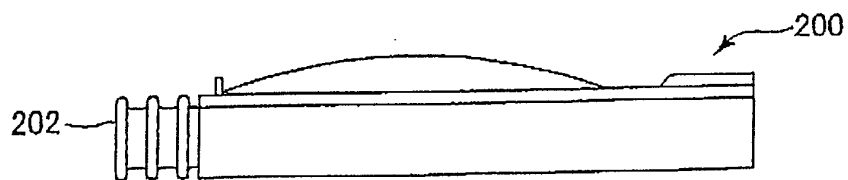


FIG. 51(b)

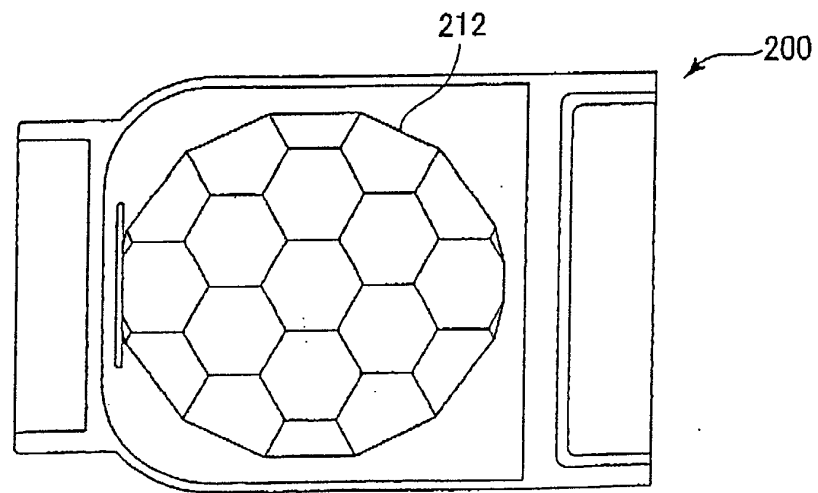


FIG. 52(a)



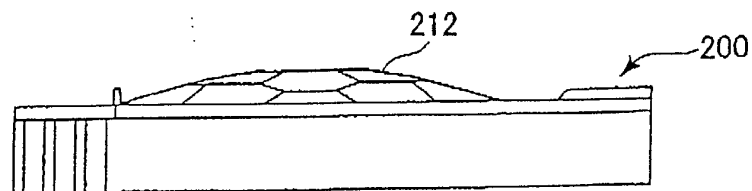


FIG. 52(b)

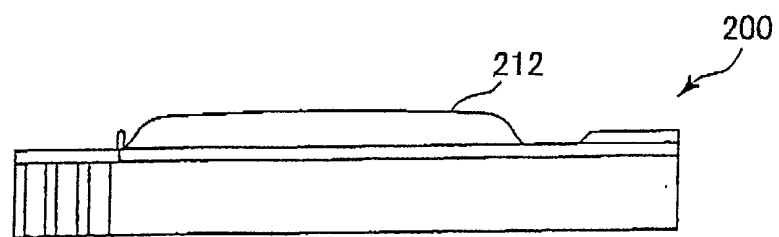

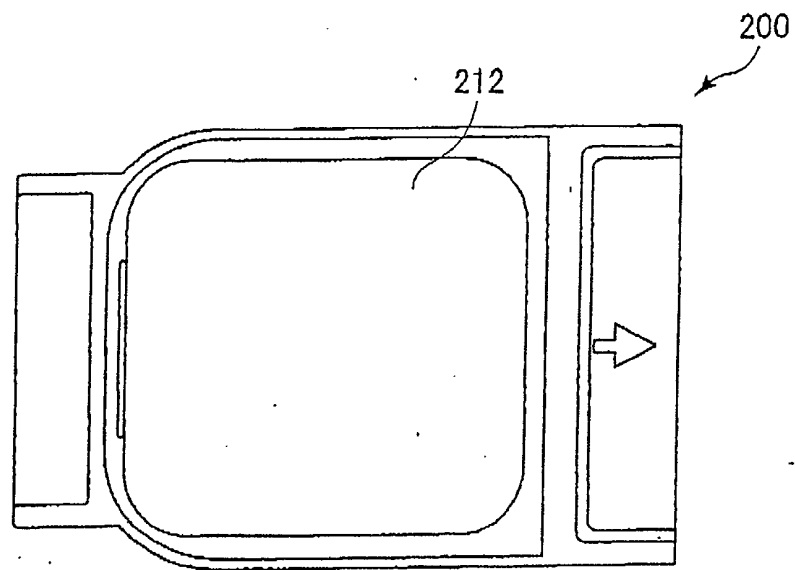

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 02 02 1659

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 0 689 936 A (CANON KK) 3 January 1996 (1996-01-03)  * page 4, line 44 - page 5, line 30; figures 2,24A,24,B *	1,4,6, 10,12, 15,19, 23,32,34	B41J2/175
A	---	2,3,7, 13,24,25	
Y	US 4 604 633 A (KIMURA YOSHIKI ET AL) 5 August 1986 (1986-08-05)  * column 14, line 47 - column 15, line 17; figure 20 * * column 10, line 51 - column 11, line 2; figure 10 *	1,4,6, 10,12, 15,19, 23,32,34	
A	---	20-22,25	
A	US 4 183 031 A (KYSER EDMOND L ET AL) 8 January 1980 (1980-01-08)  * column 4, line 32 - column 5, line 10; figures 1A,1B *	1,3,4,6, 10,12, 15,19, 23,32,34	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B41J
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 073 (M-368), 3 April 1985 (1985-04-03) & JP 59 204564 A (CANON KK), 19 November 1984 (1984-11-19) * abstract *	1,4,6, 10,12, 15,19, 23,32,34	
	---		
	-/--		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 27 January 2003	Examiner Adam, E
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 02 02 1659

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 07, 3 July 2002 (2002-07-03) & JP 2002 086753 A (CANON INC), 26 March 2002 (2002-03-26) * abstract *	1,4,6, 10,12, 15,19, 23,32,34	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	WO 90 08564 A (CANADA INC 167300) 9 August 1990 (1990-08-09)  * page 24, line 14 - line 26; figure 22 *	1,6,10, 12,15, 19,23, 32,34	
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 13, 30 November 1998 (1998-11-30) & JP 10 202896 A (MATSUSHITA ELECTRIC IND CO LTD), 4 August 1998 (1998-08-04) * abstract *	1,6,10, 12,15, 19,23, 32,34	
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 366 (M-1636), 11 July 1994 (1994-07-11) & JP 06 099588 A (FUJI ELECTRIC CO LTD), 12 April 1994 (1994-04-12) * abstract *	1,6,10, 12,15, 19,23, 32,34	
A	US 5 623 290 A (NOZAWA MINORU ET AL) 22 April 1997 (1997-04-22)  * column 9, line 1 - line 29; figures 9,10 * * column 9, line 12 - line 29; figure 11 *  -/--	1,6,10, 12,15, 19,23, 32,34	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>27 January 2003</b>	Examiner <b>Adam, E</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 02 02 1659

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P,A	US 2002/047882 A1 (GOLDMAN YOSSI ET AL) 25 April 2002 (2002-04-25) * page 3, paragraph 45 - paragraph 45; figures 4,5A,5B * * page 4, paragraph 62 - paragraph 63; figure 7 *		
A	EP 0 742 102 A (LEXMARK INT INC) 13 November 1996 (1996-11-13) ---		
A	US 4 777 497 A (MURAKAMI KIYOTAKA ET AL) 11 October 1988 (1988-10-11) -----		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search		Date of completion of the search	Examiner
THE HAGUE		27 January 2003	Adam, E
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 1659

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-01-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0689936 A	03-01-1996	JP 4001056 A	06-01-1992
		EP 0689936 A2	03-01-1996
		CN 1055814 A ,B	30-10-1991
		CN 1080591 A ,B	12-01-1994
		DE 69029387 D1	23-01-1997
		DE 69029387 T2	24-04-1997
		DE 69033170 D1	22-07-1999
		DE 69033170 T2	18-11-1999
		EP 0452585 A2	23-10-1991
		HK 1011836 A1	14-04-2000
		KR 9410886 B1	19-11-1994
		US 5627570 A	06-05-1997
		US 5168291 A	01-12-1992
US 4604633 A	05-08-1986	JP 59104946 A	18-06-1984
		JP 59104947 A	18-06-1984
		JP 59115856 A	04-07-1984
		JP 59115857 A	04-07-1984
		JP 59115858 A	04-07-1984
		JP 59115859 A	04-07-1984
		JP 59115860 A	04-07-1984
		DE 3344447 A1	14-06-1984
US 4183031 A	08-01-1980	US 4074284 A	14-02-1978
		US 4506276 A	19-03-1985
		AU 505490 B2	22-11-1979
		AU 2564977 A	07-12-1978
		AU 508993 B2	17-04-1980
		AU 2565077 A	07-12-1978
		CA 1098158 A1	24-03-1981
		CA 1092637 A1	30-12-1980
		CH 621517 A5	13-02-1981
		CH 621518 A5	13-02-1981
		DE 2725270 A1	15-12-1977
		DE 2725271 A1	15-12-1977
		ES 459529 A1	16-04-1978
		ES 459530 A1	01-05-1978
		FR 2354201 A1	06-01-1978
		GB 1578961 A	12-11-1980
		GB 1578962 A	12-11-1980
		IT 1126738 B	21-05-1986
		IT 1116657 B	10-02-1986
		JP 52150636 A	14-12-1977
		JP 52150637 A	14-12-1977
		JP 1408299 C	27-10-1987
		JP 60058860 A	05-04-1985

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 1659

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-01-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 4183031	A		JP	62016821 B	14-04-1987
			JP	1679919 C	13-07-1992
			JP	3045711 B	11-07-1991
			JP	60058861 A	05-04-1985
			JP	1733700 C	17-02-1993
			JP	3023347 B	28-03-1991
			JP	60058867 A	05-04-1985
			JP	60058868 A	05-04-1985
			JP	1432749 C	24-03-1988
			JP	60058862 A	05-04-1985
			JP	62040193 B	27-08-1987
			JP	1457076 C	09-09-1988
			JP	60058863 A	05-04-1985
			JP	63002788 B	20-01-1988
			NL	7706205 A ,B,	09-12-1977
			NL	7706206 A ,B,	09-12-1977
			SE	433474 B	28-05-1984
			SE	7706574 A	07-12-1977
			SE	420469 B	12-10-1981
			SE	7706575 A	08-12-1977
-----					
JP 59204564	A	19-11-1984	NONE		
-----					
JP 2002086753	A	26-03-2002	NONE		
-----					
WO 9008564	A	09-08-1990	AT	129163 T	15-11-1995
			AU	649218 B2	19-05-1994
			AU	5029190 A	24-08-1990
			CA	2045691 A1	02-08-1990
			WO	9008564 A1	09-08-1990
			DE	69023124 D1	23-11-1995
			EP	0456694 A1	21-11-1991
			ES	2081973 T3	16-03-1996
			JP	2935562 B2	16-08-1999
			JP	4504512 T	13-08-1992
			US	5458658 A	17-10-1995
			US	5611781 A	18-03-1997
			US	5662610 A	02-09-1997
			US	5328482 A	12-07-1994
			US	5322517 A	21-06-1994
-----					
JP 10202896 3	A		NONE		
-----					
JP 06099588 3	A		NONE		
-----					
US 5623290	A	22-04-1997	JP	2610018 B2	14-05-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 1659

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-01-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5623290 A		JP 62216751 A	24-09-1987
		JP 62236747 A	16-10-1987
		JP 63011344 A	18-01-1988
		JP 2075985 C	25-07-1996
		JP 7115473 B	13-12-1995
		JP 63011345 A	18-01-1988
		JP 2075986 C	25-07-1996
		JP 7115474 B	13-12-1995
		JP 63011346 A	18-01-1988
		JP 63057238 A	11-03-1988
		DE 3708865 A1	01-10-1987
		US 5136309 A	04-08-1992
US 2002047882 A1	25-04-2002	AU 1265002 A	06-05-2002
		AU 1265102 A	06-05-2002
		AU 1265202 A	06-05-2002
		EP 1244558 A2	02-10-2002
		WO 0234543 A2	02-05-2002
		WO 0234523 A2	02-05-2002
		WO 0234524 A2	02-05-2002
		US 2002044811 A1	18-04-2002
		US 2002070996 A1	13-06-2002
EP 0742102 A	13-11-1996	US 6243117 B1	05-06-2001
		CA 2169901 A1	13-11-1996
		EP 0742102 A2	13-11-1996
		JP 8300688 A	19-11-1996
		KR 202785 B1	15-06-1999
		US 6283588 B1	04-09-2001
US 4777497 A	11-10-1988	JP 1657321 C	13-04-1992
		JP 3026131 B	09-04-1991
		JP 58131071 A	04-08-1983
		DE 3301327 A1	28-07-1983