



(22) **Date de dépôt/Filing Date:** 2007/07/11

(41) **Mise à la disp. pub./Open to Public Insp.:** 2008/01/17

(45) **Date de délivrance/Issue Date:** 2016/12/06

(62) **Demande originale/Original Application:** 2 658 168

(30) **Priorité/Priority:** 2006/07/11 (US60/819,995)

(51) **Cl.Int./Int.Cl. A61F 9/007** (2006.01)

(72) **Inventeurs/Inventors:**

GRIFFIS, JACK C., III, US;
COX, MARK A., US;
WILLIAMSON, DOUGLAS C., US;
ZDENEK, GENE W., US;
RICHARDSON, PETER J., US;
SMOLEK, MICHAEL K., US;
SOLOWAY, BARRIE D., US;

...


(73) **Propriétaire/Owner:**

REFOCUS GROUP, INC., US

(74) **Agent:** BLAKE, CASSELS & GRAYDON LLP

(54) **Titre : DISPOSITIF ET SYSTEME DESTINES A FIXER UN TISSU OCULAIRE**

(54) **Title: DEVICE AND SYSTEM FOR SECURING OCULAR TISSUE**

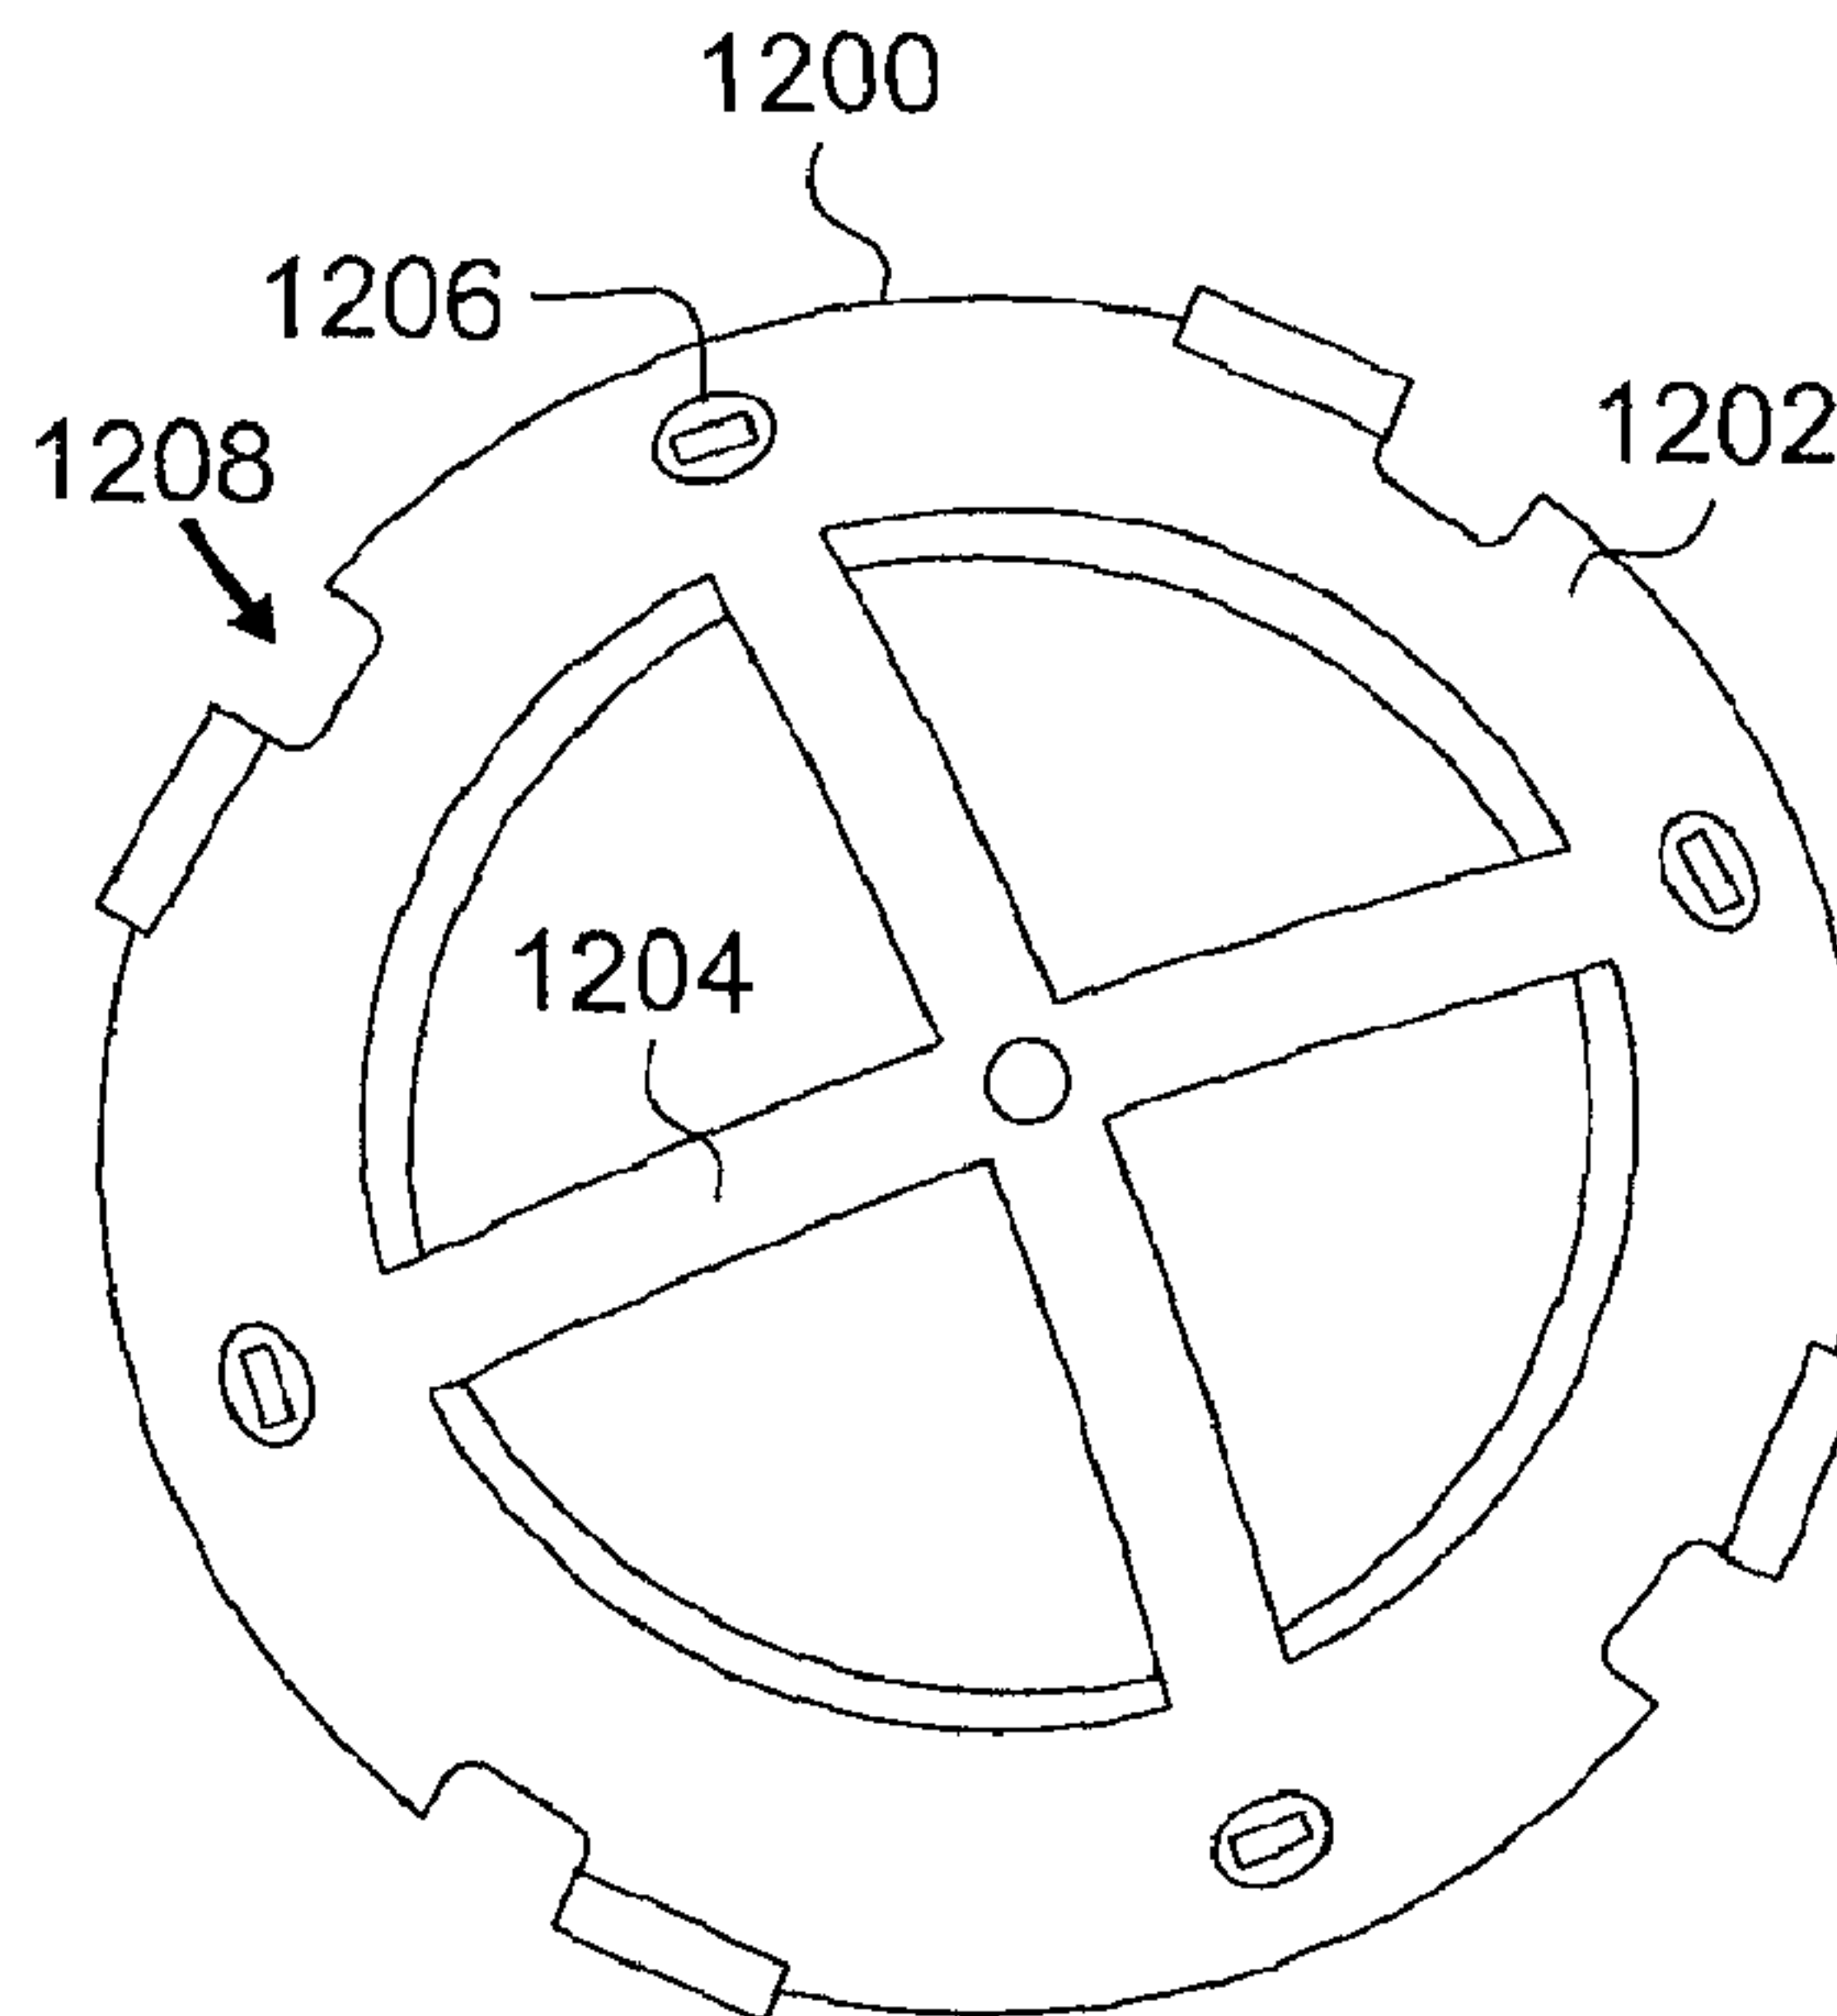

(57) **Abrégé/Abstract:**

Various ocular fixation devices are disclosed. One ocular fixation device (100, 200, 300, 500, 600) includes first and second rings (106-108, 206-208, 304-306, 506-508, 606-608), where at least one of the rings includes means for fixating ocular tissue of an

(72) **Inventeurs(suite)/Inventors(continued):** BARE, REX O., US; SCHERER, ANDREW J., US; PAYNE, TIMOTHY J., US

(57) **Abrégé(suite)/Abstract(continued):**

eye. The means for fixating are arranged to grasp the ocular tissue of the eye and to release the ocular tissue of the eye based on rotation of at least one of the first and second rings. The ocular fixation device may also include one or more structures on which a surgical tool (450, 522, 616) can be mounted on the ocular fixation device at one or more locations. For instance, a dome (112, 204, 302, 504, 604) of the ocular fixation device could include one or more holes (614) that are configured to receive one or more projections from the surgical tool. As another example, a base (110, 202, 502, 602) of the ocular fixation device could include one or more notches (520) configured to receive a projection from the surgical tool.

ABSTRACT OF THE DISCLOSURE

Various ocular fixation devices are disclosed. One ocular fixation device (100, 200, 300, 500, 600) includes first and second rings (106-108, 206-208, 304-306, 506-508, 606-608), where at least one of the rings includes means for fixating ocular tissue of an eye. The means for fixating are arranged to grasp the ocular tissue of the eye and to release the ocular tissue of the eye based on rotation of at least one of the first and second rings.

10 The ocular fixation device may also include one or more structures on which a surgical tool (450, 522, 616) can be mounted on the ocular fixation device at one or more locations. For instance, a dome (112, 204, 302, 504, 604) of the ocular fixation device could include one or more

15 holes (614) that are configured to receive one or more projections from the surgical tool. As another example, a base (110, 202, 502, 602) of the ocular fixation device could include one or more notches (520) configured to receive a projection from the surgical tool.

DEVICE AND SYSTEM FOR SECURING OCULAR TISSUE

CROSS-REFERENCE TO RELATED PATENT DOCUMENTS

5 **[0001]** This application is related to the following U.S.
patent applications and issued patents:

- (1) U.S. Patent No. 6,007,578 entitled "Scleral
Prosthesis for Treatment of Presbyopia and Other
Eye Disorders" issued on December 28, 1999;
- 10 (2) U.S. Patent No. 6,280,468 entitled "Scleral
Prosthesis for Treatment of Presbyopia and Other
Eye Disorders" issued on August 28, 2001;
- (3) U.S. Patent No. 6,299,640 entitled "Scleral
Prosthesis for Treatment of Presbyopia and Other
15 Eye Disorders" issued on October 9, 2001;
- (4) U.S. Patent No. 5,354,331 entitled "Treatment of
Presbyopia and Other Eye Disorders" issued on
October 11, 1994;
- (5) U.S. Patent No. 5,465,737 entitled "Treatment of
20 Presbyopia and Other Eye Disorders" issued on
November 14, 1995;
- (6) U.S. Patent No. 5,489,299 entitled "Treatment of
Presbyopia and Other Eye Disorders" issued on
February 6, 1996;
- 25 (7) U.S. Patent No. 5,503,165 entitled "Treatment of
Presbyopia and Other Eye Disorders" issued on
April 2, 1996;
- (8) U.S. Patent No. 5,529,076 entitled "Treatment of
Presbyopia and Other Eye Disorders" issued on
30 June 25, 1996;
- (9) U.S. Patent No. 5,722,952 entitled "Treatment of
Presbyopia and Other Eye Disorders" issued on
March 3, 1998;

March 3, 1998;

- (10) U.S. Patent No. 6,197,056 entitled "Segmented Scleral Band for Treatment of Presbyopia and Other Eye Disorders" issued on March 6, 2001;
- 5 (11) U.S. Patent No. 6,579,316 entitled "Segmented Scleral Band for Treatment of Presbyopia and Other Eye Disorders" issued on June 17, 2003;
- (12) U.S. Patent No. 6,926,727 entitled "Surgical Blade for Use with a Surgical Tool for Making Incisions for Scleral Eye Implants" issued on 10 August 9, 2005;
- (13) U.S. Patent No. 6,991,650 entitled "Scleral Expansion Device Having Duck Bill" issued on January 31, 2006;
- 15 (14) U.S. Patent No. 7,189,248 entitled "System and Method for Making Incisions for Scleral Eye Implants" issued on March 13, 2007;
- (15) U.S. Patent Publication No. US2004/0073245 entitled "System and Method for Determining a Position for a Scleral Pocket for a Scleral Prosthesis" published on April 15, 2004; 20
- (16) U.S. Patent Publication No. US2005/0283233 entitled "Scleral Prosthesis for Treatment of Presbyopia and Other Eye Disorders" published on 25 December 22, 2005;
- (17) U.S. Patent Publication No. US2006/0036269 entitled "Surgical Blade for Use with a Surgical Tool for Making Incisions for Scleral Eye Implants" published on February 16, 2006;
- 30 (18) U.S. Patent Publication No. US2006/0095126 entitled "Scleral Expansion Device Having Duck Bill" published on May 4, 2006;

- (19) U.S. Patent Publication No. US2006/0106408
entitled "Surgical Blade for Use with a Surgical
Tool for Making Incisions for Scleral Eye
Implants" published on May 18, 2006;
- 5 (20) U.S. Patent Publication No. US2006/0106409
entitled "System and Method for Making Incisions
for Scleral Eye Implants" published on May 18,
2006;
- 10 (21) U.S. Patent Publication No. US2006/0106457
entitled "Segmented Scleral Band for Treatment of
Presbyopia and Other Eye Disorders" published on
May 18, 2006; and
- 15 (22) U.S. Patent Publication No. US2006/0111775
entitled "Segmented Scleral Band for Treatment of
Presbyopia and Other Eye Disorders" published on
May 25, 2006.

TECHNICAL FIELD

20 [0002] This disclosure is generally directed to surgical
devices and more specifically to an apparatus and method
for securing and modifying ocular tissue.

25

BACKGROUND

[0003] It is often desirable or necessary to secure a patient's eye in place during ocular surgery. For example, it is possible to restore the accommodative power to a presbyopic eye by implanting scleral prostheses within the sclera of the patient's eye. It is also possible to treat glaucoma, ocular hypertension, elevated intraocular pressure, or other eye disorders by implanting scleral prostheses within the sclera of the patient's eye. During these types of procedures, an incision can be made in the sclera of the eye and extended under the surface of the sclera to form a scleral "tunnel." A scleral prosthesis can then be placed within the tunnel. Before performing a surgical procedure to implant scleral prostheses or other surgical eye procedure, the patient's eye often needs to be fixated so that the patient's eye does not move during the surgical procedure.

[0004] FIGURES 16A and 16B illustrate a conventional ocular fixation tool. This ocular fixation tool is placed on the surface of a patient's eye and is physically sutured to the sclera of the patient's eye. This ocular fixation tool includes various notches in which a surgical tool can be placed.

[0005] FIGURE 17 illustrates a second conventional ocular fixation tool having a solid ring with spikes (not shown) that can be depressed into the tissue of a patient's eye. This ocular fixation tool also includes a handle rotatably coupled to the solid ring, where the handle can be used to move and position the tool. In addition, this ocular fixation tool includes a projection from the solid ring, where a surgical tool can be mounted on the projection.

[0006] FIGURES 18A and 18B illustrate a third conventional ocular fixation tool having a handle, a solid first ring, and a divided second ring. The solid first ring is rotatably coupled to the handle. The divided second ring includes two arms that are rotatably coupled to the central ring at a common pivot point. As shown in FIGURE 18A, the two arms of the second ring are in the open position, and the first ring may be placed in a desired location on a patient's eye. As shown in FIGURE 18B, the two arms of the second ring can then be closed, which drives prongs or other extensions on the arms into the tissue of the patient's eye. After that, the handle can be rotated sideways so that a surgeon or tool has clear access to the patient's eye through the rings. In other embodiments, the handle and the solid first ring can be omitted, and the second ring could be used by itself (the arms can be closed and opened to lock the second ring onto and release a patient's ocular tissue). In still other embodiments, the two arms of the second ring could lack prongs or other extensions themselves, and the arms could be used to drive pins or other extensions on the first ring into a patient's ocular tissue.

SUMMARY

[0007] This disclosure provides an apparatus and method for securing ocular tissue.

[0008] In a first embodiment, an apparatus includes a first ring and a second ring, where at least one of the rings includes means for fixating ocular tissue of an eye. The means for fixating are arranged to grasp the ocular tissue of the eye and to release the ocular tissue of the eye based on rotation of at least one of the rings.

[0009] In particular embodiments, the means for fixating are arranged to grasp the ocular tissue of the eye in an area of the eye associated with the limbus of the eye.

[0010] In other particular embodiments, the apparatus also includes a housing in which the first and second rings are housed and a retaining ring within the housing configured to retain the first and second rings in the housing. The housing could also include a dome configured to protect a central portion of the eye.

[0011] In yet other particular embodiments, the apparatus also includes a base configured to be placed on the ocular tissue of the eye and to retain the first and second rings. The apparatus could also include a dome configured to protect a central portion of the eye.

[0012] In still other particular embodiments, the first and second rings include tabs that extend outside of the dome and the base. The tabs may be configured to rotate at least one of the first and second rings.

[0013] In additional particular embodiments, the apparatus includes one or more mechanisms for aligning a surgical tool with a position on the eye. For example, the dome could include one or more holes configured to receive one or more projections from a surgical tool so as to align

21843509.2

the surgical tool with a position on the eye. As another example, the base could include one or more notches, where each notch is configured to receive a projection from a surgical tool so as to align the surgical tool with a position on the eye. In addition, the base could include one or more portions that are configured to lie on the eye. The one or more portions could include one or more edges configured to allow a base of the surgical tool to be aligned against one of the edges when the projection from the surgical tool is inserted into one of the notches.

[0014] In a second embodiment, a system includes an ocular fixation device having a first ring and a second ring. At least one of the rings includes means for fixating ocular tissue of an eye, where the means for fixating are arranged to grasp the ocular tissue of the eye and to release the ocular tissue of the eye based on rotation of at least one of the rings. The system also includes a surgical tool mountable on the ocular fixation device.

[0015] In particular embodiments, the surgical tool includes a surgical blade configured to form a scleral tunnel in the ocular tissue of the eye.

[0016] In a third embodiment, a method includes placing an ocular fixation device on an eye of a patient. The ocular fixation device includes a first ring and a second ring, where at least one of the rings includes means for fixating ocular tissue of the patient's eye. The method also includes rotating at least one of the first and second rings so that the means for fixating grasp the ocular tissue of the patient's eye.

[0017] In particular embodiments, the method also includes rotating at least one of the first and second

21843509.2

rings so that the means for fixating release the ocular tissue of the patient's eye.

[0018] In a fourth embodiment, an apparatus includes a first ring having a plurality of first teeth and a second
5 ring having a plurality of second teeth. The first and second teeth are arranged to grasp ocular tissue of an eye and to release the ocular tissue of the eye based on rotation of at least one of the rings.

[0019] In a fifth embodiment, an apparatus includes one
10 or more rings having means for fixating ocular tissue of an eye. The means for fixating are arranged to grasp the ocular tissue of the eye and to release the ocular tissue of the eye based on movement of at least one of the one or more rings.

15 [0020] In a sixth embodiment, an apparatus includes a ring configured to be placed on an eye, where the ring includes a plurality of portions for resting against a surface of the eye. The ring also includes a plurality of portions forming a plurality of notches configured to
20 receive sutures for attaching the ring to the eye.

[0021] In a seventh embodiment, an apparatus includes a base configured to be depressed against ocular tissue of an eye. The apparatus also includes means for fixating coupled to the base and configured to be secured against
25 the ocular tissue of the eye. The apparatus further includes a handle configured to move the means for fixating.

[0022] In an eighth embodiment, an apparatus includes a central portion configured to be placed over at least the
30 cornea of an eye. The apparatus also includes means for fixating ocular tissue of the eye, where the means for fixating are located on the central portion. In addition,
21843509.2

the apparatus includes a tool support attached to the central portion and configured to receive a surgical tool.

[0023] Other technical features may be readily apparent to one skilled in the art from the following figures, 5 descriptions, and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] For a more complete understanding of this disclosure, reference is now made to the following description, taken in conjunction with the accompanying
5 drawing, in which:

[0025] FIGURES 1A through 1F illustrate a first example ocular fixation device in accordance with this disclosure;

[0026] FIGURES 2A through 2C illustrate a second example ocular fixation device in accordance with this disclosure;

10 [0027] FIGURES 3A through 3C illustrate a third example ocular fixation device in accordance with this disclosure;

[0028] FIGURES 4A through 4I illustrate an example use of an ocular fixation device during creation of a scleral tunnel for receiving a scleral prosthesis in accordance
15 with this disclosure;

[0029] FIGURES 5A through 5C illustrate a fourth example ocular fixation device and an example use of the ocular fixation device in accordance with this disclosure;

[0030] FIGURES 6A through 6C illustrate a fifth example
20 ocular fixation device and an example use of the ocular fixation device in accordance with this disclosure;

[0031] FIGURE 7 illustrates an example positioning tool for use with an ocular fixation device in accordance with this disclosure;

25 [0032] FIGURE 8 illustrates a sixth example ocular fixation device in accordance with this disclosure;

[0033] FIGURES 9A through 9C illustrate a seventh example ocular fixation device and an example use of the ocular fixation device in accordance with this disclosure;

30 [0034] FIGURES 10A through 10D illustrate an eighth example ocular fixation device in accordance with this disclosure;

[0035] FIGURES 11A and 11B illustrate a ninth example ocular fixation device in accordance with this disclosure;

[0036] FIGURES 12A and 12B illustrate a tenth example ocular fixation device in accordance with this disclosure;

5 [0037] FIGURES 13A through 13D illustrate an eleventh example ocular fixation device in accordance with this disclosure;

[0038] FIGURES 14A through 14C illustrate a twelfth example ocular fixation device in accordance with this
10 disclosure;

[0039] FIGURE 15 illustrates an example method for ocular fixation in accordance with this disclosure; and

[0040] FIGURES 16A through 18B illustrate conventional ocular fixation tools.

DETAILED DESCRIPTION

[0041] FIGURES 1A through 1F illustrate a first example ocular fixation device 100 in accordance with this disclosure. The embodiment of the ocular fixation device 100 shown in FIGURES 1A through 1F is for illustration only. Other embodiments of the ocular fixation device 100 could be used without departing from the scope of this disclosure.

[0042] As shown in FIGURES 1A and 1B, the ocular fixation device 100 includes a body portion 102, a retention ring 104, and two locking rings 106-108. In this example, the body portion 102 includes a base 110 and a dome 112. The base 110 in this embodiment is generally circular and is used to house the retention ring 104 and the locking rings 106-108. The dome 112 represents a protective cover or shield that can be used to protect the central portion of a patient's eye. The body portion 102 could be formed from any suitable material(s), such as one or more transparent or opaque materials. The body portion 102 could also be formed using any suitable technique, such as injection molding.

[0043] The locking rings 106-108 can be inserted into the body portion 102 and the retention ring 104 can be attached to the body portion 102, which secures the locking rings 106-108 within the body portion 102. The retention ring 104 could be formed from any suitable material(s). The retention ring 104 could also be formed in any suitable manner, such as by injection molding.

[0044] The retention ring 104 could be attached or secured to the body portion 102 in any suitable manner. For example, as shown in FIGURE 1C, the retention ring 104 could include bumps 114, and the body portion 102 could

include corresponding receptacles 116. In this embodiment, the retention ring 104 could be pushed into the body portion 102 until the bumps 114 engage the receptacles 116, locking the retention ring 104 in place.

5 **[0045]** As shown in FIGURE 1C, the retention ring 104 could also have a slanted or tapered inner edge 118. This may help to facilitate placement of the ocular fixation tool 100 on a patient's eye. For example, the edge 118 of the retention ring 104 may be slanted so that it is
10 substantially parallel to the portion of the patient's sclera on which the retention ring 104 rests.

[0046] The locking rings 106-108 are used to secure the ocular fixation device 100 to a patient's eye, thereby helping to fixate and prevent movement of the patient's
15 eye. As shown in FIGURES 1D and 1E, the locking rings 106-108 may include teeth 120. In this example, the locking rings 106-108, including the teeth 120, are substantially planar (although angled teeth could be used). Also, the teeth 120 in different locking rings 106-108 are angled
20 towards each other. At least one of the locking rings 106-108 can rotate with respect to the other locking ring. In this way, the areas between the teeth 120 of the locking rings 106-108 can be increased and decreased. This allows the teeth 120 to grasp ocular tissue when the teeth 120 are
25 pushed closer together. This also allows the teeth 120 to release the ocular tissue when the teeth 120 are pushed farther apart. In some embodiments, the locking rings 106-108 can be sized so that the teeth 120 attach or lock onto scleral tissue of a patient's eye (beyond the cornea and
30 other areas in the central portion of the patient's eye). The locking rings 106-108 could be formed from any suitable material(s), such as a metal. The locking rings 106-108
21843509.2

could also be formed in any suitable manner, such as by photo-etching.

[0047] As shown in FIGURES 1D through 1F, the locking rings 106-108 include windows 122, and the body portion 102 includes corresponding windows 124. In some embodiments, a surgeon could insert a tool through one of the windows 124 and use the tool to cause one or more of the locking rings 106-108 to move. For example, the surgeon could insert a tool through one of the windows 124 and push or pull one of the locking rings 106-108, causing the openings between the teeth 120 of the locking rings 106-108 to open or close. As another example, the surgeon could insert a tool through one of the windows 124 and push both locking rings 106-108 together, causing the openings between the teeth 120 of the locking rings 106-108 to close. In other embodiments, part or all of the body portion 102 could be designed to rotate, causing the locking ring 106 to rotate with respect to the locking ring 108. This may allow, for example, the ocular fixation device 100 to be placed on a patient's eye and then rotated to lock the ocular fixation device 100 onto the patient's eye. Any other or additional technique could be used to cause the teeth 120 of the locking rings 106-108 to move with respect to each other.

[0048] FIGURES 2A through 2C illustrate a second example ocular fixation device 200 in accordance with this disclosure. The embodiment of the ocular fixation device 200 shown in FIGURES 2A through 2C is for illustration only. Other embodiments of the ocular fixation device 200 could be used without departing from the scope of this disclosure.

[0049] The ocular fixation device 200 of FIGURES 2A through 2C operates in a similar manner as the ocular
21843509.2

fixation device 100 of FIGURES 1A through 1F. As shown in
FIGURE 2A, the ocular fixation device 200 includes a base
202, a dome 204, and locking rings 206-208. Cross-sections
showing additional structural details of the ocular
5 fixation device 200 are shown in FIGURES 2B and 2C. As
shown here, the base 202 is attached or secured to the dome
204 (or vice versa), helping to retain the locking rings
206-208 that are located between the base 202 and the dome
204. In this example, the cross-section of the base 202
10 includes a generally flat portion on which the locking
rings 206-208 lie. The cross-section of the base 202 also
includes a projection along its outer edge, which is
attached to or helps secure the dome 204. The base 202
could further have a shape that facilitates its placement
15 on a patient's eye, such as where the flat portion of the
base 202 is slanted or sloped to approximately match a
curvature of the patient's sclera. The base 202 could be
formed from any suitable material(s). The base 202 could
also be formed using any suitable technique, such as
20 injection molding.

[0050] The dome 204 represents a protective cover or
shield protecting the central portion of a patient's eye.
The dome 204 could be formed from any suitable material(s),
such as one or more transparent or opaque materials. The
25 dome 204 could also be formed using any suitable technique,
such as injection molding.

[0051] The locking rings 206-208 are located between the
base 202 and the dome 204. In this example, the locking
rings 206-208 include teeth 210 for attaching or locking
30 onto ocular tissue of a patient's eye. At least one of the
locking rings 206-208 can rotate with respect to the other
locking ring to open and close the areas between the teeth
21843509.2

210 of the locking rings 206-208. This allows the teeth 210 to attach to and release ocular tissue of the patient's eye. In some embodiments, the locking rings 206-208 can be sized so that the teeth 210 attach to scleral tissue of a patient's eye. The locking rings 206-208 could be formed from any suitable material(s), such as a metal. The locking rings 206-208 could also be formed in any suitable manner, such as by photo-etching.

[0052] In this example, the locking rings 206-208 are not completely planar. Instead, each of the locking rings 206-208 includes a main section that is relatively planar and a curved section along its inner edge. The curved section of the locking ring 206 generally lies over and to the inside of the curved section of the locking ring 208. Also, the curved sections of the locking rings 206-208 include, are attached to, or carry the teeth 210 of the locking rings 206-208. In addition, the teeth 210 could be planar or angled with respect to the flat portions of the locking rings 206-208.

[0053] As shown here, each of the locking rings 206-208 includes one or more windows 212. The windows 212 can be used to identify the amount of space between the teeth 210 of the locking rings 206-208. For example, when the windows 212 of the locking rings 206-208 are aligned or nearly aligned, this may indicate that the areas between the teeth 210 of the locking rings 206-208 are substantially closed (the teeth 210 are attached or locked onto the ocular tissue of a patient's eye). Similarly, when the windows 212 of the locking rings 206-208 are not aligned very much, this may indicate that the areas between the teeth 210 of the locking rings 206-208 are substantially open (the ocular tissue of a patient's eye is

21843509.2

not locked or has been released).

[0054] In the illustrated example, the dome 204 may cover the windows 212 of the locking rings 206-208, which could prevent the use of external tools to move the locking rings 206-208. To facilitate the attachment and release of ocular tissue by the ocular fixation device 200, one or both of the locking rings 206-208 could be rotated, such as via rotation of the dome 204 or the base 202. For example, the locking ring 206 could be fixed with respect to the dome 204, and/or the locking ring 208 could be fixed with respect to the base 202. The ocular fixation device 200 could be placed on a patient's eye, and a surgeon could rotate the dome 204 of the ocular fixation device 200. This may cause one of the locking rings 206-208 to rotate with respect to the other locking ring, thereby opening and closing the areas between the teeth 210 of the locking rings 206-208. This technique is for illustration only, and any other suitable technique could be used to attach and release ocular tissue using the ocular fixation device 200. For instance, windows could be formed in the dome 204 above the windows 212 in the locking rings 206-208, allowing the use of an external tool by the surgeon.

[0055] FIGURES 3A through 3C illustrate a third example ocular fixation device 300 in accordance with this disclosure. The embodiment of the ocular fixation device 300 shown in FIGURES 3A through 3C is for illustration only. Other embodiments of the ocular fixation device 300 could be used without departing from the scope of this disclosure.

[0056] As shown in FIGURE 3A, the ocular fixation device 300 includes a dome 302 and locking rings 304-306. Once again, the dome 302 protects the central portion of a

patient's eye and can be formed from any suitable material(s) and in any suitable manner. In this example, the dome 302 is transparent and includes a mark used to center the dome 302 on the patient's eye, although other
5 embodiments could be used. Also, the locking rings 304-306 include teeth 308 that are shaped and positioned so that they are angled towards each other. This allows the teeth 308 of the locking rings 304-306 to attach or lock onto the ocular tissue (such as the scleral tissue) of a patient's
10 eye. As shown in FIGURES 3A and 3B, at least one of the locking rings 304-306 is rotatable with respect to the other to open and close the areas between the teeth 308.

[0057] In this example, the locking rings 304-306 include windows 310, which can provide an indication of
15 whether (and to what extent) the locking rings 304-306 are locked onto ocular tissue. For example, when the locking rings 304-306 are opened (not attached to ocular tissue), the windows 310 in the locking rings 304-306 may be at least partially aligned. When the locking rings 304-306
20 are closed (locked onto ocular tissue), the windows 310 in the locking rings 304-306 are not aligned, and the windows 310 in the locking ring 306 might be hidden.

[0058] As shown in FIGURE 3C, the ocular fixation device 300 can further include a housing 312. The housing 312
25 holds the locking rings 304-306 and the dome 302 of the ocular fixation device 300. The housing 312 may also allow a surgeon to rotate at least one of the locking rings 304-306. In this example, the housing 312 includes windows 314 and connection points 316. The windows 314 in the housing
30 312 may be aligned with the windows 310 in the locking ring 304. This allows the surgeon to determine to what extent the locking rings 304-306 are opened or closed (since the
21843509.2

housing 312 otherwise hides or covers the locking rings 304-306). The connection points 316 represent areas where a surgical tool can be attached to the housing 312 (described in more detail below), although the connection points 316 can be omitted if desired. The housing 312 can be formed from any suitable material(s) and in any suitable manner. The housing 312 can also have any suitable shape or arrangement.

[0059] In this example, the locking rings 304-306 have more of a cylindrical shape (although it need not have a true cylindrical shape and can, for example, have slanted sides). That is, the major surface of each locking ring 304-306 extends along and rotates around a central axis through the center of that locking ring 304-306.

[0060] Although FIGURES 1A through 3C illustrate three examples of ocular fixation devices, various changes may be made to FIGURES 1A through 3C. For example, the relative sizes and dimensions of the features of the ocular fixation devices are for illustration only and can be altered in any suitable manner. Also, various features shown and described with respect to one of the ocular fixation devices could be used with other ocular fixation devices. As a particular example, the locking rings 206-208 of the ocular fixation device 200 could be used with the ocular fixation device 100. As another particular example, the same or similar housing 312 used with the ocular fixation device 300 could be used with the other ocular fixation devices 100 and 200. In addition, the dome could be omitted from an ocular fixation device, such as when the ocular fixation device is used to secure a patient's eye during corneal surgery or other surgical procedure.

[0061] FIGURES 4A through 4I illustrate an example use

of an ocular fixation device during creation of a scleral tunnel for receiving a scleral prosthesis in accordance with this disclosure. The example use shown in FIGURES 4A through 4I is for illustration only. An ocular fixation
5 device could be used in any other suitable manner (including only to fixate a patient's eye) without departing from the scope of this disclosure.

[0062] As shown in FIGURES 4A through 4I, a surgical tool 450 is used, in conjunction with an ocular fixation
10 device 400, to form incisions in a patient's eye. In this example, the ocular fixation device 400 represents the ocular fixation device 300, although any other suitable ocular fixation device could be used.

[0063] In this example, the surgical tool 450 includes a
15 surgical blade 452 and a connecting portion 454. As shown in FIGURES 4A through 4C, the connecting portion 454 of the surgical tool 450 can engage connection points 456 of a housing associated with the ocular fixation device 400, thereby mounting the surgical tool 450 on the ocular
20 fixation device 400. After that, as shown in FIGURES 4B through 4E, the surgical tool 450 can be rotated into position, and the surgical blade 452 can be rotated into and out of the patient's sclera to form a scleral tunnel. This process could then be repeated by mounting the
25 surgical tool 450 at a different connection point 456. As a particular example, four scleral tunnels could be formed in a patient's eye using this technique.

[0064] In some embodiments, the surgical tool 450 is removed from the ocular fixation device 400 after one or
30 more scleral tunnels have been formed but before one or more scleral prostheses are implanted in the tunnels. The ocular fixation device 400 could also be removed from the
21843509.2

patient's eye before or after the scleral prostheses are implanted in the scleral tunnels.

[0065] In other embodiments, the ocular fixation device 400 and the surgical tool 450 could be used to facilitate
5 implantation of a scleral prosthesis in a scleral tunnel. For example, as shown in FIGURES 4F through 4I, the surgical tool 450 could be configured to deposit a scleral prosthesis into a scleral tunnel during formation of the scleral tunnel. In this example, the surgical blade 452
10 includes a central portion 460, a curved cutting blade 462, and two hub arms 464a-464b. The central portion 460 is connected to the surgical tool 450 and can be rotated in multiple directions to move the cutting blade 462 into and out of the scleral tissue of a patient's eye. The hub arms
15 464a-464b couple the central portion 460 to the cutting blade 462, helping to translate rotation of the central portion 460 into movement of the cutting blade 462.

[0066] A prosthesis 466 is engaged with the tail end of the cutting blade 462. The prosthesis 466 could represent
20 any suitable prosthesis, such as any of the prostheses disclosed in the above-referenced patent documents. As shown in FIGURES 4F and 4G, the cutting blade 462 is initially rotated through the scleral tissue of a patient's eye using the hub arm 464b. Eventually, the hub arm 464a
25 engages with the tip of the cutting blade 462, and the hub arm 464b disengages from the cutting blade 462. As shown in FIGURES 4H and 4I, the hub arm 464a then continues to rotate the cutting blade 462 through the scleral tissue and out of the newly formed scleral tunnel. In this example,
30 the prosthesis 466 is pulled into the scleral tunnel upside-down by the surgical blade 452 and disengages from the cutting blade 462. The prosthesis 466 can then be

21843509.2

rotated to properly position the prosthesis 466 in the newly-formed scleral tunnel.

[0067] The technique shown in FIGURES 4F through 4I is for illustration only. Any other suitable technique could be used to implant a scleral prosthesis into a scleral tunnel, whether or not the implantation occurs using an ocular fixation device or a surgical tool mounted on an ocular fixation device.

[0068] Although FIGURES 4A through 4I illustrate one example use of an ocular fixation device during creation of a scleral tunnel for receiving a scleral prosthesis, various changes may be made to FIGURES 4A through 4I. For example, the surgical tool 450 could be attached to or mounted on the ocular fixation device 400 in any suitable manner. Also, the same or similar techniques could be used to form incisions in other portions of a patient's eye. In addition, any other suitable surgical tool could be used in conjunction with an ocular fixation device, or no surgical tool could be used with an ocular fixation device.

[0069] FIGURES 5A through 5C illustrate a fourth example ocular fixation device 500 and an example use of the ocular fixation device 500 in accordance with this disclosure. The embodiment of the ocular fixation device 500 and its use shown in FIGURES 5A through 5C are for illustration only. Other embodiments of the ocular fixation device 500 and uses of the ocular fixation device 500 could be used without departing from the scope of this disclosure.

[0070] As shown in FIGURE 5A, the ocular fixation device 500 is similar to the ocular fixation device 200 of FIGURES 2A through 2C. The ocular fixation device 500 includes a base 502, a dome 504, and locking rings 506-508. In this example, the base 502 is attached or secured to the dome

21843509.2

504 (or vice versa), and the locking rings 506-508 are secured between the base 502 and the dome 504.

[0071] In this example embodiment, the locking rings 506-508 include tabs 510-512, respectively. The tabs 510-512 extend outside of the base 502 and the dome 504. For example, as shown in FIGURE 5B, one or more gaps 514 could exist between the base 502 and the dome 504, and the tabs 510-512 may extend through one or more of the gaps 514. The tabs 510-512 can be used to control the opening and closing of the teeth on the locking rings 506-508. For instance, the tabs 510-512 can be pulled apart to open the teeth on the locking rings 506-508, and the tabs 510-512 can be pushed together to close the teeth on the locking rings 506-508.

[0072] As shown here, the base 502 of the ocular fixation device 500 includes portions 516 that project from the main body of the ocular fixation device 500 and that are arranged to lie generally on a patient's eye. The portions 516 include straight edges or guides 518, and the base 502 also includes notches 520. The guides 518 and the notches 520 are used to align a surgical tool 522 during a surgical procedure. For example, the surgical tool 522 could include a projection 524, which can be inserted into each of the notches 520 of the ocular fixation device 500.

Also, the surgical tool 522 can be positioned so that its base is aligned with one of the straight guides 518 of the ocular fixation device 500. The surgical tool 522 can then be used to form an incision in the patient's eye, such as a scleral tunnel for receiving a scleral prosthesis. In this particular example, the ocular fixation device 500 includes guides 518 and notches 520 in four locations, although any other suitable number of locations could be supported.

[0073] In this way, the ocular fixation device 500 serves to secure the position of the patient's eye during a surgical procedure. At the same time, the ocular fixation device 500 facilitates the placement of the surgical tool 522 in the appropriate locations on the patient's eye.

[0074] Although FIGURES 5A through 5C illustrate a fourth example of an ocular fixation device 500 and an example use of the ocular fixation device 500, various changes may be made to FIGURES 5A through 5C. For example, the relative sizes and dimensions of the features of the ocular fixation device 500 are for illustration only and can be altered in any suitable manner. Also, the guide mechanisms described above (the straight guides 518 and the notches 520) could be used with any other ocular fixation device and any other surgical tool.

[0075] FIGURES 6A through 6C illustrate a fifth example ocular fixation device 600 and an example use of the ocular fixation device 600 in accordance with this disclosure. The embodiment of the ocular fixation device 600 and its use shown in FIGURES 6A through 6C are for illustration only. Other embodiments of the ocular fixation device 600 and uses of the ocular fixation device 600 could be used without departing from the scope of this disclosure.

[0076] As shown in FIGURE 6A, the ocular fixation device 600 is similar to other ocular fixation devices described above. The ocular fixation device 600 includes a base 602, a dome 604, and locking rings 606-608. In this example, the base 602 is attached or secured to the dome 604 (or vice versa), and the locking rings 606-608 are secured between the base 602 and the dome 604. In this particular example, the locking ring 606 includes multiple sets of teeth (which could have different heights from the surface

21843509.2

of a patient's eye), and these teeth correspond to multiple sets of teeth of the locking ring 608. As with the ocular fixation device 500, the locking rings 606-608 also include tabs 610-612, respectively, which extend outside of the base 602 and the dome 604 and can be used to control the opening and closing of the teeth on the locking rings 606-608.

[0077] As shown here, the dome 604 of the ocular fixation device 600 includes holes 614. The holes 614 in this example are used to align a surgical tool 616 to one or more locations of a patient's eye. The surgical tool 616 includes an alignment portion 618, which has two extensions 620a-620b forming a partial circle around the ocular fixation device 600. Each of the extensions 620a-620b includes an end that can be inserted into one of the holes 614 of the ocular fixation device 600. As shown in FIGURES 6B and 6C, the alignment portion 618 of the surgical tool 616 also includes a stopper 622, which can be depressed against the base 602 of the ocular fixation device 600. Collectively, the ends of the extensions 620a-620b and the stopper 622 represent three points that can be used to ensure the proper positioning of the surgical tool 616 on the patient's eye.

[0078] In this example, the surgical tool 616 includes two rotatable grasping clasps 624. As shown in FIGURE 6B, the grasping clasps 624 could be opened before the surgical tool 616 is pressed onto the patient's eye. As shown in FIGURE 6C, when the surgical tool 616 is pressed onto the patient's eye, the grasping clasps 624 rotate (either inward or outward). This helps to secure the surgical tool 616 in place on the patient's eye.

[0079] In this example embodiment, the extensions 620a-
21843509.2

620b of the surgical tool 616 form a partial circle around the ocular fixation device 600. This allows the surgical tool 616 to be attached or mounted to the ocular fixation device 600 while leaving a large portion of the dome 604 exposed. Among other things, this may allow the use of a positioning tool 626, which can be used to place the ocular fixation device 600 into one or more positions on the patient's eye. Additional details regarding an example positioning tool are provided below.

10 **[0080]** Although FIGURES 6A through 6C illustrate a fifth example of an ocular fixation device 600 and an example use of the ocular fixation device 600, various changes may be made to FIGURES 6A through 6C. For example, the relative sizes and dimensions of the features of the ocular fixation device 600 are for illustration only and can be altered in any suitable manner. Also, the guide mechanisms described above (the holes 614 in the dome 604 and the alignment portion 618 of the surgical tool 616) could be used with any other ocular fixation device and any other surgical tool.

20 **[0081]** FIGURE 7 illustrates an example positioning tool 700 for use with an ocular fixation device in accordance with this disclosure. The embodiment of the positioning tool 700 shown in FIGURE 7 is for illustration only. Other embodiments of the positioning tool 700 could be used without departing from the scope of this disclosure.

30 **[0082]** In this example embodiment, the positioning tool 700 represents a syringe structure having a body 702, a plunger 704 inserted into the body 702, a spring 706, and a suction cup 708. The spring 706 biases the plunger 704 in the open position, meaning the spring 706 pushes the plunger 704 away from the suction cup 708 at the end of the

body 702. The end of the plunger 704 can form an air-tight seal within the body 702, and the suction cup 708 can form an air-tight seal with an ocular fixation device.

[0083] To place an ocular fixation device on a patient's eye, the plunger 704 can be depressed, such as by a surgeon or other personnel. The suction cup 708 can be placed on the ocular fixation device, such as on the dome of any of the ocular fixation devices described above. The spring 706 is then allowed to push the plunger 704 away from the suction cup 708. The air-tight seals create a vacuum within the body 702 of the positioning tool 700, causing the suction cup 708 to attach to the ocular fixation device. The ocular fixation device can therefore be picked up, moved, and placed in the appropriate position on a patient's eye using the positioning tool 700. Once in the appropriate position (and possibly after the ocular fixation device has been attached to the patient's eye), the plunger 704 can be depressed. This releases the suction cup 708 from the ocular fixation device.

[0084] This type of positioning tool 700 represents only one example of the types of tools that could be used to position an ocular fixation device. Any other suitable mechanism could be used to position an ocular fixation device. For example, an ocular fixation device could include a handle, such as a flip-ring that can be used to pick up the ocular fixation device and that can be rotated to the side and laid on the dome or base of the ocular fixation device. Any other suitable handle or other mechanism could be used to allow the ocular fixation device to be handled and positioned.

[0085] Although FIGURE 7 illustrates one example of a positioning tool 700 for use with an ocular fixation

device, various changes may be made to FIGURE 7. For example, any other suitable device or technique could be used to place an ocular fixation device on a patient's eye.

[0086] FIGURE 8 illustrates a sixth example ocular fixation device 800 in accordance with this disclosure. The embodiment of the ocular fixation device 800 shown in FIGURE 8 is for illustration only. Other embodiments of the ocular fixation device 800 could be used without departing from the scope of this disclosure.

[0087] In this example, the ocular fixation device 800 includes a base 802, a fixation mechanism 804, and a handle 806. The base 802 may generally be pressed against a patient's eye, such as by pressing the base 802 down on the patient's cornea. The fixation mechanism 804 can then be attached to the patient's sclera, fixing the tool 800 in place and providing clear access to the patient's sclera. The fixation mechanism 804 could use any suitable technique to latch onto the patient's eye, such as prongs that can be forced into the patient's scleral tissue. The handle 806 can be used to raise and lower the fixation mechanism 804 after the base 802 has been pressed onto the patient's eye.

[0088] Although FIGURE 8 illustrates a sixth example ocular fixation device 800, various changes may be made to FIGURE 8. For example, any suitable mechanisms could be used to attach or otherwise associate the ocular fixation device 800 to the patient's eye.

[0089] FIGURES 9A through 9C illustrate a seventh example ocular fixation device 900 and an example use of the ocular fixation device 900 in accordance with this disclosure. The embodiment of the ocular fixation device 900 and its use shown in FIGURES 9A through 9C are for illustration only. Other embodiments of the ocular

fixation device 900 and uses of the ocular fixation device 900 could be used without departing from the scope of this disclosure.

5 **[0090]** As shown in FIGURES 9A through 9C, the ocular fixation device 900 includes a central portion 902, a support 904 having a tool connection 906, and prongs 908. In some embodiments, the central portion 902 of the ocular fixation device 900 generally fits over the patient's cornea or some other portion of the patient's eye. The
10 central portion 902 of the ocular fixation device 900 may also be centered on the patient's eye. The support 904 may be removably attached to the central portion 902, and the tool connection 906 allows a surgical tool 910 to be attached to the support 904.

15 **[0091]** The prongs 908 hold the central portion 902 of the ocular fixation device 900 in place on the patient's eye. For example, the prongs 908 could be extended out as shown in FIGURE 9A prior to placement on the patient's eye.

20 The prongs 908 could then be pushed or rotated so that the ends of the prongs 908 attach or secure to the patient's eye.

25 **[0092]** In particular embodiments, the support 904 can be attached in one orientation to the central portion 902, the surgical tool 910 can be attached to the support 904, and a scleral tunnel can be formed. This process could then be repeated, with the support 904 being removed and attached in a different orientation to the central portion 902 so that the surgical tool 910 can form a scleral tunnel at another location on the patient's eye.

30 **[0093]** Although FIGURES 9A through 9C illustrate a seventh example ocular fixation device 900 and an example use of the ocular fixation device 900, various changes may
21843509.2

be made to FIGURES 9A through 9C. For example, the ocular fixation device 900 could include other mechanisms for attachment to the patient's eye or to a surgical tool 910.

[0094] FIGURES 10A through 10D illustrate an eighth example ocular fixation device 1000 in accordance with this disclosure. The embodiment of the ocular fixation device 1000 shown in FIGURES 10A through 10D is for illustration only. Other embodiments of the ocular fixation device 1000 could be used without departing from the scope of this disclosure.

[0095] In this example, the ocular fixation device 1000 includes an outer ring 1002, an inner ring 1004, and ring connections 1006. The outer and inner rings 1002-1004 represent generally circular-shaped structures. As shown in FIGURE 10A, the outer ring 1002 is generally in a different plane than the smaller inner ring 1004. The ring connections 1006 generally couple the outer and inner rings 1002-1004 together, forming an integrated structure. The ring connections 1006 are shaped such that a portion of a patient's eye can fit through the outer ring 1002 and approach or contact the inner ring 1004.

[0096] As shown here, the ocular fixation device 1000 also includes multiple prongs 1008, which are rotatably coupled to the outer ring 1002. As shown in FIGURE 10B, the prongs 1008 can be opened prior to placement of the ocular fixation device 1000 on the patient's eye. As shown in FIGURES 10C and 10D, once placed on the patient's eye, each of the prongs 1008 can be rotated such that the ends of the prongs 1008 attach or secure to the patient's eye. To release the ocular fixation device 1000, the prongs 1008 can be rotated again to remove the ends of the prongs 1008 from the patient's eye.

[0097] Although FIGURES 10A through 10D illustrate an eighth example ocular fixation device 1000, various changes may be made to FIGURES 10A through 10D. For example, the rings 1002-1004 could have any suitable dimensions, and the inner ring 1004 could have any suitable distance from the outer ring 1002. Also, any suitable mechanisms could be used to couple the rings 1002-1004 together and to attach or otherwise associate the ocular fixation device 1000 to the patient's eye.

10 [0098] FIGURES 11A and 11B illustrate a ninth example ocular fixation device 1100 in accordance with this disclosure. The embodiment of the ocular fixation device 1100 shown in FIGURES 11A and 11B is for illustration only.

Other embodiments of the ocular fixation device 1100 could be used without departing from the scope of this disclosure.

[0099] In this example, the ocular fixation device 1100 is formed from two rotatable segments 1102. Each segment 1102 includes prongs 1104 that can fix the segment 1102 to a patient's eye, such as in the sclera of the eye. Each segment 1102 also includes connection points 1104, which represent areas where other components (such as a surgical tool) can be attached to the ocular fixation device 1100. In addition, the ocular fixation device 1100 can provide reference markers identifying where scleral tunnels should be formed in the patient's eye, such as at locations at or between the prongs 1104. In some embodiments, one of the segments 1102 can be attached to the patient's eye, and then the other segment 1102 can be rotated out and attached to the patient's eye.

[00100] Although FIGURES 11A and 11B illustrate a ninth example ocular fixation device 1100, various changes

21843509.2

may be made to FIGURES 11A and 11B. For example, each rotatable segment 1102 could include any suitable number of prongs 1104.

[00101] FIGURES 12A and 12B illustrate a tenth
5 example ocular fixation device 1200 in accordance with this disclosure. The embodiment of the ocular fixation device 1200 shown in FIGURES 12A and 12B is for illustration only. Other embodiments of the ocular fixation device 1200 could be used without departing from the scope of this
10 disclosure.

[00102] In this example, the ocular fixation device 1200 generally includes a ring 1202 with crossbars 1204. The ring 1202 is generally sized and shaped to lie on a patient's eye, such as by having a slanted inner edge that
15 generally lies on the sclera of the patient's eye. The crossbars 1204 are generally sized and shaped to allow a portion of the patient's eye to fit through the ring 1202 and approach or contact the crossbars 1204.

[00103] In this example embodiment, twist picks 1206
20 are provided along the ring 1202. The twist picks 1206 represent screw-type structures that can attach to and release the ocular tissue of the patient's eye. For example, rotating the twist picks 1206 in one direction may attach the twist picks 1206 to the ocular tissue of the
25 patient's eye. Rotating the twist picks 1206 in the opposite direction may release the ocular tissue. In this way, the ring 1202 can be attached to the patient's eye through simple rotation of the twist picks 1206.

[00104] As shown here, the ocular fixation device
30 1200 also includes connection points 1208. The connection points 1208 generally represent areas where, for example, a surgical tool for forming scleral incisions can be mounted
21843509.2

on the ocular fixation device 1200. In this example, each of the connection points 1208 includes an elevated area of the ring 1202 adjacent to a notch in the ring 1202. However, any other suitable mechanism could be used to
5 mount or otherwise couple any suitable surgical tool to the ocular fixation device 1200.

[00105] Although FIGURES 12A and 12B illustrate a tenth example ocular fixation device 1200, various changes may be made to FIGURES 12A and 12B. For example, the ring
10 1202 and the crossbars 1204 could have any suitable shape or dimensions, and the crossbars 1204 could join at any suitable height above the ring 1202. Also, any suitable mechanisms could be used to attach or otherwise associate the ocular fixation device 1200 to the patient's eye.

[00106] FIGURES 13A through 13D illustrate an
15 eleventh example ocular fixation device 1300 in accordance with this disclosure. The embodiment of the ocular fixation device 1300 shown in FIGURES 13A through 13D is for illustration only. Other embodiments of the ocular
20 fixation device 1300 could be used without departing from the scope of this disclosure.

[00107] In this example, the ocular fixation device 1300 includes a ring 1302 having a lever 1304. The lever 1304 is used to control the movement of retractable pins
25 1306, which can be retracted into and extended out of the ring 1302. For example, the lever 1304 could be placed in the raised position as shown in FIGURE 13A to retract the pins 1306 into the ring 1302. The ring 1302 could then be placed on the patient's eye and positioned properly. After
30 that, the lever 1304 can be lowered as shown in FIGURE 13B, causing the pins 1306 to extend from the ring 1302 and lock onto the patient's ocular tissue. For instance, the pins
21843509.2

1306 could penetrate the limbus of the patient's eye to a depth of 200 microns. Any suitable mechanism could be used to cause the pins 1306 to retract and extend under the control of the lever 1304.

5 **[00108]** In this example embodiment, the ocular fixation device 1300 could also include vertical teeth 1308, which may or may not penetrate the surface of the patient's eye. If the vertical teeth 1308 do not penetrate the surface of the patient's eye, the vertical teeth 1308
10 could still grip the patient's eye and provide lateral fixation, meaning the vertical teeth 1308 may help to prevent sideways motion of the ocular fixation device 1300 on the patient's eye. In addition, as with various prostheses described above, the ocular fixation device 1300
15 can include one or more connection points 1310 and one or more windows 1312.

[00109] Although FIGURES 13A through 13D illustrate an eleventh example ocular fixation device 1300, various changes may be made to FIGURES 13A through 13D. For
20 example, the ring 1302, lever 1304, pins 1306, and other elements could have any suitable shape or dimensions. Also, any suitable mechanisms could be used to attach or otherwise associate the ocular fixation device 1300 to the patient's eye.

25 **[00110]** FIGURES 14A through 14C illustrate a twelfth example ocular fixation device 1400 in accordance with this disclosure. The embodiment of the ocular fixation device 1400 shown in FIGURES 14A through 14C is for illustration only. Other embodiments of the ocular fixation device 1400
30 could be used without departing from the scope of this disclosure.

[00111] In this example, the ocular fixation device
21843509.2

1400 includes a ring 1402 having a latch 1404 at one end and a receptacle 1406 at its other end. The ring 1402 also includes a hinge 1408, allowing two portions of the ring 1402 to open and close with respect to each other. In this
5 embodiment, the portions of the ring 1402 can be pushed apart to open the ring 1402. The ring 1402 can be placed on a patient's eye, and the latch 1404 can be pushed into the receptacle 1406, forming a completed ring. As shown in
FIGURE 14B, the lower edge of the ring 1402 includes spikes
10 1410 that can dig into the ocular tissue of the patient's eye, securing the ring 1402 in place on the patient's eye.

[00112] As shown here, the ocular fixation device 1400 also includes connection points 1412, which generally represent areas where, for example, a surgical tool for
15 forming scleral incisions can be mounted on the ocular fixation device 1400. Any suitable type of connection points or other mechanisms could be used to mount or otherwise couple any suitable surgical tool to the ocular fixation device 1400.

20 [00113] The ocular fixation device 1400 further includes one or more windows 1414. The windows 1414 allow a surgeon or other personnel to see through the ocular fixation device 1400 so as to determine the position of the ocular fixation device 1400 with respect to certain
25 features of the patient's eye. For example, the windows 1414 could allow a surgeon to ensure that the ocular fixation device 1400 is attached to the area at or near the limbus of the patient's eye. The windows 1414 could have any suitable size, shape, and distribution in the ocular
30 fixation device 1400.

[00114] Although FIGURES 14A through 14C illustrate a twelfth example ocular fixation device 1400, various
21843509.2

changes may be made to FIGURES 14A through 14C. For example, the ring 1402, latch 1404, and receptacle 1406 could have any suitable shape or dimensions. Also, any suitable mechanisms could be used to attach or otherwise
5 associate the ocular fixation device 1400 to the patient's eye.

[00115] For all of the ocular fixation devices described above, the various components or elements of the ocular fixation devices could have any suitable shapes,
10 sizes, or dimensions. For example, various ones of the ocular fixation devices could have curved bottom surfaces, allowing the ocular fixation devices to generally lie on the surface of a patient's eye. Also, various elements or features of one of the ocular fixation devices could be
15 used with others of the ocular fixation devices. Further, while often described as being attached to or otherwise associated with the patient's eye at the sclera, the ocular fixation devices could be attached to or otherwise associated with the patient's eye at other locations. In
20 addition, the ocular fixation devices are often described as being used to support a surgical procedure involving the implantation of scleral prostheses into scleral tunnels in a patient's eye. However, any other suitable surgical procedure could be performed using the ocular fixation
25 devices.

[00116] In particular embodiments, any of the ocular fixation devices described above could be sized such that the teeth, prongs, or other fixating means for associating the ocular fixation device with an eye are secured to,
30 contact, are coupled to, or release tissue at or near the limbus of the eye. This region of the eye may be well-suited to this type of procedure as it heals rapidly.

21843509.2

However, each of the ocular fixation devices could have any other suitable size or shape.

[00117] The use of various mechanisms have been described above for securing or fixating ocular tissue, such as rings or other devices having teeth, prongs, or pins. However, ocular fixation devices could use any suitable mechanism for securing or fixating ocular tissue.

In this document, the phrases "means for fixating" and "fixating means" refer to any structure or portion thereof that extends from, projects from, forms a part of, or is otherwise associated with an ocular fixation device and that is pressed against, contacts, or penetrates the surface of a patient's eye. These "fixating means" include one or more teeth, prongs, pins, outcroppings, or other extensions or projections coupled to, attached to, extending from, integrated with, or otherwise associated with a ring or other structure placed proximate to the eye.

The "fixating means" also include other mechanical structures such as one or more twist picks or sutures. In some embodiments, "fixating means" such as teeth may be planar or angled with respect to the structure with which the means are associated. Moreover, in this document, an ocular fixation device is said to be "associated with" an eye when the ocular fixation device is secured or attached to the eye.

[00118] FIGURE 15 illustrates an example method 1500 for ocular fixation in accordance with this disclosure. The embodiment of the method 1500 shown in FIGURE 15 is for illustration only. Other embodiments of the method 1500 could be used without departing from the scope of this disclosure.

[00119] An ocular fixation device is placed on a

patient's eye at step 1502. This could include, for example, placing any of the ocular fixation devices described above on the patient's eye. The ocular fixation device could include a dome so that the central portion of the patient's eye is covered and protected by the ocular fixation device.

[00120] One or more locking rings of the ocular fixation device are rotated to secure the ocular fixation device to the patient's eye at step 1504. This could include, for example, using an external tool to move one or more of the locking rings of the ocular fixation device. This could also include rotating one or more portions of the ocular fixation device to cause one or more of the locking rings to rotate. This could further include rotating one or more tabs coupled to one or more of the locking rings to cause one or more of the locking rings to rotate. Any other suitable technique could be used here to rotate one or more locking rings of the ocular fixation device.

[00121] An ocular surgical procedure occurs at step 1506. This could include, for example, forming one or more scleral tunnels in sclera of the patient's eye. Optionally, one or more scleral prostheses or other implants are placed in the patient's eye at step 1507. This could include, for example, inserting the scleral prostheses as the tunnels are being formed (as shown in FIGURES 4F through 4I above). This could also include inserting the scleral prostheses into the tunnels manually or otherwise after a surgical tool has been mounted on the ocular fixation device and used to form the scleral tunnels.

[00122] One or more locking rings of the ocular
21843509.2

fixation device are rotated to release the ocular fixation device from the patient's eye at step 1508. This could include, for example, using an external tool, one or more portions of the ocular fixation device, or tabs coupled to the locking rings to rotate one or more of the locking rings. The ocular fixation device is removed from the patient's eye at step 1510. Optionally, one or more scleral prostheses or other implants are placed in the patient's eye at step 1511. This could include, for example, inserting the scleral prostheses into the tunnels manually or otherwise after the ocular fixation device has been removed from the patient's eye. One or both of the optional steps 1507 and 1511 show that the ocular fixation device can be used in a variety of ways during a surgical procedure.

[00123] Although FIGURE 15 illustrates one example of a method 1500 for ocular fixation, various changes may be made to FIGURE 15. For example, any suitable surgical procedure could involve the use of ocular fixation. Also, the surgical procedure may, but need not, involve the implantation of one or more scleral prostheses or other implants or elements into the patient's eye. Further, while described as rotating one or more locking rings to secure and release the patient's eye, other techniques (such as those associated with other embodiments of the ocular fixation devices described above) could be used.

[00124] It may be advantageous to set forth definitions of certain words and phrases used throughout this patent document. The terms "include" and "comprise," as well as derivatives thereof, mean inclusion without limitation. The term "or" is inclusive, meaning and/or. The term "ring" refers to a structure that is generally

21843509.2

circular or ovoidal in shape.

[00125] While this disclosure has described certain embodiments and generally associated methods, alterations and permutations of these embodiments and methods will be
5 apparent to those skilled in the art. For example, while shown as providing for the manual rotation or movement of one or more rings or other structures in an ocular fixation device, any suitable technology, such as a mechanical or electrical mechanism, could be used to rotate or move one
10 or more rings or other structures in an ocular fixation device. Accordingly, the above description of example embodiments does not define or constrain this disclosure. Other changes, substitutions, and alterations are also possible without departing from the scope of this
15 disclosure.

What is claimed is:

1. An ocular fixation device comprising:
a body configured to be placed on an eye; and
multiple twist picks configured to be rotated to attach the body to the eye and to release the body from the eye;
wherein the body comprises connection points on which a surgical tool is mountable on the body; and
wherein each twist pick is rotatable independent of the other twist picks.
2. The ocular fixation device of claim 1, wherein the body comprises a plurality of crossbars.
3. The ocular fixation device of claim 2, wherein:
the body comprises a ring, the crossbars extending across the ring; and
the crossbars meet at a specified height above the ring.
4. The ocular fixation device of claim 3, wherein the ring comprises a slanted inner edge configured to lie on a sclera of the eye.
5. The ocular fixation device of claim 3, wherein each of the connection points includes an elevated area of the ring adjacent to a notch in the ring.
6. The ocular fixation device of claim 1, wherein each twist pick is configured such that rotation of the twist pick in one direction attaches the twist pick to ocular tissue of the eye and rotation of the twist pick in another direction releases the twist pick from the ocular tissue of the eye.
7. The ocular fixation device of claim 1, wherein the twist picks are located inwards of an outer rim of the body.
8. A system comprising:
a surgical tool; and

- an ocular fixation device comprising:
- a body configured to be placed on an eye; and
 - multiple twist picks configured to be rotated to attach the body to the eye and to release the body from the eye;
- wherein the body comprises connection points on which the surgical tool is mountable on the body; and
- wherein each twist pick is rotatable independent of the other twist picks.
9. The system of claim 8, wherein the body comprises a plurality of crossbars.
10. The system of claim 9, wherein:
- the body comprises a ring, the crossbars extending across the ring; and
 - the crossbars meet at a specified height above the ring.
11. The system of claim 10, wherein the ring comprises a slanted inner edge configured to lie on a sclera of the eye.
12. The system of claim 10, wherein each of the connection points includes an elevated area of the ring adjacent to a notch in the ring.
13. The system of claim 8, wherein each twist pick is configured such that rotation of the twist pick in one direction attaches the twist pick to ocular tissue of the eye and rotation of the twist pick in another direction releases the twist pick from the ocular tissue of the eye.
14. The system of claim 8, wherein the twist picks are located inwards of an outer rim of the body.
15. The system of claim 8, wherein the surgical tool is configured to form a scleral tunnel in ocular tissue of the eye.
16. An ocular fixation device comprising:
- a body configured to be placed on an eye, the body comprising multiple openings each

extending through the body to a bottom surface of the body, the bottom surface of the body configured to rest on the eye; and

multiple twist picks configured to attach the body to the eye and to release the body from the eye, each opening of the body configured to receive one of the twist picks;

wherein the body further comprises connection points on which a surgical tool is mountable on the body;

wherein each twist pick comprises one or more angled projections at an end of the twist pick, each of the one or more angled projections configured to (i) enter into ocular tissue of the eye in response to rotation of the twist pick in one direction and (ii) exit the ocular tissue of the eye in response to rotation of the twist pick in another direction; and

wherein each twist pick is rotatable independent of the other twist picks.

17. The ocular fixation device of claim 16, wherein the body comprises a plurality of crossbars.

18. The ocular fixation device of claim 17, wherein:
the body comprises a ring, the crossbars extending across the ring; and
the crossbars meet at a specified height above the ring.

19. The ocular fixation device of claim 16, wherein each of the connection points includes an elevated area of the body adjacent to a notch in the body.

20. The ocular fixation device of claim 16, wherein the body comprises a central portion and a plurality of projections extending from the central portion.

21. The ocular fixation device of claim 20, wherein the central portion comprises an additional opening configured to enable viewing of the eye through the central portion.

22. The ocular fixation device of claim 20, wherein each projection comprises one of the multiple openings configured to receive one of the multiple twist picks.

23. The ocular fixation device of claim 22, wherein the connection points comprise additional openings in the projections.

24. The ocular fixation device of claim 16, wherein the bottom surface of the body comprises a slanted edge configured to lie on a sclera of the eye.
25. A system comprising:
a surgical tool; and
an ocular fixation device comprising:
a body configured to be placed on an eye, the body comprising multiple openings each extending through the body to a bottom surface of the body, the bottom surface of the body configured to rest on the eye; and
multiple twist picks configured to attach the body to the eye and to release the body from the eye, each opening of the body configured to receive one of the twist picks;
wherein the body further comprises connection points on which the surgical tool is mountable on the body;
wherein each twist pick comprises one or more angled projections at an end of the twist pick, each of the one or more angled projections configured to (i) enter into ocular tissue of the eye in response to rotation of the twist pick in one direction and (ii) exit the ocular tissue of the eye in response to rotation of the twist pick in another direction; and
wherein each twist pick is rotatable independent of the other twist picks.
26. The system of claim 25, wherein the body comprises a plurality of crossbars.
27. The system of claim 26, wherein:
the body comprises a ring, the crossbars extending across the ring; and
the crossbars meet at a specified height above the ring.
28. The system of claim 25, wherein the body comprises a central portion and a plurality of projections extending from the central portion.
29. The system of claim 28, wherein the central portion comprises an additional opening configured to enable viewing of the eye through the central portion.
30. The system of claim 28, wherein each projection comprises one of the multiple openings configured to receive one of the multiple twist picks.

31. The system of claim 25, wherein the bottom surface of the body comprises a slanted edge configured to lie on a sclera of the eye.

32. The system of claim 25, wherein the surgical tool is configured to form a scleral tunnel in the ocular tissue of the eye.

33. An ocular fixation device comprising:

a body configured to be placed on an eye, the body comprising multiple openings each extending through the body to a bottom surface of the body, the bottom surface of the body configured to rest on the eye, each opening configured to receive one of multiple independently-rotatable twist picks that secure the body to the eye and release the body from the eye;

wherein the openings extend through the body such that each twist pick is insertable through one of the openings in order to (i) physically attach one or more angled projections at an end of the twist pick to ocular tissue of the eye in response to rotation of the twist pick in one direction and (ii) physically release the one or more angled projections from the ocular tissue of the eye in response to rotation of the twist pick in another direction; and

wherein the body further comprises connection points on which a surgical tool is mountable on the body.

34. The ocular fixation device of claim 16, wherein the twist picks are located inwards of an outer rim of the body.

35. The system of claim 25, wherein the twist picks are located inwards of an outer rim of the ring.

36. The ocular fixation device of claim 33, wherein the openings are located inwards of an outer rim of the body.

37. The ocular fixation device of claim 33, wherein the body further comprises a ring and a plurality of crossbars extending across the ring that meet at a specified height above the ring.

38. The ocular fixation device of claim 33, wherein:

the body further comprises a central portion and a plurality of projections extending from

the central portion;

the central portion is configured to enable viewing of the eye through the central portion;
and

each projection comprises one of the multiple openings configured to receive one of the multiple twist picks.

39. The ocular fixation device of claim 16, wherein each twist pick includes multiple angled projections.

40. The ocular fixation device of claim 16, wherein each of the one or more angled projections of each twist pick arches circumferentially around an axis of that twist pick.

41. The ocular fixation device of claim 16, wherein the one or more angled projections comprise one or more teeth.

42. The system of claim 25, wherein the one or more angled projections comprise one or more teeth.

43. The ocular fixation device of claim 33, wherein the one or more angled projections comprise one or more teeth.

44. An ocular fixation device comprising:

a body configured to be placed over a sclera or a limbus of an eye, the body comprising multiple openings each extending through the body to a bottom surface of the body; and

multiple twist picks configured to attach the body to the sclera or the limbus of the eye and to release the body from the sclera or the limbus of the eye, each opening of the body configured to receive one of the twist picks;

wherein the body further comprises one or more connection points on which a surgical tool is mountable on the body after the body is attached to the eye;

wherein each twist pick comprises one or more angled projections at an end of the twist pick, each projection configured to (i) enter into the sclera or the limbus of the eye in response to rotation of the twist pick in a first direction and (ii) exit the sclera or the limbus of the eye in response to rotation of the twist pick in a second direction; and

wherein each twist pick is rotatable independent of the other twist picks.

45. The ocular fixation device of claim 44, wherein the body comprises a plurality of crossbars.

46. The ocular fixation device of claim 45, wherein:
the body comprises a ring, the crossbars extending across the ring; and
the crossbars meet at a specified height above the ring.

47. The ocular fixation device of claim 45, wherein each of the one or more connection points includes an elevated area of the body adjacent to a notch in the body.

48. The ocular fixation device of claim 44, wherein the body comprises a central portion and a plurality of projections extending from the central portion.

49. The ocular fixation device of claim 48, wherein the central portion comprises an additional opening configured to enable viewing of the eye through the central portion.

50. The ocular fixation device of claim 49, wherein each of the plurality of projections comprises one of the multiple openings configured to receive one of the multiple twist picks.

51. The ocular fixation device of claim 50, wherein the one or more connection points comprise one or more additional openings in the projections.

52. An ocular fixation device comprising:
a body configured to be placed on an eye, the body comprising multiple openings each extending through the body to a bottom surface of the body; and
multiple twist picks configured to attach the body to the eye and to release the body from the eye, each opening of the body configured to receive one of the twist picks;
wherein the body further comprises one or more connection points on which a surgical tool is mountable on the body after the body is attached to the eye;
wherein each twist pick comprises one or more angled projections at an end of the twist pick, each projection configured to (i) enter into ocular tissue of the eye in response to rotation

of the twist pick in one direction and (ii) exit the ocular tissue of the eye in response to rotation of the twist pick in another direction;

wherein each twist pick is rotatable independent of the other twist picks; and

wherein the bottom surface of the body comprises a slanted edge configured to lie on a sclera of the eye.

53. A system comprising:

a surgical tool; and

an ocular fixation device comprising:

a body configured to be placed over a sclera or a limbus of an eye, the body comprising multiple openings each extending through the body to a bottom surface of the body; and

multiple twist picks configured to attach the body to the sclera or the limbus of the eye and to release the body from the sclera or the limbus of the eye, each opening of the body configured to receive one of the twist picks;

wherein the body further comprises one or more connection points on which the surgical tool is mountable on the body after the body is attached to the eye;

wherein each twist pick comprises one or more angled projections at an end of the twist pick, each projection configured to (i) enter into the sclera or the limbus of the eye in response to rotation of the twist pick in a first direction and (ii) exit the sclera or the limbus of the eye in response to rotation of the twist pick in a second direction; and

wherein each twist pick is rotatable independent of the other twist picks.

54. The system of claim 53, wherein the body comprises a plurality of crossbars.

55. The system of claim 54, wherein:

the body comprises a ring, the crossbars extending across the ring; and

the crossbars meet at a specified height above the ring.

56. The system of claim 53, wherein the body comprises a central portion and a plurality of projections extending from the central portion.

57. The system of claim 56, wherein the central portion comprises an additional opening

configured to enable viewing of the eye through the central portion.

58. The system of claim 56, wherein each of the plurality of projections comprises one of the multiple openings configured to receive one of the multiple twist picks.

59. A system comprising:

a surgical tool; and

an ocular fixation device comprising:

a body configured to be placed on an eye, the body comprising multiple openings each extending through the body to a bottom surface of the body; and

multiple twist picks configured to attach the body to the eye and to release the body from the eye, each opening of the body configured to receive one of the twist picks;

wherein the body further comprises one or more connection points on which the surgical tool is mountable on the body after the body is attached to the eye;

wherein each twist pick comprises one or more angled projections at an end of the twist pick, each projection configured to (i) enter into ocular tissue of the eye in response to rotation of the twist pick in one direction and (ii) exit the ocular tissue of the eye in response to rotation of the twist pick in another direction;

wherein each twist pick is rotatable independent of the other twist picks; and

wherein the bottom surface of the body comprises a slanted edge configured to lie on a sclera of the eye.

60. The system of claim 53, wherein the surgical tool is configured to form a scleral tunnel in the sclera of the eye.

61. An ocular fixation device comprising:

a body configured to be placed over a sclera or a limbus of an eye, the body comprising multiple openings each extending through the body to a bottom surface of the body, each opening configured to receive one of multiple independently-rotatable twist picks that secure the body to the sclera or the limbus of the eye and release the body from the sclera or the limbus of the eye;

wherein the openings extend through the body such that each twist pick is insertable through one of the openings in order to (i) pass one or more angled projections at an end of the

twist pick into the sclera or the limbus and physically attach the one or more angled projections to the sclera or the limbus of the eye in response to rotation of the twist pick in a first direction and (ii) physically release the one or more angled projections from the sclera or the limbus of the eye in response to rotation of the twist pick in a second direction; and

wherein the body further comprises one or more connection points on which a surgical tool is mountable on the body after the body is attached to the eye.

62. The ocular fixation device of claim 44, wherein the twist picks are located inwards of an outer rim of the body.

63. The system of claim 53, wherein the twist picks are located inwards of an outer rim of the body.

64. The ocular fixation device of claim 61, wherein the openings are located inwards of an outer rim of the body.

65. The ocular fixation device of claim 61, wherein the body further comprises a ring and a plurality of crossbars extending across the ring that meet at a specified height above the ring.

66. The ocular fixation device of claim 61, wherein:
the body further comprises a central portion and a plurality of projections extending from the central portion;
the central portion is configured to enable viewing of the eye through the central portion;
and
each of the plurality of projections comprises one of the multiple openings configured to receive one of the multiple twist picks.

67. An ocular fixation device comprising:
a body configured to be placed on an eye, the body comprising multiple openings each extending through the body to a bottom surface of the body, the bottom surface of the body configured to rest on the eye; and
multiple twist picks configured to attach the body to the eye and to release the body from the eye, each opening of the body configured to receive one of the twist picks;

wherein the body further comprises one or more connection points on which a surgical tool is mountable on the body;

wherein each twist pick includes multiple angled projections at an end of the twist pick, each projection configured to (i) enter into ocular tissue of the eye in response to rotation of the twist pick in a first direction and (ii) exit the ocular tissue of the eye in response to rotation of the twist pick in a second direction; and



wherein each twist pick is rotatable independent of the other twist picks.

68. The ocular fixation device of claim 44, wherein each projection of each twist pick arches circumferentially around an axis of that twist pick.

69. The ocular fixation device of any one of claims 44, 52, 61, and 67 wherein the one or more angled projections comprise one or more teeth.

70. The system of any one of claims 53 and 59 wherein the one or more angled projections comprise one or more teeth.

1/17

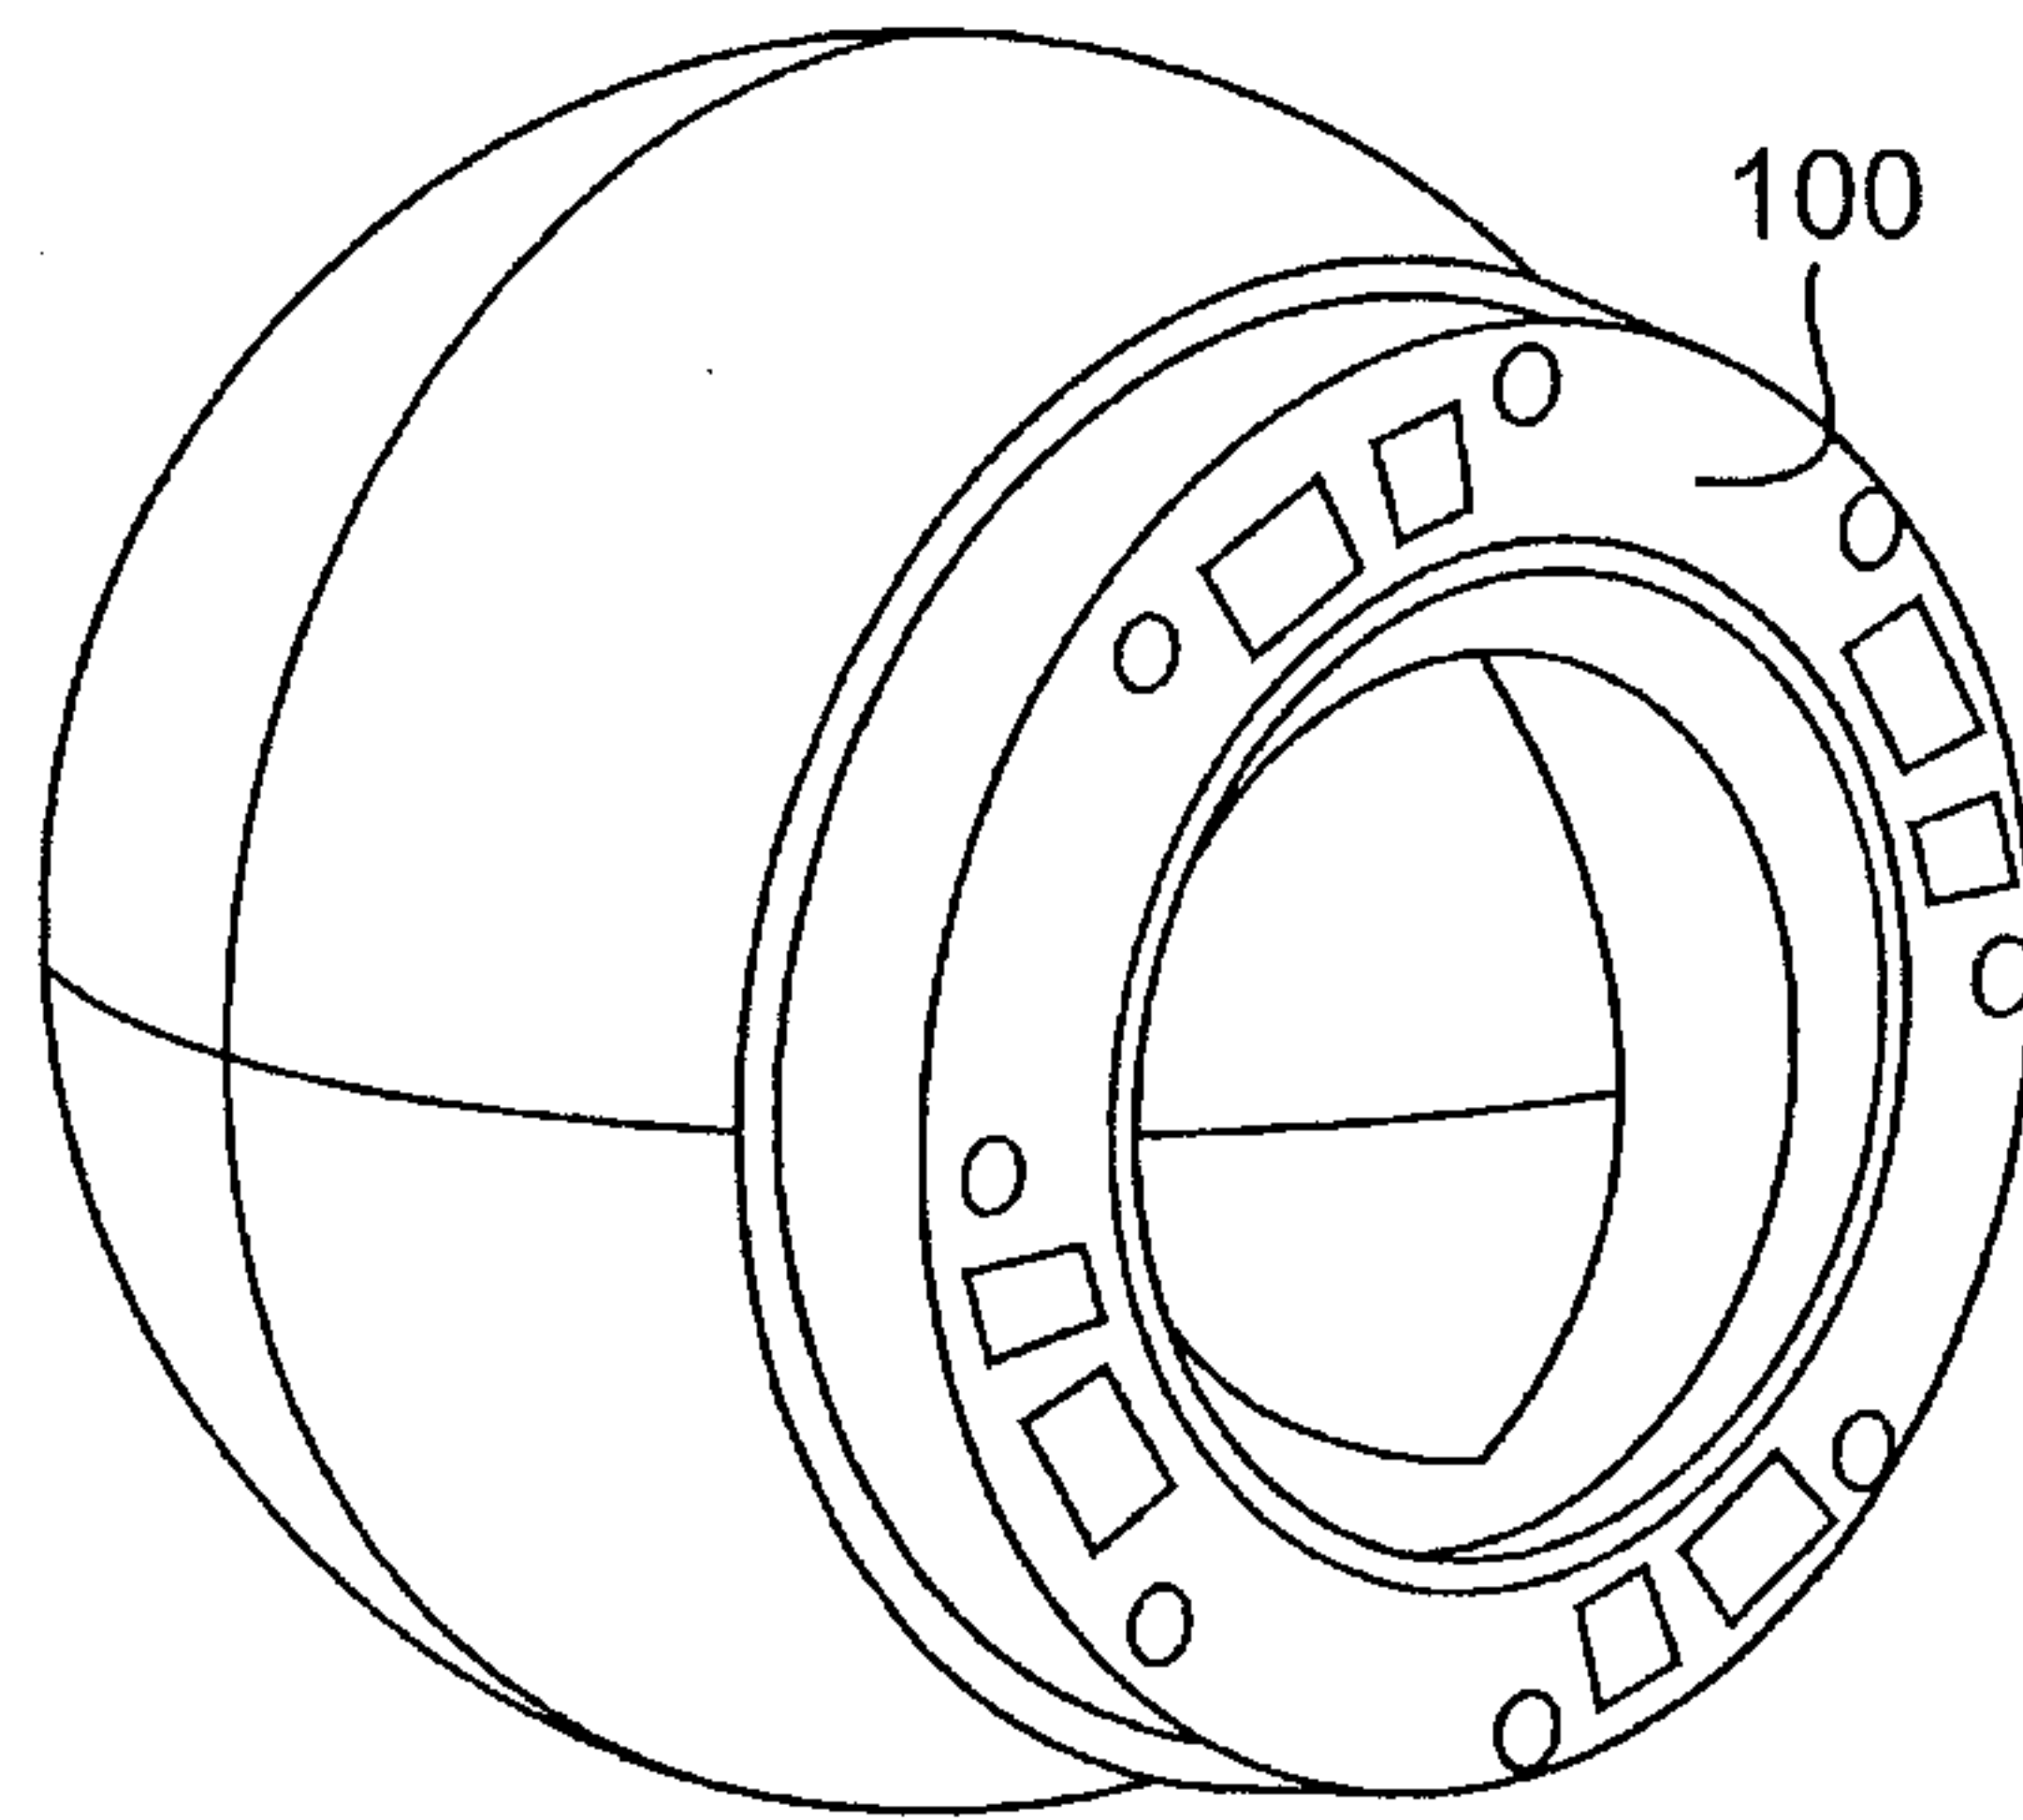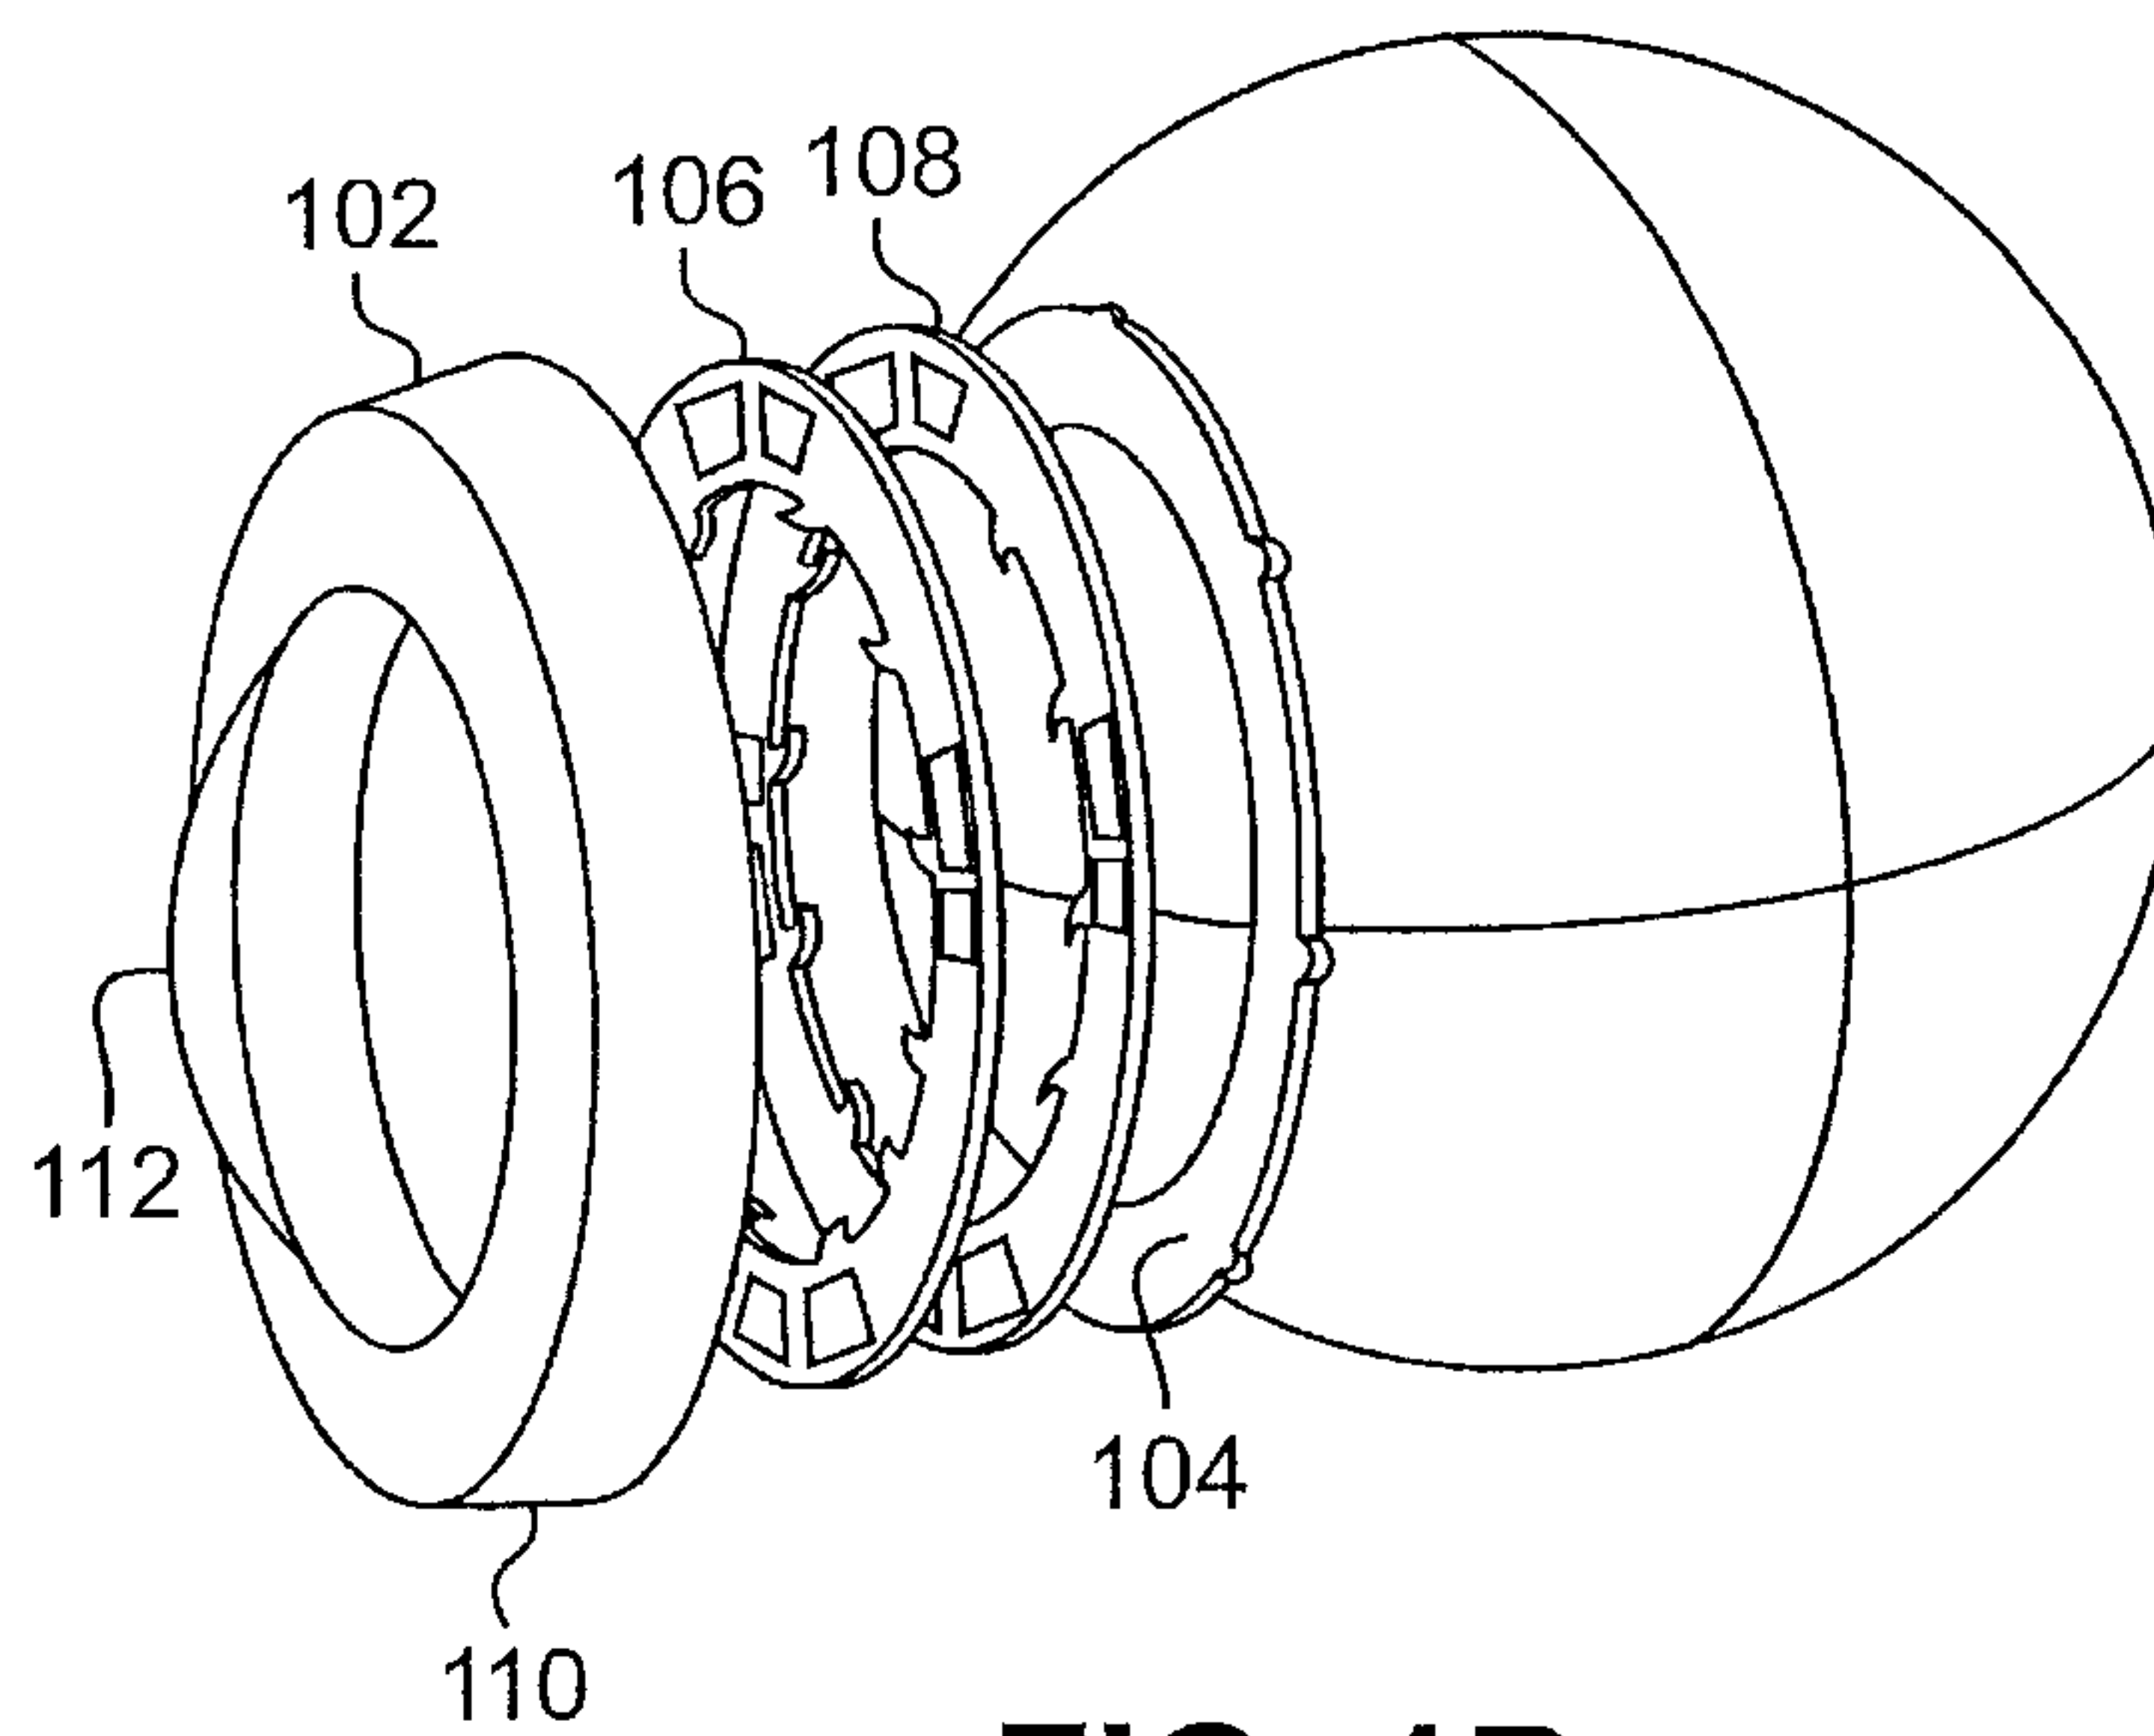**FIG. 1A****FIG. 1B**

2/17

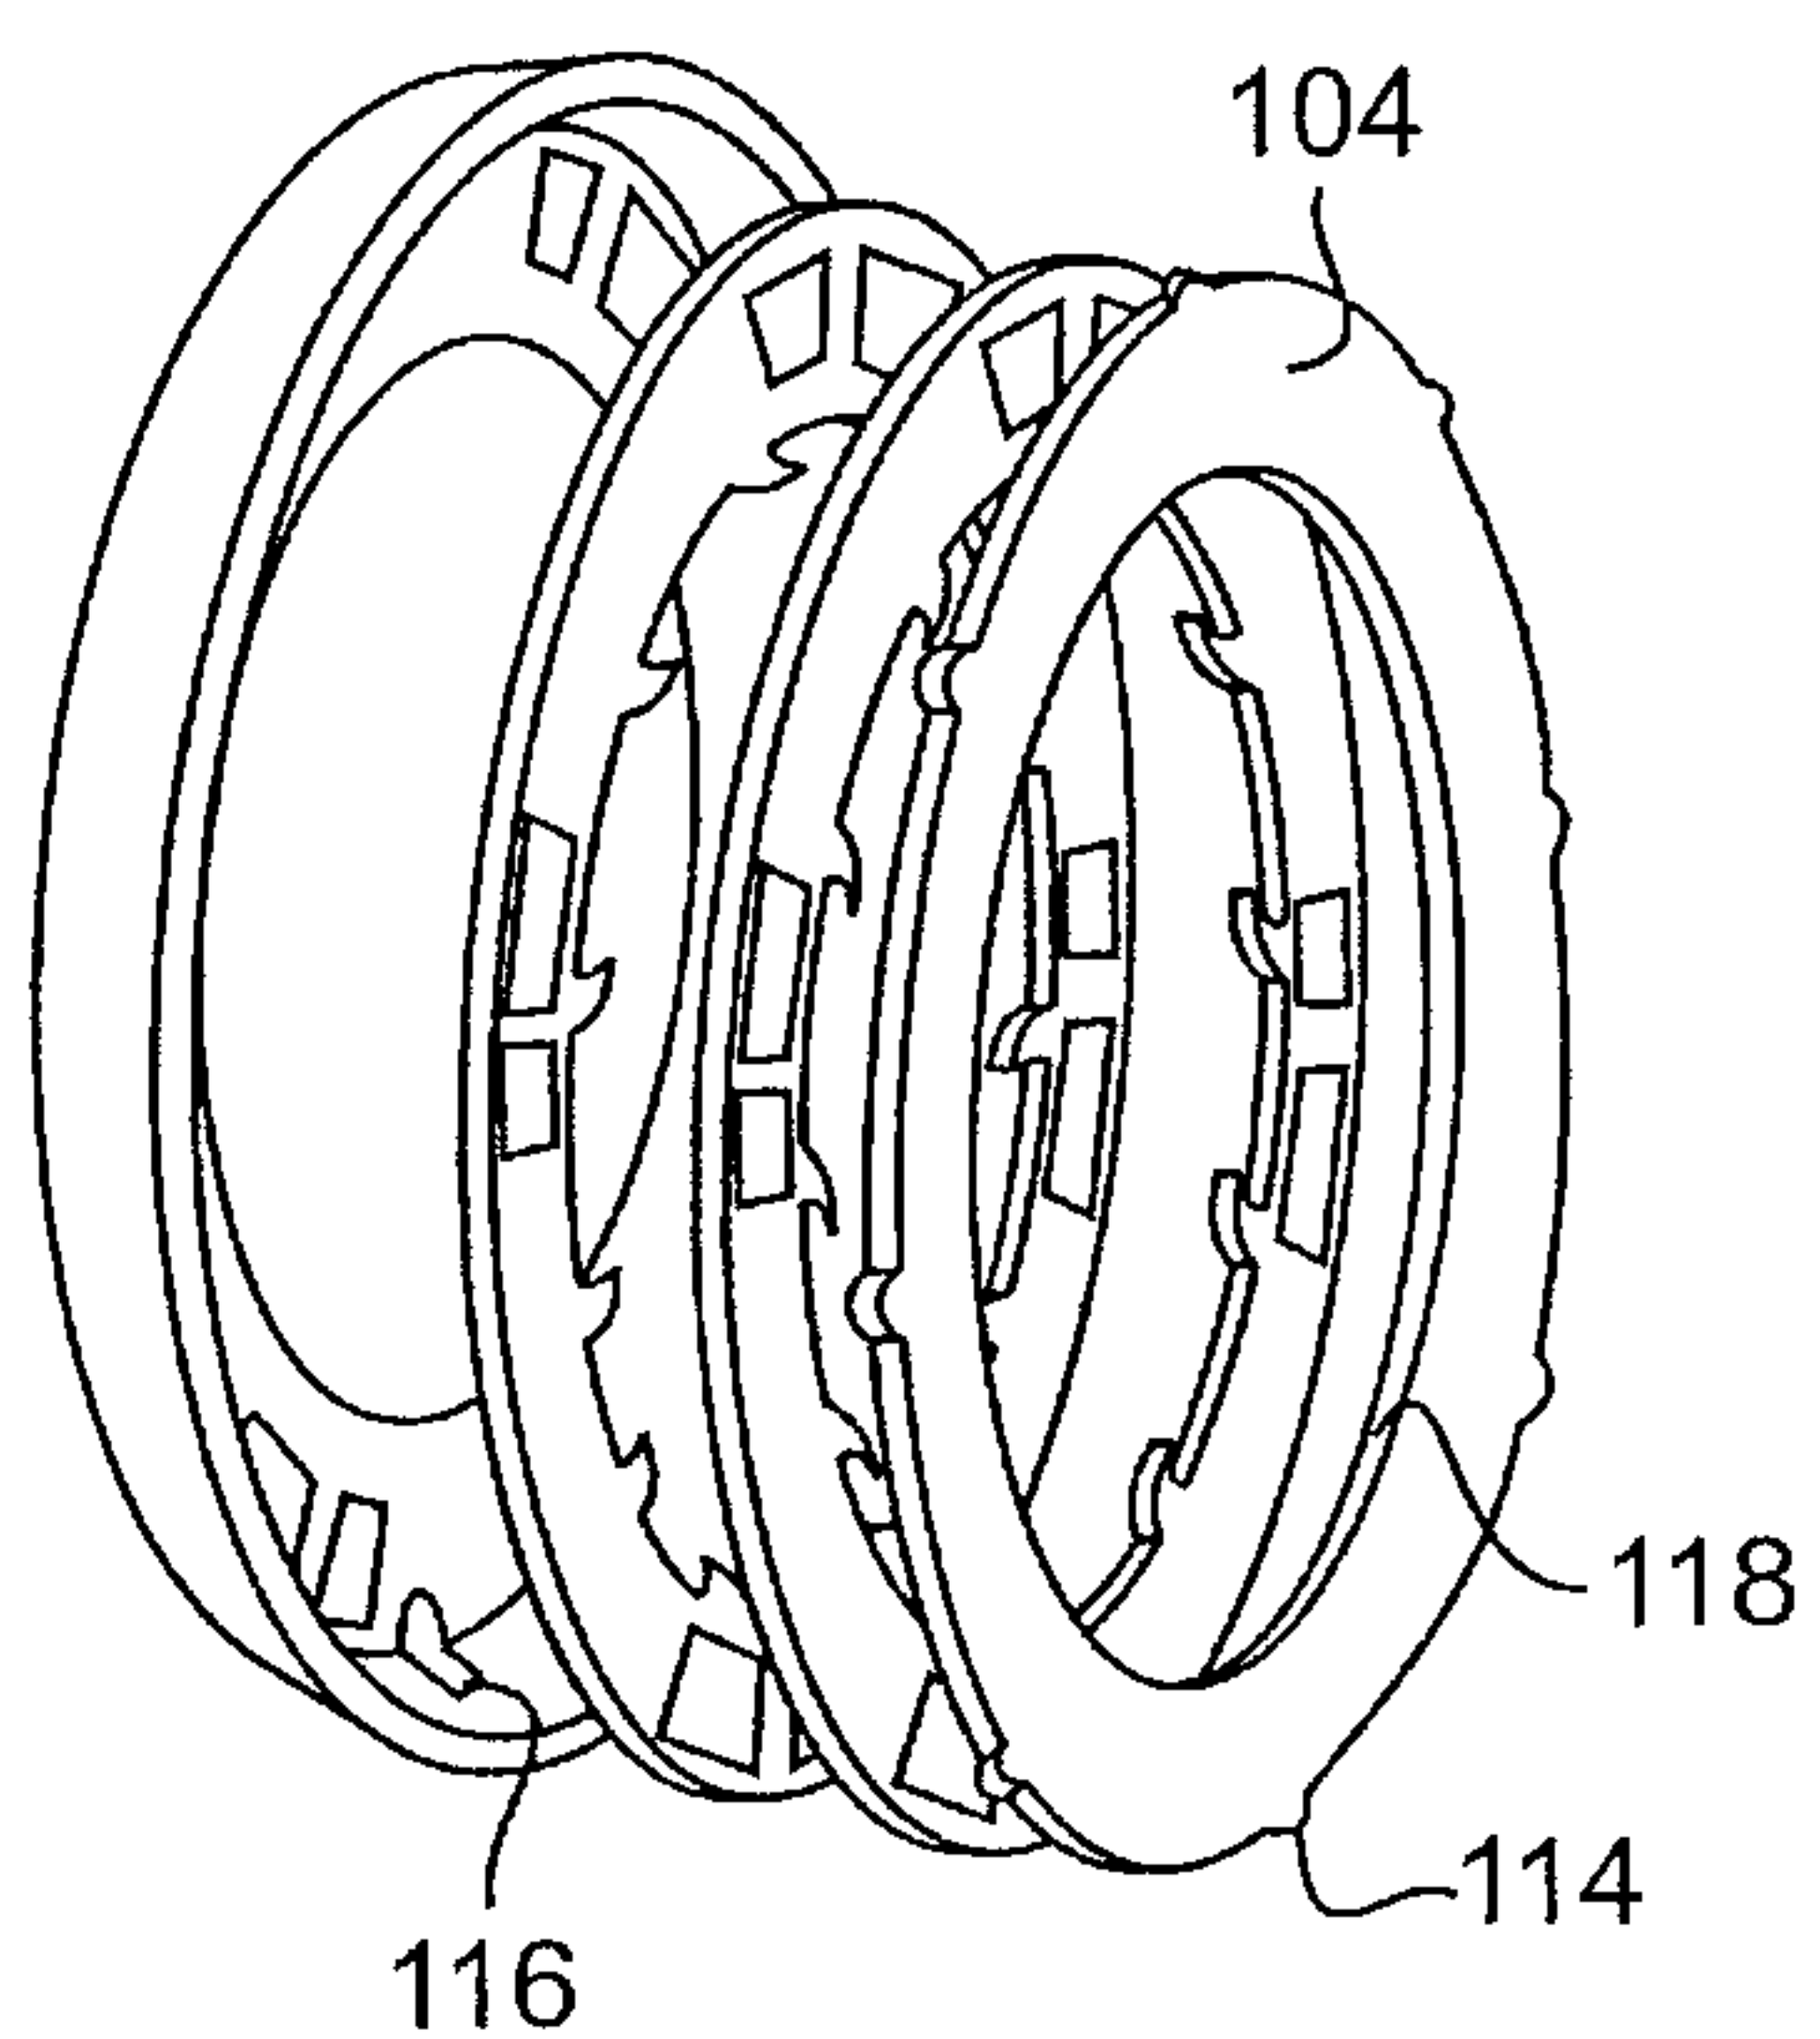


FIG. 1C

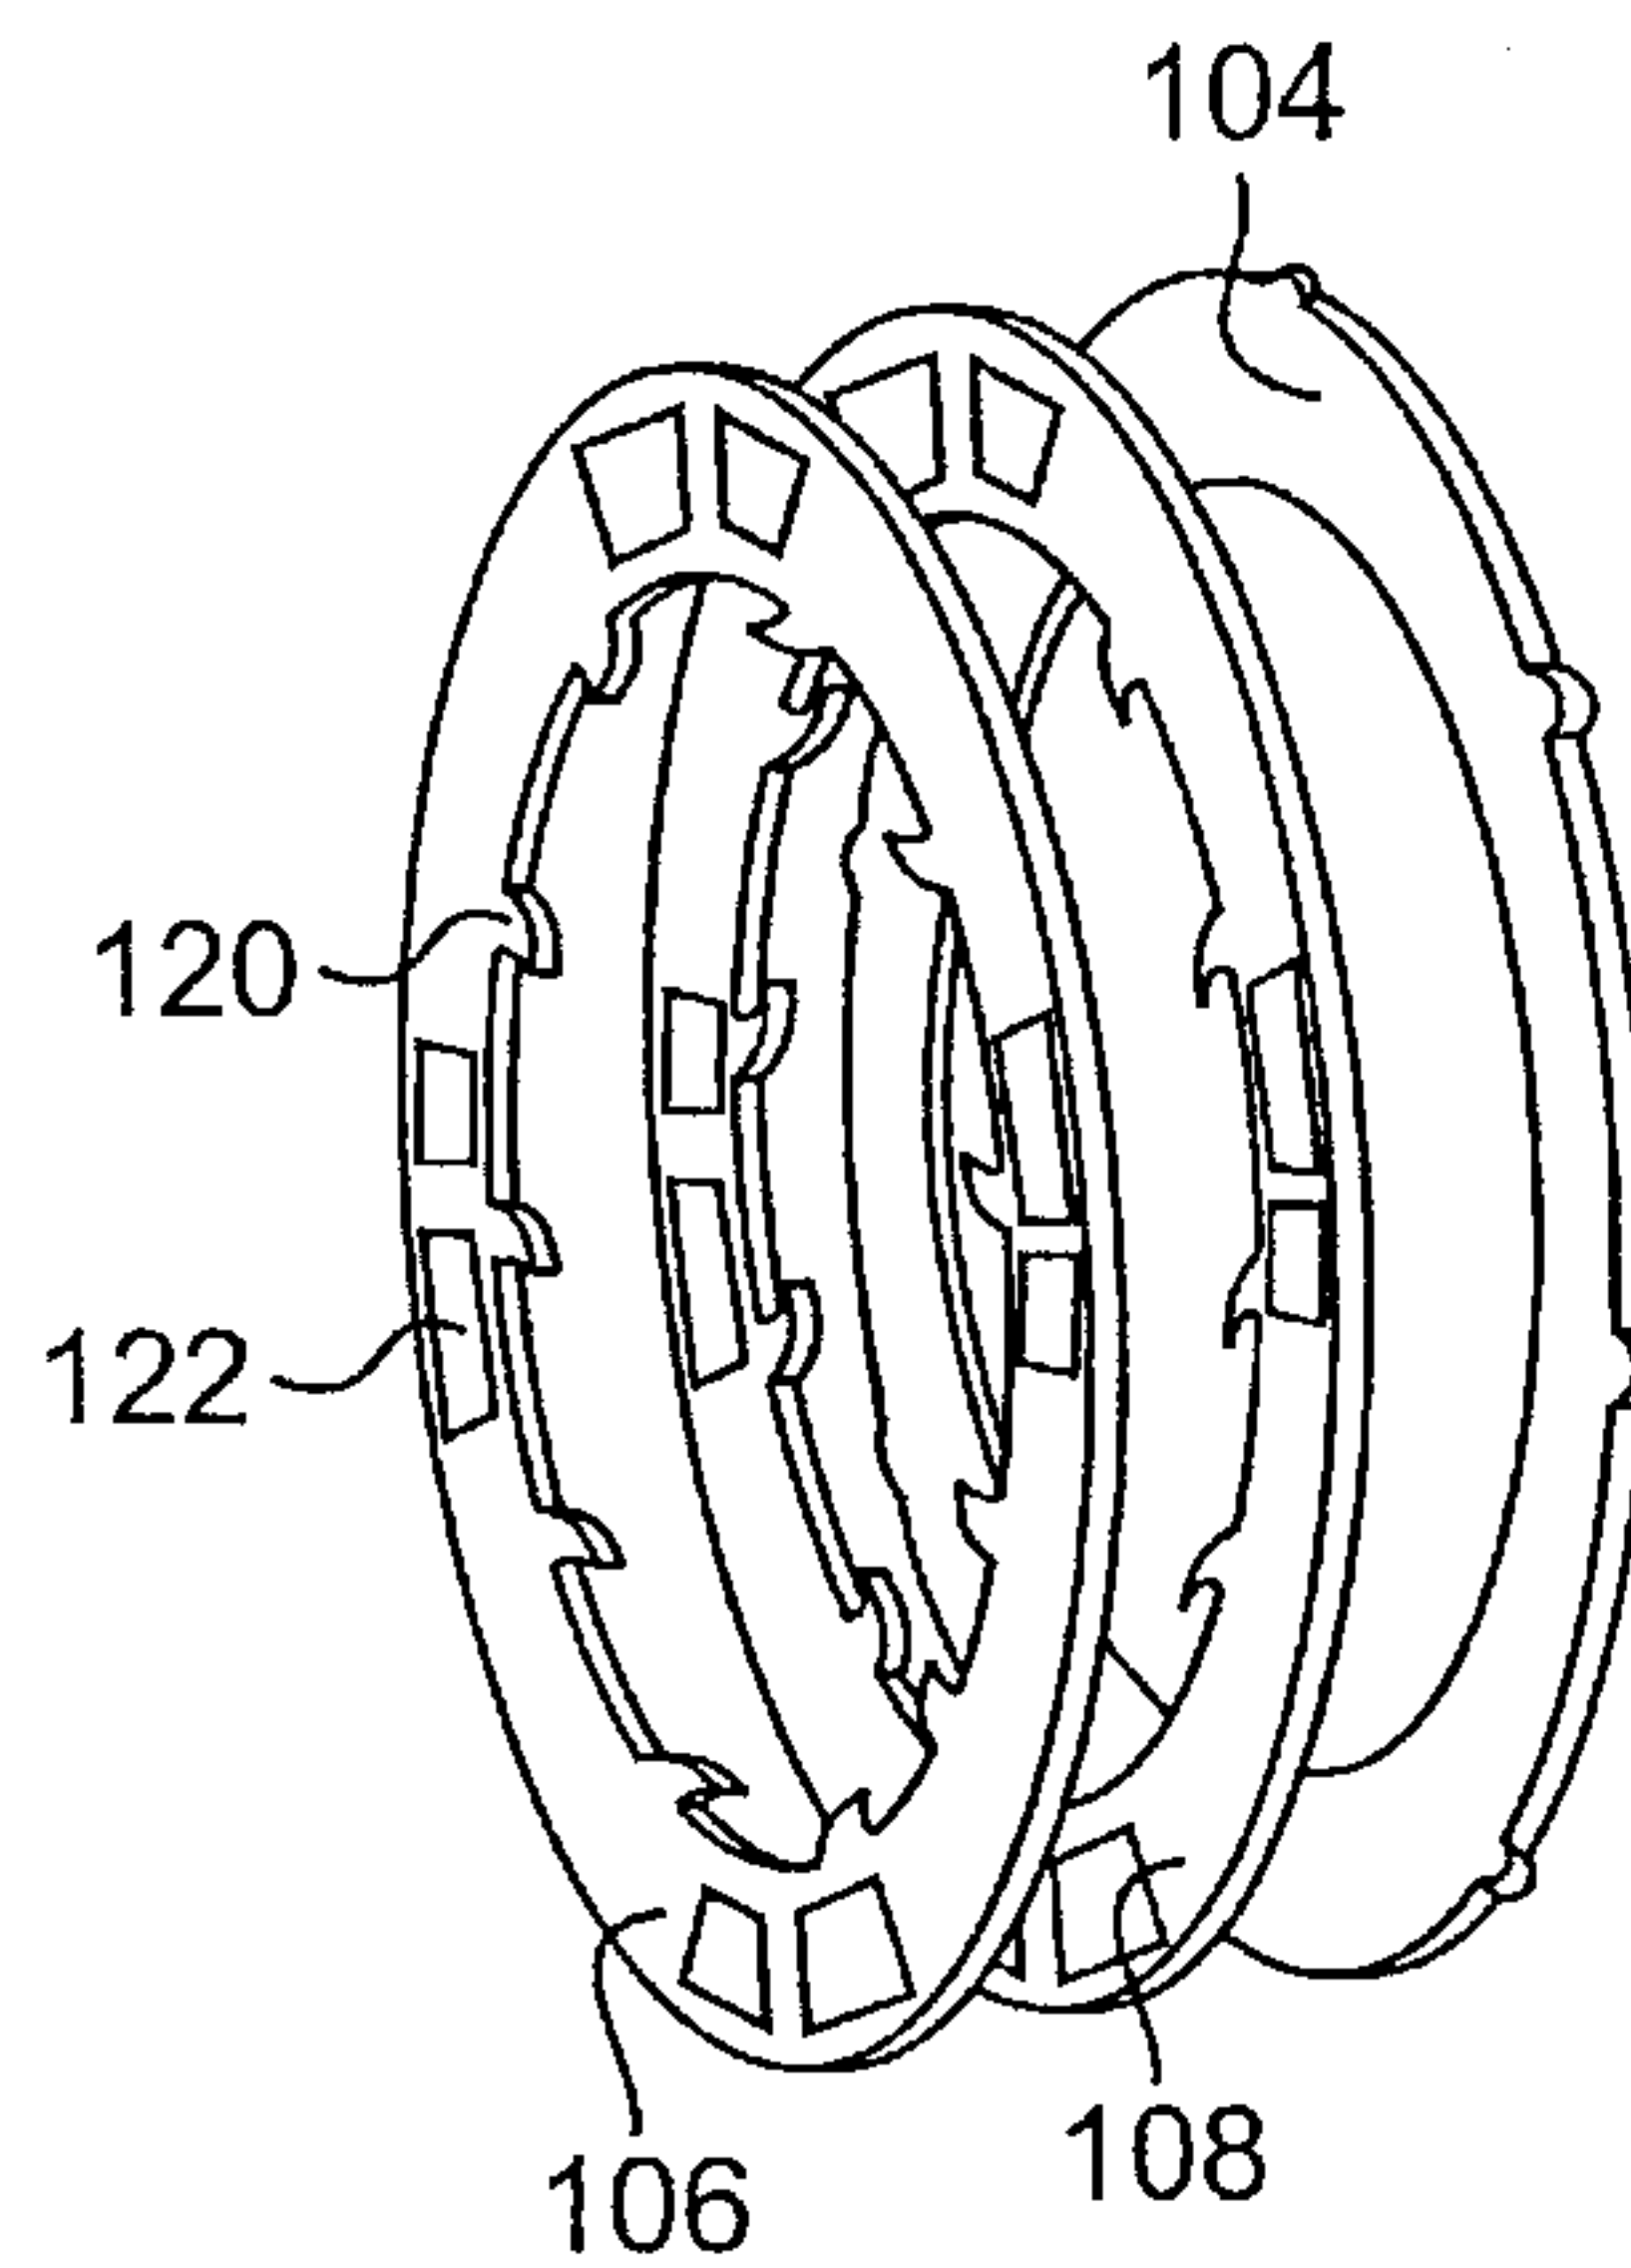


FIG. 1D

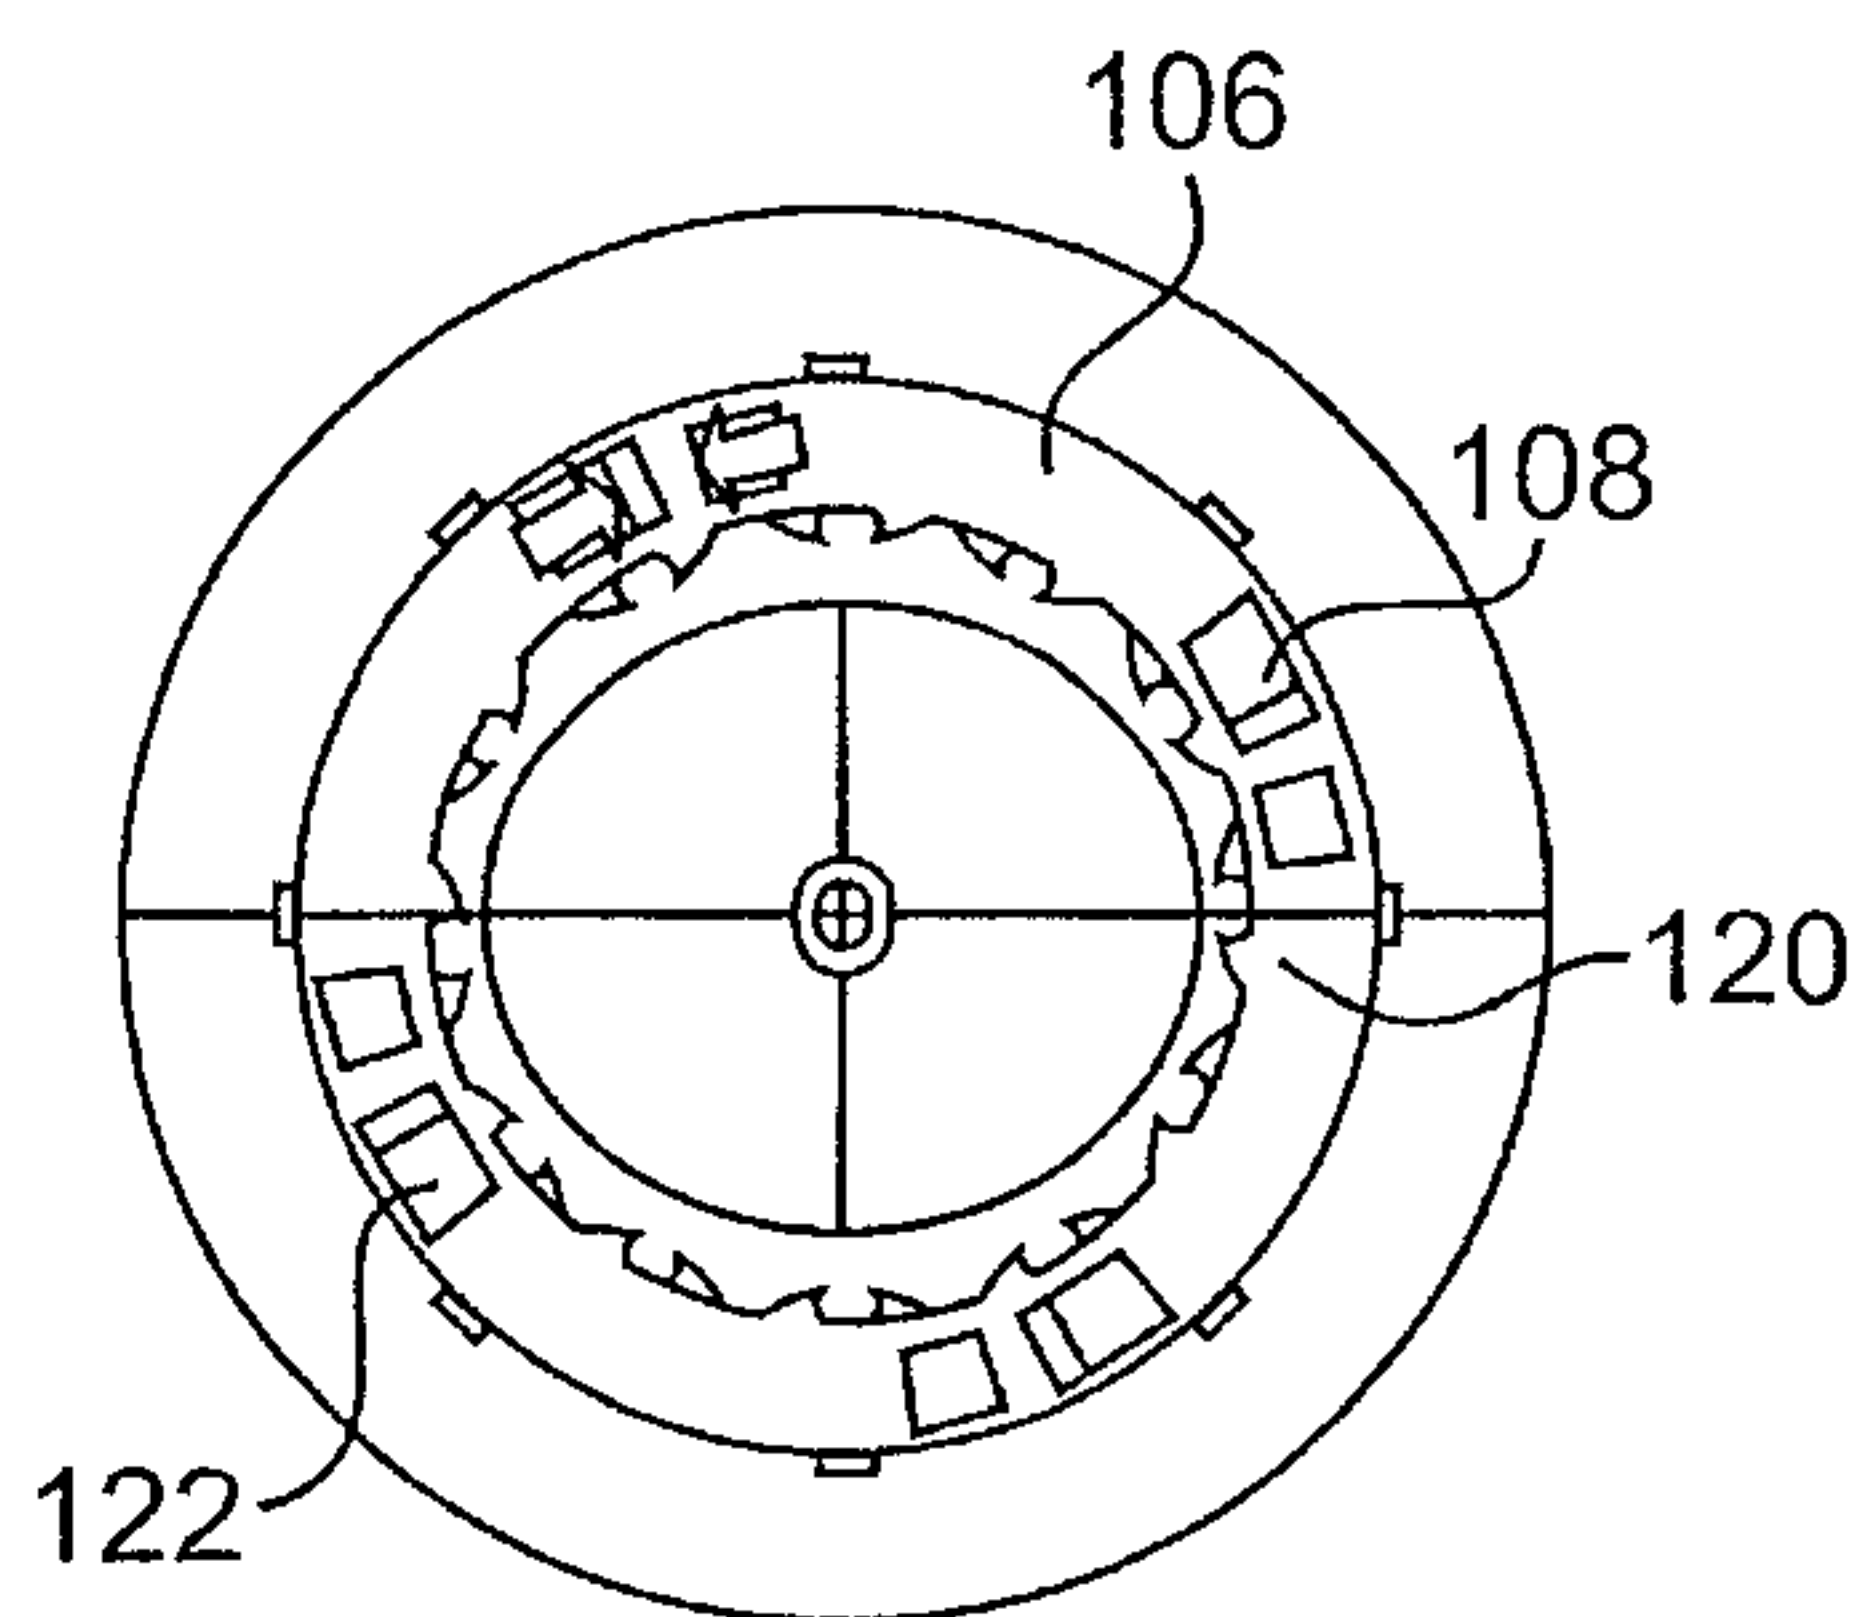


FIG. 1E

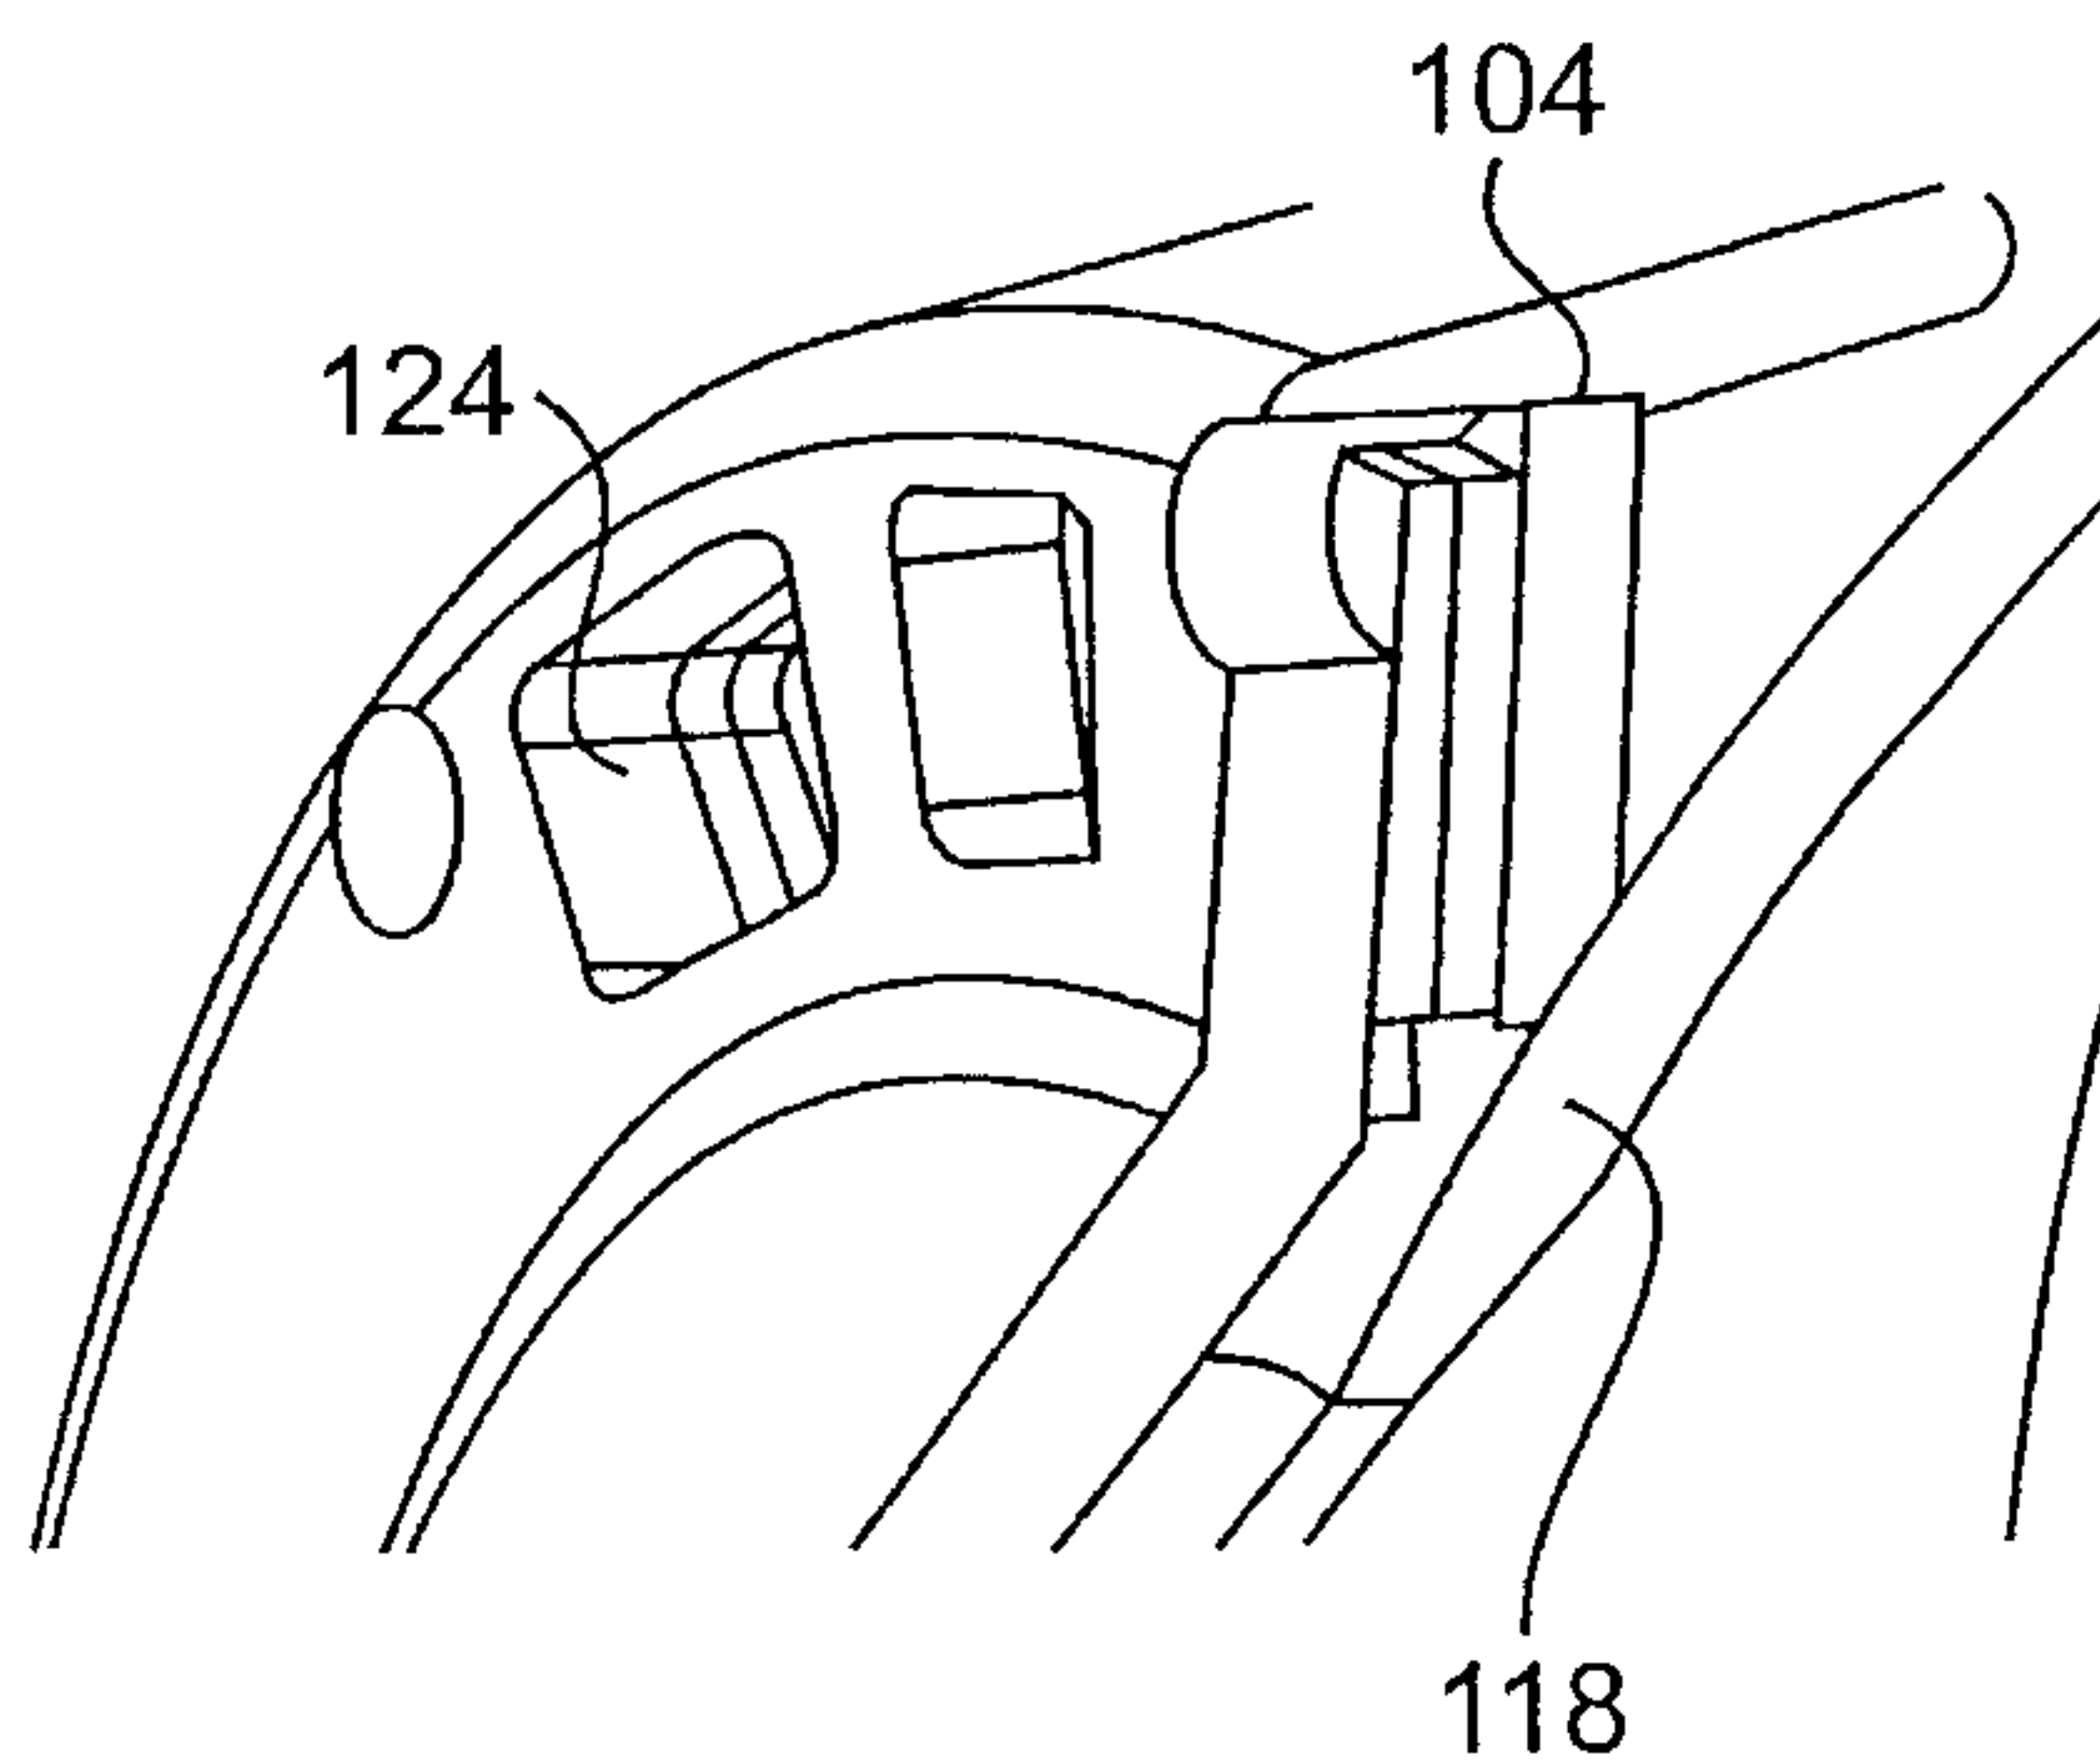


FIG. 1F

3/17

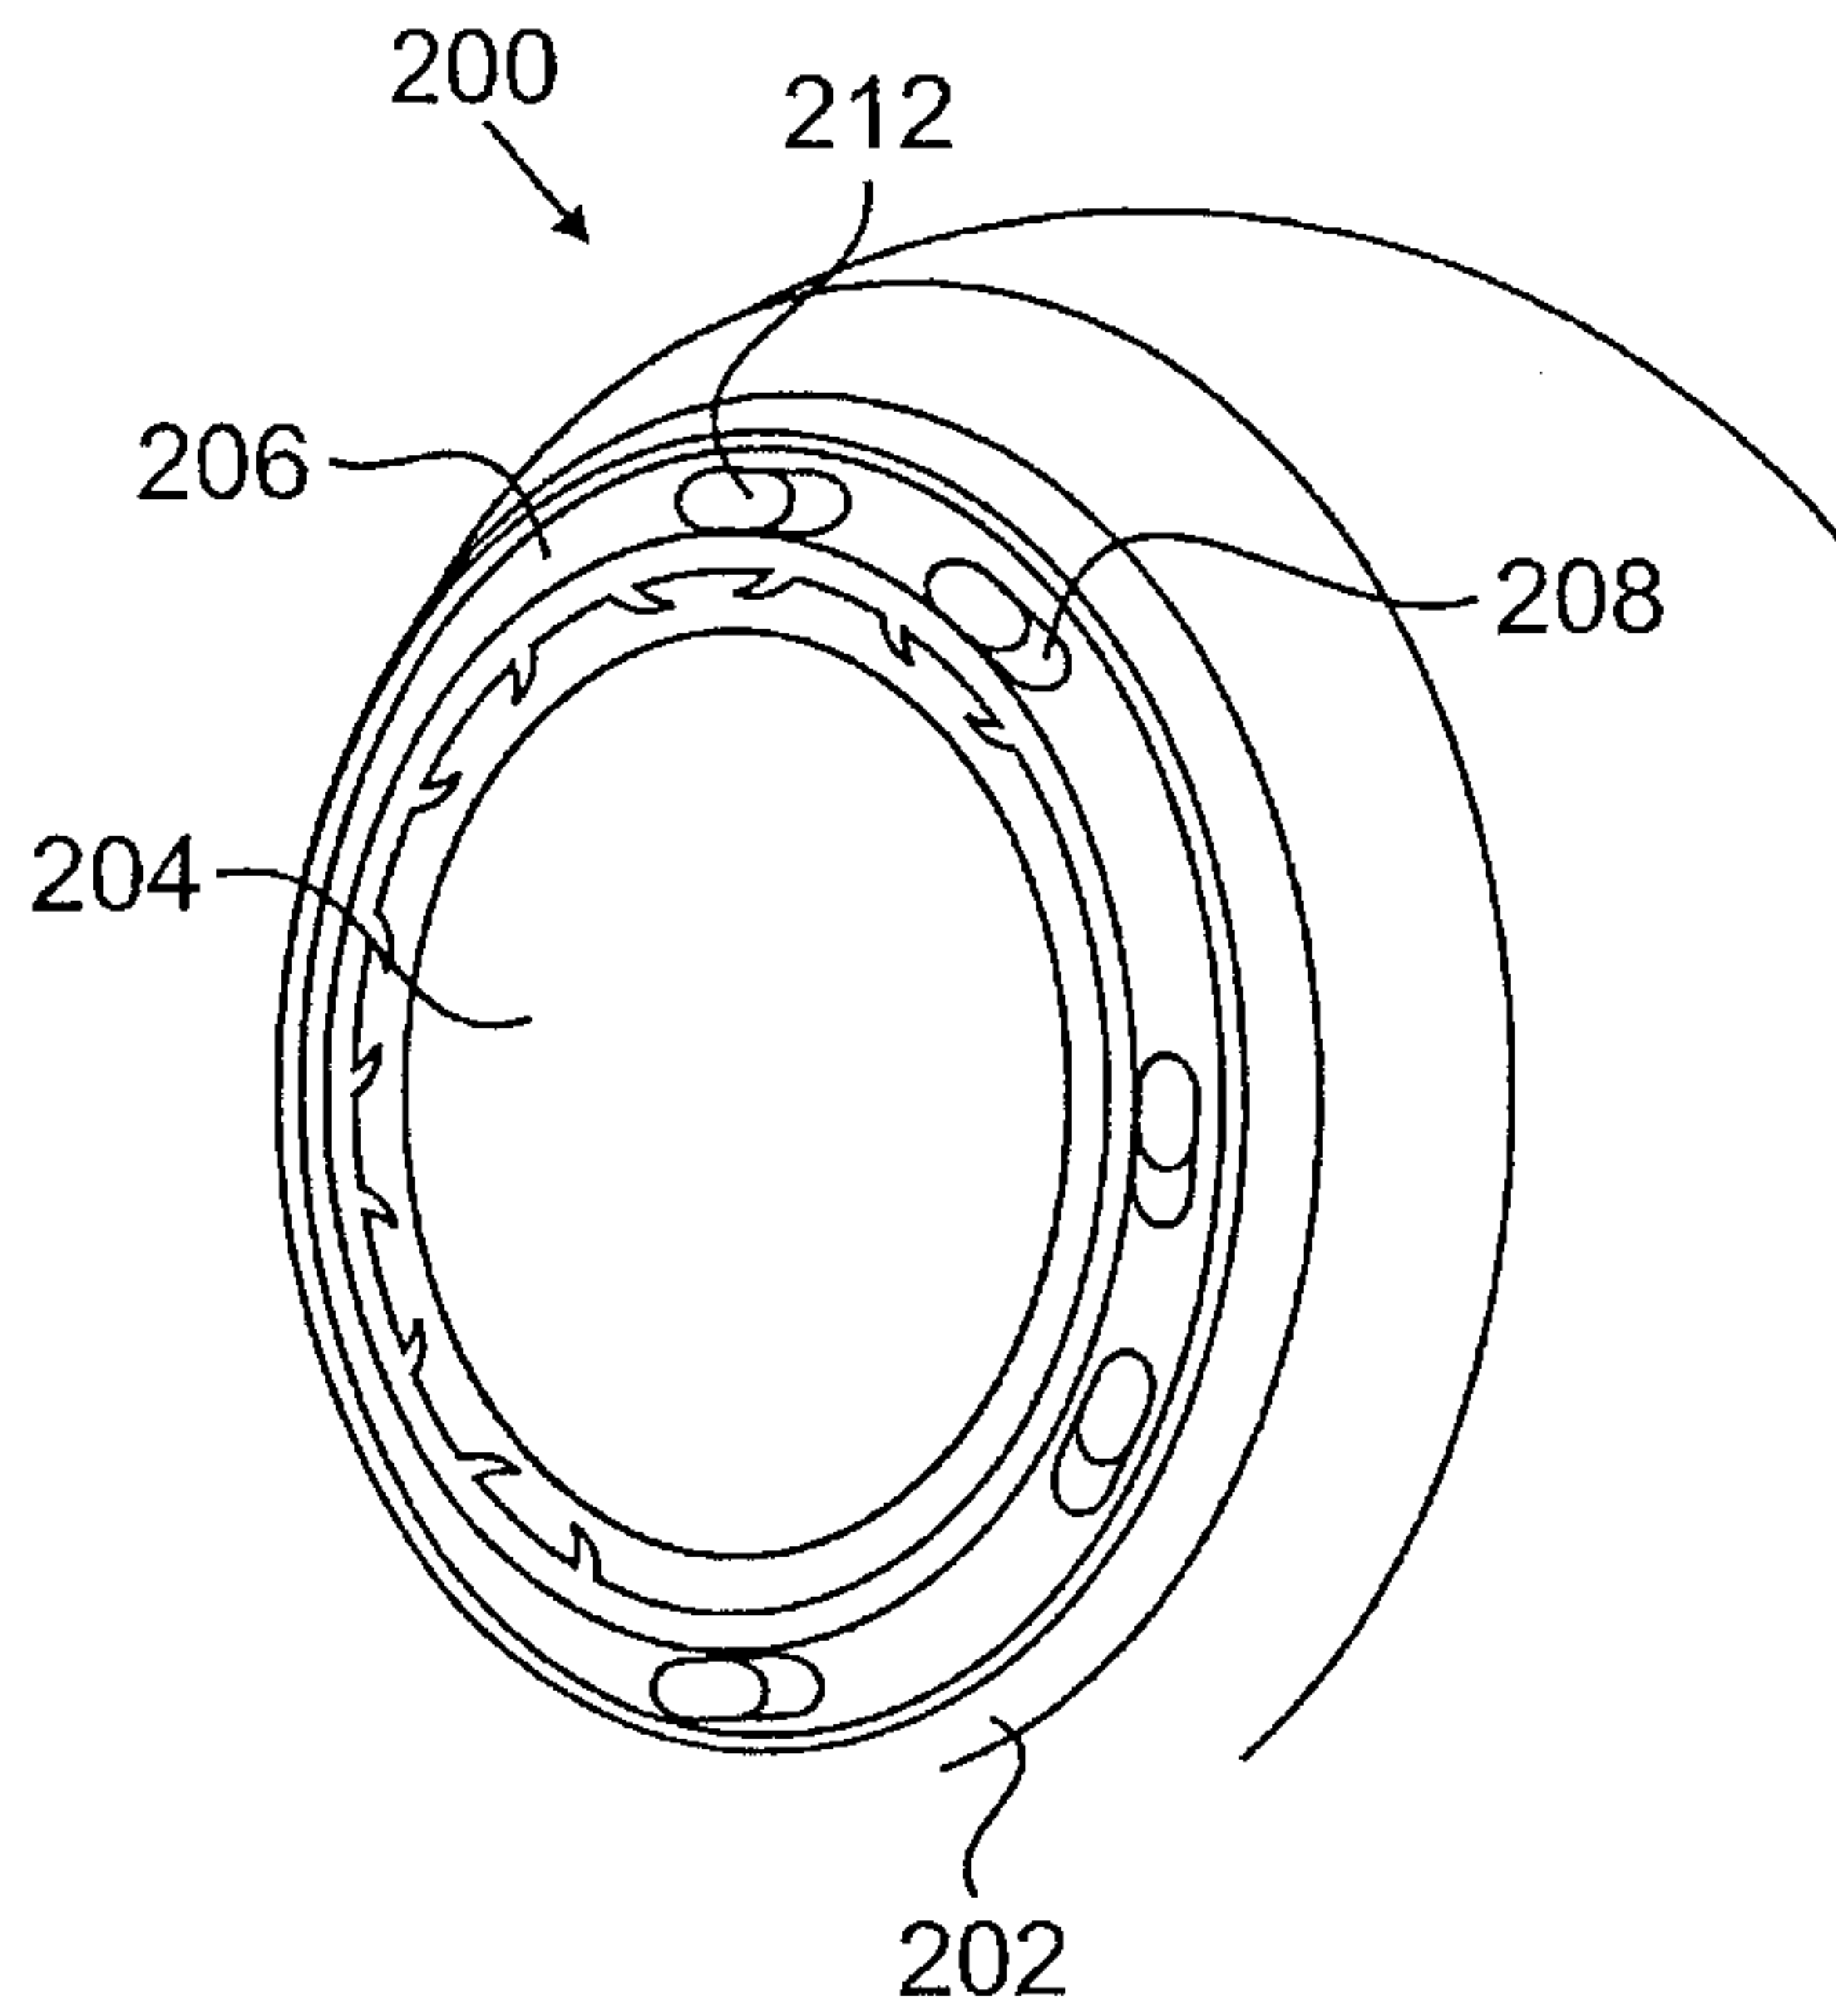


FIG. 2A

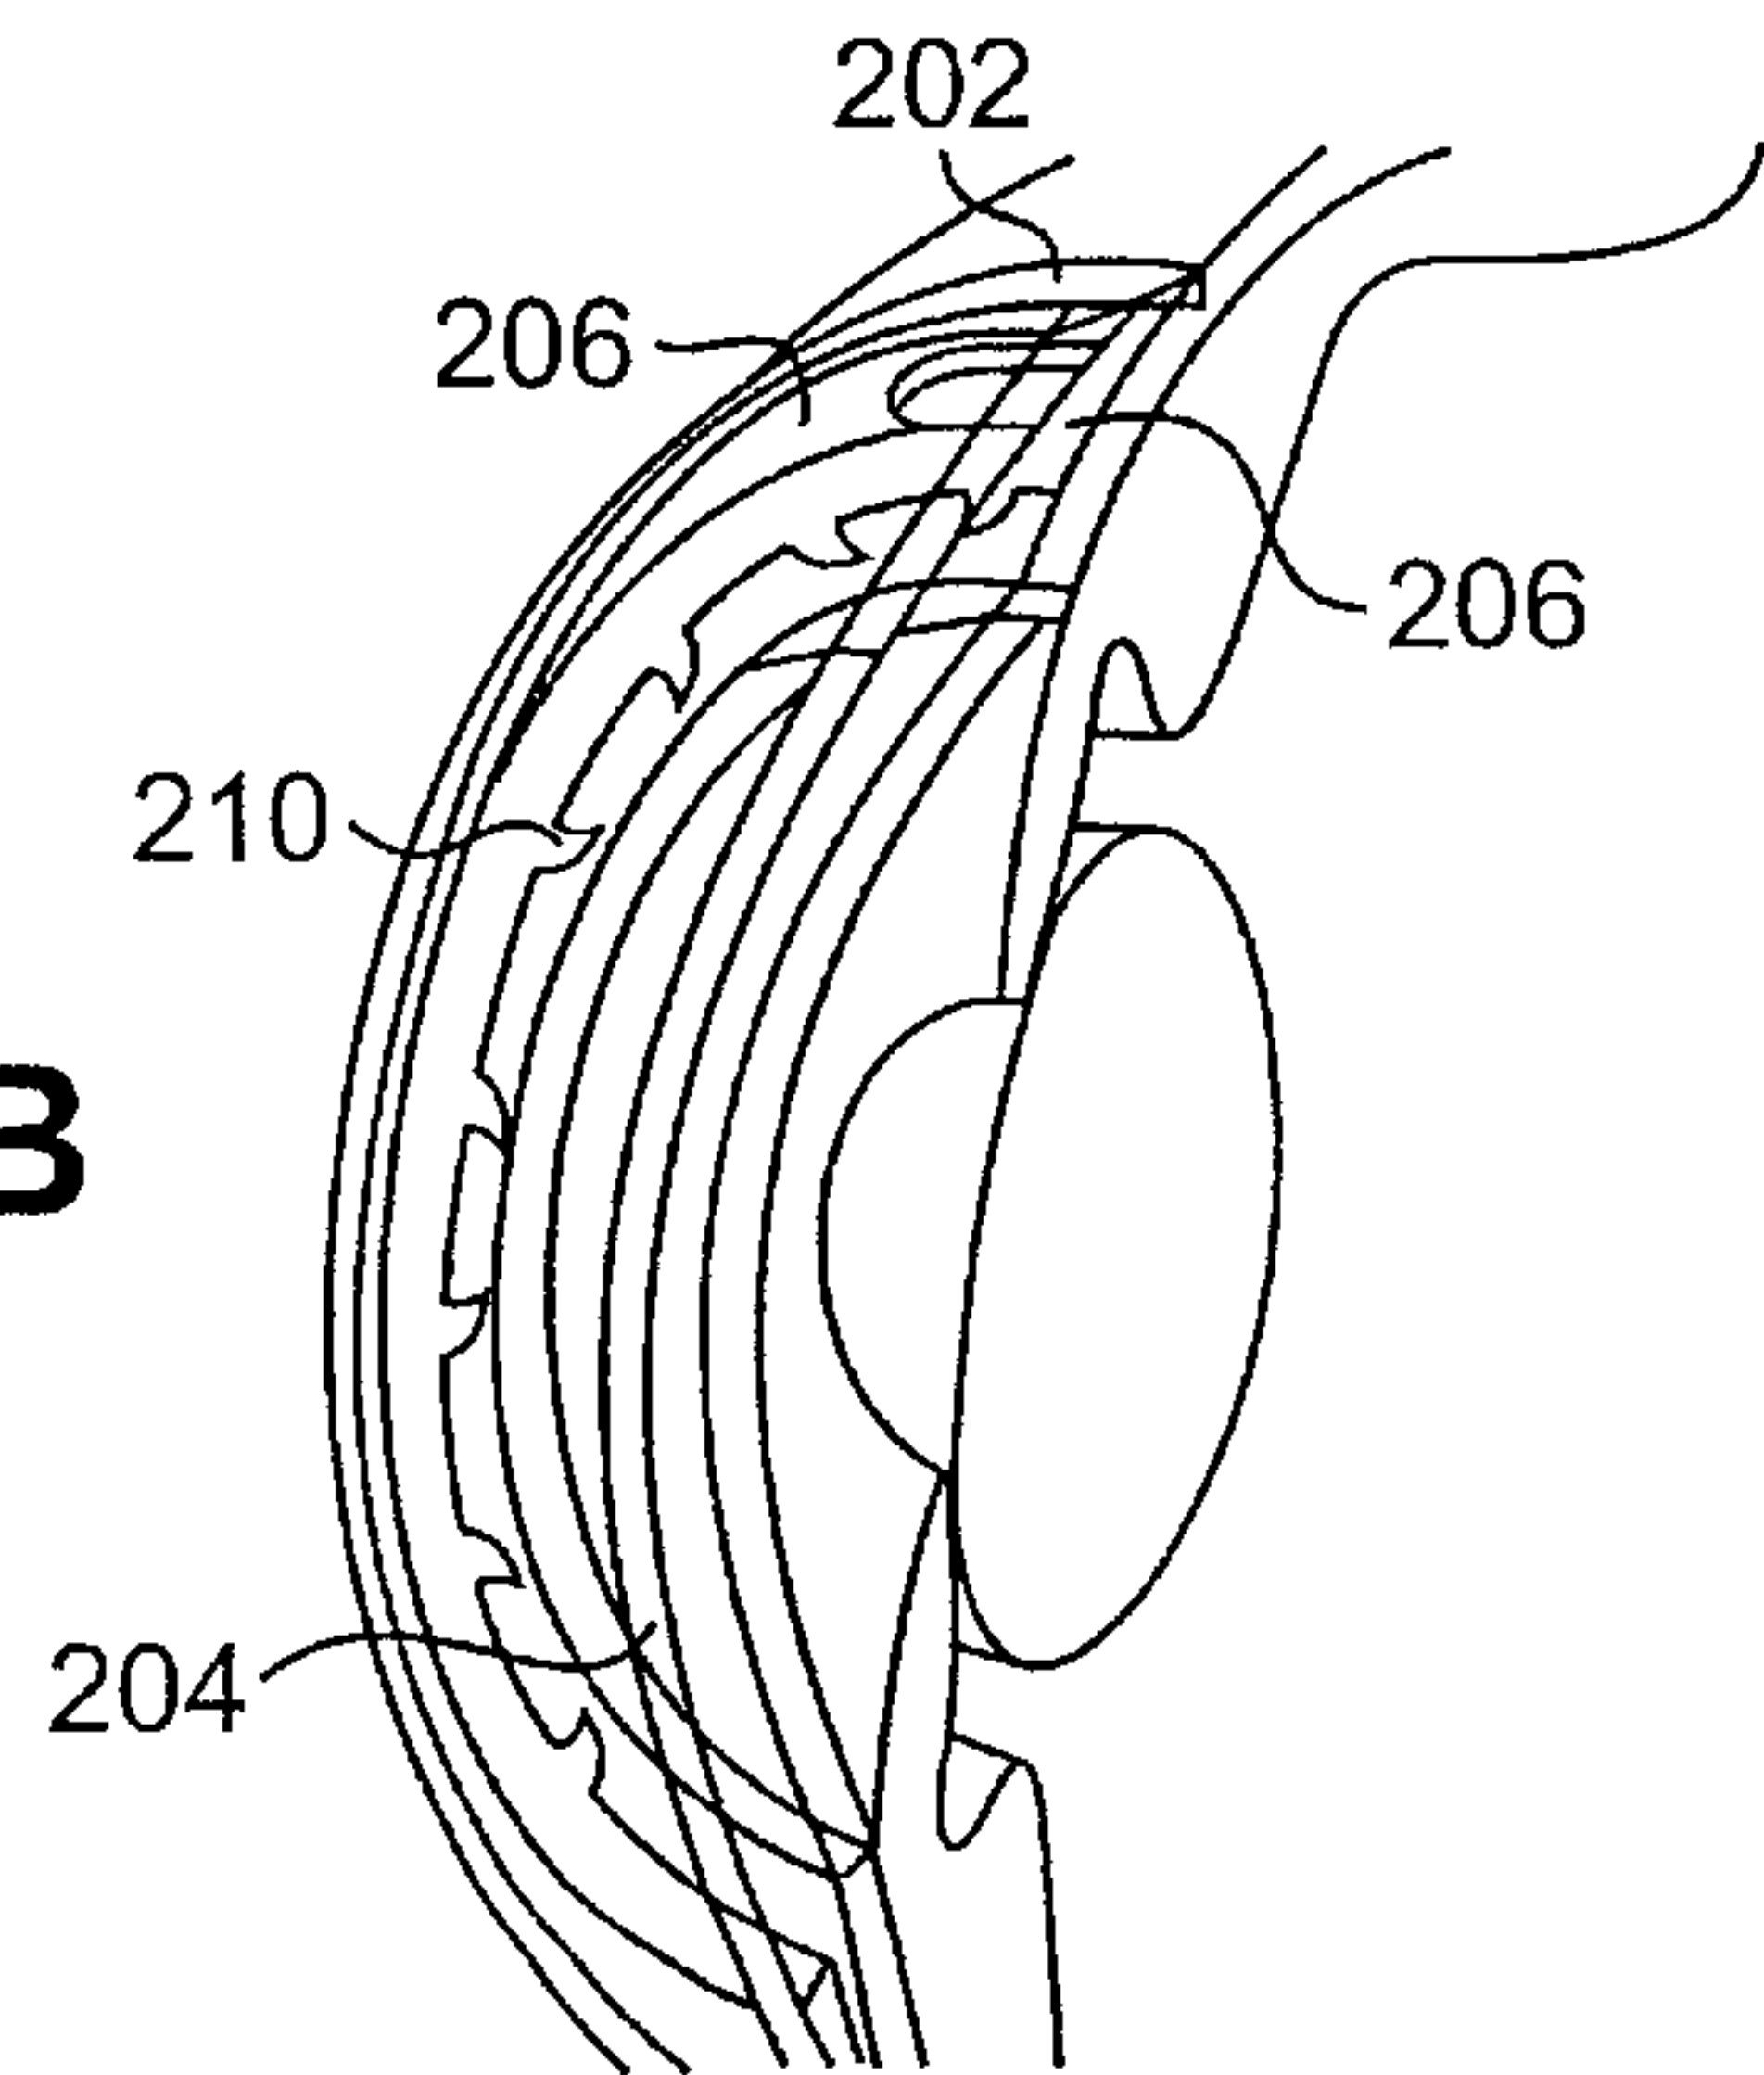


FIG. 2B

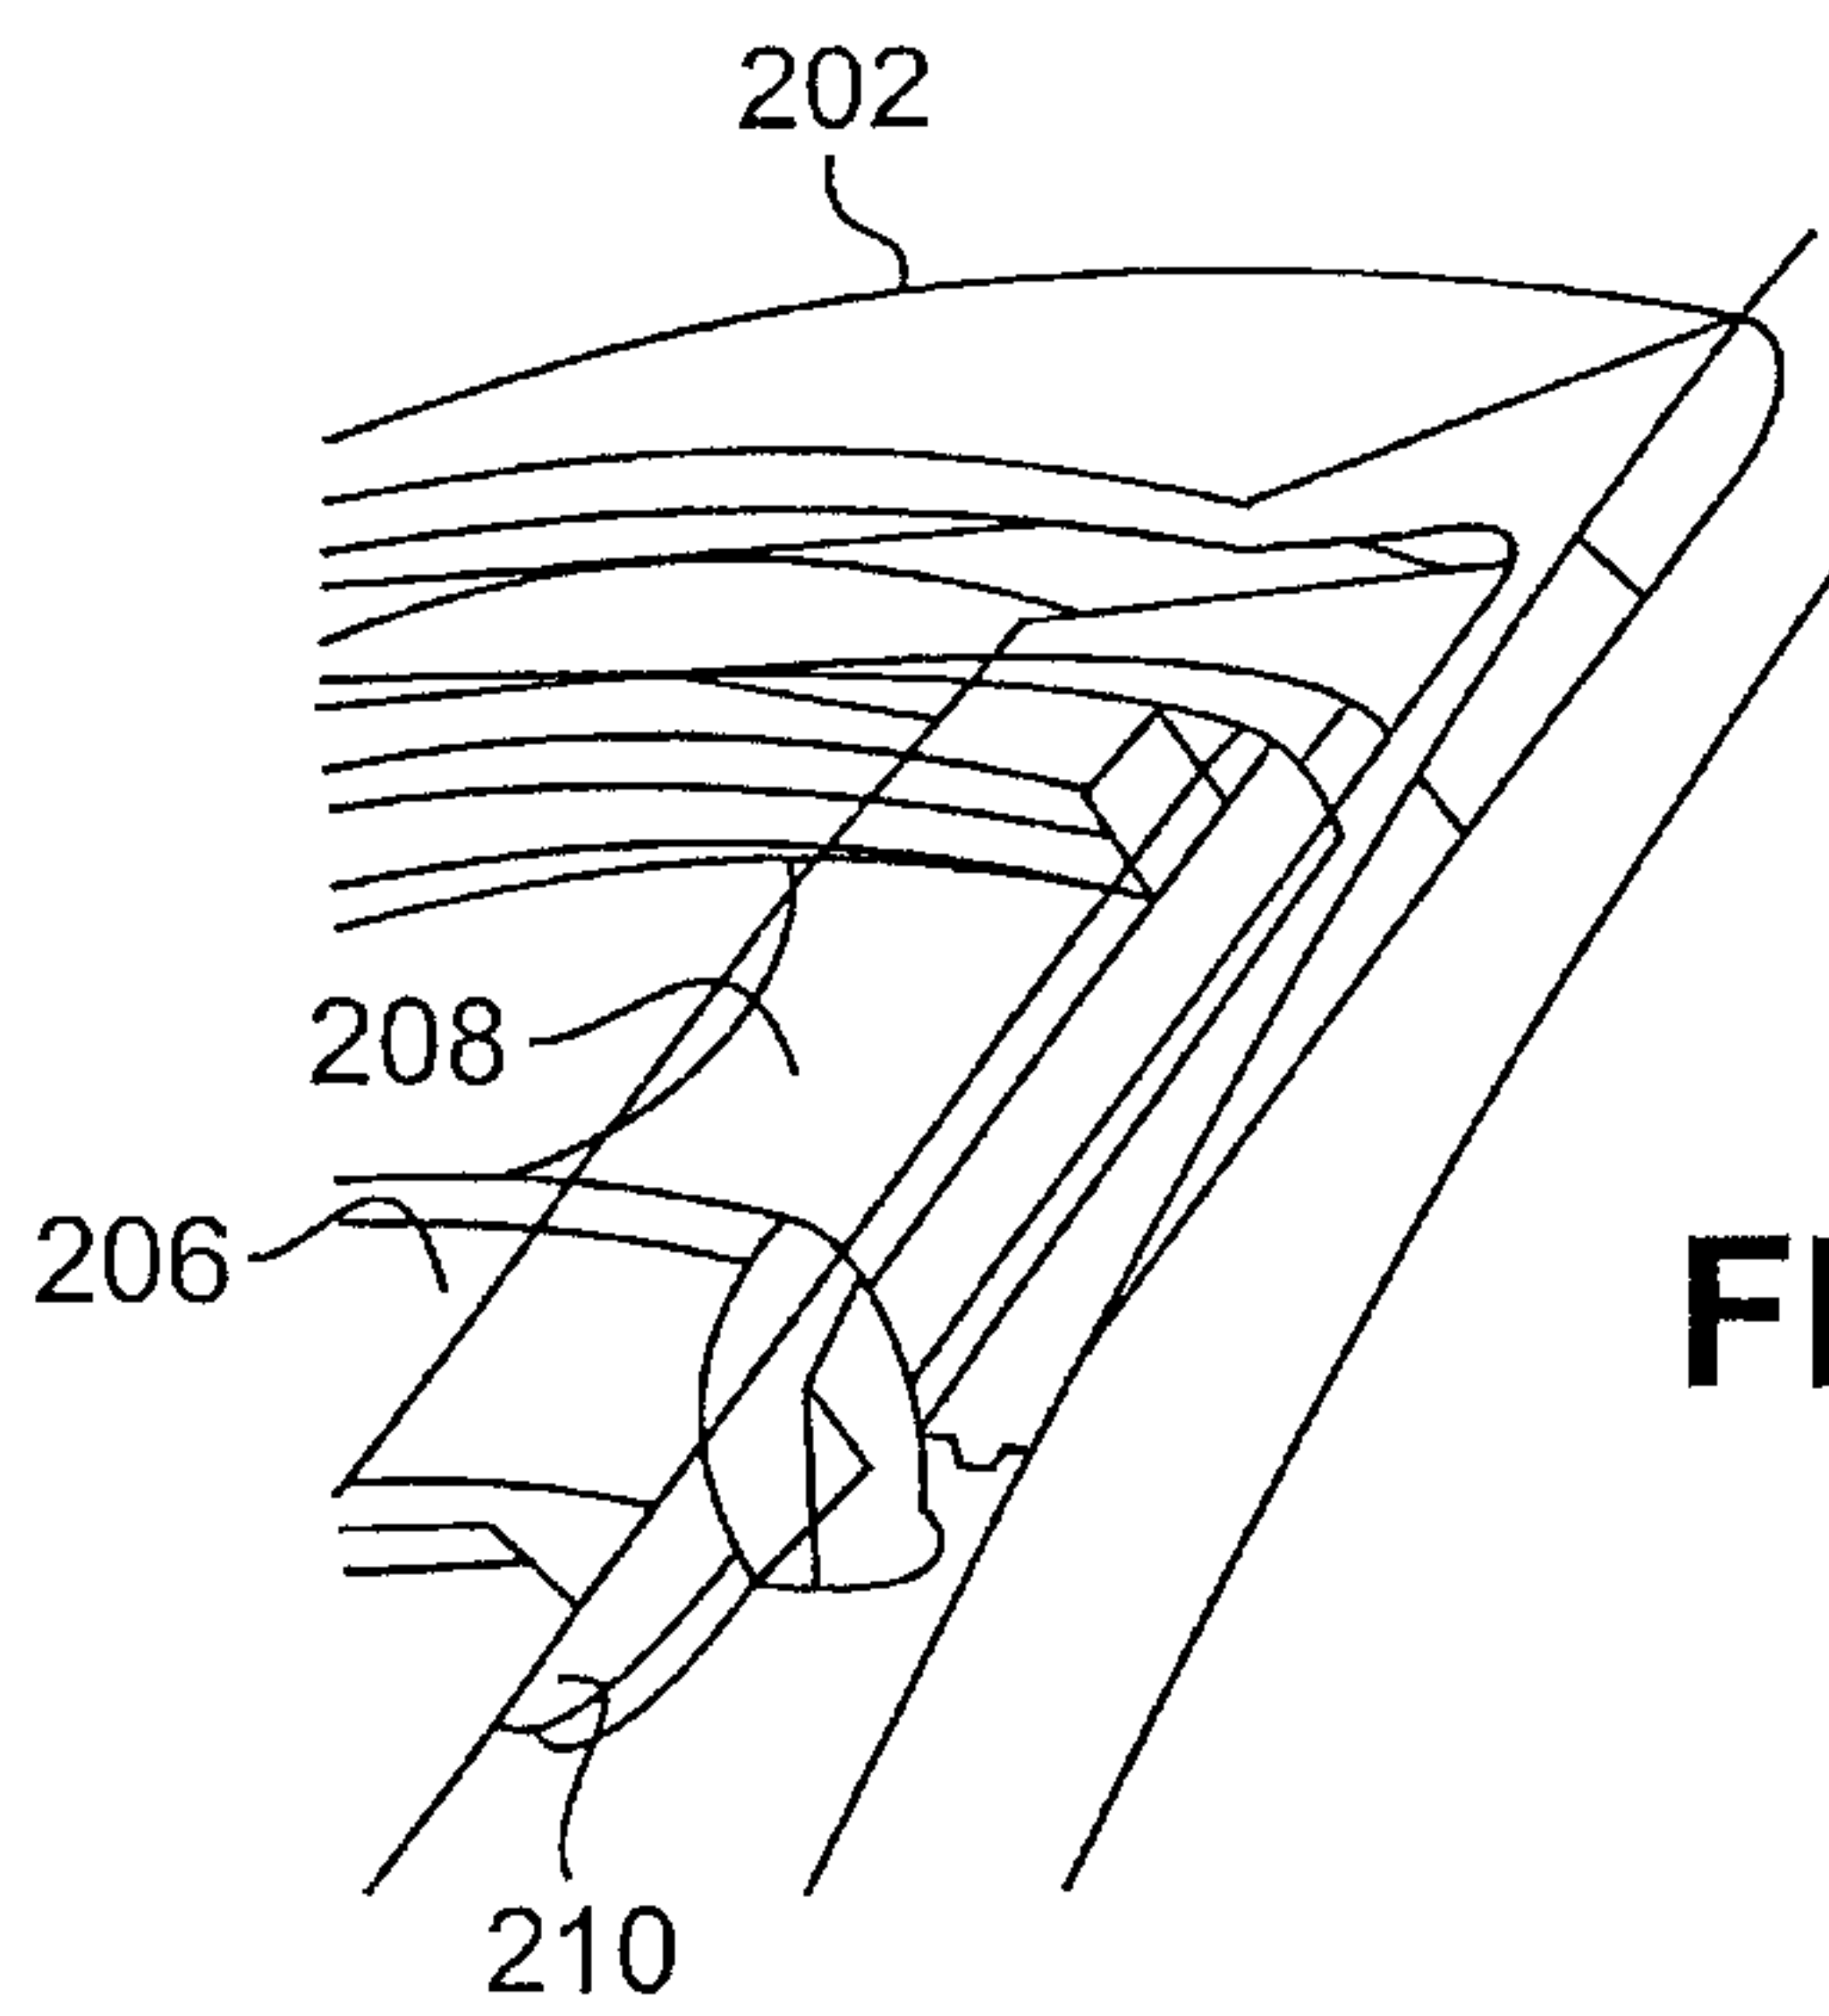


FIG. 2C

4/17

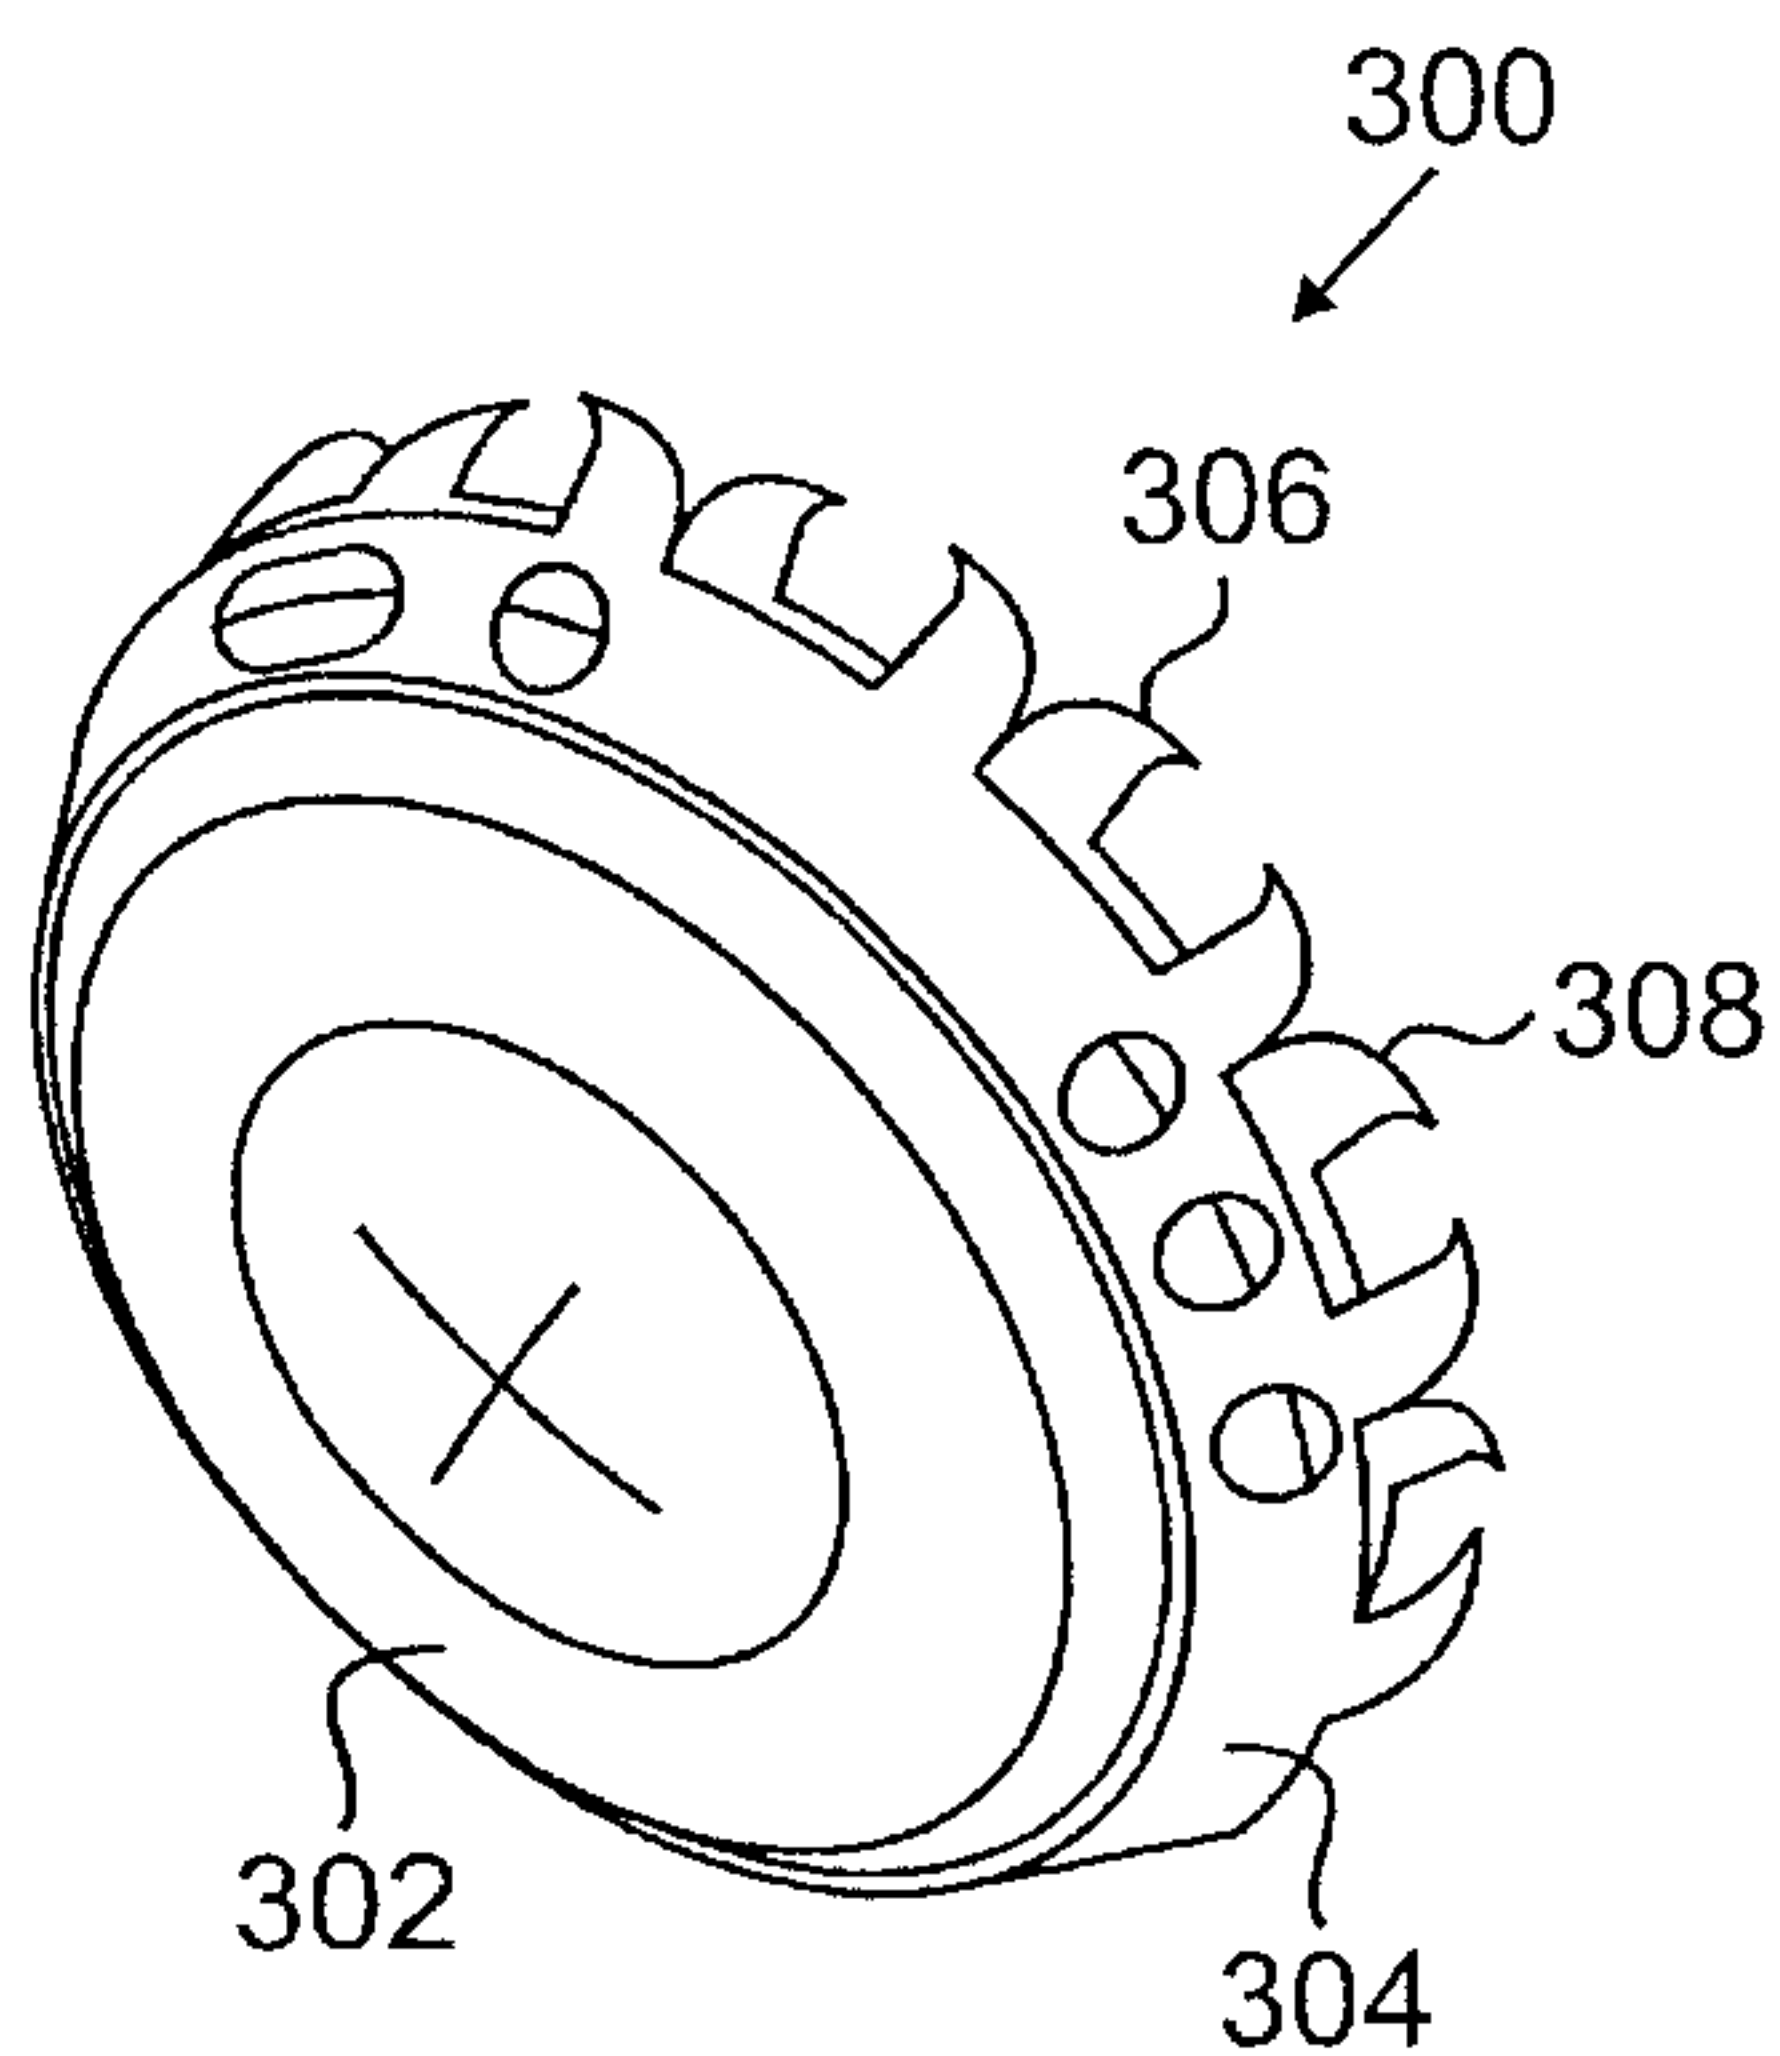


FIG. 3A

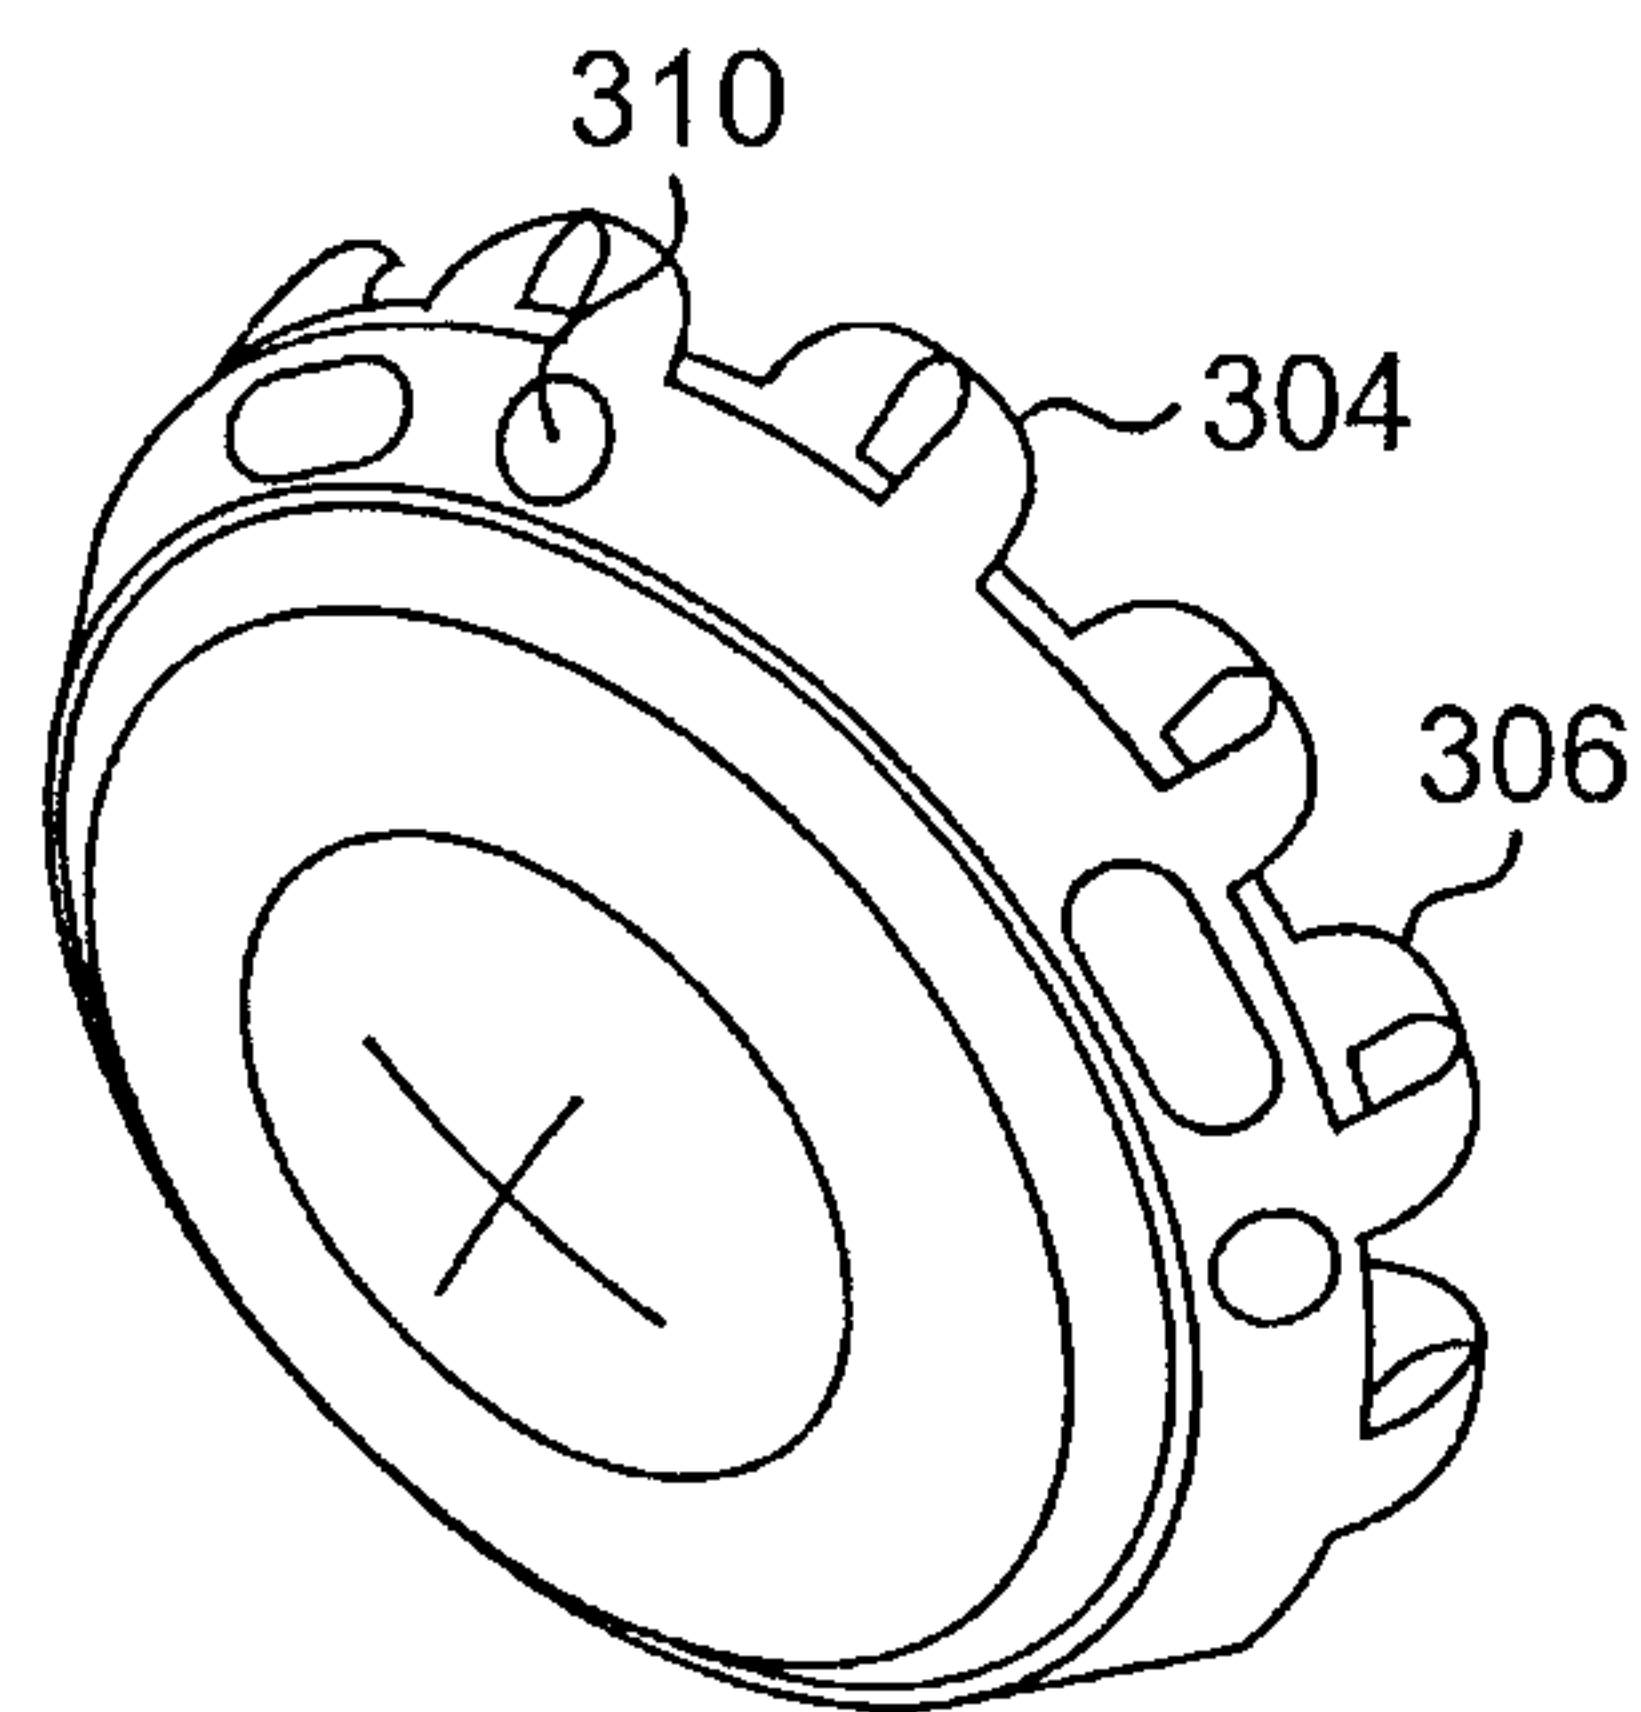


FIG. 3B

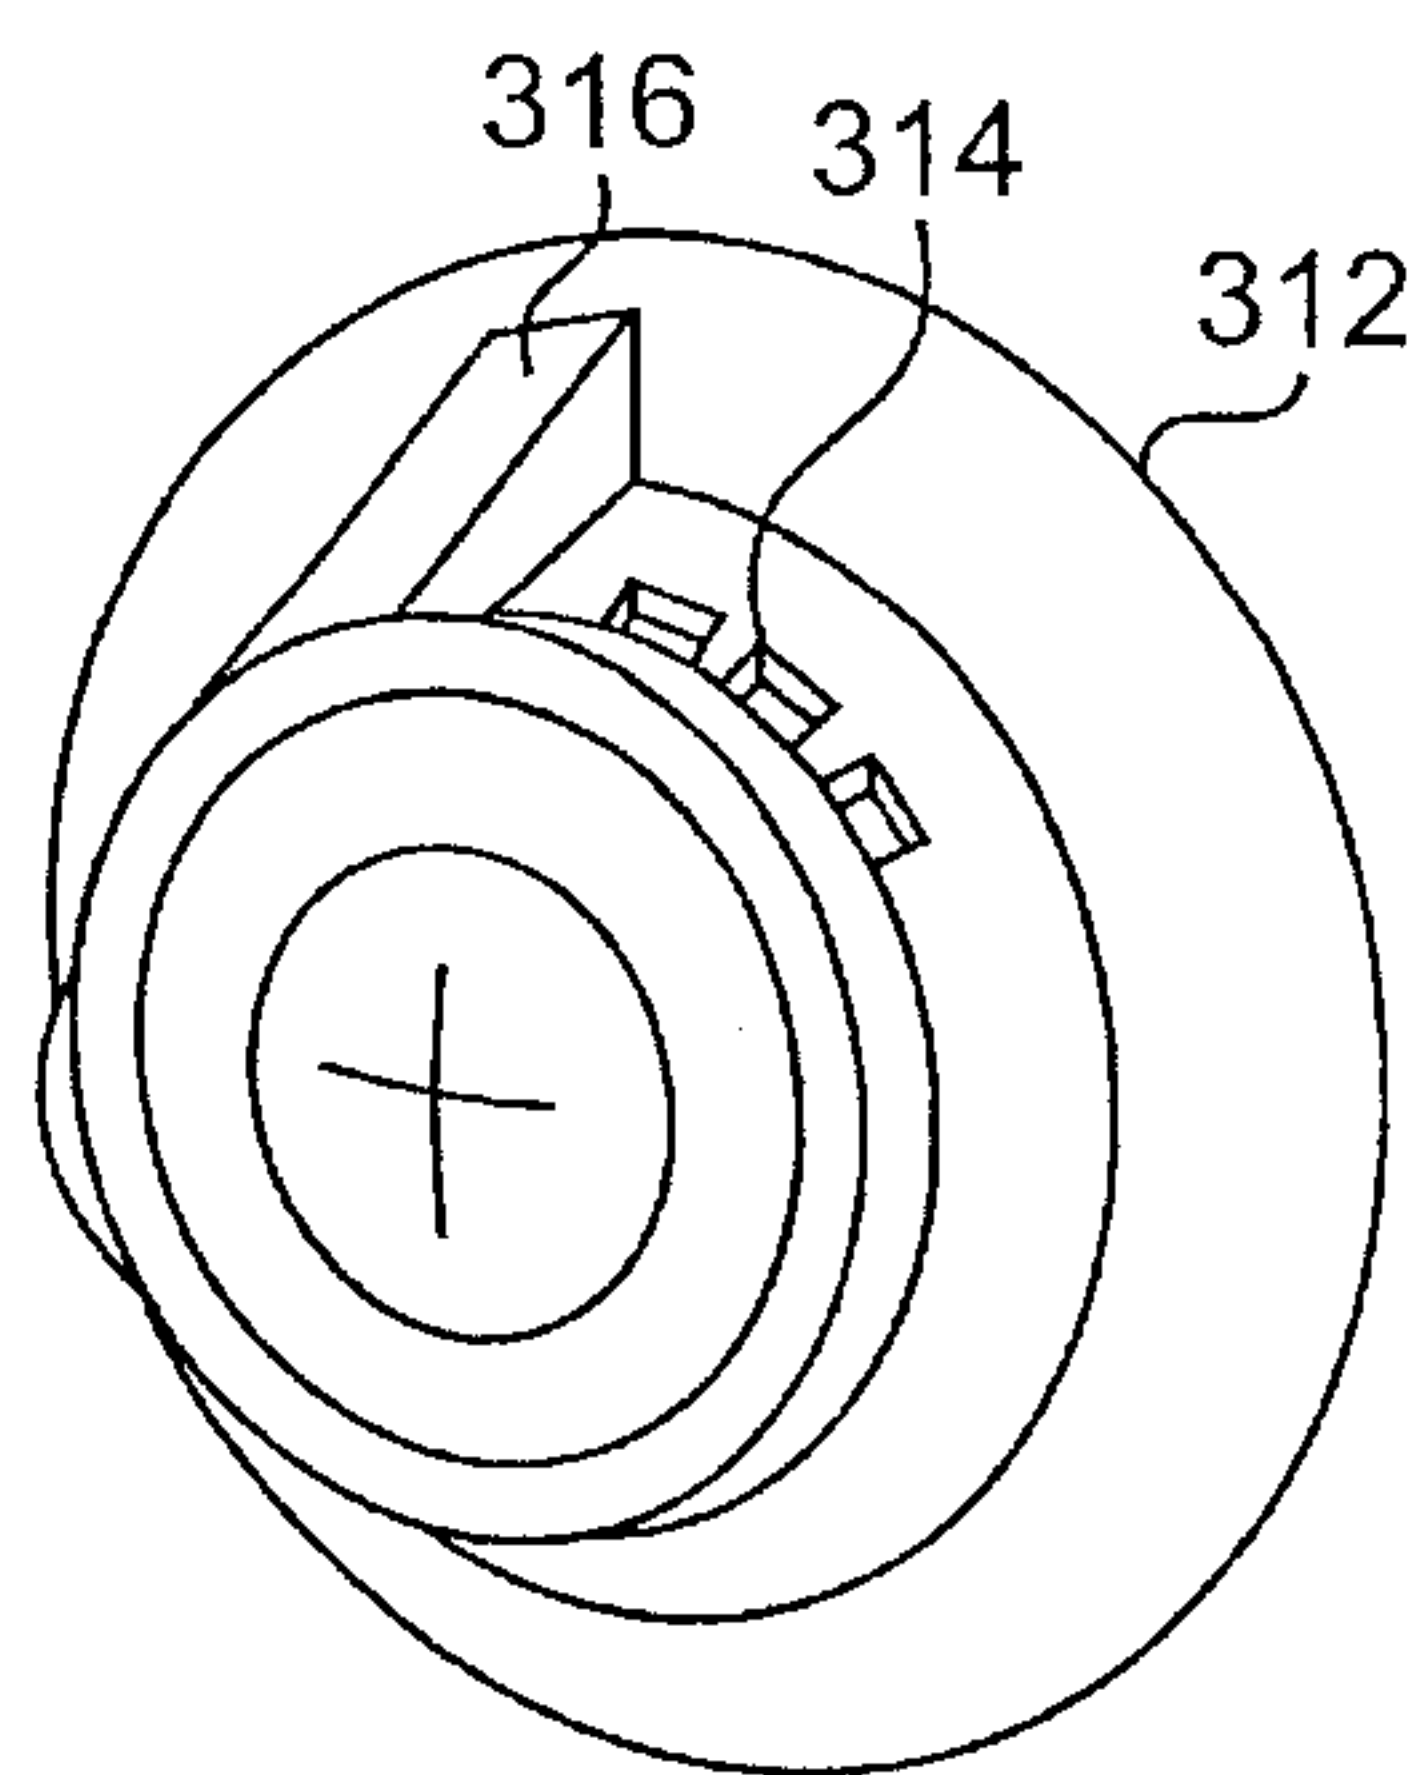


FIG. 3C

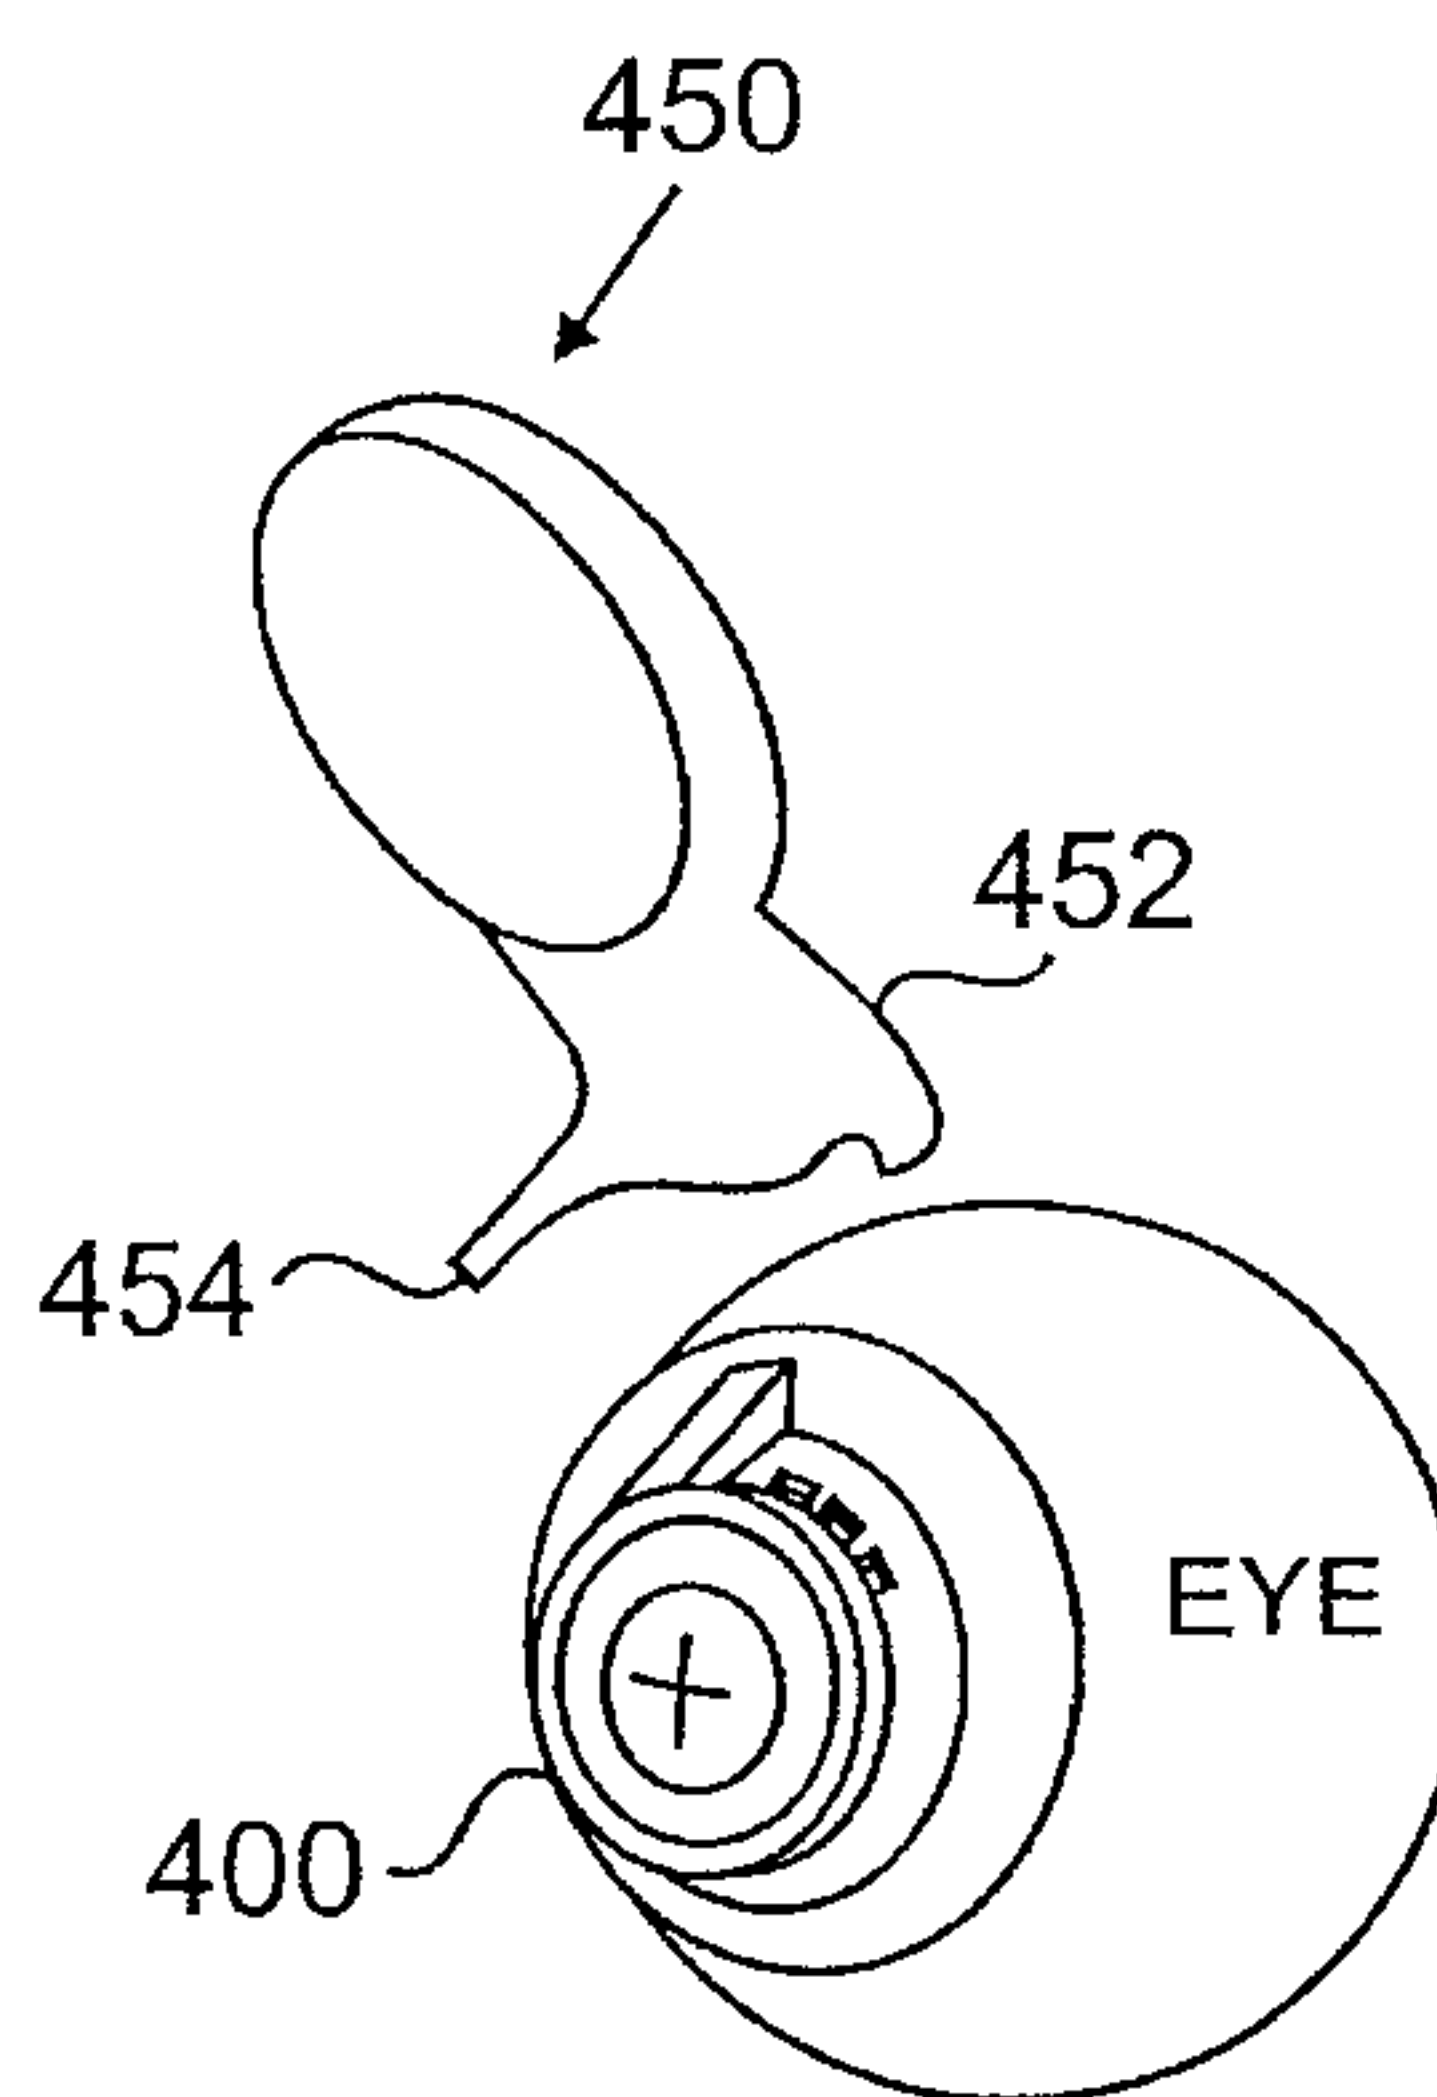


FIG. 4A

5/17

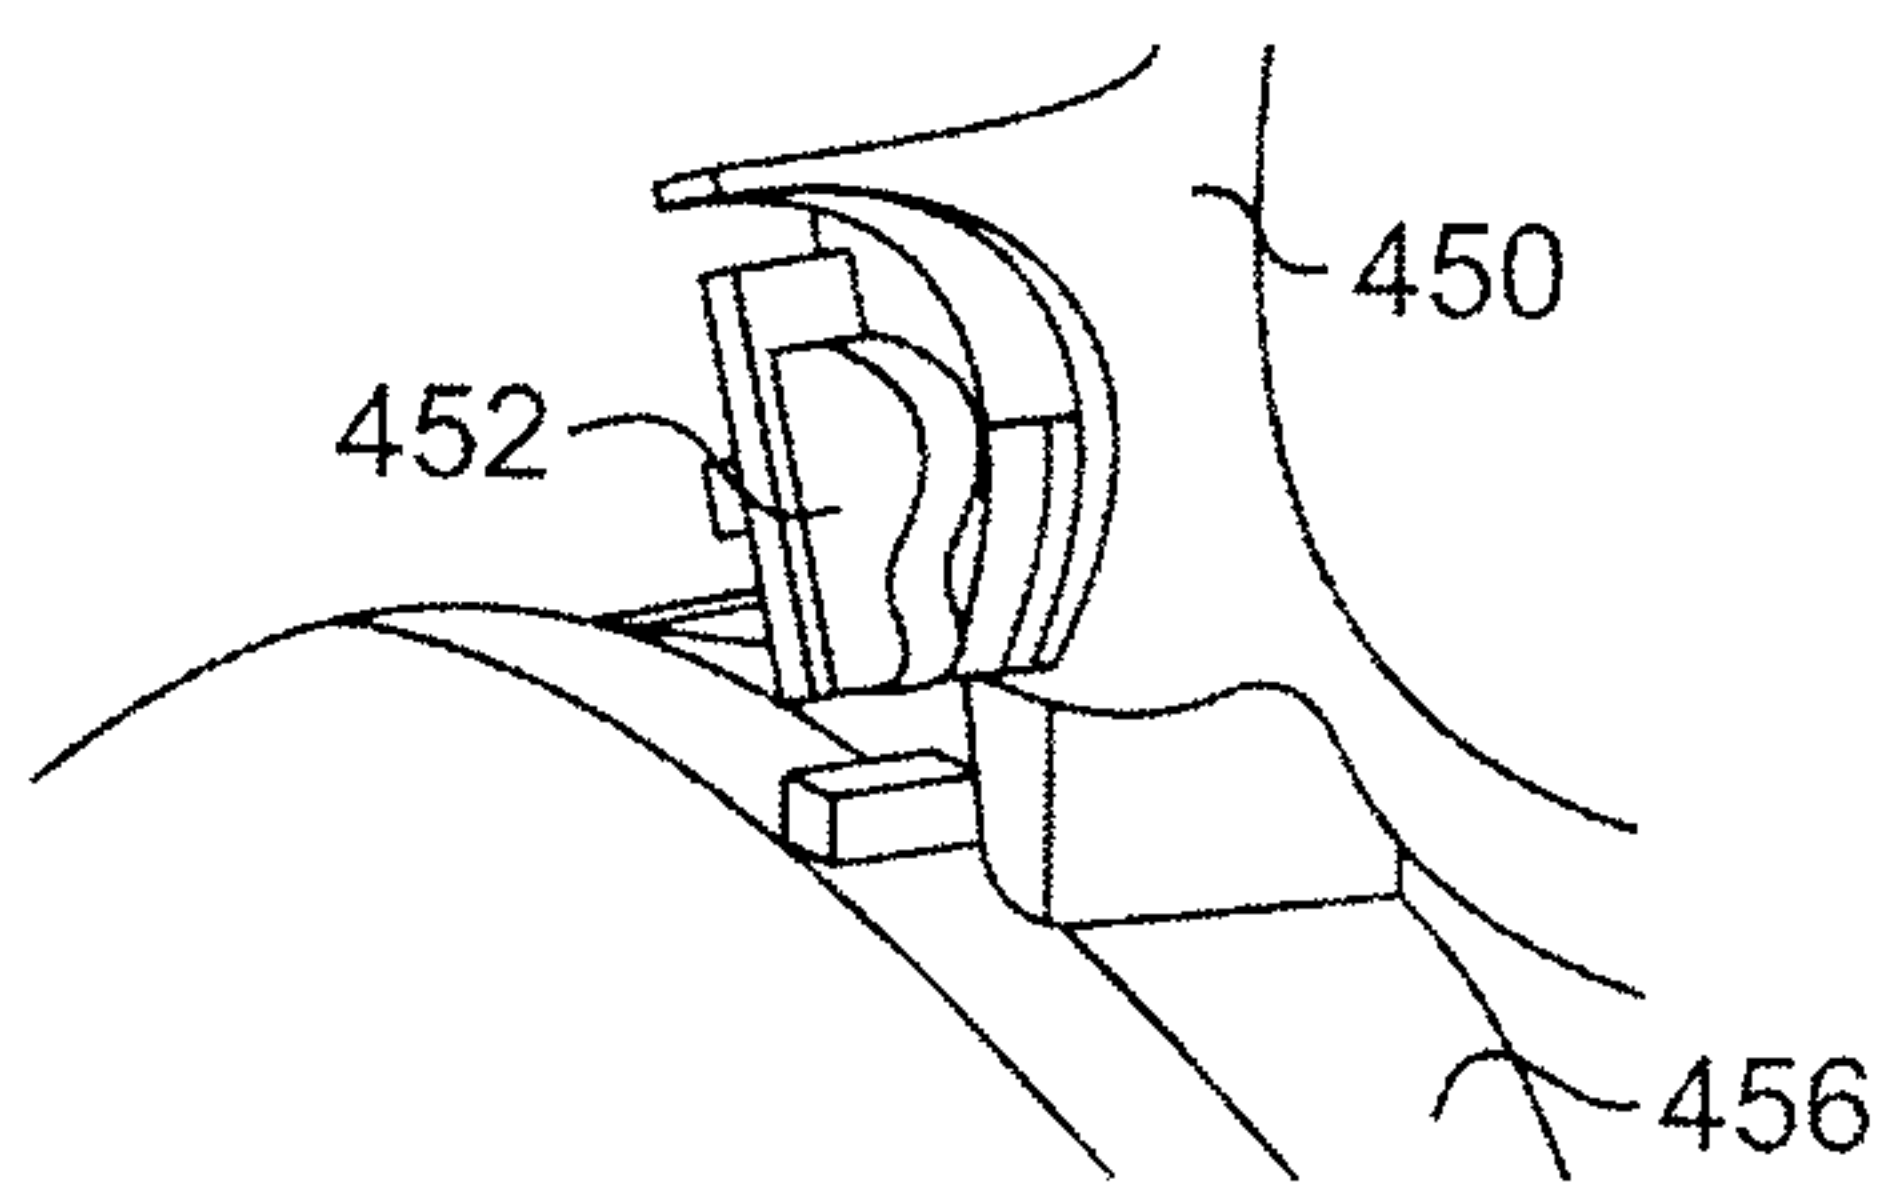


FIG. 4B

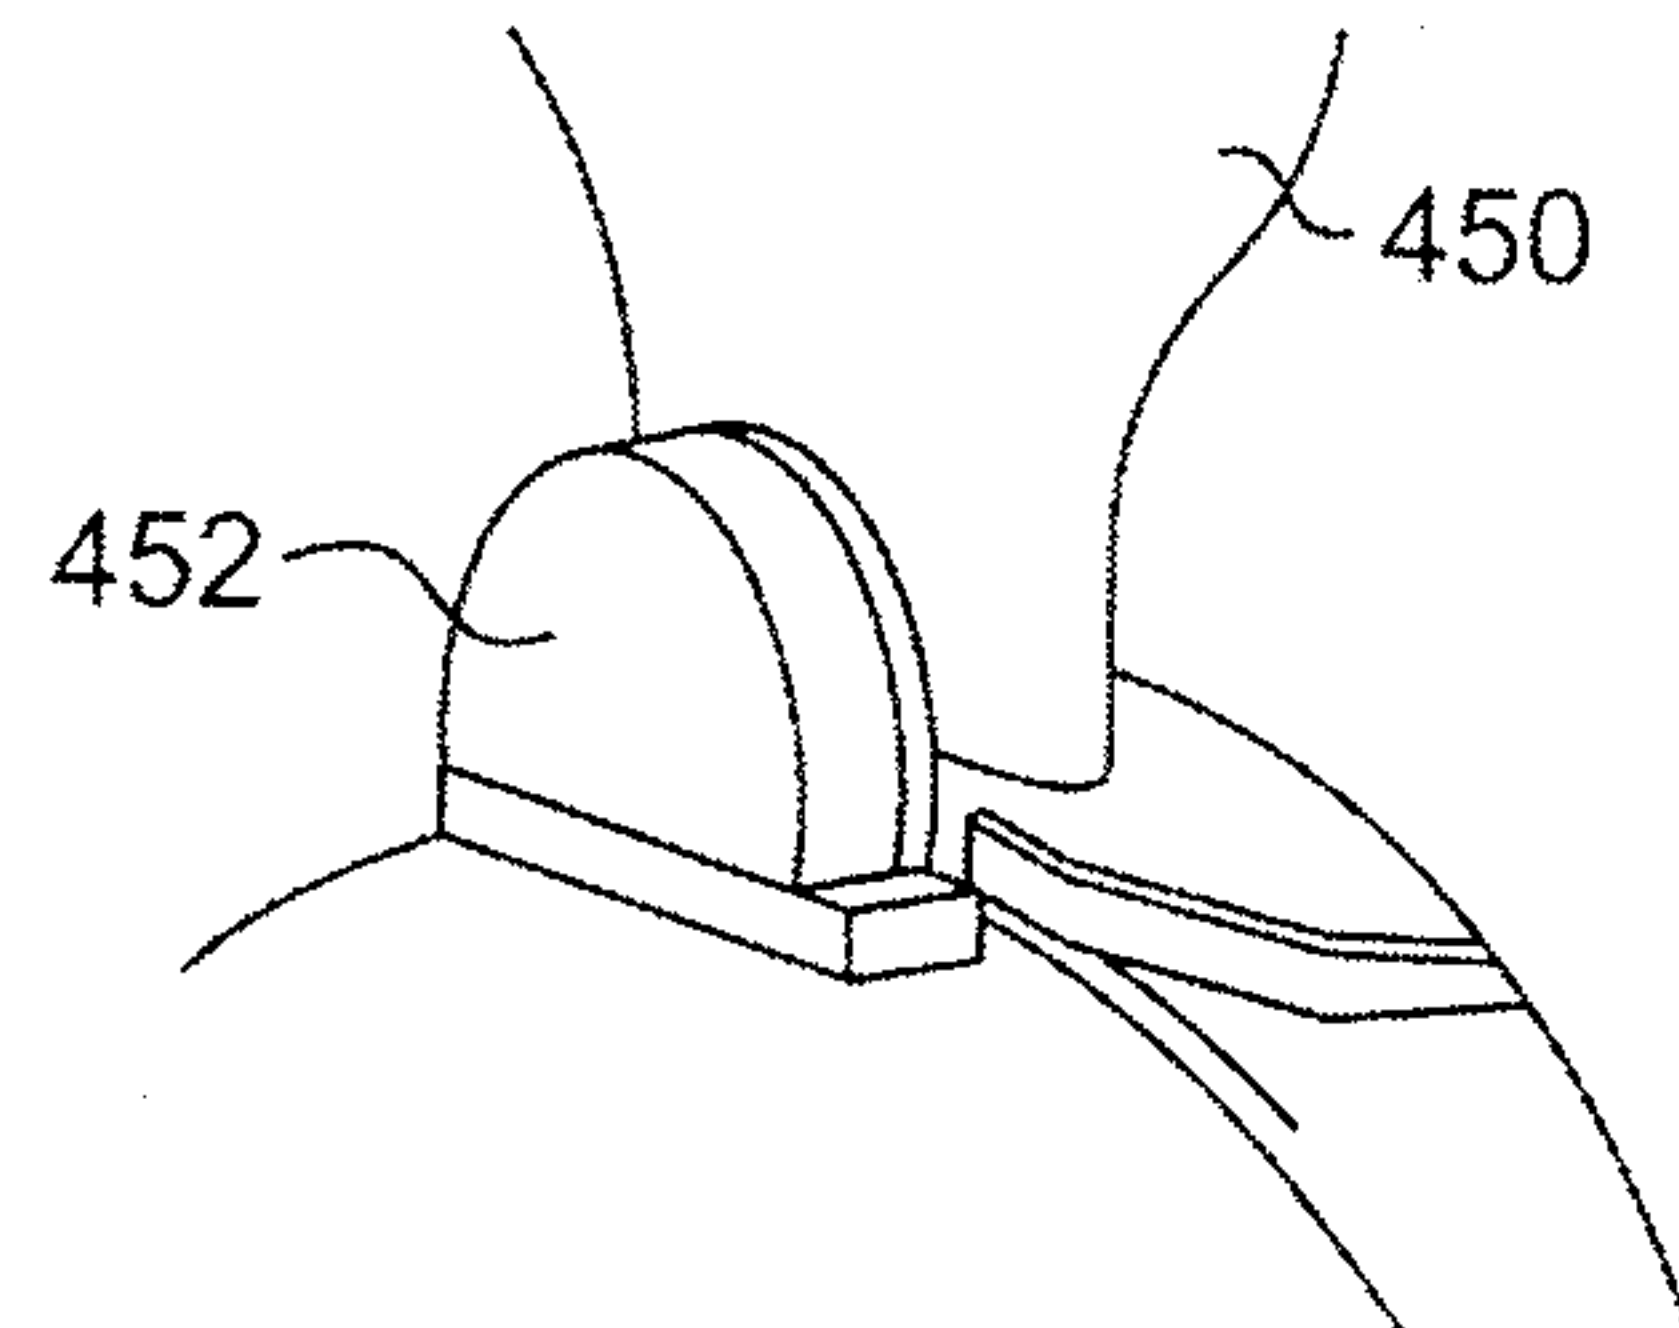


FIG. 4C

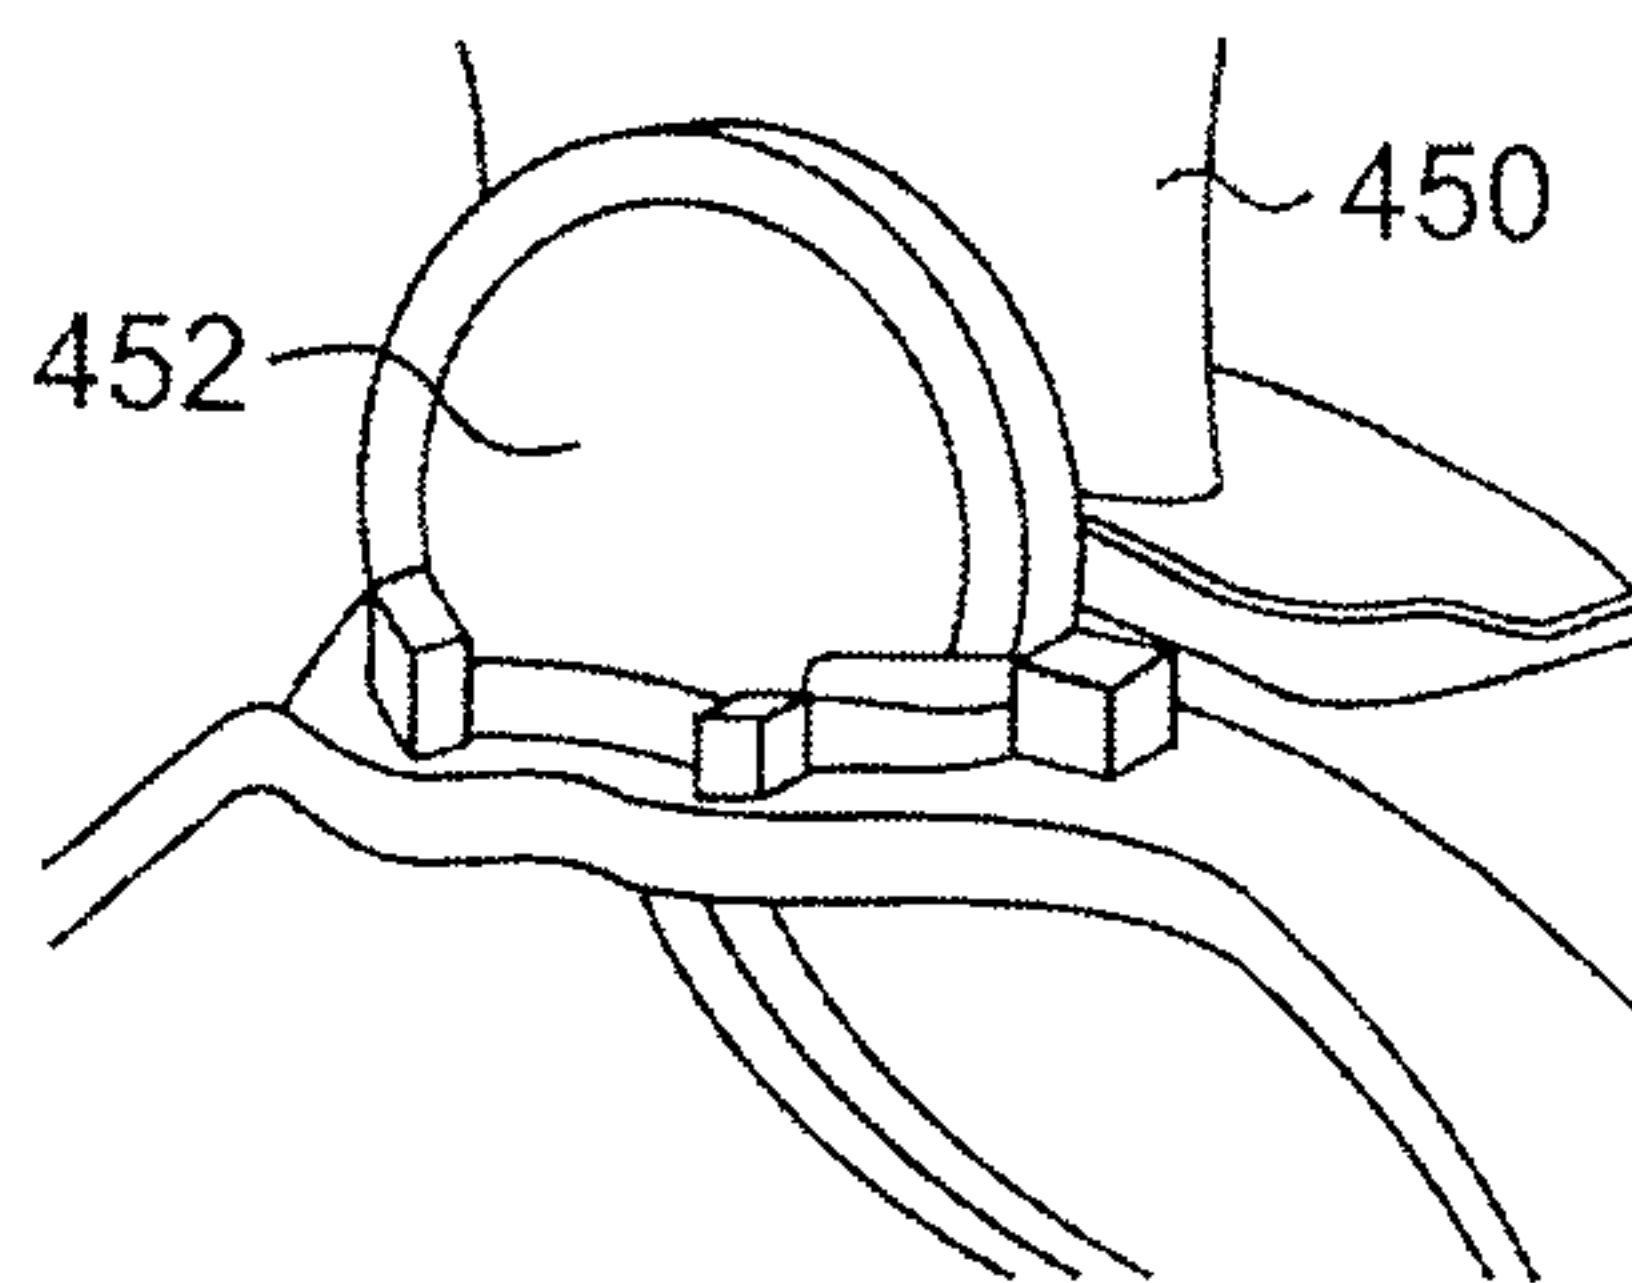


FIG. 4D

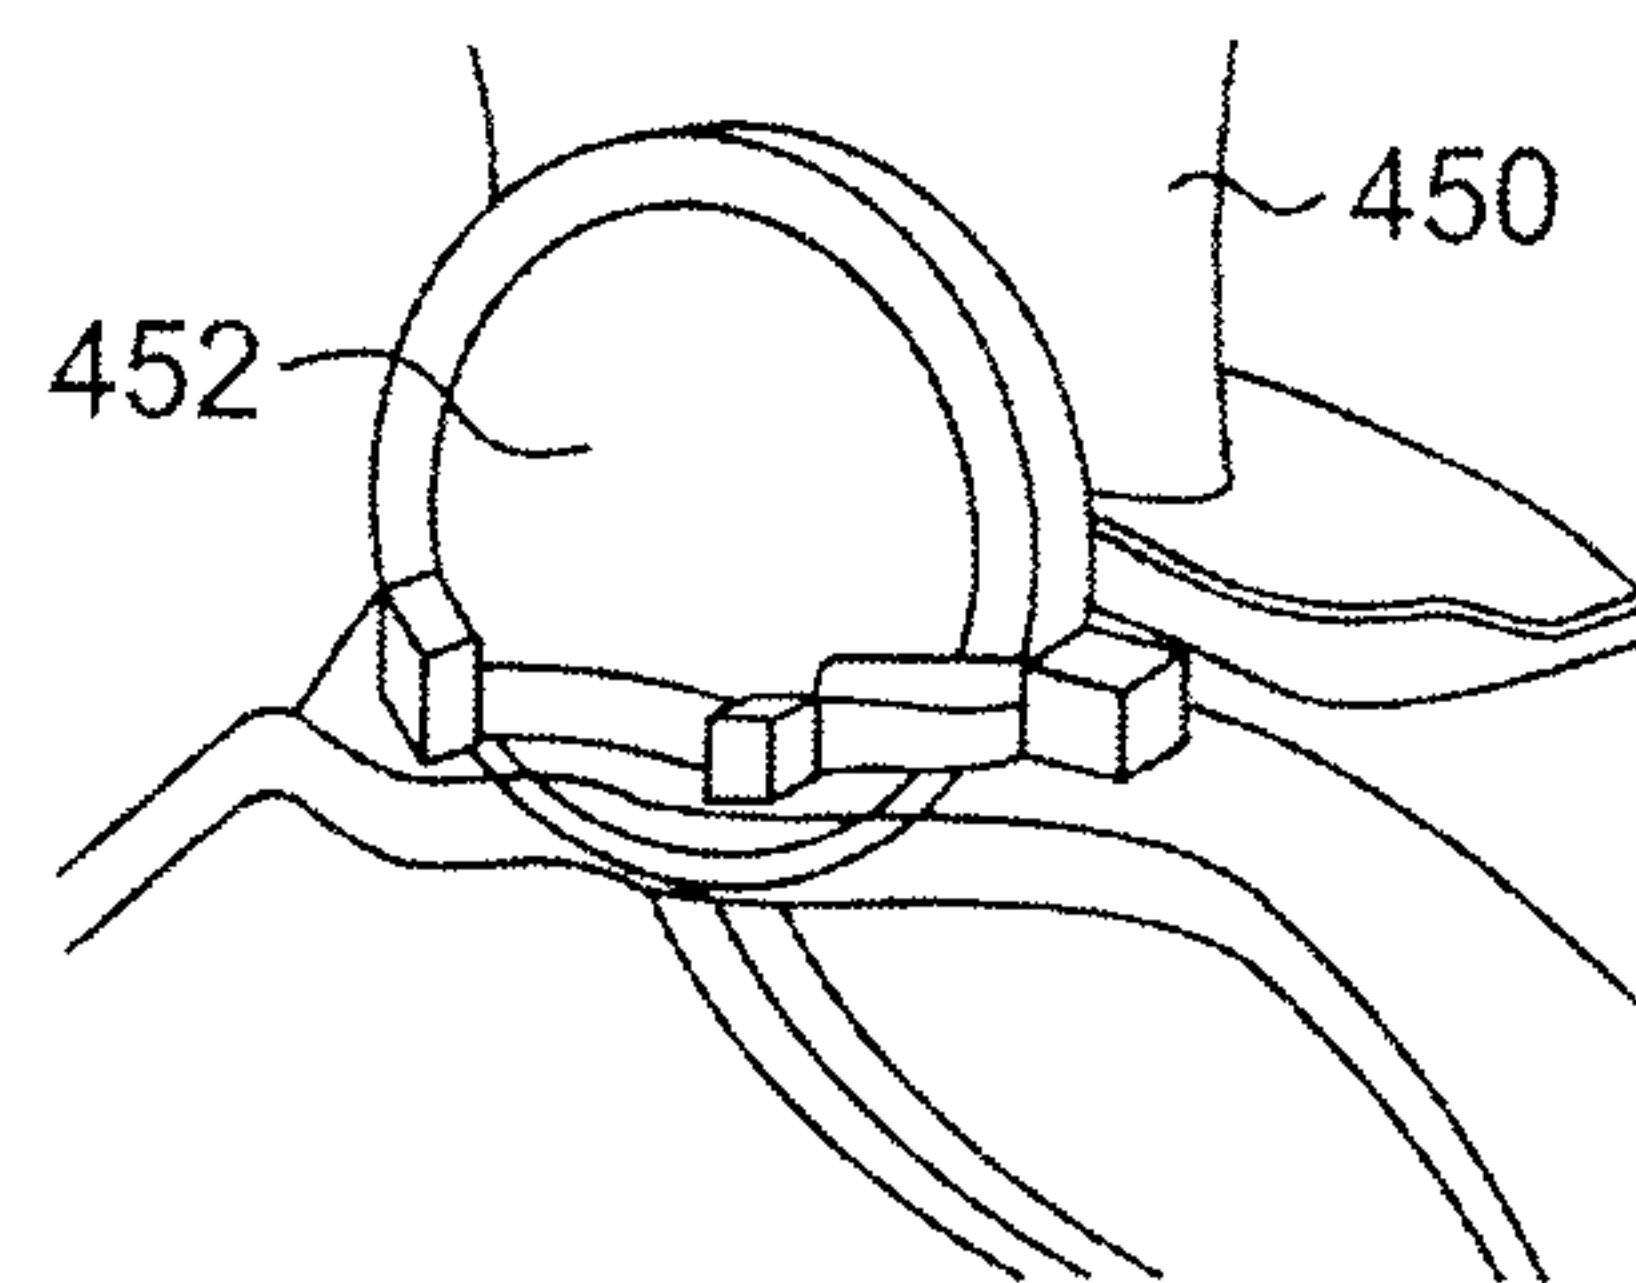
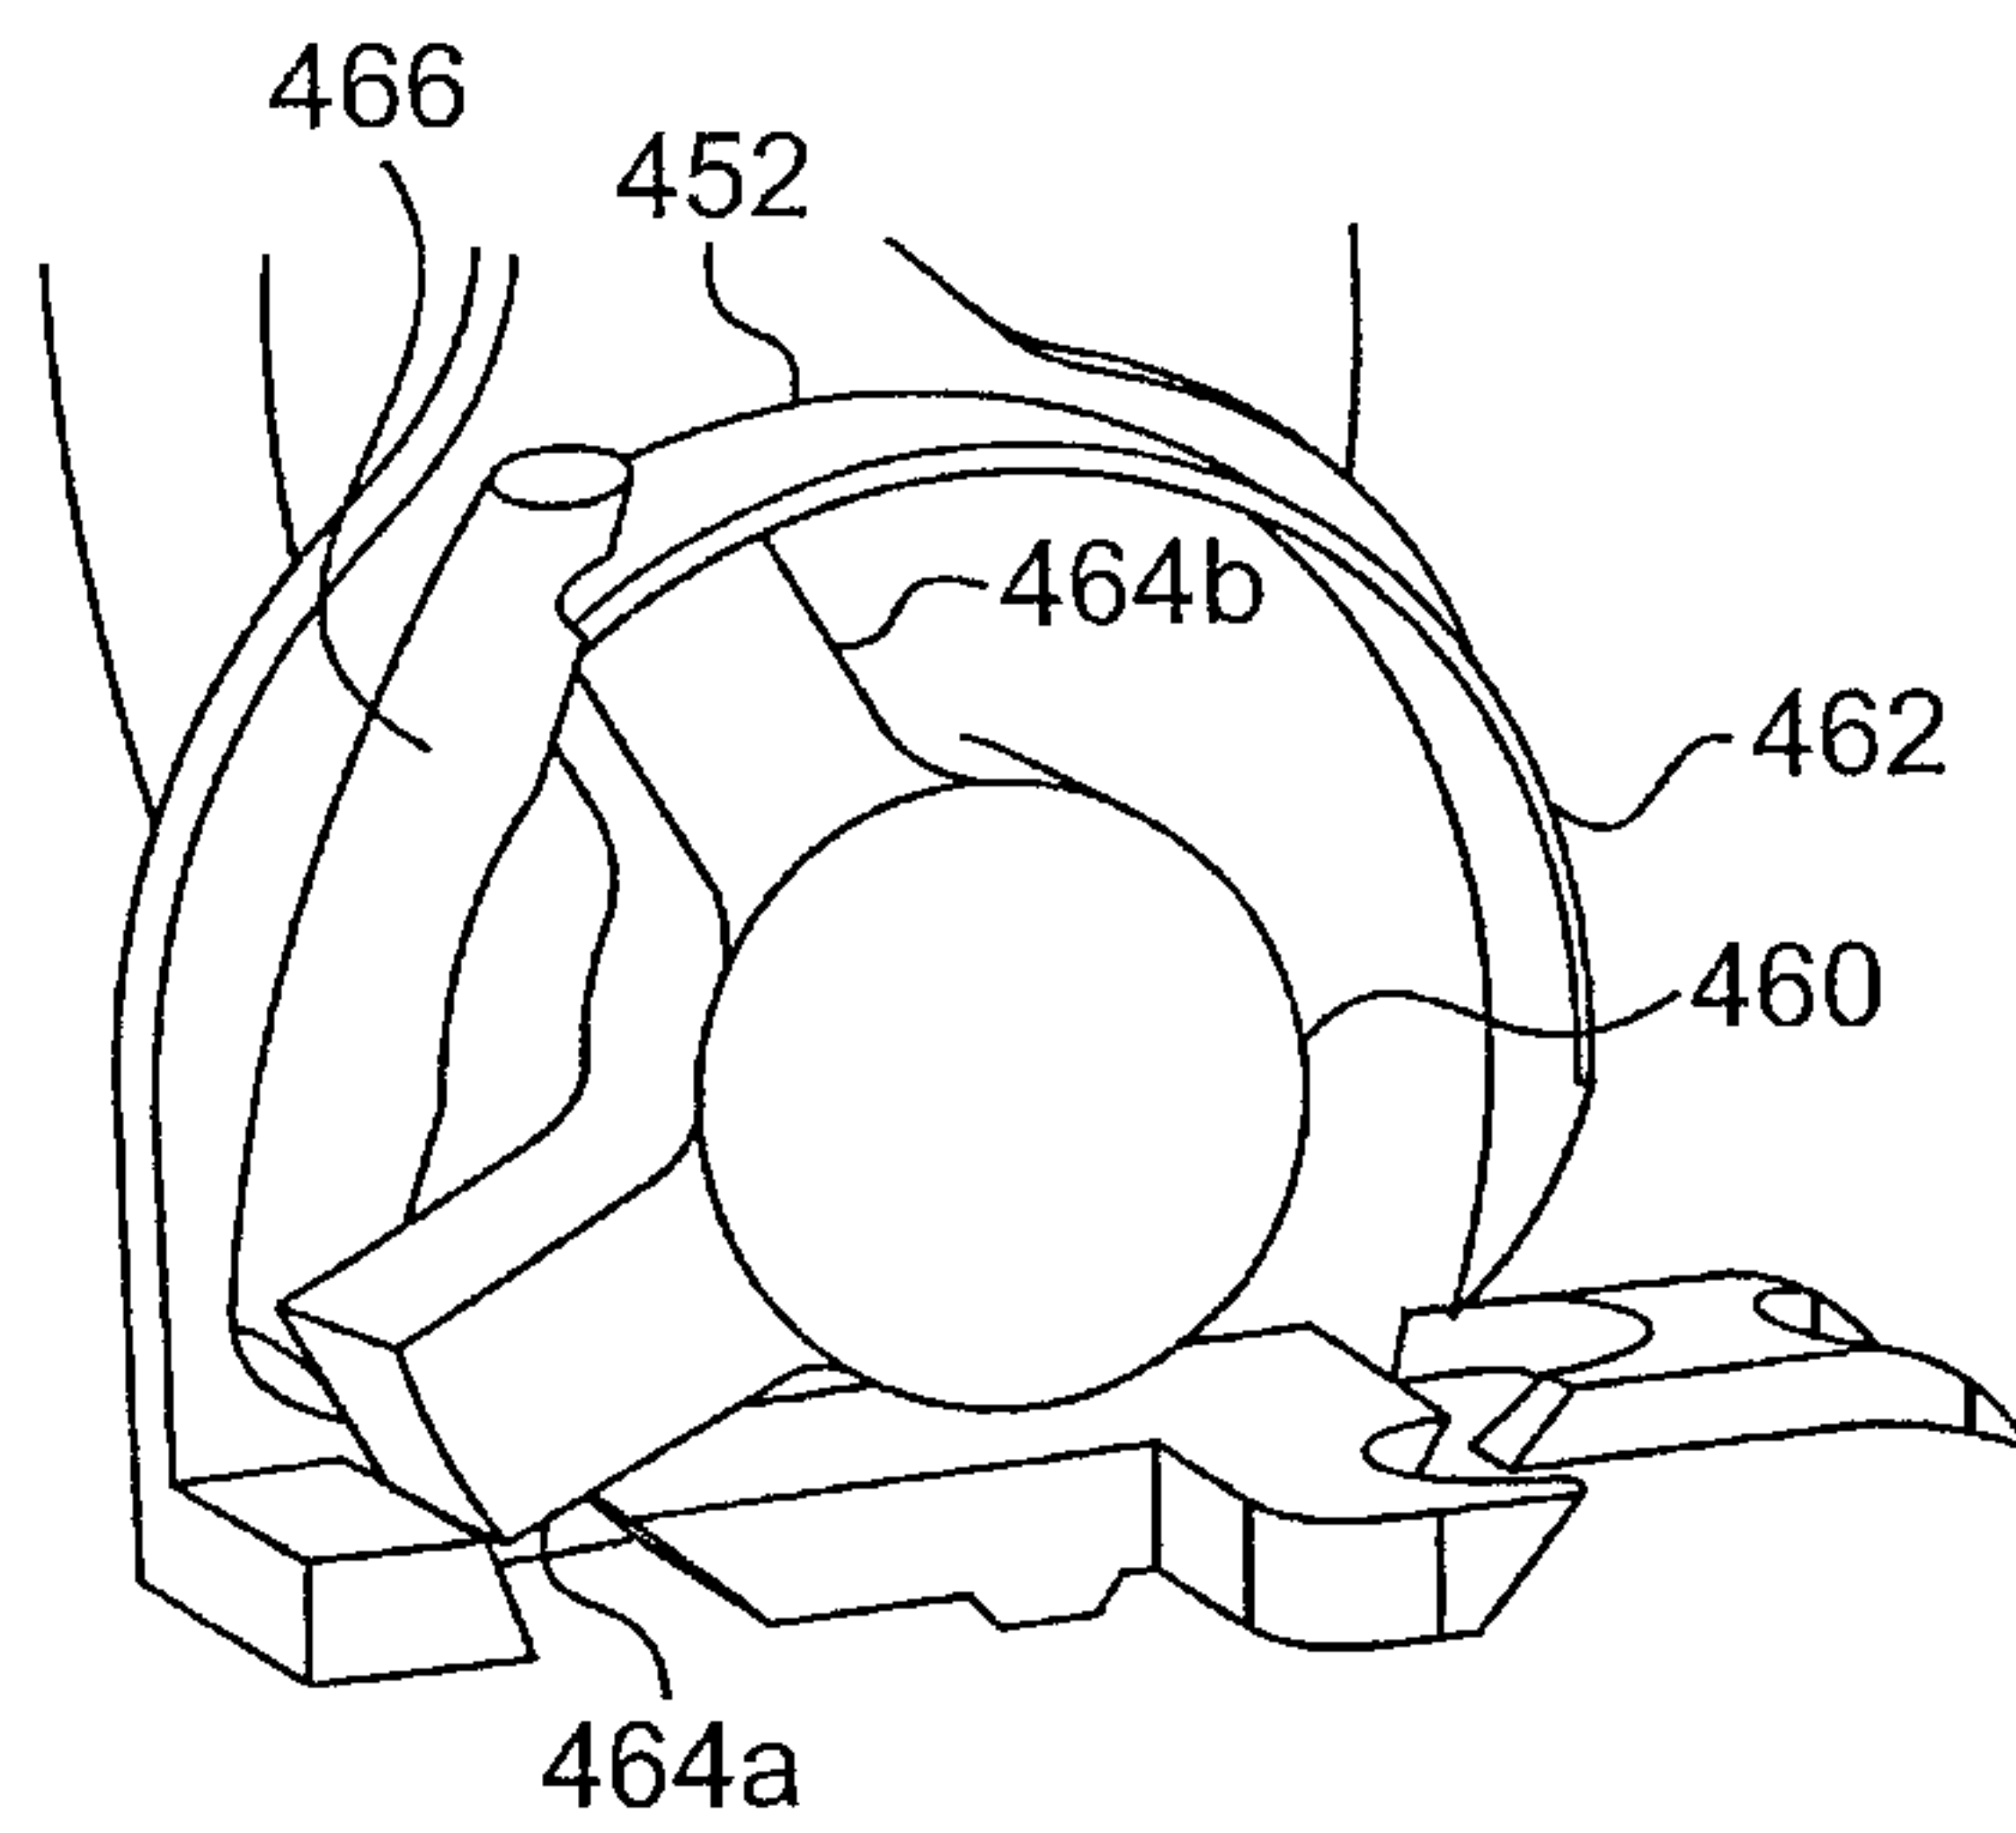
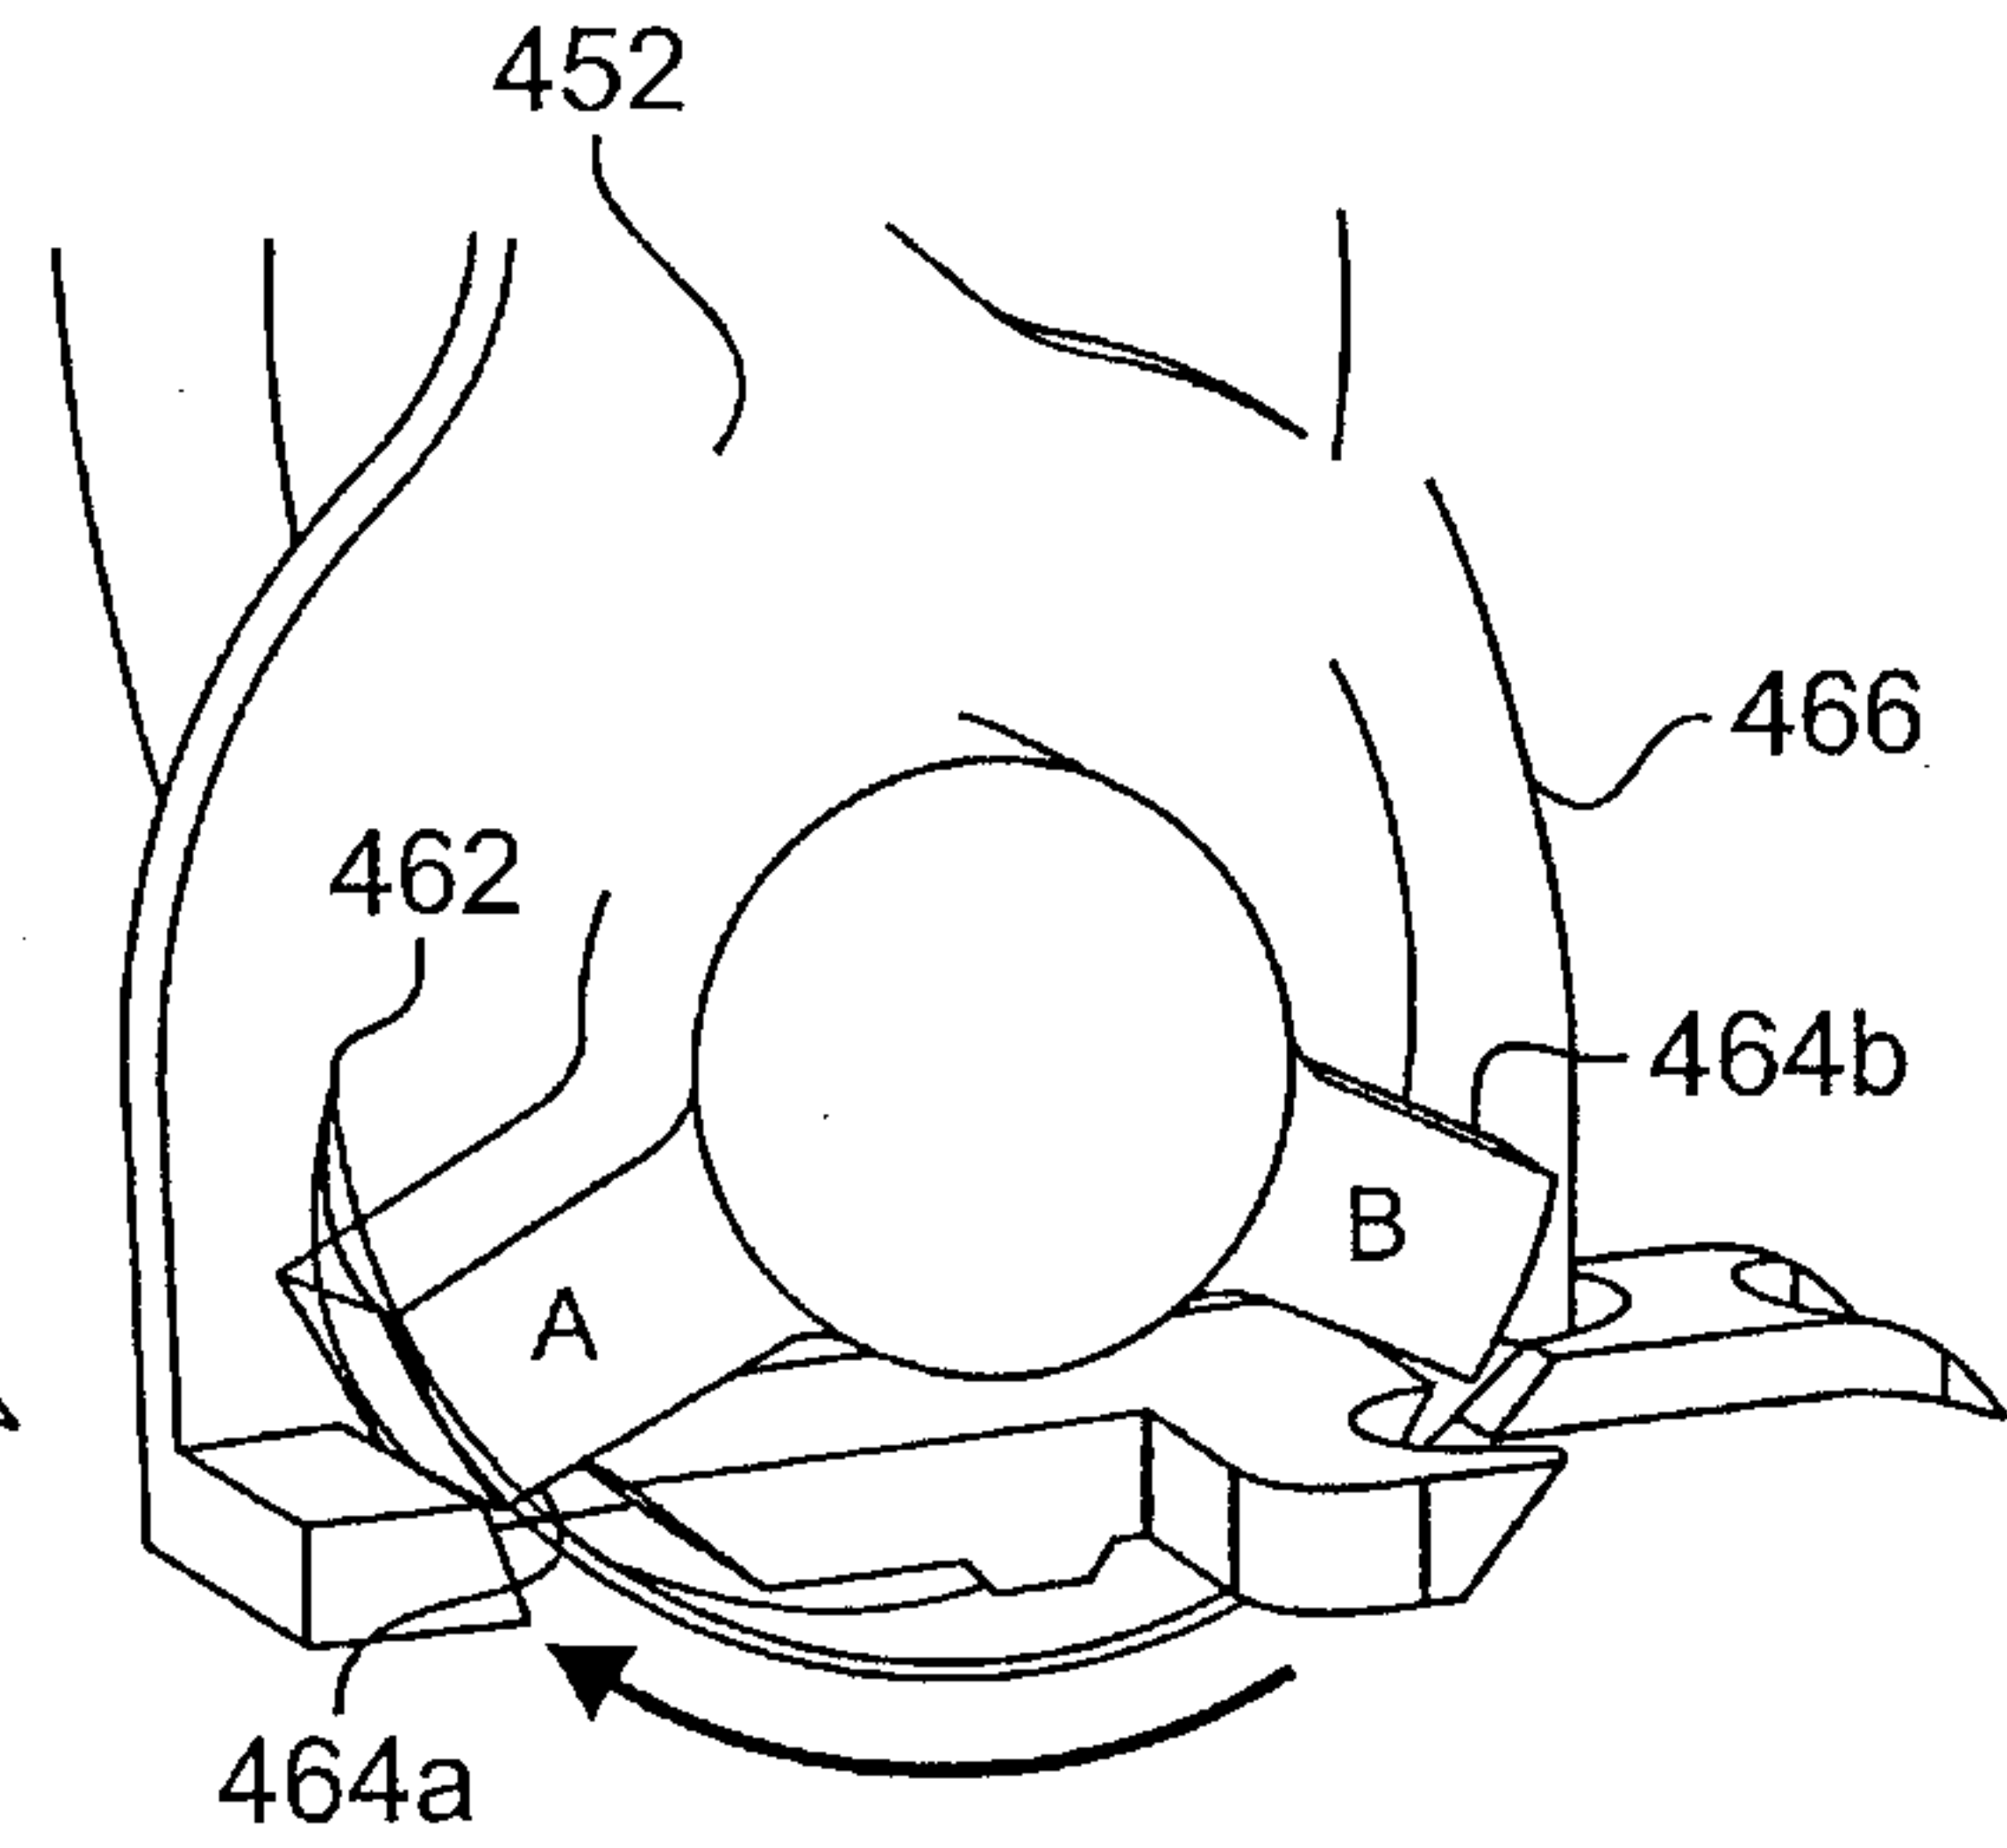
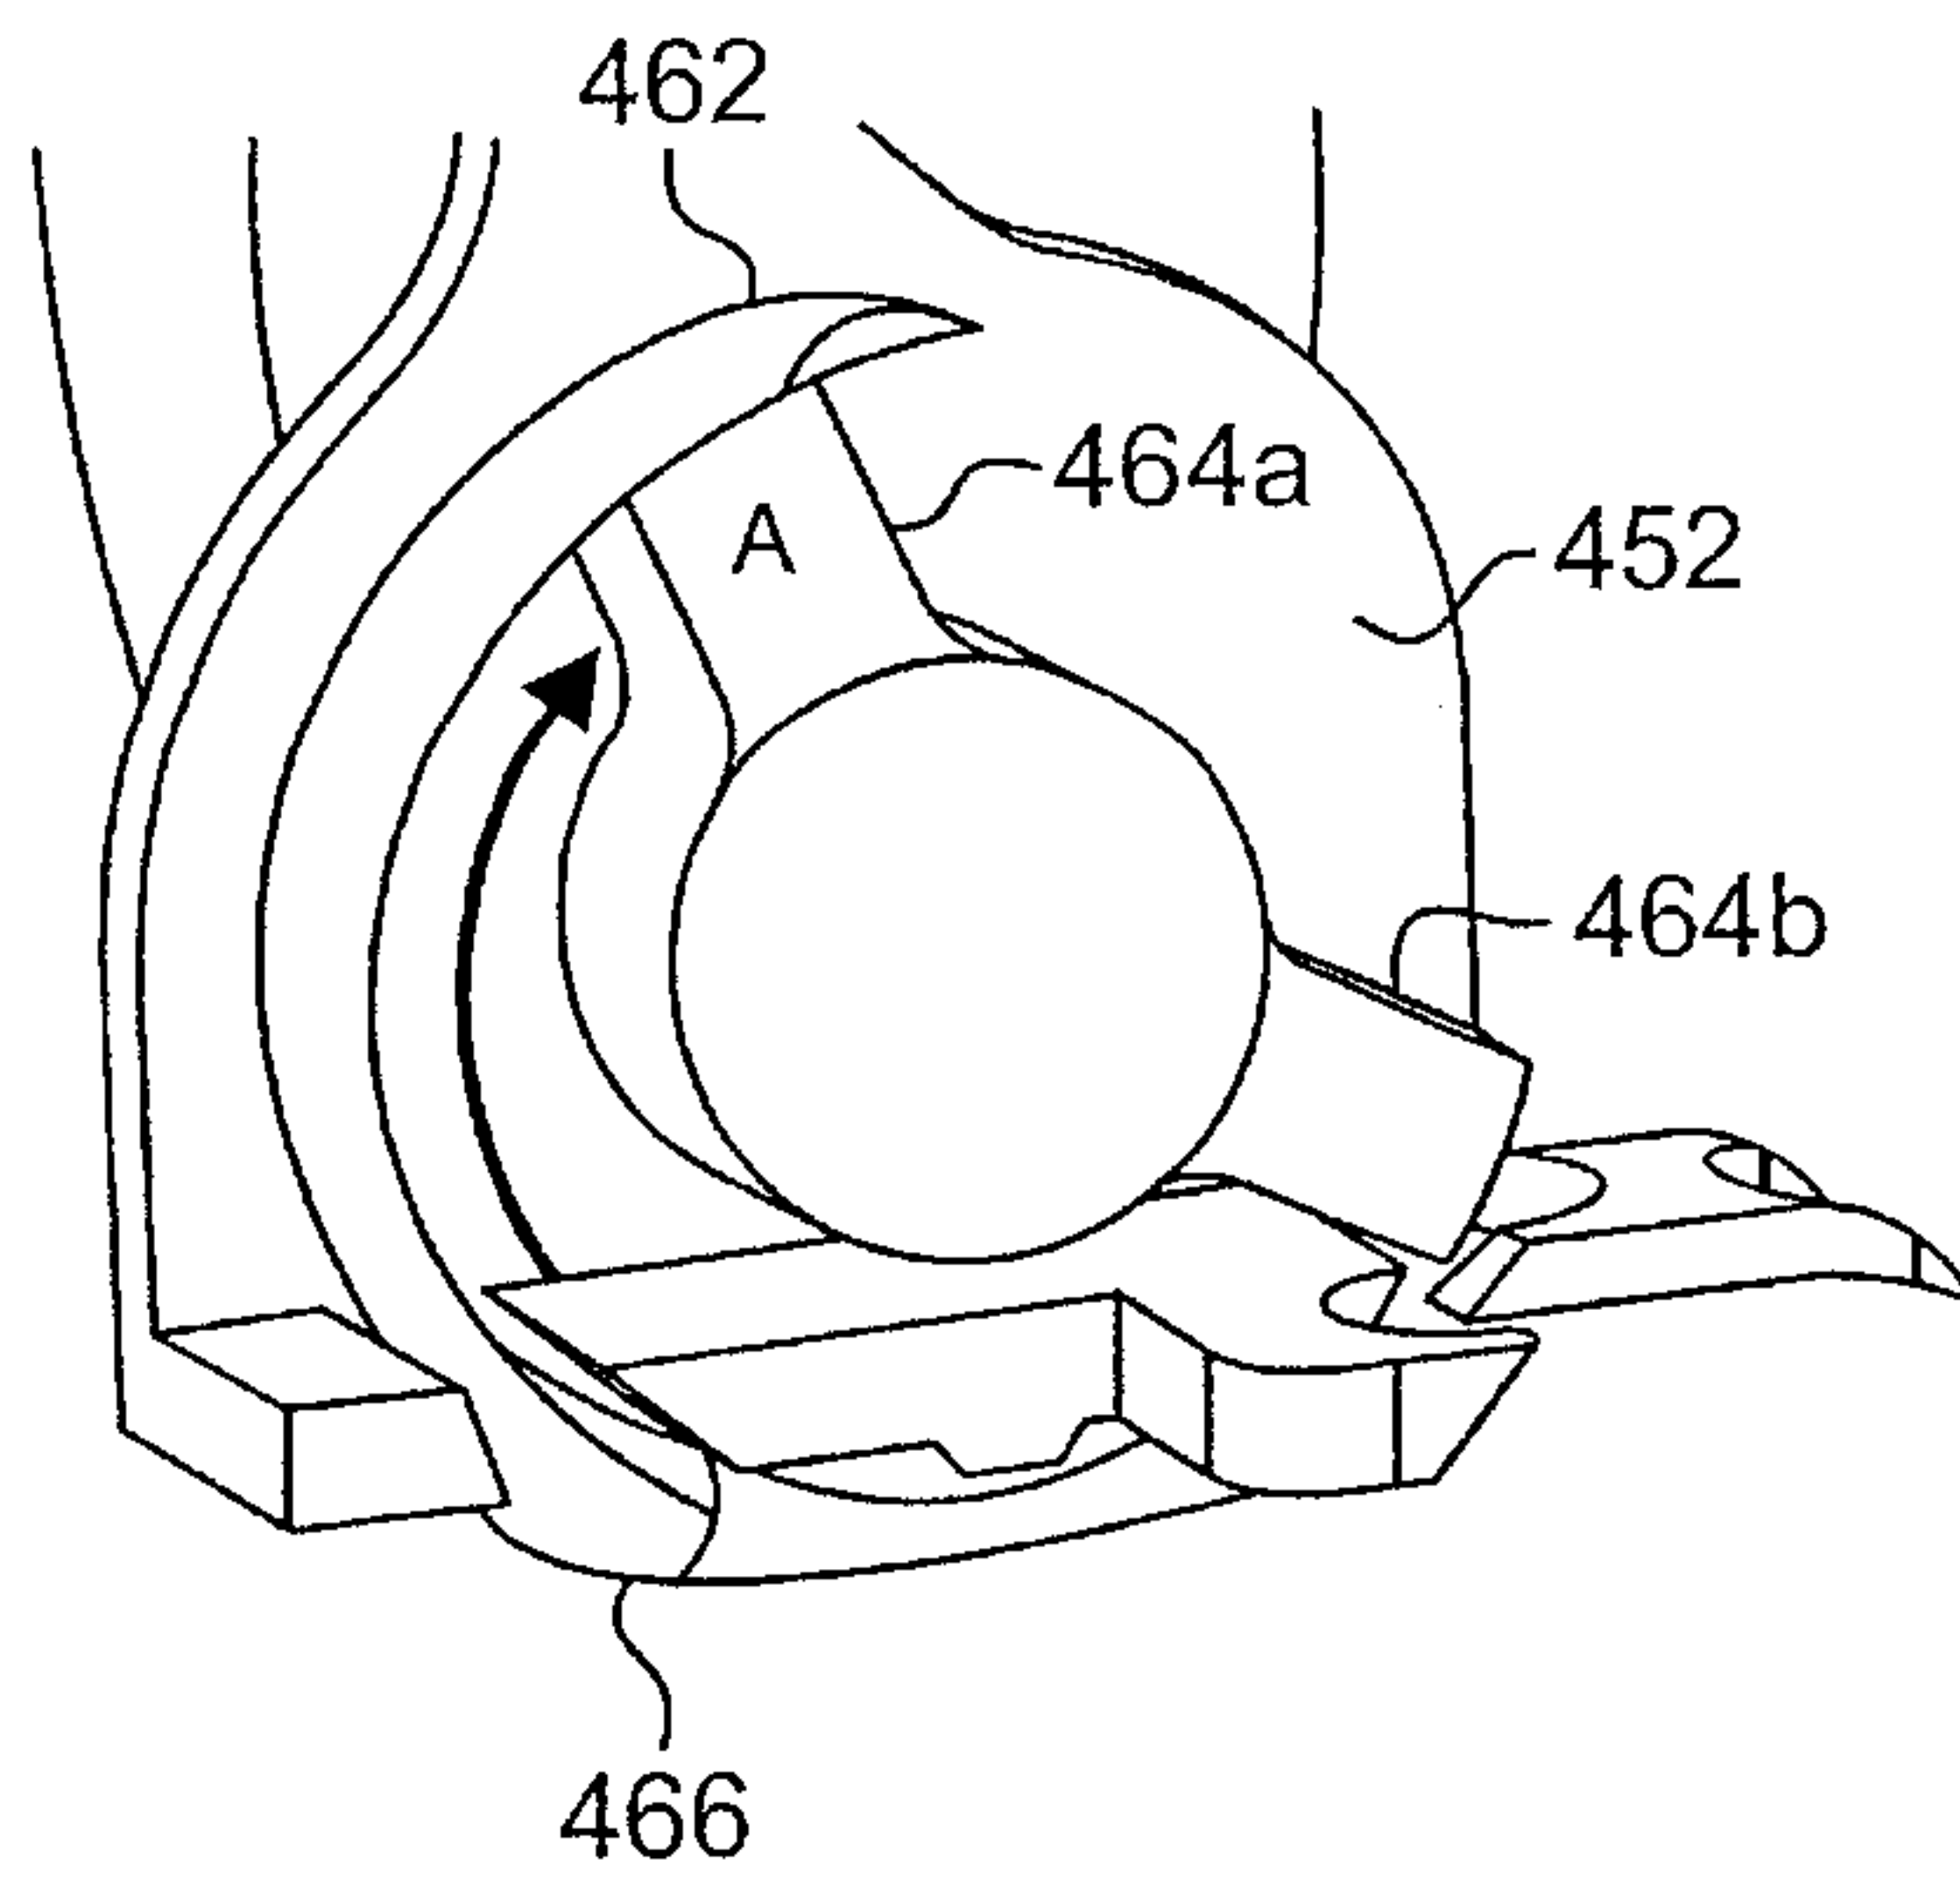
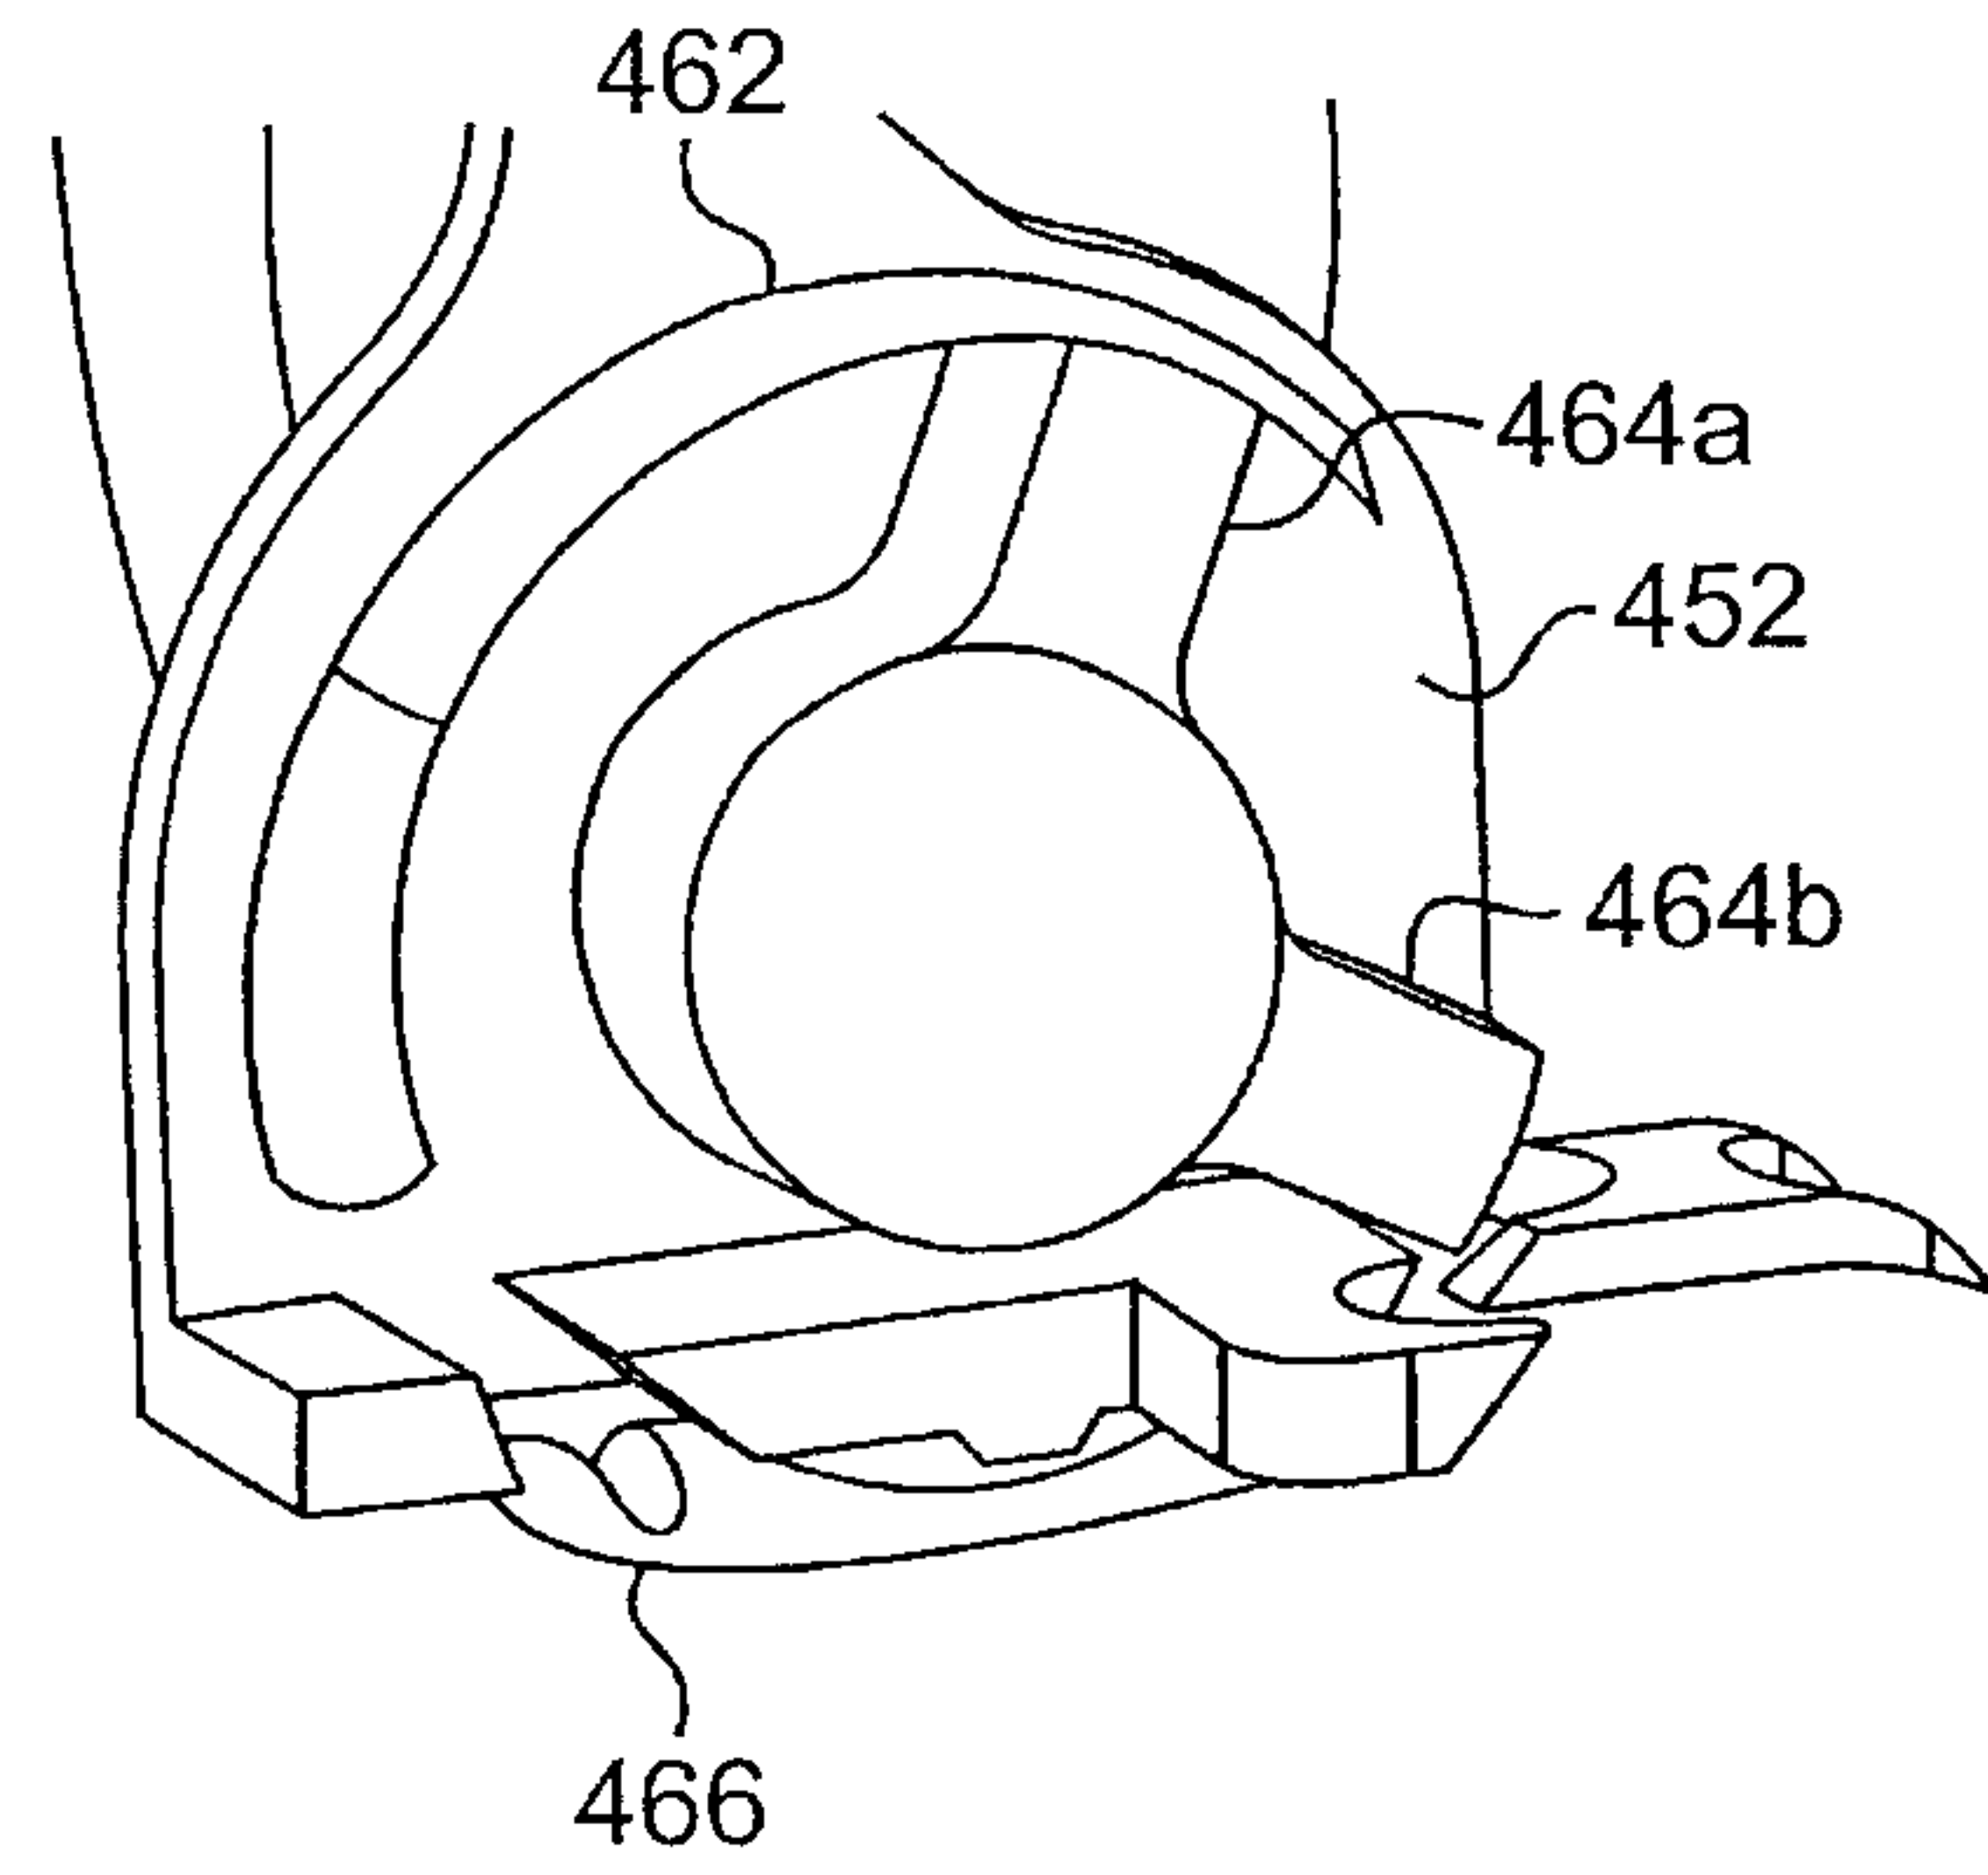


FIG. 4E

6/17

**FIG. 4F****FIG. 4G****FIG. 4H****FIG. 4I**

7/17

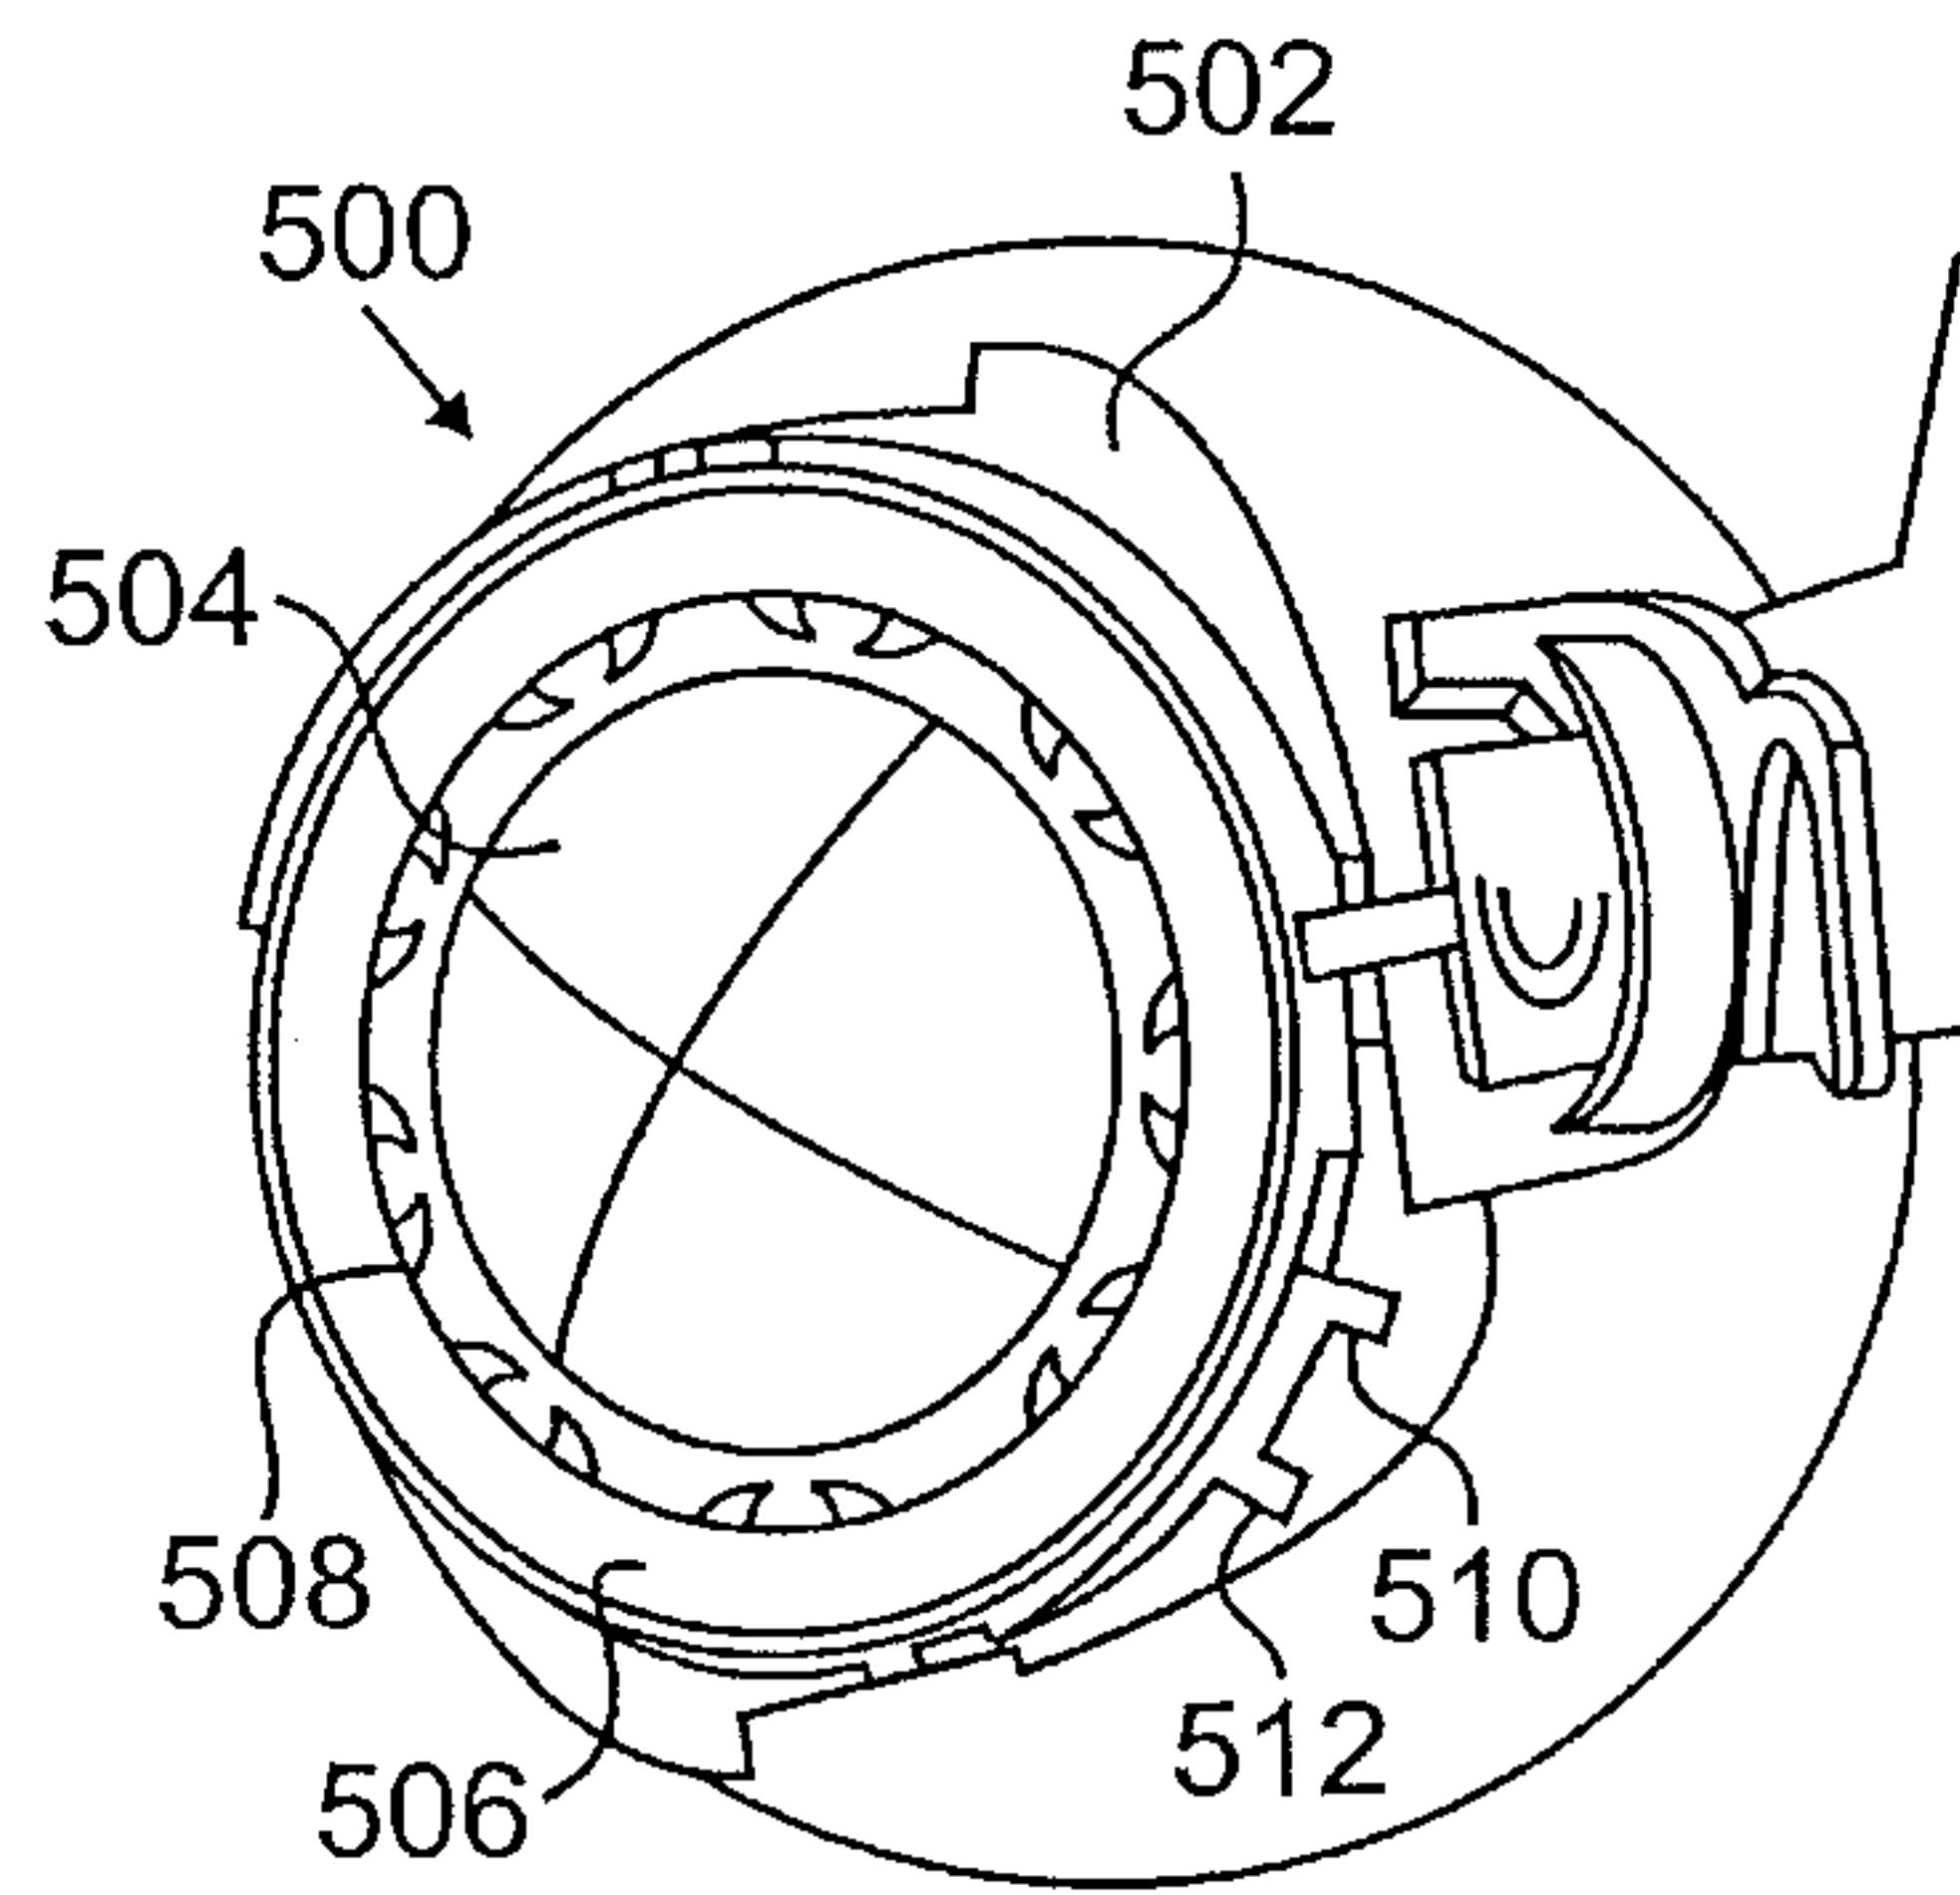


FIG. 5A

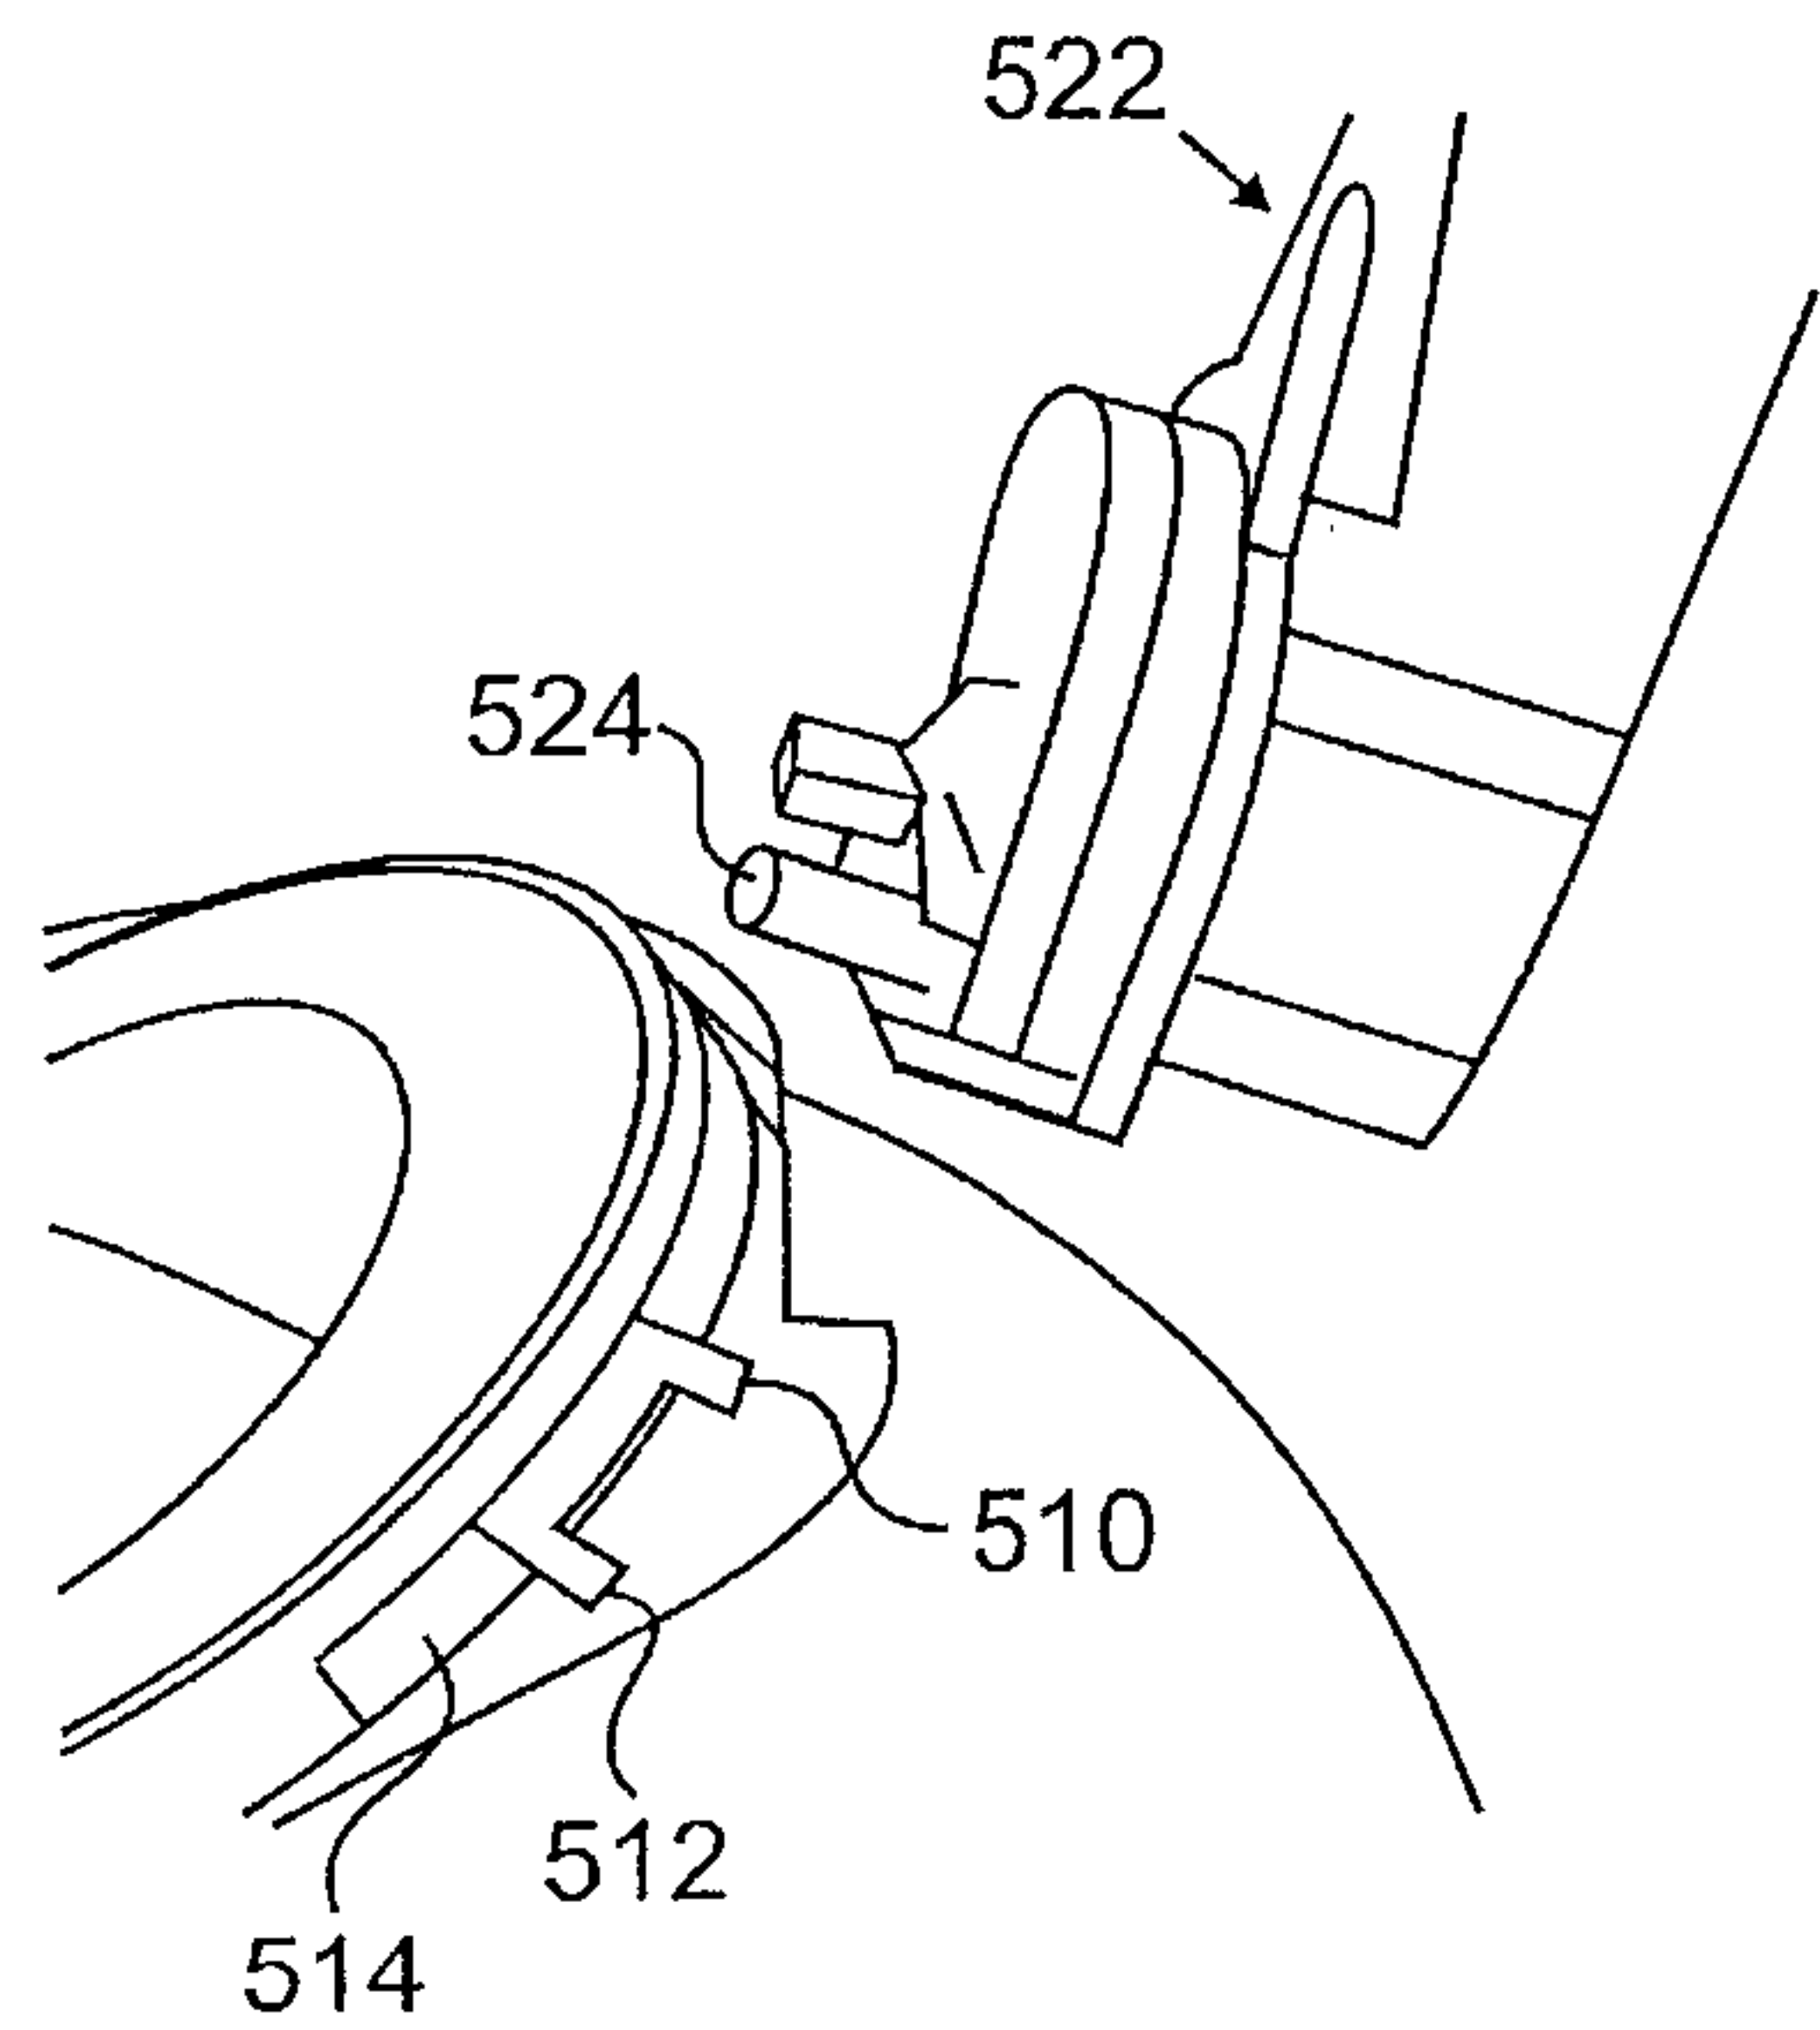


FIG. 5B





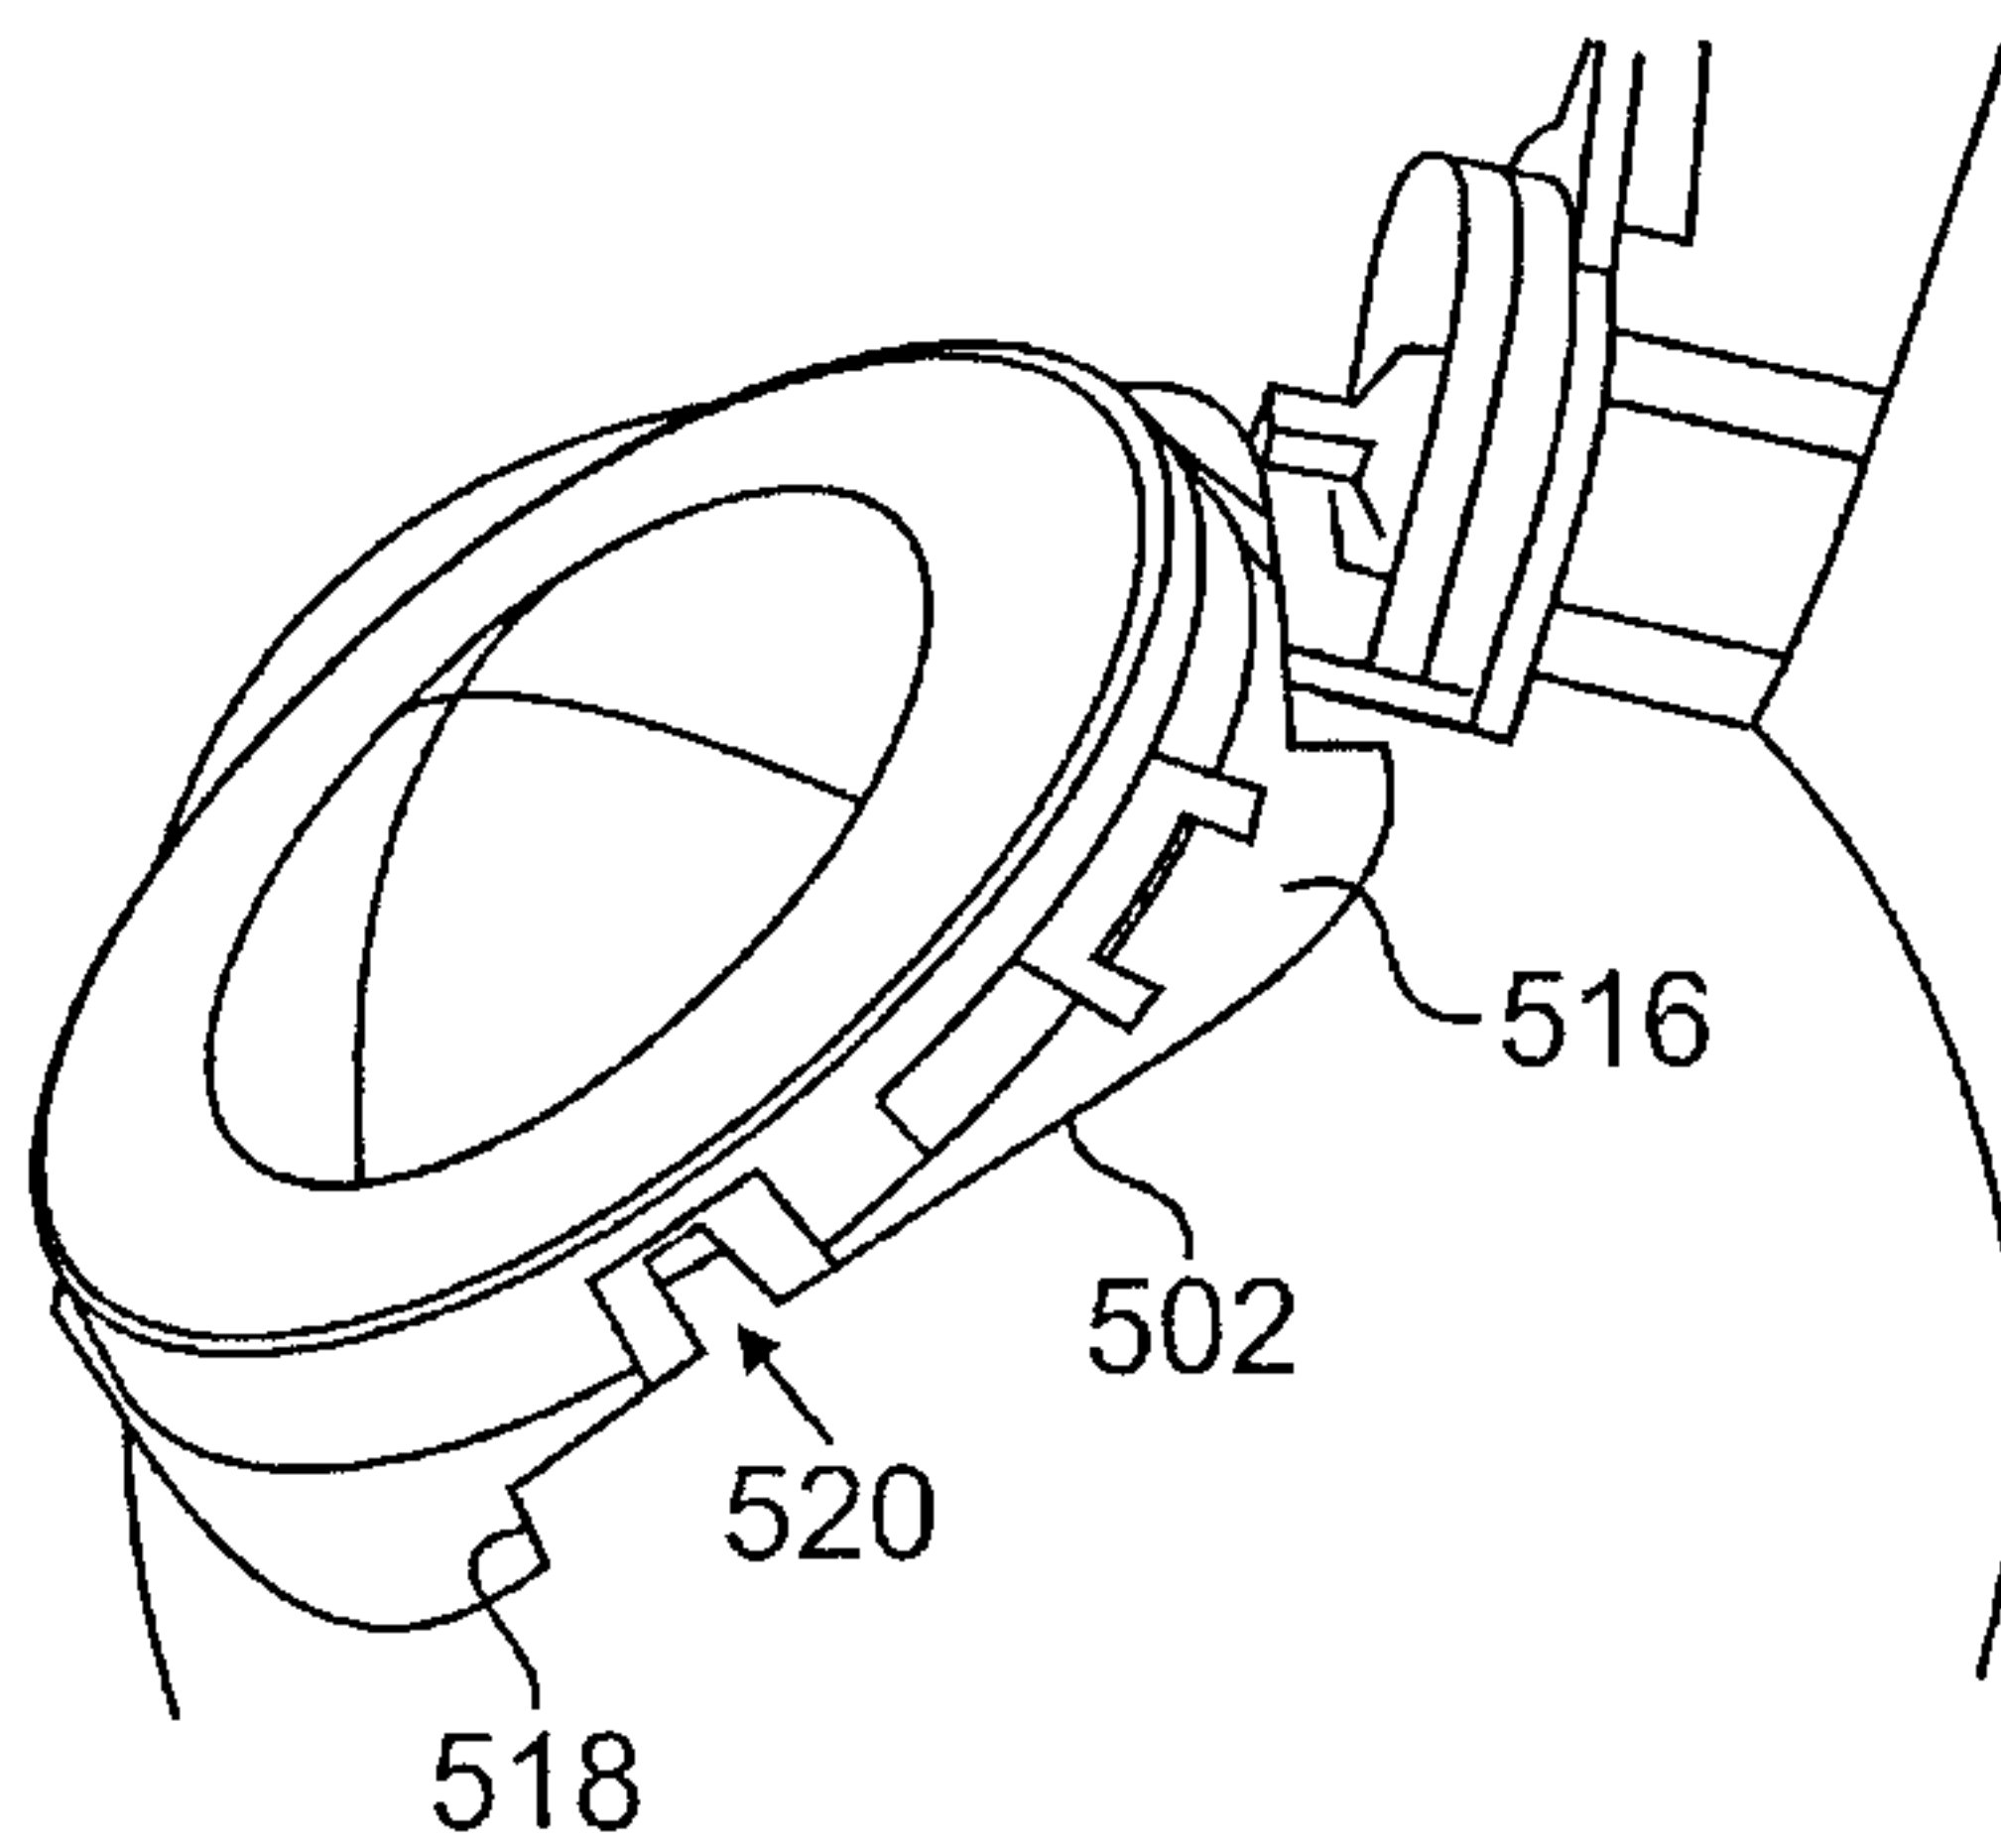


FIG. 5C





8/17

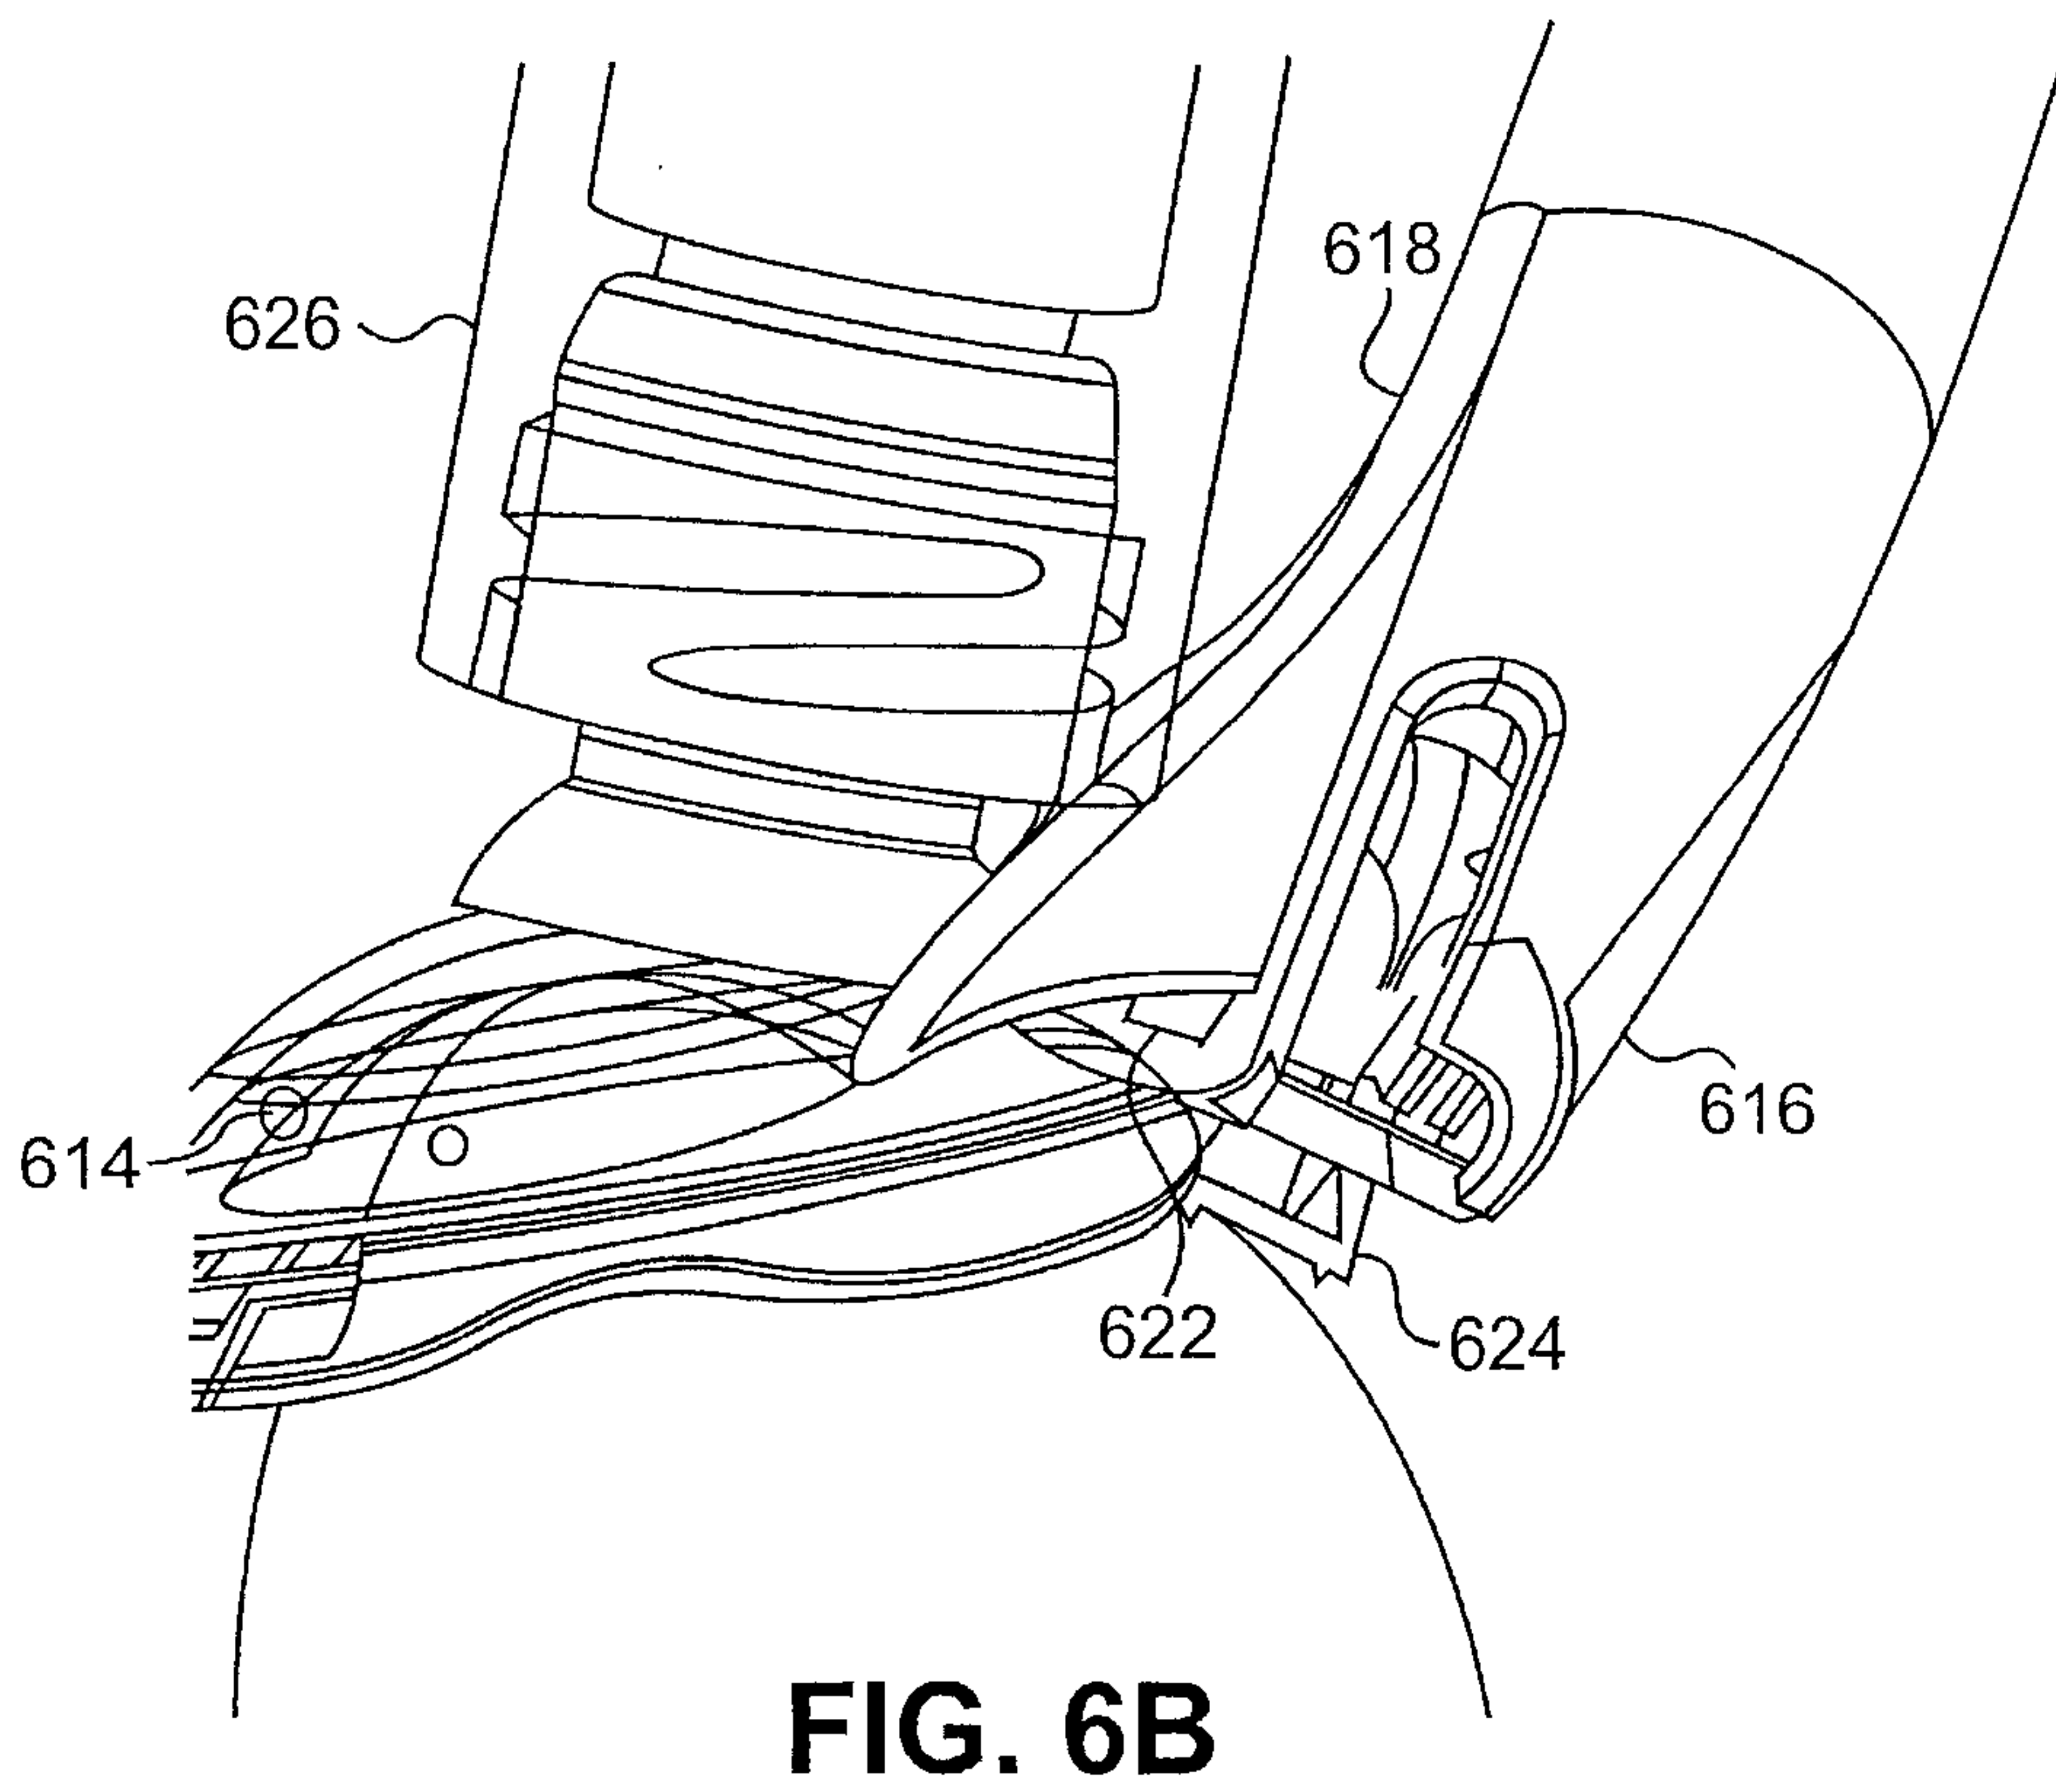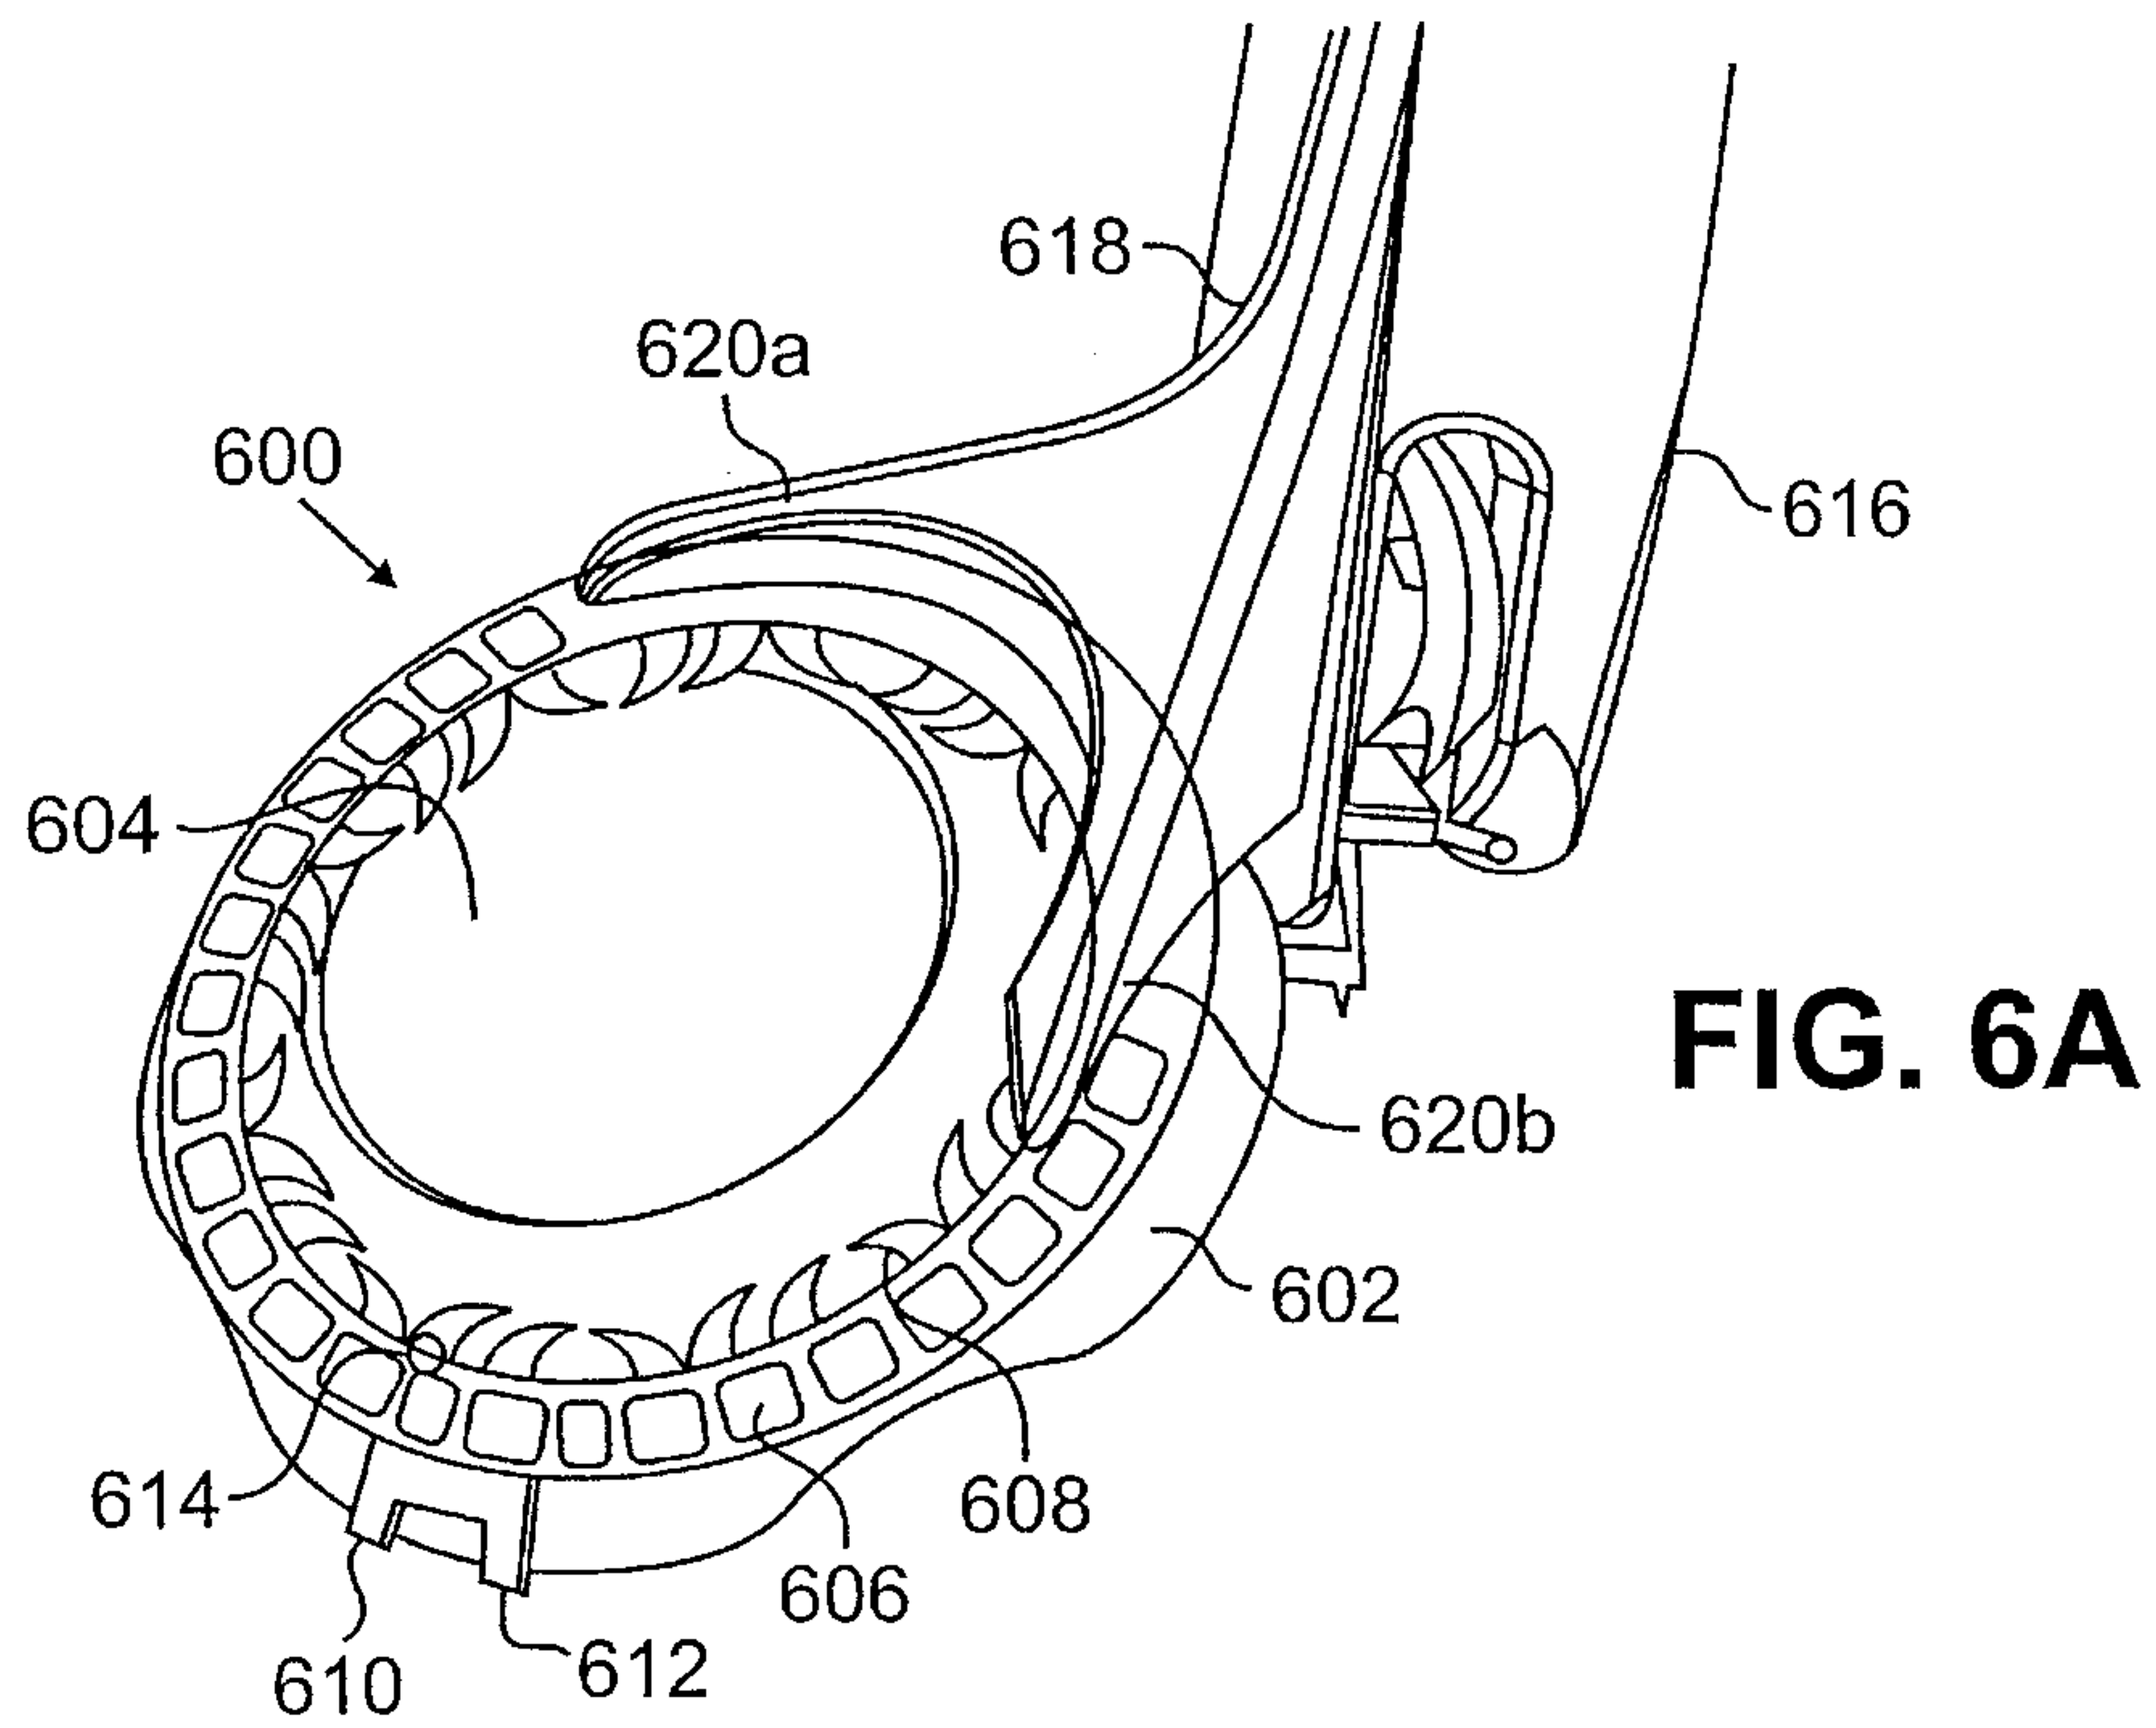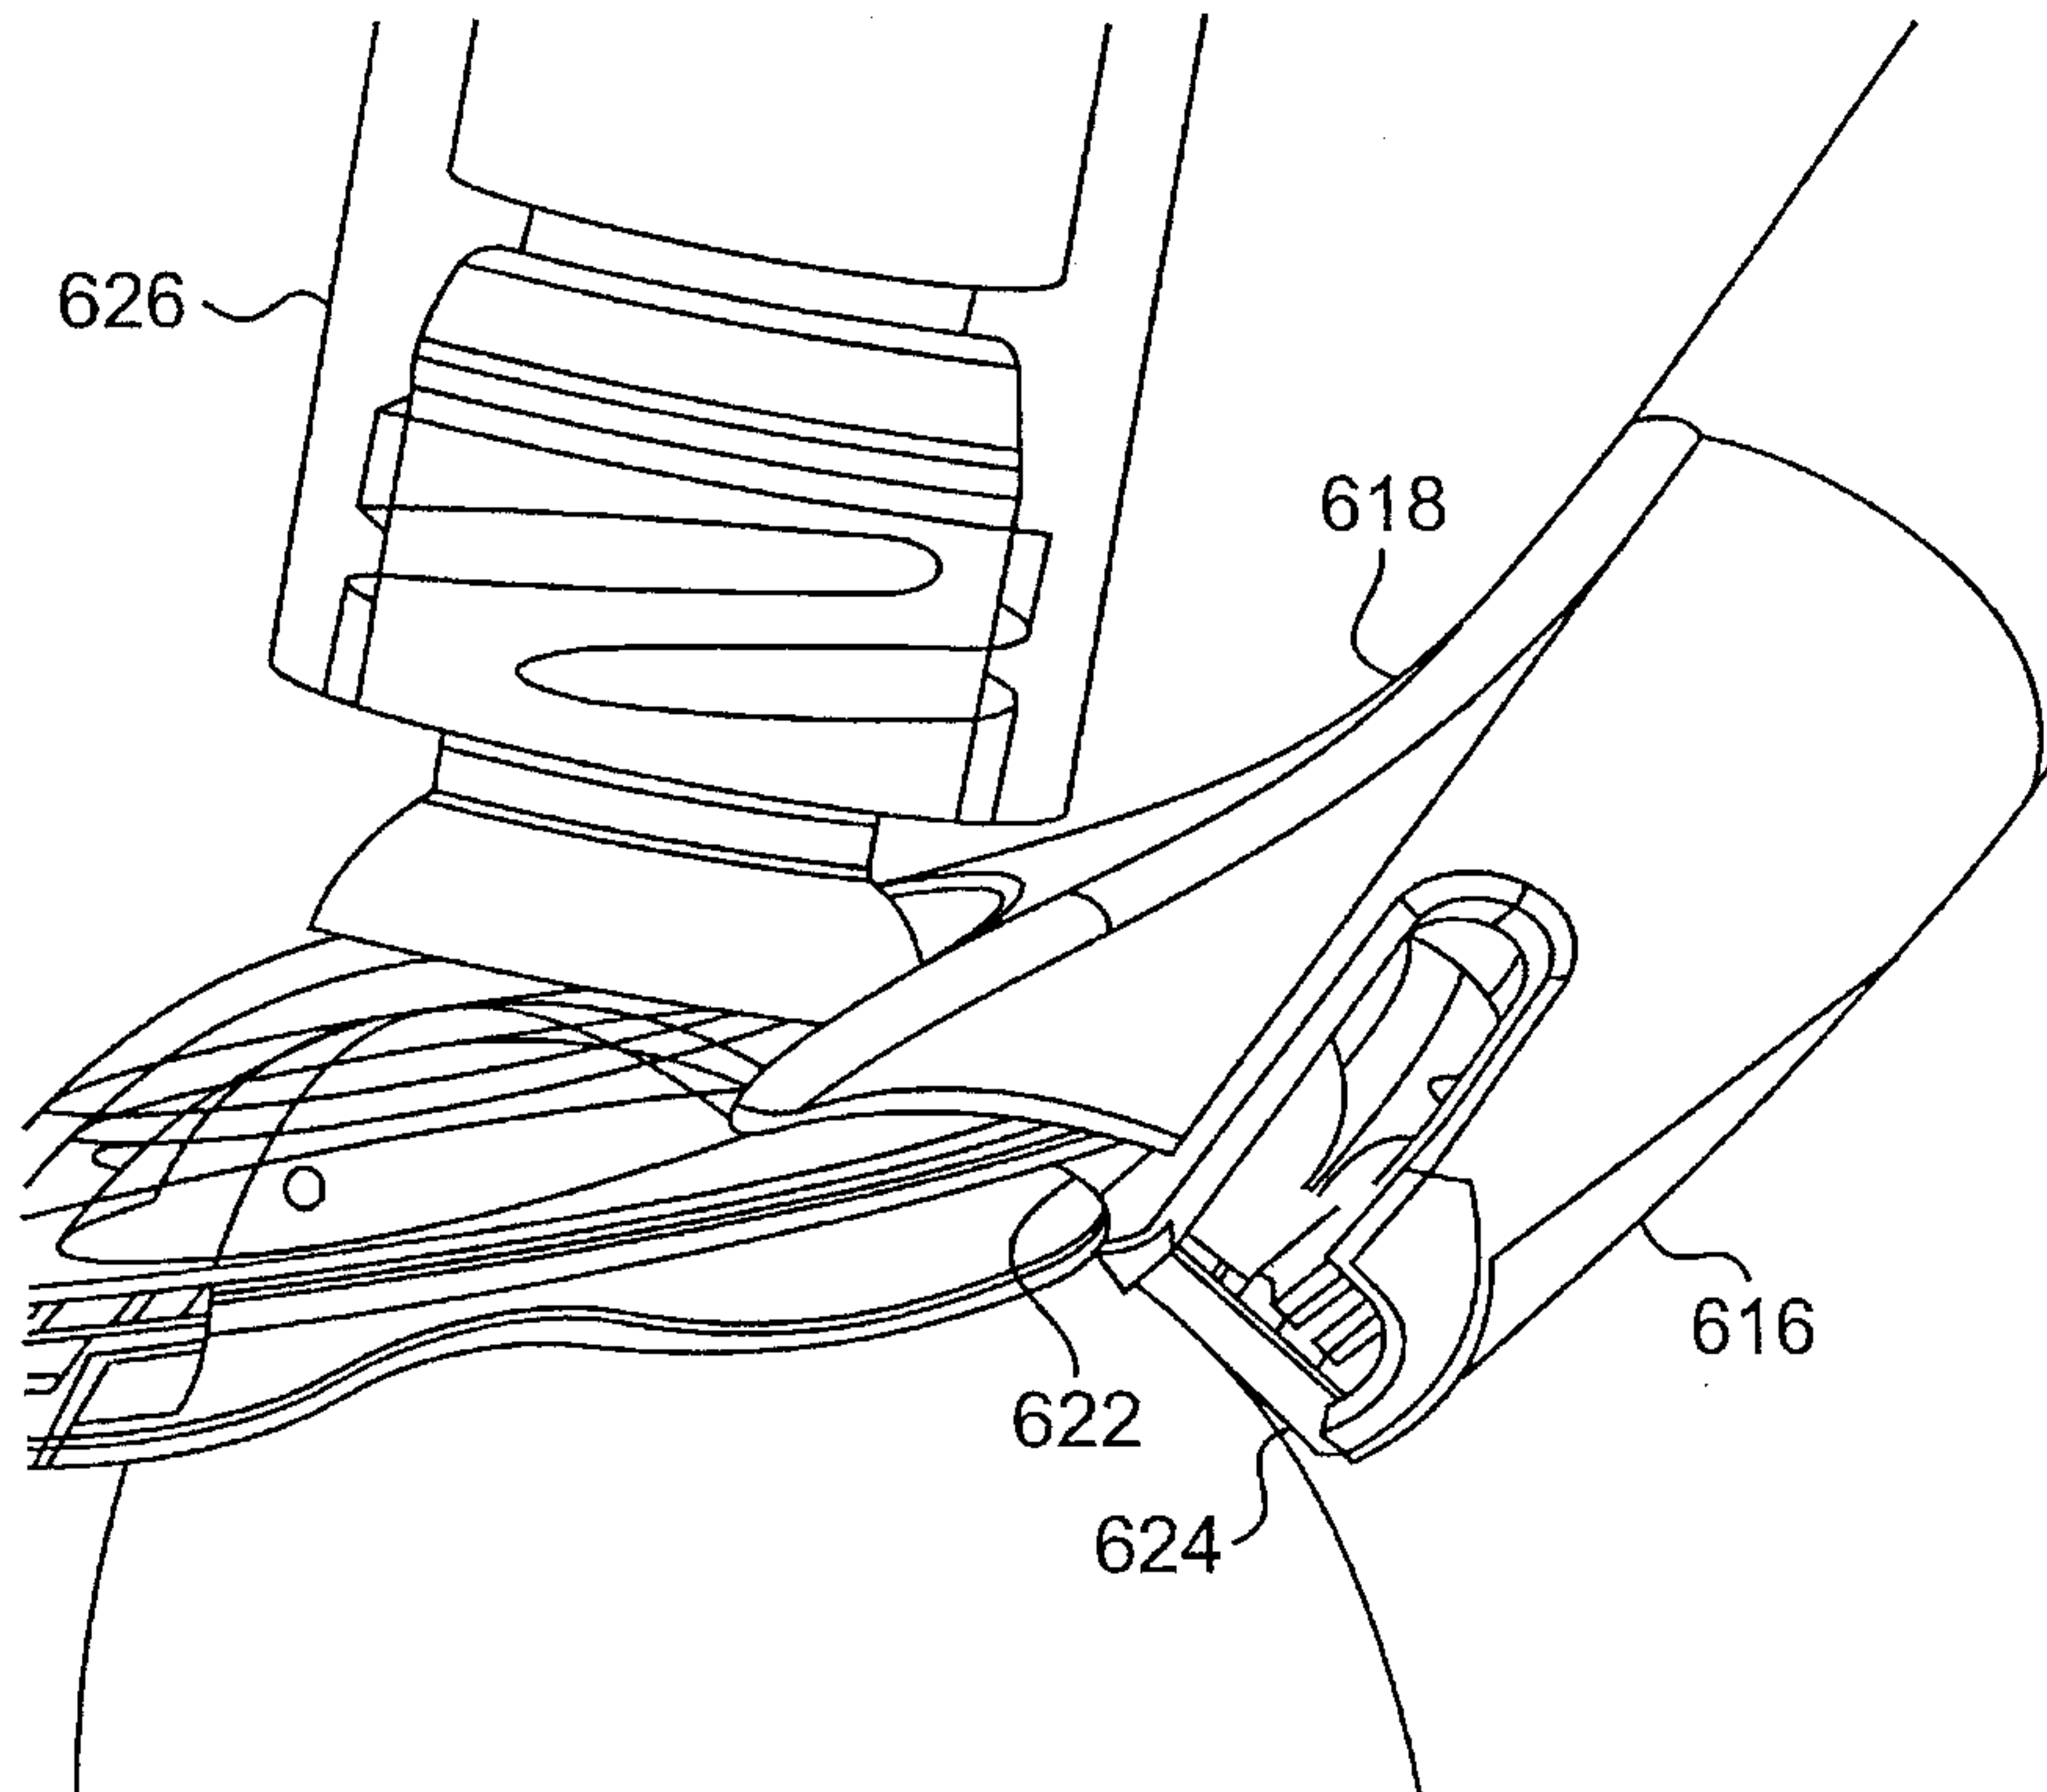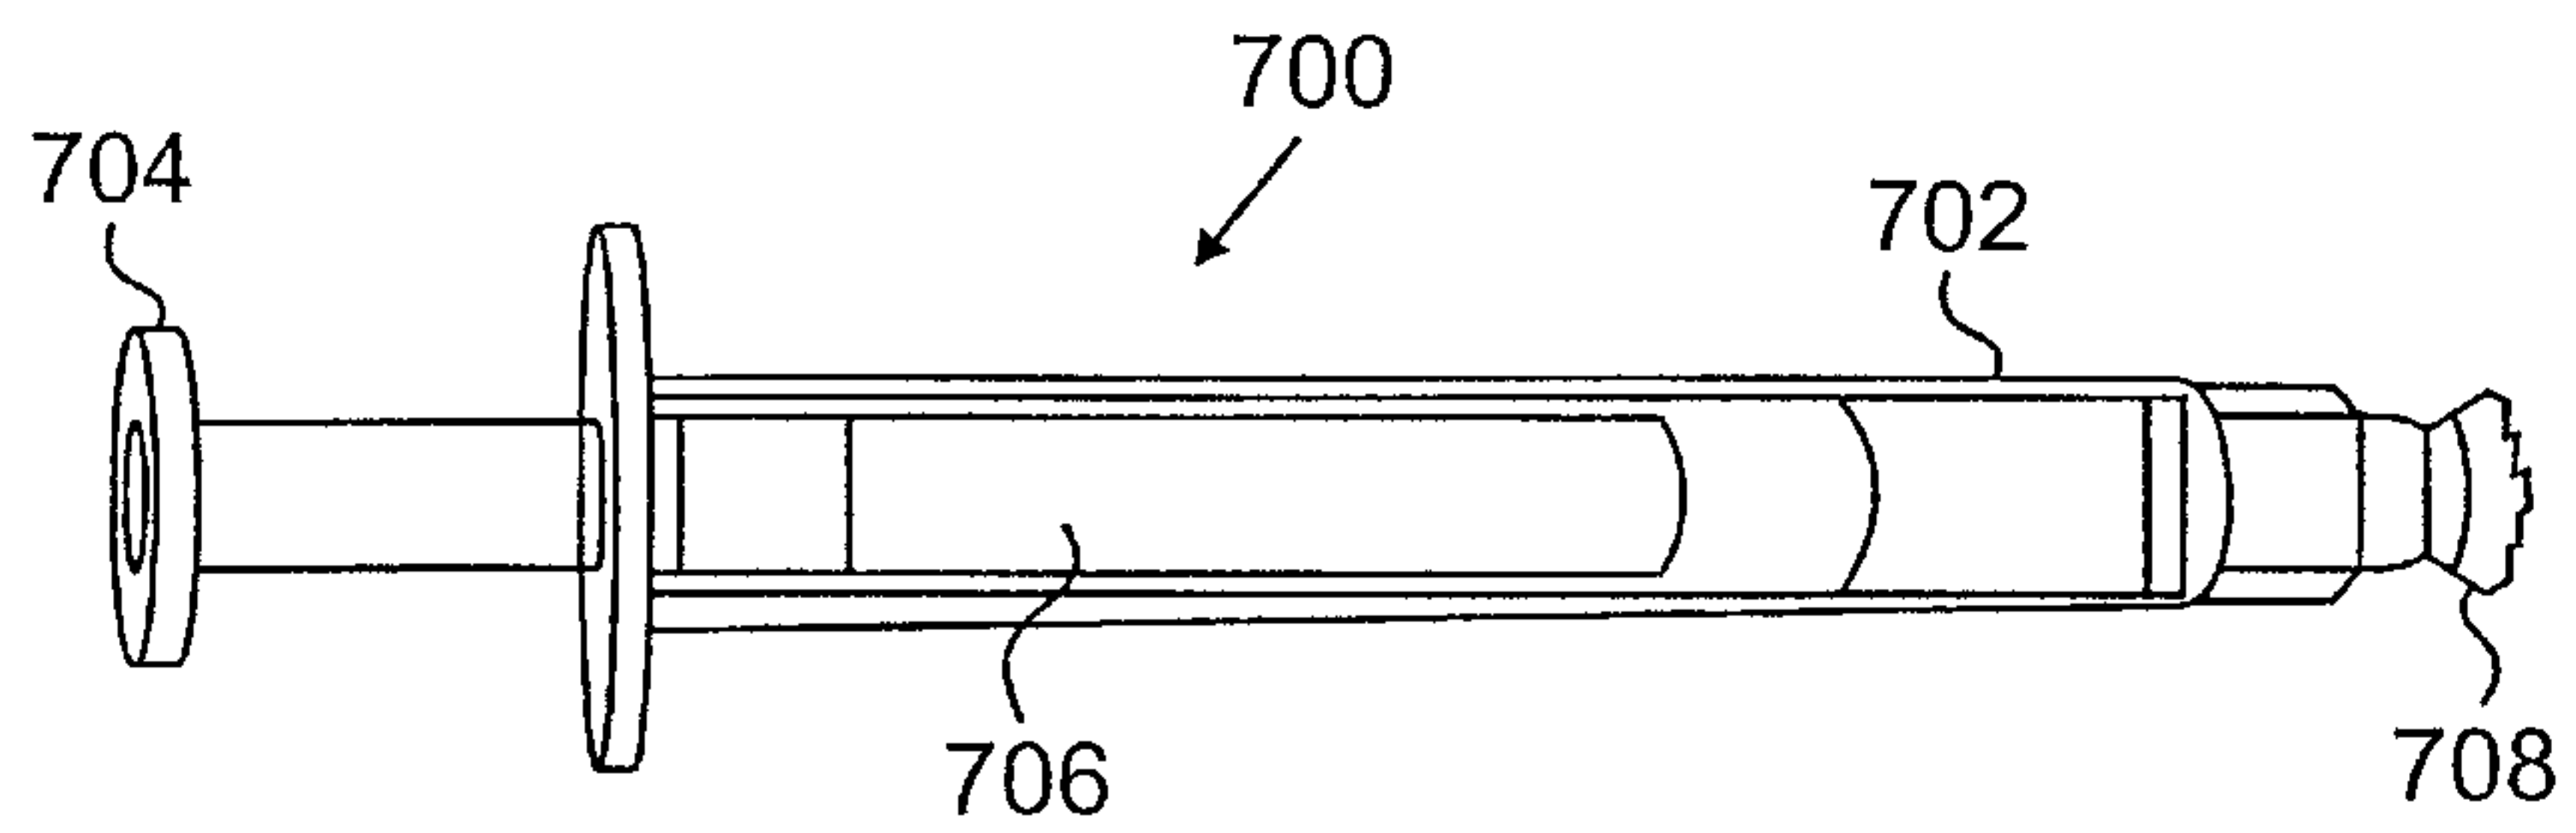

9/17

**FIG. 6C****FIG. 7**

10/17

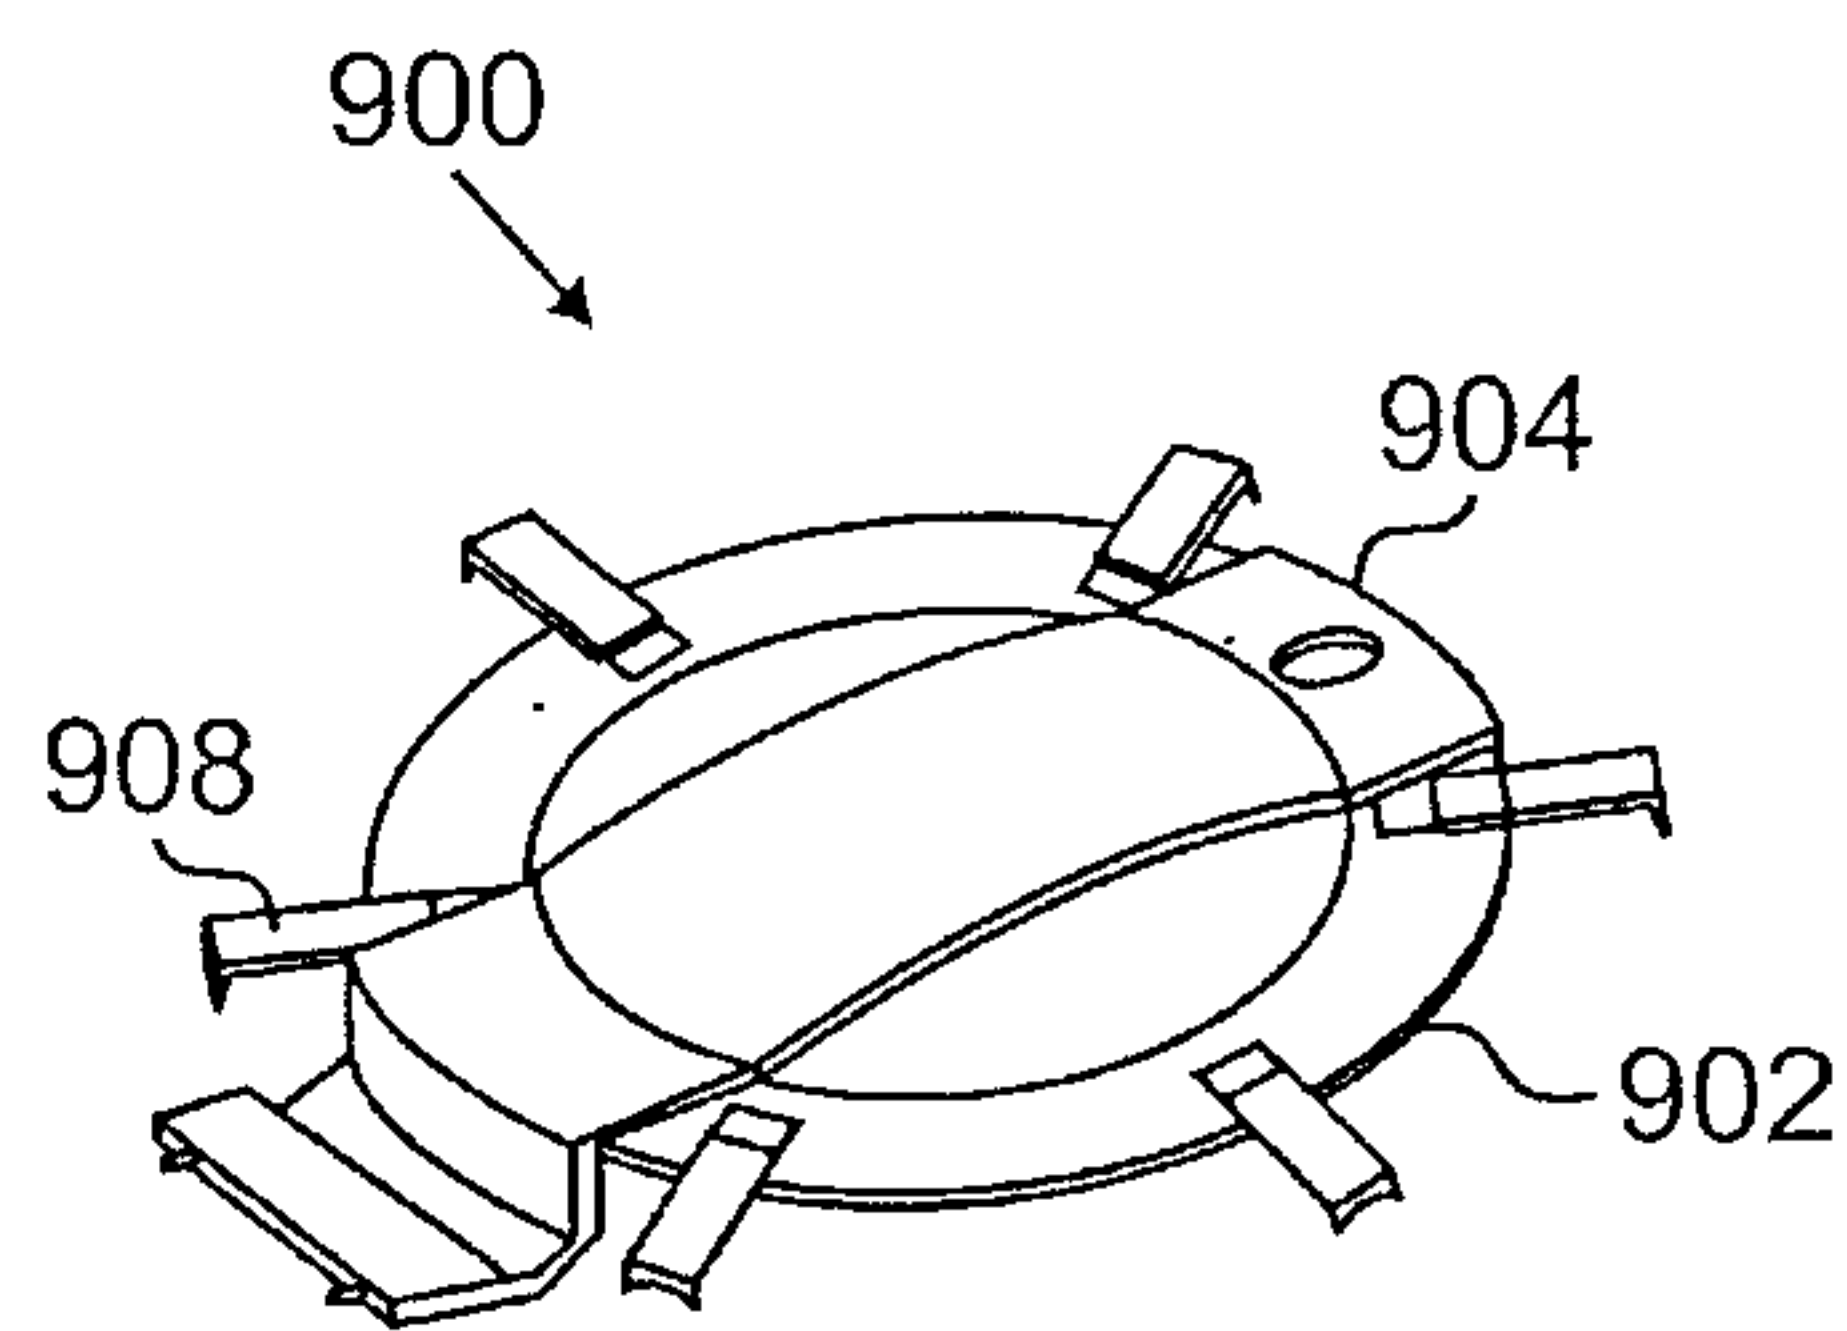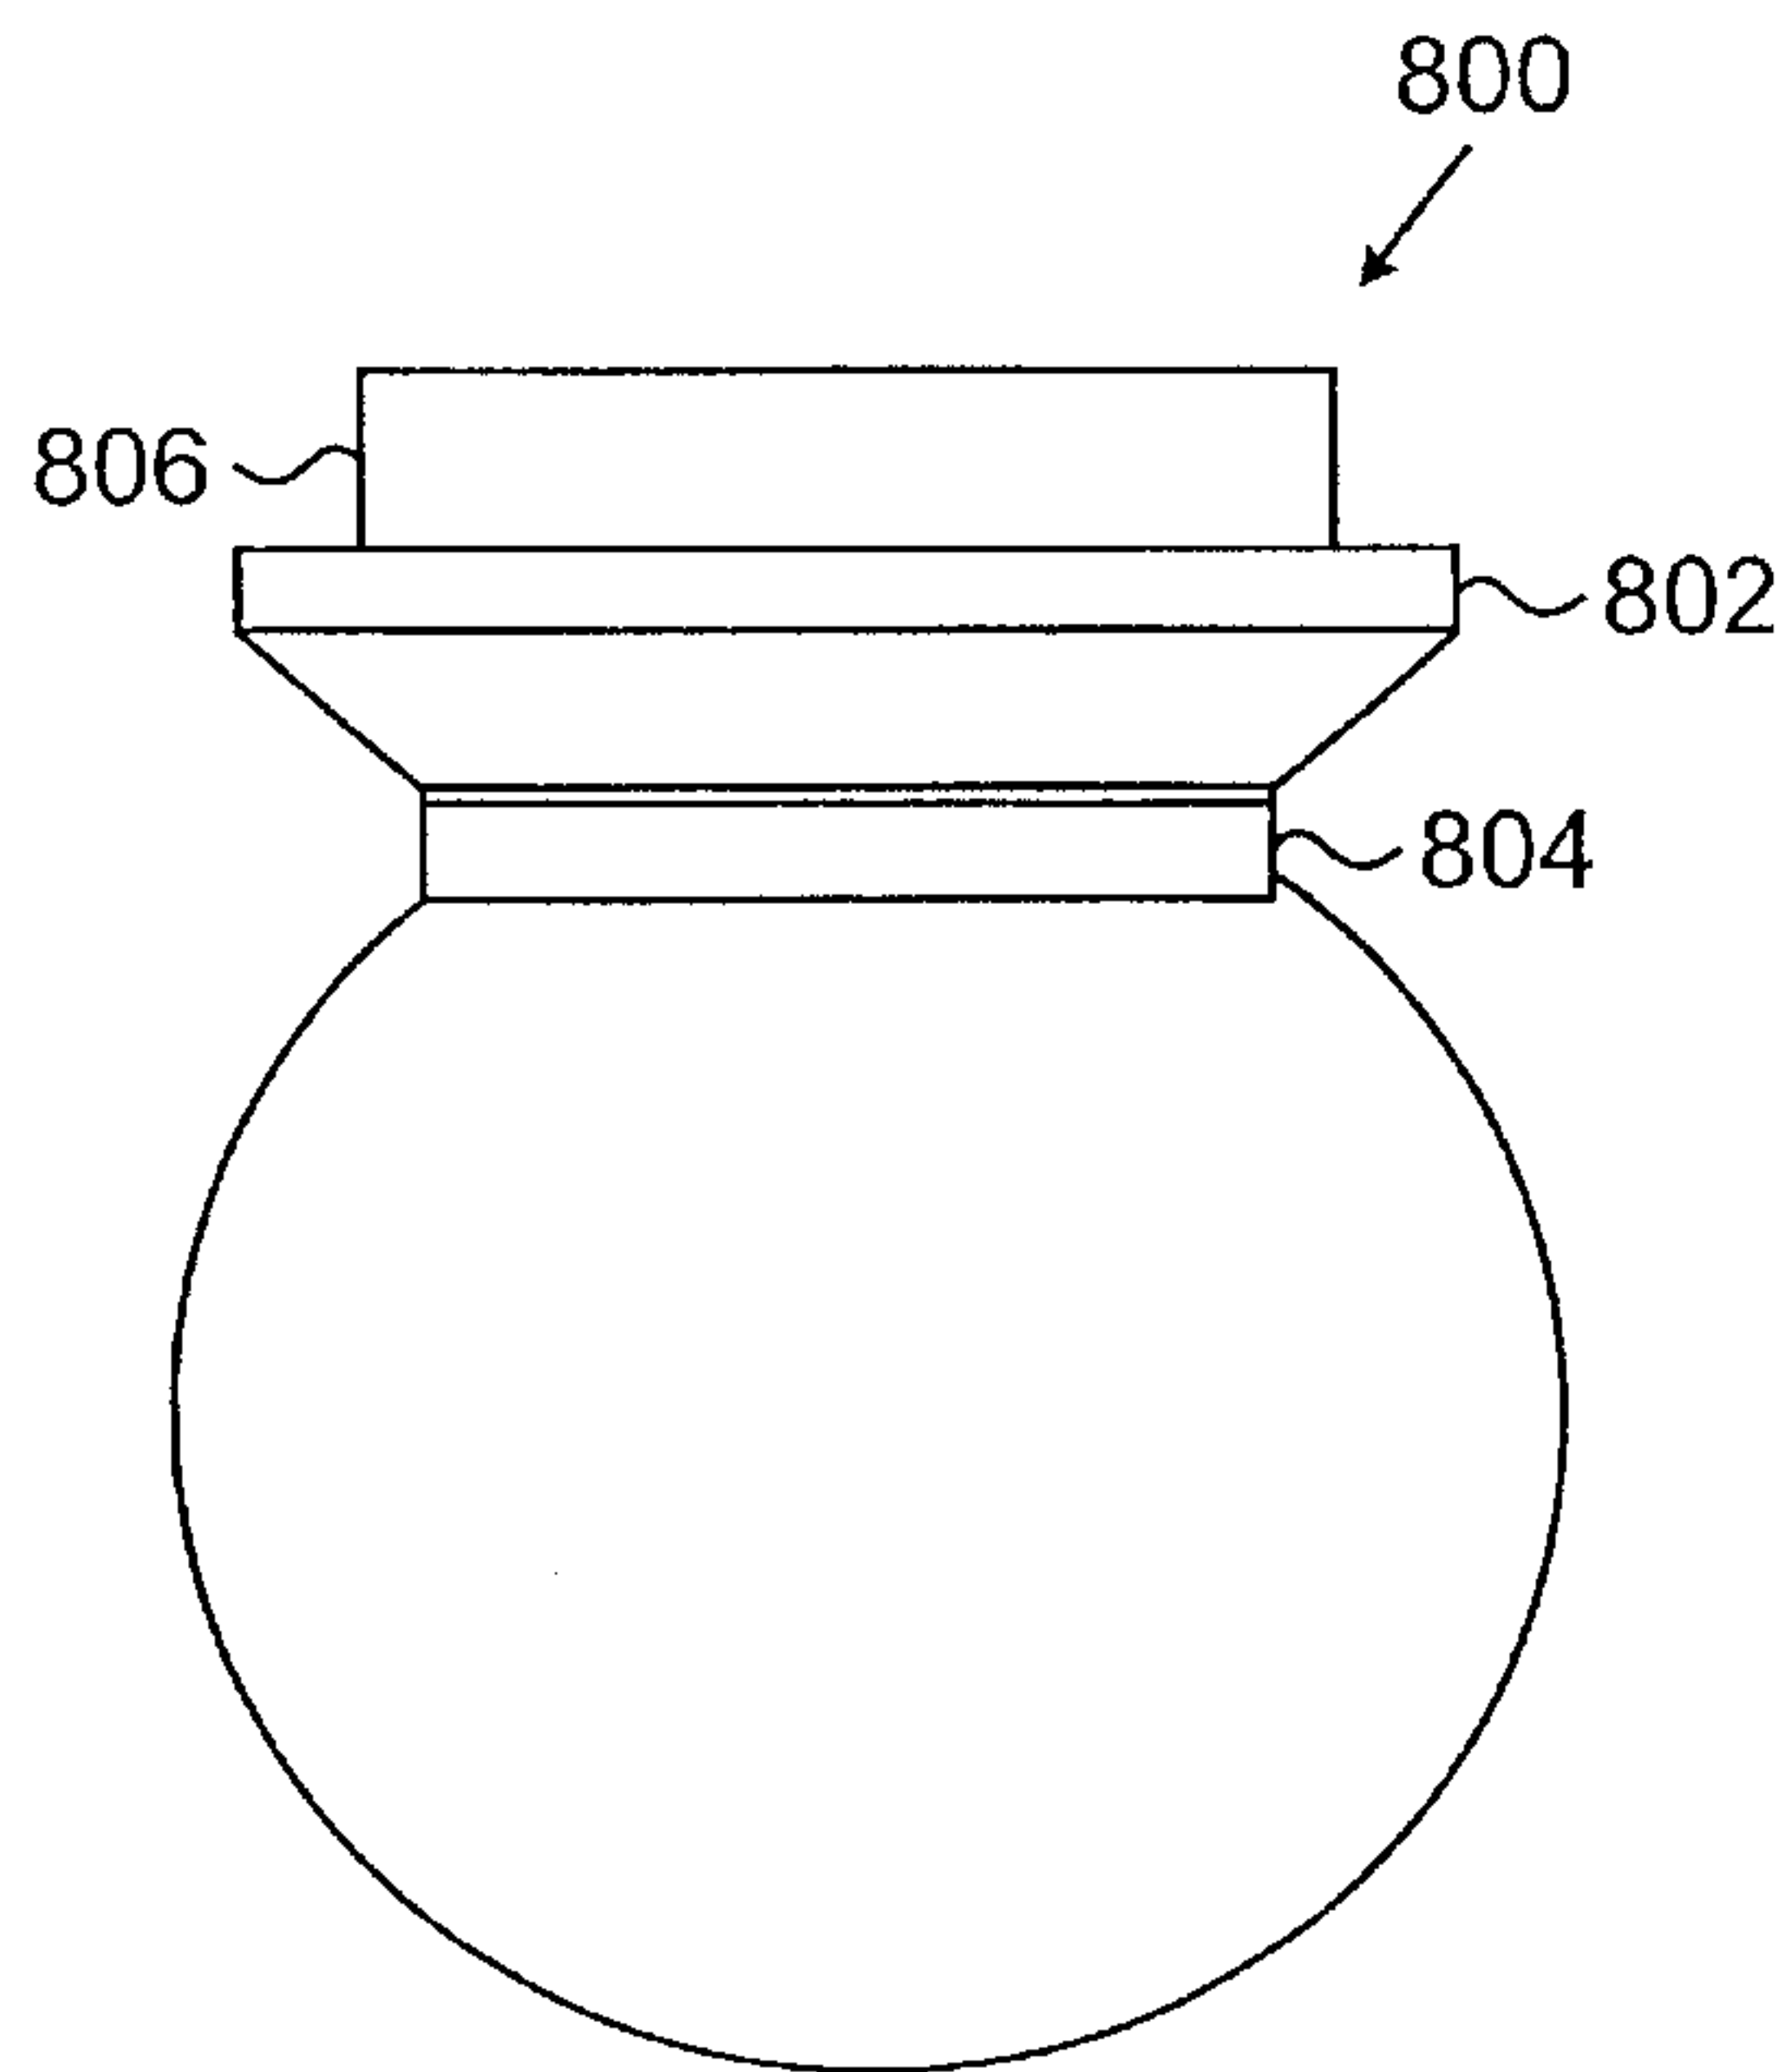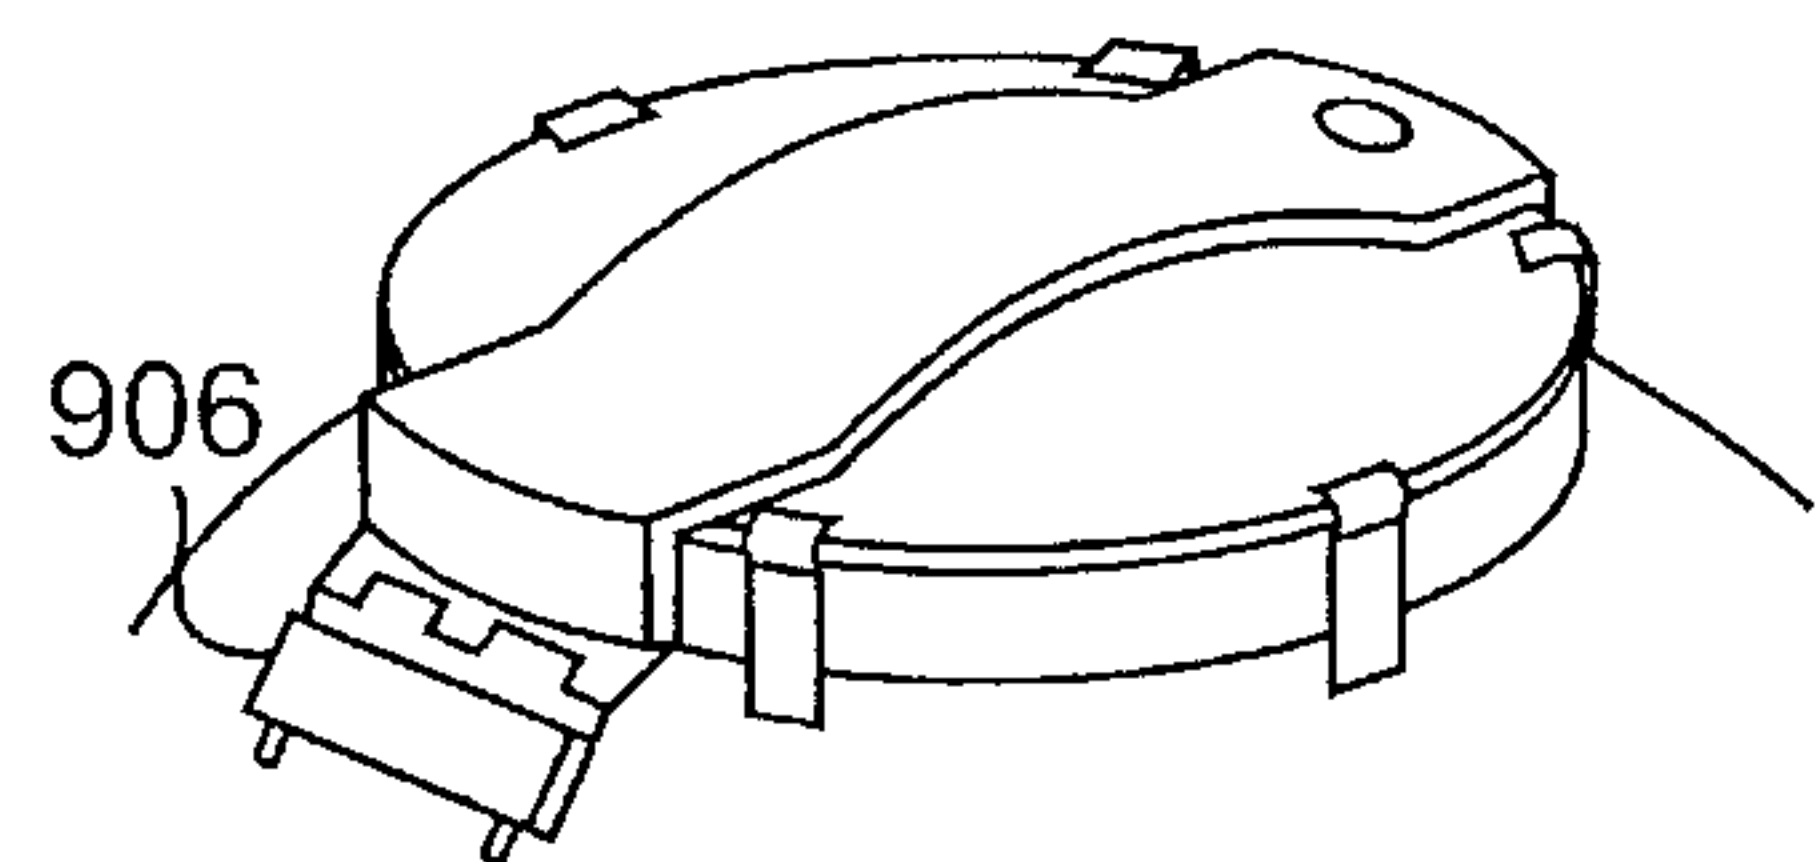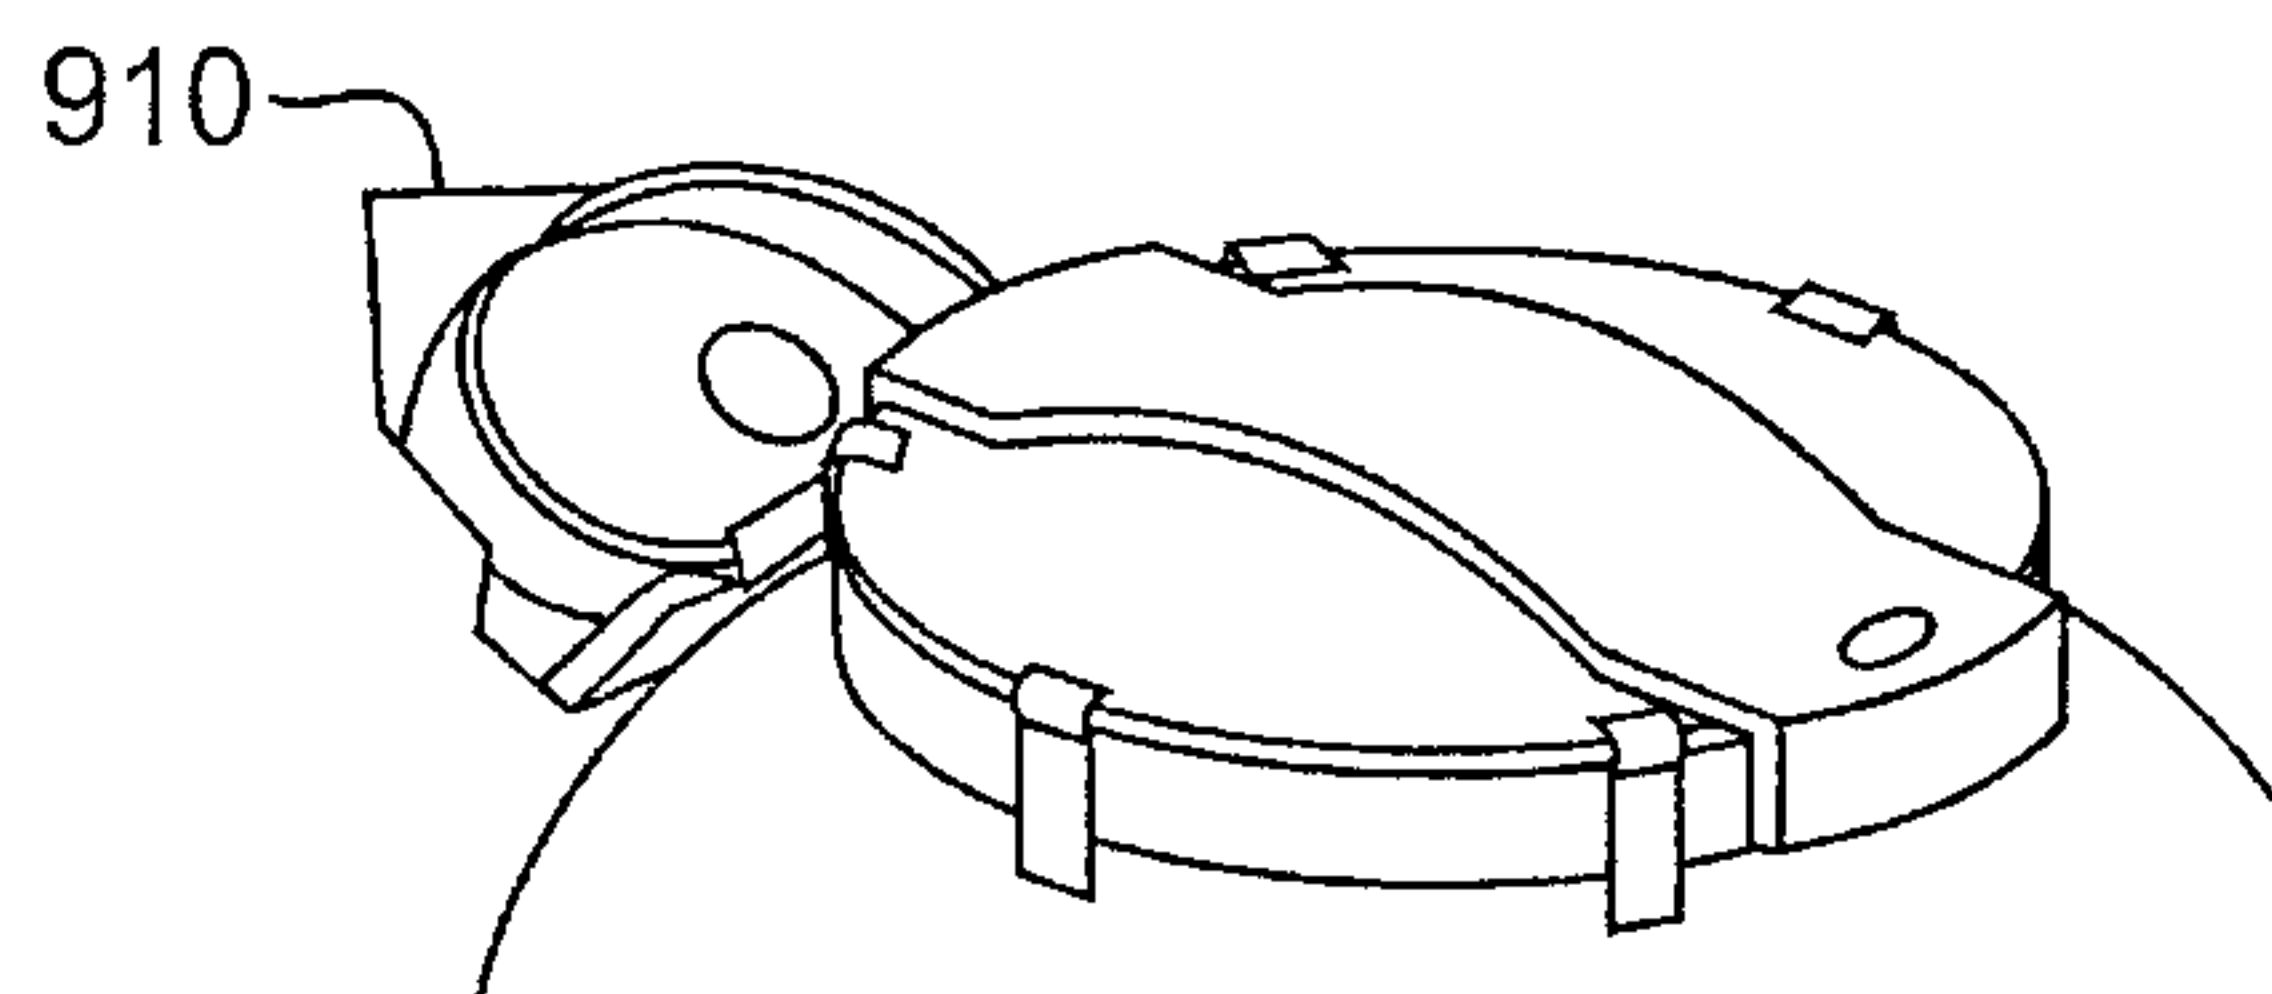FIG. 8**FIG. 9A****FIG. 9B****FIG. 9C**

11/17

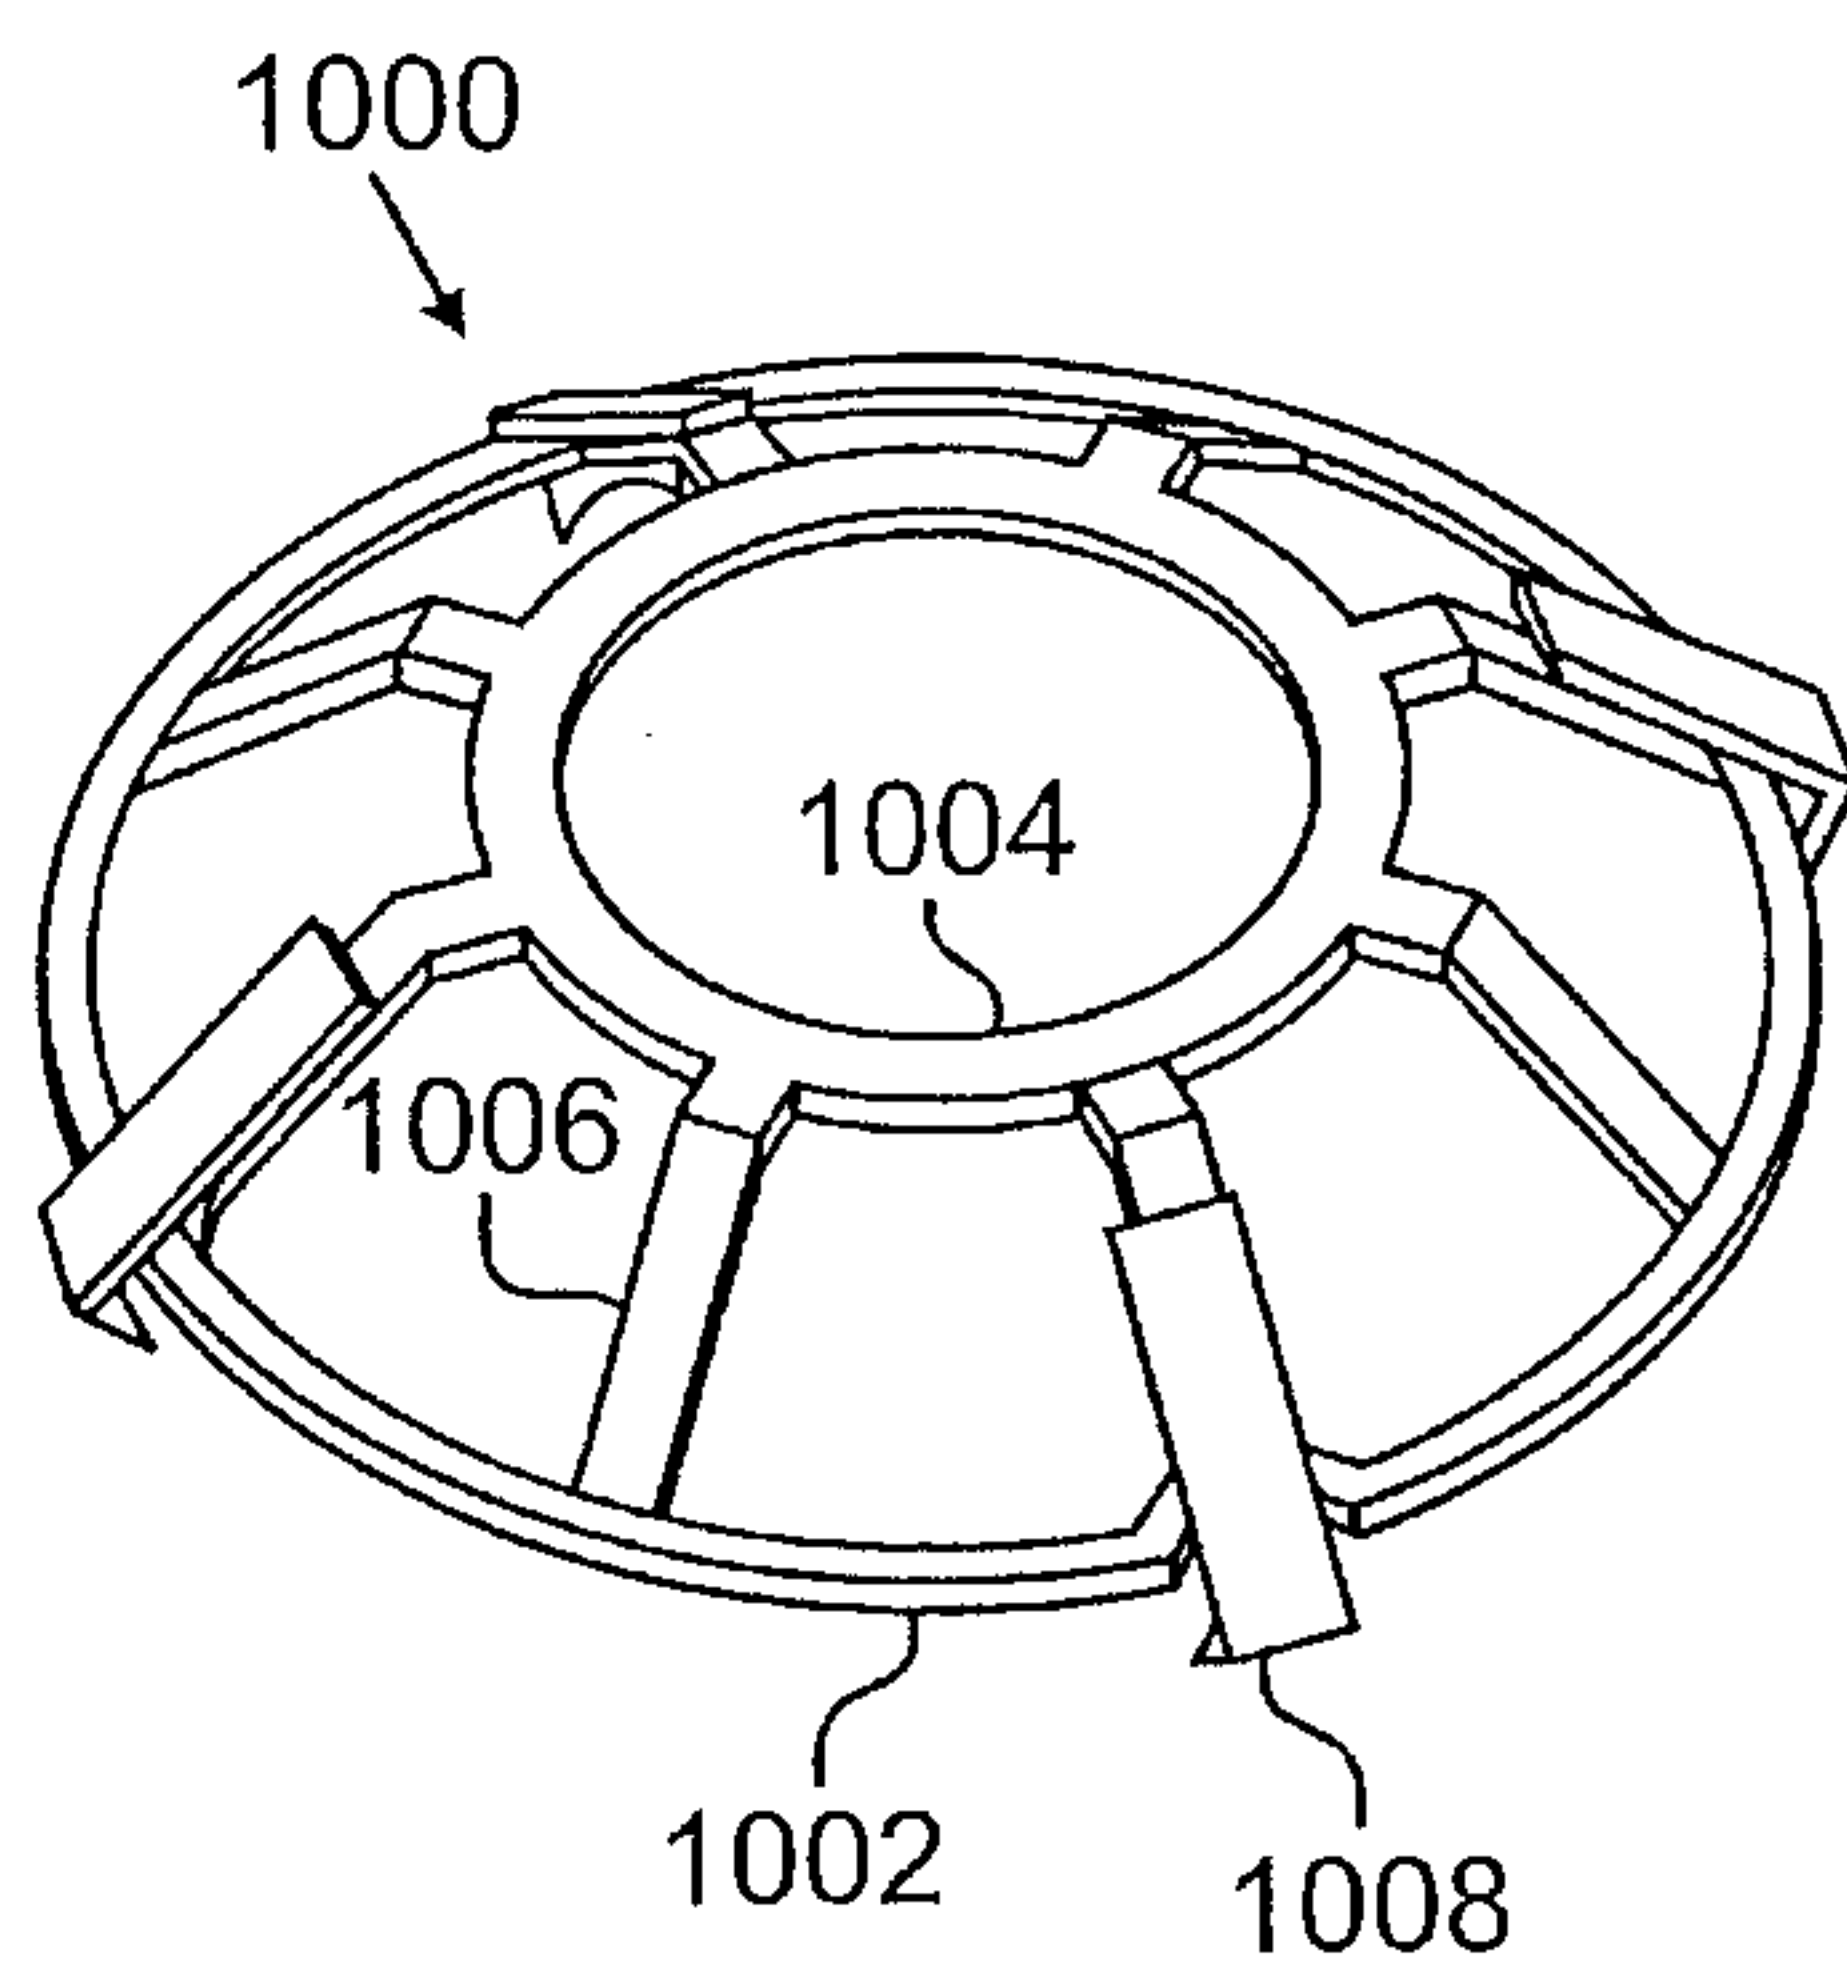


FIG. 10A

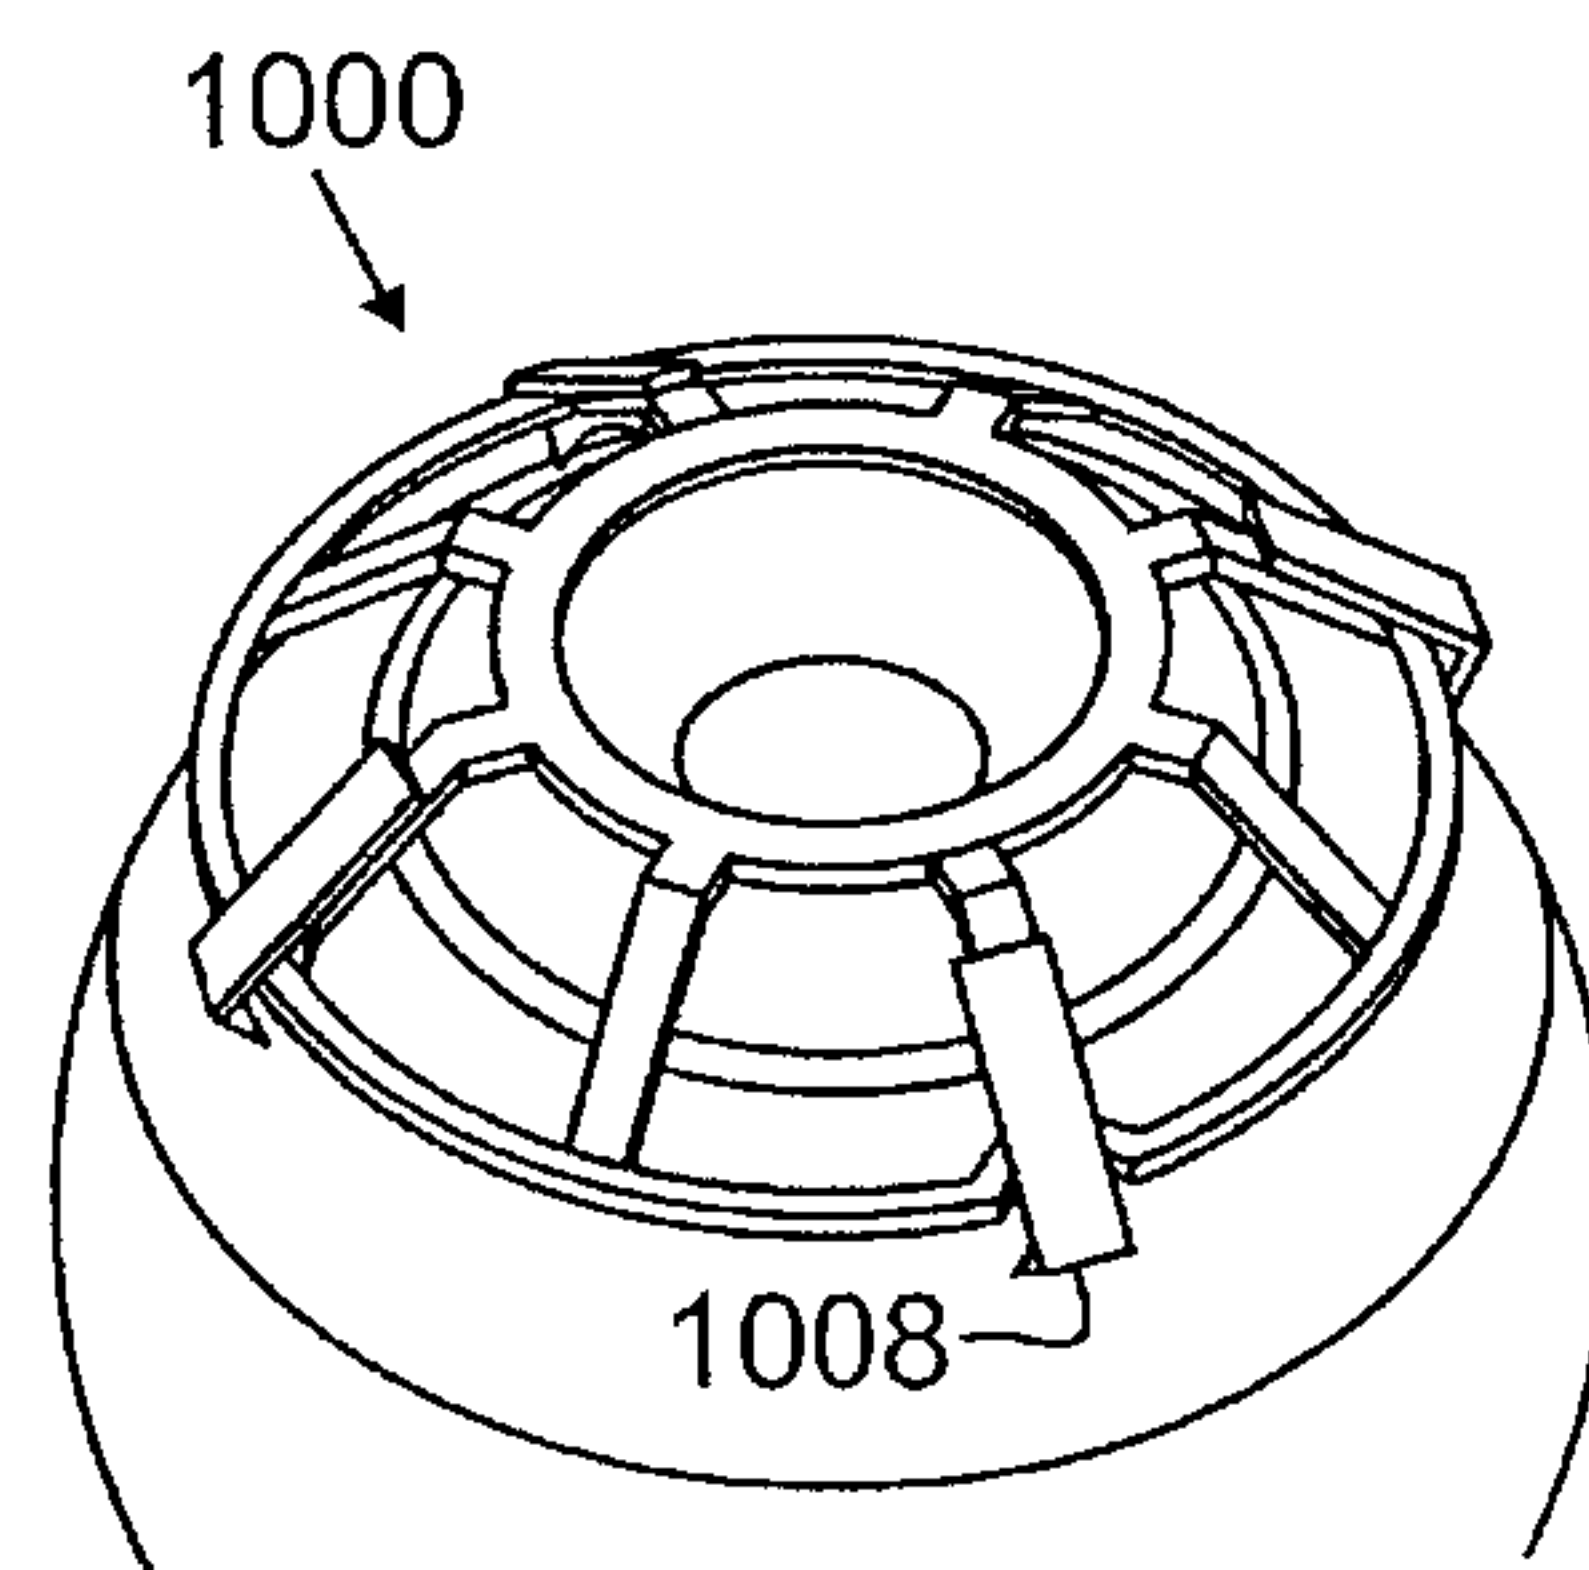


FIG. 10B


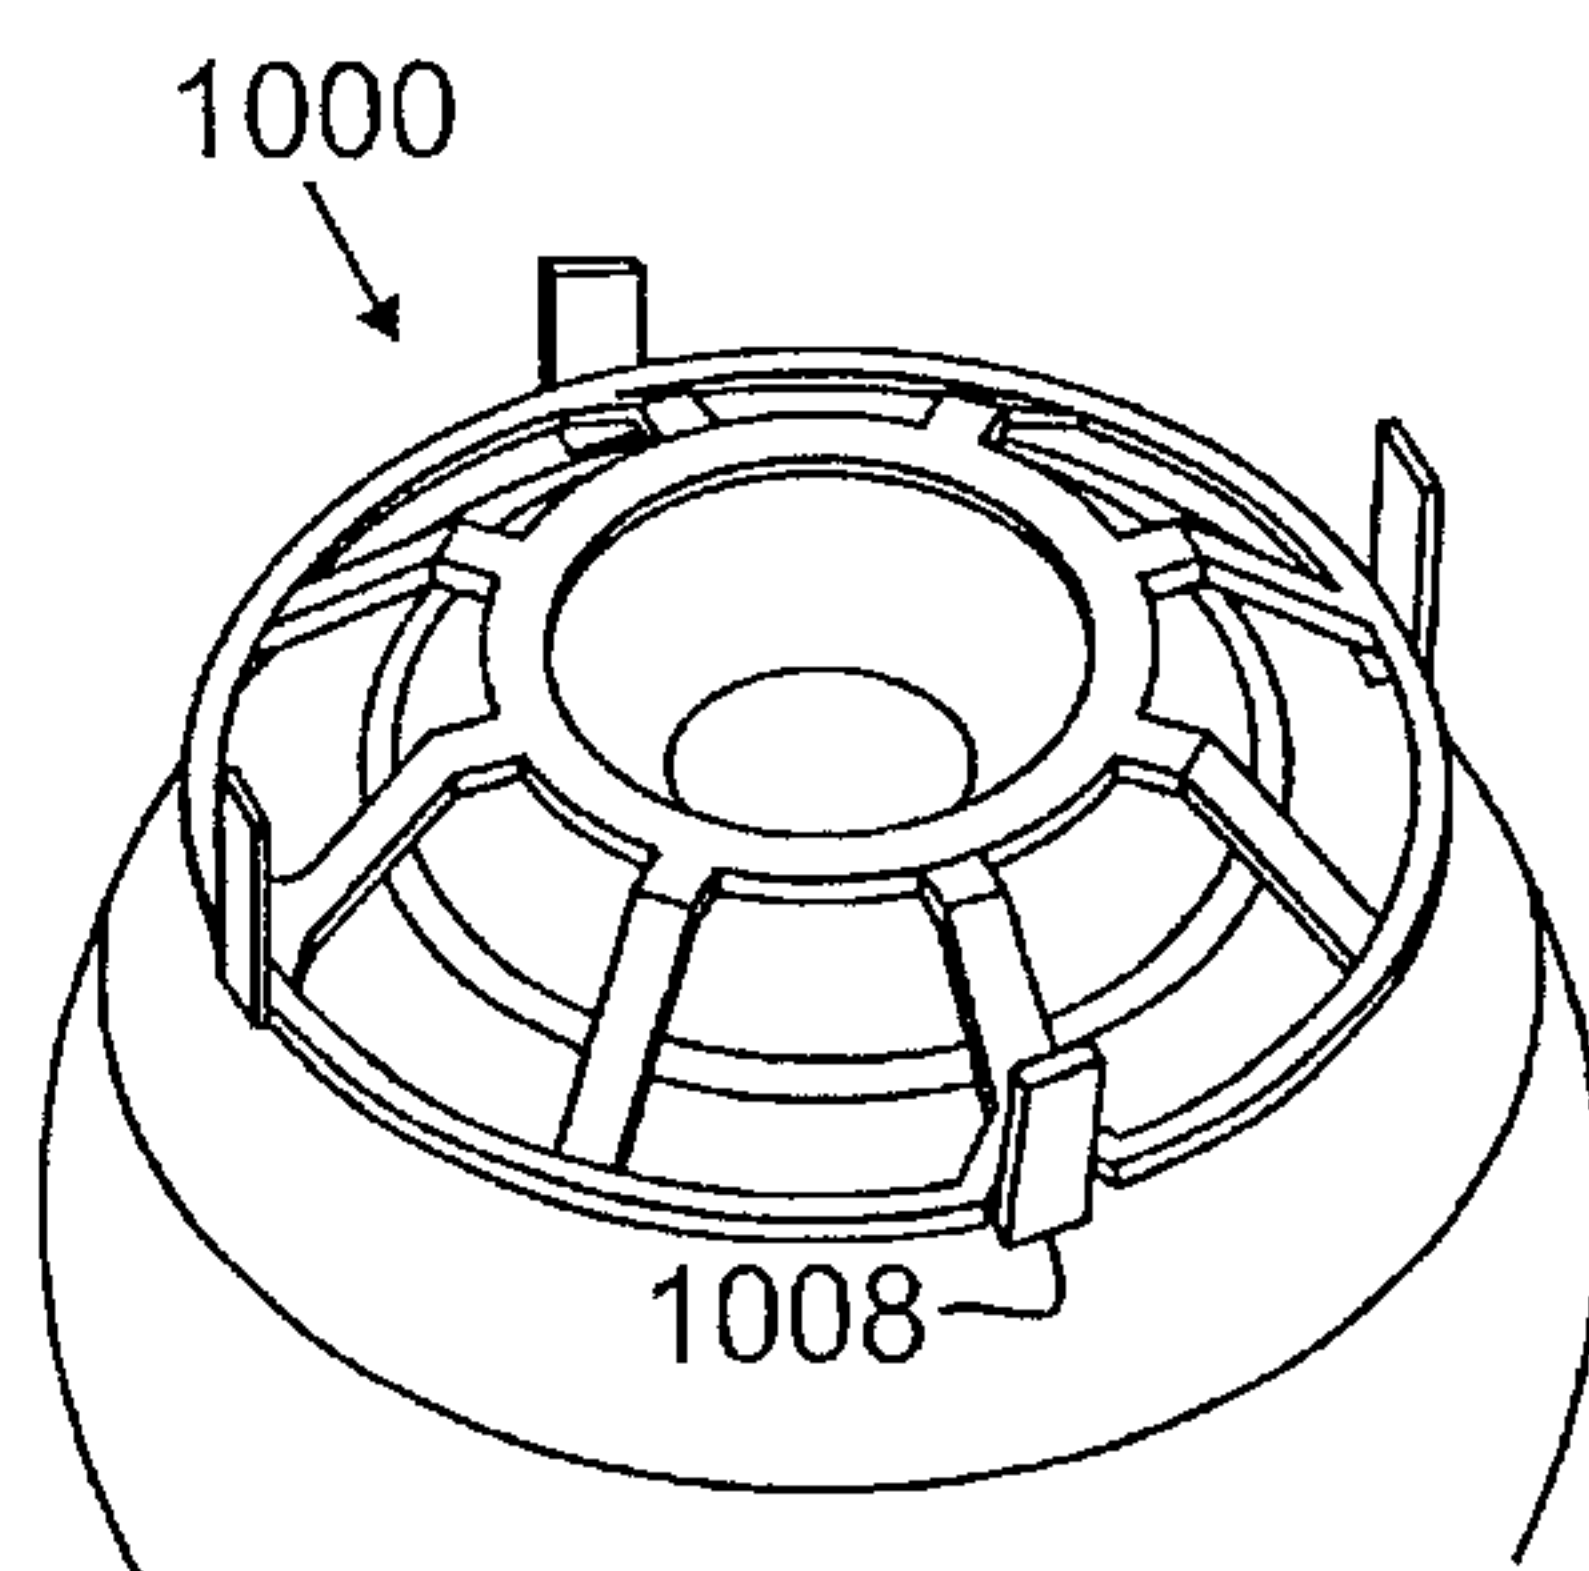


FIG. 10C

FIG. 10D

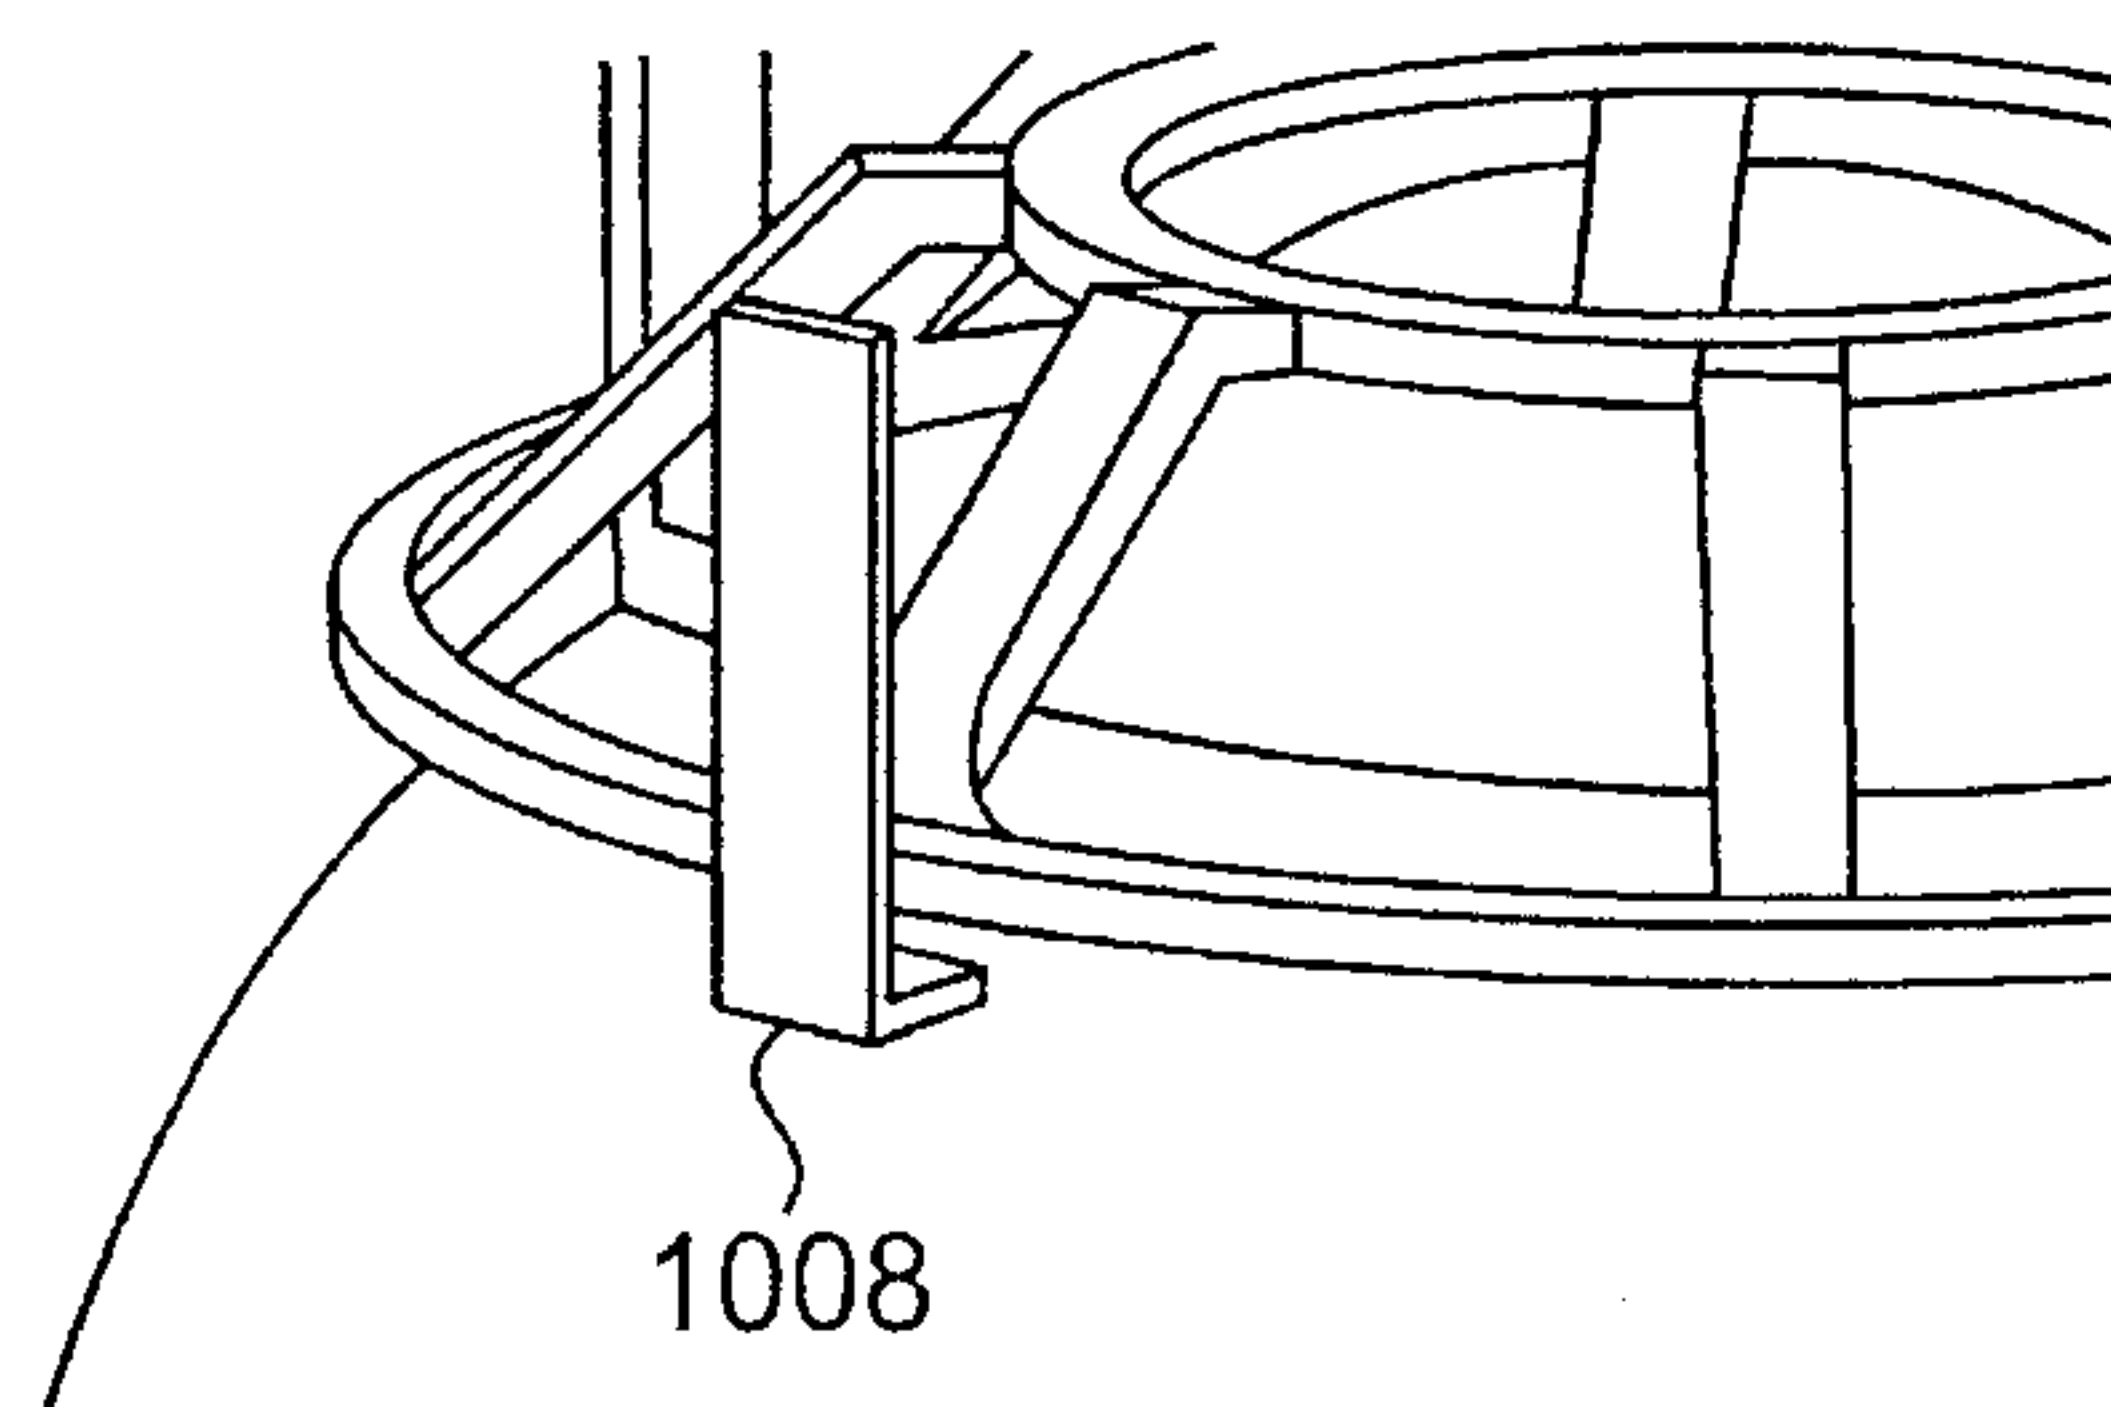

12/17

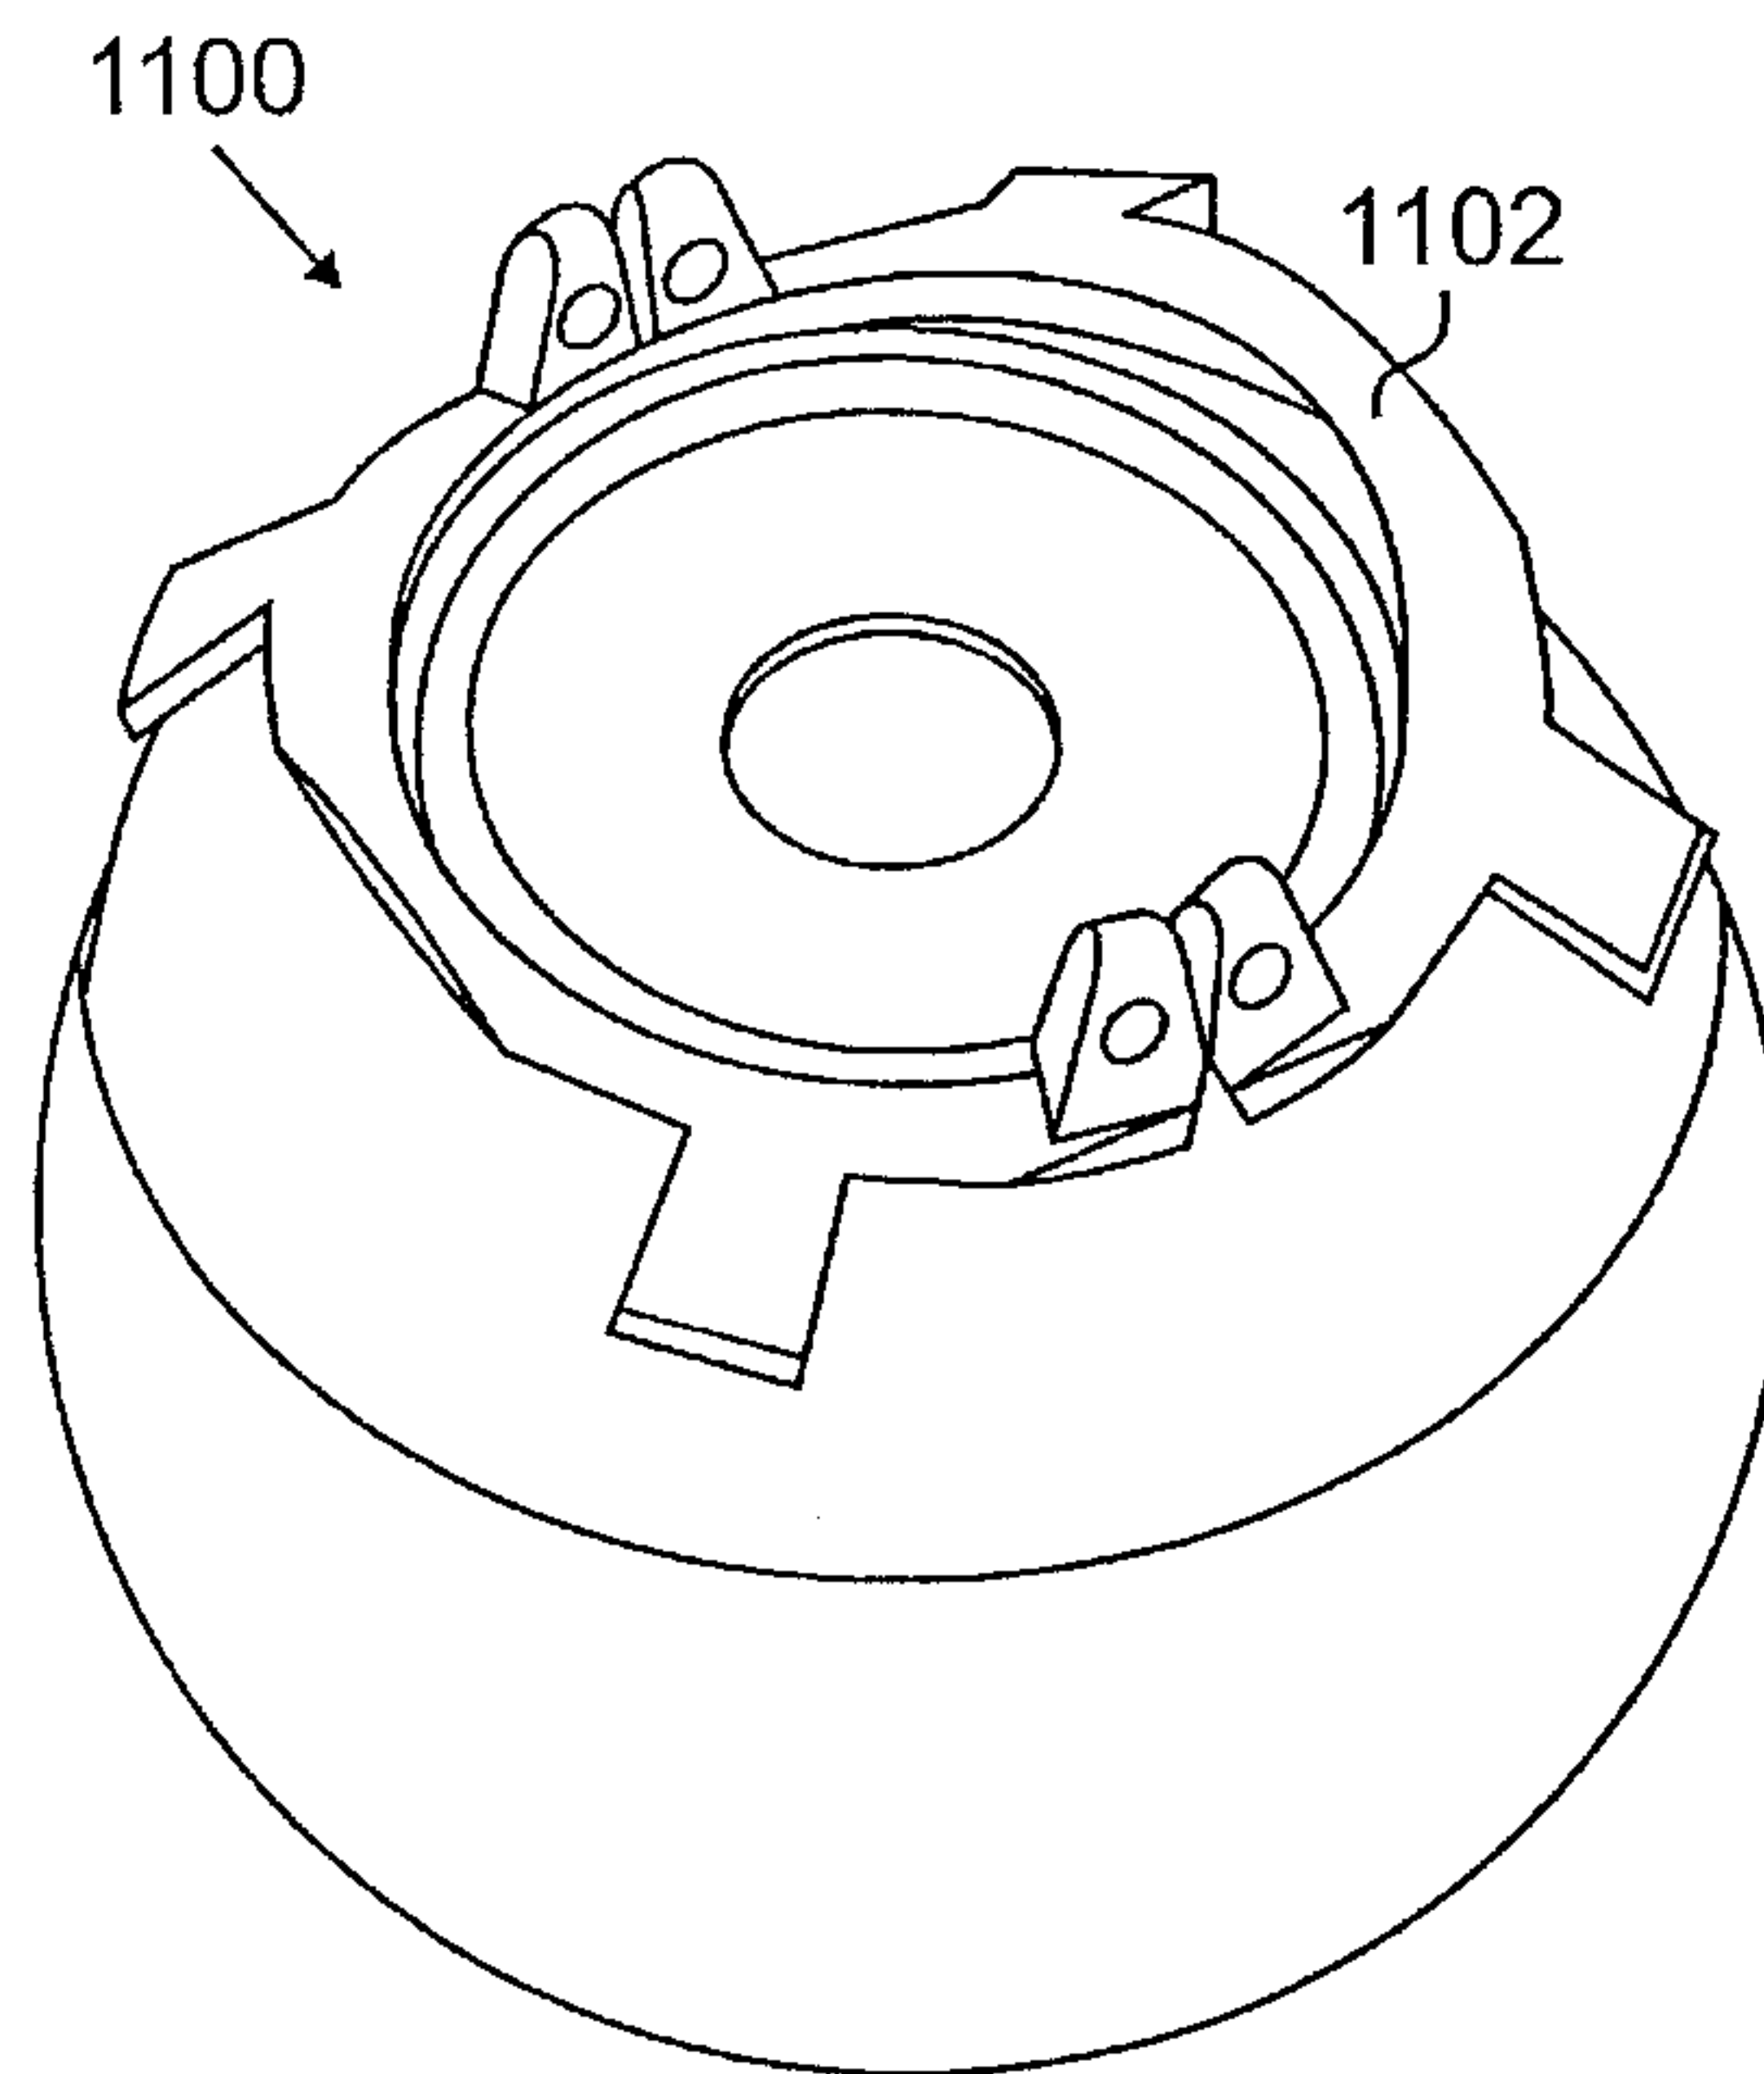


FIG. 11A

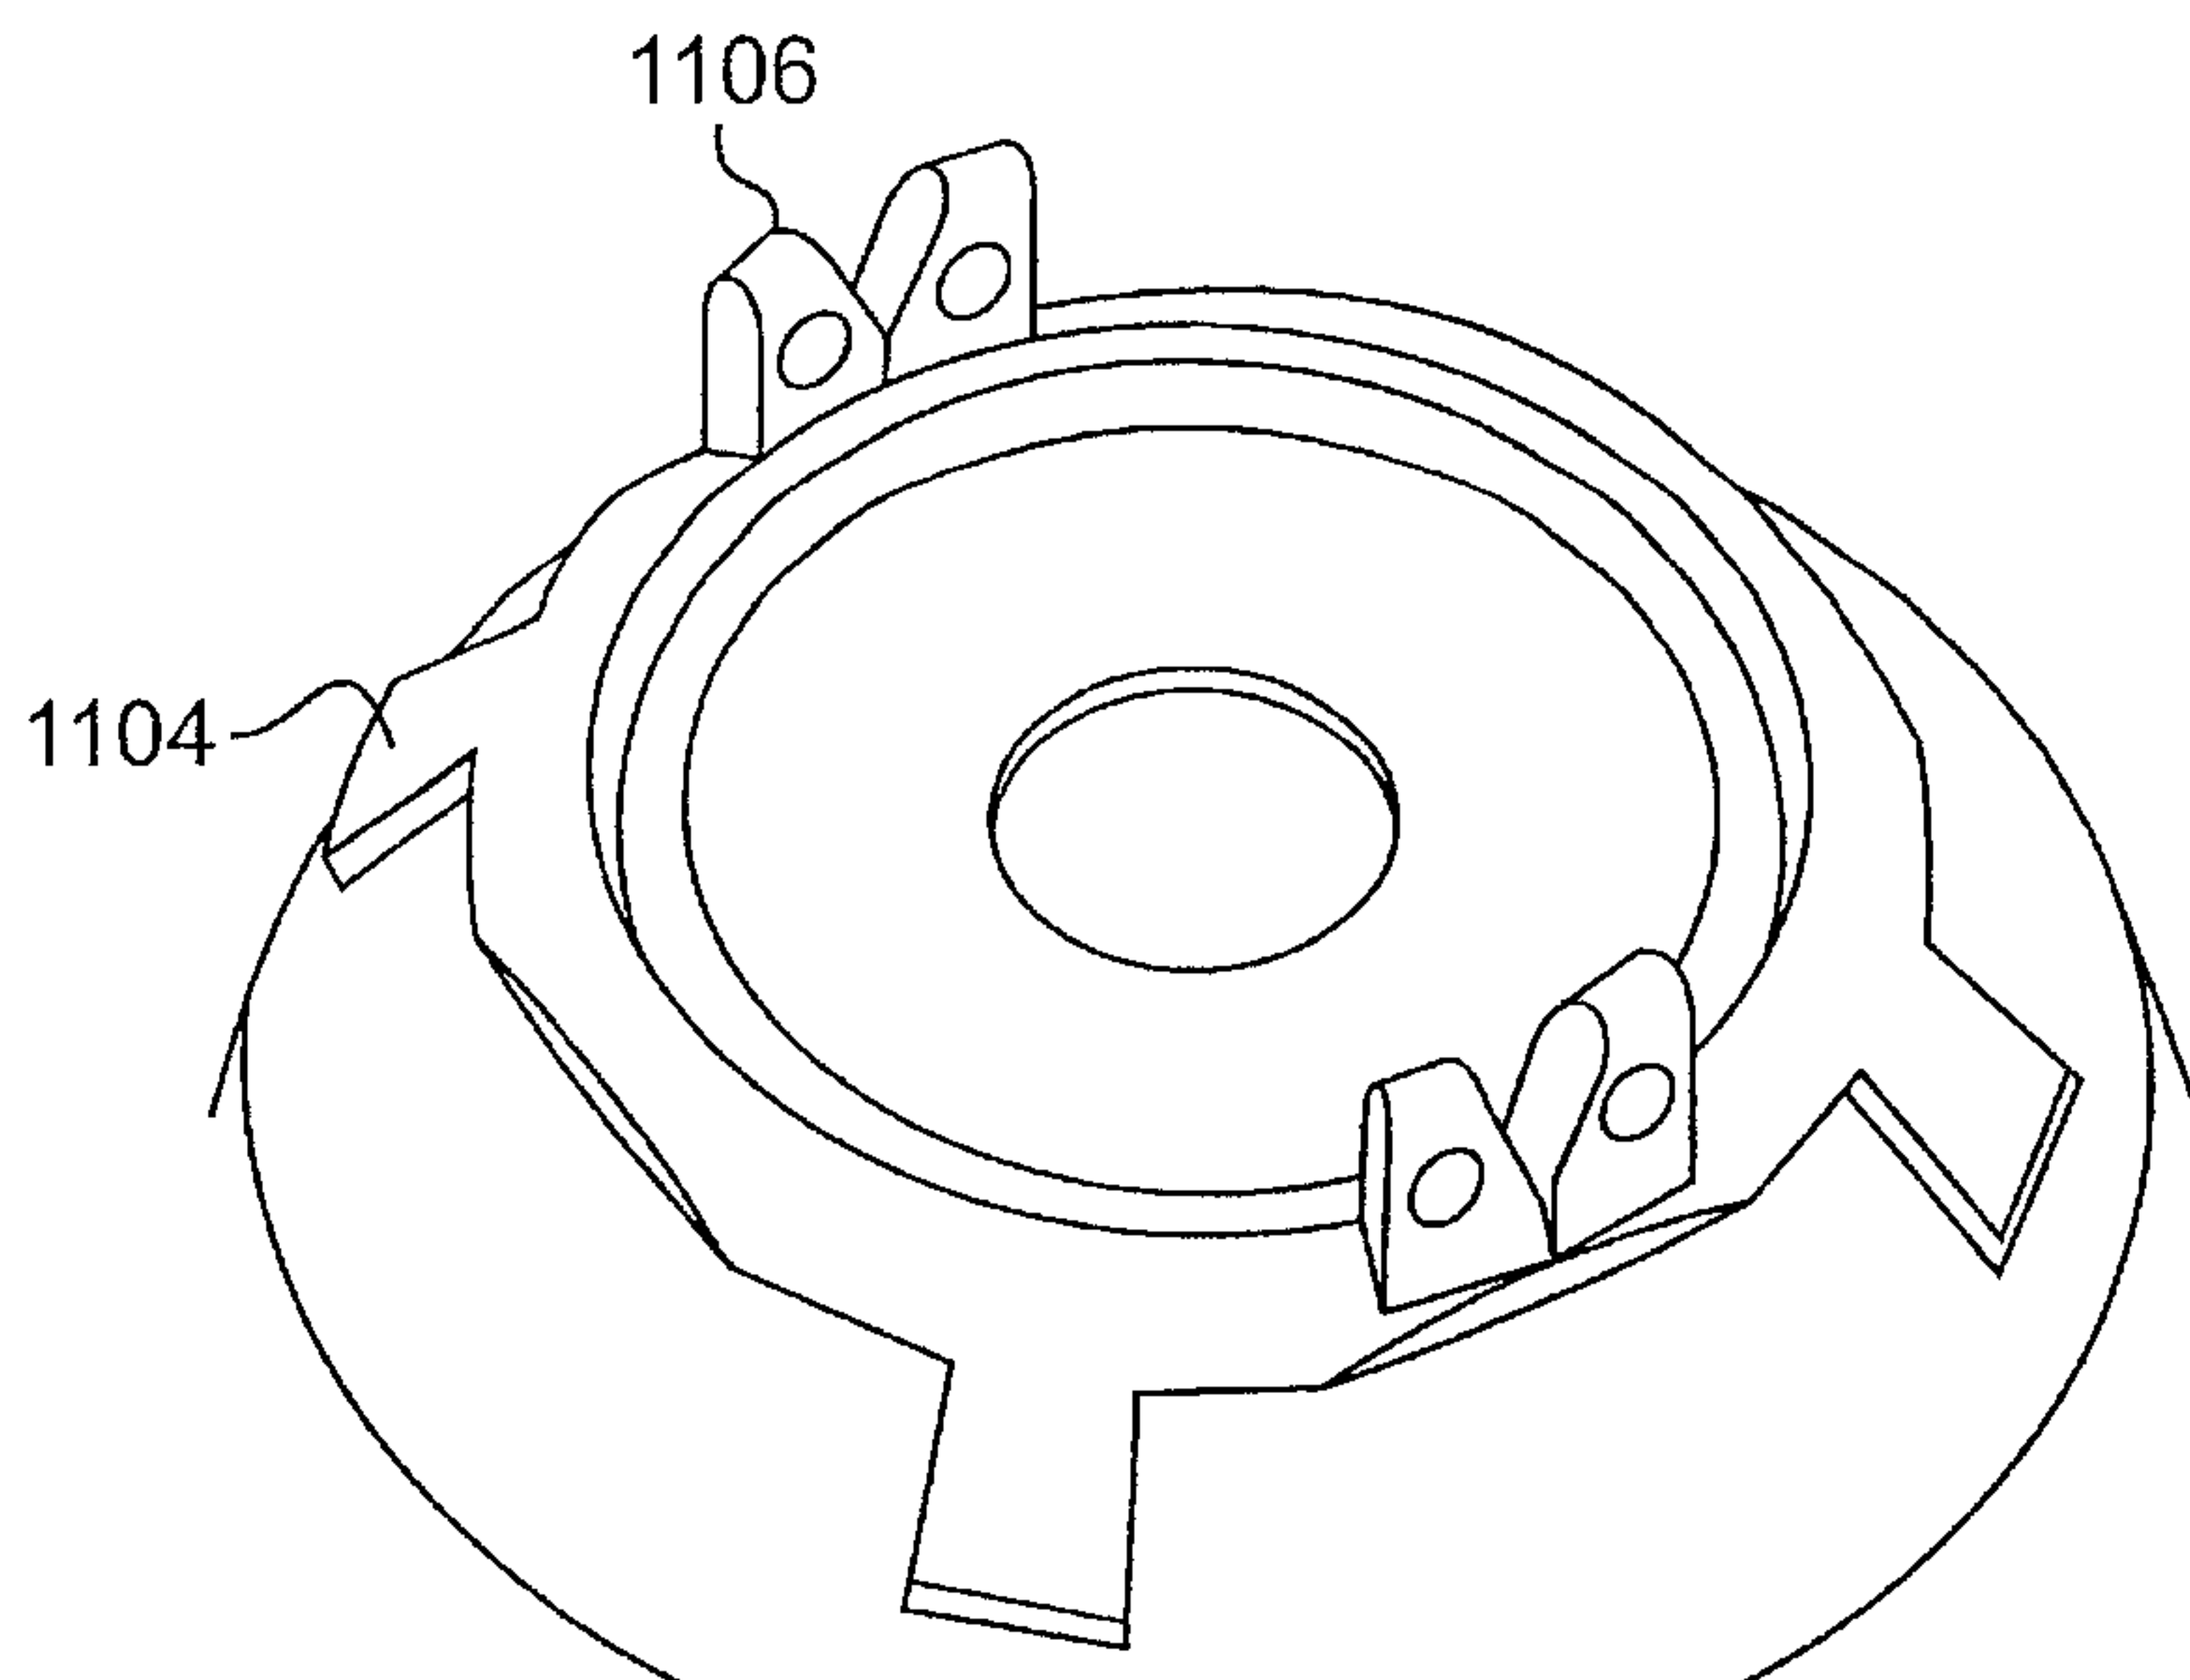


FIG. 11B

13/17

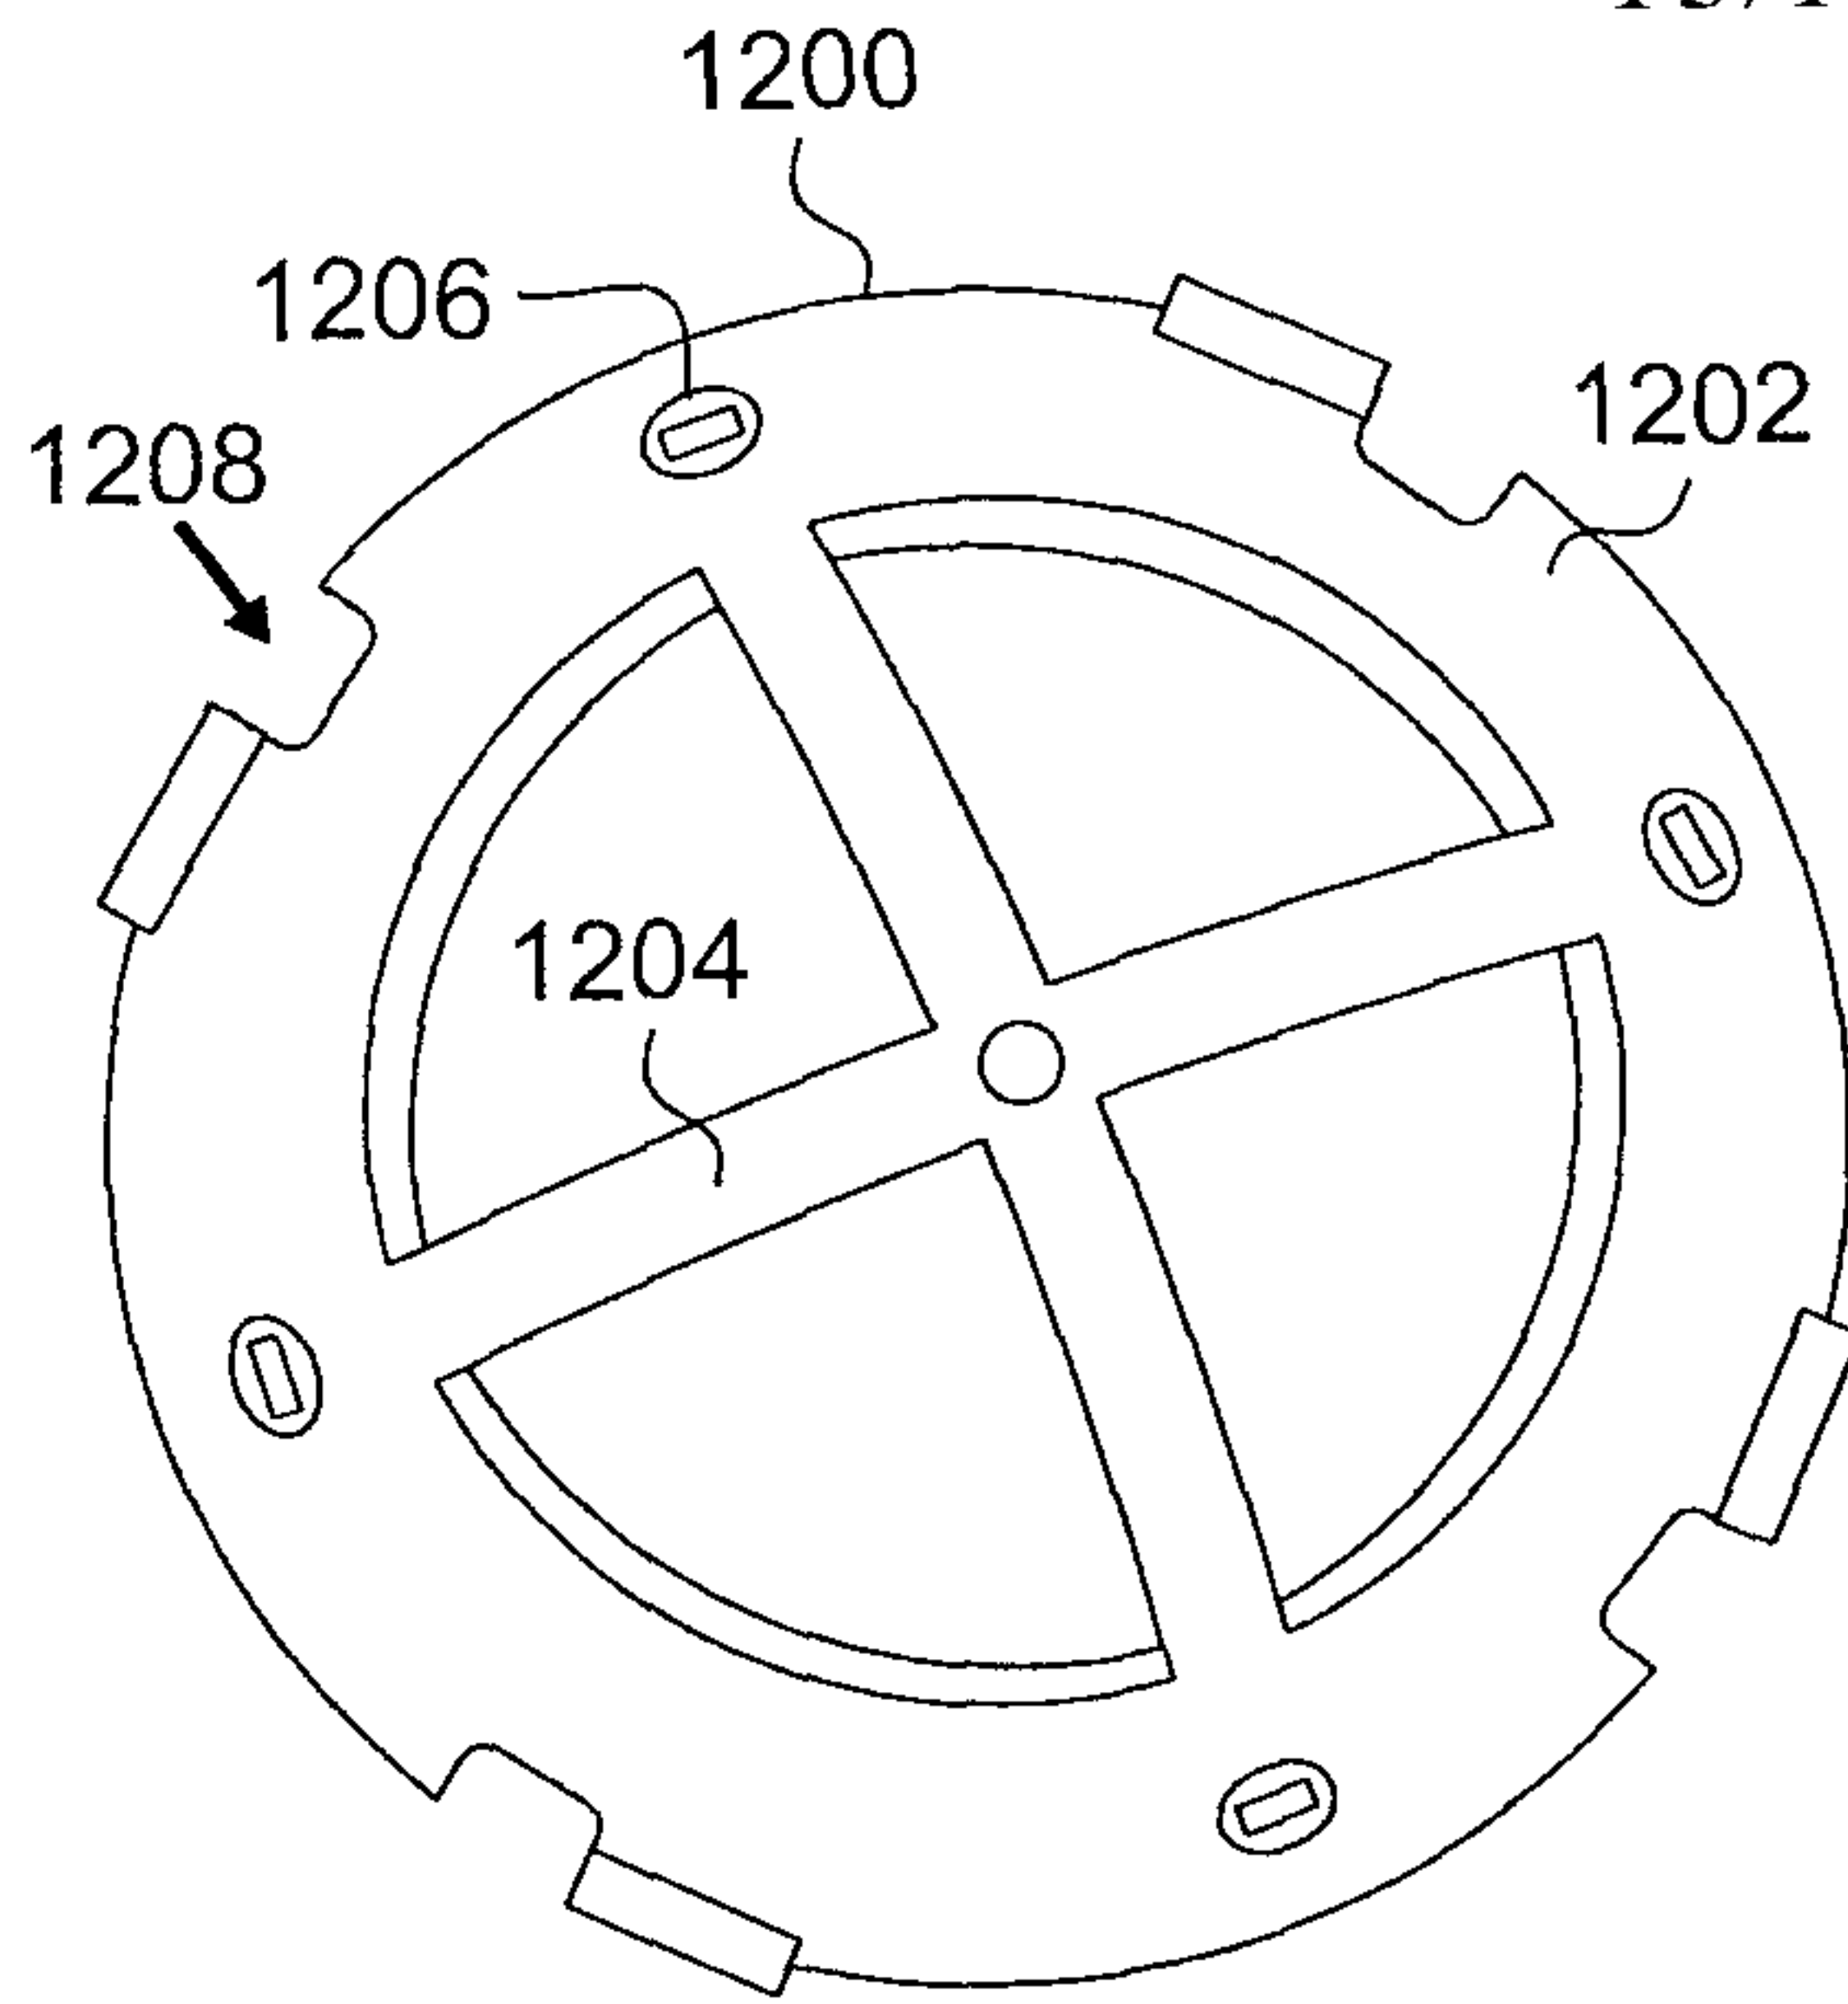


FIG. 12A

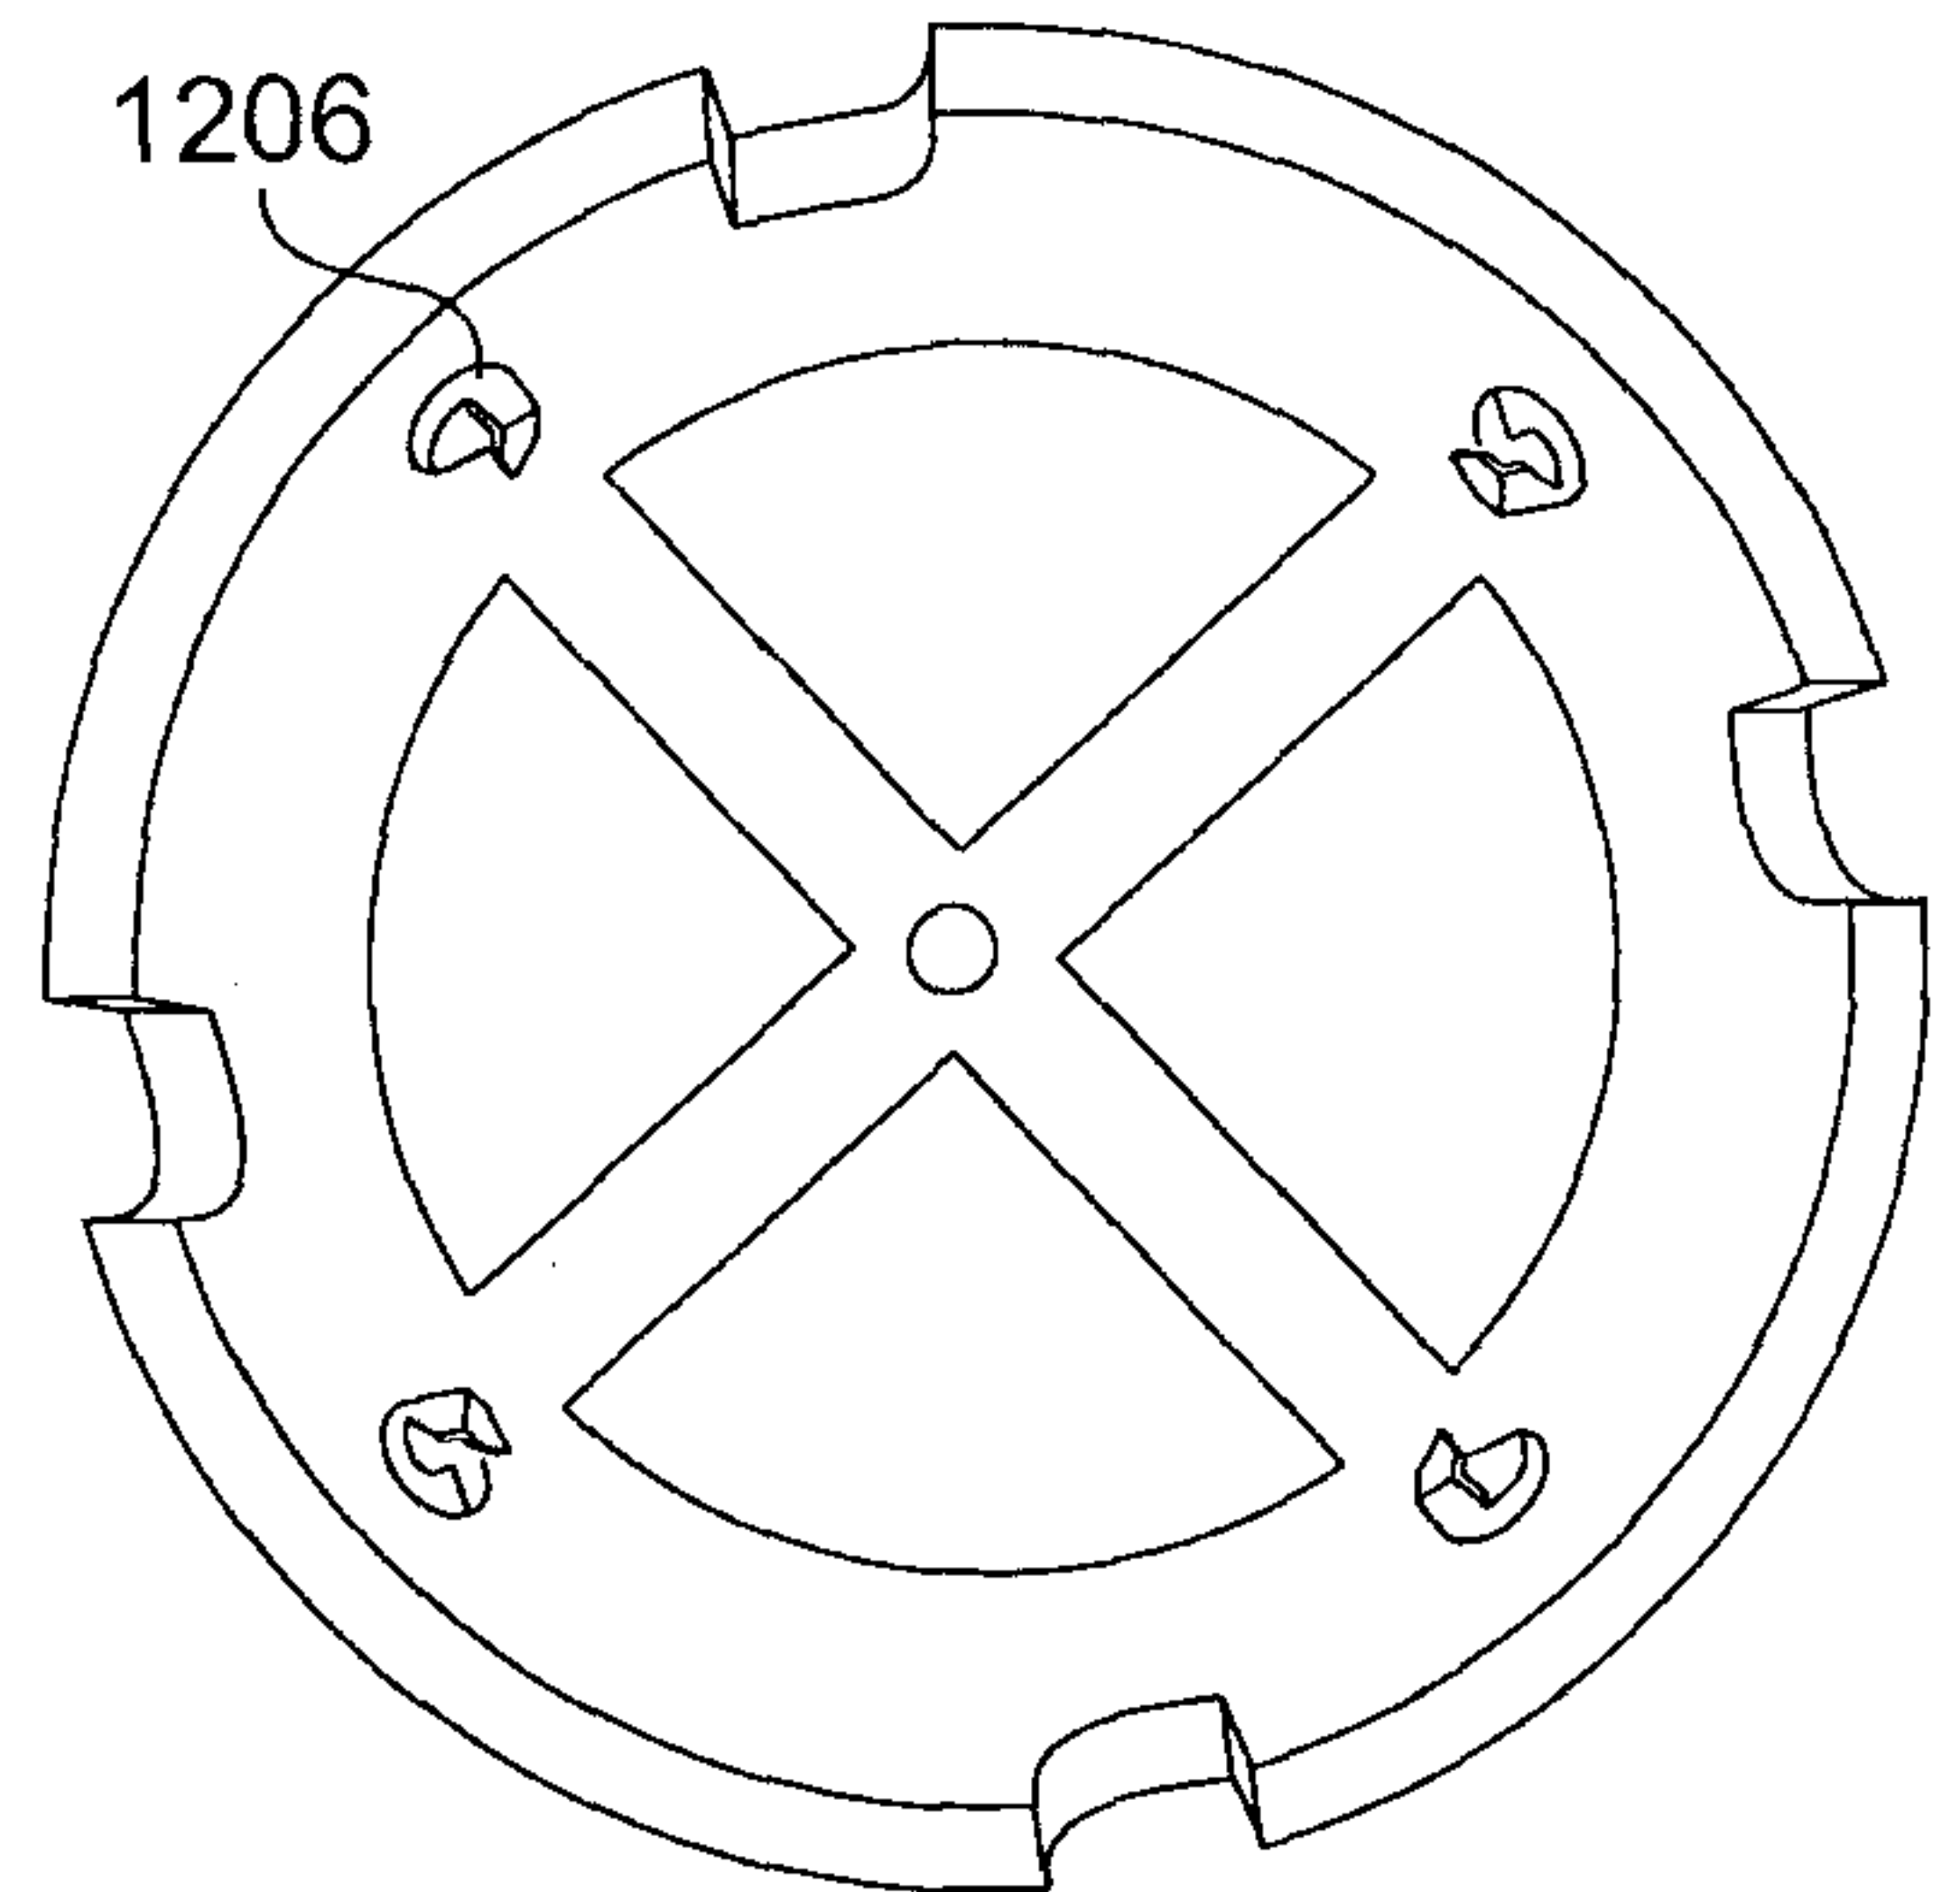


FIG. 12B

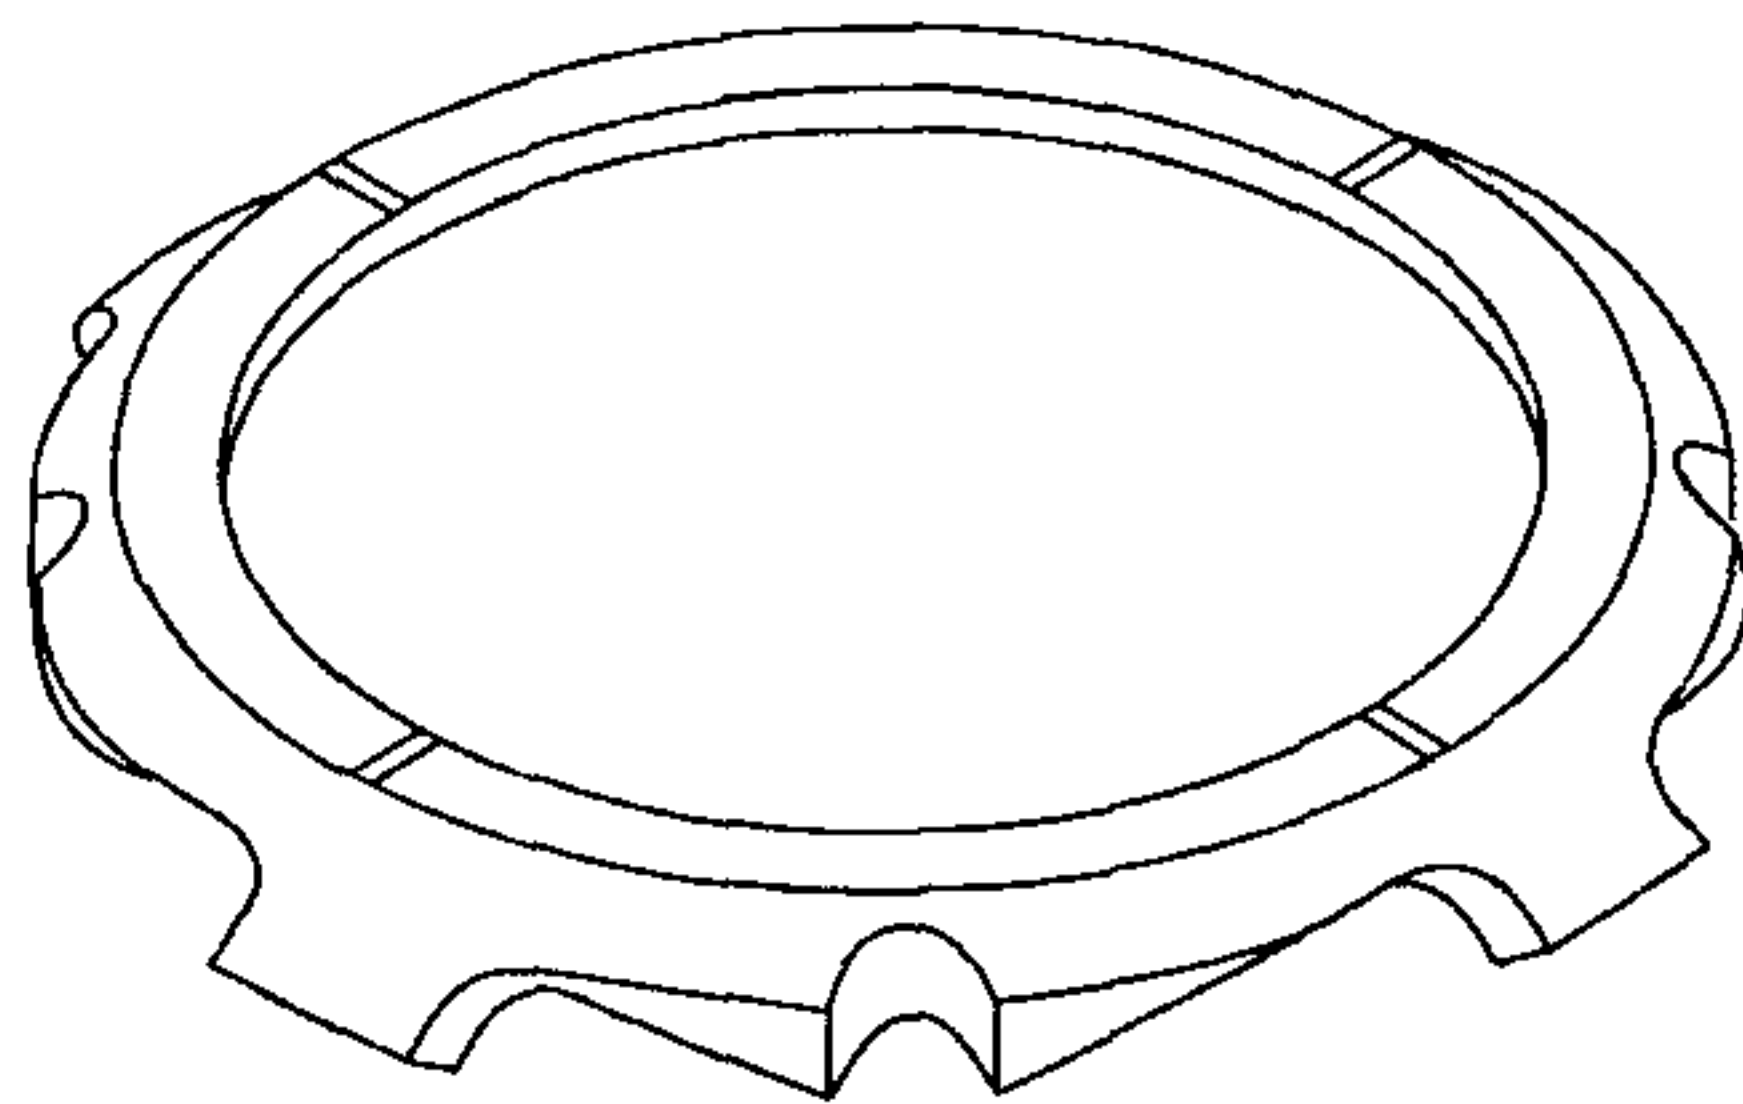


FIG. 16A
(PRIOR ART)

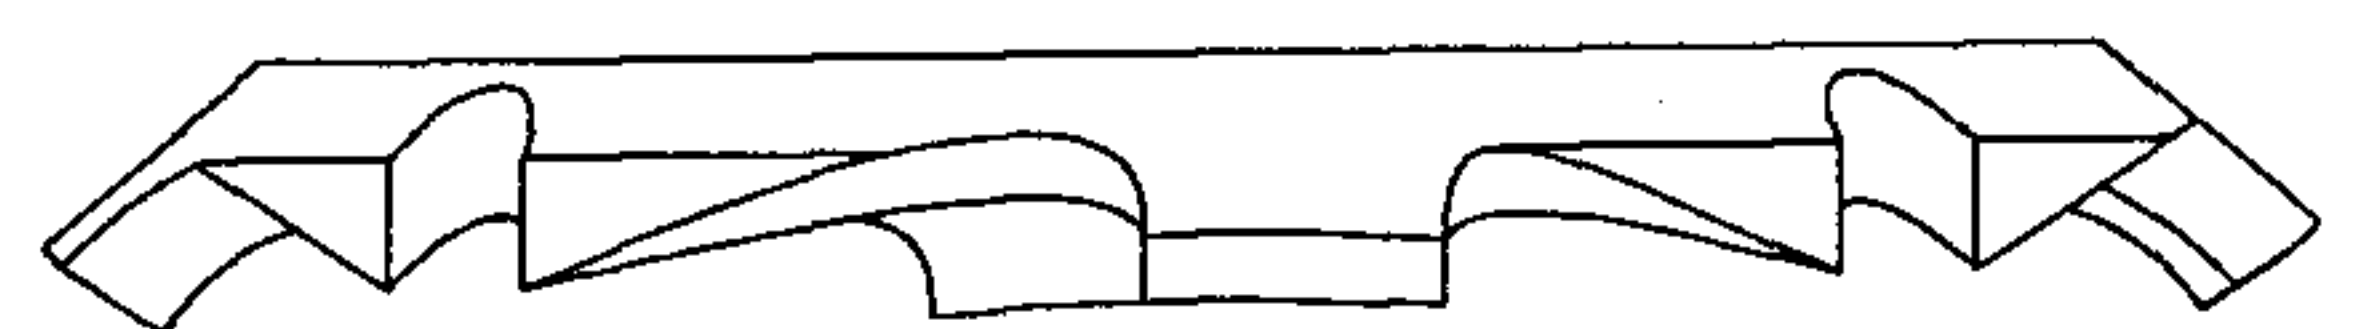


FIG. 16B
(PRIOR ART)

14/17

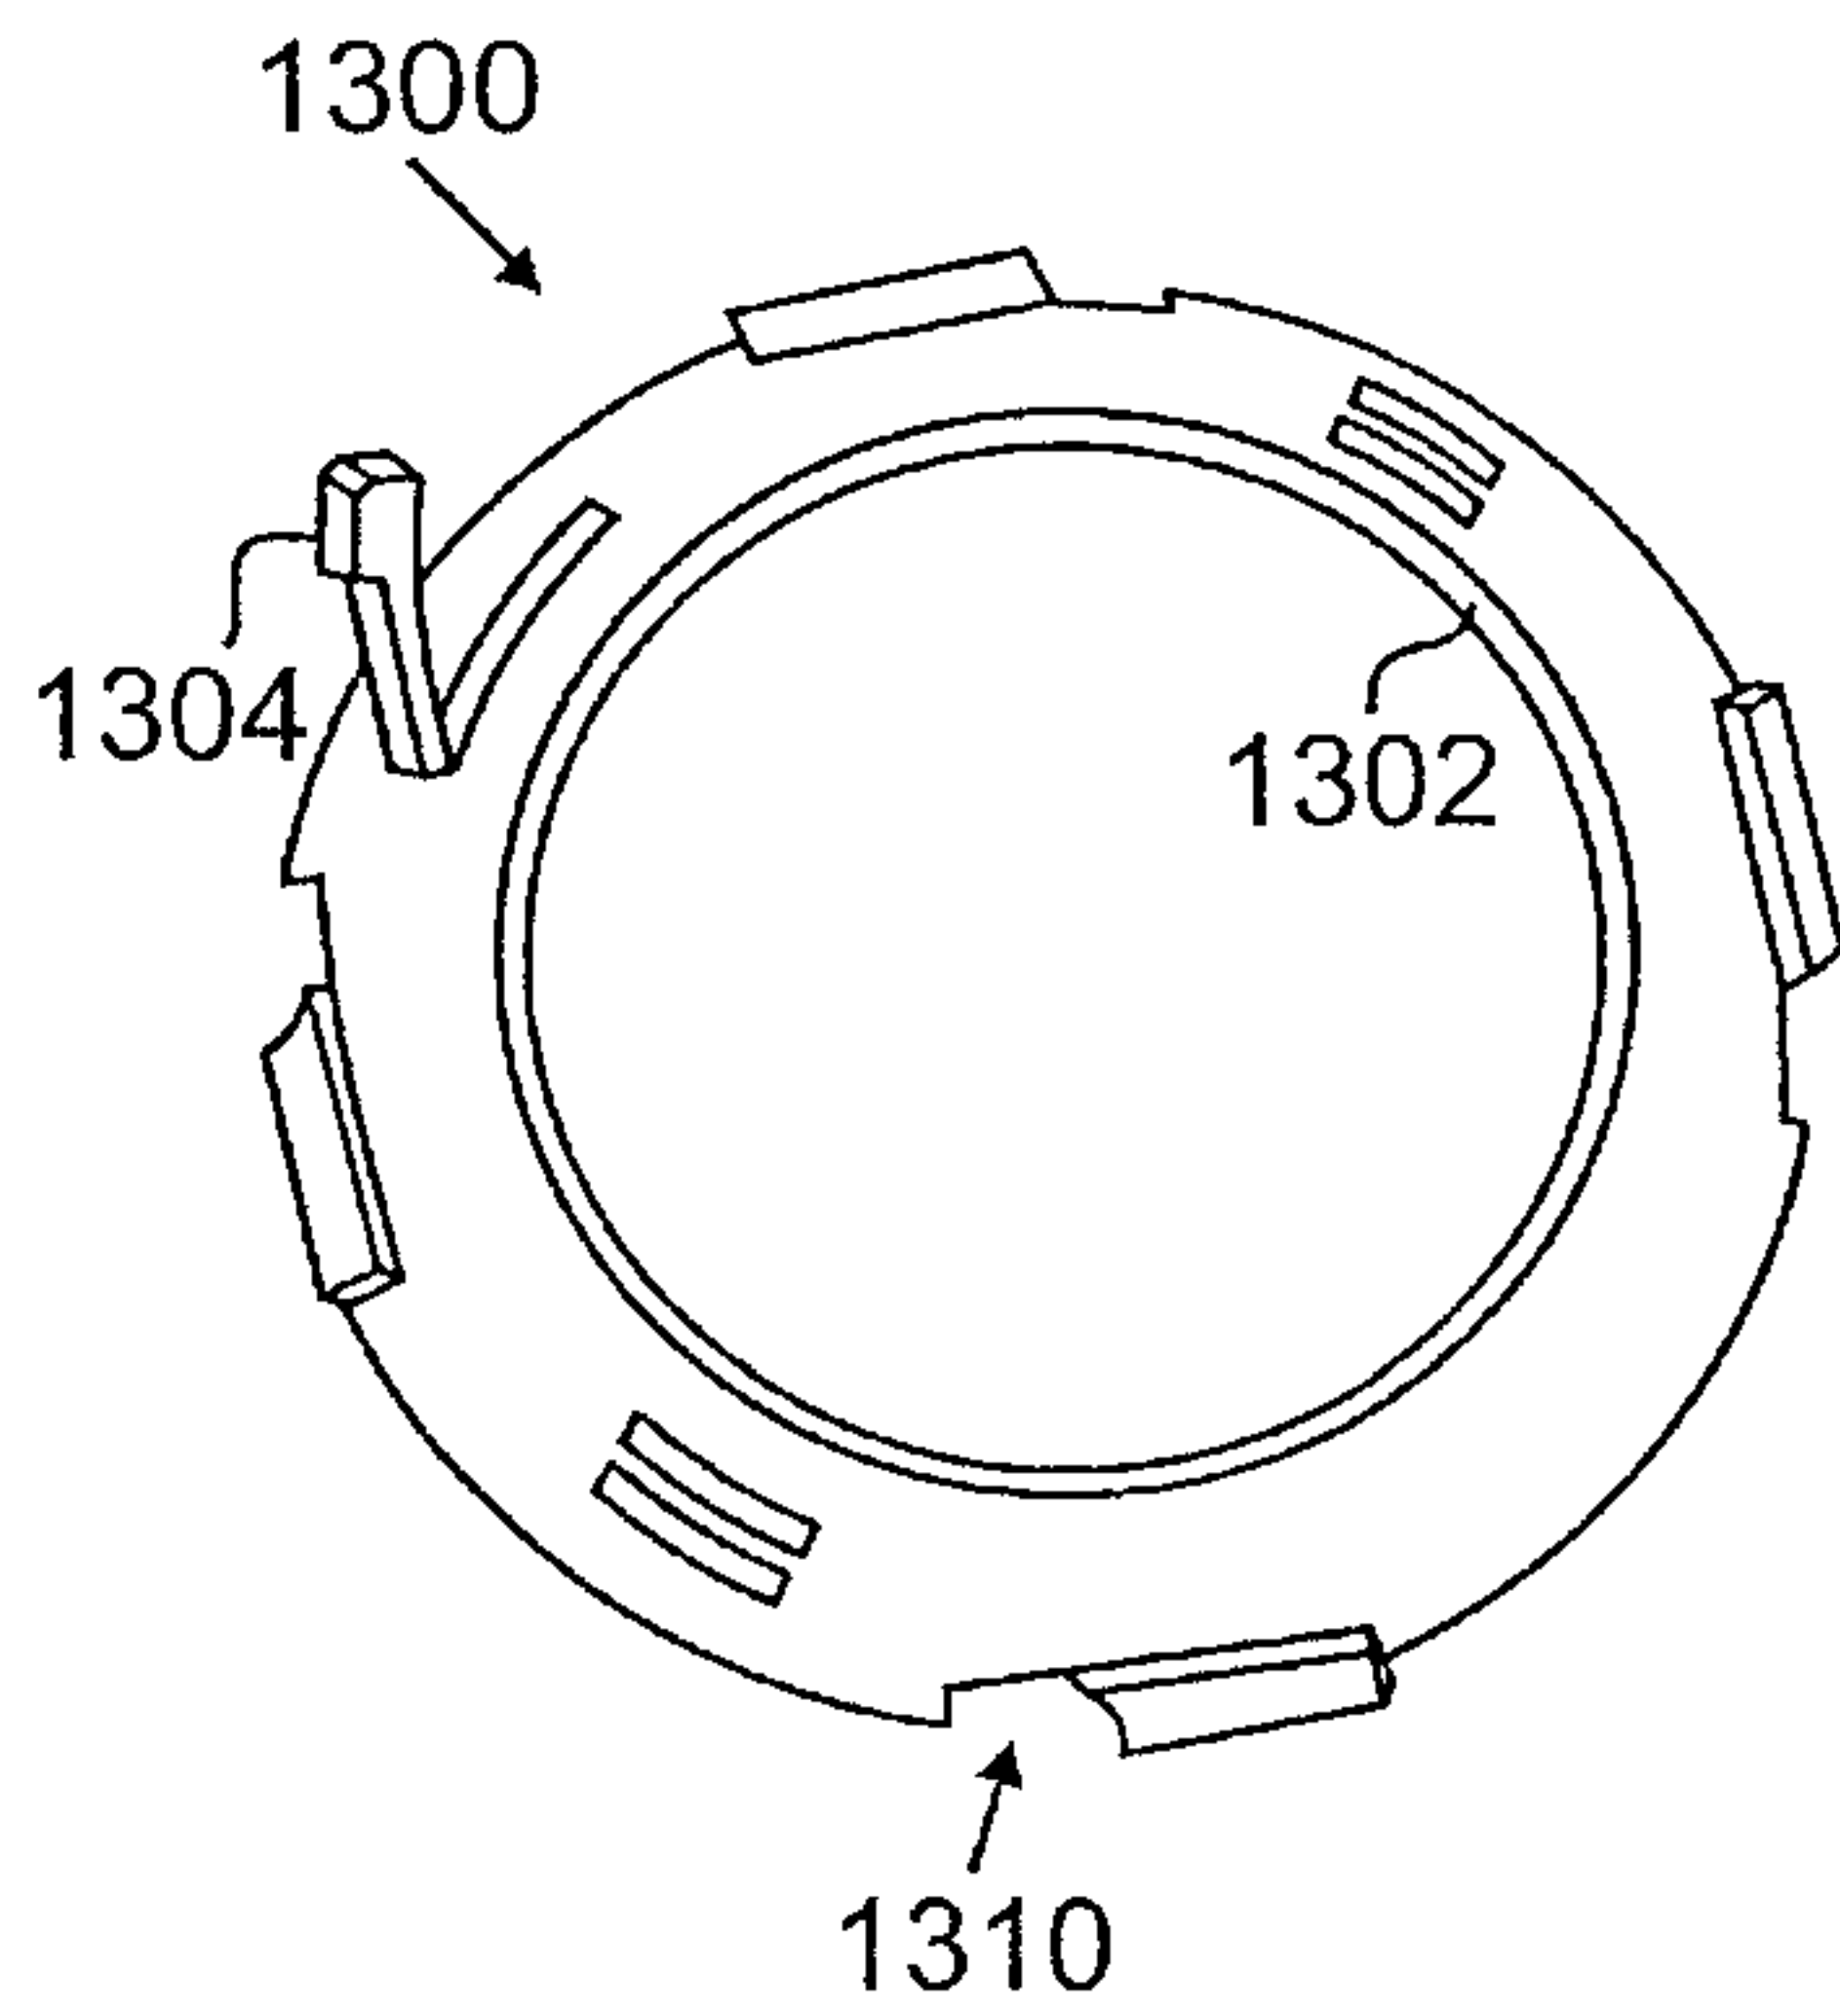


FIG. 13A

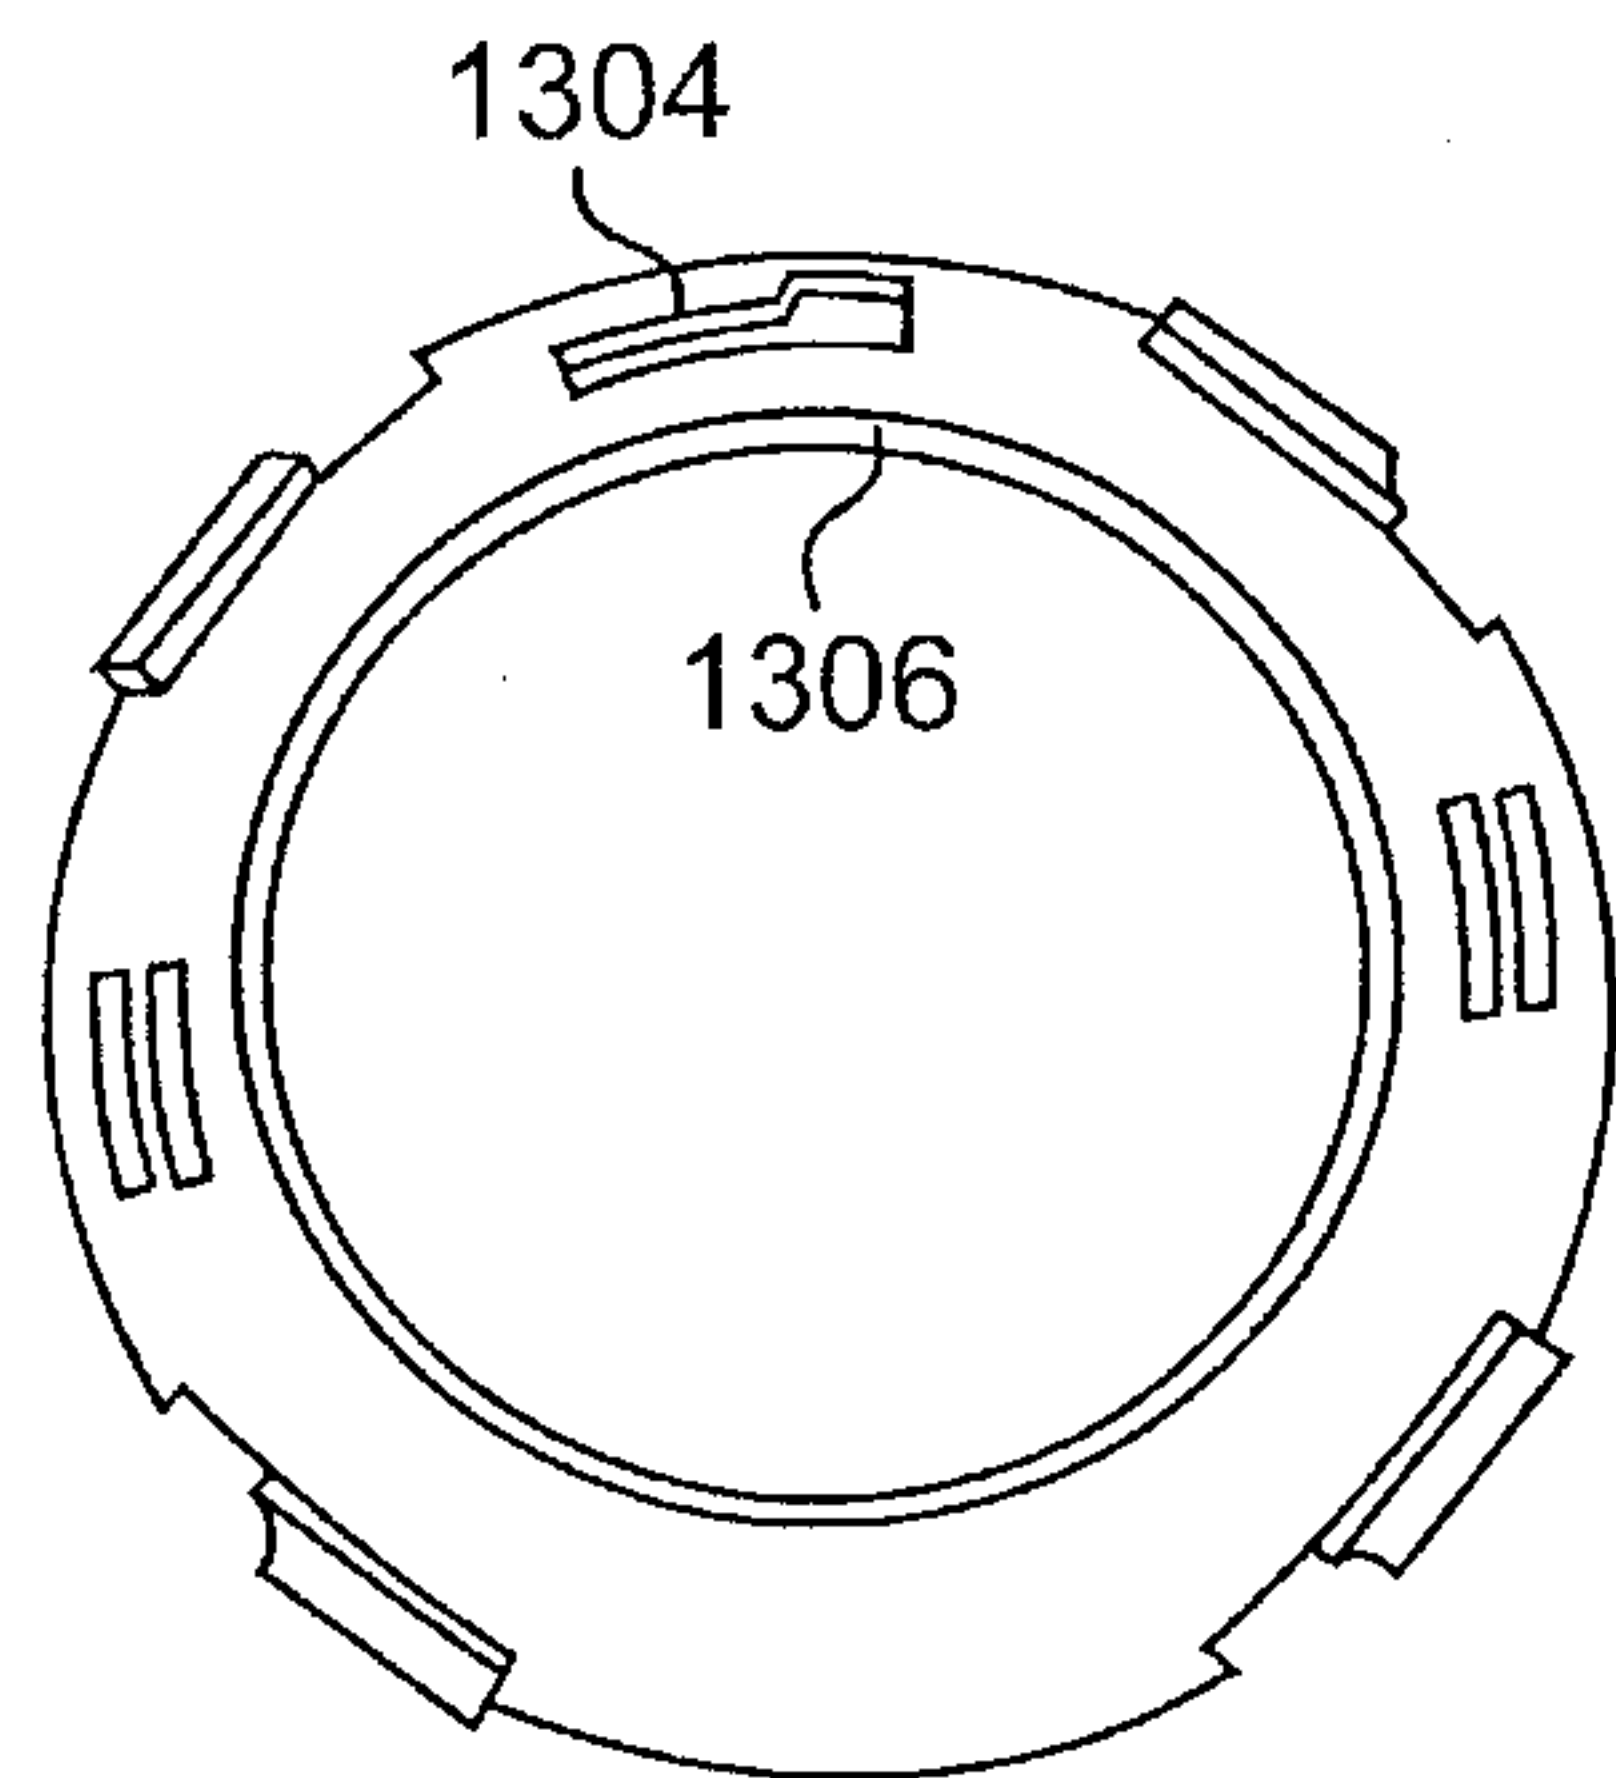


FIG. 13B

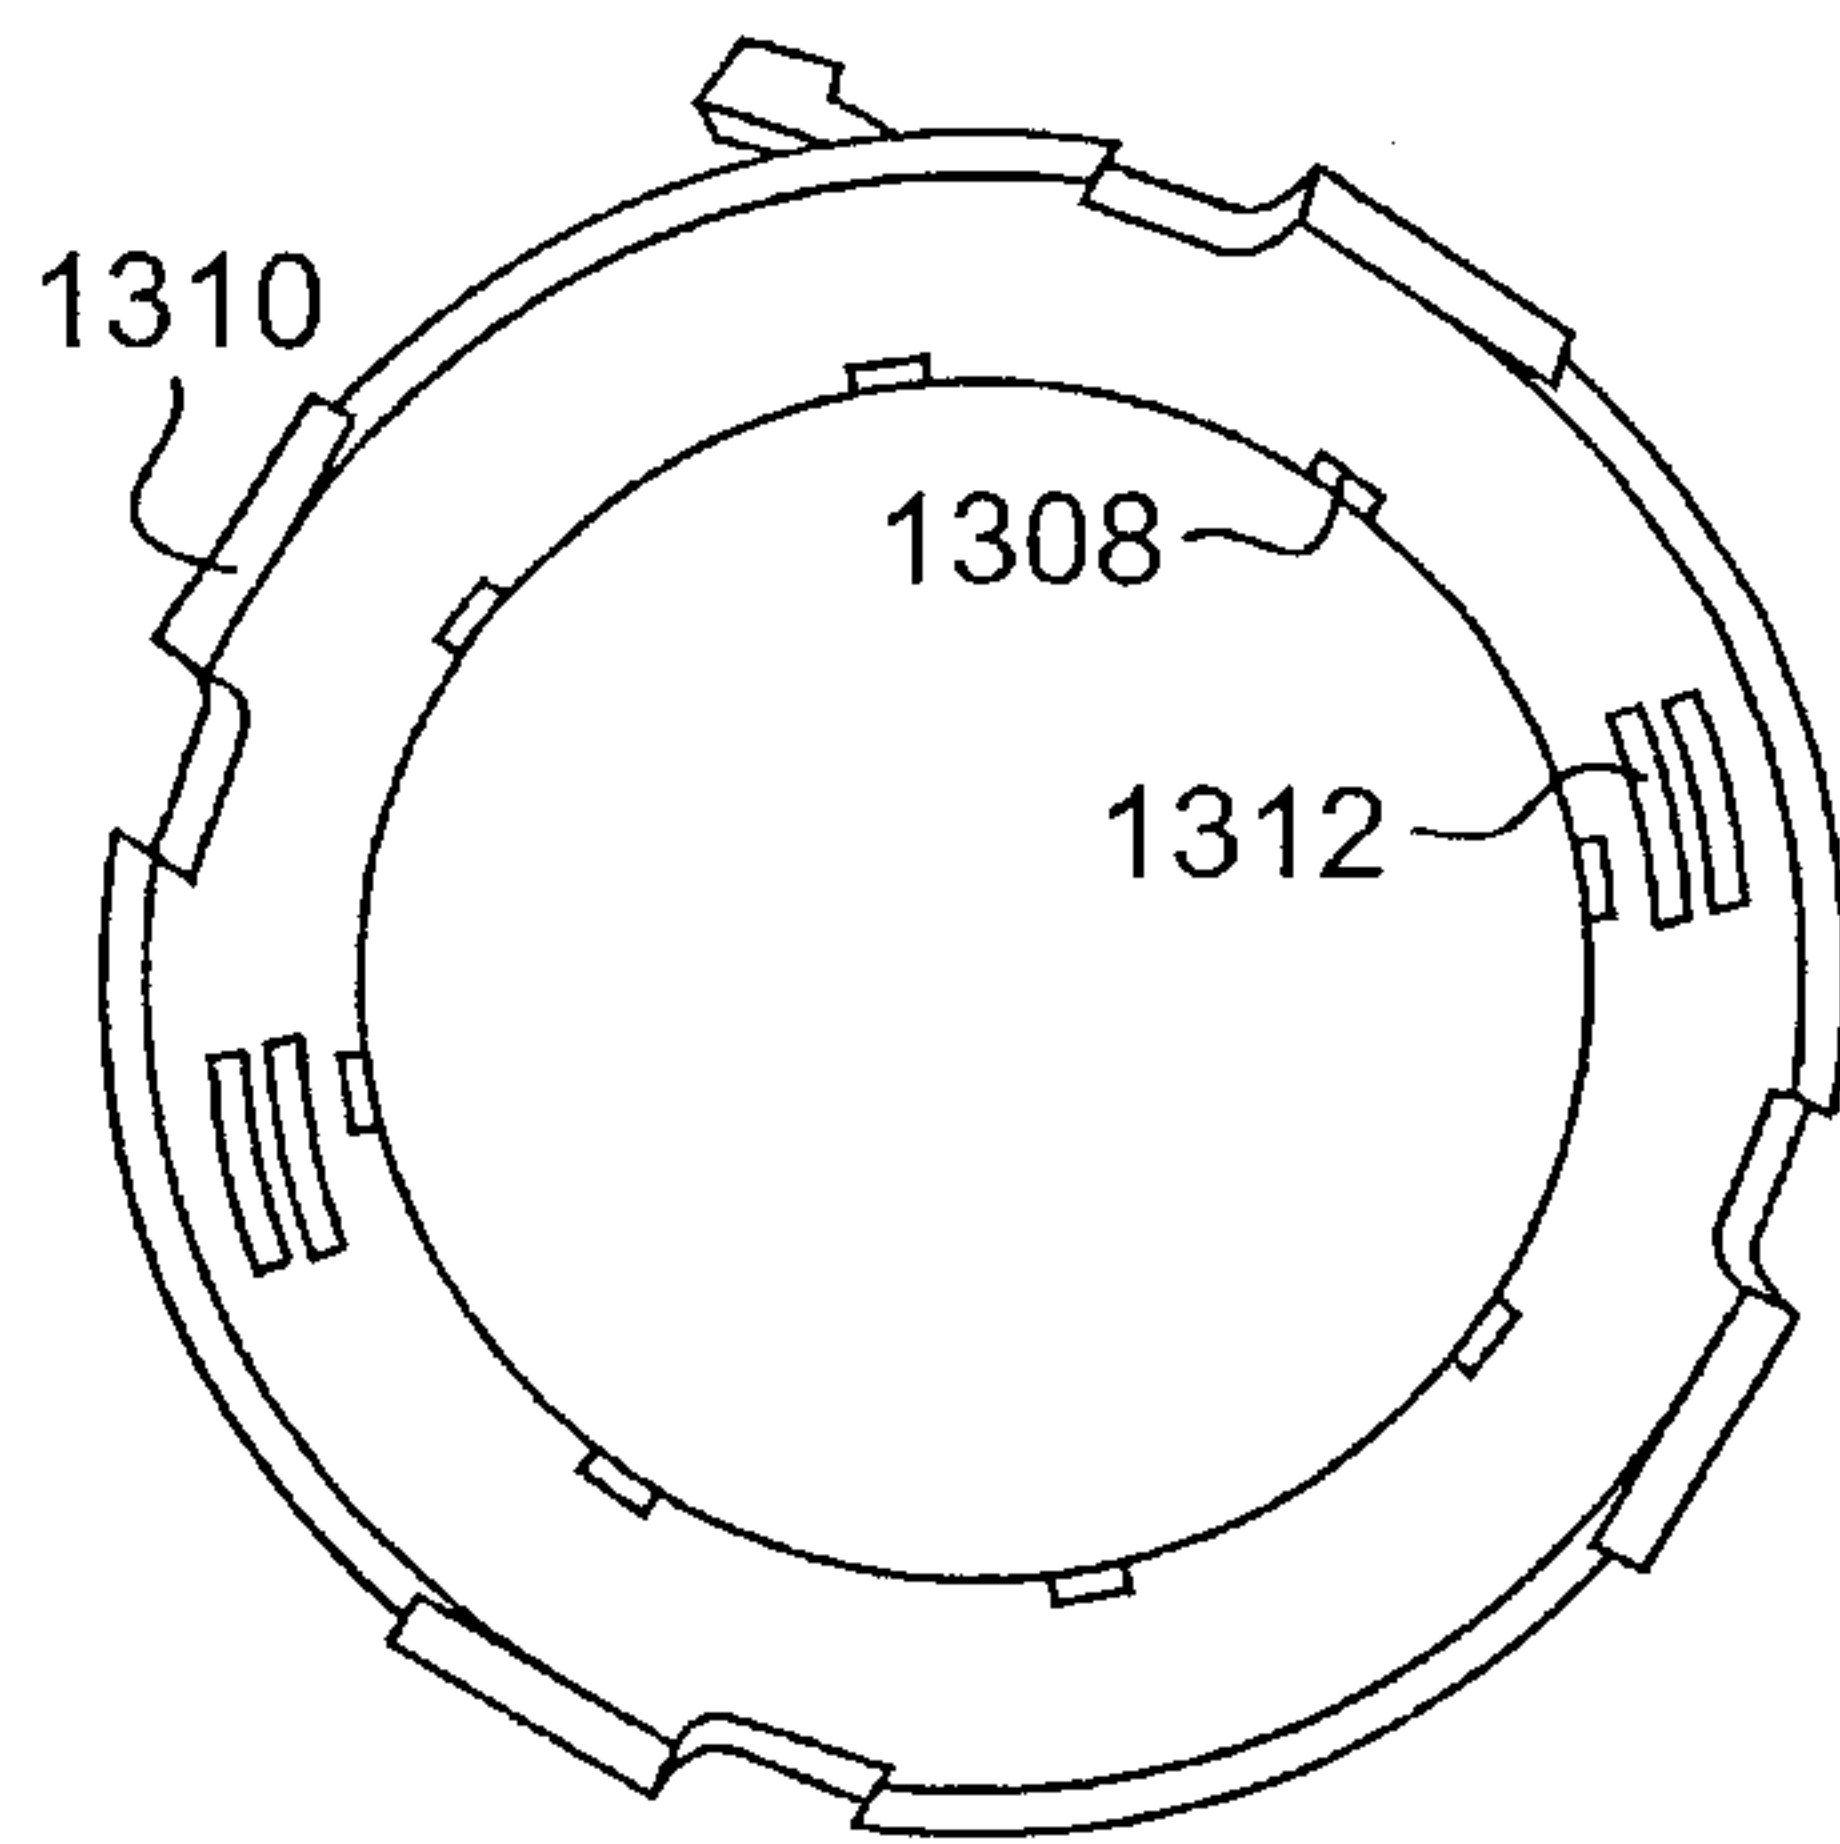


FIG. 13C

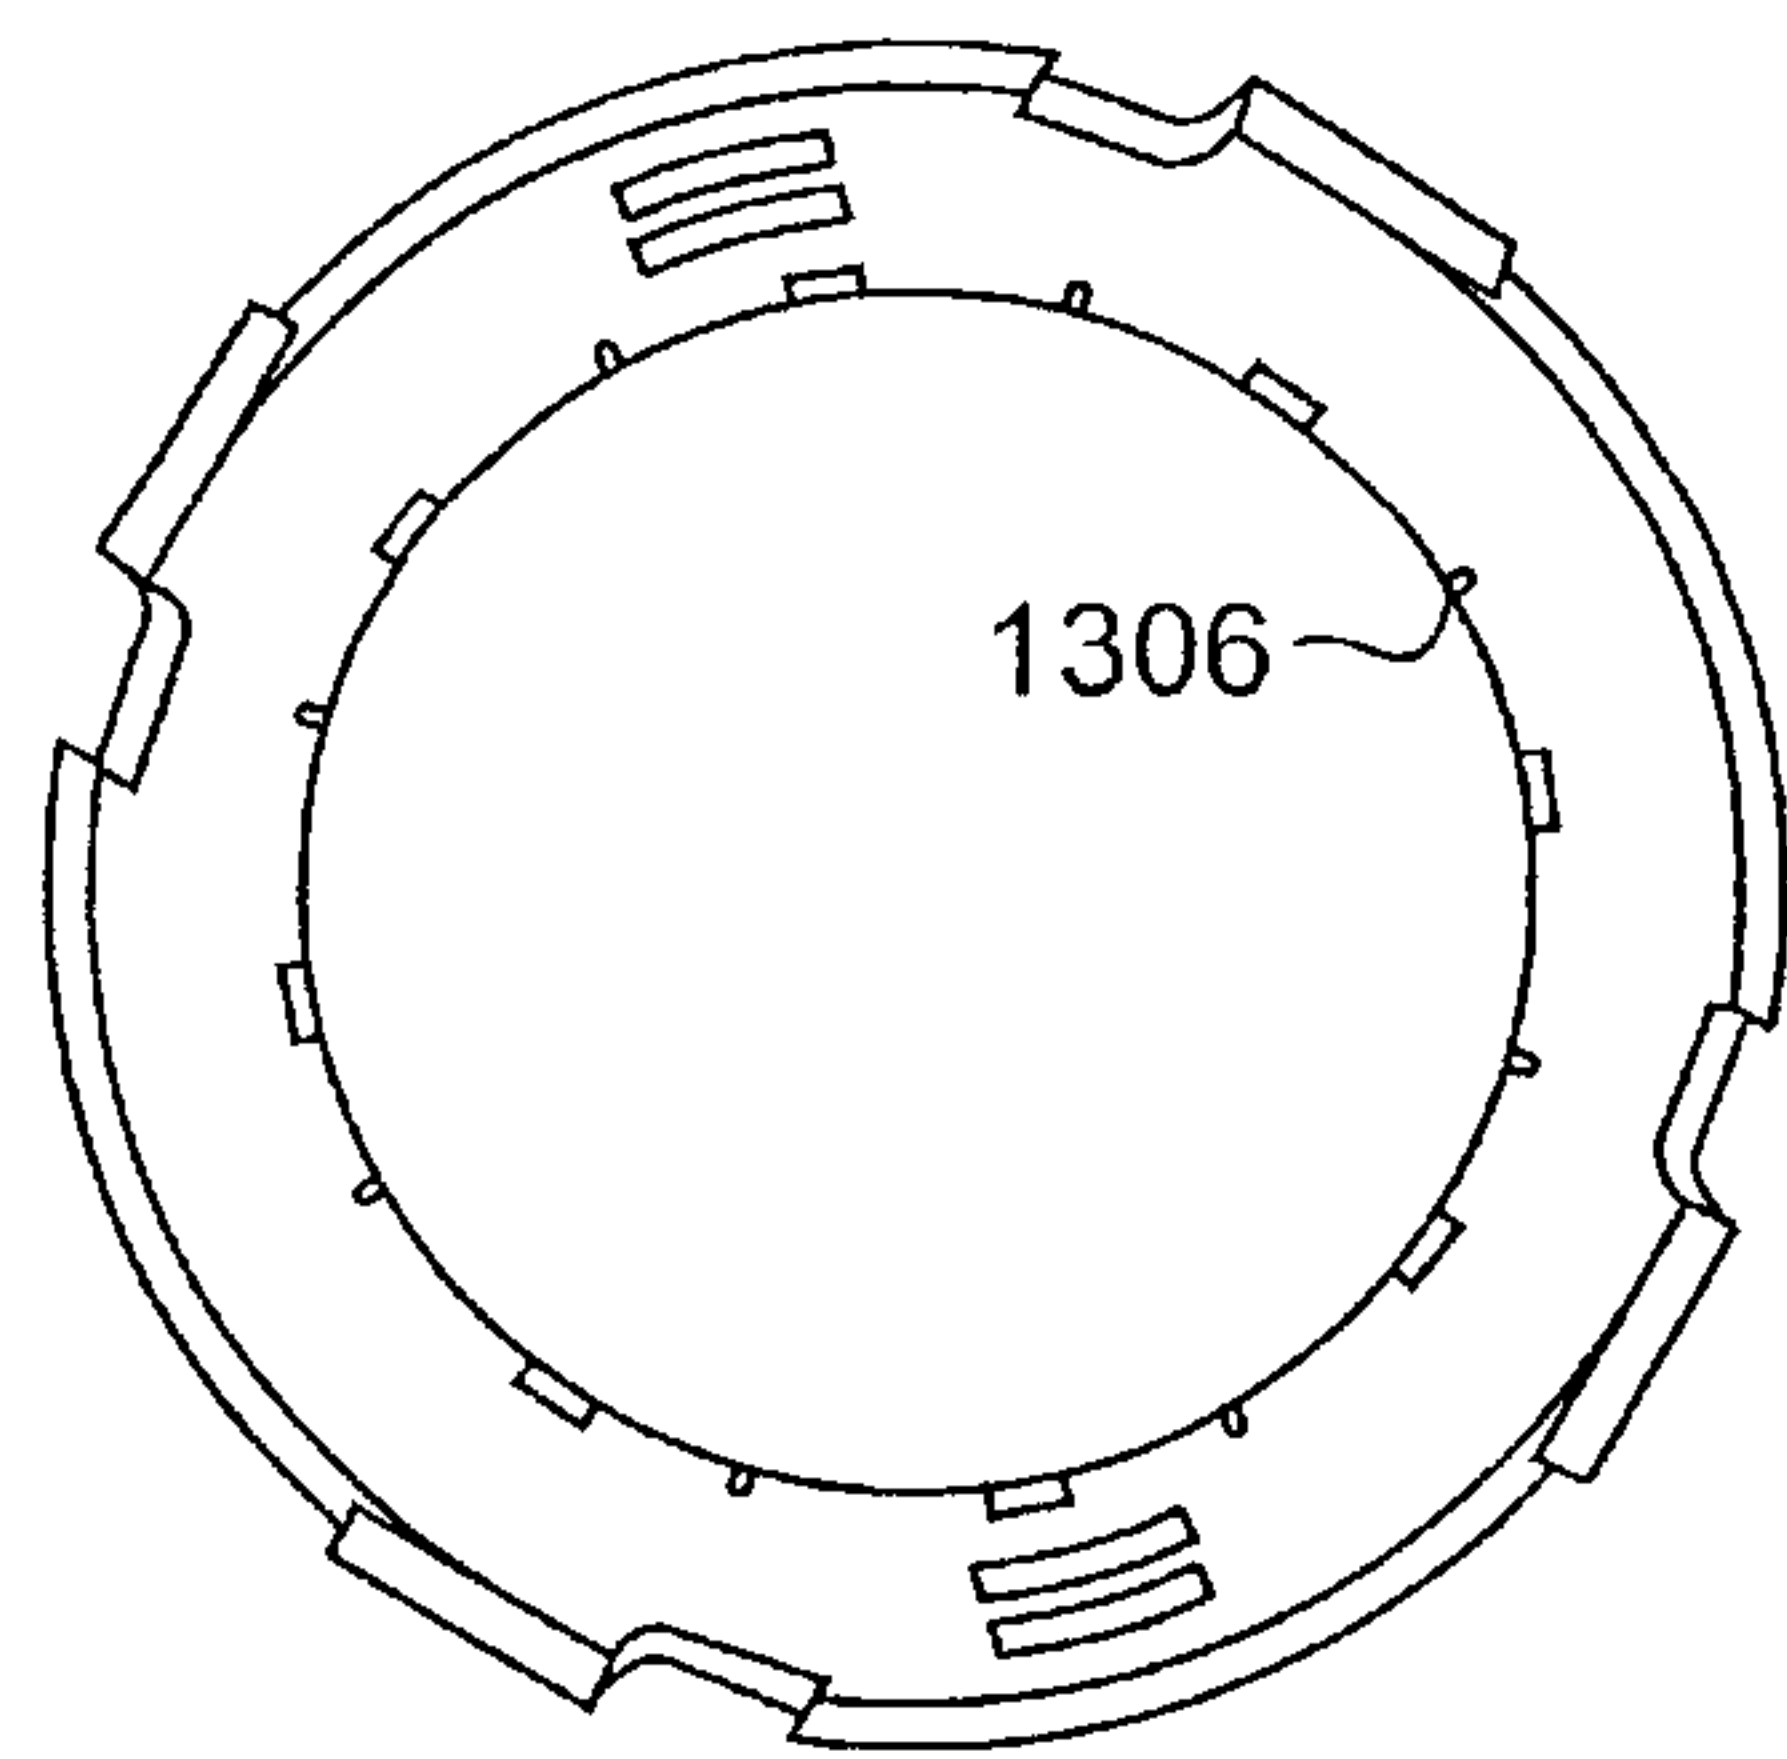
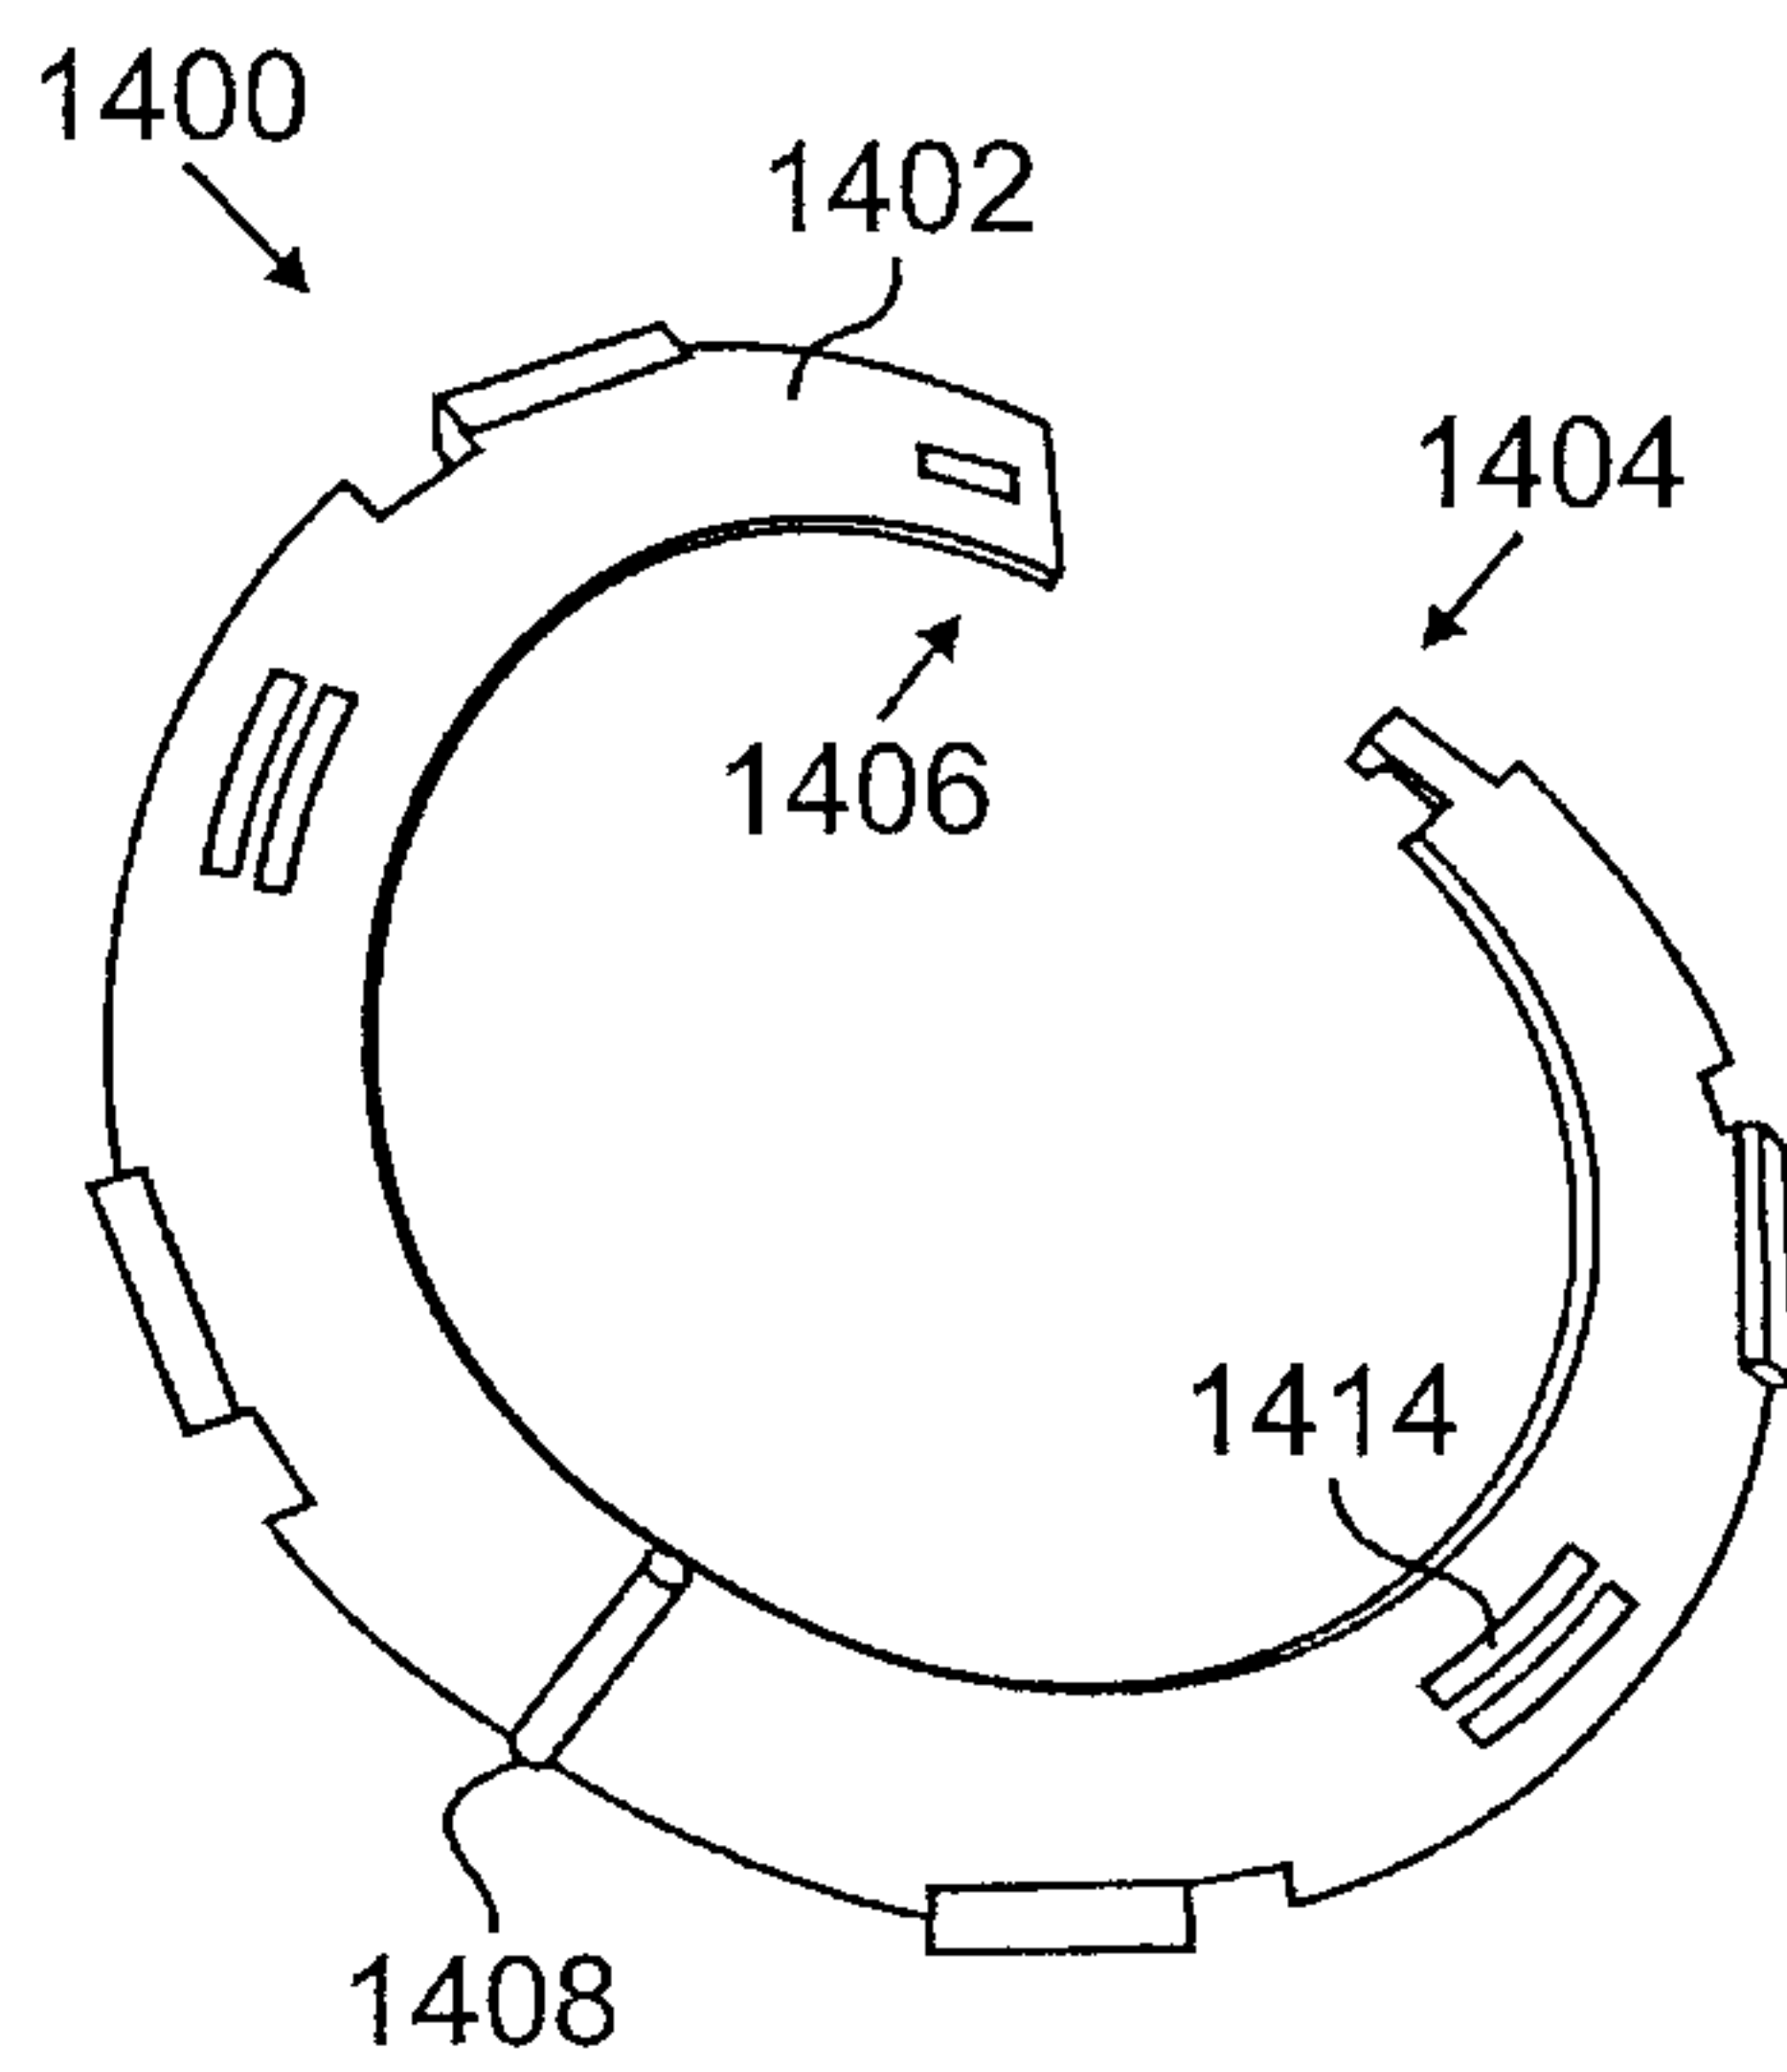
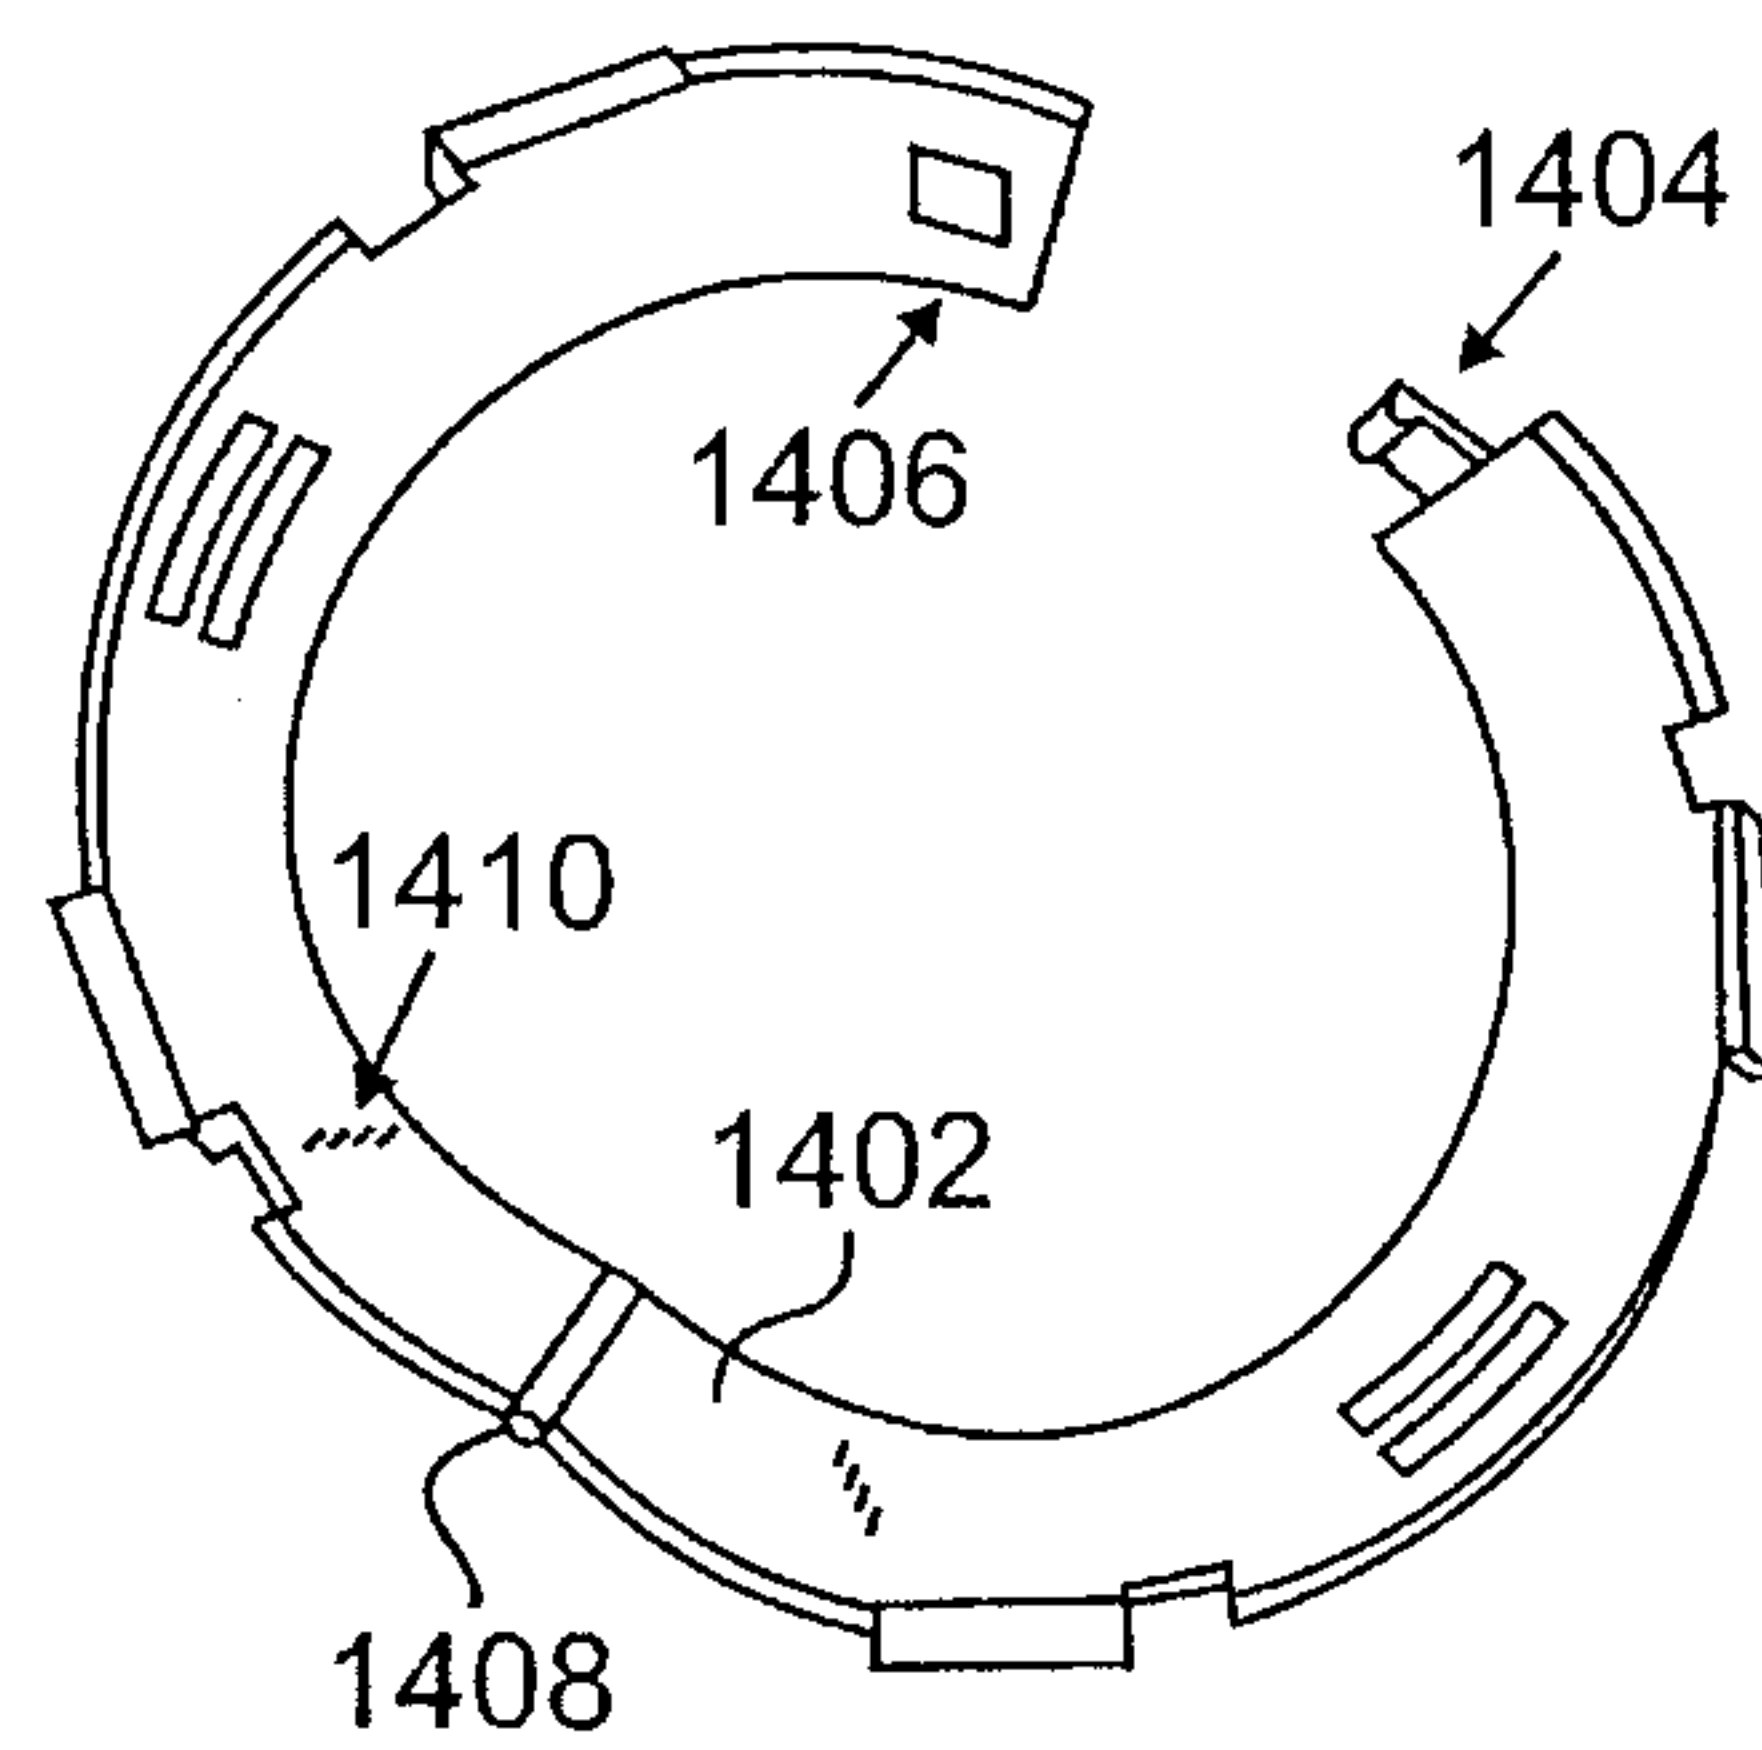
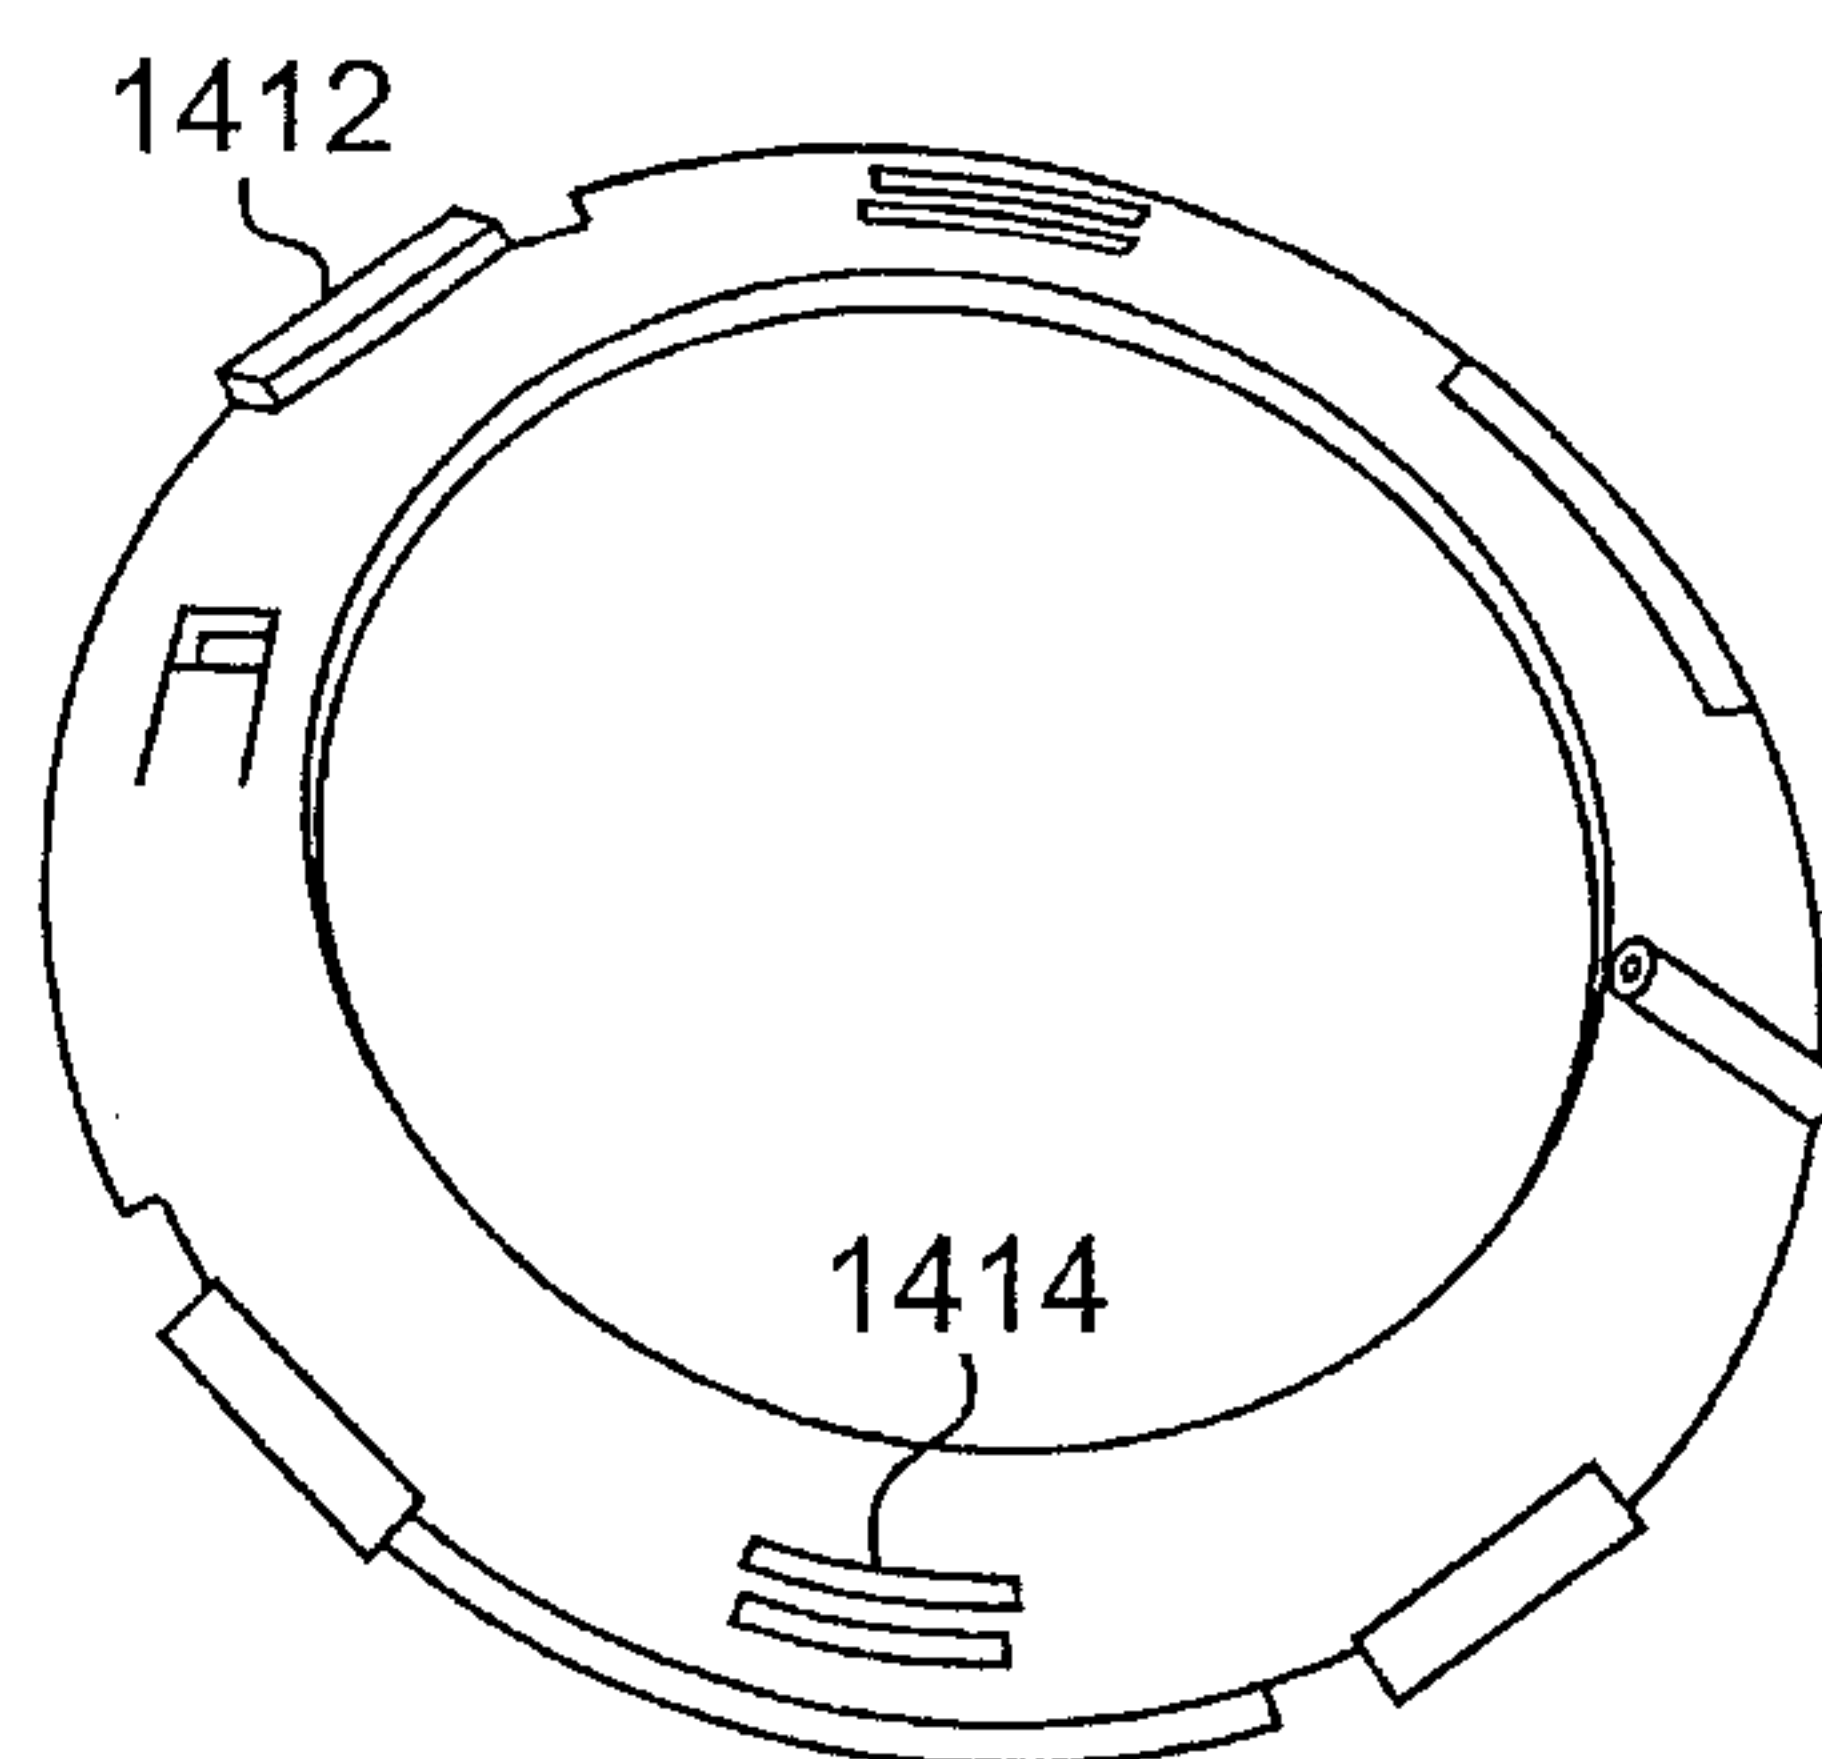
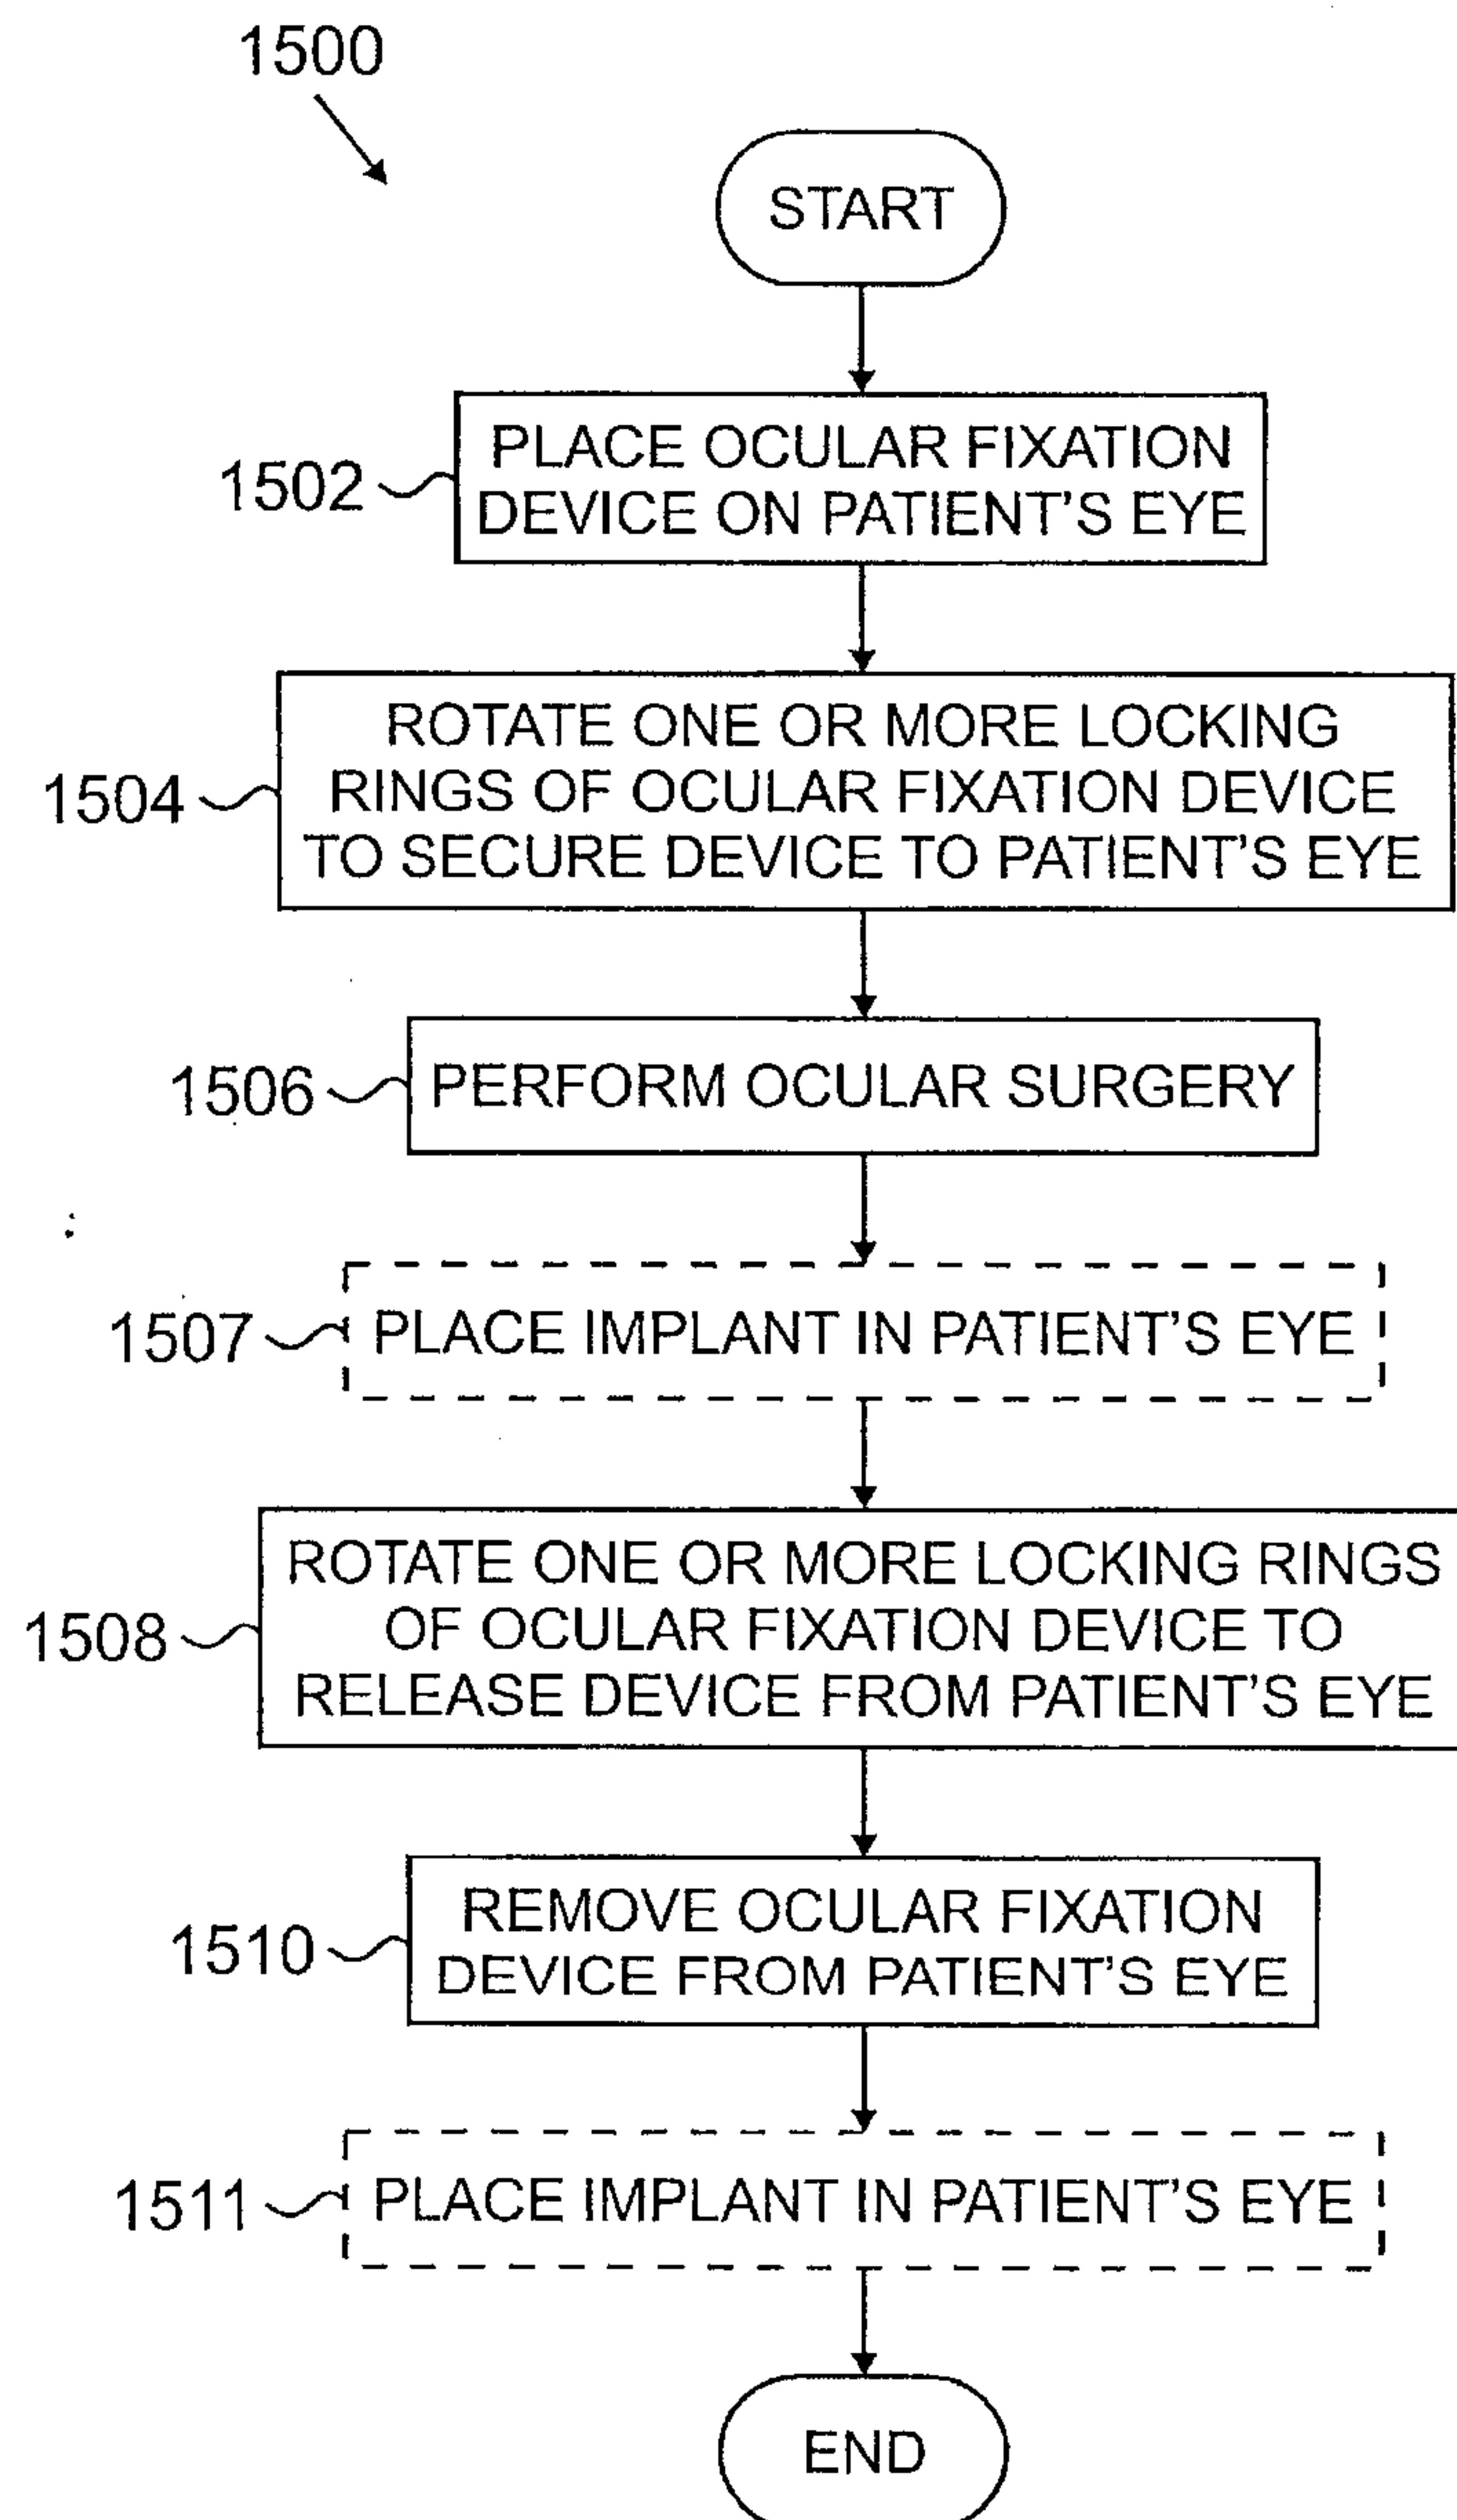


FIG. 13D

15/17

**FIG. 14A****FIG. 14B****FIG. 14C**

16/17

**FIG. 15**

17/17

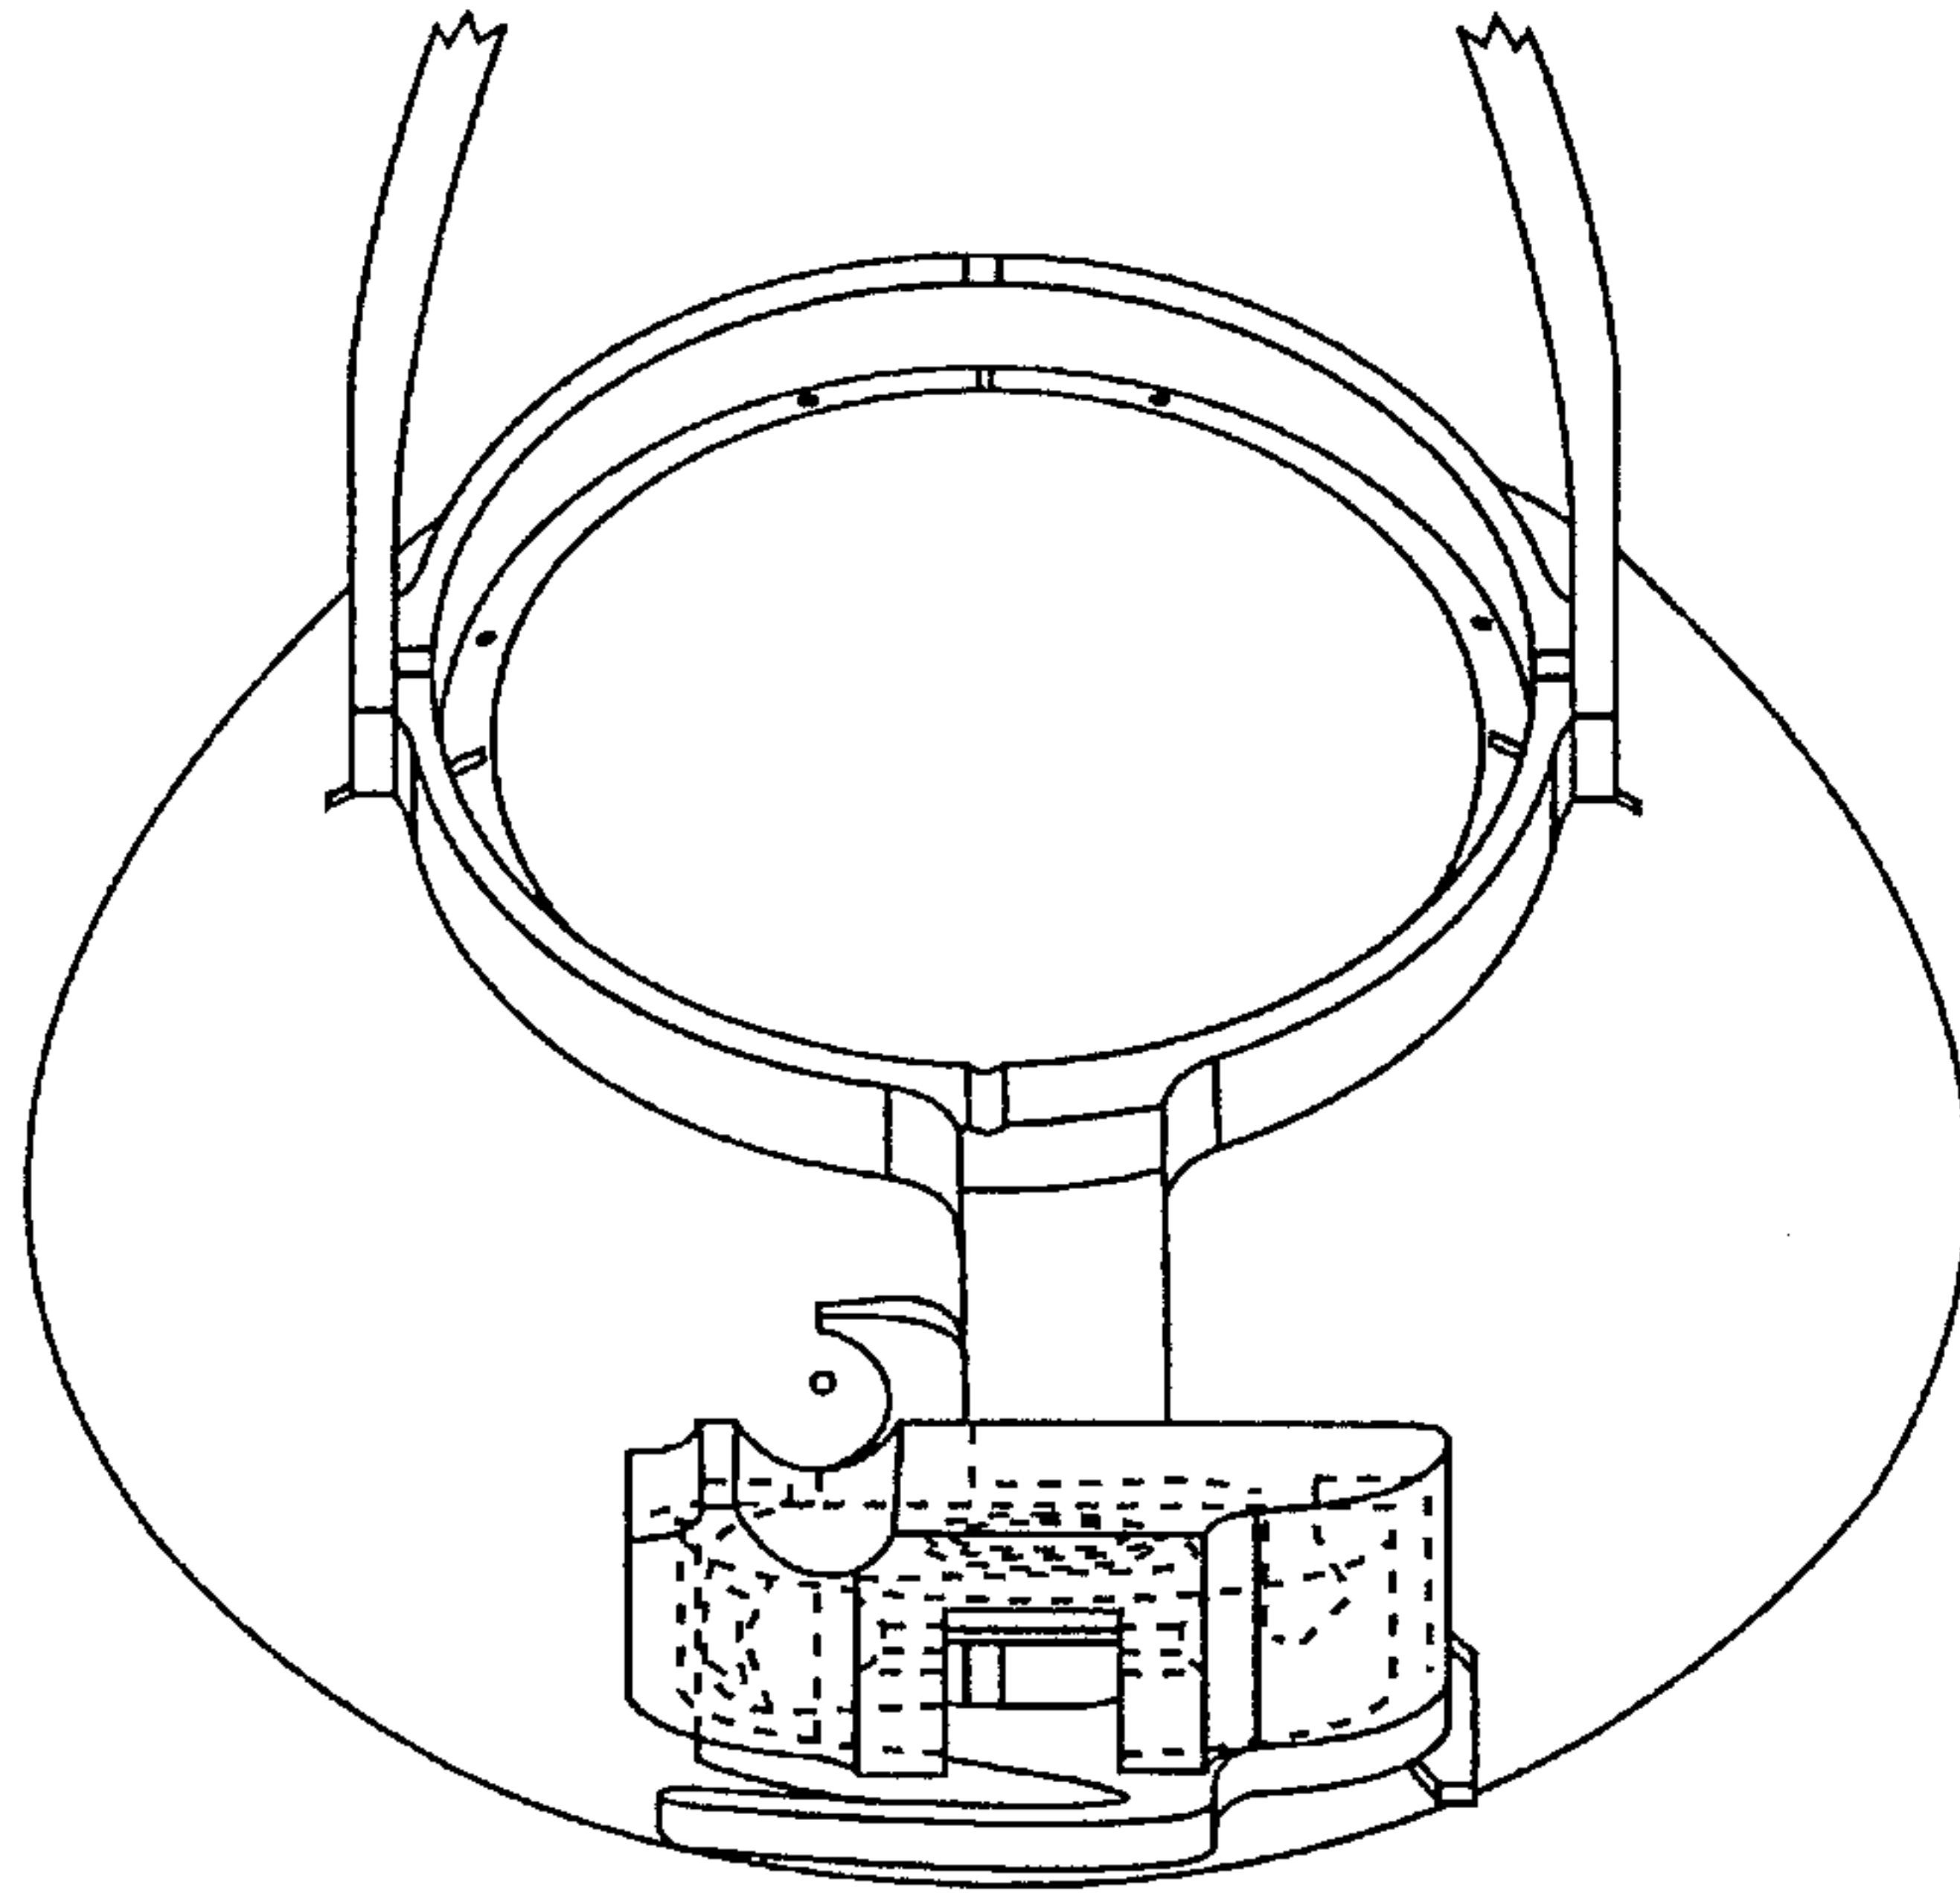


FIG. 17
(PRIOR ART)

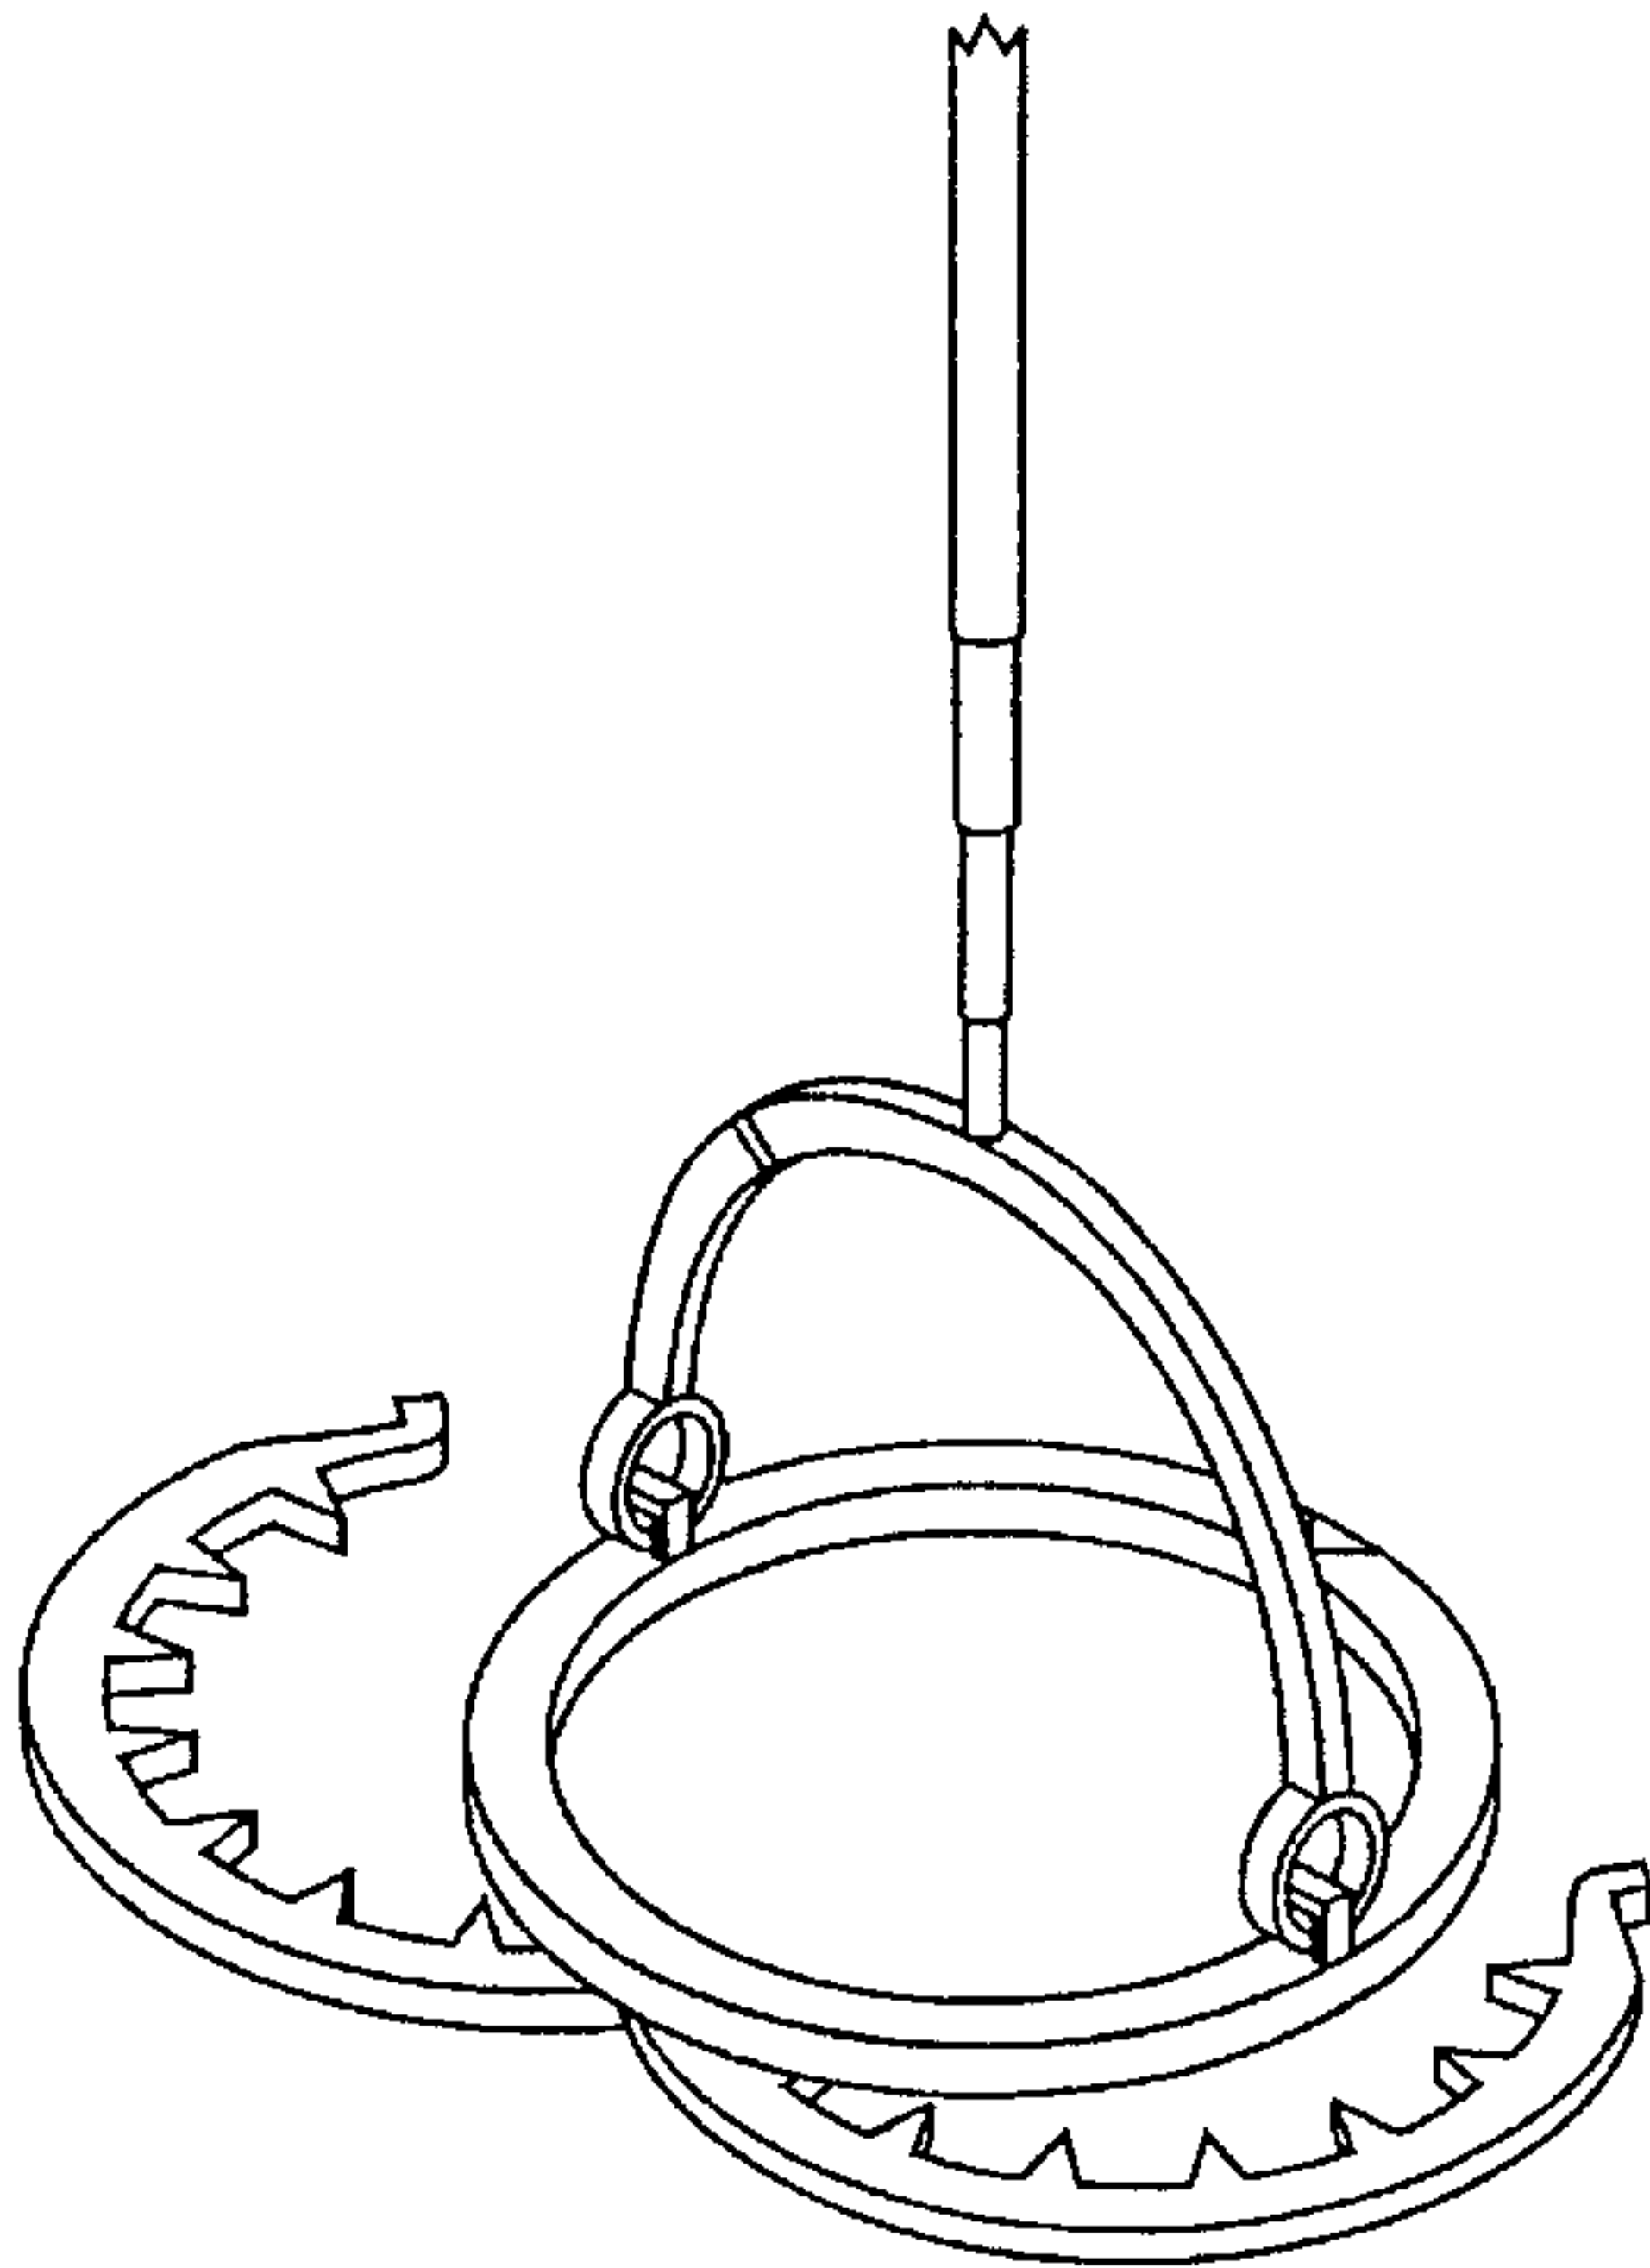


FIG. 18A
(PRIOR ART)

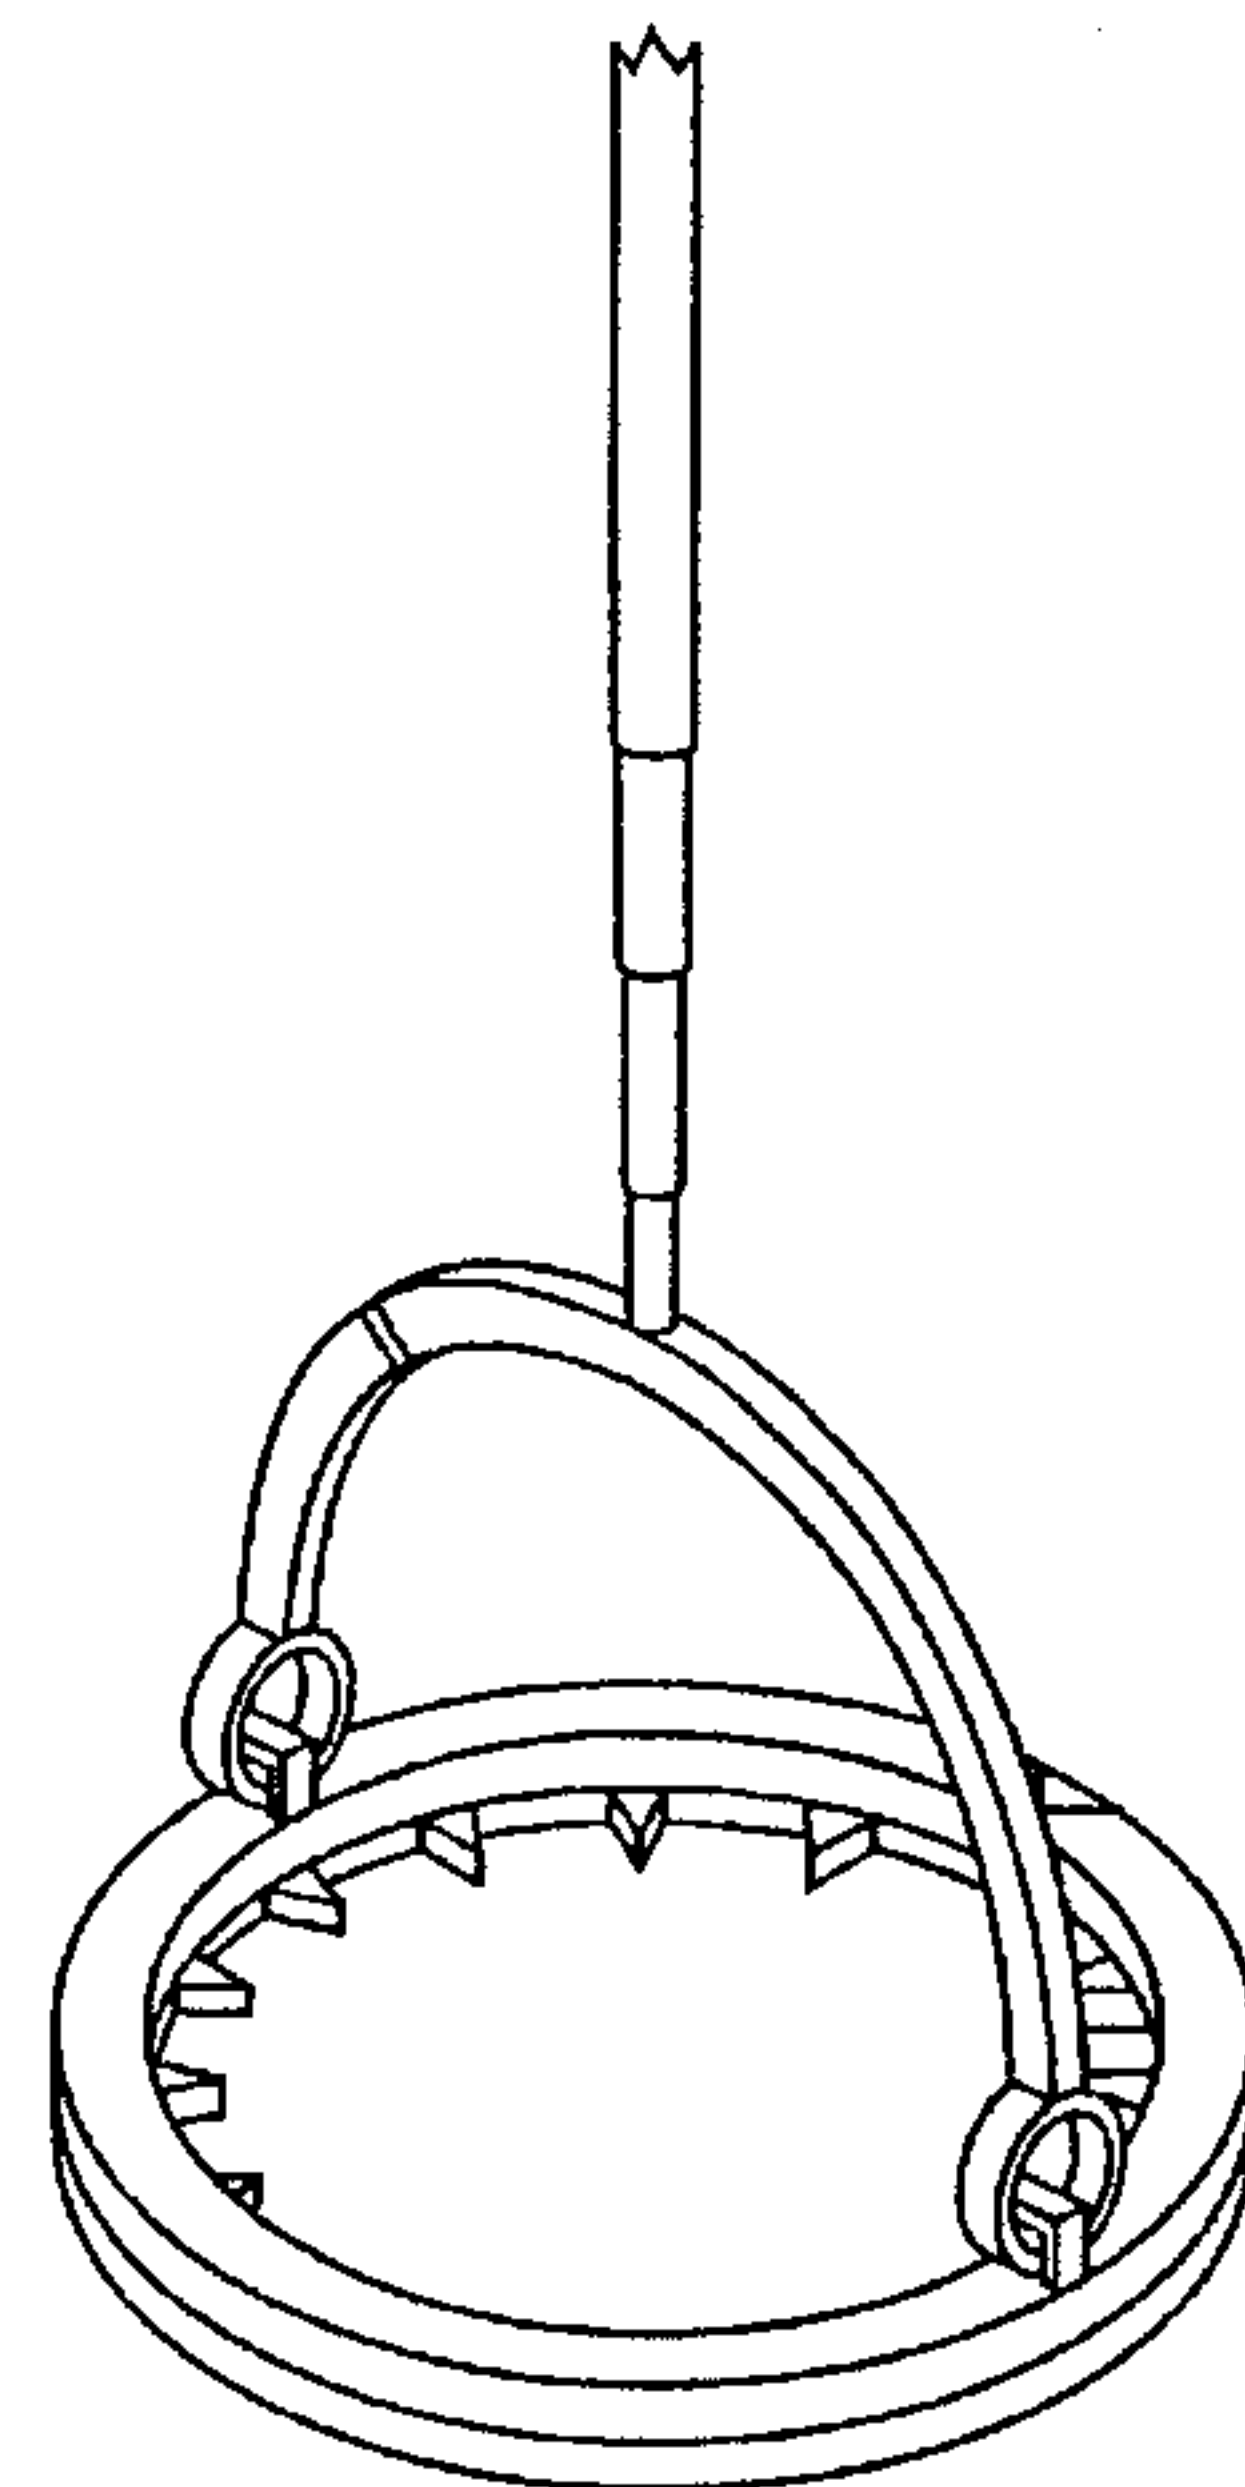


FIG. 18B
(PRIOR ART)

