




(86) Date de dépôt PCT/PCT Filing Date: 2013/08/09
(87) Date publication PCT/PCT Publication Date: 2015/02/12
(85) Entrée phase nationale/National Entry: 2016/01/26
(86) N° demande PCT/PCT Application No.: EP 2013/066745
(87) N° publication PCT/PCT Publication No.: 2015/018458

(51) Cl.Int./Int.Cl. *B67D 1/08* (2006.01),
B65D 51/16 (2006.01)
(71) Demandeur/Applicant:
PROMOLI, ERWIN, DE
(72) Inventeur/Inventor:
PROMOLI, ERWIN, DE
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : FERMETURE POUR ORIFICE DE REMPLISSAGE D'UN RECIPIENT DE LIQUIDE
(54) Title: CLOSURE FOR THE CHARGING HOLE OF A LIQUID CONTAINER

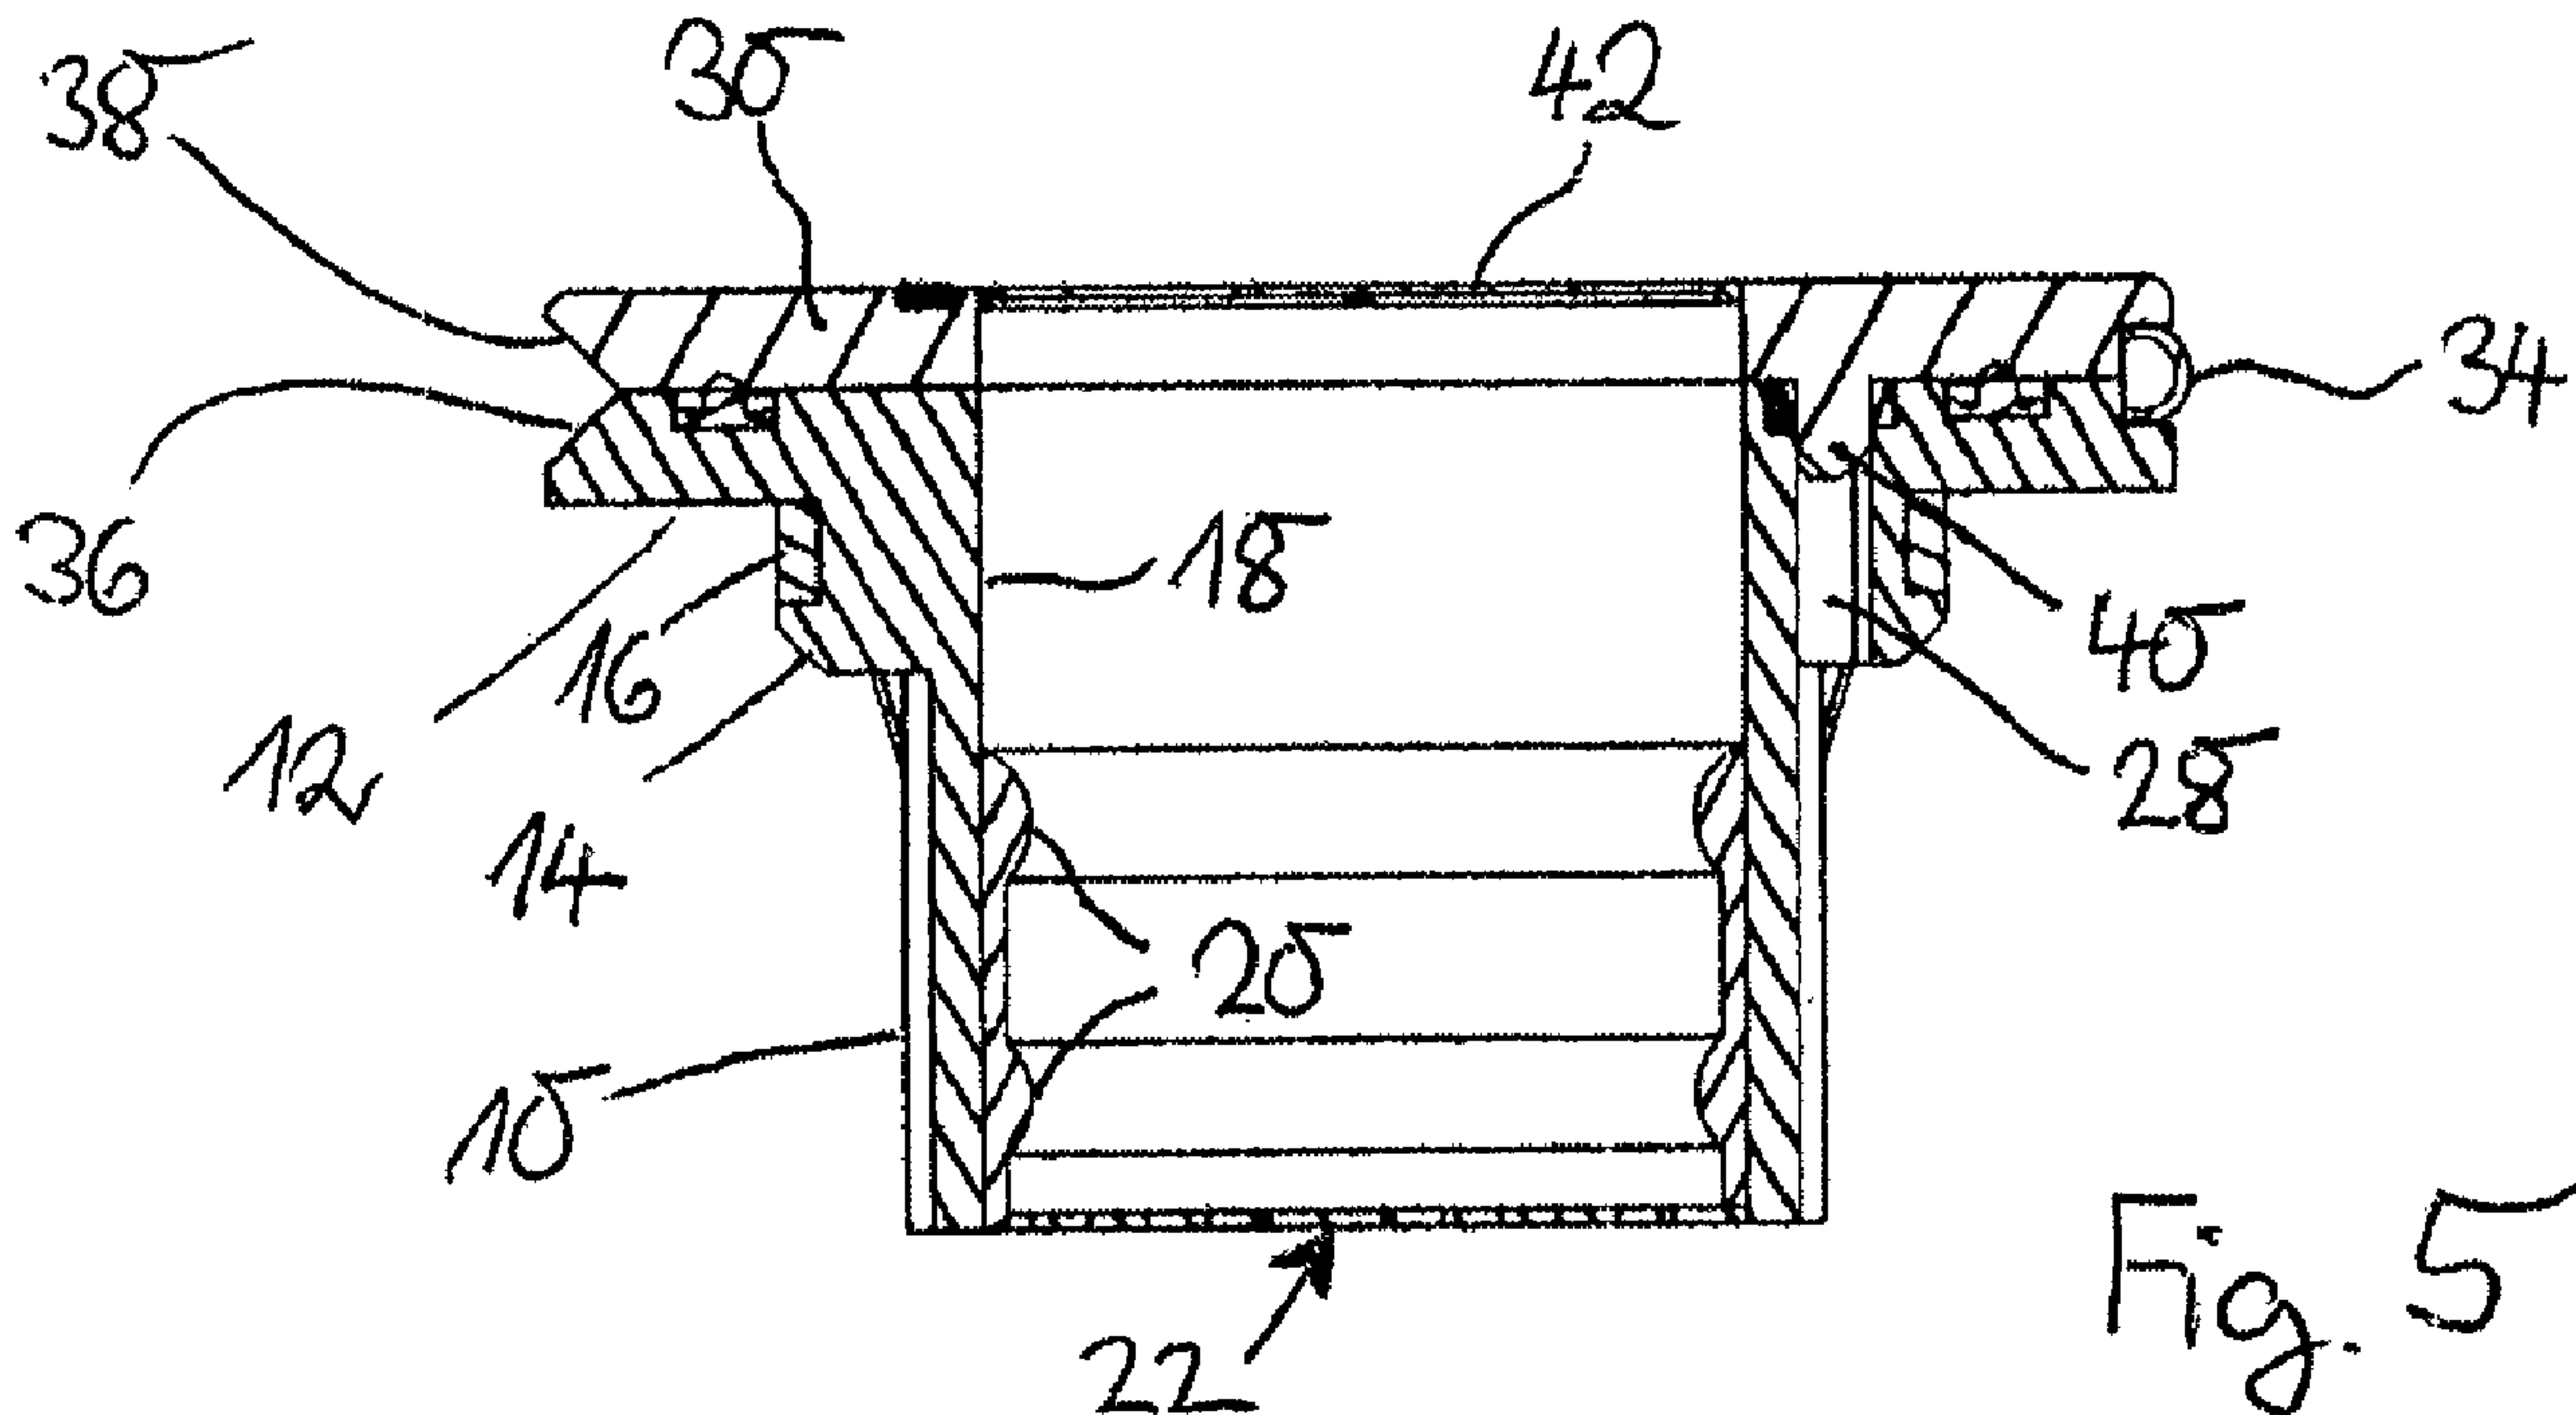

(57) Abrégé/Abstract:

The closure serves to tightly close the charging hole of a liquid container. Said closure permits tapping of the container at the charging hole. The closure is provided with a pressure-equalizing valve. A bung bush made of elastic material has, at a distance next to each other, an axial tapping channel (18) and an axial pressure-equalizing channel (28), which lead next to each other to an end surface (26) of the bung bush. A flap (30) is integrally coupled to the bung bush, which flap covers the end surface (26) in the closed position, closes the mouths of the channels (18, 28) in a manner tight to spray and blocks off the pressure-equalizing channel (28) in a pressure-tight manner. The flap (30) can be pivoted up and down manually in order to open up the pressure-equalizing channel (28) to a greater or lesser extent and thus to actuate the pressure-equalizing valve.

Abstract

The closure serves to tightly close the charging hole of a liquid container. It enables the container to be punctured at the charging hole. The closure is provided with a pressure equalising valve. A tapping bush of an elastic material has a an axial puncturing channel (18) and an axial pressure equalising channel (28) disposed adjacent to, and spaced from, one another, puncturing channel and the pressure equalising channel terminating at an end face (26) of the tapping bush next to one another. A flap (30) is integrally articulated to the tapping bush, the flap in its closed position covering the end face (26), closing the open ends of the channels (18, 28) in a splash-water tight manner, and blocking the pressure equalising channel (28) in a pressure tight manner. The flap (30) can be manually tilted up and down to unblock the pressure equalising channel (28) more or less, thereby actuating the pressure equalising valve.

Closure for the charging hole of a liquid container

Description

[0001] This invention relates to a closure for the charging hole of a liquid container having a tapping bush made of resilient material and seally fitting into the charging hole. The tapping bush has an axial puncturing channel at which the container may be tapped by means of the puncturing pipe of a tapping device, at wkich time the tapping bush is sealed by the puncturing pipe. The tapping bush is provided with a manually operable pressure equalising valve for blocking and unblocking a pressure equalising channel arranged between the head space of the container above the liquid level therein and atmosphere.

[0002] A closure of this type is known from WO 2001/014242 A1. It serves to tightly close the charging hole of a liquid container. Examples of such containers include barrels, kegs (party kegs) and cans filled with pressurised or unpressurised liquids, in particular beverages. Specifically concerned are party kegs for beer. The closure is a unit completely supplied to the bottler. It is pressed into the charging hole of the container at the end of the filling step, in deforming the tapping bush.

[0003] The tapping bush closure of WO 2001/014242 A1 is designed to be tapped by the puncturing pipe of a tapping device. The tapping bush of the closure has an axial puncturing channel which is closed by a tap plug fitted therein. For tapping, the puncturing pipe of the tapping device is inserted into the puncturing channel, and the tap plug is pushed into the container. The tapping bush is sealed by the puncturing pipe.

[0004] Drawing liquid from the container, however, does not necessarily require tapping at the charging hole. Relevant containers often have a lower discharge opening separate from the charging hole. The discharge opening may be a tapping hole that is tapped by a tapping device or the like, or a faucet integrated in the container.

[0005] In WO 2001/014242 A1, the closure for the charging hole is provided with a pressure equalising valve at the top wall of the container. A pressure equalising channel extends through the tapping bush between the head space of the container above the liquid level therein and atmosphere. The pressure equalising channel is blocked prior to use. It can be unblocked, re-blocked, again unblocked etc. by manually rotating the pressure equalising valve.

[0006] In beer kegs, a considerable excess pressure my build up due to shocks occurring during shipping and/or heating with the result that, at the beginning, almost only froth will be drawn. It is recommendable carefully to diminish this excess pressure via the pressure equalising valve prior to the first tapping.

[0007] When unpressurised liquid is drawn from the lower discharge opening, a vacuum is generated in the container above the liquid level. The container can be aerated by means of the pressure equalising valve to diminish this vacuum.

[0008] In the tapping bush closure of WO 2001/014242 A1, the tap plug located within the puncturing channel also constitutes the valve member of the rotary pressure equalising valve. The pressure equalising channel is a radial bore which penetrates the tapping bush laterally and leads to the inner jacket of the puncturing channel. Depending on the rotary position of the tap plug, the opening of the pressure equalising channel into the puncturing channel is blocked or more or less unblocked. Pressure equalisation then takes place through the puncturing channel.

[0009] The tapping bush closure of WO 2001/014242 A1 has a structure including at least two parts. The rotary tap plug is a part separate from the tapping bush.

[00010] Multiple part tapping bush closures for the charging hole of a liquid container, which can be punctured and include a pressure equalising valve, are also known from DE 10 2006 056 062 A1, DE 100 00 335 A1 and DE 199 52 473 C2.

[00011] In the closure of DE 10 2006 056 062 A1, a sleeve is screwed into the central opening of the tapping bush, which forms the puncturing channel for the puncturing pipe of a tap device. The inner end of the tapping bush is pressure-tightly closed by a wall, the rim of which is connected to the tapping bush via a predetermined breaking portion. The wall is punctured by the puncturing pipe. Alternatively, the wall can be ruptured by screwing the sleeve to cause pressure equalisation. The puncturing channel is covered outside of the sleeve by a puncturable diaphragm.

[00012] The tapping bush closure of DE 10 2006 056 062 A1 has a structure including at least two parts. The rotary sleeve is a part separate from the tapping bush.

[00013] In the closure of DE 100 00 335 A1, the tapping bush is provided with a seal which serves as a protection against contamination and a visible indication of the intactness of the closure, but may also be used for closing the container in a gas-tight and pressure tight manner.

[00014] The closure of DE 199 52 473 C2 includes at least three parts.

[00015] It is the object of the invention to devise a closure for the charging hole of a fluid container which can be punctured like the known closures and is provided with a pressure equalisation valve, but is of a rather less expensive structure and intuitively easier to operate, and satisfies highest hygienic requirements.

[00016] In a closure which meets this object, the puncturing channel and the pressure equalising channel of the tapping bush are spatially and functionally separated. The pressure equalising channel extends axially through the tapping bush laterally of the puncturing

channel and spaced therefrom and opens at an end face of the tapping bush laterally of, and spaced from, the puncturing channel. The tapping bush is provided with an integrated hinged flap which, in a downward tilted closing position, covers the end face, closes the openings of the puncturing channel and the pressure equalising channel in a splash water tight manner and blocks the pressure equalising channel in a pressure tight manner, i.e. impermeable to gas and resistant to pressure. The flap can be manually tilted up and down to unblock the pressure equalising channel more or less, thus operating the pressure equalising valve.

[00017] The closure in accordance with the invention may be manufactured integrally in one step by two or three component plastic injection moulding, so-called assembling injection moulding. No special step is required for assembling plastic parts which are initially produced separately. This results in advantages as to hygiene and cost. The integral structure of the closure is made possible by providing the pressure equalising valve on the flap. Covering the openings of the puncturing channel and the pressure equalising channel by the flap serves hygienic purposes. Entry of splash water and pollution is obviated. The operation of the pressure equalising valve by tilting the flap is intuitively convenient for the user because the tapping lever of a conventional faucet is operated in the same way. The flap offers a long lever for effortless and smooth operation of the pressure equalising valve.

[00018] In a preferred embodiment, the tapping bush is substantially axially symmetric. It has a tapered body with an outward projecting flange by which it rests on the container wall in which the charging hole of the container is located. The puncturing channel is a channel passing centrally through the tapping bush. The pressure equalising channel extends through the flange of the tapping bush and terminates short of the flange at the periphery of the tapered body of the tapping bush.

[00019] In a preferred embodiment, the flap has an integral plug-type valve cross-piece which fits into the pressure equalising channel and blocks the same in a pressure tight manner when the flap is tilted downward. By an upward rotation of the flap, the valve cross-piece can be pulled out of the pressure equalising channel to open a flow path for pressure equalisation.

[00020] In a preferred embodiment, the valve cross-piece is of a conical shape which serves to regulate the pressure by actuation of the pressure equalising valve.

[00021] In a preferred embodiment, the pressure equalising channel and the valve cross-piece fitted therein have an elongate oval cross-section extending in the circumferential direction.

[00022] In a preferred embodiment, the flap is articulated to a side of the tapping bush by an integrated hinge close to the pressure equalising channel so that the latter is located

between the integrated hinge and the puncturing channel. The flap thereby forms a single-arm lever with a long lever arm for actuating the pressure equalising valve.

[00023] In a preferred embodiment, the flap is provided with a seal which is conspicuously destroyed by the first upward rotation of the flap. Specially envisaged is an adhesive bond which not only indicates the integrity of the closure in the sense of an originality seal but also secures the closure against the application of force and inadvertent maloperation.

[00024] In a preferred embodiment, the closure is manufactured by multiple-component plastic injection moulding, specifically two-component plastic injection moulding from a hard component and a soft seal component, or three-component plastic injection moulding from a hard component, a soft seal component, and a colour component having a colour different from the afore-mentioned components. The seal consists of the colour component.

[00025] In a preferred embodiment, the interior of the tapping bush is closed in a pressure tight manner by an integral bottom which can be punctured by the puncturing pipe of a tapping device.

[00026] In a preferred embodiment, the rim of the bottom has a predetermined breaking location with webs of the hard component and intervening parts of the seal component. The presence of the two plastic components at the predetermined breaking location ensures small effort in puncturing the bottom and a safe gas-tight and pressure-resistant tightness of the predetermined breaking location.

[00027] In a preferred embodiment, the flap is provided with a diaphragm which, in the downward tilted closing position of the flap, lies in front of the opening of the puncturing channel and can be punctured by the puncturing pipe of a tapping device. The diaphragm seals the puncturing channel against splash water and contamination. It tells the user where the container may be punctured, irrespective of any pressure equalisation due to actuation of the flap.

[00028] In a preferred embodiment, the puncturing channel is substantially cylindrical, notwithstanding an annular bead or a plurality of axially offset annular beads that may be provided on the jacket of the puncturing channel. Preferably, the diaphragm on the flap is circular with a diameter corresponding to the clear width of the puncturing channel.

[00029] In a preferred embodiment, the diaphragm is provided with radially extending predetermined breaking locations equally spaced along the circumference.

[00030] In a preferred embodiment, the rim of the diaphragm has a predetermined breaking location with webs of the hard component and intervening parts of the seal component. The presence of the two plastic components at the predetermined breaking location ensures small effort in puncturing the diaphragm and a good tightness of the predetermined breaking location.

[00031] The bottom at the inner end of the tapping bush and the diaphragm on the flap are preferably designed to tear open without breaking away when punctured. Its fragments get caught thereby guiding the puncturing pipe without impairing its seal. Nothing, absolutely nothing, is pushed into the liquid container. This is preferred for hygienic reasons.

[00032] In a preferred embodiment, the closure is integrally manufactured in one step by three-component assembling injection moulding. The closure is moulded from the hard component and the seal component with the flap in its open position, and the flap of the closure, while still in the injection moulding tool, is closed and coated with the colour component. While the injection moulding tool used therefor is rather expensive the mass production of the closure is cost-efficient and definitively very hygienic.

[00033] The invention will be explained below with reference to an embodiment shown in the drawings. What is shown is a closure for the charging hole of a liquid container in which pressure equalisation takes place by operating a flap,

Figs. 1 to 5 showing the closure with the flap in its closed seal position, and

Figs. 6 to 10 with the flap in its open pressure equalising position, wherein:

Fig. 1 is a perspective view,

Fig. 2 is a side view,

Fig. 3 is a plan view from above,

Fig. 4 is a plan view from below,

Fig. 5 is a diametric cross-sectional view,

Fig. 6 is a perspective view,

Fig. 7 is a side view,

Fig. 8 is a plan view from above,

Fig. 9 is a plan view from below, and

Fig. 10 is a diametric cross-sectional view,

[00034] The closure in accordance with the invention serves to tightly close the charging hole of a container filled with liquid. Examples of such containers include barrels, kegs (party kegs) and cans in which beverages are filled without pressure or under pressure. Specifically concerned are party kegs for beer which are conventionally made of sheet metal and have a charging hole in the top wall.

[00035] A part of the closure in accordance with the invention is a tapping bush of an elastic material, which may be described as substantially axially symmetric. The tapping bush has a tapered body **10** with a radially outward projecting circumferential flange **12**.

[00036] Upon filling a party keg, the tapping bush is pressed under elastic deformation, with the tapered body **10** leading, into the charging hole in the top wall of the party keg until the flange **12** abuts the top wall. The outer jacket of the tapered body has circumferentially

equally spaced ramps **14** which widen in the pressing direction of the tapping bush. Between the ramps **14** and the flange **12** of the tapping bush, the diameter of the tapping bush is reduced to form an annular groove **16** which catches the rim of the charging hole.

[00037] The puncturing pipe of a tapping device may be inserted into a nearly circular-cylindrical puncturing channel **18** which extends axially through the centre of the tapping bush, to puncture the container and draw liquid therefrom.

[00038] On the cylindrical jacket wall of the puncturing channel **18**, the tapping bush has two axially offset circumferential beads **20** projecting inward into the cylindrical opening of the puncturing channel **18**. The circumferential beads **20** serve to guide and seal the puncturing pipe.

[00039] The inner end of the puncturing channel **18** is closed by a bottom **22** which is formed integrally with the tapered body **10** of the tapping bush and constitutes the inner end thereof. The bottom **22** withstands the internal pressure of the container.

[00040] The outer periphery of the bottom **22** is provided with a predetermined breaking location **24** which extends over about three quarters of the bottom periphery. On tapping, the bottom **22** is punctured and torn open by the puncturing pipe of the tapping device.

[00041] The puncturing channel **18** has an open outer end at a planar end face **26** of the flange **12**. Laterally of the mouth of the puncturing channel **18** and spaced therefrom, Figs. 6 and 8 show a separate pressure equalising channel **28** which extends through the flange **12** and terminates immediately below the annular groove **16** for the rim of the container at the outer periphery of the tapered body **10**. The pressure equalising channel **28** extends axially throughout the length and laterally of the puncturing channel **18**. It connects the head space of the container above the liquid level thereof with the atmosphere.

[00042] The pressure equalising channel **28** is axially symmetric and has an elongate oval cross-section extending in the circumferential direction.

[00043] A flap **30** is formed integrally with the tapping bush, the flap being adapted to cover the end face **26** of the flange **12** and close the open ends of the puncturing channel **18** and the pressure equalising channel **28** in a splash-water tight manner.

[00044] The flap **30** is a planar circular disc. In the closed position, the flap **30** fits and latches between retaining webs **32** which project outward from the end face **26** of the flange **12** at the periphery thereof.

[00045] At the height of the flange **12**, the flap **30** is laterally connected to the tapping bush via an integral hinge **34**.

[00046] On the side opposite to the integral hinge **34**, the flange **12** and the flap **30** have chamfers **36**, **38** which form a circumferential notch of triangular cross-section when the flap **30** is closed. The user will grip the flap **30** from below at the notch for tilting the flap upward.

[00047] The integral hinge **34** of the flap **30** is aligned in the circumferential directional with the pressure equalising channel **28**. The pressure equalising channel **28** is adjacent to the integral hinge **34**, more exactly between the integral hinge **34** and the puncturing channel **18**.

[00048] Opposite to the pressure equalising channel **28**, on the other side of the integral hinge **34**, a plug-type valve cross-piece **40** is formed integrally with the inner side of the flap. The valve cross-piece **40** is substantially a complementary mirror image of the mouth of the pressure equalising channel **28**. However, it engages the mouth with a taper that widens the latter. The valve cross-piece **40** is axially symmetric and has an elongate oval cross-section extending in the circumferential direction. When the flap **30** is closed, the valve cross-piece **40** blocks the pressure equalising channel **28** in a pressure tight manner.

[00049] A circular diaphragm **42** is formed in the centre of the flap **30**, the diameter of the diaphragm corresponding to the clear width of the puncturing channel **18**. The diaphragm **42** is provided with circumferentially equally spaced, radially extending predetermined breaking locations **44**. On tapping, the diaphragm **42** is punctured and torn open by the puncturing pipe of the tapping device.

[00050] Prior to the first use, the flap **30** takes a downward tilted closed position in which it latches with the flange **12** of the tapping bush, covers the open ends of the puncturing channel **18** and the pressure equalising channel **28**, and blocks the pressure equalising channel **28** with the valve cross-piece **40** engaging the latter. In this position, the flap **30** is fixed by a seal **46** which is conspicuously destroyed when the flap **30** is tilted upward for the first time.

[00051] The seal **46** is formed by a straight narrow strip of material which straddles the flap **30** on the side remote from the integral hinge **34** along a secant line parallel to the axis of the integral hinge **34**.

[00052] By carefully tilting the flap **30** upward, the valve cross-piece **40** is progressively pulled out of the mouth of the pressure equalising channel **28** and the flow path for pressure equalisation is gradually opened. By tilting the flap downward, the flow path is progressively restricted and finally blocked. Due to the long lever arm of the flap **30**, the tilting movement for pressure equalisation is smooth and requires little effort.

[00053] The diaphragm **42** at the flap **30** makes it easy for the user to recognise where the container can be punctured by the tapping device, irrespective of any pressure equalisation by the flap **30**.

List of Reference Numbers

- 10** Tapered body
- 12** Flange
- 14** Ramp
- 16** Annular groove
- 18** Puncturing channel
- 20** Annular bead
- 22** Bottom
- 24** Predetermined breaking location
- 26** End face
- 28** Pressure equalising channel
- 30** Flap
- 32** Retaining web
- 34** Integrated hinge
- 36** Chamfer of the flange
- 38** Chamfer of the cap
- 40** Valve cross-piece
- 42** Diaphragm
- 44** Predetermined breaking location
- 46** Seal

Claims

1. A closure for the charging hole of a liquid container having a tapping bush of an elastic material seally fitting into the charging hole and including an axial puncturing channel (18) at which the container is adapted to be punctured by the puncturing pipe of a tapping device, wherein the tapping bush is sealed at the puncturing pipe and is provided with a manually operable pressure equalising valve for blocking and unblocking a pressure equalising channel (28) between the head space of the container above the liquid level therein and atmosphere, **characterised** in that the pressure equalising channel (28) extends axially through the tapping bush laterally of the puncturing channel (18) and spaced therefrom and opens at an end face (26) of the tapping bush laterally of, and spaced from, the puncturing channel (18), and that the tapping bush is provided with an integrated hinged flap (30) which, in a downward tilted closing position, covers the end face (26), closes the open ends of the puncturing channel (18) and the pressure equalising channel (28) in a splash water tight manner, and blocks the pressure equalising channel (28) in a pressure tight manner, and which is adapted to be manually tilted up and down to unblock the pressure equalising channel (28) more or less, thus operating the pressure equalising valve.
2. The closure of claim 1, characterised in that the tapping bush is substantially axially symmetric and has a tapered body (10) with an outward projecting flange (12) by which it rests on the container wall in which the charging hole of the container is located, that the puncturing channel (18) is a channel passing centrally though the tapping bush, and that the pressure equalising channel (28) extends through the flange (12) of the tapping bush and terminates short of the flange (12) at the periphery of the tapered body (10).
3. The closure of claim 1 or 2, characterised in that the flap (30) has an integral valve cross-piece (40) which fits into the pressure equalising channel (28) and blocks the same in a pressure tight manner when the flap (30) is tilted downward, and which is adapted to be pulled out of the pressure equalising channel (28) by tilting the flap (30) upward.
4. The closure of claim 3, characterised in that the valve cross-piece (40) is conical.

5. The closure of claim 3 or 4, characterised in that the pressure equalising channel (28) and the valve cross-piece (40) fitted therein have an elongate oval cross-section extending in the circumferential direction.

6. The closure of any of claims 1 to 5, characterised in that the flap (30) is articulated by an integrated hinge (34) to a side of the tapping bush close to the pressure equalising channel (28) in such a way that the latter is located between the integrated hinge (34) and the puncturing channel (18).

7. The closure of any of claims 1 to 6, characterised in that the flap (30) is provided with a seal (46) which is adapted to be conspicuously destroyed by the first upward rotation of the flap (30).

8. The closure of any of claims 1 to 7, characterised in that the closure is manufactured by multiple-component plastic injection moulding, specifically two-component plastic injection moulding from a hard component and a soft seal component, or three-component plastic injection moulding from a hard component, a soft seal component, and a colour component having a colour different from the hard component and the sealing component, and that the seal (46) consists of the colour component.

9. The closure of any of claims 1 to 8, characterised in that the inner end of the tapping bush is closed in a pressure tight manner by an integral bottom (22) which is adapted to be punctured by the puncturing pipe.

10. The closure of claim 9, characterised in that the rim of the bottom (22) has a predetermined breaking location (24) with webs of the hard component and intervening parts of the seal component.

11. The closure of any of claims 1 to 10, characterised in that the flap (30) is provided with a diaphragm (42) which, in the downward tilted closing position of the flap (30), lies in front of the mouth of the puncturing channel (18) and is adapted to be punctured by the puncturing pipe.

12. The closure of claim 11, characterised in that the puncturing channel (18) is substantially cylindrical, and that the diaphragm (42) is circular with a diameter corresponding to the clear width of the puncturing channel (18).

13. The closure of claim 12, characterised in that the diaphragm (42) is provided with radially extending predetermined breaking locations (44) equally spaced along the circumference.

14. The closure of any of claims 1 to 13, characterised in that the rim of the diaphragm (42) has a predetermined breaking location with webs of the hard component and intervening parts of the seal component.

15. The closure of any of claims 1 to 14, characterised in that it is integrally manufactured in one step by three-component assembling injection moulding.

1/4

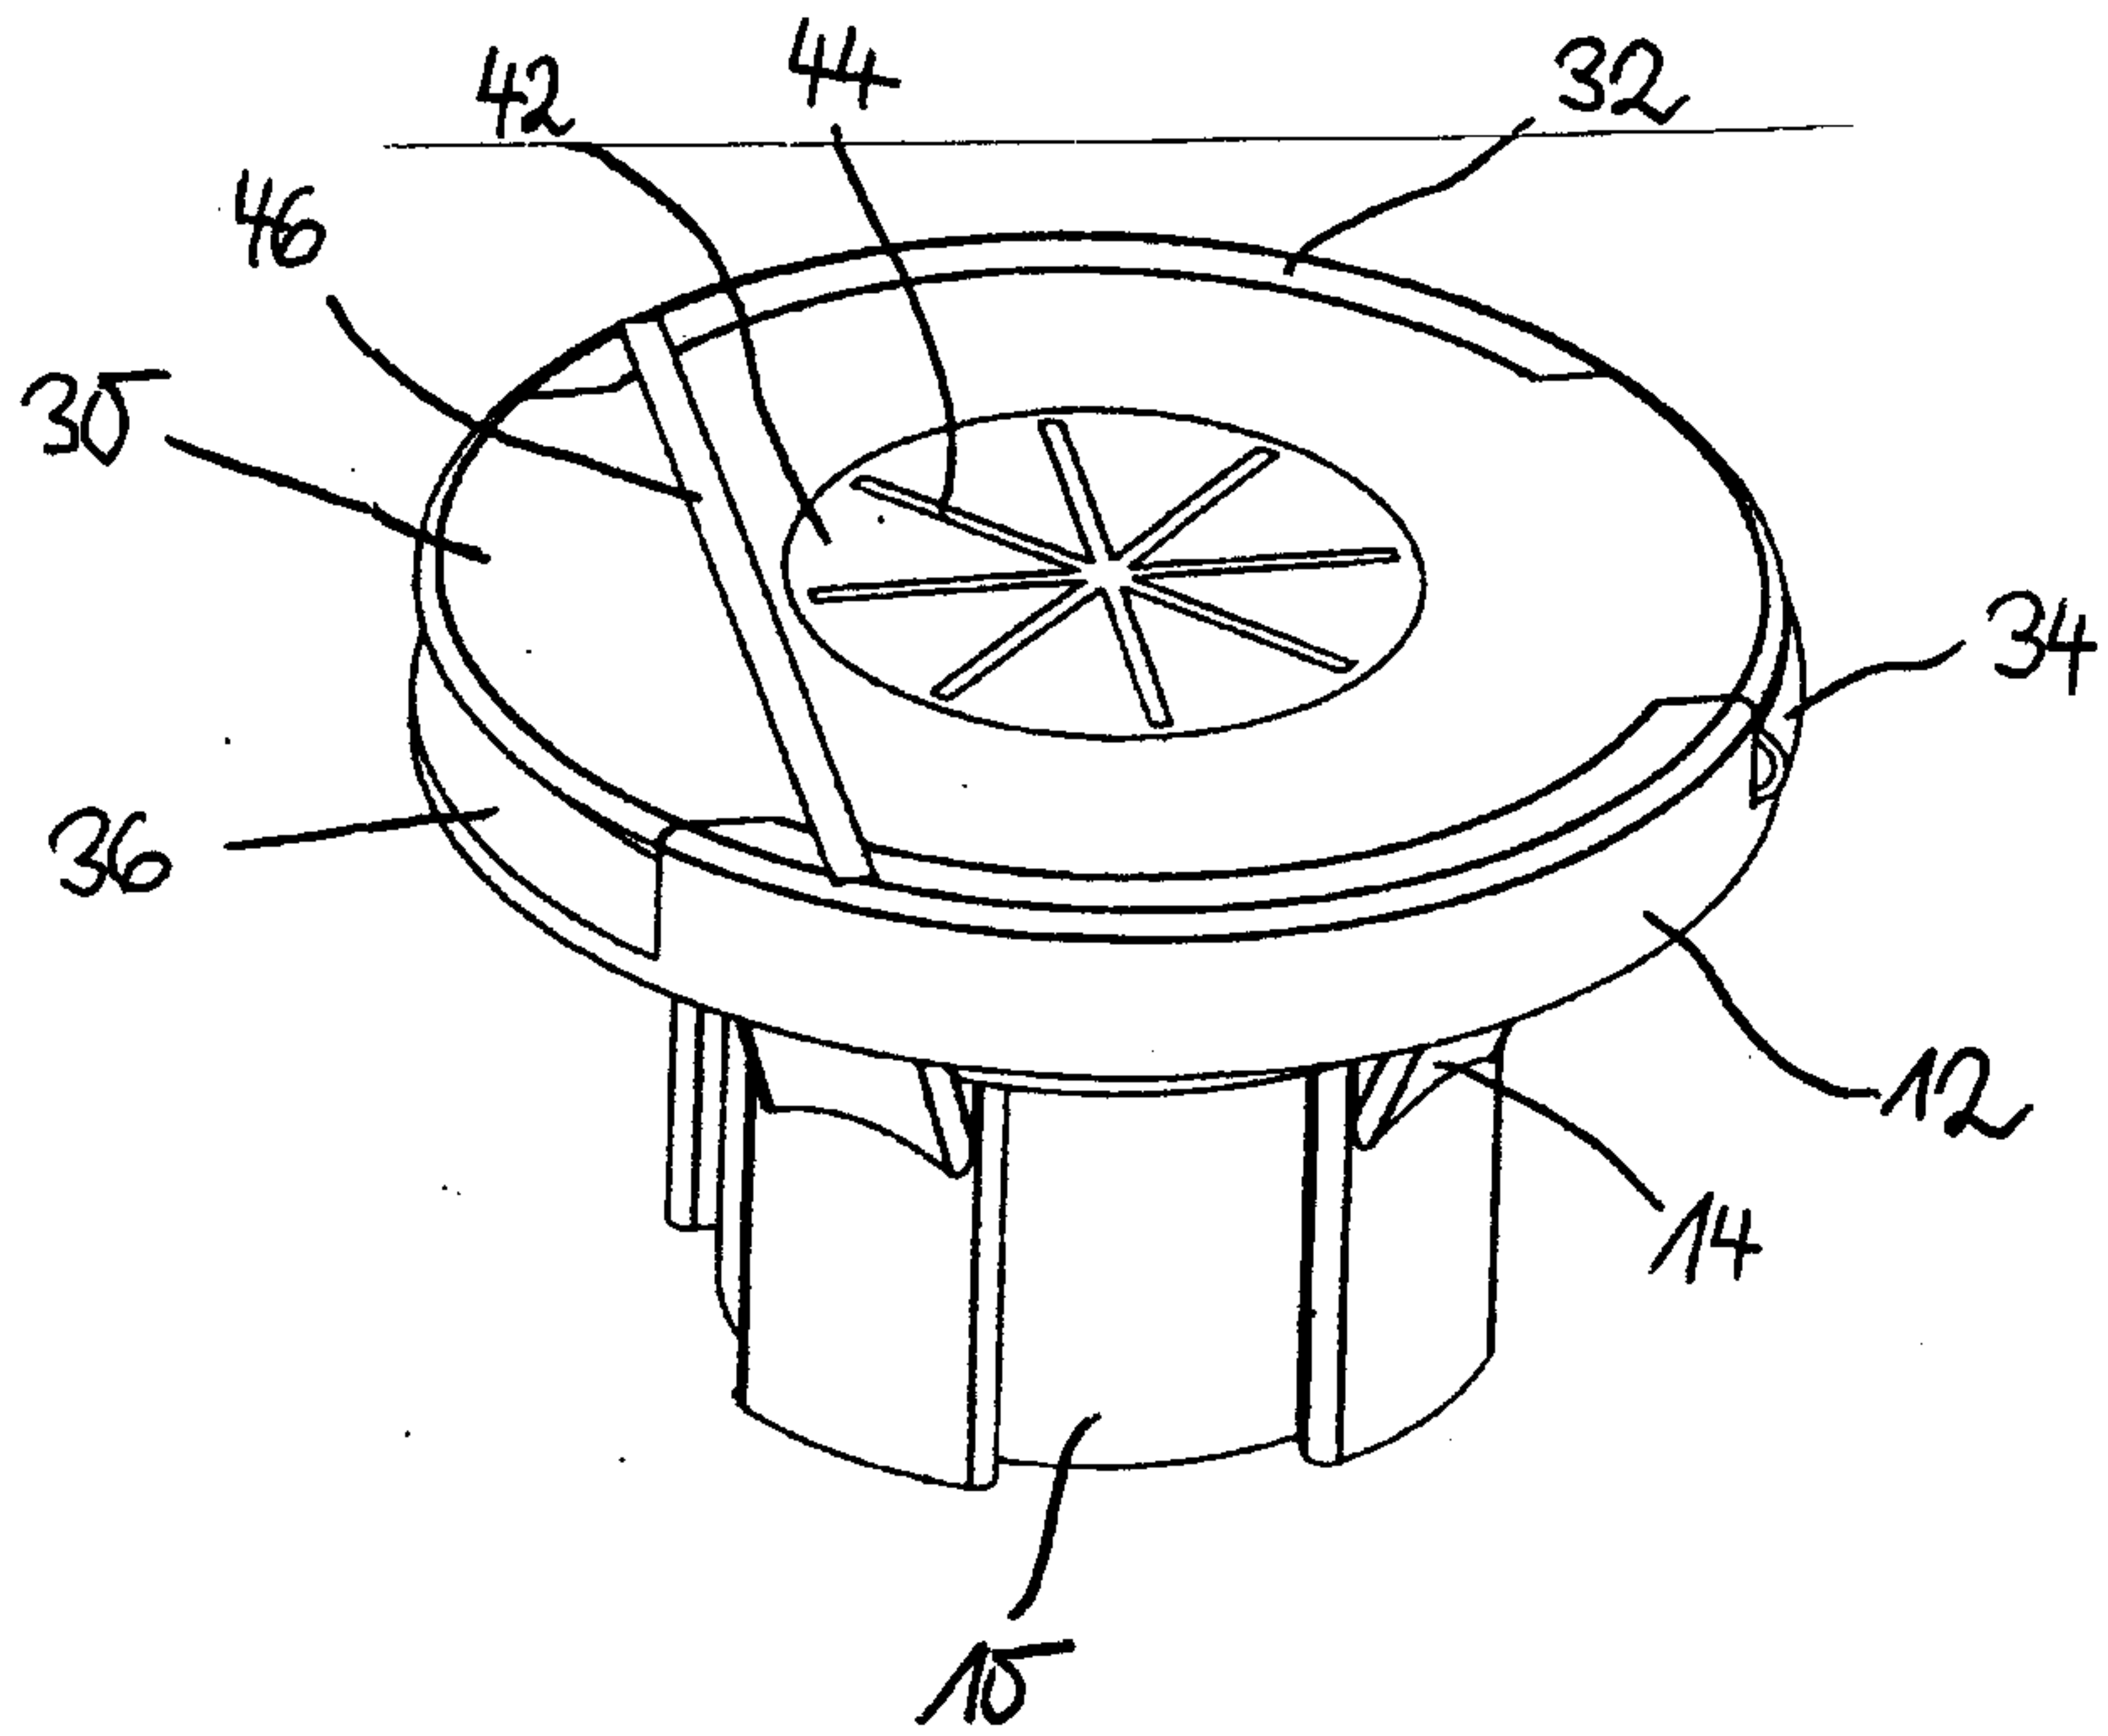


Fig. 1

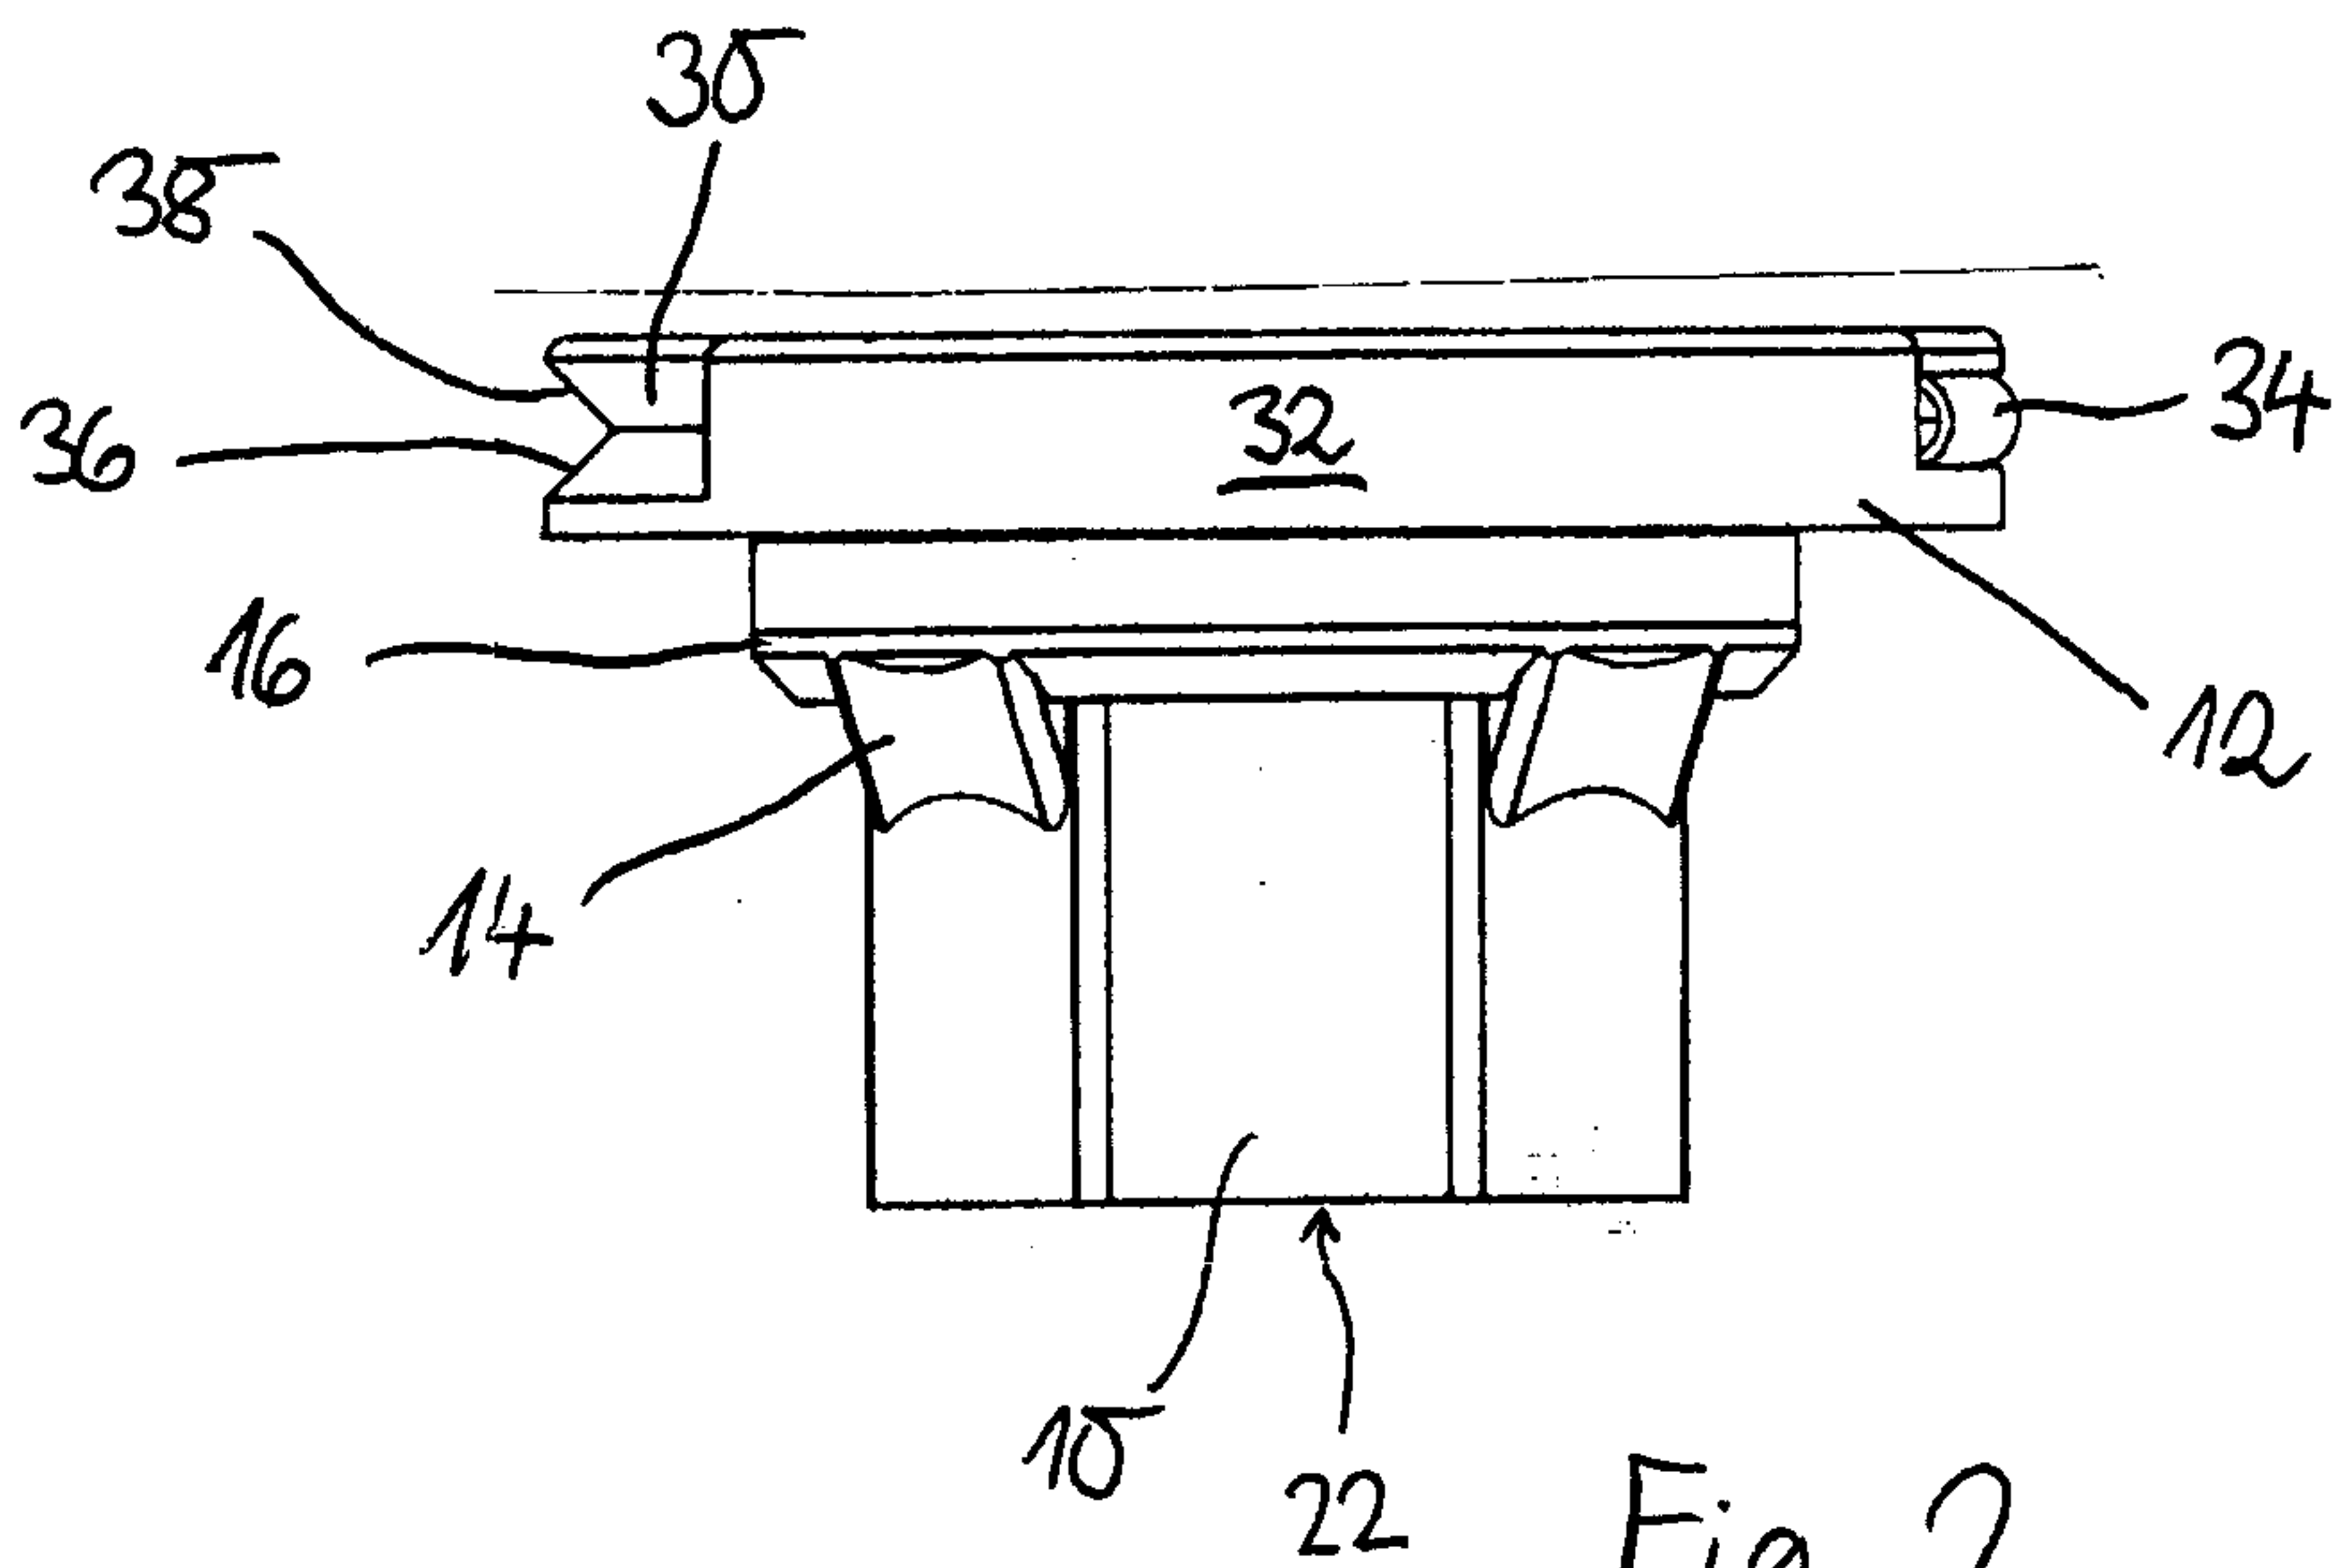


Fig. 2

2/4

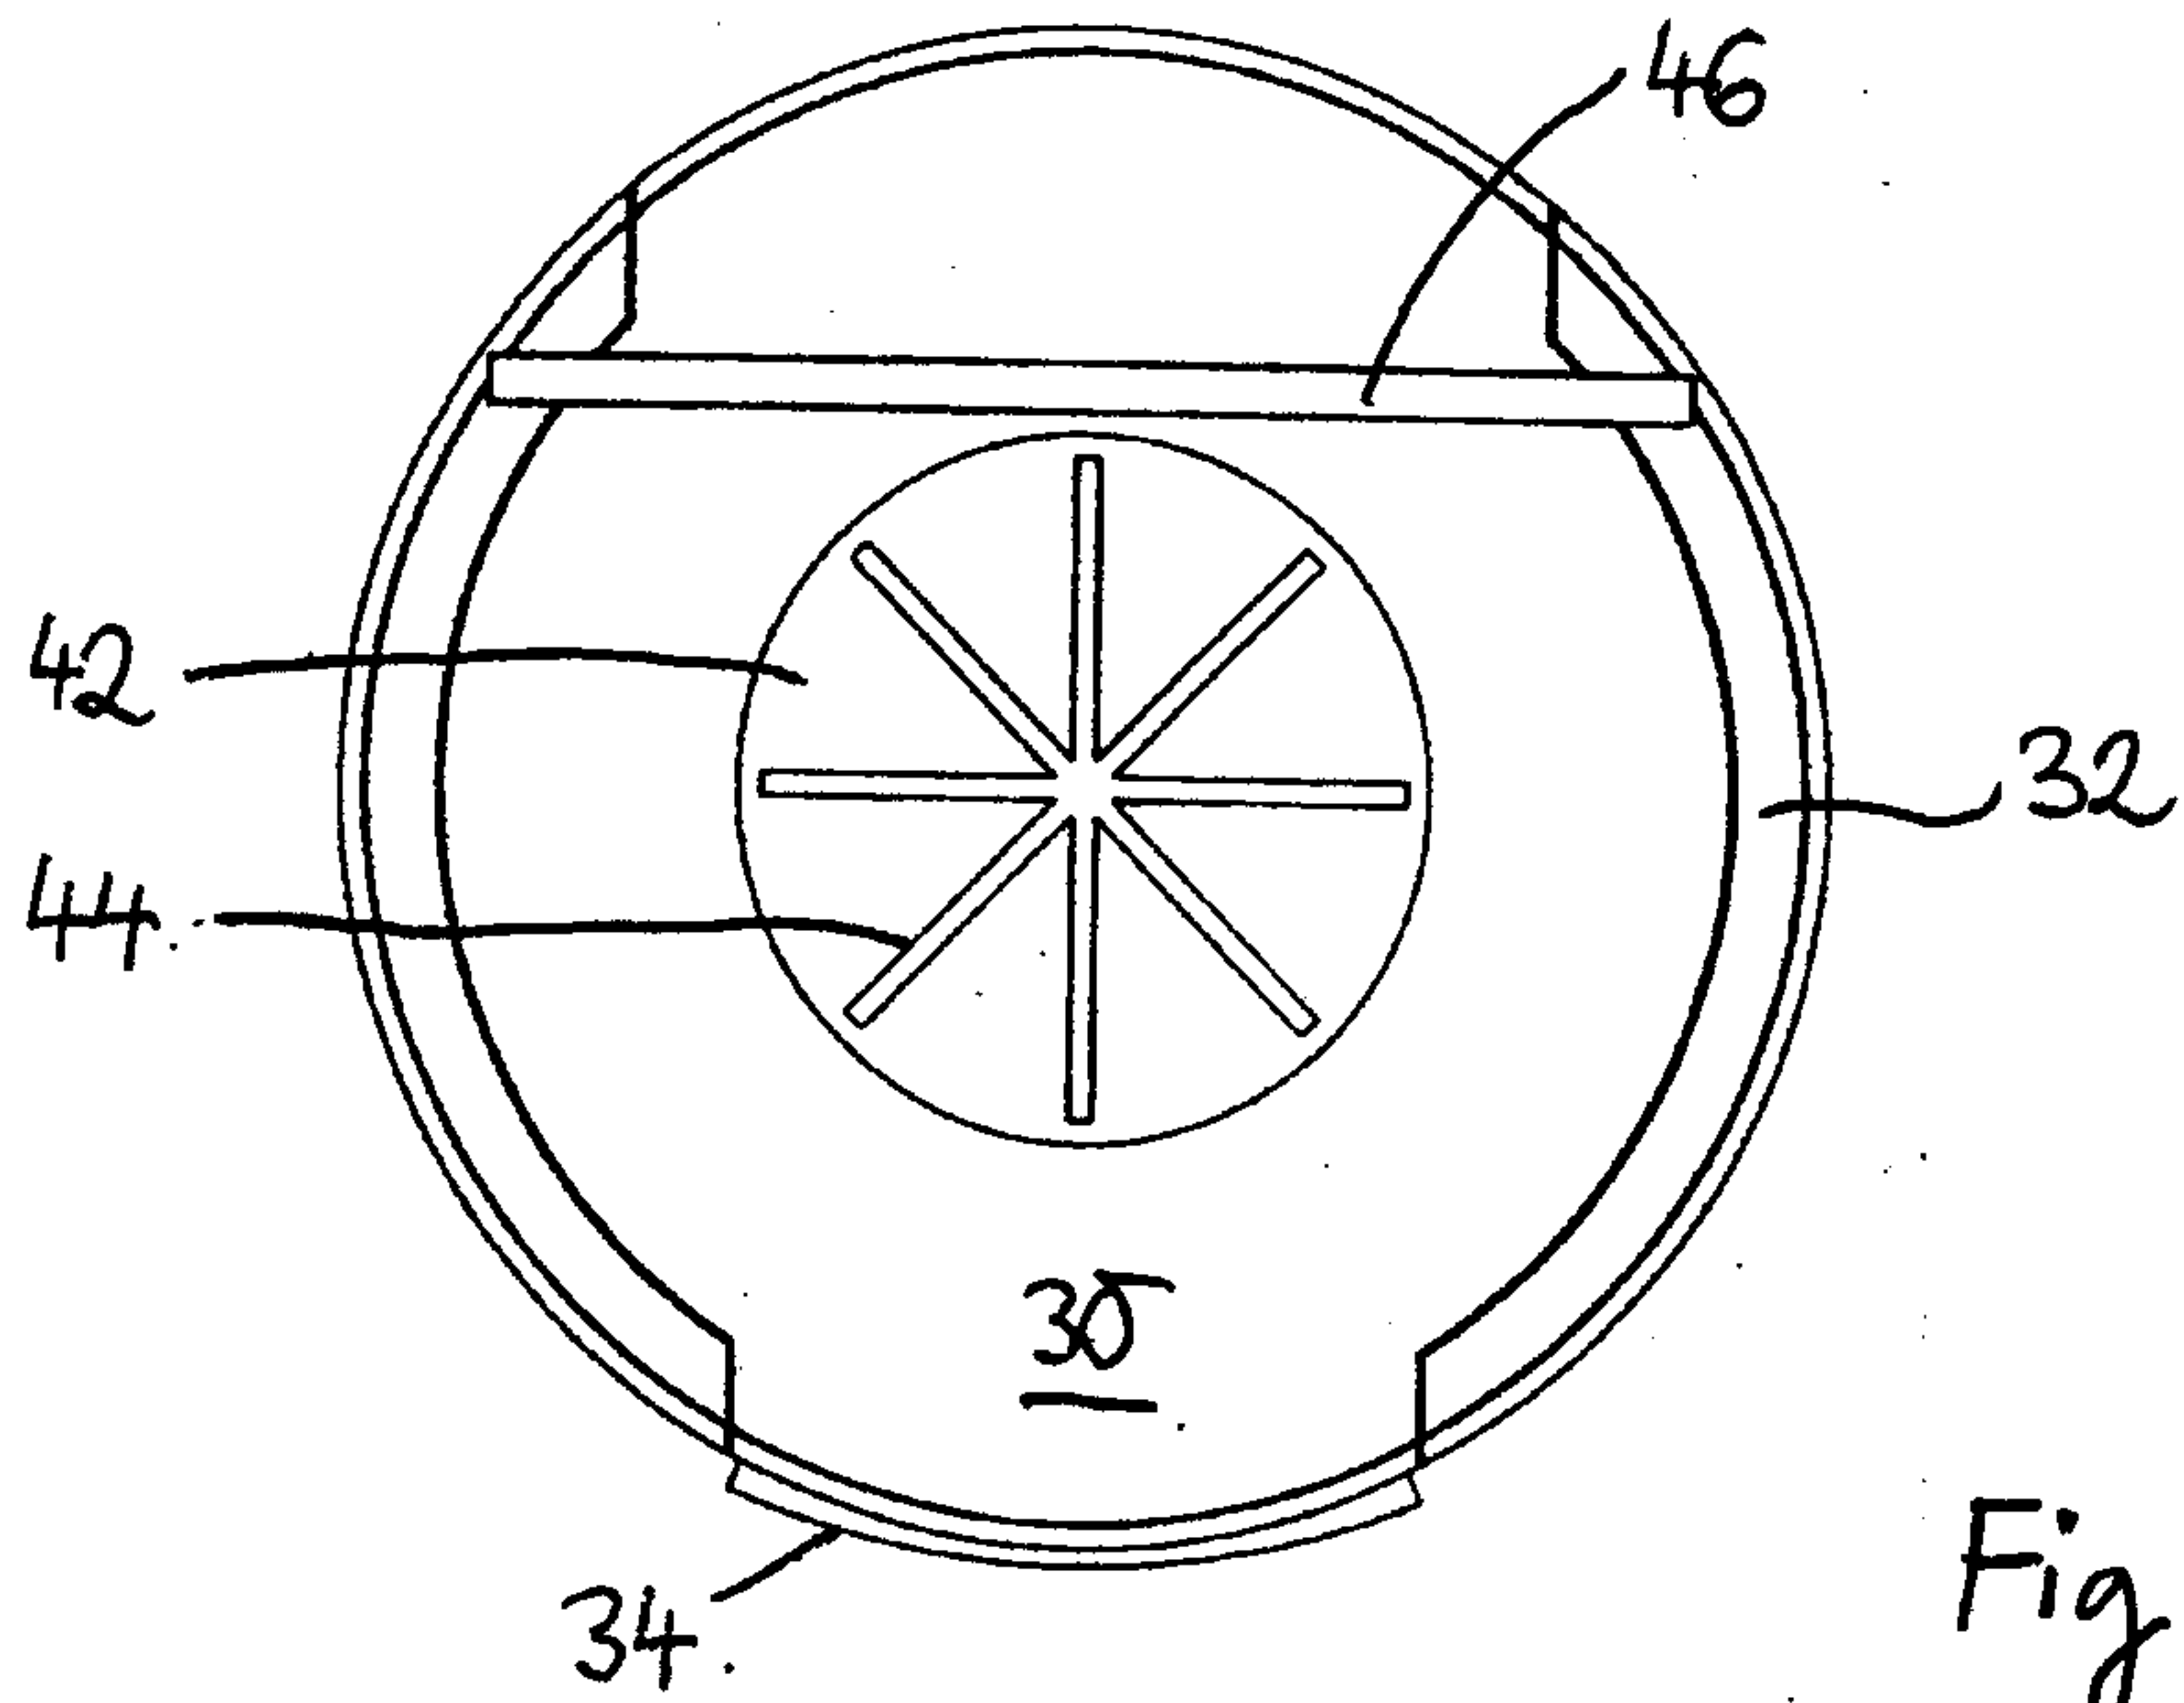


Fig. 3

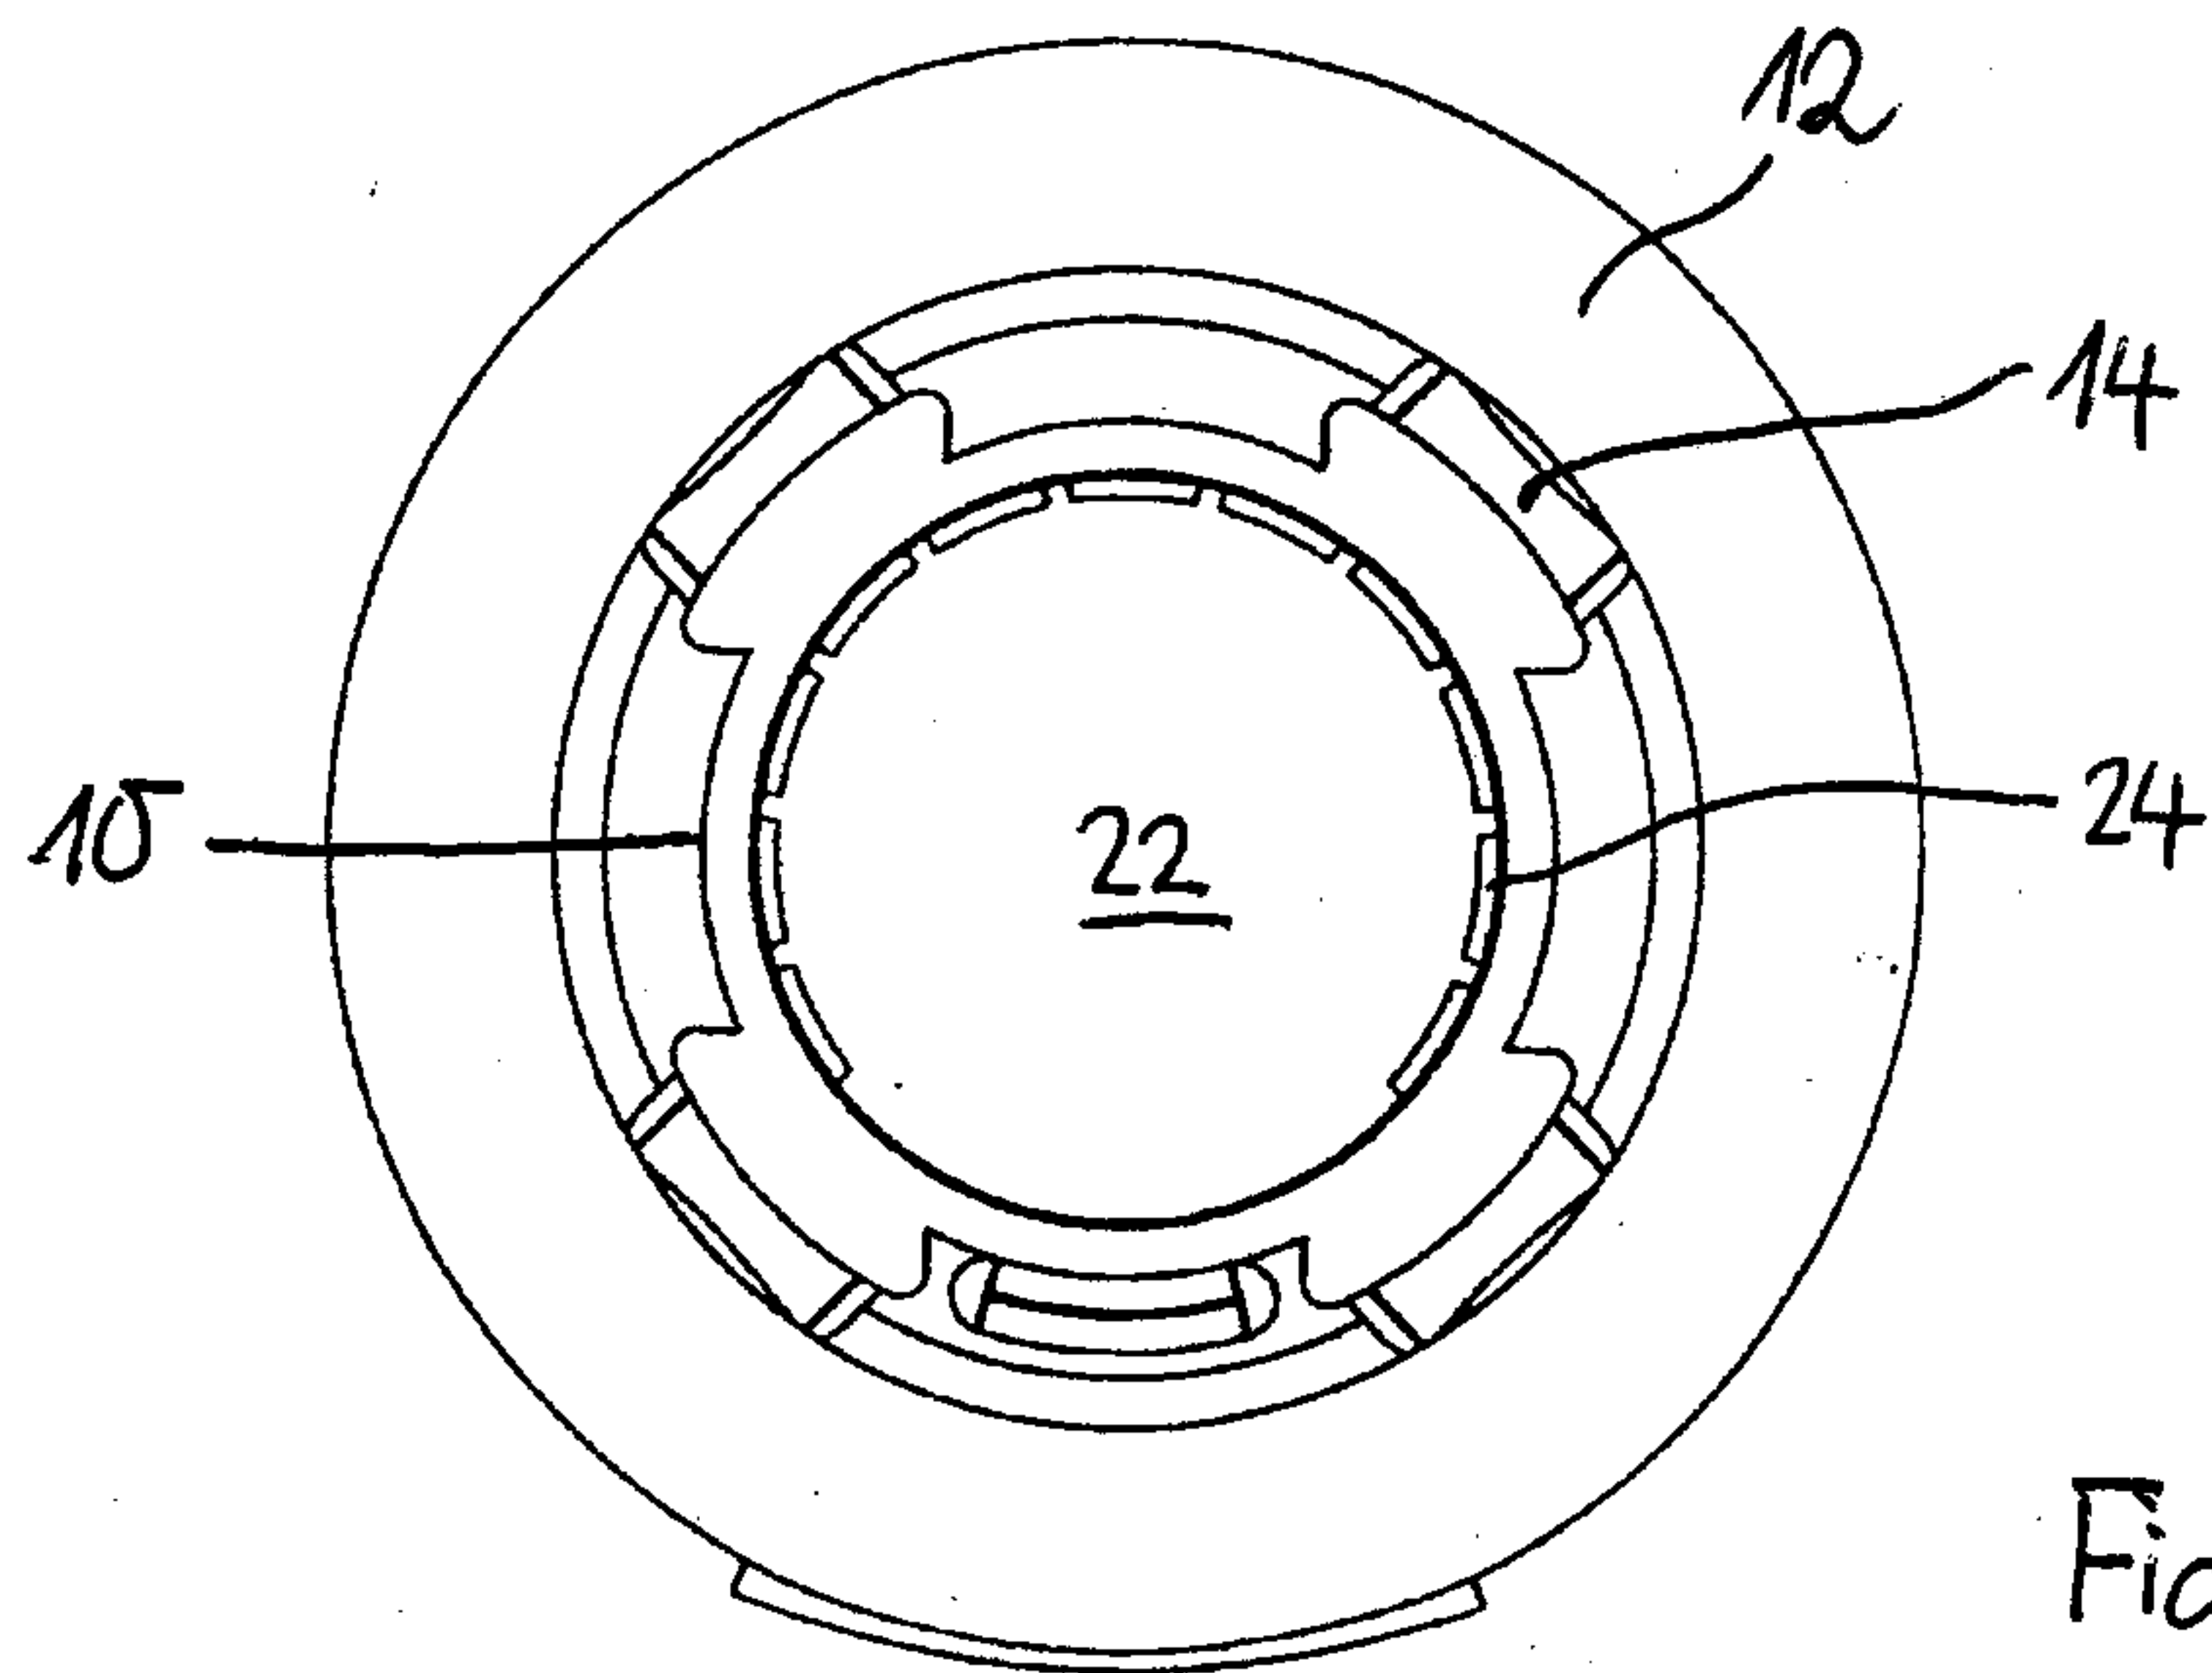


Fig. 4

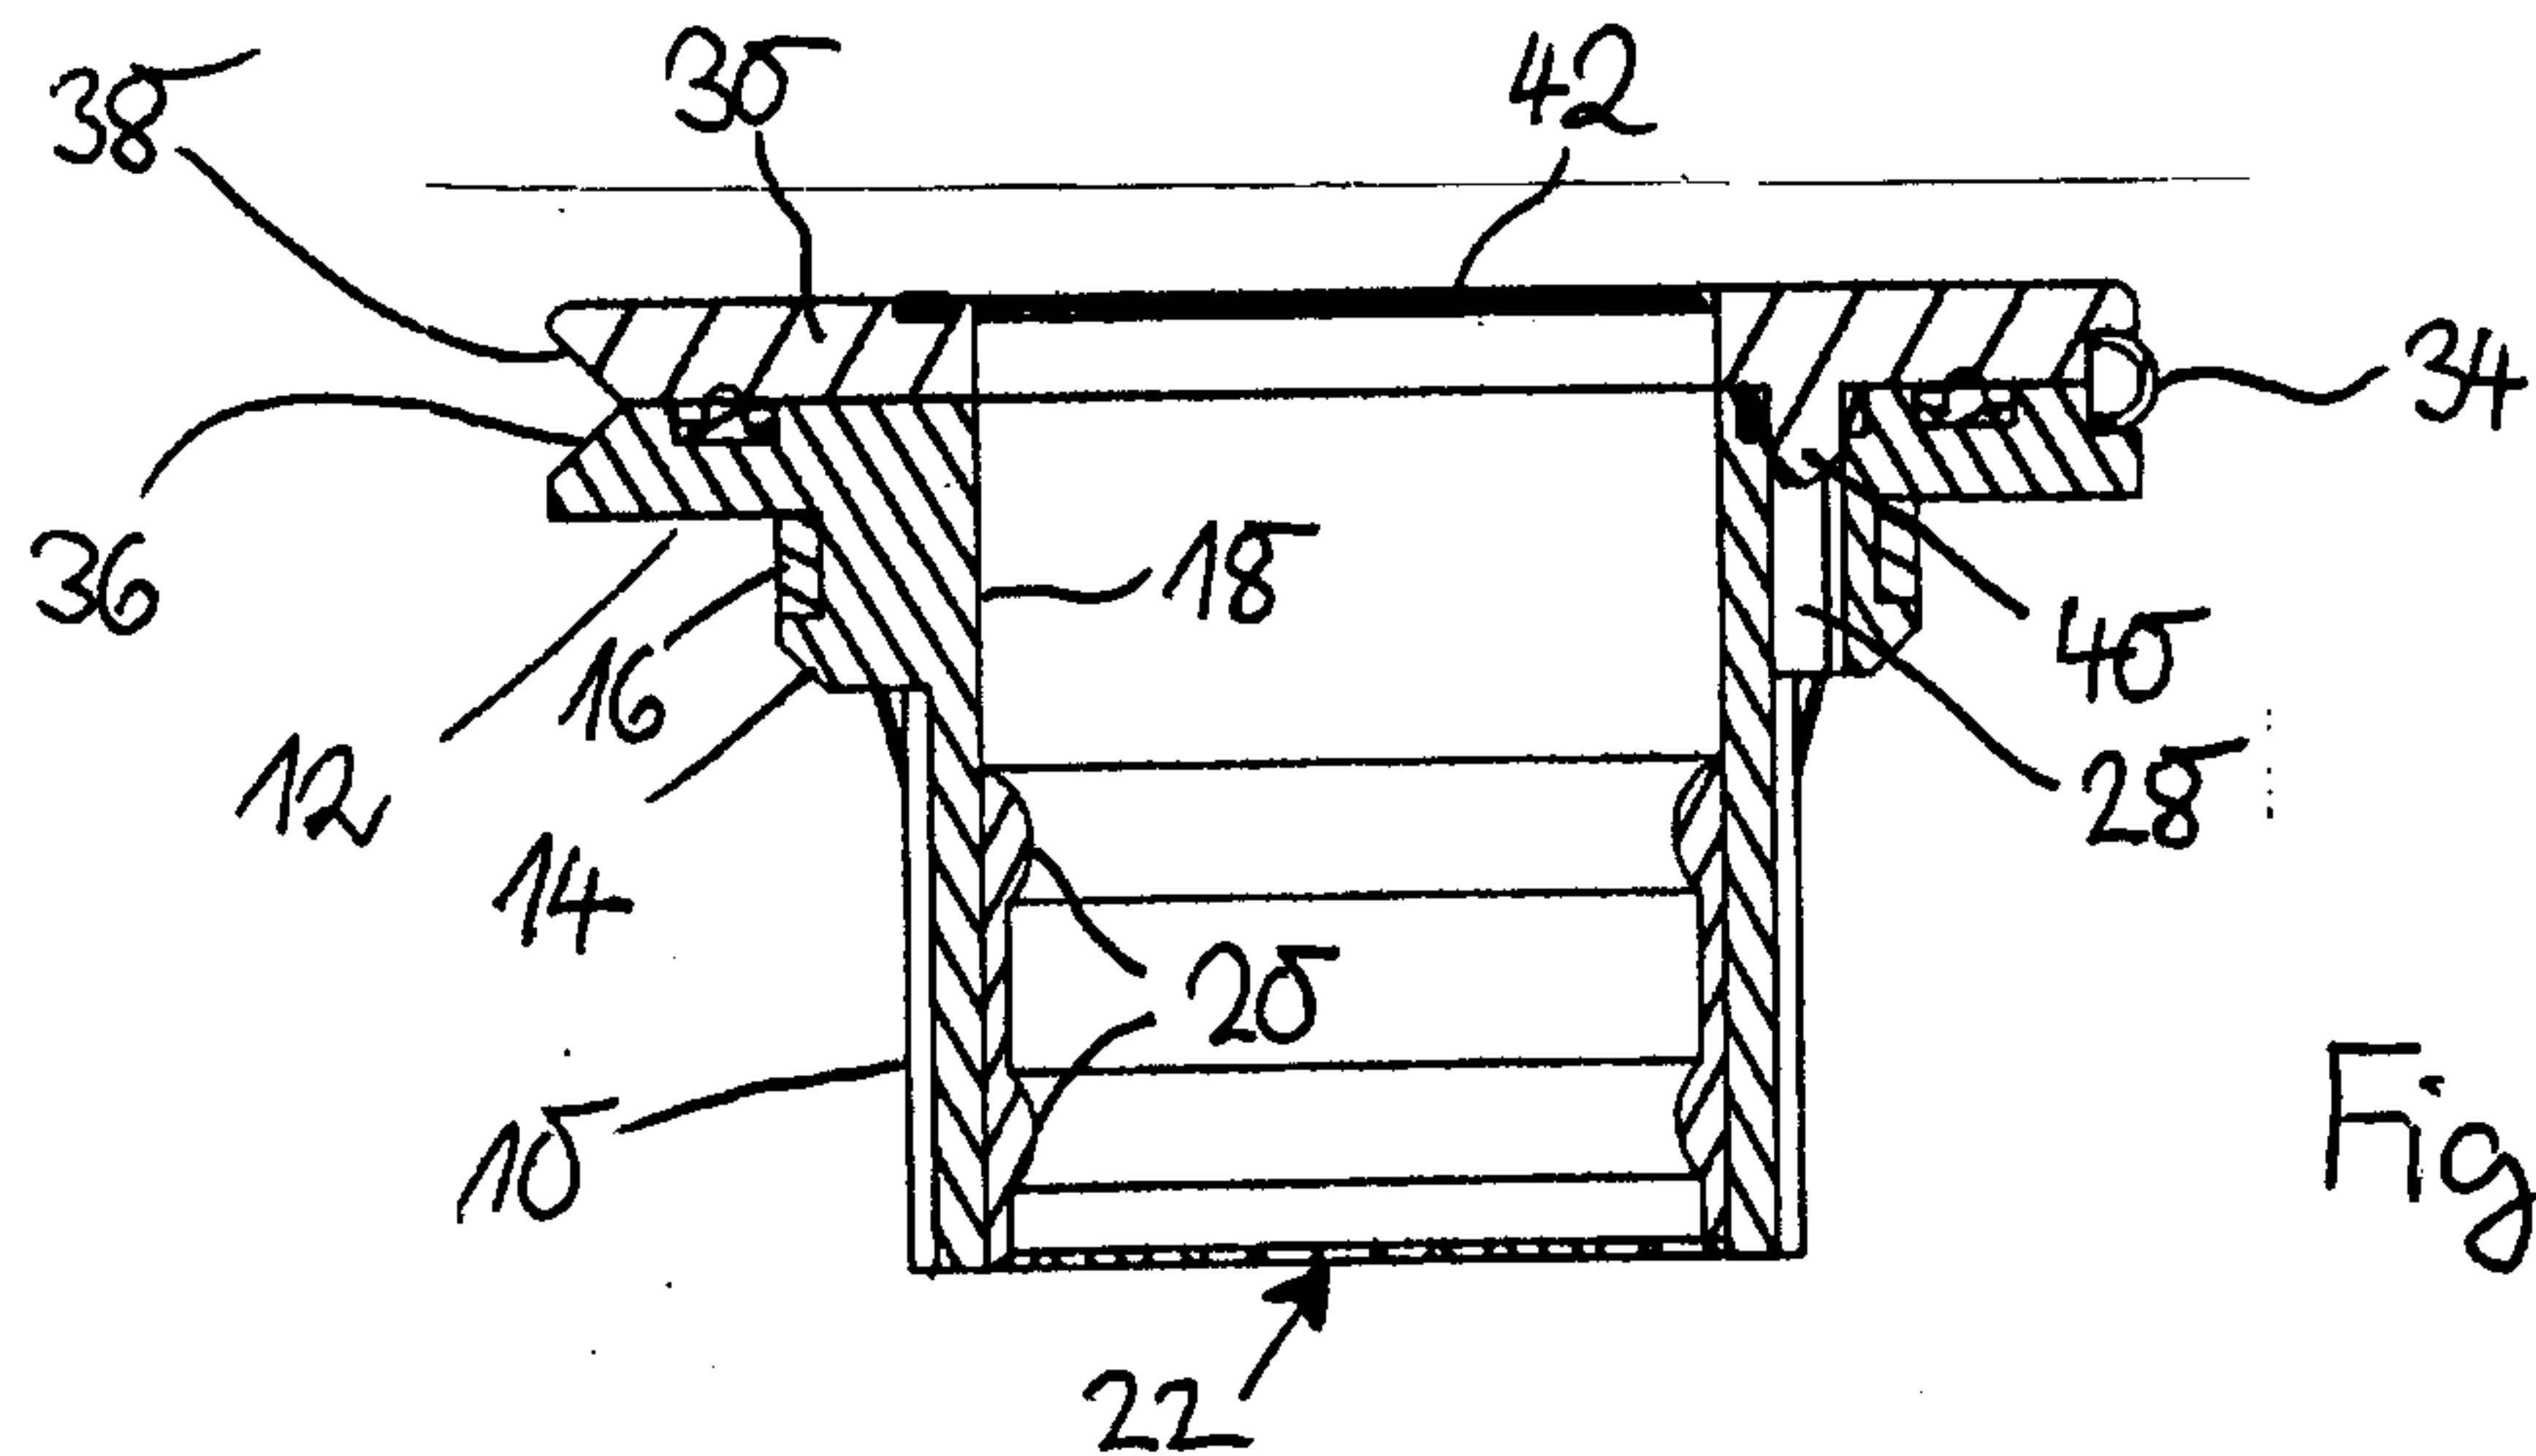


Fig. 5

3/4

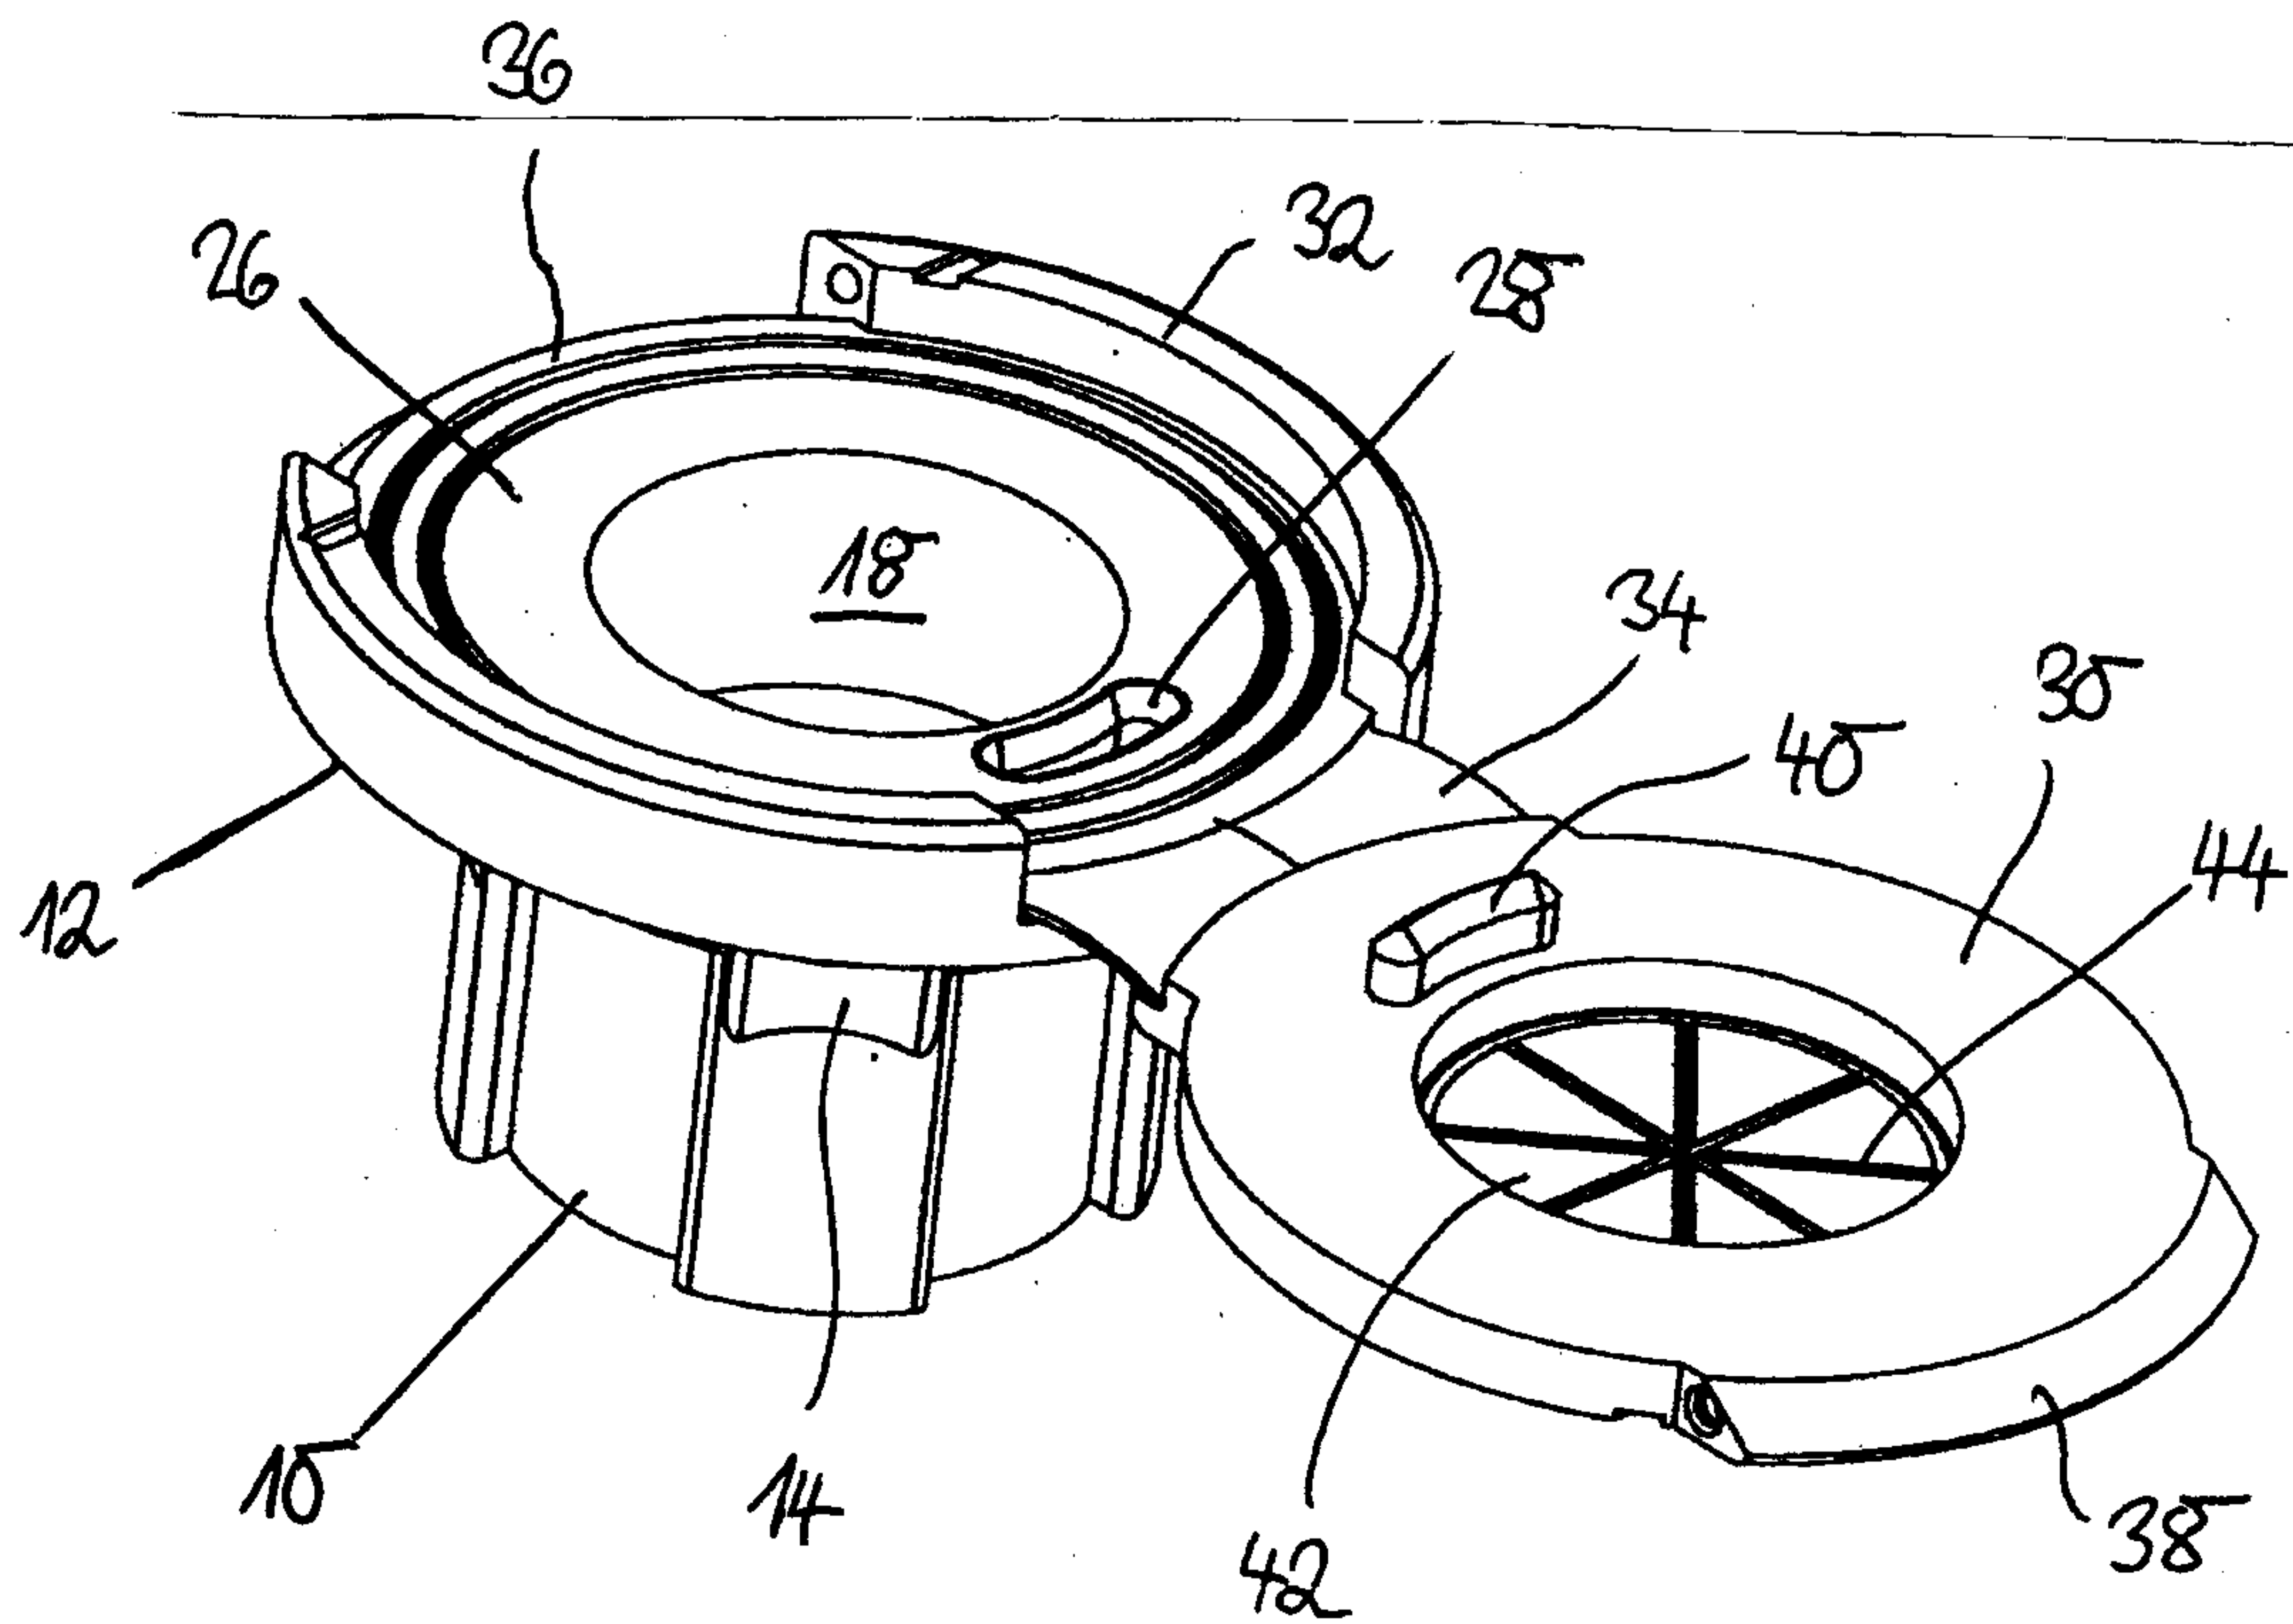


Fig. 6

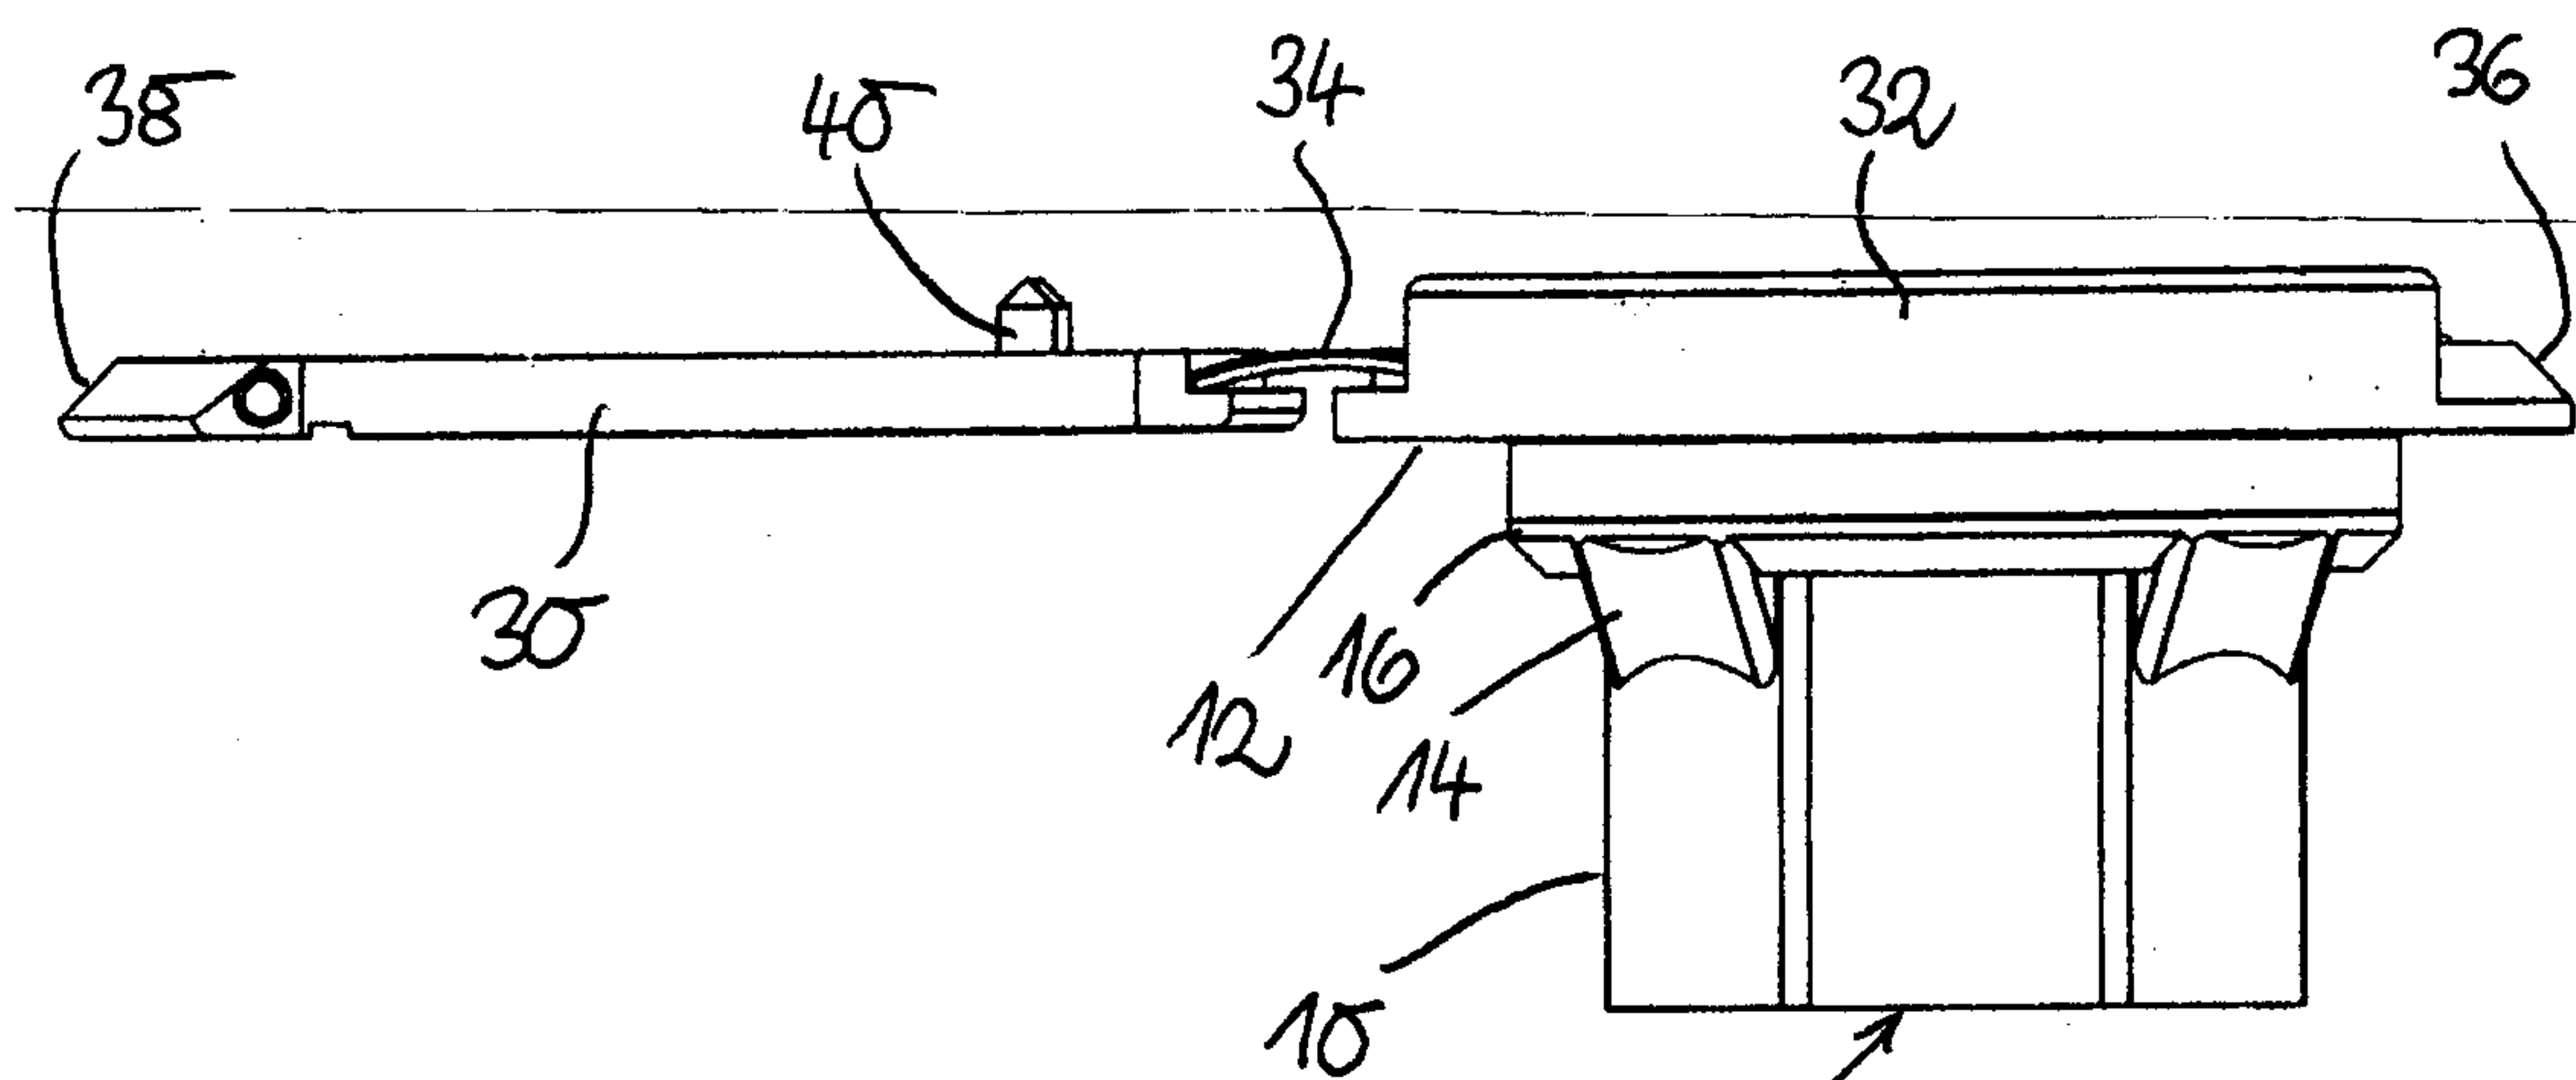
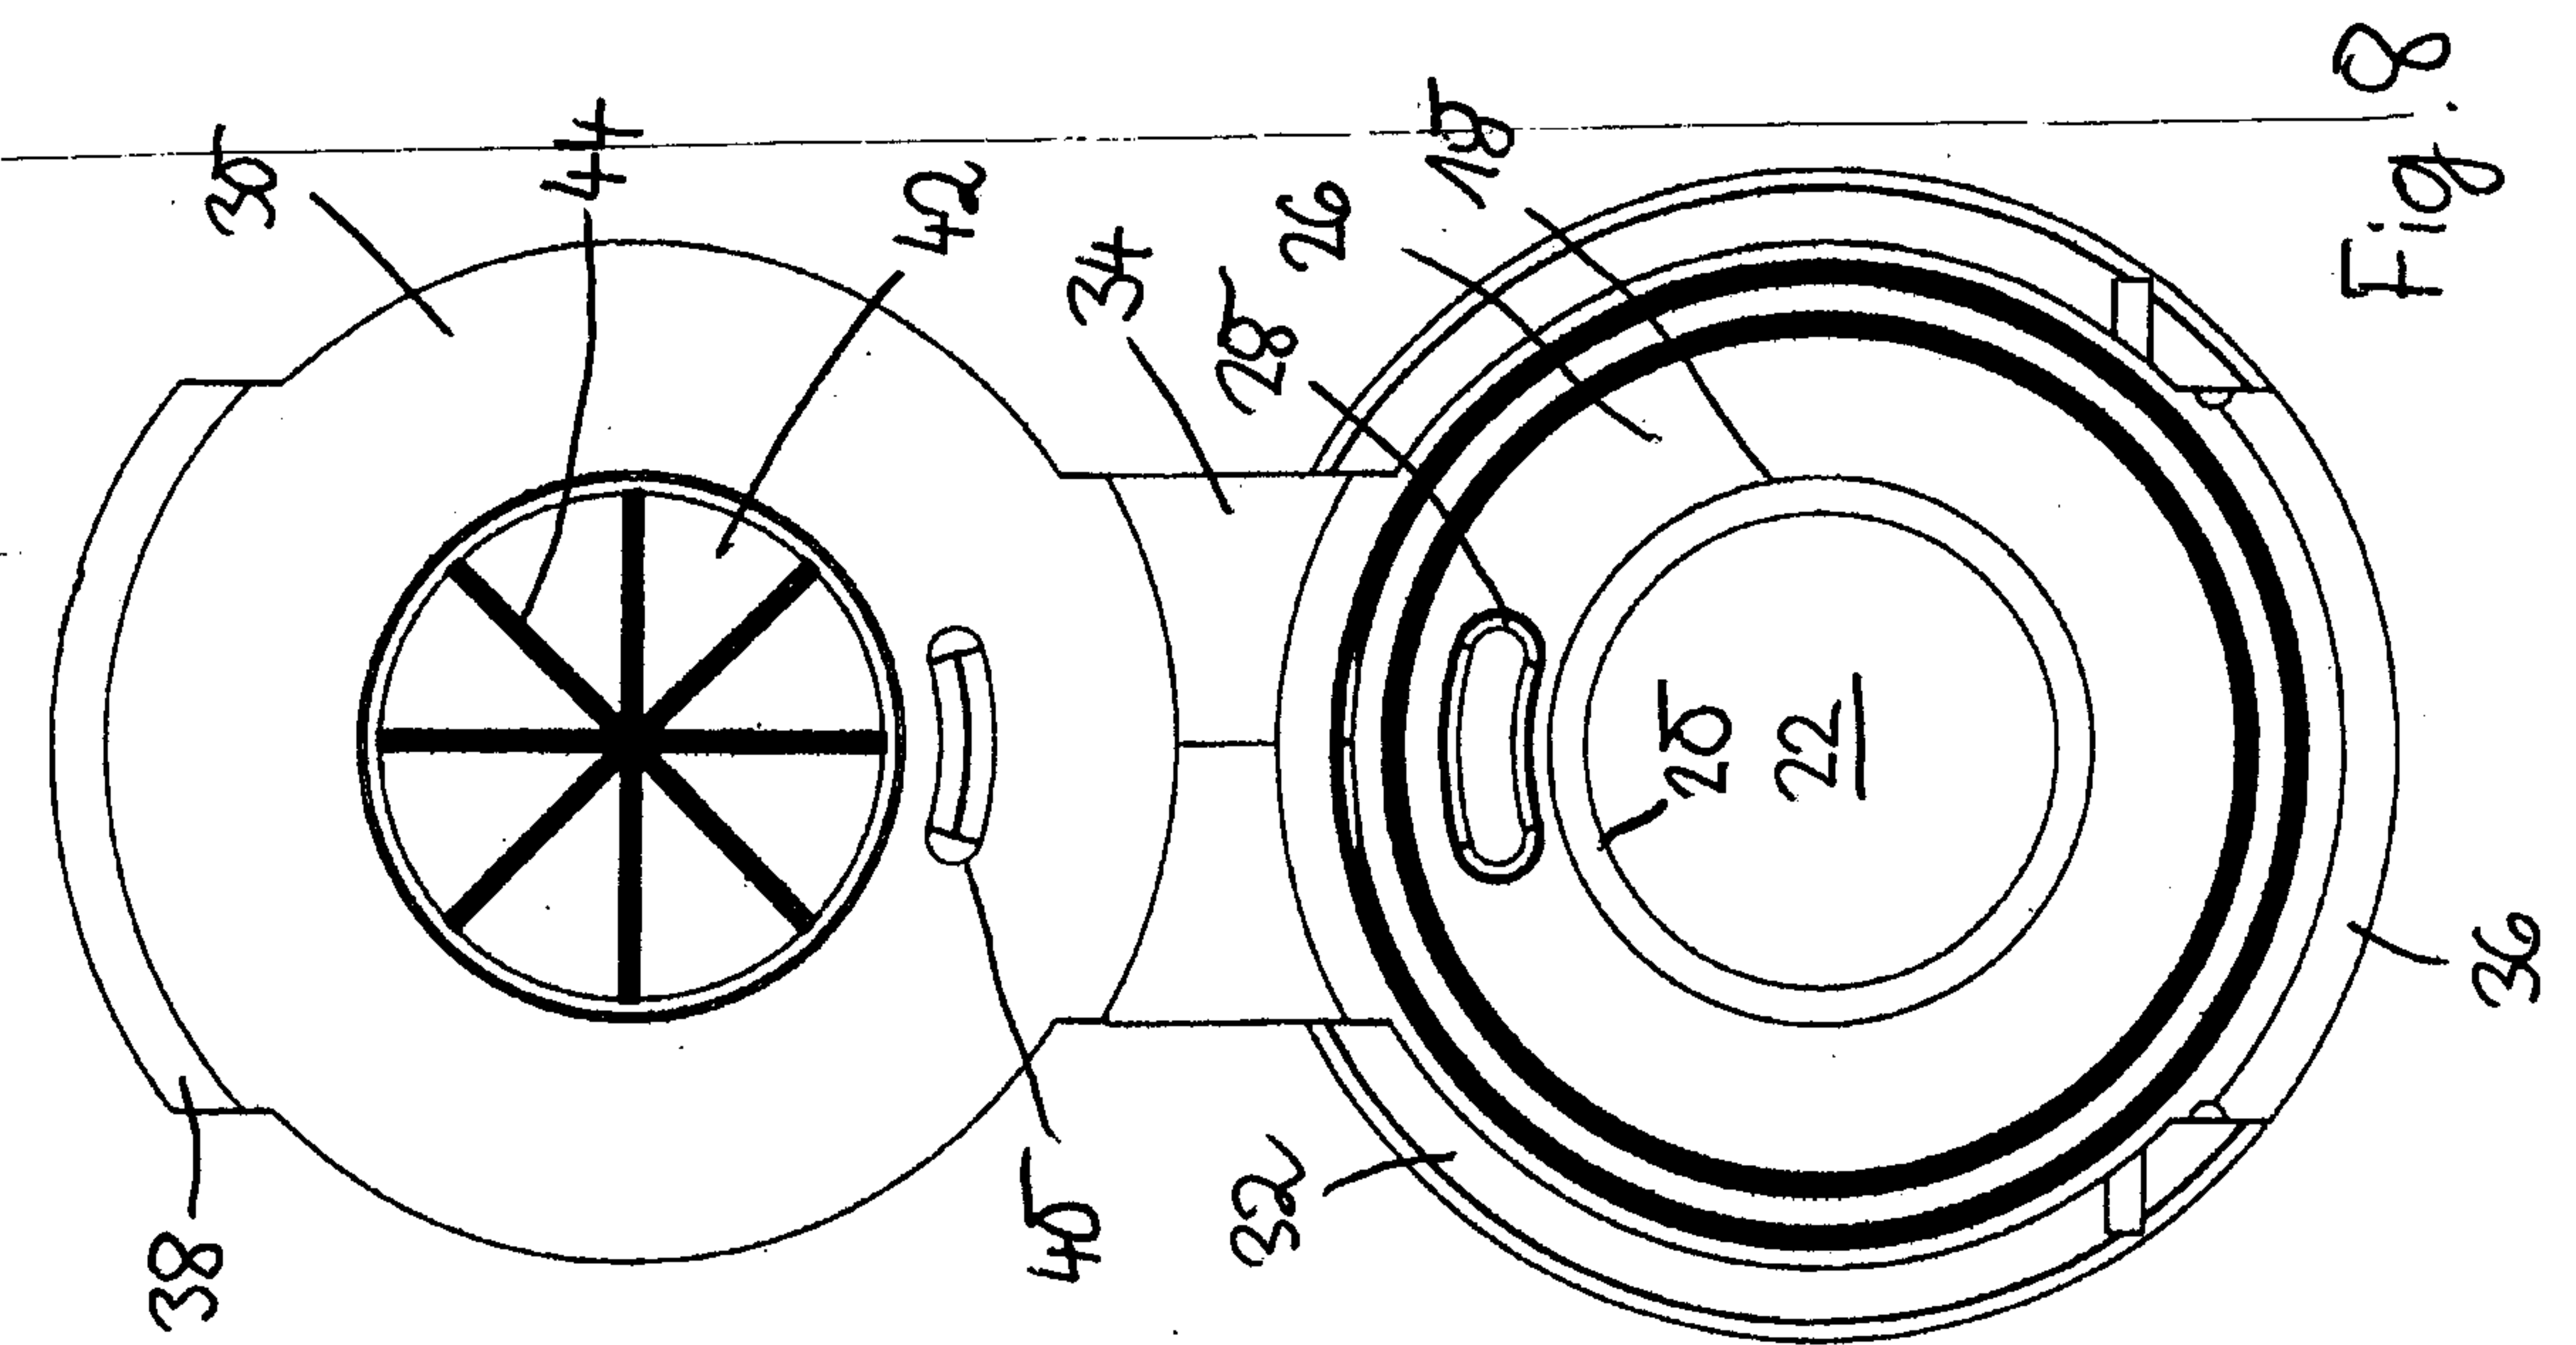
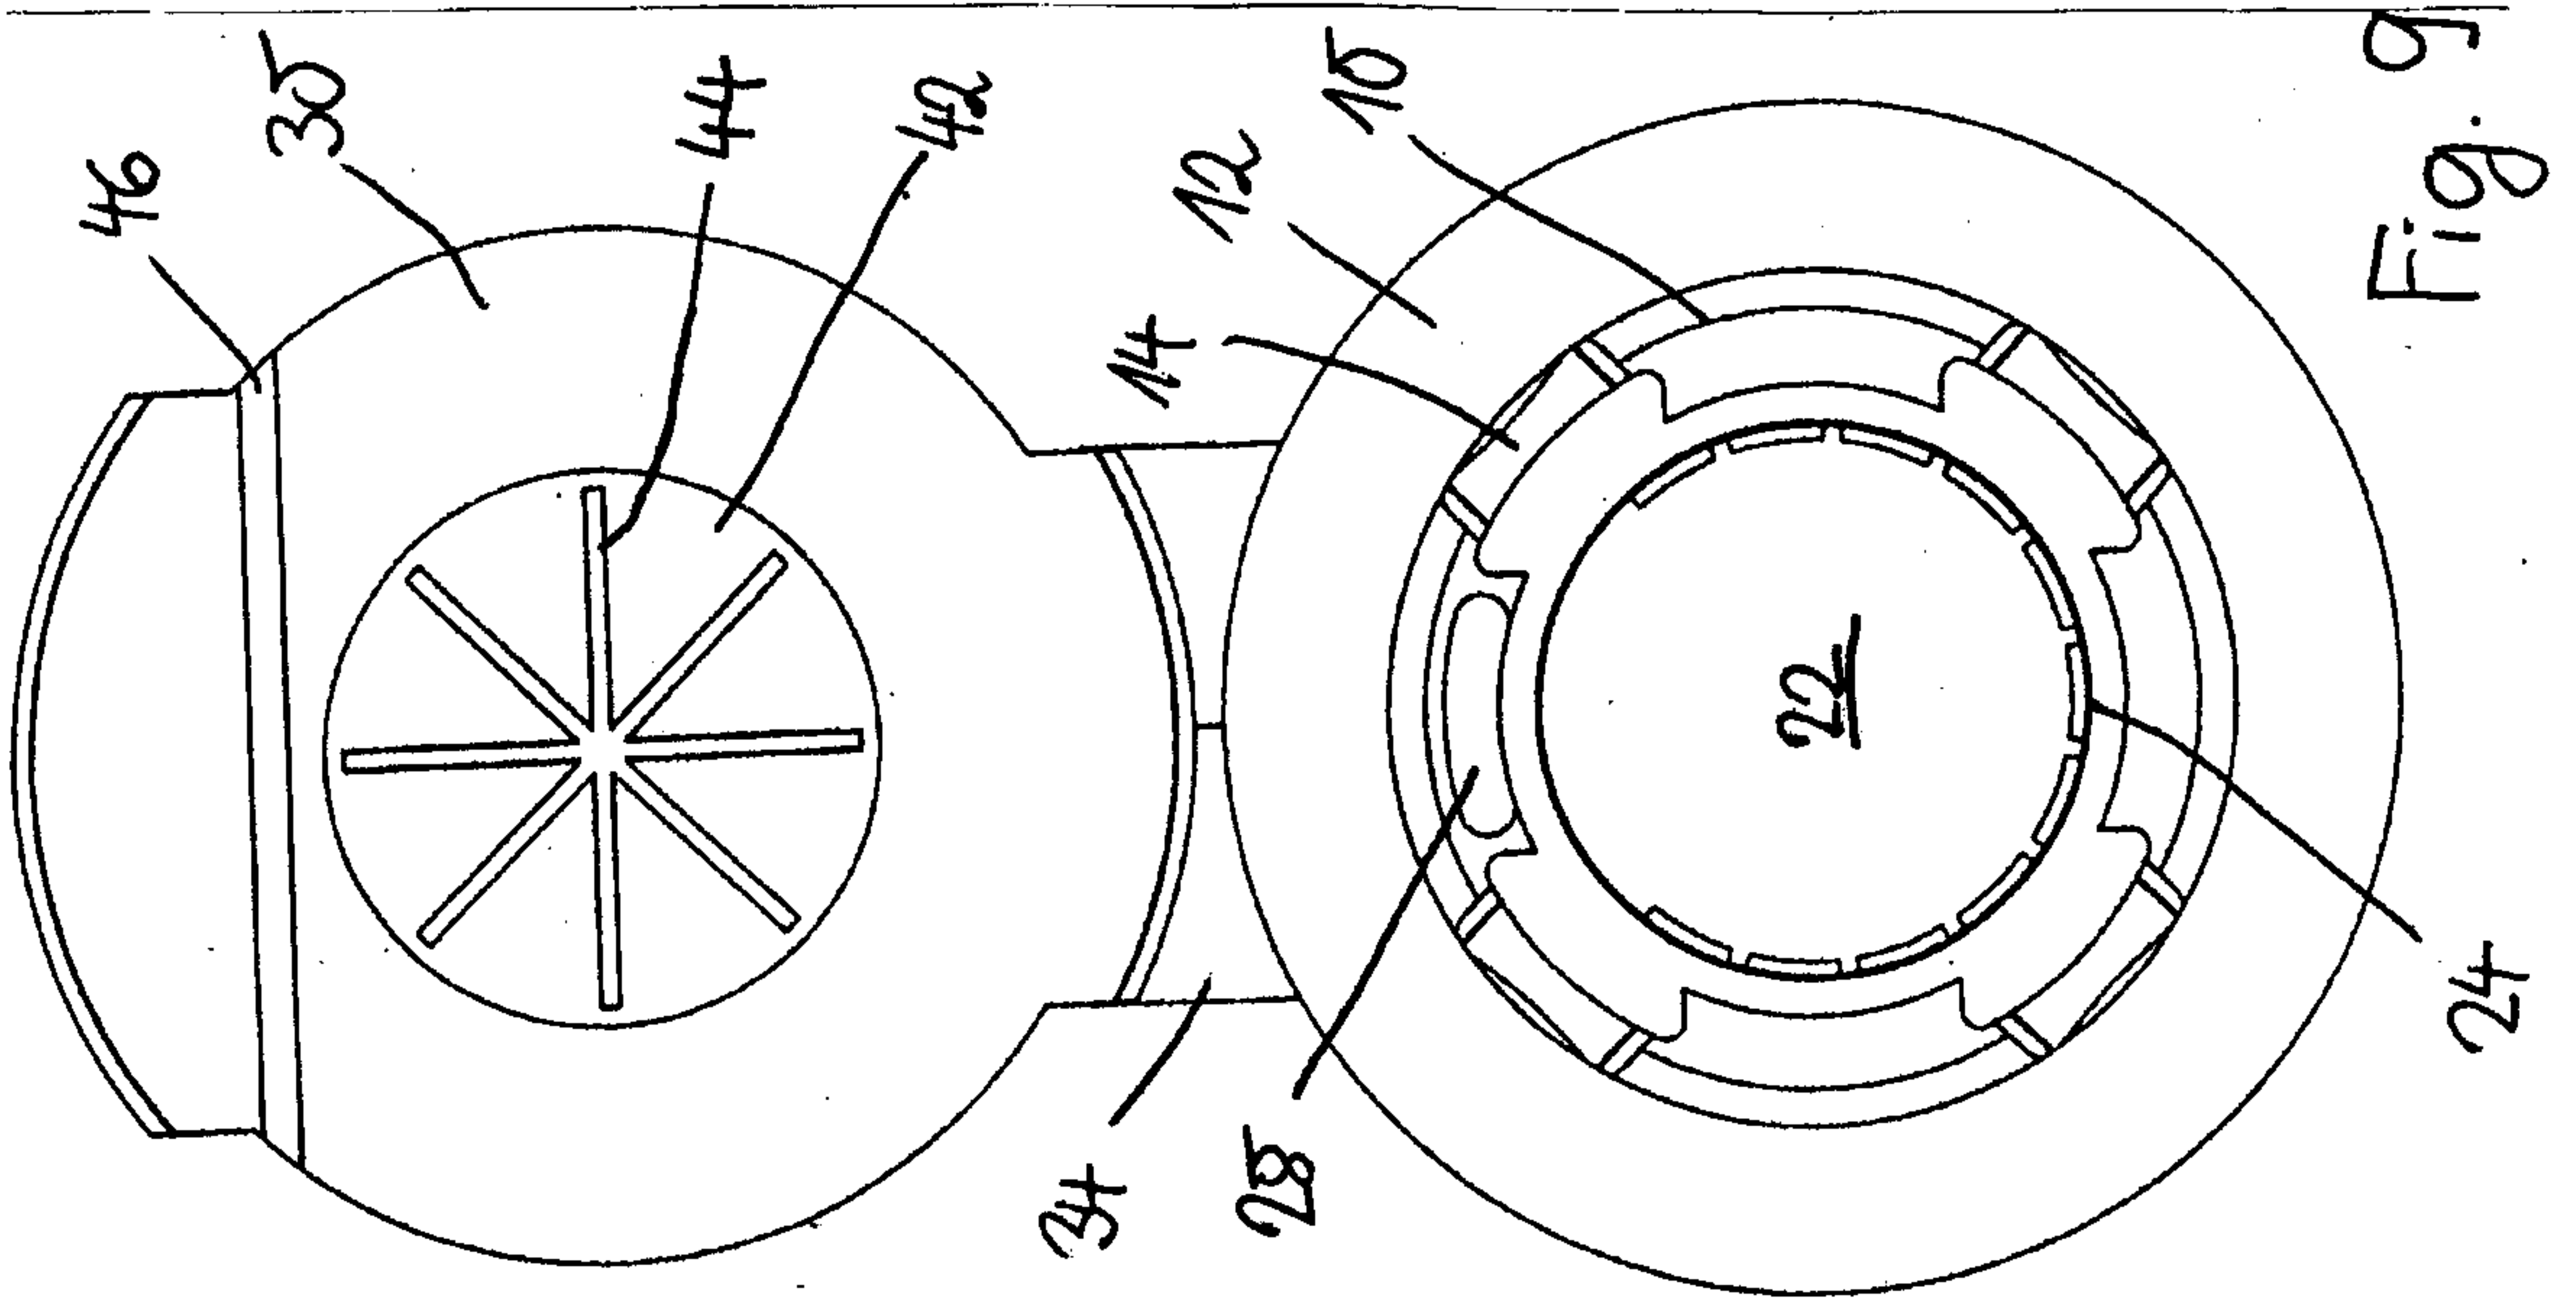
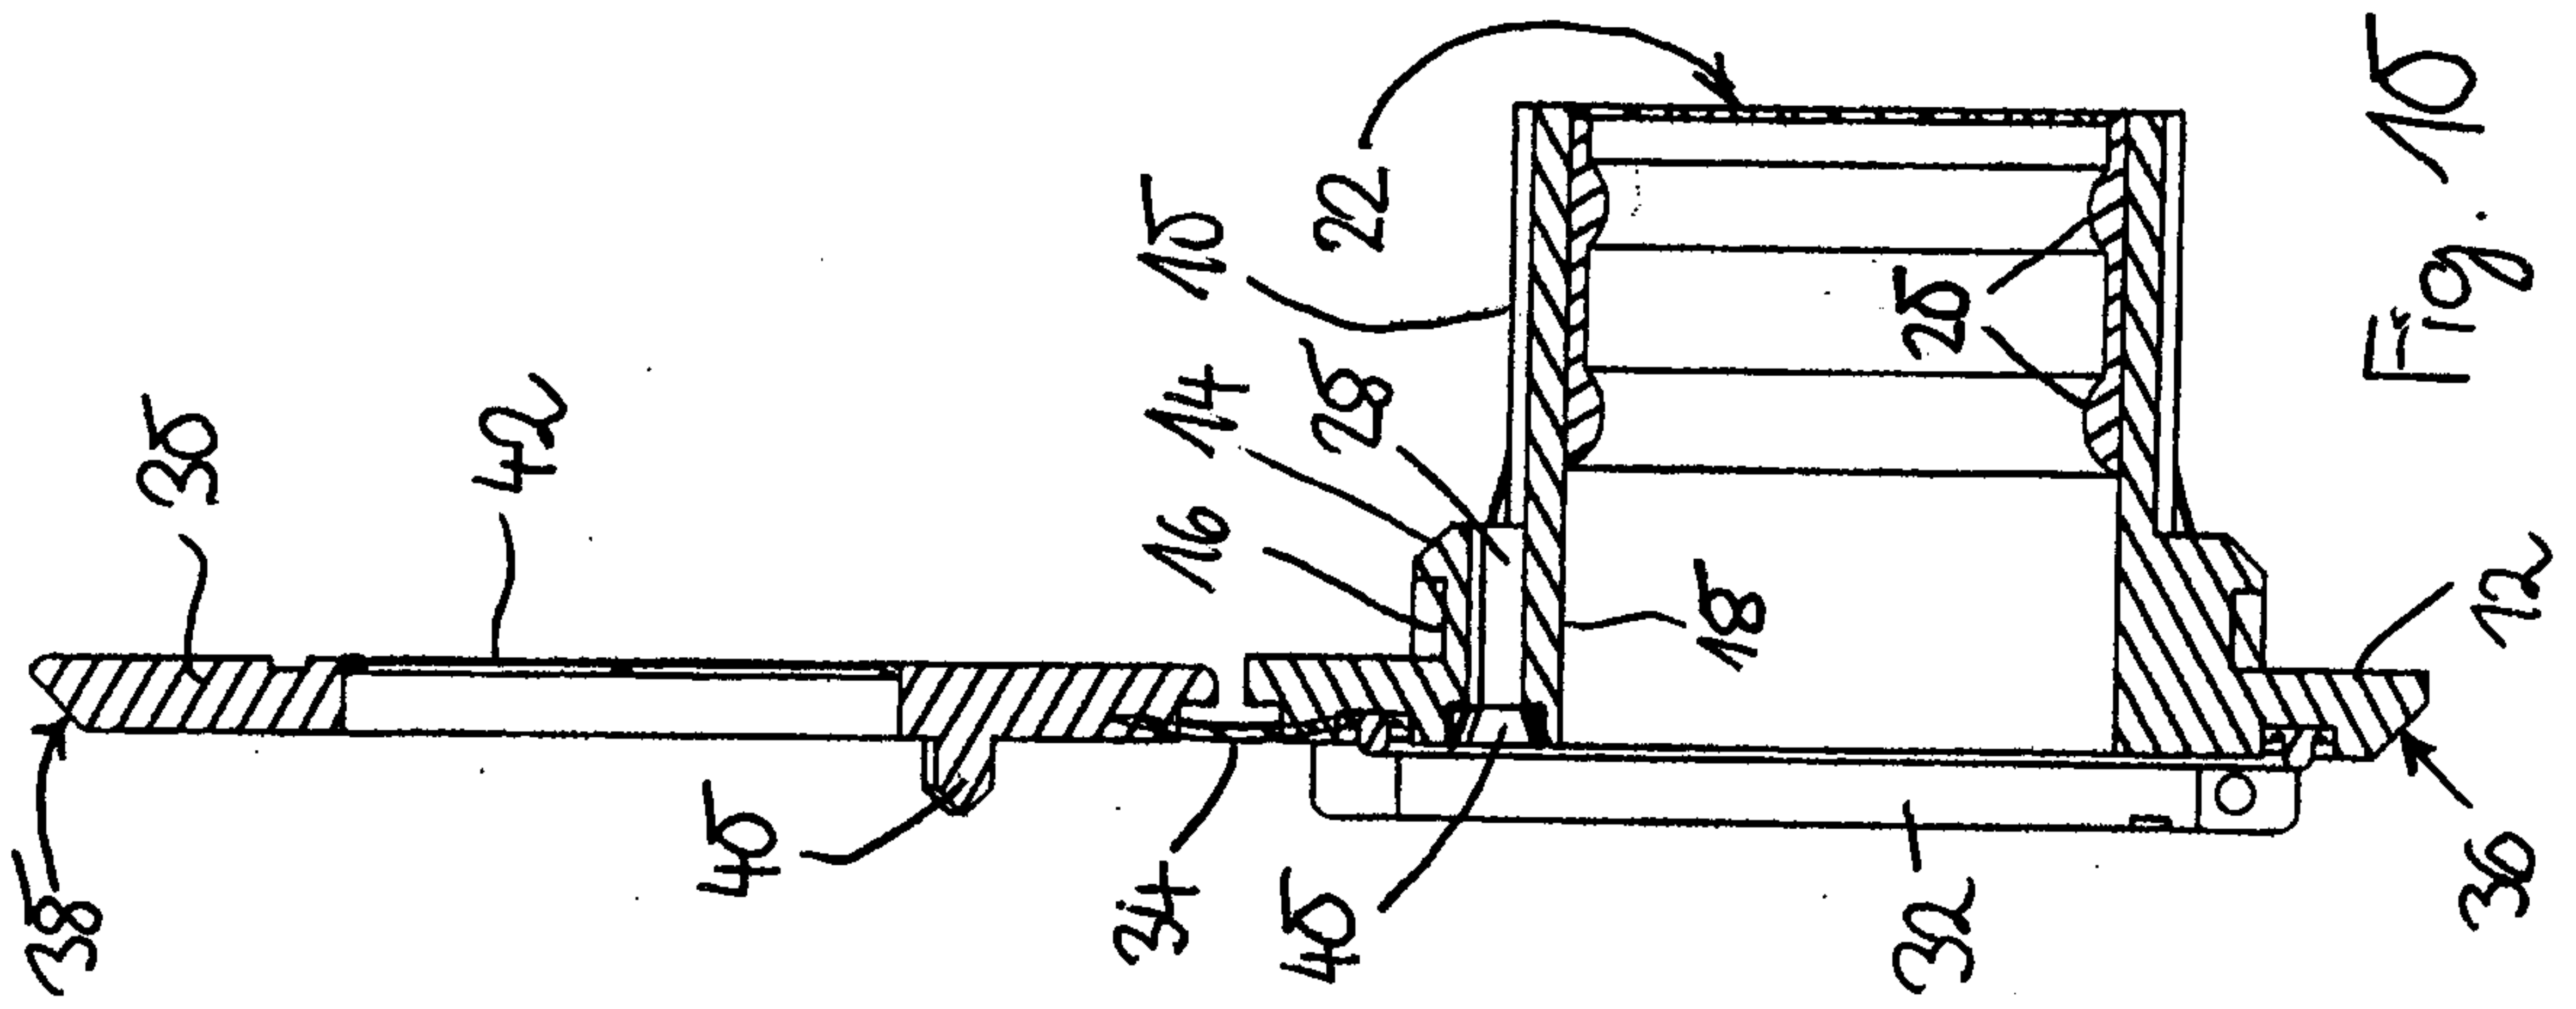


Fig. 7

4/4



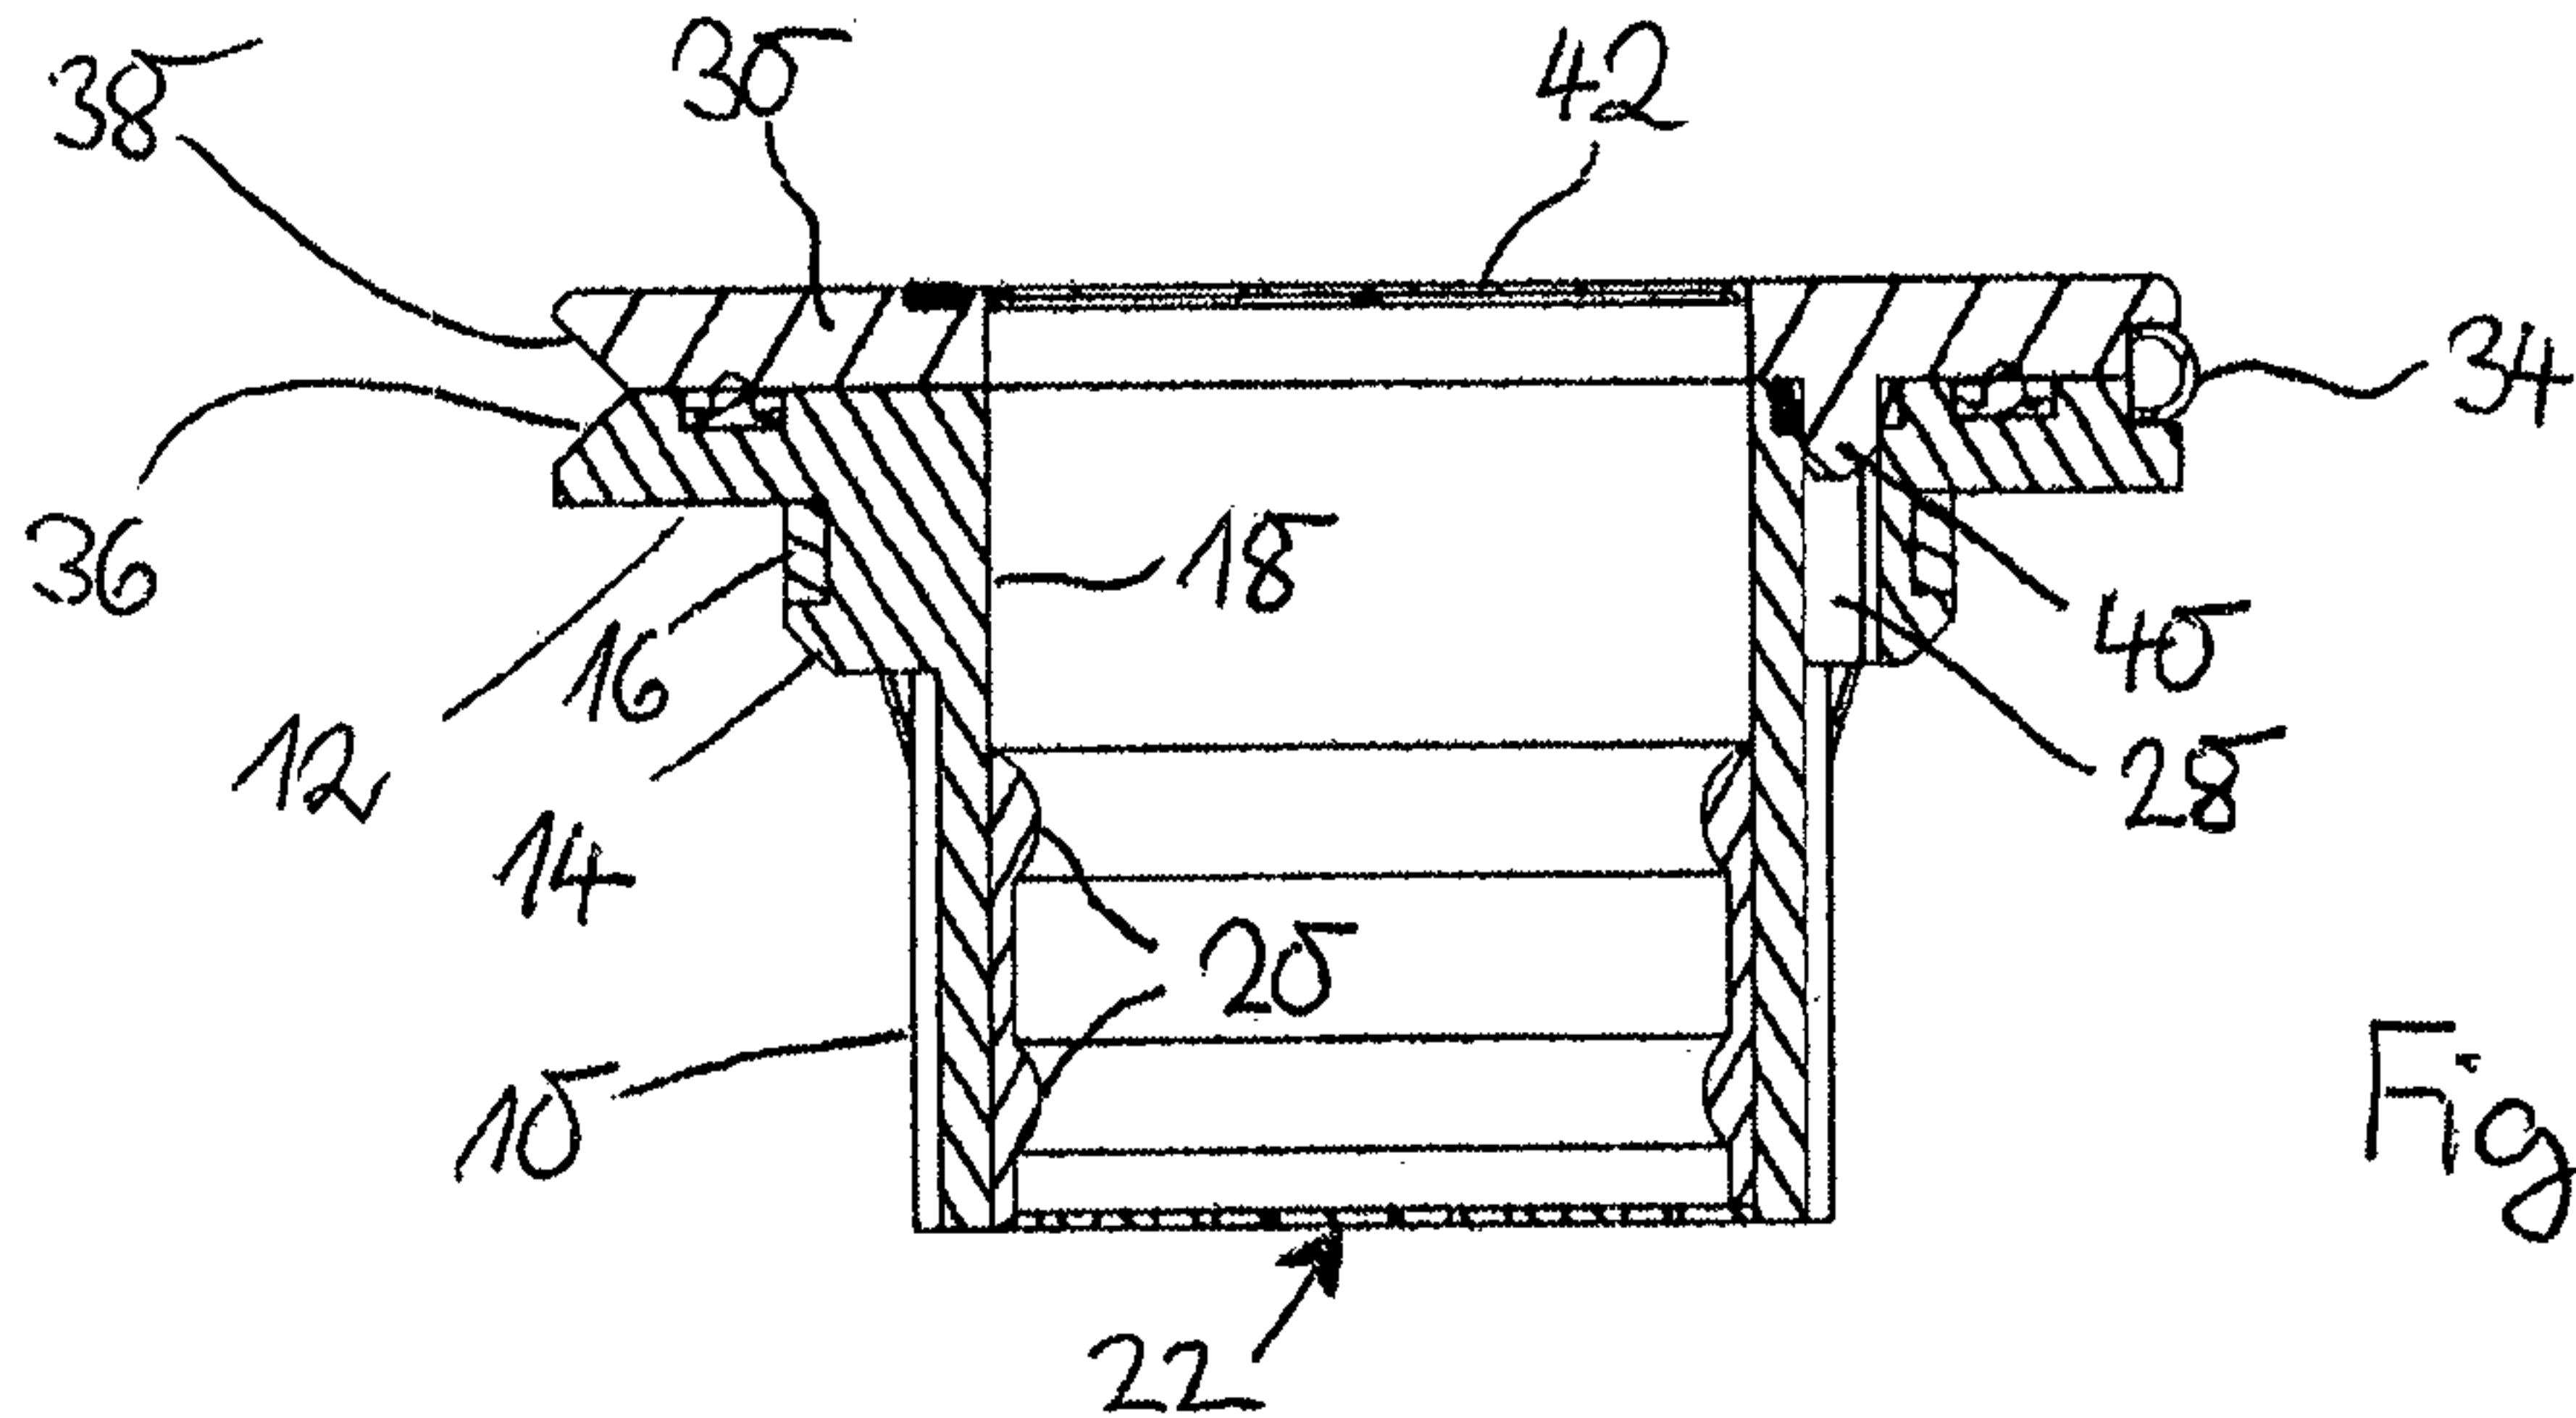


Fig. 5