



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

⑪ Publication number: **0 162 001**  
**B1**

⑫

## EUROPEAN PATENT SPECIFICATION

⑯ Date of publication of patent specification: **30.08.89** ⑮ Int. Cl.<sup>4</sup>: **E 21 B 19/16, E 21 B 3/02,**

⑯ Application number: **85630050.4** **E 21 B 19/02**

⑯ Date of filing: **04.04.85**

---

④ Top drive well drilling apparatus with improved wrench assembly.

---

⑩ Priority: **16.04.84 US 600939**

⑯ Date of publication of application:  
**21.11.85 Bulletin 85/47**

⑯ Publication of the grant of the patent:  
**30.08.89 Bulletin 89/35**

⑯ Designated Contracting States:  
**DE FR GB**

⑯ References cited:  
**FR-A-1 603 776**  
**FR-A-2 531 479**  
**US-A-3 527 309**  
**US-A-3 808 916**  
**US-A-4 345 493**

⑩ Proprietor: **VARCO INTERNATIONAL, INC.**  
**743 North Eckhoff Street P.O. Box 6626**  
**Orange, CA 92668 (US)**

⑩ Inventor: **Johnson, Horace Ashell**  
**171 Warrenton Drive**  
**Houston Texas 77024 (US)**  
Inventor: **Smith, Roger, Jr.**  
**805 Serenada**  
**Georgetown Texas 78626 (US)**

⑩ Representative: **Waxweiler, Jean et al**  
**OFFICE DENNEMEYER S.à.r.l. P.O. Box 1502**  
**L-1015 Luxembourg (LU)**

EP **0 162 001** B1

---

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

---

### Description

This invention relates in general to a well drilling apparatus and in particular to a top drive well drilling apparatus.

A top drive drilling system rotates a drill string from the top, rather than using a rotary table, a kelly, and a kelly bushing. An electric drilling motor is suspended from the drilling rig's conventional swivel and is attached to the top of the drill string. The drilling motor may be attached to a carriage, which is guided by a pair of vertical tracks. The drilling motor is connected to the drill string by a cylindrical stem, which extends downward from the motor. A wrench assembly is also suspended from the drilling motor, in order to break out or make up connections between the stem and the drill string. A drill pipe elevator is suspended by links below the bottom of the stem. As the drill string is drilled down, the elevator will contact the floor of the drilling rig. If the elevator and the wrench assembly could be moved out of the way, the drill string could be drilled down further before additional lengths of pipe must be added to the drill string.

FR-A-2531479 describes a known top drive drilling apparatus according to the preamble of claim 1 which has the disadvantages referred to hereinbefore. The object of the invention is to avoid these disadvantages in the top drive drilling apparatus of the preamble of claim 1. This is achieved in that top drive drilling apparatus by the features recited in the characterising part of claim 1.

The wrench assembly is mounted on a carriage and can be retracted away from the stem and the drill string. The wrench assembly can be moved between a working position over well center and a retracted position away from well center. Preferably, the wrench assembly can also move vertically.

The above, as well as additional objects, features and advantages of the invention, will become apparent in the following detailed description of the invention shown by way of example in the attached drawings, wherein:

Fig. 1 is a perspective view of a drilling apparatus of the invention;

Fig. 2 is a side view of a carriage and a wrench assembly; and

Fig. 3 is a front view of a carriage and a wrench assembly.

Figure 1 illustrates a top drive well drilling apparatus of the invention. A conventional traveling block 13 and a conventional hook 15 are suspended by cables 17 from the top of an oil well derrick. A drive unit 19 is suspended from the hook 15 and mounted on a carriage 21. The drive unit 19 is a drilling motor of a conventional type. The carriage 21 guides the drive unit 19 up and down along a pair of vertical guide tracks 23. A cylindrical quill, or stem 25, extends downward from the drive unit 19, and connects to the top of a drill string 27. The drill string 27

consists of a series of pipe sections and has a rotary rock bit attached at the bottom for drilling a well bore.

5 A wrench assembly 29 is provided for making up the connection between the stem 25 and the drill string 27. The wrench assembly is mounted to the carriage 21, and is capable of moving between a working position along the stem 25, or the axis of the drill string 27, and a retracted position away from the axis of the drill string 27. The wrench assembly 29 is also capable of moving vertically along the stem 25 and the drill string 27.

10 Figures 2 and 3 are close-up views of the carriage 21 and the wrench assembly 29. The wrench assembly 29 has a top wrench 33 and a bottom wrench 35. These wrenches 33, 35 are open-faced or have a load-bearing gate. The top wrench 33 is a spline wrench and is adapted to engage the step 25. The bottom wrench 35 has grippers and is adapted to engage the drill string 27. The wrenches 33, 35 can thus be used to make up or break out connections between the stem 25 and the drill string 27 in a manner well known in the art. The wrench assembly 29 can also be used to make up or break out connections between various subs between the stem 25 and the drill string 27, such as kelly cocks.

15 20 25 30 35 40 45 The wrench assembly 29 is carried by a C-shaped bracket 37. This bracket 37 has a T-shaped flange 39, which fits within a slot 41 on the bottom of a vertically movable inner tube 43. The bracket 37 is also connected to a hydraulic cylinder 45, which is secured to a flange 47 extending down from the inner tube 43.

40 45 50 55 60 65 The inner tube 43 passes upward between a set of rollers 49 into an outer tube 51. The inner tube 43 continues upward, out of the outer tube 51, and between a second set of rollers 53. The outer tube 51 is welded to the frame 55 of the carriage 21, and the inner tube 43 is movable vertically through the outer tube 51.

A pair of chains 57 are attached to brackets 59 on each side of the inner tube 43. Each chain 57 extends upward, around a pulley 61, and then downward to a bracket 63 on the carriage 21. The bracket 37, the inner tube 43, and the chains 57 are thus a means for mounting the wrench assembly 29 on the carriage 21. The pulleys 61 are each mounted on the lower ends of hydraulic cylinders 65, the upper ends of which are connected to the carriage 21. The carriage 21 has a plurality of wheels 67, which guide the carriage 21 along the guide track 23.

In operation, the hydraulic cylinder 45 connected to the wrench assembly bracket 37 is a means for moving the wrench assembly 29 between a working position along the axis of the drill string 27 and a retracted position away from the axis of the drill string 27. Figure 2 illustrates the wrench assembly 29 in the working position, with the hydraulic cylinder 45 fully extended. As the cylinder 45 is retracted, the

bracket 37 and the wrench assembly 29 are moved to the retracted position. When the cylinder 29 is extended, the bracket 37 and wrench assembly 29 are returned to the working position.

The hydraulic cylinders 65 attached to the carriage 21 are a means for moving the wrench assembly 29 vertically, relative to the stem 25. Figures 2 and 3 illustrate the wrench assembly 29 in the uppermost position relative to the stem 25, and the cylinders 65 are fully retracted. To lower the wrench assembly 29, the cylinders 65 are extended. The chains 57 and pulleys 61 create a two to one ratio between the movement of the wrench assembly 29 and the movement of the pulleys 61. For example, if the cylinders 65 are extended to move the pulley 61 downward 1.22 m (four feet), the wrench assembly 29 will be moved downward a distance of 2.44 m (eight feet).

The well drilling apparatus of the invention has an improved wrench assembly 29, which provides several advantages over the prior art. The capability of moving vertically enables the wrench assembly 29 to break connections at several points along the stem 25 and drill string 27, and the break out can be performed anywhere in the derrick. The retractability of the wrench assembly 29 enables the wrenches 33, 35 to get around obstacles along the axis of the stem 25, such as kelly cocks.

While the invention has been shown in only one of its forms, it should be apparent to those skilled in the art that it is not so limited, but is susceptible to various changes and modifications, without departing from the scope thereof as defined by the appended claims.

### Claims

1. A top drive well drilling apparatus, comprising:  
a drive unit (19) for rotating a drill string (27) about the longitudinal axis of the drill string;  
a guide track (23), which extends generally in a vertical direction;  
a carriage (21) for connecting and guiding the drive unit (19) along the guide track (23);  
a stem (25), extending downward from the drive unit (19), for transmitting torque from the drive unit (19) to the drill string (27);  
a wrench assembly (29) for making and breaking connections between the stem (25) and the drill string (27) and means (37, 43, 57) for mounting the wrench assembly (29) on the carriage (21); characterized by  
means (45) for moving the wrench assembly (29) between a working position along the axis of the drill string (27) and a retracted position away from the stem (25) and the axis of the drill string (27) and by the wrench assembly (29) being of the open-faced or load-bearing gate type.

2. A top drive well drilling apparatus, according to claim 1, characterized by means (65) for moving the wrench assembly (29) vertically in relation to the stem (25).

### Patentansprüche

1. Bohrvorrichtung mit oberem Antrieb, umfassend:  
5 eine Antriebseinheit (19) zum Drehen eines Bohrgestängestranges (27) um dessen Längsachse;  
10 eine Führungsbahn (23), die sich insgesamt in vertikaler Richtung erstreckt;  
15 einen Wagen (21) zum Anschließen und Führen der Antriebseinheit (19) längs der Führungsbahn (23);  
20 einen Schaft (25), der sich von der Antriebseinheit (19) aus anwärts erstreckt, um Drehmoment von der Antriebseinheit (19) auf den Bohrgestängestrang (27) zu übertragen;  
25 eine Schraubenschlüsselvorrichtung (29) zum Herstellung und Trennen von Verbindungen zwischen dem Schaft (25) und dem Bohrgestängestrang (27); und  
30 eine Einrichtung (37, 43, 57) zum Befestigen der Schraubenschlüsselvorrichtung (29) an dem Wagen (21); dadurch gekennzeichnet,  
daß eine Einrichtung (45) vorgesehen ist zum Bewegen der Schraubenschlüsselvorrichtung (29) zwischen einer Arbeitsposition längs der Achse des Bohrgestängestranges (27) und einer zurückgezogenen, von dem Schaft (25) und der Achse des Bohrgestängestranges (27) entfernten Position, und daß die Schraubenschlüsselvorrichtung (29) offen oder mit Lasttragklappe versehen ist.
2. Bohrvorrichtung mit oberem Antrieb nach Anspruch 1, gekennzeichnet durch eine Einrichtung (65) zum Vertikalbewegen der Schraubenschlüsselvorrichtung (29) in bezug auf den Schaft (25).

### Revendications

1. Appareil de forage de puits à entraînement en tête, comprenant:  
40 un groupe moteur (19) destiné à entraîner un train de tiges (27) en rotation autour de l'axe longitudinal de ce train de tiges,  
45 un rail de guidage (23) qui s'étend sensiblement suivant une direction verticale,  
50 un chariot (21) destiné à relier le groupe moteur (19) au rail de guidage (23) et à guider ce groupe sur ce rail,  
55 une maîtresse tige (25) s'étendant vers le bas à partir du groupe moteur (19) et destinée à transmettre un couple de ce groupe moteur (19) au train de tiges (27),  
60 un ensemble de serrage (29) destiné à réaliser et rompre des jonctions entre la maîtresse tige (25) et le train de tiges (27) et  
65 des moyens (37, 43, 57) destinés à monter l'ensemble de serrage (29) sur le chariot (21), caractérisé  
par des moyens (45) destinés à déplacer l'ensemble de serrage (29) entre une position de travail située le long de l'axe du train de tiges (27) et une position escamotée située à l'écart de la maîtresse tige (25) et de l'axe du train de tiges (27) et

par le fait que l'ensemble de serrage (29) est du type à face avant ouverte ou à entrée de support de charge.

2. Appareil de forage de puits à entraînement

en tête, suivant la revendication 1, caractérisé par des moyens (65) destinés à déplacer l'ensemble de serrage (29) verticalement par rapport à la maîtresse tige (25).

5

10

15

20

25

30

35

40


45

50

55

60

65

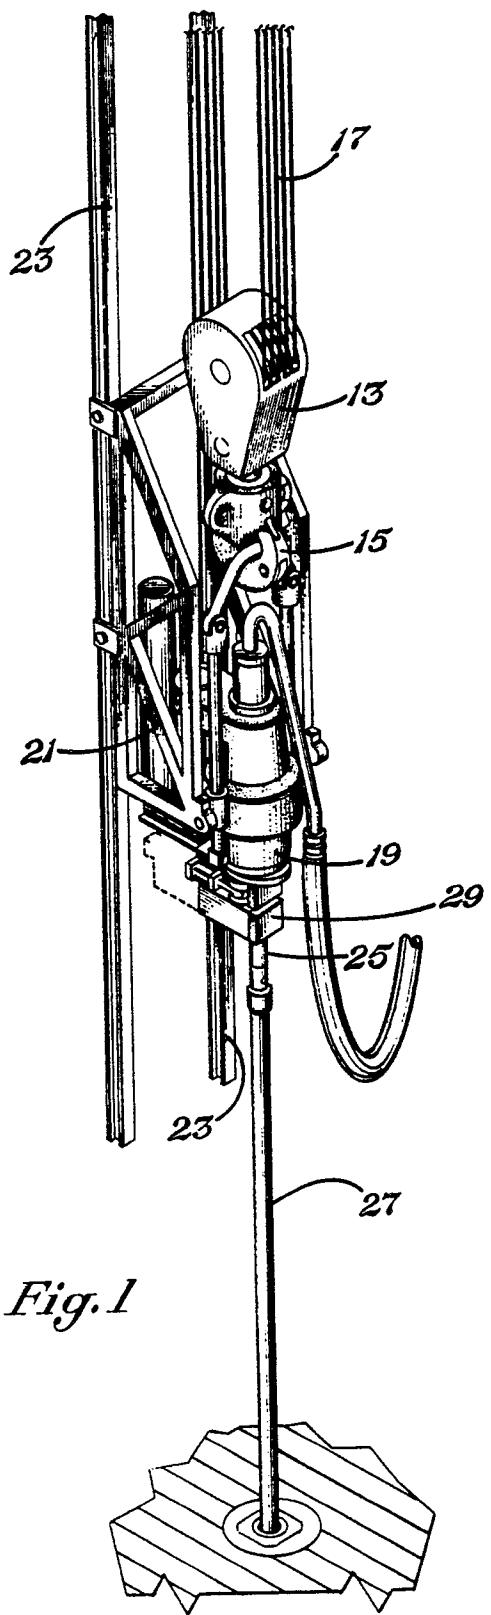

*Fig. 1*

*Fig. 2*

