



(51) International Patent Classification:
E21B 29/06 (2006.01) *E21B 7/08* (2006.01)

(21) International Application Number:
PCT/US2010/026067

(22) International Filing Date:
3 March 2010 (03.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/396,986 3 March 2009 (03.03.2009) US

(71) Applicant: **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, Texas 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STOWE, Calvin J.** [US/US]; 4327 Verone, Bellaire, Texas 77401 (US). **MC-NICOL, James M.** [GB/US]; 10 Snowbell Place, Indian Springs The Woodlands, Texas 77381 (US). **PONDER, Andrew D.** [US/US]; 5826 Westminister Village Drive, Houston, Texas 77084 (US).

(74) Agent: **MURPHY, Keith J.**; CANTOR COLBURN LLP, 20 Church Street, 22nd Flr., Hartford, Connecticut 06103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

[Continued on next page]

(54) Title: HYDRAULICALLY RELEASED WINDOW MILL

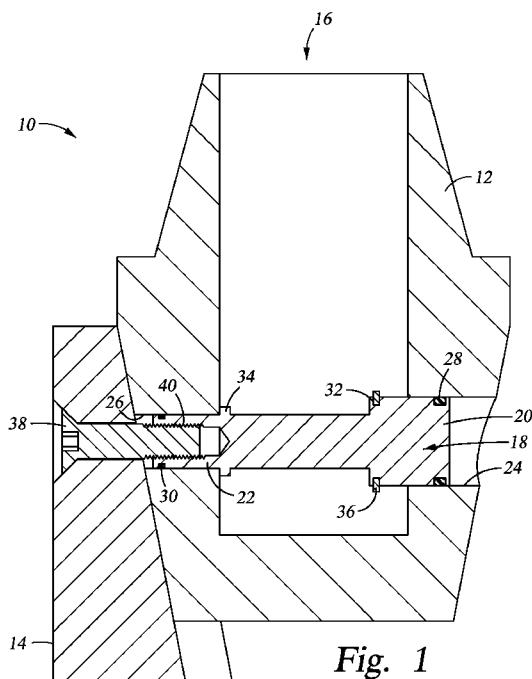


Fig. 1

(57) Abstract: An affixation and release arrangement includes a first component having a fluid pressure chamber; a piston mounted in the first component and exposed to the fluid pressure chamber; a second component affixed to the first component through the piston, the piston responsive to fluid pressure increase within the chamber to unaffix the second component from the first component. Methods are included.



-
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- Published:**
- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

HYDRAULICALLY RELEASED WINDOW MILL

Inventors: STOWE, Calvin J., MCNICOL, James M., PONDER, Andrew D.

BACKGROUND

[0001] In the hydrocarbon industry it is common to run a whipstock and a mill in the same run by hanging the whipstock from the end of the mill string. Generally this is done by using a bolt at an uphole end of the whipstock that runs into the mill to support the weight of the whipstock during run in. Once the whipstock has landed at a selected position and orientation within the borehole, the whipstock is anchored in place and will bear weight. The mill is then separated from the whipstock by set down weight on the bolt that extends from the whipstock to the mill. The bolt is sheared to effect separation. Because the whipstock is necessarily thinner at the uphole end thereof, it has commonly been a practice in the industry to use a lug at the uphole end of the whipstock to support the shear load with minimal distortion of the whipstock. While this arrangement does tend to work as planned, it also presents a heavy piece of material that is significantly less than a full circle thereby guaranteeing an interrupted cut. Such interrupted cuts are known to damage the mill but this has traditionally been endured due to the lack of any alternative arrangement that will function more favorably.

SUMMARY

[0002] An affixation and release arrangement includes a first component having a fluid pressure chamber; a piston mounted in the first component and exposed to the fluid pressure chamber; a second component affixed to the first component through the piston, the piston responsive to fluid pressure increase within the chamber to unaffix the second component from the first component.

25

[0003] A method for releasing a mill and whipstock combination including pressuring a piston within a chamber of the mill; loading a fastener with the piston; overcoming the fastener; releasing the mill from the whipstock.

[0004] A method for releasing a mill and whipstock combination including pressuring a piston within a chamber of the mill; loading a securement engaged with the piston; overcoming the securement; releasing the mill from the whipstock.

5

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] Referring now to the drawings wherein like elements are numbered alike in the several figures:

Figure 1 is a schematic view of a mill connected to a whipstock with a piston actuated affixation arrangement as taught herein;

10

Figure 2 is a schematic view of the mill and whipstock disconnected by piston actuation;

Figure 3 is a schematic view of an alternate embodiment.

DETAILED DESCRIPTION

[0006] Referring to **Figure 1** an affixation and release arrangement **10** is illustrated. The specifically depicted embodiment is an affixation between a first component such as a mill **12** and a second component such as a whipstock **14** but it is to be appreciated that the concept hereof can be extended to other affixations that require separation. Referring directly to the Figures, the mill **12** defines a chamber **16** therein. A piston **18** is disposed in pressure communication with the chamber **16** such that a change in pressure in the chamber will cause a change in position of the piston **18**. In one embodiment, the arrangement is configured to cause the piston **18** to move upon a pressure increase in the chamber **16**. In the illustrated embodiment, this is affected by configuring the piston **18** with a differential area end to end. Hence upon increased pressure, the piston will move. Addressing specifically the differential area of the piston **18**, it is noted that in the illustration, the portion of the piston **18** that for convenience is referred to here as piston head **20**, on the right side of drawing **Figure 1** is of a dimension that is larger than that of a portion of the piston **18**, referred to herein for convenience as piston tail **22**. Piston head **20** and piston tail **22** are accommodated laterally in the mill **12** in bores **24** and **26** that are sized to promote fluid pressure sealability with the piston head **20** and piston tail **22**, respectively. Sealing is enhanced by the provision of seals **28** and **30** at each of piston head **20** and piston tail **22**. In one embodiment the seals **28** and **30** are o-rings. In the condition of

piston **18** as described it will be evident to one of ordinary skill in the art that increasing fluid pressure in chamber **16** will cause the piston **18** to move toward the end thereof that is of greater area. In the configuration described above this is toward piston head **20**. This also corresponds to the right side of the figure as illustrated.

5

[0007] In order to prevent the piston from moving too far in either direction the illustrated embodiment is configured with stops **32** and **34**. These are in one embodiment as illustrated with stop **32** being a snap ring received in a groove **36** and stop **32** being a piece of the piston **18** itself. It will be understood however that these can be reversed or the stop function otherwise accomplished. In the specifically illustrated embodiment the construction is related to ease of manufacture of the arrangement **10** since in this configuration the entire piston **18** is insertable through the bore **24** and then the snap ring **32** may be engaged with the groove **36** through chamber **16**. Because in the setting of the illustrated embodiment there is no reason that reengagement would be desired, there is no reason to include a biasing member to urge the piston **18** in a direction opposite that of the direction of movement under increased chamber fluid pressure. It will be appreciated however, that in other embodiments utilizing the same concept as the embodiment illustrated might benefit from a biasing member and hence in such an arrangement a biasing member such as a spring would be located to act in a direction opposite the direction of fluid pressure movement such as in compression between the ring **32** and the chamber wall directly to the right of the ring **32** in the Figure, for example, or might be located to act in a same direction as the direction of fluid pressure movement such as between the stop **34** and the chamber wall directly to the left of the stop **34** in the Figure, for example.

25

[0008] The whipstock **14**, for run in, is secured to the mill **12** by a fastener **38** that is in affixed relationship with the piston **18**. In one embodiment, the affixed relationship is a threaded or press fit relationship at interface **40**. In some embodiments the threaded engagement, press fit engagement or the fastener itself may be overcome solely by the pressure based movement of the piston resulting in release of the mill **12** from the whipstock **14**. In other embodiments however, it is contemplated that a parting configuration be provided in the fastener. Such parting configurations may present as a groove in the fastener to reduce tensile capacity thereof, a heat-treated area for the same purpose, or other similar treatments that will reduce strength of the

30

fastener. In some embodiments the reduction in strength of the fastener will be concentrated in a reduction in tensile strength while substantially preserving shear and/or bending strength. In each case, the parting configuration is configured to cause parting of the fastener **38** below a surface **42** of the whipstock face to ensure that the fastener will not itself present an impediment to mill **12** advancement.

[0009] With the fastener **38** secured to the piston **18**, through an uphole end of whipstock **14**, the whipstock **14** is affixed to the mill **12** and remains that way until the arrangement is actuated by increasing fluid pressure in chamber **16**. Fluid pressure can be increased in a number of ways such as by pump or by heaters or by energetic compounds (particularly if the chamber **16** is configured as an enclosed space), etc. and the pressure can be locally generated or remote as desired.

[0010] In use, the arrangement is run into the hole in the condition illustrated in Figure 1 and located by suitable means. Once the whipstock is at final destination and orientation the pressure is increased in chamber **16** whereby the piston **18** is moved to the right of the drawing Figure and the fastener **38** parts, which is illustrated in Figure 2. Once the arrangement **10** has achieved the condition illustrated in Figure 2, the mill **12** is free to move relative to the whipstock **14**. Because there is no remaining bolt or lug to be milled off the whipstock **14**, there is far less eccentric cut experienced by the mill when advancing to its primary objective. The life of the mill is therefore extended and the job it can do enhanced since it has not experienced a difficult eccentric cut, as has traditionally been the case.

In an alternate embodiment, referring to figure 3, the piston **118** is configured differently. The piston **118** itself extends through the whipstock **14** and is secured at an opposite surface **44** to the face surface **42**. In the specifically illustrated embodiment, a securement **48** is secured in a groove **50** of the piston **118**. This ring **48** may be a snap ring, an e clip, etc. Further the securement **48** may be a roll pin or other similar structure (also considered schematically represented by figure 3). In this embodiment, upon the application of fluid pressure within chamber **16**, piston **118** is urged as it was in the previously described embodiment but instead of parting the fastener as shown in Figure 2, the securement **48** is disengaged from the piston **118**. Disengagement may be by shear, deformation, etc. as long as it is no longer in a position to hold the piston in place and thereby allows the fluid pressure to move the

piston **118** in a direction that will disengage the piston itself from the whipstock (to the right in the figure). In this embodiment, there is no component of the securement left in the whipstock and hence no concern that such component might come loose and interfere with a well operation.

5

[0011] While preferred embodiments have been shown and described, various modifications and substitutions may be made thereto without departing from the spirit and scope of the invention. Accordingly, it is to be understood that the present invention has been described by way of illustration and not limitation.


10

CLAIMS

- 1 1 An affixation and release arrangement comprising:
- 2 (a) a first component having a fluid pressure chamber;
- 3 (b) a piston mounted in the first component and exposed to the fluid
- 4 pressure chamber;
- 5 (c) a second component affixed to the first component through the
- 6 piston, the piston responsive to fluid pressure increase within the
- 7 chamber to unaffix the second component from the first
- 8 component.
- 1 2 An affixation and release arrangement as claimed in claim 1 wherein the
- 2 second component is affixed to the first component by a fastener.
- 1 3 An affixation and release arrangement as claimed in claim 2 wherein the
- 2 fastener is threaded.
- 1 4 An affixation and release arrangement as claimed in claim 2 wherein the
- 2 fastener is a press fit fastener.
- 1 5 An affixation and release arrangement as claimed in claim 2 wherein the
- 2 fastener includes a parting feature.
- 1 6 An affixation and release arrangement as claimed in claim 5 wherein the
- 2 parting feature facilitates parting under tensile load.
- 1 7 An affixation and release arrangement as claimed in claim 5 wherein the
- 2 parting feature preserves fastener strength in at least one of shear and bending.
- 1 8 An affixation and release arrangement as claimed in claim 1 wherein the
- 2 second component is affixed to the first component by a securement to the
- 3 piston.
- 1 9 An affixation and release arrangement as claimed in claim 8 wherein the
- 2 securement is a ring.
- 1 10 An affixation and release arrangement as claimed in claim 8 wherein the
- 2 securement is a pin.

- 1 11 An affixation and release arrangement as claimed in claim 1 wherein the
2 piston includes a piston head and a piston tail, the piston head having greater
3 area than the piston tail.
- 1 12 An affixation and release arrangement as claimed in claim 11 wherein each of
2 the piston head and piston tail include stops.
- 1 13 An affixation and release arrangement as claimed in claim 1 wherein the first
2 component is a mill.
- 1 14 An affixation and release arrangement as claimed in claim 1 wherein the
2 second component is a whipstock.
- 1 15 A method for releasing a mill and whipstock combination comprising;
2 (a) pressuring a piston within a chamber of the mill;
3 (b) loading a fastener with the piston;
4 (c) overcoming the fastener;
5 (d) releasing the mill from the whipstock.
- 1 16 A method as claimed in claim 15 wherein the pressuring is by applied pressure
2 from a surface location.
- 1 17 A method as claimed in claim 15 wherein the pressuring is local to the mill
2 and whipstock.
- 1 18 A method as claimed in claim 15 wherein the loading of the fastener is tensile.
- 1 19 A method as claimed in claim 15 wherein the overcoming of the fastener is
2 parting of the fastener.
- 1 20 A method for releasing a mill and whipstock combination comprising;
2 (a) pressuring a piston within a chamber of the mill;
3 (b) loading a securement engaged with the piston;
4 (c) overcoming the securement;
5 (d) releasing the mill from the whipstock.

1/3

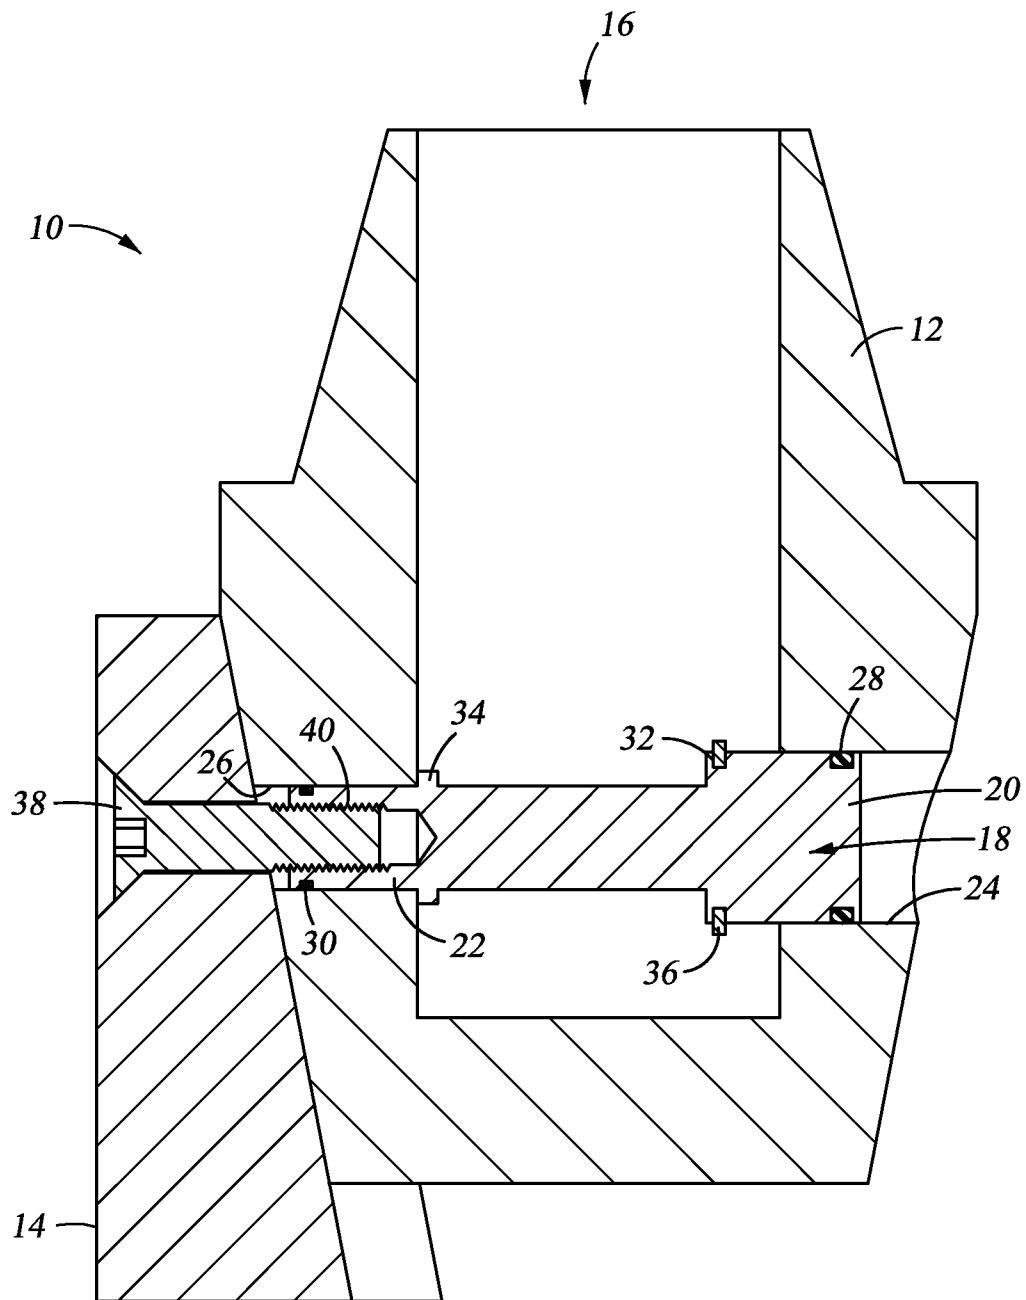*Fig. 1*

2/3

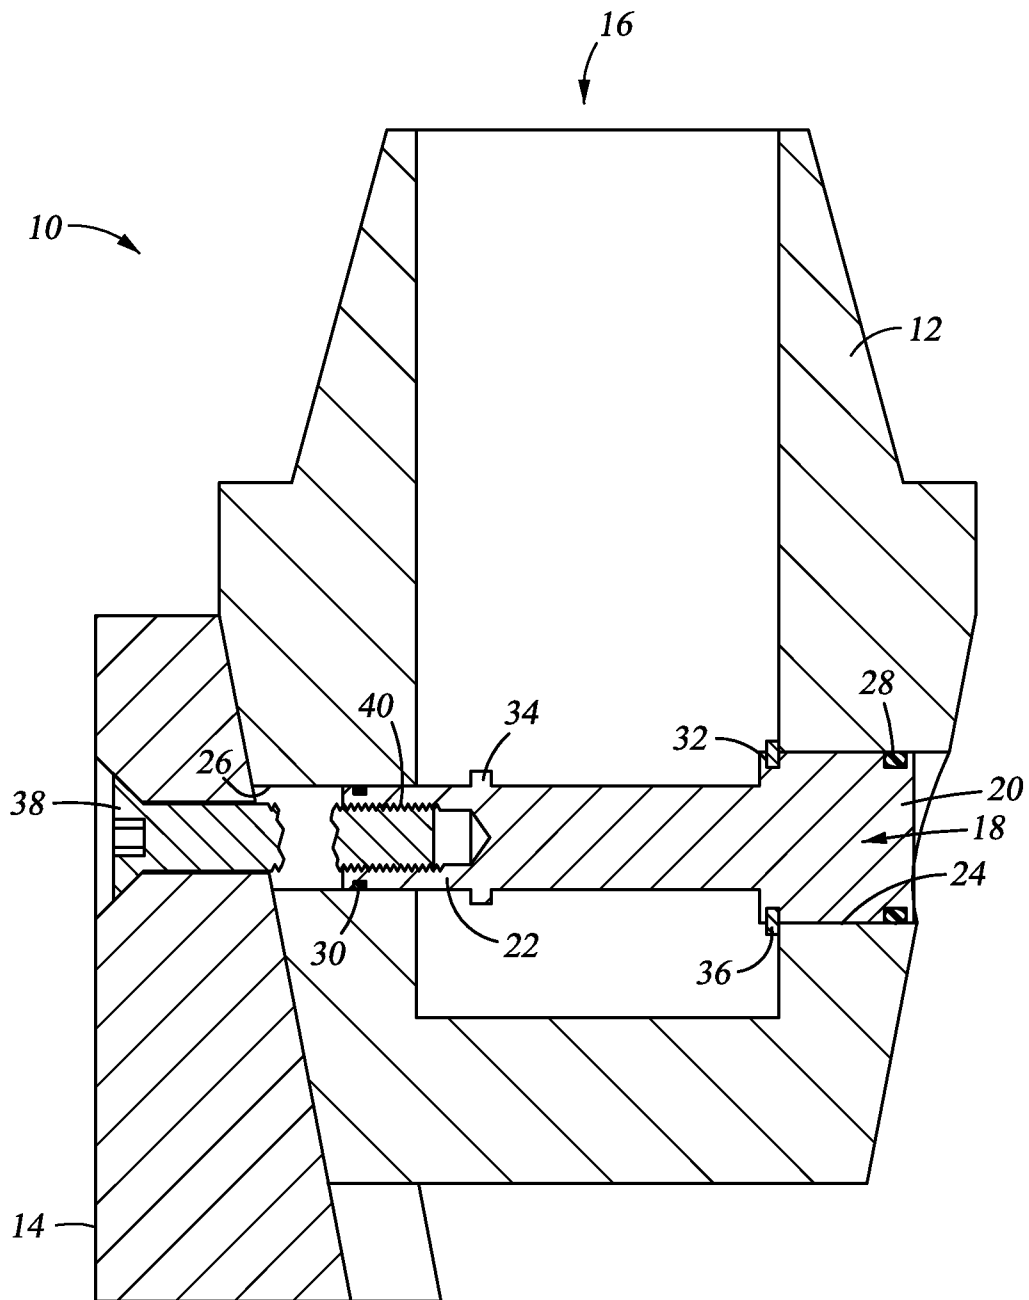


Fig. 2

3/3

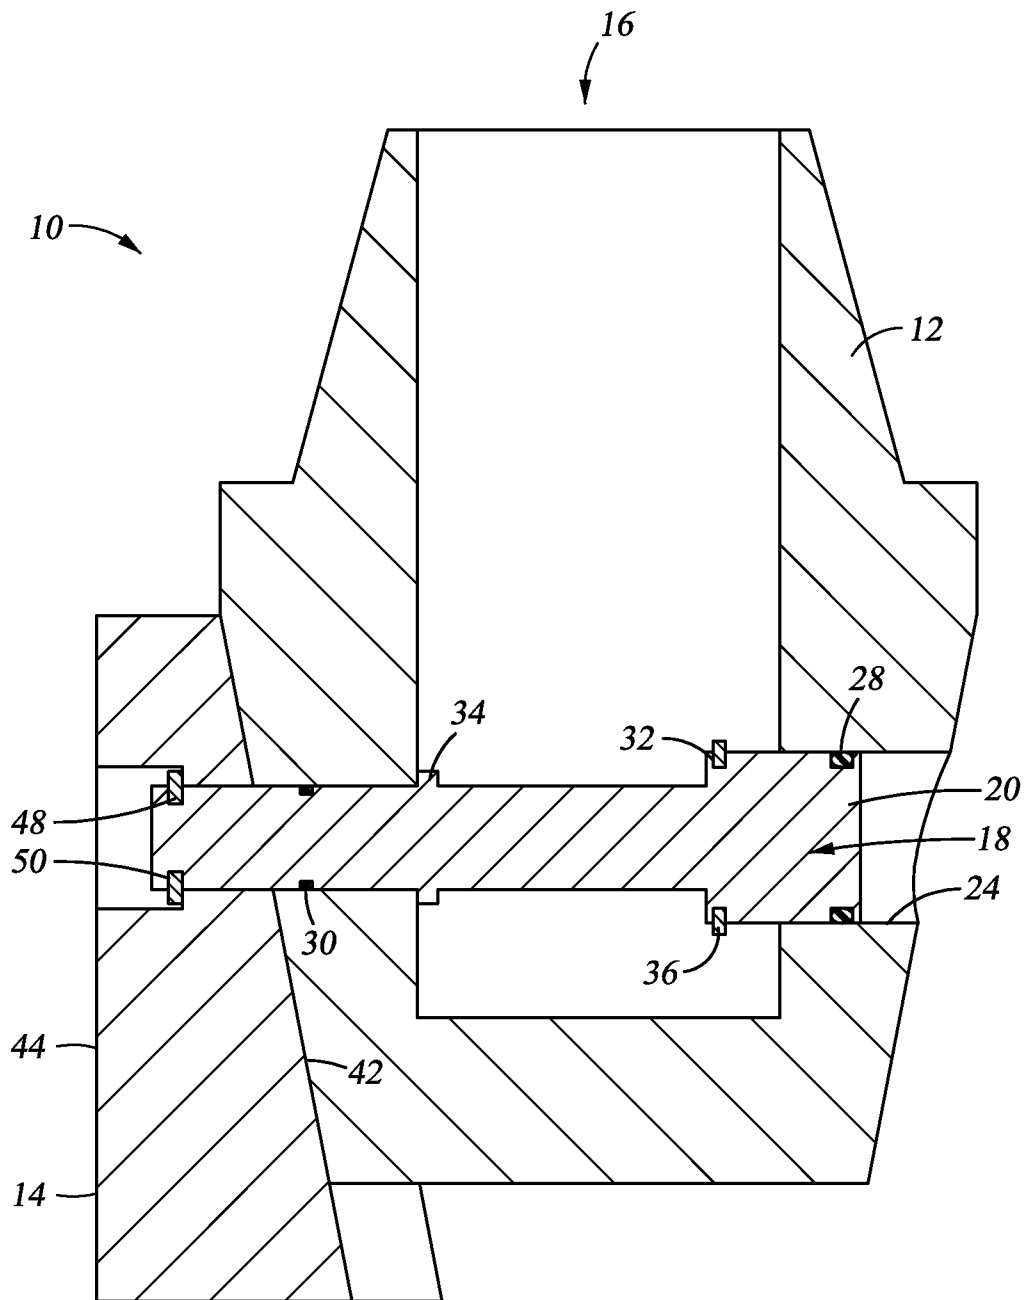


Fig. 3

A. CLASSIFICATION OF SUBJECT MATTER***E21B 29/06(2006.01)i, E21B 7/08(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 29/06; E03B 3/11; E21B 23/00; E21B 23/12; E21B 7/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: whipstock, piston,

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6648068 B2 (DEWEY; CHARLES H. et al.) 18 November 2003 See the whole document.	1-20
A	US 6695056 B2 (HAUGEN; DAVID M. et al.) 24 February 2004 See the whole document.	1-20
A	US 6612383 B2 (DESAI; PRAFUL C. et al.) 02 September 2003 See the whole document.	1-20
A	US 7178609 B2 (Daniel Hart. et al.) 20 February 2007 See the whole document.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 JULY 2010 (29.07.2010)

Date of mailing of the international search report

30 JULY 2010 (30.07.2010)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

YOO, Hyun Duk

Telephone No. 82-42-481-8308



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2010/026067

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6648068 B2	18.11.2003	CA 2200937 C	02.02.2010
		CA 2200938 C	16.05.2006
		CA 2684428-A1	03.11.1997
		CA 2684983-A1	03.11.1997
		GB 2313391 A	26.11.1997
		GB 2348664 A	11.10.2000
		US 2002-0060073 A1	23.05.2002
		US 2004-0089443 A1	13.05.2004
		US 2007-0187085 A1	16.08.2007
		US 5771972 A	30.06.1998
		US 5816324 A	06.10.1998
		US 5894889 A	20.04.1999
		US 6102123 A	15.08.2000
		US 7207401 B2	24.04.2007
US 6695056 B2	24.02.2004	AU 2001-86062 A1	26.03.2002
		AU 2003-219133 A1	09.09.2003
		AU 2003-219133 A8	09.09.2003
		CA 2421712 C	04.04.2006
		CA 2421712-A1	21.03.2002
		CA 2475602-A1	28.08.2003
		DE 60124409 D1	21.12.2006
		EP 1319115 A2	18.06.2003
		EP 1319115 B1	08.11.2006
		N020030403A	09.04.2003
		N020030403D0	27.01.2003
		US 2002-0170713 A1	21.11.2002
		US 2003-0141063 A1	31.07.2003
		US 6536525 B1	25.03.2003
		US 6708762 B2	23.03.2004
		WO 02-23008 A2	21.03.2002
		WO 02-23008 A3	21.03.2002
		WO 02-23008A3	19.09.2002
		WO 03-071084 A2	28.08.2003
		WO 03-071084 A3	28.08.2003
US 6612383 B2	02.09.2003	CA 2261495-A1	13.09.1999
		GB 2335217 A	15.09.1999
		GB 9903332 D0	07.04.1999
		US 2001-0035302 A1	01.11.2001
US 7178609 B2	20.02.2007	CA 2480187 C	18.11.2008
		CA 2480187-A1	02.03.2005
		CA 2560461-A1	13.10.2005
		CA 2623231-A1	05.04.2007
		CN 101310090 A	19.11.2008
		CN 101310090 A	19.11.2008
		CN 101310090 C0	19.11.2008
		EP 1926883 A1	04.06.2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2010/026067

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		GB 2405654 A	09.03.2005
		GB 2419622 A	03.05.2006
		GB 2422165 A	19.07.2006
		GB 2427639 A	03.01.2007
		GB 2429475 A	28.02.2007
		GB 2433765 A	04.07.2007
		GB 2434607 A	01.08.2007
		US 2002-0092655 A1	18.07.2002
		US 2003-0066650 A1	10.04.2003
		US 2003-0098181 A1	29.05.2003
		US 2004-0069504 A1	15.04.2004
		US 2004-0112642 A1	17.06.2004
		US 2004-0124008 A1	01.07.2004
		US 2004-0206548 A1	21.10.2004
		US 2004-0256161 A1	23.12.2004
		US 2005-0039905 A1	24.02.2005
		US 2005-0098349 A1	12.05.2005
		US 2005-0183892 A1	25.08.2005
		US 2005-0194143 A1	08.09.2005
		US 2005-0274547 A1	15.12.2005
		US 2006-0065402 A9	30.03.2006
		US 2006-0070771 A1	06.04.2006
		US 2006-0124352 A1	15.06.2006
		US 2007-0007041 A1	11.01.2007
		US 2007-0045006 A1	01.03.2007
		US 2007-0068704 A1	29.03.2007
		US 2007-0079995 A1	12.04.2007
		US 2008-0149393 A1	26.06.2008
		US 2008-0223575 A1	18.09.2008
		US 6415877 B1	09.07.2002
		US 6648081 B2	18.11.2003
		US 6854532 B2	15.02.2005
		US 6957698 B2	25.10.2005
		US 6981561 B2	03.01.2006
		US 7096975 B2	29.08.2006
		US 7114581 B2	03.10.2006
		US 7174975 B2	13.02.2007
		US 7270185 B2	18.09.2007
		US 7316274 B2	08.01.2008
		US 7353887 B2	08.04.2008
		US 7395882 B2	08.07.2008
		US 7624818 B2	01.12.2009
		US 7721822 B2	25.05.2010
		US 7748475 B2	06.07.2010
		US 7757784 B2	20.07.2010
		WO 2005-001237 A1	06.01.2005
		WO 2005-080742 A1	01.09.2005
		WO 2005-095751 A1	13.10.2005
		WO 2006-029379 A1	16.03.2006
		WO 2007-038208 A1	05.04.2007