



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2538471 A1 2005/04/14

(21) 2 538 471

(12) DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2004/09/28  
(87) Date publication PCT/PCT Publication Date: 2005/04/14  
(85) Entrée phase nationale/National Entry: 2006/02/24  
(86) N° demande PCT/PCT Application No.: IB 2004/003186  
(87) N° publication PCT/PCT Publication No.: 2005/034309  
(30) Priorité/Priority: 2003/09/30 (ITBO2003A000563)


(51) Cl.Int./Int.Cl. H02K 5/10 (2006.01),  
F16J 15/06 (2006.01)

(71) Demandeur/Applicant:  
SPAL AUTOMOTIVE S.R.L., IT

(72) Inventeur/Inventor:  
SPAGGIARI, ALESSANDRO, IT

(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : MOTEUR ELECTRIQUE POUR VENTILATEUR ELECTRIQUE ET METHODE DE MONTAGE DU MOTEUR  
ELECTRIQUE  
(54) Title: ELECTRIC MOTOR FOR ELECTRIC FAN AND ASSEMBLY METHOD THEREFOR

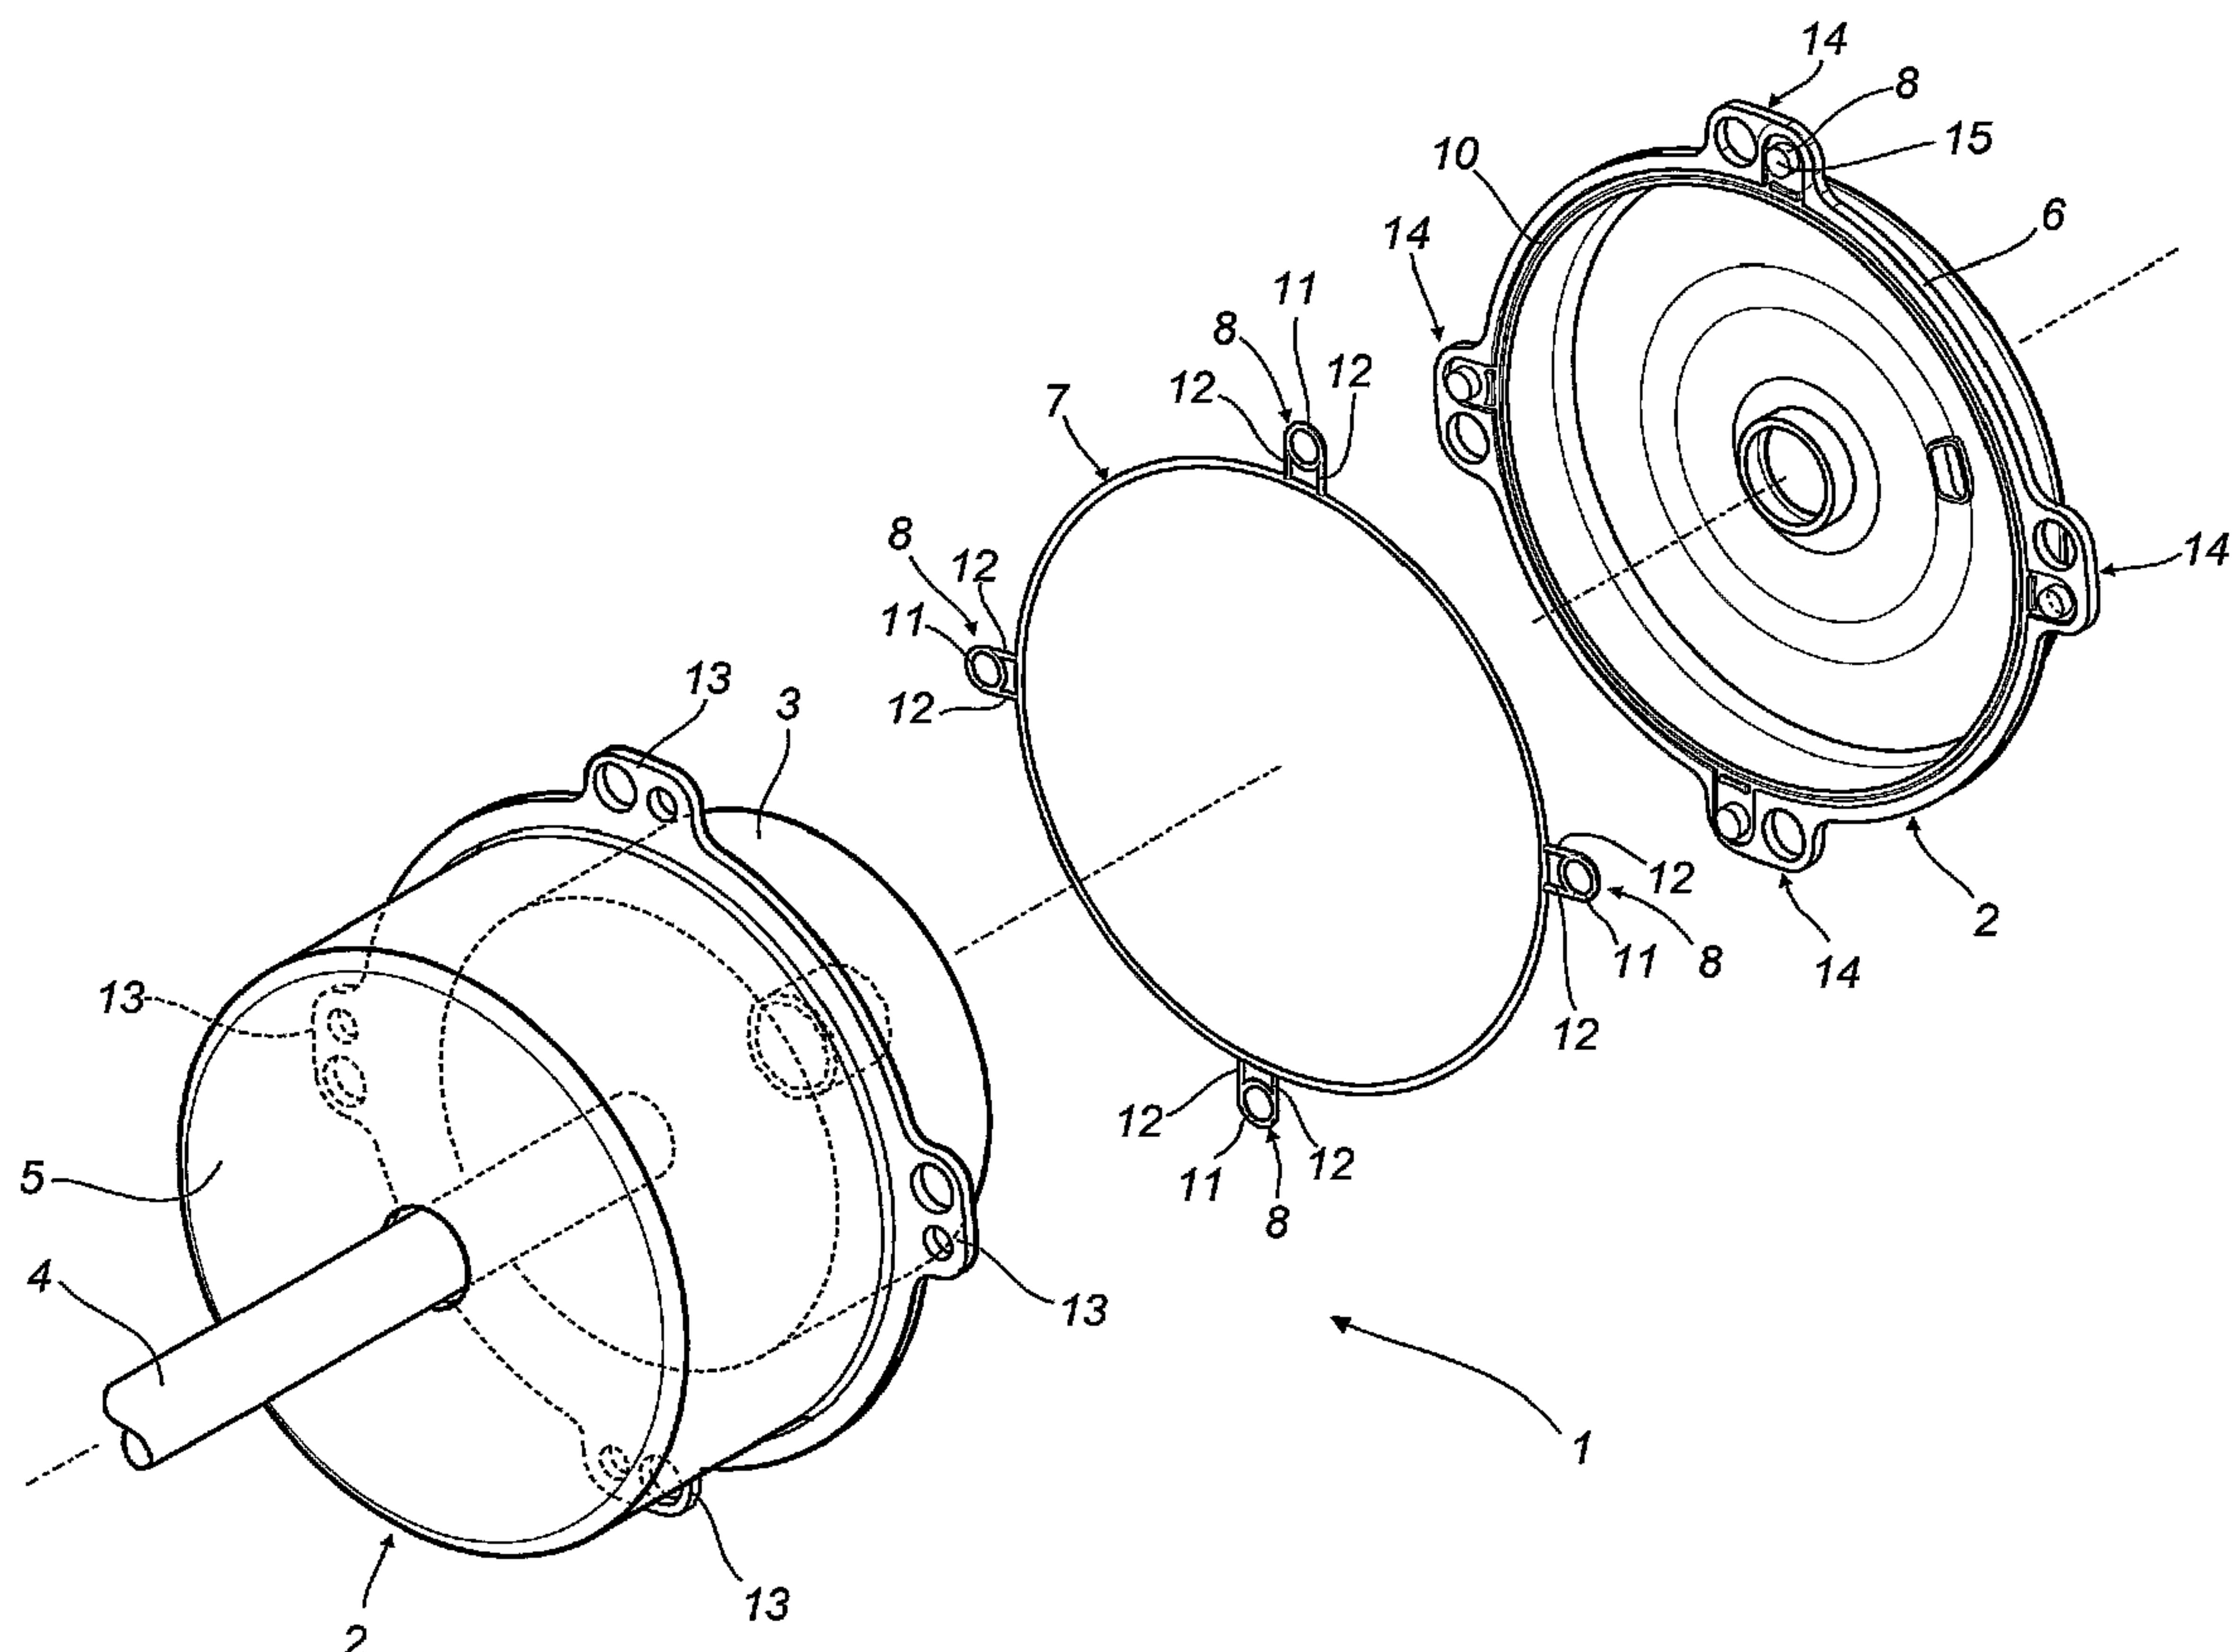

(57) Abrégé/Abstract:

The invention relates to an electric motor for electric fans having a casing with at least a lid with a hermetic seal and a method for assembly of the motor. The motor (1) comprises a casing (2) consisting of a cup-shaped part (5) and a lid (6) and an O-ring seal (7)

**(57) Abrégé(suite)/Abstract(continued):**

inserted between them, the seal (7) comprising retaining means (8) so that it remains applied to one of the elements, either the lid (6) or the cup-shaped part (5). The method for assembly includes the steps of inserting an O-ring seal (7) in a seat (10) in the lid (6) or in the cup shaped part (5), the O-ring seal (7) having retaining rings (11); and inserting each retaining ring (11) on a respective fixing pin (15) present in the lid (6) or in the cup-shaped part (5), so that the seal (7) remains positioned in the seat (10) applied to one of the elements, either the lid (6) or the cup-shaped part (5).

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
14 April 2005 (14.04.2005)

PCT

(10) International Publication Number  
**WO 2005/034309 A1**

(51) International Patent Classification<sup>7</sup>: **H02K 5/10**, F16J 15/06

(21) International Application Number: PCT/IB2004/003186

(22) International Filing Date: 28 September 2004 (28.09.2004)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data: BO2003A000563 30 September 2003 (30.09.2003) IT

(71) Applicant (for all designated States except US): **SPAL S.r.l. [IT/IT]**; Via per Carpi, 26/B, I-42015 Coreggio (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SPAGGIARI, Alessandro [IT/IT]**; Via Leonardo Da Vinci, 8, I-42015 Correggio (IT).

(74) Agent: **FUOCHI, Riccardo**; Bugnion S.p.A., Via Goito, 18, I-40126 Bologna (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## (54) Title: ELECTRIC MOTOR FOR ELECTRIC FAN AND ASSEMBLY METHOD THEREFOR

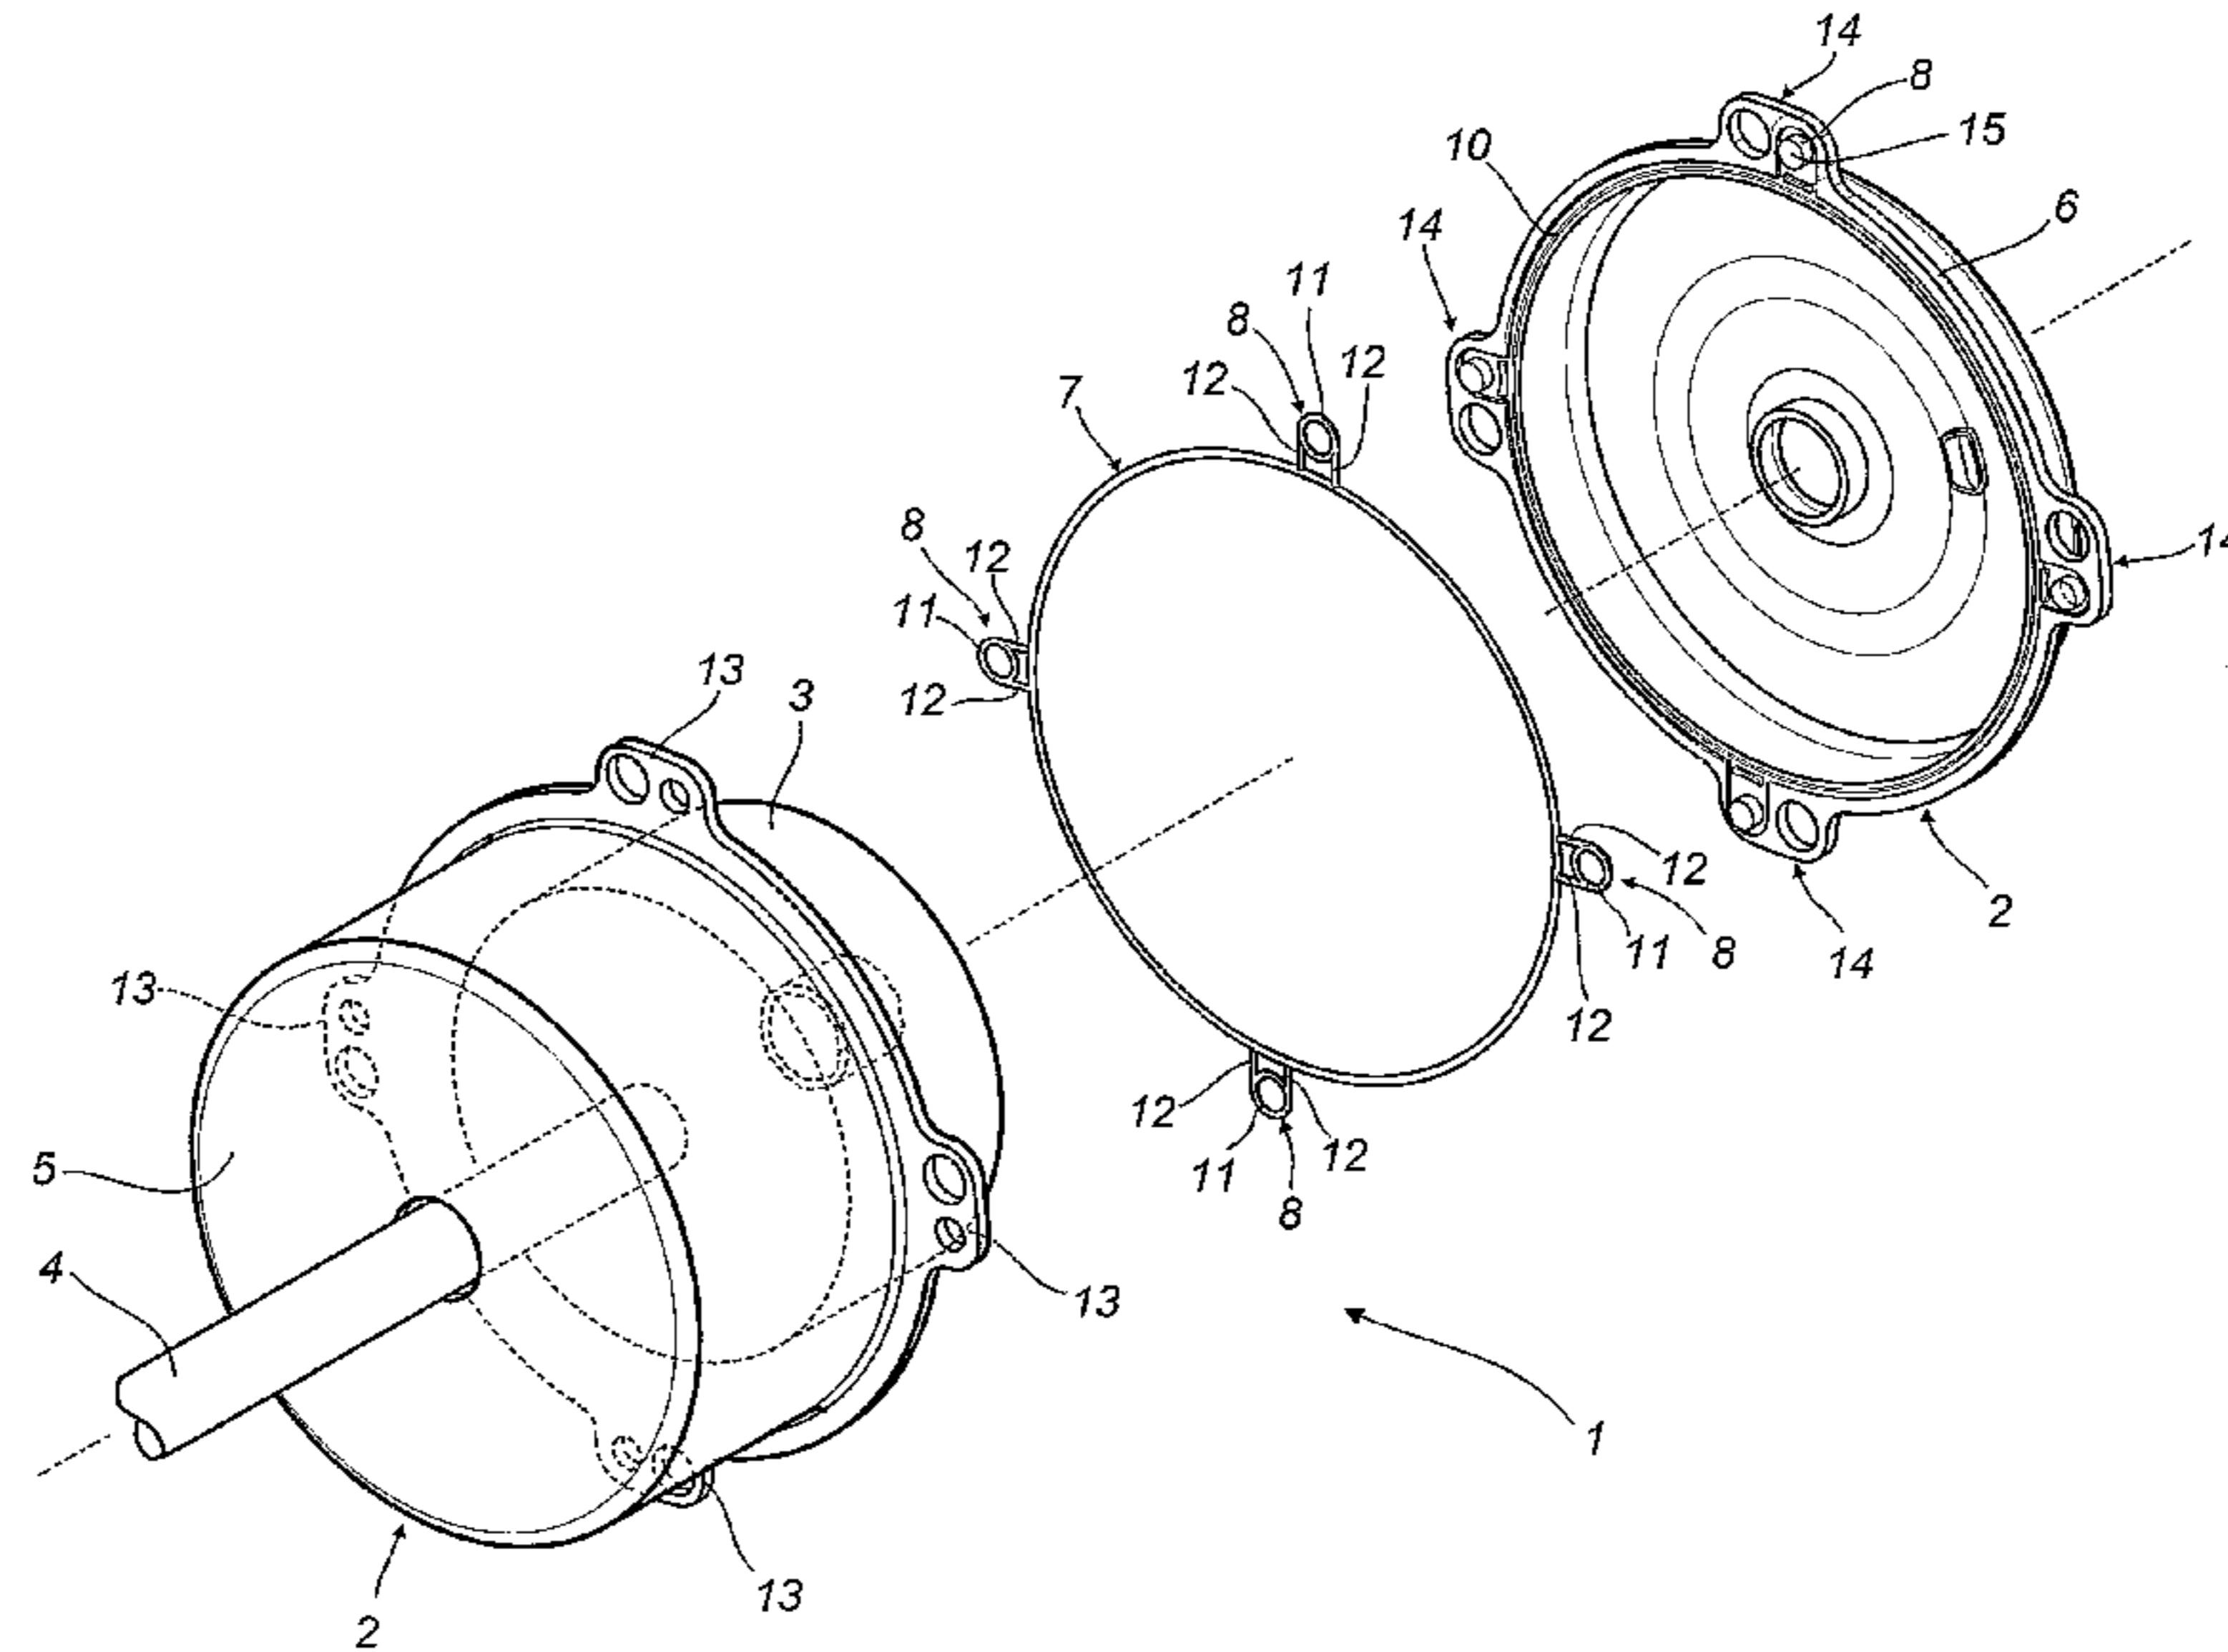

(57) **Abstract:** The invention relates to an electric motor for electric fans having a casing with at least a lid with a hermetic seal and a method for assembly of the motor. The motor (1) comprises a casing (2) consisting of a cup-shaped part (5) and a lid (6) and an O-ring seal (7) inserted between them, the seal (7) comprising retaining means (8) so that it remains applied to one of the elements, either the lid (6) or the cup-shaped part (5). The method for assembly includes the steps of inserting an O-ring seal (7) in a seat (10) in the lid (6) or in the cup shaped part (5), the O-ring seal (7) having retaining rings (11); and inserting each retaining ring (11) on a respective fixing pin (15) present in the lid (6) or in the cup-shaped part (5), so that the seal (7) remains positioned in the seat (10) applied to one of the elements, either the lid (6) or the cup-shaped part (5).

WO 2005/034309 A1

Description

## ELECTRIC MOTOR FOR ELECTRIC FAN AND ASSEMBLY METHOD THEREFOR

Technical Field

The present invention relates to an electric motor for electric fans having a casing with at least a lid with a hermetic seal and a method for assembly of the motor.

5 In particular, the present invention relates to a casing for an electric motor comprising at least a lid and a housing, having an intermediate "O-ring" type seal with characteristics which facilitate assembly.

10 The present invention also relates to a method for assembly of the casing of an electric motor characterised by facilitated assembly steps.

15 The following description refers to an electric motor, but it must be considered that the present invention may also be applied to an electric generator, for example an alternator or a dynamo.

Background Art

Generally speaking, an electric machine such as an electric motor or a dynamo comprises a stator, a rotor mounted 20 on a shaft and a casing which has supports for the rotor shaft.

To mount the stator and the rotor in the casing, the casing must be separated into at least two parts which can be put together.

25 An example of an electric machine and of a method for its production is known from US patent 5 767 596.

Electric motors that are water- and humidity-proof are also known, especially in the sector of electric fans for motor vehicles.

30 Due to the environmental conditions and the position of electric fans close to heat sources and/or cold sources, the

humidity in the environment may penetrate the motor casing and following temperature variations it may be transformed into liquids, creating electrical problems for the motor.

Starting with the typical construction of the motor casing in two parts, of which one part is cup-shaped and the other part is lid-shaped, attempts were made to produce a waterproof casing for electric motors, inserting a seal between the above-mentioned two parts.

However, this type of assembly is not without disadvantages: indeed, the insertion of a seal complicates the structure of the motor.

In addition, for motor casing sealing to be effective, the seal must be correctly positioned between the two parts, which must also have suitable housings for the seal.

15

#### Disclosure of the Invention

One aim of the present invention is to provide an electric motor for an electric fan having a casing of an improved type with good water- and humidity-proof characteristics.

20

Another aim of the present invention is to provide an electric motor for an electric fan having a casing which is simple and economical to produce and assemble.

25

According to one aspect of it, the present invention provides an electric motor for an electric fan as defined in claim 1.

Another aim of the present invention is to provide a method for assembly of an electric motor including a step of connecting a seal to one of the parts of the motor casing so as to facilitate assembly of the motor.

30

According to another aspect of it, the present invention provides a method for assembly of an electric motor for an electric fan as defined in claim 10.

The dependent claims refer to preferred, advantageous embodiments of the invention.

35

#### Brief Description of the Drawings

The accompanying drawings illustrate embodiments of the

present invention without limiting the scope of its application, and in which:

Figure 1 is a perspective exploded view of the electric motor according to the present invention; and

5 Figure 2 is a detail of the electric motor illustrated in Figure 1.

Description of a Preferred Embodiment of the Invention

With reference to the accompanying drawings, the electric 10 motor 1 basically comprises a casing 2 in which there is a stator (not illustrated) and a rotor 3 mounted on a shaft 4.

The following description refers to an electric motor, but it must be considered that the present invention may also relate to other types of similar electric machines, for example current 15 generators such as alternators.

The casing 2 in turn comprises a cup-shaped part 5 and a lid 6 connected to one another by connecting devices of the known type and therefore not illustrated in detail.

To create a good seal against liquids and humidity, a 20 static seal 7 is inserted between the cup-shaped part 5 and the lid 6.

The static seal 7 may be any type of elastic seal which, when inserted between the cup-shaped part 5 and the lid 6 is 25 subject to slight compression by the respective surfaces operating in conjunction with one another between the two parts 5, 6 of the casing 2 and so provides a seal against external agents (liquids, dust, etc.).

The seal 7 also comprises retaining means 8 which allow the seal 7 to be applied to and held on one of the two parts 5, 30 6 of the casing 2.

For this purpose, the part 5, 6 in question also has fixing means 9 which operate in conjunction with the retaining means 8 to temporarily make the seal 7 integral with one of the two parts 5, 6.

35 In the embodiment illustrated, the seal 7 is an O-ring seal, made of an elastomeric material, or the like, operating frontally between the cup-shaped part 5 and the lid 6 and

inserted in a seat 10 made in the lid 6.

As is known, O-ring type seals, when operating frontally, are slightly compressed, causing the seal to expand sideways. Therefore, the seal seat must be wide enough to allow this 5 expansion.

The retaining means 8 comprise at least two retaining rings 11 with diameter smaller than the diameter of the seal 7. The retaining rings 11 are connected to the seal 7 by short connecting sections 12 and are positioned at regular intervals 10 along the circumference.

The retaining rings 11 hold the seal 7 extended and adhering in the seat 10 and it is important that the rings 11 are not too close to one another, to prevent them from interfering with the normal seal 7 deformations.

15 The rings 11 are preferably integral with the seal 7 and are made of the same elastomeric material as the seal.

The rings 11 are on the outer side of the O-ring seal and are close to the outer edge of the casing 2. In the embodiment 20 illustrated in the accompanying drawings, the rings 11 are close to the connecting devices for the cup-shaped part 5 and the lid 6. Therefore, the latter respectively have protrusions 13, 14 in which the connecting devices, the seats for the rings 11 and the fixing means 9 are located.

In the embodiment illustrated in the accompanying drawings 25 the retaining rings 11 are four devices set at 90 degrees to one another and each ring 11 is connected to the O-ring seal by two connecting sections 12.

The latter, together with each ring 11, are made with a smaller diameter "d", or are thinner than, the diameter or 30 thickness "D" of the seal 7, so that they do not interfere with seal 7 compression and therefore with its effective sealing.

Each ring 11 is inserted about a fixing pin 15 which constitutes the fixing means 9 and is on the lid 6 in the protrusions 14. Obviously, the seat 10 for the O-ring seal and 35 the fixing pins 15 for the rings 11 may alternatively be on the cup-shaped part 5 in the protrusions 13.

The fixing pin 15 may have a diameter slightly larger than

that of the ring 11 internal hole, the ring remaining attached to the pin 15 partly thanks to the elasticity of the material the ring 11 is made of.

5 The fixing pin 15 may also be made with a truncated cone profile, or it may have a shallow circumferential cavity (not illustrated).

Whatever the case, the ring 11, elastically deforming on the fixing pin 15, remains attached to the fixing pin and as a result the entire O-ring seal is held in the seat 10.

10 The method for assembly of the casing of an electric motor disclosed comprises the steps of inserting the O-ring seal in the seat 10 in the lid 6 or in the cup-shaped part 5, and inserting each retaining ring 11 on each fixing pin 15 in the lid 6 or in the cup-shaped part 5, so that the seal 7 remains positioned in the seat 10 applied to one of the elements, either the lid 6 or the cup-shaped part 5. Then the components 15 3 inside the casing 2 can be fitted and the lid 6 can be connected to the cup-shaped part 5.

The present invention brings important advantages.

20 Thanks to the retaining means 8 on the seal 7, the latter can easily be applied to the lid 6 or to the cup-shaped part 5, making assembly of the motor 1 simpler.

25 The retaining means 8 in the form of rings 11 on the O-ring seal and the fixing pins 15 on the lid 6 or on the cup-shaped part 5 are simple to produce and effectively secure the O-ring seal.

Even the costs for production of the retaining means 8 are contained thanks to the simplicity of the components.

30 The invention described can be subject to modifications and variations without thereby departing from the scope of the inventive concept, as defined in the claims herein.

Moreover, all the details of the invention may be substituted by technically equivalent elements.

## LIST OF REFERENCE CHARACTERS

1       electric motor  
2       casing  
5       3       rotor  
4       rotor 3 shaft  
5       cup-shaped part  
6       lid  
7       seal  
10      8       retaining means  
9       fixing means  
10      seal 7 seat  
11      retaining rings  
12      connecting sections between rings 11 and seal 7  
15      13, 14   protrusions on elements 5, 6  
15      fixing pin  
d       diameter or thickness of the retaining rings 11 and  
sections 12  
D       diameter or thickness of the seal 7.

Claims

1. An electric motor (1) comprising a casing (2) in which there is a stator and a rotor (3) mounted on a shaft (4), the casing (2) comprising a cup-shaped part (5) and a lid (6) connected to one another with removable connecting devices, and 5 a static seal (7) inserted between the cup-shaped part (5) and the lid (6), the electric motor being characterised in that the seal (7) comprises retaining means (8) so that it remains applied to one of the elements, either the lid (6) or the cup-shaped part (5).

10

2. The electric motor (1) according to claim 1, characterised in that the seal (7) is an O-ring seal positioned in a seat (10) in the lid (6) or in the cup-shaped part (5).

15

3. The electric motor (1) according to claim 1 or 2, characterised in that the seal (7) retaining means (8) are rings (11) connected to the seal (7) by sections (12).

20

4. The electric motor (1) according to any of the foregoing claims, characterised in that the seal (7) retaining means (8) operate in conjunction with fixing means (9) present in the lid (6) or in the cup-shaped part (5).

25

5. The electric motor (1) according to claim 4, characterised in that the fixing means (9) are pins (15) which have a diameter slightly larger than that of the ring (11) internal hole, so that the ring adheres to the pin (15) thanks to the elasticity of the material used to make the ring (11).

30

6. The electric motor (1) according to claim 4, characterised in that the fixing means (9) are pins (15) which have a truncated cone profile or a circumferential cavity with a diameter slightly larger than that of the ring (11) internal hole, so that the ring adheres to the pin (15) thanks to the elasticity of the material used to make the ring (11).

35

7. The electric motor (1) according to claim 4, characterised in that the rings (11) are close to the devices connecting the cup-shaped part (5) and the lid (6), the latter 5 respectively having protrusions (13, 14) in which the connecting devices, the rings (11) and the pins (15) are located.

8. The electric motor (1) according to any of the foregoing 10 claims, characterised in that the rings (11) are integral with the seal (7) and are made of the same elastomeric material.

9. The electric motor (1) according to any of the foregoing 15 claims, characterised in that the rings (11) are connected to the seal (7) by sections (12) and the rings (11) and the sections (12) are made with a diameter (d) smaller than, or are thinner than, the diameter or the thickness (D) of the seal 7, so that they do not interfere with seal 7 compression.

20 10. A method for assembly of the casing (2) of an electric motor (1), the casing (2) comprising a cup-shaped part (5) and a lid (6), comprising the steps of inserting an O-ring seal (7) in a seat (10) in the lid (6) or in the cup-shaped part (5), the O-ring seal (7) having retaining rings (11); inserting each 25 retaining ring (11) on a respective fixing pin (15) present in the lid (6) or in the cup-shaped part (5), so that the seal (7) remains positioned in the seat (10) applied to one of the elements, either the lid (6) or the cup-shaped part (5); fitting the components (3) inside the casing (2); and 30 connecting the lid (6) to the cup-shaped part (5).

11. The electric motor and method for assembly of the motor according to the foregoing claims, as described and illustrated with reference to the accompanying drawings and for the above- 35 mentioned aims.

1/1

