



- (51) International Patent Classification:
E21B 47/09 (2012.01)
- (21) International Application Number:
PCT/US2012/028529
- (22) International Filing Date:
9 March 2012 (09.03.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/489,165 23 May 2011 (23.05.2011) US
- (71) Applicant (*for all designated States except US*): **EXXON-MOBIL UPSTREAM RESEARCH COMPANY** [US/US]; Corp-URC-SW359, P.O. Box 2189, Houston, TX 77252-2189 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **ANTCHEV, Pavlin, B.** [US/US]; 2611 Westgate St., Houston, TX 77098 (US). **ANGELES BOZA, Renzo, M.** [PE/US]; 506 W. 23rd St., Houston, TX 77008 (US). **KING, George, R.** [US/US]; 2103 Old Dixie Dr., Richmond, TX 77406 (US). **STANTON, Robert, C.** [US/US]; 19250 Cy Fair Fire Rd., Cypress, TX 77433 (US). **WINEMILLER, Elton** [US/US]; 22110 Blacksburg Ct., Katy, TX 77450 (US). **TOLMAN, Randy, C.** [US/US]; 1903 Magnolia Estates Dr., Spring, TX 77386 (US). **SAUERMILCH, Peter, W.** [US/US]; 3135 Wagon Trail Dr., Sugar Land, TX 77479 (US). **GAHR, Jason, Z.** [US/US]; 1304 Milam St., Columbus, TX 78934 (US).
- (74) Agents: **JAMES, Rick, F.** et al.; ExxonMobil Upstream Research Company, Corp-URC-SW359, P.O. Box 2189, Houston, TX 2189 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) Title: SAFETY SYSTEM FOR AUTONOMOUS DOWNHOLE TOOL

(57) Abstract: A tool assembly for performing a wellbore operation including an actuatable tool, a location device, and on-board controller are together dimensioned and arranged to be deployed in the wellbore as an autonomous unit. The actuatable tool, such as a perforating gun having associated charges, perforates a wellbore along a selected zone of interest. The location device, such as casing collar locator, senses the location of the actuatable tool based on a physical signature provided along the wellbore. The on-board controller or micro-processor is configured to send an activation signal to the actuatable tool when the location device has recognized a selected location of the tool based on the physical signature. The tool assembly further includes a multi-gate safety system. The safety system prevents premature activation of the actuatable tool.



SAFETY SYSTEM FOR AUTONOMOUS DOWNHOLE TOOL

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application 61/489,165, filed May 23, 2011. This application is also related to International Patent Application No. PCT/US2011/038202 which published on December 1, 2011 as Pub. No. WO 2011/150251.

BACKGROUND

[0002] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present disclosure. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

Field of the Invention

[0003] This invention relates generally to the field of perforating and treating subterranean formations to enable the production of oil and gas therefrom. More specifically, the invention relates to a safety system for preventing premature activation of an autonomous downhole tool, such as a perforating gun or a bridge plug.

General Discussion of Technology

[0004] In the drilling of oil and gas wells, a wellbore is formed using a drill bit that is urged downwardly at a lower end of a drill string. After drilling to a predetermined depth, the drill string and bit are removed and the wellbore is lined with a string of casing. An annular area is thus formed between the string of casing and the surrounding formations.

[0005] A cementing operation is typically conducted in order to fill or “squeeze” the annular area with cement. This serves to form a cement sheath. The combination of cement and casing strengthens the wellbore and facilitates the isolation of the formations behind the casing.

[0006] It is common to place several strings of casing having progressively smaller outer diameters into the wellbore. Thus, the process of drilling and then cementing progressively smaller strings of casing is repeated several or even multiple times until the well has reached total depth. The final string of casing, referred to as a production casing, is cemented into place. In some instances, the final string of casing is a liner, that is, a string of casing that is not tied back to the surface, but is hung from the lower end of the preceding string of casing.

[0007] As part of the completion process, the production casing is perforated at a desired level. This means that lateral holes are shot through the casing and the cement sheath

surrounding the casing. The perforations allow hydrocarbon fluids to flow into the wellbore. Thereafter, the formation is typically fractured.

[0008] Hydraulic fracturing consists of injecting viscous fluids (usually shear thinning, non-Newtonian gels or emulsions) into a formation at such high pressures and rates that the reservoir rock fails and forms a network of fractures. The fracturing fluid is typically mixed with a granular proppant material such as sand, ceramic beads, or other granular materials. The proppant serves to hold the fracture(s) open after the hydraulic pressures are released. The combination of fractures and injected proppant increases the flow capacity of the treated reservoir.

[0009] In order to further stimulate the formation and to clean the near-wellbore regions downhole, an operator may choose to “acidize” the formations. This is done by injecting an acid solution down the wellbore and through the perforations. The use of an acidizing solution is particularly beneficial when the formation comprises carbonate rock. In operation, the drilling company injects a concentrated formic acid or other acidic composition into the wellbore, and directs the fluid into selected zones of interest. The acid helps to dissolve carbonate material, thereby opening up porous channels through which hydrocarbon fluids may flow into the wellbore. In addition, the acid helps to dissolve drilling mud that may have invaded the formation.

[0010] Application of hydraulic fracturing and acid stimulation as described above is a routine part of petroleum industry operations as applied to individual target zones. Such target zones may represent up to about 60 meters (100 feet) of gross, vertical thickness of subterranean formation. When there are multiple or layered reservoirs to be hydraulically fractured, or a very thick hydrocarbon-bearing formation (over about 40 meters, or 131 feet), then more complex treatment techniques are required to obtain treatment of the entire target formation. In this respect, the operating company must isolate various zones or sections to ensure that each separate zone is not only perforated, but adequately fractured and treated. In this way the operator is sure that fracturing fluid and/or stimulant is being injected through each set of perforations and into each zone of interest to effectively increase the flow capacity at each desired depth.

[0011] The isolation of various zones for pre-production treatment requires that the intervals be treated in stages. This, in turn, involves the use of so-called diversion methods. In petroleum industry terminology, “diversion” means that injected fluid is diverted from entering one set of perforations so that the fluid primarily enters only one selected zone of

interest. Where multiple zones of interest are to be perforated, this requires that multiple stages of diversion be carried out.

[0012] In order to isolate selected zones of interest, various diversion techniques may be employed within the wellbore. Known diversion techniques include the use of:

- Mechanical devices such as bridge plugs, packers, down-hole valves, sliding sleeves, and baffle/plug combinations;
- Ball sealers;
- Particulates such as sand, ceramic material, proppant, salt, waxes, resins, or other compounds;
- Chemical systems such as viscosified fluids, gelled fluids, foams, or other chemically formulated fluids; and
- Limited entry methods.

[0013] These and other methods for temporarily blocking the flow of fluids into or out of a given set of perforations are described more fully in U.S. Pat. No. 6,394,184, entitled “Method and Apparatus for Stimulation of Multiple Formation Intervals”, which issued in 2002 and is referred to and incorporated herein by reference in its entirety.

[0014] The ‘184 patent also discloses various techniques for running a bottom hole assembly (“BHA”) into a wellbore, and then creating fluid communication between the wellbore and various zones of interest. In most embodiments, the BHA includes various perforating guns having associated charges. In most embodiments, the BHA is deployed in the wellbore by means of a wireline extending from the surface. The wireline provides electrical signals to the perforating guns for detonation. The electrical signals allow the operator to cause the charges to detonate, thereby forming perforations.

[0015] The BHA also includes a set of mechanically actuated, axial position locking devices, or slips. The slips are actuated through a “continuous J” mechanism by cycling the axial load between compression and tension. In this way, the slips are re-settable.

[0016] The BHA further includes an inflatable packer or other sealing mechanism. The packer is actuated by application of a slight compressive load after the slips are set within the casing. Along with the slips, the packer is resettable so that the BHA may be moved to different depths or locations along the wellbore so as to isolate perforations along selected zones of interest.

[0017] The BHA also includes a casing collar locator. The casing collar locator initially allows the operator to monitor the depth or location of the assembly for appropriately detonating charges. After the charges are detonated (or the casing is otherwise penetrated for

fluid communication with a surrounding zone of interest), the BHA is moved so that the packer may be set at a desired depth. The casing collar locator allows the operator to move the BHA to an appropriate depth relative to the newly formed perforations, and then isolate those perforations for hydraulic fracturing and chemical treatment.

[0018] Each of the various embodiments for a BHA disclosed in the '184 patent includes a means for deploying the assembly into the wellbore, and then translating the assembly up and down the wellbore. Such translation means include a string of coiled tubing, conventional jointed tubing, a wireline, an electric line, or a downhole tractor. In any instance, the purpose of the bottom hole assembly is to allow the operator to perforate the casing along various zones of interest, and then sequentially isolate the respective zones of interest so that fracturing fluid may be injected into the zones of interest in the same trip.

[0019] The bottom hole assembly and the formation treating processes disclosed in the '184 patent help to expedite the well completion process. In this respect, the operator is able to selectively set the slips and the packer for perforation and subsequent formation treatment. The operator is able to set the BHA at a first location, fracture or otherwise stimulate a formation, release the BHA, and move it to a new level along the wellbore, all without removing the BHA from the wellbore between stages.

[0020] The bottom hole assembly and the formation treating processes disclosed in the '184 patent is named "Annular Coiled Tubing FRACturing (ACT-Frac). The ACT-Frac process allows the operator to more effectively stimulate multi-layer hydrocarbon formations at substantially reduced cost compared to previous completion methods.

[0021] However, as with previously-known well completion processes, the ACT-Frac process requires the use of expensive surface equipment. Such equipment includes a lubricator, which may extend as much as 75 feet above the wellhead. In this respect, the lubricator must be of a length greater than the length of the perforating gun assembly (or other tool string) to allow the perforating gun assembly to be safely deployed in the wellbore under pressure.

[0022] The lubricator is suspended over the wellbore by means of a crane arm. The crane arm, in turn, is supported over the earth surface by a crane base. The crane base may be a working vehicle that is capable of transporting part or all of the crane arm over a roadway. The crane arm includes wires or cables used to hold and manipulate the lubricator into and out of position over the wellbore. The crane arm and crane base are designed to support the load of the lubricator and any load requirements anticipated for the completion operations.

[0023] A wireline or electric line runs over a pulley and then down through the lubricator. To protect the wireline from abrasive fracturing fluid, the wellhead may also include a wireline isolation tool. The wireline isolation tool provides a means to protect the wireline from the direct flow of proppant-laden fluid injected into side outlet injection valves.

[0024] The use of a crane and suspended lubricator add expense and complexity to a well completion operation, thereby lowering the overall economics of a well-drilling project. Further, cranes and wireline equipment present on location occupy needed space. Accordingly, Applicant has conceived of downhole tools that may be deployed within a wellbore without a lubricator and a crane arm. Such downhole tools include a perforating gun and a bridge plug. Such downhole tools are autonomous, meaning that they are not necessarily mechanically controlled from the surface, and do not receive an electrical signal from the surface. Beneficially, such tools may be used for perforating and treating multiple intervals along a wellbore without being limited by pump rate or the need for an elongated lubricator.

[0025] International patent application titled “Assembly And Method For Multi-Zone Fracture Stimulation of A Reservoir Using Autonomous Tubular Units” describes the design and operation of autonomous tools and was published on December 1, 2011 as WO 2011/150251. In this application a tool assembly is first provided. The tool assembly is intended for use in performing a tubular operation. In one embodiment, the tool assembly comprises an actuatable tool. The actuatable tool may be, for example, a fracturing plug, a bridge plug, a cutting tool, a casing patch, a cement retainer, or a perforating gun.

[0026] The tool assembly preferably self-destructs in response to a designated event. Thus, where the tool is a fracturing plug, the tool assembly may self-destruct within the wellbore at a designated time after being set. Where the tool is a perforating gun, the tool assembly may self-destruct as the gun is being fired upon reaching a selected level or zone of interest.

[0027] The tool assembly also includes a location device. The location device is designed to sense the location of the actuatable tool within a tubular body. The tubular body may be, for example, a wellbore constructed to produce hydrocarbon fluids, or a pipeline for the transportation of fluids.

[0028] The location device senses location within the tubular body based on a physical signature provided along the tubular body. In one arrangement, the location device is a casing collar locator, and the physical signature is formed by the spacing of collars along the tubular body. The collars are sensed by the collar locator. In another arrangement, the

location device is a radio frequency antenna, and the physical signature is formed by the spacing of identification tags along the tubular body. The identification tags are sensed by the radio frequency antenna.

[0029] The tool assembly also comprises an on-board controller. The controller is designed to send an actuation signal to the actuatable tool when the location device has recognized a selected location of the tool. The location is again based on the physical signature along the wellbore. The actuatable tool, the location device, and the on-board controller are together dimensioned and arranged to be deployed in the tubular body as an autonomous unit.

[0030] WO 2011/150251 discusses the need for a safety system for an autonomous tool, particularly where the tool assembly includes a perforating gun. In this respect, the risk of premature detonation of charges along a perforating gun must be completely removed to provide a safe well site. The present application provides an improved safety system for an autonomous tool assembly.

SUMMARY

[0031] The assemblies described herein have various benefits in the conducting of oil and gas exploration and production activities.

[0032] A tool assembly for performing a wellbore operation is first disclosed. The tool assembly fundamentally includes an actuatable tool. The actuatable tool is preferably a perforating gun. In this instance, the perforating gun has associated charges that are fired along a selected zone of interest within a wellbore. Preferably, the perforating gun is fabricated from a friable material such that the tool assembly self-destructs in response to detonation of the associated charges.

[0033] The actuatable tool may include other downhole devices. These include a fracturing plug, a bridge plug, a casing patch, or a cement retainer. In these instances, the actuatable tool may be substantially fabricated from a friable material or a millable material. Where the actuatable tool is a fracturing plug or a bridge plug, the tool is configured to form a substantial fluid seal when actuated within the wellbore. The plug comprises an elastomeric sealing element and a set of slips for holding the tool assembly at the selected location.

[0034] The tool assembly also has a location device. The location device senses the location of the actuatable tool within a wellbore. Sensing is based on a physical signature provided along the wellbore. For example, the location device may be a casing collar locator that identifies collars by detecting magnetic anomalies along a casing wall. In this instance,

the physical signature is formed by the spacing of collars along a string of casing, with the collars being sensed by the collar locator.

[0035] Alternatively, the location device may be a radio frequency antenna that detects the presence of RFID tags spaced along or within the casing wall. In this instance, the physical signature is formed by the spacing of identification tags along a string of casing, with the identification tags being sensed by the radio frequency antenna.

[0036] The tool assembly further includes an on-board controller. The on-board controller is configured to send an actuation signal to the actuatable tool when the location device has recognized a selected location of the tool based on the physical signature. Preferably, the on-board controller is part of an electronic module comprising onboard memory and built-in logic. Where the actuatable tool is a perforating gun, the electronic module is configured to send a signal that initiates detonation of the perforating gun after the tool assembly has traveled to the pre-programmed location in the wellbore.

[0037] In one embodiment, the location device comprises a pair of sensing devices spaced apart along the tool assembly. The sensing devices represent lower and upper sensing devices. The controller then comprises a clock that determines time that elapses between sensing by the lower sensing device and sensing by the upper sensing device as the tool assembly traverses across a physical signature marker. The tool assembly is programmed to determine tool assembly velocity at a given time based on the distance between the lower and upper sensing devices, divided by the elapsed time between sensing. In this way, location of the tool can be calculated relative to the physical signature provided by downhole markers.

[0038] The actuatable tool, the location device, and the on-board controller are together dimensioned and arranged to be deployed in the wellbore as an autonomous unit. This means that the tool assembly does not rely upon a signal from the surface to know when to activate the tool. Preferably, the tool assembly is released into the wellbore without a working line. The tool assembly either falls gravitationally into the wellbore, or is pumped downhole. However, a non-electric working line such as slickline may optionally be employed.

[0039] As part of the tool assembly herein, a multi-gate safety system is provided. The multi-gate safety system prevents premature activation of the actuatable tool. This is of particular importance when the tool assembly includes shaped charges in a perforating gun.

[0040] The multi-gate system comprises one or more electrical switches, referred to herein as “gates.” The gates are independently closed in response to separate conditions before permitting the actuation signal to reach the actuatable tool. The multi-gate safety system may comprise at least one of the following:

- (i) a selectively removable battery pack that provides power to the control circuitry when installed into the assembly;
- (ii) a mechanical pull-tab that is configured to operate an electrical switch upon removal from the tool assembly;
- (iii) a pressure-sensitive electrical switch that operates only when a designated hydraulic pressure is exceeded;
- (iv) an electrical timer that is configured to selectively operate one or more switches at one or more designated times after deployment of the tool assembly in the wellbore;
- (v) a velocity sensor configured to operate an electrical switch only upon sensing that the tool assembly is traveling a designated velocity;
- (vi) a sensor configured to operate an electrical switch when the tool assembly is substantially vertical; and
- (vii) a sensor configured to operate an electrical switch when the tool assembly is substantially horizontal.

In any of these gates, operating an electrical switch means either opening or closing such a switch. For example, closing the switch permits current to flow through the switch and toward the actuatable tool. Thus, for example, when the actuatable tool is a perforating gun, the activation signal is sent through control circuitry, through the closed switches, and to the detonators to fire the shaped charges. On the other hand, an electrical switch may also be used as a shunting device. For example, detonators are usually shunted during shipping and handling before they are installed into a perforating gun assembly. Thus, an electrical switch in its closed position can be used to shunt a detonator, while opening the switch un-shunts the detonator, making its operation possible.

[0041] In one aspect, the multi-gate safety system comprises both the mechanical pull-tab and the timer switch. In this instance, deployment of the tool assembly means that the tool assembly is configured for removal of the mechanical pull-tab. Stated another way, the timer begins counting when the tab is removed from the tool assembly.

[0042] In another aspect, the multi-gate safety system comprises both the mechanical pull-tab and the pressure sensitive switch. In this instance, the mechanical pull-tab is configured to provide a mechanical barrier to the activation of the pressure-sensitive switch. Thus, the pressure-sensitive switch cannot close until the tab has been removed from the tool assembly.

[0043] In yet another aspect, the multi-gate safety system comprises the electrical timer switch and a mechanical relay having a timer. The timer for the mechanical relay is

configured to activate after the electrical timer switch is closed. The mechanical relay will re-open the electrical timer switch after a pre-set period of time has passed, such as one hour. This allows the tool assembly to be safely removed from the wellbore if needed.

[0044] An integrated tool for downhole fracture operations is also provided herein. The integrated tool combines two actuatable tools. These will include both a plug and a perforating gun.

[0045] The plug has a plug body having an elastomeric sealing element. The plug also has a setting tool for setting the plug body within a string of casing in a wellbore. When actuated, the plug provides a substantial fluid seal within the casing.

[0046] The perforating gun has shaped charges for perforating the string of casing above the plug. When actuated, the perforating gun perforates the string of casing at a selected zone of interest.

[0047] As with the tool assembly above, the integrated tool has a position locator. The position locator senses the presence of objects along the wellbore and generates depth signals in response. Preferably, the location device is a casing collar locator that “counts” collars by detecting magnetic anomalies along a casing wall.

[0048] The integrated tool also has an on-board controller. The on-board controller processes the depth signals and activates the plug and the perforating gun at the selected zone of interest. Preferably, the on-board controller is part of an electronic module comprising onboard memory and built-in logic. Where the actuatable tool is a perforating gun, the electronic module is configured to send a signal that initiates detonation of the perforating gun after the tool assembly has traveled to a pre-programmed location in the wellbore.

[0049] The integrated tool further includes a multi-gate safety system. The safety system is designed to prevent premature activation of the actuatable tools. This is of particular importance in preventing detonation of the shaped charges in the perforating gun before the tool is deployed in the wellbore.

[0050] The safety system is designed in accordance with the multi-gate safety system described above. In this respect, the safety system comprises one or more electrical switches, referred to herein as “gates.” The gates are independently closed in response to separate conditions before permitting the activation signal to reach the perforating gun.

[0051] The integrated tool is dimensioned and arranged to be deployed within the wellbore as an autonomous unit. This means that the integrated tool does not rely upon a signal from the surface to know when to activate the tool. Preferably, the tool assembly is

released into the wellbore without a working line. The tool assembly either falls gravitationally into the wellbore, or is pumped downhole.

[0052] In one aspect, the integrated tool comprises a fishing neck. This allows the tool to be retrieved if the charges fail to detonate.

[0053] A method of performing a wellbore operation is also provided herein. The method includes providing a tool assembly at a well site. The tool assembly is an autonomous downhole tool as described above. Preferably, the autonomous tool is a perforating gun assembly, although it may alternatively be a fracturing plug, a casing patch, or other tool that an operator may choose to run into a wellbore and then actuate.

[0054] The method also includes deploying the actuatable tool into the wellbore. This is done without electrical control external to the wellbore.

BRIEF DESCRIPTION OF THE DRAWINGS

[0055] So that the present inventions can be better understood, certain drawings, charts, graphs and/or flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and are therefore not to be considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0056] Figure 1 is a side view of an autonomous tool as may be used for wellbore operations. In this view, the tool is a fracturing plug assembly deployed in a string of production casing. The fracturing plug assembly is shown in both a pre-actuated position and an actuated position.

[0057] Figure 2 is a side view of an autonomous tool as may be used for wellbore operations, in an alternate view. In this view, the tool is a perforating gun assembly. The perforating gun assembly is once again deployed in a string of production casing, and is shown in both a pre-actuated position and an actuated position.

[0058] Figures 3A and 3B present side views of a lower portion of a wellbore receiving an integrated tool assembly for performing a wellbore operation. The integrated tool has both a fracturing plug and a perforating gun.

[0059] In Figure 3A, an autonomous tool representing a combined plug and perforating gun is falling down the wellbore.

[0060] In Figure 3B, the plug body of the plug assembly has been actuated, causing the autonomous tool to be seated in the wellbore at a selected depth. The perforating gun is ready to fire.

[0061] Figure 4A is a side view of a well site having a wellbore for receiving an autonomous tool. The wellbore is being completed in at least zones of interest “T” and “U.”

[0062] Figure 4B is a side view of the well site of Figure 4A. Here, the wellbore has received a first perforating gun assembly, in one embodiment.

[0063] Figure 4C is another side view of the well site of Figure 4A. Here, the first perforating gun assembly has fallen in the wellbore to a position adjacent zone of interest “T.”

[0064] Figure 4D is another side view of the well site of Figure 4A. Here, charges of the first perforating gun assembly have been detonated, causing the perforating gun of the perforating gun assembly to fire. The casing along the zone of interest “T” has been perforated.

[0065] Figure 4E is yet another side view of the well site of Figure 4A. Here, fluid is being injected into the wellbore under high pressure, causing the formation within the zone of interest “T” to be fractured.

[0066] Figure 4F is another side view of the well site of Figure 4A. Here, the wellbore has received a fracturing plug assembly, in one embodiment.

[0067] Figure 4G is still another side view of the well site of Figure 4A. Here, the fracturing plug assembly has fallen in the wellbore to a position above the zone of interest “T.”

[0068] Figure 4H is another side view of the well site of Figure 4A. Here, the fracturing plug assembly has been actuated and set. Of interest, no wireline is needed for setting the plug assembly.

[0069] Figure 4I is yet another side view of the well site of Figure 4A. Here, the wellbore has received a second perforating gun assembly.

[0070] Figure 4J is another side view of the well site of Figure 4A. Here, the second perforating gun assembly has fallen in the wellbore to a position adjacent zone of interest “U.” Zone of interest “U” is above zone of interest “T.”

[0071] Figure 4K is another side view of the well site of Figure 4A. Here, charges of the second perforating gun assembly have been detonated, causing the perforating gun of the perforating gun assembly to fire. The casing along the zone of interest “U” has been perforated.

[0072] Figure 4L is still another side view of the well site of Figure 4A. Here, fluid is being injected into the wellbore under high pressure, causing the formation within the zone of interest “U” to be fractured.

[0073] Figure 4M provides a final side view of the well site of Figure 4A. Here, the fracturing plug assembly has been removed from the wellbore. In addition, the wellbore is now receiving production fluids.

[0074] Figures 5A and 5B present side views of an illustrative tool assembly for performing a wellbore operation. The tool assembly is a perforating plug assembly being run into a wellbore on a working line.

[0075] In Figure 5A, the fracturing plug assembly is in its run-in or pre-actuated position.

[0076] In Figure 5B, the fracturing plug assembly is in its actuated state.

[0077] Figure 6A is a side view of a portion of a wellbore. The wellbore is being completed in multiple zones of interest, including zones "A," "B," and "C."

[0078] Figure 6B is another side view of the wellbore of Figure 6A. Here, the wellbore has received a first perforating gun assembly. The perforating gun assembly is being pumped down the wellbore.

[0079] Figure 6C is another side view of the wellbore of Figure 6A. Here, the first perforating gun assembly has fallen into the wellbore to a position adjacent zone of interest "A."

[0080] Figure 6D is another side view of the wellbore of Figure 6A. Here, charges of the first perforating gun assembly have been detonated, causing the perforating gun of the perforating gun assembly to fire. The casing along the zone of interest "A" has been perforated.

[0081] Figure 6E is yet another side view of the wellbore of Figure 6A. Here, fluid is being injected into the wellbore under high pressure, causing the rock matrix within the zone of interest "A" to be fractured.

[0082] Figure 6F is yet another side view of the wellbore of Figure 6A. Here, the wellbore has received a second perforating gun assembly. In addition, ball sealers have been dropped into the wellbore ahead of the second perforating gun assembly.

[0083] Figure 6G is still another side view of the wellbore of Figure 6A. Here, the second fracturing plug assembly has fallen into the wellbore to a position adjacent the zone of interest "B." In addition, the ball sealers have plugged the newly-formed perforations along the zone of interest "A."

[0084] Figure 6H is another side view of the wellbore of Figure 6A. Here, the charges of the second perforating gun assembly have been detonated, causing the perforating gun of the perforating gun assembly to fire. The casing along the zone of interest "B" has been perforated. Zone "B" is above zone of interest "A." In addition, fluid is being injected into

the wellbore under high pressure, causing the rock matrix within the zone of interest “B” to be fractured.

[0085] Figure 6I provides a final side view of the wellbore of Figure 6A. Here, the production casing has been perforated along zone of interest “C.” Multiple sets of perforations are seen. In addition, formation fractures have been formed in the subsurface along zone “C.” The ball sealers have been flowed back to the surface.

[0086] Figure 7 schematically illustrates a multi-gated safety system for an autonomous wellbore tool, in one embodiment.

[0087] Figure 8 is a side view of a wellhead receiving a perforating gun as an autonomous wellbore tool. The perforating gun is equipped with a safety ring as part of a multi-gated safety system.

[0088] Figure 9 is a plan view of a fluid-activated shunt switch. The shunt switch may be used to shunt or re-open the multi-gated safety system of Figure 7 should water invade an autonomous tool.

DETAILED DESCRIPTION

Definitions

[0089] As used herein, the term “hydrocarbon” refers to an organic compound that includes primarily, if not exclusively, the elements hydrogen and carbon. Hydrocarbons may also include other elements, such as, but not limited to, halogens, metallic elements, nitrogen, oxygen, and/or sulfur. Hydrocarbons generally fall into two classes: aliphatic, or straight chain hydrocarbons, and cyclic, or closed ring hydrocarbons, including cyclic terpenes. Examples of hydrocarbon-containing materials include any form of natural gas, oil, coal, and bitumen that can be used as a fuel or upgraded into a fuel.

[0090] As used herein, the term “hydrocarbon fluids” refers to a hydrocarbon or mixtures of hydrocarbons that are gases or liquids. For example, hydrocarbon fluids may include a hydrocarbon or mixtures of hydrocarbons that are gases or liquids at formation conditions, at processing conditions or at ambient conditions (15° C and 1 atm pressure). Hydrocarbon fluids may include, for example, oil, natural gas, coalbed methane, shale oil, pyrolysis oil, pyrolysis gas, a pyrolysis product of coal, and other hydrocarbons that are in a gaseous or liquid state.

[0091] As used herein, the terms “produced fluids” and “production fluids” refer to liquids and/or gases removed from a subsurface formation, including, for example, an organic-rich rock formation. Produced fluids may include both hydrocarbon fluids and non-hydrocarbon fluids. Production fluids may include, but are not limited to, oil, natural gas,

pyrolyzed shale oil, synthesis gas, a pyrolysis product of coal, carbon dioxide, hydrogen sulfide and water (including steam).

[0092] As used herein, the term “fluid” refers to gases, liquids, and combinations of gases and liquids, as well as to combinations of gases and solids, combinations of liquids and solids, and combinations of gases, liquids, and solids.

[0093] As used herein, the term “gas” refers to a fluid that is in its vapor phase at 1 atm and 15° C.

[0094] As used herein, the term “oil” refers to a hydrocarbon fluid containing primarily a mixture of condensable hydrocarbons.

[0095] As used herein, the term “subsurface” refers to geologic strata occurring below the earth's surface.

[0096] As used herein, the term “formation” refers to any definable subsurface region. The formation may contain one or more hydrocarbon-containing layers, one or more non-hydrocarbon containing layers, an overburden, and/or an underburden of any geologic formation.

[0097] The terms “zone” or “zone of interest” refers to a portion of a formation containing hydrocarbons. Alternatively, the formation may be a water-bearing interval.

[0098] For purposes of the present disclosure, the terms “ceramic” or “ceramic material” may include oxides such as alumina and zirconia. Specific examples include bismuth strontium calcium copper oxide, silicon aluminium oxynitrides, uranium oxide, yttrium barium copper oxide, zinc oxide, and zirconium dioxide. “Ceramic” may also include non-oxides such as carbides, borides, nitrides and silicides. Specific examples include titanium carbide, silicon carbide, boron nitride, magnesium diboride, and silicon nitride. The term “ceramic” also includes composites, meaning particulate reinforced, combinations of oxides and non-oxides. Additional specific examples of ceramics include barium titanate, strontium titanate, ferrite, and lead zirconate titanate.

[0099] For purposes of the present patent, the term “production casing” includes a liner string or any other tubular body fixed in a wellbore along a zone of interest.

[0100] The term “friable” means any material that is easily crumbled, powderized, or broken into very small pieces. The term “friable” includes frangible materials such as ceramic.

[0101] The term “millable” means any material that may be drilled or ground into pieces within a wellbore. Such materials may include aluminum, brass, cast iron, steel, ceramic, phenolic, composite, and combinations thereof.

[0102] The term “switch” may mean a physical switch that is actuated by means of a magnet, a spring, or other physical device. Alternatively, the term “switch” may mean an electrical component operated through firmware. Alternatively still, the term “switch” may mean a semi-conductor actuated through an electrical signal or logic control.

[0103] As used herein, the term “wellbore” refers to a hole in the subsurface made by drilling or insertion of a conduit into the subsurface. A wellbore may have a substantially circular cross section, or other cross-sectional shapes. As used herein, the term “well”, when referring to an opening in the formation, may be used interchangeably with the term “wellbore.”

DESCRIPTION OF SELECTED SPECIFIC EMBODIMENTS

[0104] The inventions are described herein in connection with certain specific embodiments. However, to the extent that the following detailed description is specific to a particular embodiment or a particular use, such is intended to be illustrative only and is not to be construed as limiting the scope of the inventions.

[0105] It is proposed herein to use tool assemblies for well-completion or other wellbore operations that are autonomous. In this respect, the tool assemblies do not require a wireline and are not otherwise mechanically tethered or electronically connected to equipment external to the wellbore. The delivery method of a tool assembly may include gravity, pumping, and tractor delivery.

[0106] Various tool assemblies are therefore proposed herein that generally include:

- an actuatable tool;
- a location device for sensing the location of the actuatable tool within a tubular body based on a physical signature provided along the tubular body; and
- an on-board controller configured to send an activation signal to the actuatable tool when the location device has recognized a selected location of the tool based on the physical signature.

The actuatable tool is designed to be actuated to perform a tubular operation in response to the activation signal.

[0107] The actuatable tool, the location device, and the on-board controller are together dimensioned and arranged to be deployed in a wellbore as an autonomous unit.

[0108] **Figure 1** presents a side view of an illustrative autonomous tool **100'** as may be used for wellbore operations. In this view, the tool **100'** is a fracturing plug assembly, and the wellbore operation is a wellbore completion.

[0109] The fracturing plug assembly **100'** is deployed within a string of production casing **150**. The production casing **150** is formed from a plurality of "joints" **152** that are threadedly connected at collars **154**. The wellbore completion will include the injection of fluids into the production casing **150** under high pressure.

[0110] In **Figure 1**, the fracturing plug assembly is shown in both a pre-actuated position and an actuated position. The fracturing plug assembly is shown in a pre-actuated position at **100'**, and in an actuated position at **100''**. Arrow "I" indicates the movement of the fracturing plug assembly **100'** in its pre-actuated position, down to a location in the production casing **150** where the fracturing plug assembly **100''** is in its actuated position. The fracturing plug assembly will be described primarily with reference to its pre-actuated position, at **100'**.

[0111] The fracturing plug assembly **100'** first includes a plug body **110'**. The plug body **110'** will preferably define an elastomeric sealing element **111'** and a set of slips **113'**. The elastomeric sealing element **111'** is mechanically expanded in response to a shift in a sleeve or other means as is known in the art. The slips **113'** also ride outwardly from the assembly **100'** along wedges (not shown) spaced radially around the assembly **100'**. Preferably, the slips **113'** are also urged outwardly along the wedges in response to a shift in the same sleeve or other means as is known in the art. The slips **113'** extend radially to "bite" into the casing when actuated, securing the plug assembly **100'** in position. Examples of existing plugs with suitable designs are the Smith Copperhead Drillable Bridge Plug and the Halliburton Fas Drill[®] Frac Plug.

[0112] The fracturing plug assembly **100'** also includes a setting tool **112'**. The setting tool **112'** will actuate the slips **113'** and the elastomeric sealing element **111'** and translate them along the wedges to contact the surrounding casing **150**.

[0113] In the actuated position for the plug assembly **100''**, the plug body **110''** is shown in an expanded state. In this respect, the elastomeric sealing element **111''** is expanded into sealed engagement with the surrounding production casing **150**, and the slips **113''** are expanded into mechanical engagement with the surrounding production casing **150**. The sealing element **111''** comprises a sealing ring, while the slips **113''** offer grooves or teeth that "bite" into the inner diameter of the casing **150**. Thus, in the tool assembly **100''**, the plug body **110''** consisting of the sealing element **111''** and the slips **113''** defines the actuatable tool.

[0114] The fracturing plug assembly **100'** also includes a position locator **114**. The position locator **114** serves as a location device for sensing the location of the tool assembly

100' within the production casing **150**. More specifically, the position locator **114** senses the presence of objects or “tags” along the wellbore **150**, and generates depth signals in response.

[0115] In the view of **Figure 1**, the objects **154** are the casing collars. This means that the position locator **114** is a casing collar locator, known in the industry as a “CCL.” The CCL senses the location of the casing collars **154** as it moves down the production casing **150**. While **Figure 1** presents the position locator **114** as a CCL and the objects **154** as casing collars, it is understood that other sensing arrangements may be employed in the fracturing plug assembly **100'**. For example, the position locator **114** may be a radio frequency detector, and the objects **154** may be radio frequency identification tags, or “RFID” devices. In this arrangement, the tags may be placed along the inner diameters of selected casing joints **152**, and the position locator **114** will define an RFID antenna/reader that detects the RFID tags. Alternatively, the position locator **114** may be both a casing collar locator and a radio frequency antenna. The radio frequency tags may be placed, for example, every 500 feet or every 1,000 feet to assist a casing collar locator algorithm.

[0116] A special tool-locating algorithm may be employed for accurately tracking casing collars. U.S. Provisional Pat. Appl. No. 61/424,285 filed on December 17, 2010 discloses a method of actuating a downhole tool in a wellbore. This patent application is entitled “Method for Automatic Control and Positioning of Autonomous Downhole Tools.”

[0117] The method first includes acquiring a CCL data set from the wellbore. This is preferably done using a traditional casing collar locator. The CCL data set correlates continuously recorded magnetic signals with measured depth. In this way, a first CCL log for the wellbore is formed.

[0118] The method also includes selecting a location within the wellbore for actuation of an actuatable tool. Again, the actuatable tool may be, for example a bridge plug, a cement plug, a fracturing plug, or a perforating gun.

[0119] The method further comprises downloading the first CCL log into a processor. The processor and the actuatable tool together are part of a downhole tool. The method then includes deploying the downhole tool into the wellbore. The downhole tool traverses casing collars, and senses the casing collars using its own casing collar locator.

[0120] The processor in the downhole tool is programmed to continuously record magnetic signals as the downhole tool traverses the casing collars. In this way, a second CCL log is formed. The processor, or on-board controller, transforms the recorded magnetic signals of the second CCL log by applying a moving windowed statistical analysis. Further, the processor incrementally compares the transformed second CCL log with the first CCL log

during deployment of the downhole tool to correlate values indicative of casing collar locations. This is preferably done through a pattern matching algorithm. The algorithm correlates individual peaks or even groups of peaks representing casing collar locations. In addition, the processor is programmed to recognize the selected location in the wellbore, and then send an activation signal to the actuatable wellbore device or tool when the processor has recognized the selected location.

[0121] The method further then includes sending an activation signal. Sending the activation signal actuates the actuatable tool. In this way, the downhole tool is autonomous, meaning that it is not electrically controlled from the surface for receiving the activation signal.

[0122] In one embodiment, the method further comprises transforming the CCL data set for the first CCL log. This also is done by applying a moving windowed statistical analysis. The first CCL log is downloaded into the processor as a first transformed CCL log. In this embodiment, the processor incrementally compares the second transformed CCL log with the first transformed CCL log to correlate values indicative of casing collar locations.

[0123] In the above embodiments, applying a moving windowed statistical analysis preferably comprises defining a pattern window size for sets of magnetic signal values, and then computing a moving mean $m(t+1)$ for the magnetic signal values over time. The moving mean $m(t+1)$ is preferably in vector form, and represents an exponentially weighted moving average for the magnetic signal values for the pattern windows. Applying a moving windowed statistical analysis then further comprises defining a memory parameter μ for the windowed statistical analysis, and calculating a moving covariance matrix $\Sigma(t+1)$ for the magnetic signal values over time.

[0124] Additional details for the tool-locating algorithm are disclosed in U.S. Provisional Pat. Appl. No. 61/424,285, referenced above. That related, co-pending application is incorporated by reference herein in its entirety.

[0125] Returning now to **Figure 1**, the fracturing plug assembly **100'** further includes an on-board controller **116**. The on-board controller **116** processes the depth signals generated by the position locator **114**. The processing may be in accordance with any of the methods disclosed in U.S. Serial No. 61/424,285. In one aspect, the on-board controller **116** compares the generated signals with a pre-determined physical signature obtained for wellbore objects. For example, a CCL log may be run before deploying the autonomous tool (such as the fracturing plug assembly **100'**) in order to determine the spacing of the casing collars **154**.

The corresponding depths of the casing collars **154** may be determined based on the length and speed of the wireline pulling a CCL logging device as is well-known in the art.

[0126] In another aspect, the operator may have access to a wellbore diagram providing exact information concerning the spacing of downhole markers such as the casing collars **154**. The on-board controller **116** may then be programmed to count the casing collars **154**, thereby determining the location of the fracturing plug assembly **100'** as it moves downwardly in the wellbore. In some instances, the production casing **150** may be pre-designed to have so-called short joints, that is, selected joints that are only, for example, 15 feet, or 20 feet, in length, as opposed to the "standard" length selected by the operator for completing a well, such as 30 feet. In this event, the on-board controller **116** may use the non-uniform spacing provided by the short joints as a means of checking or confirming a location in the wellbore as the fracturing plug assembly **100'** moves through the production casing **150**.

[0127] In yet another arrangement, the position locator **114** comprises an accelerometer. An accelerometer is a device that measures acceleration experienced during a freefall. An accelerometer may include multi-axis capability to detect magnitude and direction of the acceleration as a vector quantity. When in communication with analytical software, the accelerometer allows the position of an object to be determined. Preferably, the position locator would also include a gyroscope. The gyroscope would help maintain the orientation of the fracturing plug assembly **100'** as it traverses the wellbore.

[0128] In any event, the on-board controller **116** further activates the actuatable tool when it determines that the autonomous tool has arrived at a particular depth adjacent a selected zone of interest. In the example of **Figure 1**, the on-board controller **116** activates the fracturing plug **110''** and the setting tool **112''** to cause the fracturing plug assembly **100''** to stop moving, and to set in the production casing **150** at a desired depth or location.

[0129] Other arrangements for an autonomous tool besides the fracturing plug assembly **100' / 100''** may be used. **Figure 2** presents a side view of an alternative arrangement for an autonomous tool **200'** as may be used for wellbore operations. In this view, the tool **200'** is a perforating gun assembly.

[0130] In **Figure 2**, the perforating gun assembly is shown in both a pre-actuated position and an actuated position. The perforating gun assembly is shown in a pre-actuated position at **200'**, and is shown in an actuated position at **200''**. Arrow "I" indicates the movement of the perforating gun assembly **200'** in its pre-actuated (or run-in) position, down to a location in the wellbore where the perforating gun assembly **200''** is in its actuated position **200''**. The

perforating gun assembly will be described primarily with reference to its pre-actuated position, at **200'**, as the actuated position **200''** means complete destruction of the assembly **200'**.

[0131] The perforating gun assembly **200'** is deployed within a string of production casing **250**. The production casing **250** is formed from a plurality of "joints" **252** that are threadedly connected at collars **254**. The wellbore completion includes the perforation of the production casing **250** at various selected intervals using the perforating gun assembly **200'**. Utilization of the perforating gun assembly **200'** is described more fully in connection with **Figures 4A-4M** and **5A-5I**, below.

[0132] The perforating gun assembly **200'** first optionally includes a fishing neck **210**. The fishing neck **210** is dimensioned and configured to serve as the male portion to a mating downhole fishing tool (not shown). The fishing neck **210** allows the operator to retrieve the perforating gun assembly **200'** in the unlikely event that it becomes stuck in the casing **252** or the charges fail to detonate.

[0133] The perforating gun assembly **200'** also includes a perforating gun **212**. The perforating gun **212** may be a select fire gun that fires, for example, 16 shots. The gun **212** has associated charges that detonate in order to cause shots to be fired from the gun **212** into the surrounding production casing **250**. Typically, the perforating gun **212** contains a string of shaped charges (seen at **712** in **Figure 7**) distributed along the length of the gun **212** and oriented according to desired specifications. The charges are preferably connected to a single detonating cord to ensure simultaneous detonation of all charges. Examples of suitable perforating guns include the Frac Gun™ from Schlumberger, and the G-Force® from Halliburton.

[0134] The perforating gun assembly **200'** also includes a position locator **214'**. The position locator **214'** operates in the same manner as the position locator **114** for the fracturing plug assembly **100'**. In this respect, the position locator **214'** serves as a location device for sensing the location of the perforating gun assembly **200'** within the production casing **250**. More specifically, the position locator **214'** senses the presence of objects or "downhole markers" along the wellbore **250**, and generates depth signals in response.

[0135] In the view of **Figure 2**, the downhole markers are again the casing collars **254**. This means that the position locator **214'** is a casing collar locator, or "CCL." The CCL senses the location of the casing collars **254** as it moves down the wellbore. Of course, it is again understood that other sensing arrangements may be employed in the perforating gun assembly **200'**, such as the use of "RFID" devices.

[0136] The perforating gun assembly **200'** further includes an on-board controller **216**. The on-board controller **216** preferably operates in the same manner as the on-board controller **116** for the fracturing plug assembly **100'**. In this respect, the on-board controller **216** processes the depth signals generated by the position locator **214'** using appropriate logic and power units. In one aspect, the on-board controller **216** compares the generated signals with a pre-determined physical signature obtained for the wellbore objects (such as collars **254**). For example, a CCL log may be run before deploying the autonomous tool (such as the perforating gun assembly **200'**) in order to determine the spacing of the casing collars **254**. The corresponding depths of the casing collars **254** may be determined based on the speed of the wireline that pulled the CCL logging device.

[0137] It is preferred that the position locator **214'** and the on-board controller **216** operate with software in accordance with the locating algorithm discussed above. Specifically, the algorithm preferably employs a windowed statistical analysis for interpreting and converting magnetic signals generated by the casing collar locator.

[0138] The on-board controller **216** activates the actuatable tool when it determines that the autonomous tool **200'** has arrived at a particular depth adjacent a selected zone of interest. This is done using appropriate onboard processing. In the example of **Figure 2**, the on-board controller **216** activates a detonating cord that ignites the charge associated with the perforating gun **210** to initiate the perforation of the production casing **150** at a desired depth or location. Illustrative perforations are shown in **Figure 2** at **256**.

[0139] In addition, the on-board controller **216** generates a separate signal to ignite the detonating cord to cause complete destruction of the perforating gun assembly. This is shown at **200''**. To accomplish this, the components of the gun assembly **200'** are fabricated from a friable material. The perforating gun **212** may be fabricated, for example, from ceramic materials. Upon detonation, the material making up the perforating gun assembly **200'** may become part of the proppant mixture injected into fractures in a later completion stage.

[0140] In one aspect, the perforating gun assembly **200'** also includes a ball sealer carrier **218**. The ball sealer carrier **218** is preferably placed at the bottom of the assembly **200'**. Destruction of the assembly **200'** causes ball sealers (shown at **632** in **Figure 6F**) to be released from the ball sealer carrier **218**. Alternatively, the on-board controller **216** may have a timer that releases the ball sealers from the ball sealer carrier **218** shortly before the perforating gun **212** is fired, or simultaneously therewith. As will be described more fully

below, the ball sealers are used to seal perforations that have been formed at a lower depth or location in the wellbore.

[0141] It is desirable with the perforating gun assembly **200'** to provide various safety features that prevent the premature firing of the perforating gun **212**. These are in addition to the locator device **214'** described above. Preferably, the assembly **200'** utilizes at least two, and preferably at least three, safety gates or "barriers" that must be satisfied before the perforating gun **212** may be "armed."

[0142] One safety check may be a vertical position indicator. This means that the on-board controller **216** will not provide a signal to the select gun **212** to fire until the vertical position indicator confirms that the perforating gun assembly **200'** is oriented in a substantially vertical orientation, e.g., within five degrees of vertical. For example, the vertical position indicator may be a mercury tube that is in electrical communication with the on-board controller **216**. Of course, this safety feature only works where the wellbore is being perforated along a substantially vertical zone of interest. Where the wellbore is being perforated along a substantially horizontal zone of interest, the safety check may be a horizontal position indicator.

[0143] Another safety check may be a pressure sensor or a rupture disc in electrical communication with the on-board controller **216**. Those of ordinary skill in the art will understand that as the assembly **200'** moves down the wellbore, it will experience an increased hydrostatic head. Pressure from the hydrostatic head may be enhanced by using pumps at the surface (not shown) for pumping the perforating gun assembly **200'** downhole. Thus, for example, the pressure sensor may not send (or permit) a signal from the on-board controller **216** to the perforating gun **212** until pressure exceeds, for example, 4,000 psi.

[0144] A third safety check that may be utilized involves a velocity calculation. In this instance, the perforating gun assembly **200'** may include a second locator device **214''** spaced some distance below the original locator device **214'**. As the assembly **200'** travels across casing collars **254**, signals generated by the second and the original locator devices are timed. The velocity of the assembly **200'** is determined by the following equation:

$$D / (T_2 - T_0)$$

Where: T_0 = Time stamp of the detected signal from the original locator device;

T_2 = Time stamp of the detected signal from a second locator device; and

D = Distance between the original and second locator devices.

Use of such a velocity calculation ensures both a depth and the present movement of the perforating gun assembly **200** before the firing sequence can be initiated.

[0145] Still a fourth safety check that may be utilized involves a timer. In this arrangement, the perforating gun assembly **200'** may include a button or other user interface that allows an operator to manually "arm" the perforating gun **212**. The user interface is in electrical communication with a timer within the on-board controller **216**. For example, the timer might be 2 minutes. This means that the perforating gun **212** cannot fire for 2 minutes from the time of arming.

[0146] Yet a fifth safety check that may be employed involves the use of low-life batteries. For example, the perforating gun assembly **200'** may be powered with batteries, but the batteries are not installed until shortly before the assembly **200** is dropped into a wellbore. This helps to ensure safety during transportation of the tool. In addition, the batteries may have an effective life of, for example, only 60 minutes. This ensures that the assembly's energy potential is lost at a predictable time in the event that the assembly **200'** needs to be pulled.

[0147] The on-board controller **216** and the safety checks for the perforating gun are part of a safety system. Additional details concerning a safety system are shown in **Figure 7**, and are discussed further below.

[0148] **Figures 1 and 2** present separate downhole tools representing a fracturing plug assembly **100'** and a perforating gun assembly **200'**. However, a combination of a fracturing plug and a perforating gun may be deployed together as an autonomous unit. Such a combination adds further optimization of equipment utilization. In this combination, the plug is set, then the perforating gun fires directly above the plug.

[0149] **Figures 3A and 3B** demonstrate such an arrangement. First, **Figure 3A** provides a side view of a lower portion of a wellbore **350**. The illustrative wellbore **350** is being completed in a single zone. A string of production casing is shown schematically at **352**. An autonomous tool **300'** has been dropped down the wellbore **350** through the production casing **352**. Arrow "I" indicates the movement of the tool **300'** traveling downward through the wellbore **350**.

[0150] The autonomous tool **300'** represents a combined plug and perforating gun. This means that the single tool **300'** comprises components from both the plug assembly **100'** and the perforating gun assembly **200'** of **Figures 1 and 2**, respectively.

[0151] First, the autonomous tool **300'** includes a plug body **310'**. The plug body **310'** will preferably define an elastomeric sealing element **311'** and a set of slips **313'**. The autonomous tool **300'** also includes a setting tool **320'**. The setting tool **320'** will actuate the sealing element **311'** and the slips **313'**, and translate them radially to contact the casing **352**.

[0152] In the view of **Figure 3A**, the plug body **310'** has not been actuated. Thus, the tool **300'** is in a run-in position. In operation, the sealing element **311'** of the plug body **310'** may be mechanically expanded in response to a shift in a sleeve or other means as is known in the art. This allows the sealing element **311'** to provide a fluid seal against the casing **352**. At the same time, the slips **313'** of the plug body **310'** ride outwardly from the assembly **300'** along wedges (not shown) spaced radially around the assembly **300'**. This allows the slips **313'** to extend radially and "bite" into the casing **352**, securing the tool assembly **300'** in position against downward hydraulic force.

[0153] The autonomous tool **300'** also includes a position locator **314**. The position locator **314** serves as a location device for sensing the location of the tool **300'** within the production casing **350**. More specifically, the position locator **314** senses the presence of objects or "tags" along the wellbore **350**, and generates depth signals in response. In the view of **Figure 3A**, the objects are casing collars **354**. This means that the position locator **314** is a casing collar locator, or "CCL." The CCL senses the location of the casing collars **354** as it moves down the wellbore **350**.

[0154] As with the plug assembly **100'** described above in **Figure 1**, the position locator **314** may sense other objects besides casing collars. Alternatively, the position locator **314** may be programmed to locate a selected depth using an accelerometer.

[0155] The tool **300'** also includes a perforating gun **330**. The perforating gun **330** may be a select fire gun that fires, for example, 16 shots. As with perforating gun **212** of **Figure 2**, the gun **330** has associated charges that detonate in order to cause shots to be fired into the surrounding production casing **350**. Typically, the perforating gun **330** contains a string of shaped charges distributed along the length of the gun and oriented according to desired specifications.

[0156] The autonomous tool **300'** optionally also includes a fishing neck **305**. The fishing neck **305** is dimensioned and configured to serve as the male portion to a mating downhole fishing tool (not shown). The fishing neck **305** allows the operator to retrieve the autonomous tool **300** in the unlikely event that it becomes stuck in the wellbore **300'** or the perforating gun **330** fails to detonate. It is understood that other retrieval arrangements may be provided, such as a retrieval hook (not shown).

[0157] The autonomous tool **300'** further includes an on-board controller **316**. The on-board controller **316** processes the depth signals generated by the position locator **314**. In one aspect, the on-board controller **316** compares the generated signals with a pre-run CCL log.

The depths of the casing collars **354** may be determined based on the length and speed of the wireline pulling a CCL logging device.

[0158] Upon determining that the autonomous tool **300'** has arrived at the selected depth, the on-board controller **316** activates the setting tool **320**. This causes the plug body **310** to be set in the wellbore **350** at a desired depth or location.

[0159] **Figure 3B** is a side view of the wellbore of **Figure 3A**. Here, the autonomous tool **300''** has reached a selected depth. The selected depth is indicated at bracket **375**. The on-board controller **316** has sent a signal to the setting tool **320''** to actuate the elastomeric ring **311''** and slips **313''** of the plug body **310'**.

[0160] In **Figure 3B**, the plug body **310''** is shown in an expanded state. In this respect, the elastomeric sealing element **311''** is expanded into sealed engagement with the surrounding production casing **352**, and the slips **313''** are expanded into mechanical engagement with the surrounding production casing **352**. The sealing element **311''** offers a sealing ring, while the slips **313''** offer grooves or teeth that "bite" into the inner diameter of the casing **350**.

[0161] After the autonomous tool **300''** has been set, the on-board controller **316** sends a separate signal to ignite charges in the perforating gun **330**. The perforating gun **330** creates perforations through the production casing **352** at the selected depth **375**. Thus, in the arrangement of **Figures 3A** and **3B**, the setting tool **320** and the perforating gun **330** together define an integrated actuatable tool.

[0162] **Figures 4A** through **4M** demonstrate the use of the fracturing plug assembly **100'** and the perforating gun assembly **200'** in an illustrative wellbore. First, **Figure 4A** presents a side view of a well site **400**. The well site **400** includes a wellhead **470** and a wellbore **410**. The wellbore **410** includes a bore **405** for receiving the assemblies **100'**, **200'**. The bore **405** extends from the surface **105** of the earth, and into the earth's subsurface **110**. The wellbore **410** is being completed in at least zones of interest "T" and "U" within the subsurface **110**.

[0163] The wellbore **410** is first formed with a string of surface casing **420**. The surface casing **420** has an upper end **422** in sealed connection with a lower master fracture valve **425**. The surface casing **420** also has a lower end **424**. The surface casing **420** is secured in the wellbore **410** with a surrounding cement sheath **412**.

[0164] The wellbore **410** also includes a string of production casing **430**. The production casing **430** is also secured in the wellbore **410** with a surrounding cement sheath **414**. The production casing **430** has an upper end **432** in sealed connection with an upper master fracture valve **435**. The production casing **430** also has a lower end **434** proximate a bottom

of the wellbore **410**. It is understood that the depth of the wellbore **410** extends many thousands of feet below the earth surface **105**.

[0165] The production casing **430** extends through the lowest zone of interest “T,” and also through at least one zone of interest “U” above the zone “T.” A wellbore operation will be conducted that includes perforating each of zones “T” and “U” sequentially.

[0166] During the completion phase, the wellhead **470** will also include one or more blow-out preventers. The blow-out preventers are typically remotely actuated in the event of operational upsets. In more shallow wells, or in wells having lower formation pressures, the master fracture valves **425**, **435** may be the blow-out preventers. In either event, the master fracture valves **425**, **435** are used to selectively seal the wellbore **410**. The wellhead **470** and its components are used for flow control and hydraulic isolation during rig-up operations, stimulation operations, and rig-down operations.

[0167] The wellhead **470** may include a crown valve **472**. The crown valve **472** is used to isolate the wellbore **400** in the event a lubricator (not shown) or other components are placed above the wellhead **470**. The wellhead **470** further includes side outlet injection valves **474**. The side outlet injection valves **474** are located within fluid injection lines **471**. The fluid injection lines provide a location for injection of fracturing fluids, weighting fluids, and/or stimulation fluids into the bore **405**, with the injection of the fluids being controlled by the valves **474**. The piping from surface pumps (not shown) and tanks (not shown) used for injection of the stimulation (or other) fluids are attached to the valves **474** using appropriate hoses, fittings and/or couplings. The stimulation fluids are then pumped into the production casing **430**.

[0168] It is understood that the various wellhead components shown in **Figure 4A** are merely illustrative. A typical completion operation will include numerous valves, pipes, tanks, fittings, couplings, gauges, and other devices. These may include pressure-equalization line and a pressure-equalization valve (not shown) for positioning a tool string above the lower valve **425** before the tool string is dropped into the wellbore **405**. Downhole equipment may be run into and out of the wellbore **410** using an electric line, slick line or coiled tubing. Further, a drilling rig or other platform may be employed, with jointed working tubes being used.

[0169] **Figure 4B** is a side view of the well site **400** of **Figure 4A**. Here, the wellbore **410** has received a first perforating gun assembly **401**. The first perforating gun assembly **401** is generally in accordance with the perforating gun assembly **200'** of **Figure 2** in its various embodiments, as described above. It can be seen that the perforating gun assembly

401 is moving downwardly in the wellbore **410**, as indicated by arrow “**I**.” The perforating gun assembly **401** may be simply falling through the wellbore **410** in response to gravitational pull. In addition, the operator may be assisting the downward movement of the perforating gun assembly **401** by applying hydraulic pressure through the use of surface pumps (not shown). Alternatively, the perforating gun assembly **401** may be aided in its downward movement through the use of a tractor (not shown). In this instance, the tractor will be fabricated entirely of a friable material.

[0170] **Figure 4C** is another side view of the well site **400** of **Figure 4A**. Here, the first perforating gun assembly **401** has fallen in the wellbore **410** to a position adjacent zone of interest “**T**.” In accordance with the present inventions, the locator device (shown at **114** in **Figure 1**) has generated signals in response to tags placed along the production casing **430**. In this way, the on-board controller (shown at **116** of **Figure 1**) is aware of the location of the first perforating gun assembly **401**.

[0171] **Figure 4D** is another side view of the well site **400** of **Figure 4A**. Here, charges of the perforating gun assembly **401** have been detonated, causing the perforating gun (shown at **212** of **Figure 2**) to fire. The casing along zone of interest “**T**” has been perforated. A set of perforations **456T** is shown extending from the wellbore **410** and into the subsurface **110**. While only six perforations **456T** are shown in the side view, it is understood that additional perforations may be formed, and that such perforations will extend radially around the production casing **430**.

[0172] In addition to the creation of perforations **456T**, the perforating gun assembly **401** is self-destructed. Any pieces left from the assembly **401** will likely fall to the bottom **434** of the production casing **430**.

[0173] **Figure 4E** is yet another side view of the well site **400** of **Figure 4A**. Here, fluid is being injected into the bore **405** of the wellbore **410** under high pressure. Downward movement of the fluid is indicated by arrows “**F**.” The fluid moves through the perforations **456T** and into the surrounding subsurface **110**. This causes fractures **458T** to be formed within the zone of interest “**T**.” An acid solution may also optionally be circulated into the bore **405** to remove carbonate build-up and remaining drilling mud and further stimulate the subsurface **110** for hydrocarbon production.

[0174] **Figure 4F** is yet another side view of the well site **400** of **Figure 4A**. Here, the wellbore **410** has received a fracturing plug assembly **406**. The fracturing plug assembly **406** is generally in accordance with the fracturing plug assembly **100'** of **Figure 1** in its various embodiments, as described above.

[0175] In **Figure 4F**, the fracturing plug assembly **406** is in its run-in (pre-actuated) position. The fracturing plug assembly **406** is moving downwardly in the wellbore **410**, as indicated by arrow “I.” The fracturing plug assembly **406** may simply be falling through the wellbore **410** in response to gravitational pull. In addition, the operator may be assisting the downward movement of the fracturing plug assembly **406** by applying pressure through the use of surface pumps (not shown).

[0176] **Figure 4G** is still another side view of the well site **400** of **Figure 4A**. Here, the fracturing plug assembly **406** has fallen in the wellbore **410** to a position above the zone of interest “T.” In accordance with the present inventions, the locator device (shown at **114** in **Figure 1**) has generated signals in response to downhole markers placed along the production casing **430**. In this way, the on-board controller (shown at **116** of **Figure 1**) is aware of the location of the fracturing plug assembly **406**.

[0177] **Figure 4H** is another side view of the well site **400** of **Figure 4A**. Here, the fracturing plug assembly **406** has been set. This means that the on-board controller **116** has generated signals to activate the setting tool (shown at **112** of **Figure 1**) and the plug (shown at **110'** of **Figure 2**) and the slips (shown at **113'**) to set and to seal the plug assembly **406** in the bore **405** of the wellbore **410**. In **Figure 4H**, the fracturing plug assembly **406** has been set above the zone of interest “T.” This allows isolation of the zone of interest “U” for a next perforating stage.

[0178] **Figure 4I** is another side view of the well site **400** of **Figure 4A**. Here, the wellbore **410** has received a second perforating gun assembly **402**. The second perforating gun assembly **402** may be constructed and arranged as the first perforating gun assembly **401**. This means that the second perforating gun assembly **402** is also autonomous.

[0179] It can be seen in **Figure 4I** that the second perforating gun assembly **402** is moving downwardly in the wellbore **410**, as indicated by arrow “I.” The second perforating gun assembly **402** may be simply falling through the wellbore **410** in response to gravitational pull. In addition, the operator may be assisting the downward movement of the perforating gun assembly **402** by applying pressure through the use of surface pumps (not shown). Alternatively, the perforating gun assembly **402** may be aided in its downward movement through the use of a tractor (not shown).

[0180] It can also be seen in **Figure 4I** that the fracturing plug assembly **406** remains set in the wellbore **410**. The fracturing plug assembly **406** is positioned above the perforations **456T** and the fractures **458T** in the zone of interest “T.” Thus, the perforations **456T** are isolated.

[0181] **Figure 4J** is another side view of the well site **400** of **Figure 4A**. Here, the second perforating gun assembly **402** has fallen in the wellbore to a position adjacent zone of interest “U.” Zone of interest “U” is above zone of interest “T.” In accordance with the present inventions, the locator device (shown at **114** in **Figure 1**) has generated signals in response to downhole markers placed along the production casing **430**. In this way, the on-board controller (shown at **116** of **Figure 1**) is aware of the location of the first perforating gun assembly **401**.

[0182] **Figure 4K** is another side view of the well site **400** of **Figure 4A**. Here, charges of the second perforating gun assembly **402** have been detonated, causing the perforating gun of the perforating gun assembly to fire. The zone of interest “U” has been perforated. A set of perforations **456U** is shown extending from the wellbore **410** and into the subsurface **110**. While only six perforations **456U** are shown in side view, it is understood that additional perforations are formed, and that such perforations will extend radially around the production casing **430**.

[0183] In addition to the creation of perforations **456U**, the second perforating gun assembly **402** is self-destructed. Any pieces left from the assembly **402** will likely fall to the plug assembly **406** still set in the production casing **430**.

[0184] **Figure 4L** is yet another side view of the well site **400** of **Figure 4A**. Here, fluid is being injected into the bore **405** of the wellbore **410** under high pressure. The fluid injection causes the subsurface **110** within the zone of interest “U” to be fractured. Downward movement of the fluid is indicated by arrows “F.” The fluid moves through the perforations **456U** and into the surrounding subsurface **110**. This causes fractures **458U** to be formed within the zone of interest “U.” An acid solution may also optionally be circulated into the bore **405** to remove carbonate build-up and remaining drilling mud and further stimulate the subsurface **110** for hydrocarbon production.

[0185] Finally, **Figure 4M** provides a final side view of the well site **400** of **Figure 4A**. Here, the fracturing plug assembly **406** has been removed from the wellbore **410**. In addition, the wellbore **410** is now receiving production fluids. Arrows “P” indicate the flow of production fluids from the subsurface **110** into the wellbore **410** and towards the surface **105**.

[0186] In order to remove the plug assembly **406**, the on-board controller (shown at **116** of **Figure 1**) may release the plug body **100''** (with the slips **113''**) after a designated period of time. The fracturing plug assembly **406** may then be flowed back to the surface **105** and retrieved via a pig catcher (not shown) or other such device. Alternatively, the on-board controller **116** may be programmed so that after a designated period of time, a detonating

cord is ignited, which then causes the fracturing plug assembly **406** to detonate and self-destruct. In this arrangement, the entire fracturing plug assembly **406** (except for the sealing element **111'**) is fabricated from a friable material.

[0187] **Figures 4A through 4M** demonstrate the use of perforating gun assemblies with a fracturing plug to perforate and stimulate two separate zones of interest (zones “T” and “U”) within an illustrative wellbore **410**. In this example, both the first **401** and the second **402** perforating gun assemblies were autonomous, and the fracturing plug assembly **406** was also autonomous. However, it is possible to perforate the lowest or terminal zone “T” using a traditional wireline with a select-fire gun assembly, but then use autonomous perforating gun assemblies to perforate multiple zones above the terminal zone “T.”

[0188] The tools **401**, **402**, **406** shown in **Figures 4A through 4M** are dropped or, alternatively, pumped or carried into the wellbore **410** without a wireline. However, it is possible to deploy these tools as autonomous tools, that is, tools that are not electrically controlled from the surface, using a working line. The working line may be a slickline, a wireline, or an electric line.

[0189] **Figures 5A and 5B** present side views of an illustrative tool assembly **500' / 500''** for performing a wellbore operation. Here, the tool assembly **500' / 500''** is a fracturing plug assembly. In **Figure 5A**, the fracturing plug assembly **500'** is seen in its run-in or pre-actuated position; in **Figure 5B**, the fracturing plug assembly **500''** is seen in its actuated state.

[0190] Referring first to **Figure 5A**, the fracturing plug assembly **500'** is deployed within a string of production casing **550**. The production casing **550** is formed from a plurality of “joints” **552** that are threadedly connected at collars **554**. A wellbore completion operation is being undertaken that includes the injection of fluids into the production casing **550** under high pressure. Arrow “I” indicates the movement of the fracturing plug assembly **500'** in its pre-actuated position, down to a location in the production casing **550** where the fracturing plug assembly **500''** will be actuated and set.

[0191] The illustrative fracturing plug assembly **500'** includes a plug body **510'**. The plug body **510'** will preferably define an elastomeric sealing element **511'** and a set of slips **513'**. The elastomeric sealing element **511'** and the slips **513'** are generally in accordance with the plug body **110'** described in connection with **Figure 1**, above.

[0192] The fracturing plug assembly **500'** also includes a setting tool **512'**. The setting tool **512'** will actuate the slips **513'** and the elastomeric sealing element **511'** and translate them along wedges (not shown) to contact the surrounding casing **550**. In the actuated

position for the plug assembly **500'**, seen in **Figure 5B**, the plug body **510''** is shown in an expanded state. In this respect, the elastomeric sealing element **511''** is expanded into sealed engagement with the surrounding production casing **550**, and the slips **513''** are expanded into mechanical engagement with the surrounding production casing **550**. The sealing element **511''** comprises a sealing ring, while the slips **513''** offer grooves or teeth that "bite" into the inner diameter of the casing **550**. Thus, in the tool assembly **500'**, the plug body **510''** consisting of the sealing element **511''** and the slips **513''** define the actuatable tool.

[0193] The fracturing plug assembly **500'** also includes a position locator **514**. The position locator **514** serves as a location device for sensing the location of the tool assembly **500'** within the production casing **550**. More specifically, the position locator **514** senses the presence of objects or "downhole markers" along the wellbore **550**, and generates depth signals in response.

[0194] In the view of **Figures 5A** and **5B**, the objects are the casing collars **554**. This means that the position locator **514** is a casing collar locator, or "CCL." The CCL senses the location of the casing collars **554** as it moves down the production casing **550**. The fracturing plug assembly **500'** further includes an on-board controller or processor **516**. The on-board controller **516** processes the depth signals generated by the position locator **514**. In one aspect, the on-board controller **516** compares the generated signals with a pre-determined physical signature obtained for the casing collars. For example, a CCL log may be run before deploying the autonomous tool **500'** in order to determine the spacing of the casing collars **554**.

[0195] The on-board controller **516** activates the actuatable tool when it determines that the plug assembly **500''** has arrived at a particular depth adjacent a selected zone of interest. In the example of **Figure 5B**, the on-board controller **516** activates the fracturing plug **510''** and the setting tool **512''** to cause the fracturing plug assembly **500''** to stop moving, and to set in the production casing **550** at a desired depth or location.

[0196] The tool assembly **500' / 500''** of **Figures 5A** and **5B** differs from the autonomous tools **100'** and **200'** of **Figures 1** and **2** in that the tool assembly **500' / 500''** is run into the wellbore **550** on a working line **556**. In the illustrative arrangement of **Figures 5A** and **5B**, the working line **556** is a slickline or other non electric-line.

[0197] As an alternative to using a slickline **556**, a tool assembly may be run into the wellbore with a tractor. This is particularly advantageous in deviated wellbores.

[0198] Other combinations of wired and wireless tools may be used within the spirit of the present inventions. For example, the operator may run fracturing plugs into the wellbore

on a wireline, but drop or pump in one or more autonomous perforating gun assemblies. Reciprocally, the operator may run the respective perforating gun assemblies into the wellbore on a wireline, but use one or more autonomous fracturing plug assemblies without a working line.

[0199] It is noted that the process of perforating a wellbore at various intervals may be done without a fracturing plug assembly. **Figures 6A through 6I** demonstrate how multiple zones of interest may be sequentially perforated and treated in a wellbore using destructible, autonomous perforating gun assemblies and ball sealers. First, **Figure 6A** is a side view of a portion of a wellbore **600**. The wellbore **600** is being completed in multiple zones of interest, including zones “A,” “B,” and “C.” The zones of interest “A,” “B,” and “C” reside within a subsurface **110** containing hydrocarbon fluids.

[0200] The wellbore **600** includes a string of production casing (or, alternatively, a liner string) **620**. The production casing **620** has been cemented into the subsurface **610** to isolate the zones of interest “A,” “B,” and “C” as well as other strata along the subsurface **110**. A cement sheath is seen at **624**.

[0201] The production casing **620** has a series of locator tags **622** placed there along. The locator tags **622** are ideally embedded into the wall of the production casing **620** to preserve their integrity. However, for illustrative purposes the locator tags **622** are shown in **Figure 6A** as attachments along the inner diameter of the production casing **620**. In the arrangement of **Figure 6A**, the locator tags **612** represent radio frequency identification tags that are sensed by an RFID reader/antennae. The locator tags **622** create a physical signature along the wellbore **600**.

[0202] The wellbore **600** is part of a well that is being formed for the production of hydrocarbons. As part of the well completion process, it is desirable to perforate and then fracture each of the zones of interest “A,” “B,” and “C.”

[0203] **Figure 6B** is another side view of the wellbore **600** of **Figure 6A**. Here, the wellbore **600** has received a first perforating gun assembly **601**. The first perforating gun assembly **601** is generally in accordance with perforating gun assembly **200'** (in its various embodiments) of **Figure 2**. In **Figure 6B**, the perforating gun assembly **601** is being pumped down the wellbore **600**. The perforating gun assembly **601** has been dropped into a bore **605** of the wellbore **600**, and is moving down the wellbore **600** through a combination of gravitational pull and hydraulic pressure. Arrow “I” indicates movement of the gun assembly **601**.

[0204] **Figure 6C** is a next side view of the wellbore **600** of **Figure 6A**. Here, the first perforating gun assembly **601** has fallen into the bore **605** to a position adjacent zone of interest “A.” In accordance with the present inventions, the locator device (shown at **214**’ in **Figure 3**) has generated signals in response to the tags **622** placed along the production casing **620**. In this way, the on-board controller (shown at **216** of **Figure 3**) is aware of the location of the first perforating gun assembly **601**.

[0205] **Figure 6D** is another side view of the wellbore **600** of **Figure 6A**. Here, charges of the first perforating gun assembly have been detonated, causing the perforating gun of the perforating gun assembly to fire. The zone of interest “A” has been perforated. A set of perforations **626A** is shown extending from the wellbore **600** and into the subsurface **610**. While only six perforations **626A** are shown in side view, it is understood that additional perforations are formed, and that such perforations will extend radially around the production casing **620**.

[0206] In addition to the creation of perforations **626A**, the first perforating gun assembly **601** is self-destructed. Any pieces left from the assembly **601** will likely fall to the bottom of the production casing **620**.

[0207] **Figure 6E** is yet another side view of the wellbore **600** of **Figure 6A**. Here, fluid is being injected into the bore **605** of the wellbore under high pressure, causing the formation within the zone of interest “A” to be fractured. Downward movement of the fluid is indicated by arrows “F.” The fluid moves through the perforations **626A** and into the surrounding subsurface **110**. This causes fractures **628A** to be formed within the zone of interest “A.” An acid solution may also optionally be circulated into the bore **605** to dissolve drilling mud and to remove carbonate build-up and further stimulate the subsurface **110** for hydrocarbon production.

[0208] **Figure 6F** is yet another side view of the wellbore **600** of **Figure 6A**. Here, the wellbore **600** has received a second perforating gun assembly **602**. The second perforating gun assembly **602** may be constructed and arranged as the first perforating gun assembly **601**. This means that the second perforating gun assembly **602** is also autonomous, and is also constructed of a friable material.

[0209] It can be seen in **Figure 6F** that the second perforating gun assembly **602** is moving downwardly in the wellbore **600**, as indicated by arrow “I.” The second perforating gun assembly **602** may be simply falling through the wellbore **600** in response to gravitational pull. In addition, the operator may be assisting the downward movement of the

perforating gun assembly **602** by applying hydraulic pressure through the use of surface pumps (not shown).

[0210] In addition to the gun assembly **602**, ball sealers **632** have been dropped into the wellbore **600**. The ball sealers **632** are preferably dropped ahead of the second perforating gun assembly **602**. Optionally, the ball sealers **632** are released from a ball container (shown at **218** in **Figure 2**). The ball sealers **632** are fabricated from composite material and are rubber coated. The ball sealers **632** are dimensioned to plug the perforations **626A**.

[0211] The ball sealers **632** are intended to be used as a diversion agent. The concept of using ball sealers as a diversion agent for stimulation of multiple perforation intervals is known. The ball sealers **632** will seat on the perforations **626A**, thereby plugging the perforations **626A** and allowing the operator to inject fluid under pressure into a zone above the perforations **626A**. The ball sealers **632** provide a low-cost diversion technique, with a low risk of mechanical issues.

[0212] **Figure 6G** is still another side view of the wellbore **600** of **Figure 6A**. Here, the second fracturing plug assembly **602** has fallen into the wellbore **600** to a position adjacent the zone of interest “**B**.” In addition, the ball sealers **632** have temporarily plugged the newly-formed perforations along the zone of interest “**A**.” The ball sealers **632** will later either flow out with produced hydrocarbons, or drop to the bottom of the well in an area known as the rat (or junk) hole.

[0213] **Figure 6H** is another side view of the wellbore **600** of **Figure 6A**. Here, charges of the second perforating gun assembly **602** have been detonated, causing the perforating gun of the perforating gun assembly **602** to fire. The zone of interest “**B**” has been perforated. A set of perforations **626B** is shown extending from the wellbore **600** and into the subsurface **110**. While only 6 perforations **626B** are shown in side view, it is understood that additional perforations are formed, and that such perforations will extend radially around the production casing **620**.

[0214] In addition to the creation of perforations **626B**, the perforating gun assembly **602** is self-destructed. Any pieces left from the assembly **601** will likely fall to the bottom of the production casing **620** or later flow back to the surface.

[0215] It is also noted in **Figure 6H** that fluid continues to be injected into the bore **605** of the wellbore **600** while the perforations **626B** are being formed. Fluid flow is indicated by arrow “**F**.” Because ball sealers **632** are substantially plugging the lower perforations along zone “**A**,” pressure is able to build up in the wellbore **600**. Once the perforations **626B** are

shot, the fluid escapes the wellbore **600** and invades the subsurface **110** within zone “**B**.” This immediately creates fractures **628B**.

[0216] It is understood that the process used for forming perforations **626B** and formation fractures **628B** along zone of interest “**B**” may be repeated in order to form perforations and formation fractures in zone of interest “**C**,” and other higher zones of interest. This would include the placement of ball sealers along perforations **626B** at zone “**B**,” running a third autonomous perforating gun assembly (not shown) into the wellbore **600**, causing the third perforating gun assembly to detonate along zone of interest “**C**,” and creating perforations and formation fractures along zone “**C**.”

[0217] **Figure 6I** provides a final side view of the wellbore **600** of **Figure 6A**. Here, the production casing **620** has been perforated along zone of interest “**C**.” Multiple sets of perforations **626C** are seen. In addition, formation fractures **628C** have been formed in the subsurface **110**.

[0218] In **Figure 6I**, the wellbore **600** has been placed in production. The ball sealers have been removed and have flowed to the surface. Formation fluids are flowing into the bore **605** and up the wellbore **600**. Arrows “**P**” indicate a flow of fluids towards the surface.

[0219] **Figures 6A** through **6I** demonstrate how perforating gun assemblies may be dropped into a wellbore **600** sequentially, with the on-board controller of each perforating gun assembly being programmed to ignite its respective charges at different selected depths. In the depiction of **Figures 6A** through **6I**, the perforating gun assemblies are dropped in such a manner that the lowest zone (Zone “**A**”) is perforated first, followed by sequentially shallower zones (Zone “**B**” and then Zone “**C**”). However, using autonomous perforating gun assemblies, the operator may perforate subsurface zones in any order. Beneficially, perforating gun assemblies may be dropped in such a manner that subsurface zones are perforated from the top, down. This means that the perforating gun assemblies would detonate in the shallower zones before detonating in the deeper zones.

[0220] **Figures 5A** through **5M** and **Figures 6A** through **6I** demonstrate the use of a fracturing plug assembly and the use of a perforating gun assembly, respectively, as autonomous tool assemblies. However, additional actuatable tools may be used as part of an autonomous tool assembly. Such tools include, for example, bridge plugs, cutting tools, cement retainers and casing patches. In these arrangements, the tools will be dropped or pumped or carried into a wellbore constructed to produce hydrocarbon fluids or to inject fluids. The tool may be fabricated from a friable material or from a millable material, such as ceramic, phenolic, composite, cast iron, brass, aluminum, or combinations thereof.

[0221] As noted above, it is desirable to incorporate a safety system into the autonomous wellbore tool to prevent premature activation. This is particularly true where the wellbore tool includes a perforating gun, such as perforating gun **212** of **Figure 2**. It is preferred that the safety system employ a series of switches or “gates,” each of which is satisfied by a separate condition.

[0222] **Figure 7** schematically illustrates a multi-gated safety system **700** for an autonomous wellbore tool, in one embodiment. In the safety system **700** of **Figure 7**, a number of separate gates are provided. The gates are indicated separately at **710**, **720**, **730**, **740**, and **750**. Each of these gates **710**, **720**, **730**, **740**, **750** represents a condition that must be satisfied in order for detonation charges to be delivered to a perforating gun. Stated another way, the gated safety system **700** keeps the detonators inactive while the perforating gun assembly is at the surface or in transit to a well site.

[0223] In **Figure 7**, a perforating gun is seen at **212**. This is representative of the same gun as is shown at **212** in **Figure 2**. The perforating gun **212** includes a plurality of shaped charges **712**. The charges are distributed along the length of the gun **212**. The charges **712** are ignited in response to an electrical signal delivered from the controller **216** through electrical lines **735** and to detonators **716**. The lines **725** are bundled into a sheath **714** for delivery to the perforating gun **212** and the detonators **716**. Optionally, the lines **725** are pulled from inside the tool assembly **200** as a safety precaution until the tool assembly **200** is delivered to a well site.

[0224] The detonators **716** receive an electrical current from a firing capacitor **766**. The detonators **716** then deliver heat to the charges **712** to create the perforations. Electrical current to the detonators **716** is initially shunted to prevent detonation from stray currents. In this respect, electrically actuated explosive devices can be susceptible to detonation by stray electrical signals. These may include radio signals, static electricity, or lightning strikes. After the assembly is launched, the gates are removed. This is done by un-shunting the detonators **716** by operating an initial electrical switch (seen at gate **710**), and by further closing electrical switches one by one until an activation signal may pass through the safety circuit **700** and the detonators **716** are active.

[0225] In the arrangement of **Figure 7**, two physical shunt wires **735** are provided. Initially, the wires **735** are connected across the detonators **716**. This connection is external to the perforating gun assembly **200**. Wires **735** are visible from the outside of the assembly **200**. When the assembly **200** is delivered to the well site, the shunt wires **735** are

disconnected from one another and are connected to the detonators **716** and to the circuitry making up the safety system **700**.

[0226] In operation, a detonation battery **760** is provided for the perforating gun **212**. At the appropriate time, the detonation battery **760** delivers an electrical charge to a firing capacitor **766**. The firing capacitor **766** then sends a strong electrical signal through one or more electrical lines **735**. The lines **735** terminate at the detonators **716** within the perforating gun **212**. The electrical signal generates resistive heat, which causes a detonation cord (not shown) to burn. The heating rapidly travels to the shaped charges **712** along the perforating gun **212**.

[0227] In order to prevent premature detonation, a series of gates is provided. In **Figure 7**, a first gate is shown at **710**. This first gate **710** is controlled by a mechanical pull tab. The pull tab is pulled as the perforating gun **212** (and other downhole tool components of tool **200**) is dropped into a wellbore. The tab may be pulled manually after the removal of safety pins (not shown). More preferably, the tab is pulled automatically as the gun **212** falls from a wellhead and into the wellbore.

[0228] **Figure 8** is a side view of a wellhead **800** receiving a perforating gun **212** as part of an autonomous perforating gun assembly **200**. The wellhead **800** represents completion equipment that is placed over the top of a wellbore **805**. In **Figure 8**, a string of surface casing is shown at **820**. The surface casing **820** extends several hundred feet into the subsurface **810**. Only an upper portion **822** of the surface casing **820** is shown in **Figure 8**.

[0229] The wellhead **800** has various components that are known in the industry. These include a lower valve **825**, an upper valve **835**, and an intermediate piping **840** between the lower **825** and upper **835** valves. The intermediate piping **840** is dimensioned to receive and isolate wellbore tools as they are deployed into the wellbore.

[0230] The lower valve **825** includes a ram **826** for selectively closing the lower valve **825** and closing off the wellbore. Similarly, the upper valve **835** includes a stem **836** for selectively closing the upper valve **835** and isolating the wellbore **810**.

[0231] The wellhead **800** receives a string of production casing **830**. An upper portion **832** of the production casing **830** is seen extending above the upper portion **822** of the surface casing **820**. The production casing **830** is in fluid communication with the intermediate piping **840**, but may be closed off by use of the lower ram **826**.

[0232] A pressure-equalizing line **842** connects the upper portion **832** of the production casing **830** with the intermediate piping **840**. A valve **845** is placed along the lower valve

825. The pressure-equalizing line **842** is used to balance the pressure between the wellbore **805** and the piping **840** before a tool string is launched into the production casing **830**.

[0233] The wellhead **800** also includes formation treatment injection lines **871**. The lines **871** receive fracturing fluids and other formation treatment fluids. Valves **874** are placed along the formation treatment injection lines **871**.

[0234] In operation, the gun assembly **212** is placed over the wellbore **805** in the piping **840** with the pressure-equalizing line **840** connected from the chamber formed by the piping **840** to the production casing **830**. The perforating gun **212** rests on the lower valve **825** or lower set of rams **826**. After the perforating gun **212** is placed inside the chamber formed by the piping **840**, and after the upper valve **835** is closed, the pressure in the piping **840** will be equalized with the pressure in the wellbore **805**.

[0235] As seen in **Figure 8** the perforating gun **212** is equipped with a safety ring **850**. The safety ring **850** is part of the safety system **700**. The safety ring **850** is essentially a tab or key that is mechanically connected to the controller **216**. As long as the safety ring **850** is in place, the detonator is shunted and any stray electrical current will go through the shunt.

[0236] A cable **852** is connected to the safety ring **850** at a first end. At a second opposite end, the cable **852** is connected to an attachment **854** within the wellhead **800**. During transportation and surface manipulation of the gun assembly **200**, the ring **850** is secured to the perforating gun **212** by pins (not shown). Before the perforating gun **212** (as part of the perforating gun assembly **200**) is placed in the launching chamber **840**, the pins are removed. At the moment of launch, the lower rams **826** are opened and the assembly **200** travels through the lower valve **825** and into the wellbore **200**. As the perforating gun **212** drops, it falls into the production casing **830**. During the drop, the safety ring **850** is pulled by the lanyard, closing the first gate **710**.

[0237] When the first gate **710** is closed, a command signal is sent. The command signal is shown as dashed line **712**. The signal **712** is sent to a fire enabling timer **714**. The timer **714**, in turn, controls a second gate in the safety system **700**.

[0238] Returning to **Figure 7**, the second gate in the safety system **700** is shown at **720**. This second gate **720** represents a timer. More specifically, the second gate **720** is a timed relay switch that shunts the electrical connections to the detonators **716** at all times unless a predetermined time value is exceeded. In one aspect, the timer **714** represents three or more separate clocks. Logic control compares the times kept by each of the three clocks. The logic control averages the three times. Alternatively, the logic control accepts the time of the

two closest times, and then averages them. Alternatively still, the logic control “votes” to select the first two (or other) times of the clock that are the same.

[0239] In one aspect, the timer 714 of gate 720 prevents a 2-pole relay 736 from changing state, that is, from shunting the detonators 716 to connecting the detonators 716 to the firing capacitor 766 for a predetermined period of time. The predetermined period of time may be, for example, 1 to 5 minutes. This is a “fire blocked” state. Thereafter, the electrical switch 720 is closed for a predetermined period of time, such as up to 30 minutes or, optionally, up to 55 minutes. This is a “fire unblocked” state.

[0240] Preferably, the safety system 700 is also programmed or designed to de-activate the detonators 716 in the case that detonation does not occur within a specified period of time. For instance, if the detonators 716 have not caused the charges 712 to fire after 55 minutes, the electrical switch representing the second gate 720 is opened, thereby preventing the relay 736 from changing state from shunting the detonators 716 to connecting the detonators 716 to the firing capacitor 766. This feature enables the safe retrieval of the gun assembly 200 utilizing standard fishing operations. In any instance, a control signal is provided through dashed line 716 for operating the switch of the second gate 720.

[0241] The control system 700 also includes a third gate 730. This third gate 730 is based upon one or more pressure-sensitive switches. In one aspect, the pressure-sensitive switches 730 are biased by a spring (not shown) to be in the closed (shunted) position. In this manner, the third gate 730 is shunted, or closed, during transport and loading. Alternatively, the pressure-sensitive switches are diaphragms that are designed to puncture or collapse upon exceeding a certain pressure threshold.

[0242] In either design, as the gun assembly 200 falls in the wellbore 805, hydrostatic pressure increases in the wellbore 805. The gun assembly 200 may be pumped or just dropped. Once a predetermined pressure value is exceeded within the wellbore 805, the gate 730 represented by one or more pressure-sensitive electrical switches closes. This provides a time-delayed unshunting of the detonators 716.

[0243] In one aspect, the ring 850 provides a mechanical barrier for the actuation of the pressure-activated switches of the third gate 730. Thus, the third gate 730 cannot close unless the first gate 710 is closed.

[0244] The fourth gate is shown at 740. This fourth gate 740 represents the program or digital logic that determines the location of the gun assembly 200 as it traverses the wellbore 805. As discussed above and in the incorporated patent application that is U.S. Provisional Pat. Appl. No. 61/424,285 entitled “Method for Automatic Control and Positioning of

Autonomous Downhole Tools,” the logic processes magnetic readings to identify probable casing collar locations, and compares those locations with a previously-downloaded (and, optionally algorithmically processed) casing collar log. The casing collar locations are counted until the desired location within the wellbore **805** is reached. An electrical signal is then delivered that closes the fourth gate **740**.

[0245] The fourth gate **740** is preferably an electronics module. The electronics module consists of an onboard memory and built-in logic, together forming a controller. The electronic module provides a digital safety barrier based on logic and predetermined values of various tool events. Such events may include tool depth, tool speed, tool travel time, and downhole markers. Downhole markers may be Casing Collar Locator (CCL) signals caused by collars and pup joints intentionally (or unintentionally) placed in the completion string **830**.

[0246] In the arrangement of **Figure 7**, a signal **718** is sent when the launch switch representing the first gate **710** is closed. The signal **718** informs the controller to begin computing tool depth in accordance with its operational algorithm. The controller includes a detonator control **742**. At the appropriate depth, the detonator control **742** sends a first signal **744'** to the detonator power supply **760**. In one aspect, the detonator power supply **760** is turned on a predetermined number of minutes, such as three minutes, after the tool assembly **200** is launched.

[0247] It is noted that in an electrically powered perforating gun, a strong electrical charge is needed to ignite the detonators **716**. The power supply (or battery) **760** itself will not deliver that charge; therefore, the power supply **760** is used to charge the firing capacitor **766**. This process typically takes about two minutes. Once the firing capacitor **766** is charged, the current lines **735** may carry the strong charge to the detonators **716**. Line **774** is provided as a power line.

[0248] The controller of the fourth gate **740** also includes a fire control **722**. The fire control **722** is part of the logic. For example, the program or digital logic representing the fourth gate **740** locates the perforating zone by matching a reference casing collar log using real time casing collar information acquired as the tool drops down the well. When the perforating gun assembly **200** reaches the appropriate depth, a firing signal **724** is sent.

[0249] The fire control **722** is connected to a 2-pole Form C fire relay **736**. The fire relay **736** is controlled through a command signal shown at **724**. The fire relay **736** is in a shunting of detonators **716** (or safe) state until activated by the fire control **722**, and until the command path **724** through the second gate **720** is available. In their safe state, the fire relay **736**

disconnects the up-stream power supply **760** and shunt down-stream detonators **716**. The relay **736** is activated upon command **724** from the fire control **722**.

[0250] The control system **700** optionally also includes a battery kill timer **746**. The battery kill timer **746** exists in an armed state for, say, up to 60 minutes. When armed, the battery kill timer **746** closes a relay **752** allowing battery pack **754** to power the controller of gate **740**. When necessary to kill the batteries **754**, **760**, battery kill timer **746** opens lower relay **752'** and closes upper relay **752''**. This allows charge from the power supply **760** to begin dissipating. This, in turn, serves as a safety feature for the system **700**.

[0251] The battery kill timer **746** is also connected to a detonator disconnect relay **772**. This is through a command signal **749**. The disconnect relay **772** is preferably a mechanical relay that magnetically latches. Therefore, the relay **772** remains in its last-commanded state even when all electrical power is removed from the system **700**.

[0252] The relay **772** resides normally in a closed state. However, if the perforating gun **212** fails to fire after a designated period of time, such as 60 minutes, then a command signal **749** is sent and the relay **772** is opened. Opening the relay **772** prevents a firing charge to be delivered from the capacitor **766** to the shunt wires **735**, thereby serving as another safety feature for the system **700**.

[0253] In another arrangement, the detonator disconnect relay **772** resides normally in an open state. When the tool assembly **200** is dropped, the detonator control **742** sends a command signal **743** to close the relay **772**, thereby allowing electrical current to flow through the relay **772** and towards the detonators **716**. If after a designated period of time, such as 60 minutes, the detonators **716** have not fired, then the battery kill timer **746** sends a separate signal **749** to re-open the relay **772**.

[0254] In the arrangement of **Figure 7**, a command signal **749'** is also shown for "disarming" the power supply **760**. Redundantly, a separate command signal **749''** is optionally directed to the switch **749''**. In a first designated period of time, such as 1 to 5 minutes, the command signals **749'**, **749''** are dormant. The power supply **760** is inactive and the switch **762** remains open. During a second period of time, such as 4 to 60 minutes, the power supply **760** is activated (through command signal **744'** from the detonator control **742**) and the switch **762** is closed (through a related command signal **744''** from the detonator control **742**). During a third designated period of time, such as greater than 30 minutes, or greater than 60 minutes, the power supply **760** is optionally de-activated (using command signal **749'**).

[0255] The controller **216** may be configured to use only one of command signals **749**, **749'**, **749''**, or any two, or none.

[0256] The fifth and final illustrative gate is shown at **750**. This fifth gate **750** relates to the installation of a battery pack **754**. Power is supplied from the battery pack **754** to the controller of the fourth gate **740** only after the battery pack **754** is installed. Without the controller, the firing capacitor cannot deliver electrical signals through the wires **735** and the detonators **716** cannot be armed. Thus, the battery pack **754** preferably includes a connector that allows the battery pack **754** to be physically disconnected.

[0257] It is noted that relay switches **752'**, **752''** may also be magnetically latching relays. As such, the relays **752**, **752''** maintain their last commanded state after electrical power is removed. Lower relay **752'** controls power to the controller **740**, while the upper relay **752''** is used to discharge the battery **754**. In the pre-configured state, both relays **752'** and **752''** are open. Relay **752''** is closed to power up the controller **740**. When the battery kill timer **746** commands a battery kill action, the relay **752''** is closed by command signal **748**. A short time later, relay **752'** is commanded to the open state, removing electrical power from the controller **740**.

[0258] As an optional feature, a discharge bank **756** may be provided to draw down the electrical power stored in the battery pack **754**. The discharge bank **756** may be, for example, a bleed-down resistor. The discharge bank **756** eliminates any potential source of long-term energy.

[0259] In operation, the battery pack (Gate 5) is installed into the perforating gun **212**. The gun **212** is then released into the wellbore **805**. The ring removal (Gate 1) triggers a pressure-activated switch (Gate 3) rated to remove the detonator shunt at a predetermined pressure value. In addition, the ring removal (Gate 1) activates a timed relay switch (Gate 2) that removes another detonator shunt once the pre-set time expires. At this point the detonators **716** are ready to fire and await the activation signal from the control system (the Gate 4 electronics module). The electronics module monitors the depth of the gun assembly **200**. After the gun **212** has traveled to a pre-programmed depth, the electronics logic (Gate 4) sends a signal that closes a mechanical relay and initiates detonation.

[0260] The safety system **700** may have a built-in safe tool retrieval system in case of misfire. A mechanical relay with a timer may also be activated after the shunt **730** is removed. The battery kill timer **746** is programmed to open the relay **722** after a pre-set period of time has passed, for example, one hour after activation. Opening relay **722** is integral to the battery kill_operation that also opens relay **752'**. Opening relay **752'** removes

electrical power from the controller **740**, which in turn prevents relay **736** from changing state from shunting the detonator **716**. Also, opening the relay **722** prevents energy from getting from the firing capacitor **766** to the detonators **716**. This may be done, for example, by using a magnet. The assembly **200** may be fished out using conventional fishing techniques and the fishing neck **210**.

[0261] In the arrangement of **Figure 7**, a command signal **744''** may be sent to a switch **762**. In a first designated period of time, such as 1 to 5 minutes, the switch **762** remains open. During a second period of time, such as 4 to 60 minutes, the switch is closed. And during a third designated period of time, such as greater than 30 minutes, the switch is re-opened.

[0262] It is preferred that the perforating gun assembly **200** be manufactured using non-conductive materials such as ceramic. The use of non-conductive materials increases the safety of the perforating gun **212** by reducing the risk of stray currents activating the detonators **712**.

[0263] A fluid-activated shunt switch can also be incorporated into the safety system **700**. Such a switch sends an emergency shut down command to the controller **740**. Under this condition, the controller **740** immediately activates a kill battery sequence that closes the upper relay **752''**, opens the relay **772**, closes the relay **762**, turns off the power to the detonator power supply **760**, and opens the relay lower **752'**, thereby removing electrical power from the controller **740**. Relays **752'**, **752''**, **762**, and **772** are preferably magnetically latching relays so that they will retain the last-commanded state when electrical power is removed, such as in the event that water enters inside the electronics module. **Figure 9** is a plan view of a fluid-activated shunt switch **900**. The shunt switch **900** may be used to shunt the safety system **700** of **Figure 7**.

[0264] The switch **900** defines a disc **910** fabricated, for example, from a silicon material or printed circuit board. Layered over the disc **910** is a comb electrode pattern. A first comb pattern is shown at **920**, while a second comb pattern is shown at **930**. The first pattern **920** has fluid passage holes **925**, while the second pattern **930** has fluid passage holes **935**.

[0265] If water invades the autonomous tool assembly **200**, the switch **900** re-opens the multi-gated safety system **700**, cutting off the flow of electrical power to the detonators **712**.

[0266] It is observed that the safety system **700** is applicable not only to autonomous perforating tools, but also to conventional wireline and slickline perforating guns. Further, the safety system **700** may be used for completing vertical, inclined, and horizontally wells. The type of the well will determine the delivery method of and sequence for the autonomous

tools. In vertical and low-angle wells, the force of gravity may be sufficient to ensure the delivery of the assembly **200** to the desired depth or zone. In higher angle wells, including horizontally completed wells, the assembly **200** may be pumped down or delivered using a tractor. To enable pumping down of a first assembly, the casing may be perforated at the toe of the well.

[0267] In one aspect, the gate **710** may be a vertical sensor, a horizontal sensor, or a velocity sensor. Any of these may be required conditions that must be met before a relay is changed and the detonators **716** can be activated.

[0268] As an additional feature, the safety system **700** may be equipped with a pressure pulse activation system. Pressure pulse activation systems are generally known in the art of downhole tools. Pressure pulse activation systems have pressure sensors that “listen” for pressure pulses delivered through the wellbore fluid column. The pressure pulse may be a binary number that the pressure pulse activation systems record and respond to. The pressure pulse profile, or binary number, is unique to ensure that typical operations would never resemble the profile.

[0269] When a designated sequence of pressure pulses is detected, a voltage (or other) electrical signal is sent to a detonator control, such as control **742**. The control **742** then instructs the detonators **716** to fire. In this way, an un-fired gun sitting in the rat hole may “self destruct.” Also include a claim that describes.

[0270] The safety system **700** is ideally suited for use with the Just-In-Time-Perforating™ (“JITP”) process which is used for perforating and stimulating subsurface formations at sequential intervals. The JITP process allows an operator to fracture a well at multiple intervals with limited or even no “trips” out of the wellbore. The process has particular benefit for multi-zone fracture stimulation of tight gas reservoirs having numerous lenticular sand pay zones. For example, the JITP process is currently being used to recover hydrocarbon fluids in the Piceance basin.

[0271] The JITP technology is the subject of U.S. 6,543,538, entitled “Method for Treating Multiple Wellbore Intervals” which issued April 8, 2003, and is incorporated by reference herein in its entirety. In one embodiment, the ‘538 patent generally teaches:

- using a perforating device, perforating at least one interval of one or more subterranean formations traversed by a wellbore;
- pumping treatment fluid through the perforations and into the selected interval without removing the perforating device from the wellbore;

- deploying or activating an item or substance in the wellbore to removably block further fluid flow into the treated perforations; and
- repeating the process for at least one more interval of the subterranean formation.

[0272] In the present case, the perforating device is detonated “on the fly,” and is never removed. The item that blocks fluid flow into treated perforations is an autonomous plug. This allows for stimulation treatments to multiple subsurface formation targets within a single wellbore.

[0273] While it will be apparent that the inventions herein described are well calculated to achieve the benefits and advantages set forth above, it will be appreciated that the inventions are susceptible to modification, variation and change without departing from the spirit thereof.

CLAIMS

What is claimed is:

1. A tool assembly for performing a wellbore operation, comprising:
 - an actuatable tool;
 - a location device for sensing the location of the actuatable tool within a wellbore based on a physical signature provided along the wellbore;
 - an on-board controller configured to send an actuation signal to the actuatable tool when the location device has recognized a selected location of the tool based on the physical signature, wherein the actuatable tool, the location device, and the on-board controller are together dimensioned and arranged to be deployed in the wellbore as an autonomous unit; and
 - a multi-gate safety system for preventing premature activation of the actuatable tool, the safety system comprising control circuitry having one or more electrical switches that are independently operated in response to separate conditions before permitting the activation signal to reach the actuatable tool.
2. The tool assembly of claim 1, wherein the multi-gate safety system comprises at least one of:
 - (i) a selectively removable battery pack, wherein the battery pack provides power to the control circuitry when the battery pack is installed into the assembly;
 - (ii) a mechanical pull-tab, wherein the control circuitry is configured to operate an electrical switch upon removal of the tab from the tool assembly;
 - (iii) a pressure-sensitive electrical switch that operates only when a designated hydraulic pressure on the tool assembly is exceeded;
 - (iv) an electrical timer that is configured to selectively operate one or more switches at one or more designated times after deployment of the tool assembly in the wellbore;
 - (v) a velocity sensor configured to operate an electrical switch only upon sensing that the tool assembly is traveling at a designated velocity;
 - (vi) a sensor configured to actuate an electrical switch when the tool assembly is substantially vertical; and
 - (vii) a sensor configured to actuate an electrical switch when the tool assembly is substantially horizontal;

wherein operating an electrical switch means either closing such a switch to permit a flow of electrical current through the switch, or opening such a switch to restrict a flow of electrical current through the switch.

3. The tool assembly of claim 2, wherein:
 - the tool assembly is a perforating gun assembly; and
 - the actuatable tool comprises a perforating gun having detonators with associated charges that detonate in response to an electrical signal conveyed through one or more electrical wires.
4. The tool assembly of claim 3, wherein:
 - the one or more wires comprises a pair of wires that are configured to receive an electrical charge from a firing capacitor;
 - the multi-gate system comprises the electrical timer; and
 - the one or more switches operated by the electrical timer comprises a shunt switch.
5. The tool assembly of claim 4, wherein:
 - during a first designated time, the shunt switch is closed; and
 - at a second designated time, the shunt switch is open.
6. The tool assembly of claim 4, wherein:
 - the multi-gate system comprises the electrical timer;
 - the one or more switches comprises a detonator switch that resides in an open state during a first designated period of time;
 - the electrical timer is configured to send a command signal to the detonator switch to close the detonator switch at a second designated time.
7. The tool assembly of claim 5, wherein:
 - the first designated time is about 1 to 5 minutes; and
 - the second designated time is about 4 to 60 minutes.
8. The tool assembly of claim 6, wherein at a third designated time, the shunt switch is again open.

9. The tool assembly of claim 3, wherein:
the perforating gun assembly is substantially fabricated from a friable material; and
the perforating gun assembly self-destructs in response to the associated charges detonating.
10. The tool assembly of claim 3, wherein:
the multi-gate safety system comprises both the mechanical pull-tab and the timer switch; and
deployment of the tool assembly means that the tool assembly is configured for removal of the mechanical pull-tab.
11. The tool assembly of claim 10, wherein:
the mechanical pull-tab is releasably connected to a cable;
the cable is tethered to a wellhead component over the wellbore; and
the mechanical pull-tab is configured to release upon movement of the tool assembly into the wellbore.
12. The tool assembly of claim 3, further comprising:
a shunt comprising two leads, wherein the shunt is configured to direct electrical current through the leads in a closed position, and to permit a flow of current toward the actuatable tool in an open position.
13. The tool assembly of claim 12, wherein:
the multi-gate system comprises the electrical timer; and
the one or more switches operated by the electrical timer comprises (i) a switch for closing a connection between the removable battery pack and the control circuitry, (ii) a switch for operating a connection between a firing capacitor and the two leads, (iii) or a combination of the two.
14. The tool assembly of claim 3, wherein:
the multi-gate safety system comprises both the mechanical pull-tab and the pressure sensitive switch; and
the mechanical pull-tab is configured to provide a mechanical barrier for the activation of the pressure-sensitive switch.

15. The tool assembly of claim 14, wherein the pressure-sensitive switch comprises either a diaphragm or a spring-biased connection.
16. The tool assembly of claim 3, further comprising:
a fishing neck.
17. The tool assembly of claim 3, wherein:
the on-board controller is part of an electronic module comprising onboard memory and built-in logic; and
the electronic module is configured to send a signal that initiates detonation of the perforating gun after the tool assembly has traveled to a pre-programmed location in the wellbore.
18. The tool assembly of claim 17, wherein the built-in logic provides a digital safety barrier based on a predetermined value for (i) tool depth, (ii) tool speed, (iii) travel time, (iv) downhole markers, or (v) combinations thereof.
19. The tool assembly of claim 3, wherein the multi-gate safety system comprises:
the electrical timer switch; and
a mechanical relay having a timer, wherein the timer for the mechanical relay is configured to activate after the electrical timer switch is closed, and to switch the mechanical relay after a pre-set period of time has passed in order to re-open the electrical timer switch.
20. The tool assembly of claim 3, wherein the multi-gate safety system comprises:
the selectively removable battery pack; and
a relay that connects the battery pack to a discharge bank to draw down electrical power from the battery pack.
21. The system of claim 3, wherein:
the location device is a casing collar locator; and
the physical signature is formed by the spacing of collars along a string of casing, with the collars being sensed by the collar locator.

22. The tool assembly of claim 3, wherein:
the location device is a radio frequency antenna; and
the physical signature is formed by the spacing of identification tags along a string of casing, with the identification tags being sensed by the radio frequency antenna.
23. The tool assembly of claim 1, wherein:
the location device comprises a pair of sensing devices spaced apart along the tool assembly as lower and upper sensing devices;
the controller comprises a clock that determines time that elapses between sensing by the lower sensing device and sensing by the upper sensing device as the tool assembly traverses across a physical signature marker; and
the tool assembly is programmed to determine tool assembly velocity at a given time based on the distance between the lower and upper sensing devices, divided by the elapsed time between sensing.
24. The assembly of claim 1, wherein the tool assembly is fabricated substantially from ceramic.
25. The tool assembly of claim 1, wherein:
the actuatable tool is a fracturing plug or a bridge plug configured to form a substantial fluid seal when actuated within the wellbore at the selected location; and
the plug comprises an elastomeric sealing element and a set of slips for holding the location of the tool assembly proximate the selected location.
26. The tool assembly of claim 25, wherein:
the tool assembly is fabricated from a friable material; and
the tool assembly is configured to self-destruct at a designated time after the plug is set in the tubular body.
27. The tool assembly of claim 25, further comprising:
a fishing neck.

28. The tool assembly of claim 1, wherein:
the actuatable tool is a casing patch, a cement retainer, a cutting tool, or a bridge plug;
and
the actuatable tool is fabricated from a millable material.
29. The tool assembly of claim 28, wherein the millable material comprises ceramic, phenolic, composite, cast iron, brass, aluminum, or combinations thereof.
30. The tool assembly of claim 3, further comprising:
a plurality of non-friable ball sealers; and
a container for temporarily holding the ball sealers, the container being part of the autonomous unit of the tool assembly and being designed to release the ball sealers in response to a command from the on-board controller proximate the time of the perforating gun being fired.
31. The tool assembly of claim 1, wherein the position locator comprises an accelerometer designed to calculate the selected location of the tool assembly upon release into the wellbore.
32. The tool assembly of claim 1, further comprising:
a connection device for connecting a working line to the tool assembly, thereby providing the option of lowering the tool assembly into the wellbore on the working line.
33. An integrated tool for downhole fracture operations, comprising:
a plug body having an elastomeric sealing element;
a setting tool for setting the plug body within a string of casing in a wellbore;
a perforating gun for perforating the string of casing at a selected zone of interest, the perforating gun having detonators with associated charges for perforating the string of casing at the selected zone of interest in response to an electrical signal conveyed through one or more electrical wires;
a position locator for sensing the presence of objects along the wellbore and generating depth signals in response;
an on-board controller for processing the depth signals and for activating the plug and the perforating gun at the selected zone of interest; and

a multi-gate safety system for preventing premature detonation of the associated charge of the perforating gun;

wherein the integrated tool is dimensioned and arranged to be deployed within the wellbore as an autonomous unit.

34. The integrated tool of claim 33, wherein the multi-gate safety system comprises at least one of:

(i) a selectively removable battery pack, wherein the battery pack provides power to the control circuitry when the battery pack is installed into the assembly;

(ii) a mechanical pull-tab, wherein the control circuitry is configured to operate an electrical switch upon removal of the tab from the tool assembly;

(iii) a pressure-sensitive switch that operates only when a designated hydraulic pressure is exceeded;

(iv) an electrical timer switch that is configured to selectively operate one or more switches at one or more designated times after deployment of the tool assembly in the wellbore;

(v) a velocity sensor configured to operate an electrical switch only upon sensing that the tool assembly is traveling a designated velocity;

(vi) a sensor configured to actuate an electrical switch when the tool assembly is substantially vertical; and

(vii) a sensor configured to actuate an electrical switch when the tool assembly is substantially horizontal

wherein operating an electrical switch means either closing such a switch to permit a flow of electrical current through the switch, or opening such a switch to restrict a flow of electrical current through the switch.

35. The integrated tool of claim 34, wherein:

the one or more electrical wires comprises a pair of wires that are configured to receive an electrical charge from a firing capacitor;

the multi-gate system comprises the electrical timer; and

the one or more switches operated by the electrical timer comprises a shunt switch.

36. The integrated tool of claim 35, wherein:

during a the first designated period of time, the shunt switch is closed; and

at a second designated time, the shunt switch is open.

37. The integrated tool of claim 34, wherein:
the multi-gate system comprises the electrical timer;
the one or more switches comprises a detonator switch that resides in an open state during a first designated time;
the electrical timer is configured to send a command signal to the detonator switch to close the detonator switch at a second designated time.
38. The integrated tool of claim 37, wherein:
the first designated time is about 1 to 5 minutes; and
the second designated time is about 4 to 60 minutes.
39. The integrated tool of claim 37, wherein during a third designated time, the shunt switch is again open.
40. The integrated tool of claim 34, wherein:
the multi-gate safety system comprises both the mechanical pull-tab and the timer switch; and
deployment of the tool assembly means that the tool assembly is configured for removal of the mechanical pull-tab.
41. The integrated tool of claim 34, wherein:
the mechanical pull-tab is releasably connected to a cable;
the cable is tethered to a wellhead component over the wellbore; and
the mechanical pull-tab is configured to release upon movement of the tool assembly into the wellbore.
42. The integrated tool of claim 34, wherein:
the multi-gate safety system comprises both the mechanical pull-tab and the pressure sensitive switch; and
the mechanical pull-tab is configured to provide a mechanical barrier for the activation of the pressure-sensitive switch.

43. The integrated tool of claim 34, further comprising:
a fishing neck.
44. The integrated tool of claim 34, further comprising:
a shunt comprising two leads, wherein the shunt is configured to direct electrical current through the leads in a closed position, and to permit a flow of current toward the actuatable tool in an open position.
45. The integrated tool of claim 44, wherein:
the multi-gate system comprises the electrical timer; and
the one or more switches operated by the electrical timer comprises (i) a switch for closing a connection between the removable battery pack and the control circuitry, (ii) a switch for operating a connection between a firing capacitor and the two leads, (iii) or a combination of the two.
46. The integrated tool of claim 34, wherein:
the on-board controller is part of an electronic module comprising onboard memory and built-in logic; and
the electronic module is configured to send a signal that initiates detonation of the perforating gun after the tool assembly has traveled to a pre-programmed location in the wellbore.
47. The integrated tool of claim 46, wherein the built-in logic provides a digital safety barrier based on a predetermined value for (i) tool depth, (ii) tool speed, (iii) travel time, (iv) downhole markers, or (v) combinations thereof.
48. The integrated tool of claim 34, wherein the multi-gate safety system comprises:
the electrical timer switch; and
a mechanical relay having a timer, wherein the timer for the mechanical relay is configured to activate after the electrical timer switch is closed, and to switch the mechanical relay after a pre-set period of time has passed in order to re-open the electrical timer switch.
49. The integrated tool of claim 28, wherein the multi-gate safety system comprises:
the selectively removable battery pack; and

a mechanical relay that connects the battery pack to a discharge bank to draw down electrical power from the battery pack.

50. The integrated tool of claim 34, wherein:
the position locator is a casing collar locator; and
the objects along the wellbore are collars, with the collars being sensed by the collar locator.
51. The integrated tool of claim 34, wherein the integrated tool is substantially fabricated from a friable material.
52. The integrated tool of claim 34, further comprising:
a power supply for providing electrical energy to a firing capacitor in response to a signal from the electrical timer;
the firing capacitor; and
a bleed-down resistor for dissipating electrical energy from the firing capacitor over a designated period of time.
53. The integrated tool of claim 34, wherein:
the multi-gate system comprises the electrical timer; and
the one or more switches operated by the electrical timer comprises at least one relay for selectively providing electrical communication between the selectively removable battery pack and the control circuitry; and
the electrical timer opens the at least one relay to cut off power to the control circuitry at a designated time after the integrated tool is launched into the wellbore.
54. The integrated tool of claim 34, further comprising:
a pressure pulse activation system that is configured to (i) sense pressure sequences from a fluid column within the wellbore, and, in response to recognizing a designated sequence, (ii) send a signal that prompts the detonators to fire using the associated charges.
55. A method of performing a wellbore operation, comprising:
providing a tool assembly at a well site, the tool assembly comprising:
an actuatable tool

a location device for sensing the location of the actuatable tool within a wellbore based on a physical signature provided along the wellbore;

an on-board controller configured to send an actuation signal to the actuatable tool when the location device has recognized a selected location of the tool based on the physical signature, wherein the actuatable tool, the location device, and the on-board controller are together dimensioned and arranged to be deployed in the wellbore as an autonomous unit; and

a multi-gate safety system for preventing premature activation of the actuatable tool, the safety system comprising control circuitry having one or more electrical switches that are independently operated in response to separate conditions before permitting the activation signal to reach the actuatable tool; and

deploying the tool assembly into the wellbore without electrical control external to the wellbore.

56. The method of claim 55, wherein the multi-gate safety system comprises at least one of:

(i) a selectively removable battery pack, wherein the battery pack provides power to the control circuitry when the battery pack is installed into the assembly;

(ii) a mechanical pull-tab, wherein the control circuitry is configured to operate an electrical switch upon removal of the tab from the tool assembly;

(iii) a pressure-sensitive electrical switch that operates only when a designated hydraulic pressure on the tool assembly is exceeded;

(iv) an electrical timer that is configured to selectively operate one or more switches at one or more designated times after deployment of the tool assembly in the wellbore;

(v) a velocity sensor configured to operate an electrical switch only upon sensing that the tool assembly is traveling at a designated velocity;

(vi) a sensor configured to actuate an electrical switch when the tool assembly is substantially vertical; and

(vii) a sensor configured to actuate an electrical switch when the tool assembly is substantially horizontal;

wherein operating an electrical switch means either closing such a switch to permit a flow of electrical current through the switch, or opening such a switch to restrict a flow of electrical current through the switch.

57. The method of claim 56, wherein:
the tool assembly is a perforating gun assembly;
the actuatable tool comprises a perforating gun having detonators with associated charges that detonate in response to an electrical signal conveyed through one or more electrical wires; and
the method further comprises delivering the tool assembly to the selected location in the wellbore such that when the tool assembly reaches the selected location, the perforating gun fires shots to produce perforations.
58. The method of claim 57, wherein delivering the tool assembly to the selected location in the wellbore comprises (i) dropping the tool assembly into the wellbore and allowing it to gravitationally fall, (ii) pumping the tool assembly into the wellbore, or (iii) moving the tool assembly by use of a tractor.
59. The method of claim 57, wherein:
the one or more wires comprises a pair of wires that are configured to receive an electrical charge from a firing capacitor;
the multi-gate system comprises the electrical timer; and
the one or more switches operated by the electrical timer comprises a shunt switch.
60. The method of claim 59, wherein:
during a first designated time, the shunt switch is closed; and
the method further comprises opening the shunt switch at a second designated time.
61. The method of claim 59, wherein:
the multi-gate system comprises the electrical timer;
the one or more switches comprises a detonator switch that resides in an open state during a first designated period of time;
the electrical timer is configured to send a command signal to the detonator switch to close the detonator switch at a second designated time.

62. The method of claim 57, wherein:
the multi-gate safety system comprises both the mechanical pull-tab and the timer switch; and
the method further comprises removing the mechanical pull-tab when deploying the tool assembly.
63. The method of claim 62, wherein:
the mechanical pull-tab is releasably connected to a cable;
the cable is tethered to a wellhead component over the wellbore; and
removing the mechanical pull-tab comprises dropping the tool assembly into the wellbore so as to cause the mechanical pull-tab to release from the cable.
64. The method of claim 57, wherein the tool assembly further comprises a shunt comprising two leads, wherein the shunt is configured to direct electrical current through the leads in a closed position, and to permit a flow of current toward the actuatable tool in an open position.
65. The method of claim 64, wherein:
the multi-gate system comprises the electrical timer; and
the one or more switches operated by the electrical timer comprises (i) a switch for closing a connection between the removable battery pack and the control circuitry, (ii) a switch for operating a connection between a firing capacitor and the two leads, (iii) or a combination of the two.
66. The method of claim 57 wherein:
the multi-gate safety system comprises both the mechanical pull-tab and the pressure sensitive switch; and
the mechanical pull-tab is configured to provide a mechanical barrier for the activation of the pressure-sensitive switch.
67. The method of claim 57, wherein:
the on-board controller is part of an electronic module comprising onboard memory and built-in logic; and

the electronic module is configured to send a signal that initiates detonation of the perforating gun after the tool assembly has traveled to a pre-programmed location in the wellbore.

68. The method of claim 57, wherein the multi-gate safety system comprises:

the electrical timer switch;

a mechanical relay having a timer, wherein the timer for the mechanical relay is configured to activate after the electrical timer switch is closed, and to switch the mechanical relay after a pre-set period of time has passed in order to re-open the electrical timer switch.

69. The method of claim 57, wherein the multi-gate safety system comprises:

the selectively removable battery pack; and

a relay that connects the battery pack to a discharge bank to draw down electrical power from the battery pack.

70. The system of claim 57, wherein:

the location device is a casing collar locator; and

the physical signature is formed by the spacing of collars along a string of casing, with the collars being sensed by the collar locator.

71. The method of claim 55, wherein:

the actuatable tool is a fracturing plug or a bridge plug configured to form a substantial fluid seal when actuated within the wellbore at the selected location;

the plug comprises an elastomeric sealing element and a set of slips for holding the location of the tool assembly proximate the selected location; and

the method further comprises delivering the tool assembly to the selected location in the wellbore such that when the tool assembly reaches the selected location, the elastomeric sealing element and the slips set in the wellbore.

72. The method of claim 55, wherein:

the actuatable tool is a casing patch, a cement retainer, a cutting tool, or a bridge plug; and

the actuatable tool is fabricated from a millable material.

73. The method tool of claim 34, further comprising:
a power supply for providing electrical energy to a firing capacitor in response to a signal from the electrical timer;
the firing capacitor; and
a bleed-down resistor for dissipating electrical energy from the firing capacitor over a designated period of time.
74. The method of claim 57, wherein:
the multi-gate system comprises the electrical timer;
the one or more switches operated by the electrical timer comprises at least one relay for selectively providing electrical communication between the selectively removable battery pack and the control circuitry; and
the method further comprises opening the at least one relay to cut off power to the control circuitry at a designated time after the tool assembly is launched into the wellbore.
75. The method of claim 57, wherein the tool assembly further comprises:
a pressure pulse activation system that is configured to (i) sense pressure sequences from a fluid column within the wellbore, and, in response to recognizing a designated sequence, (ii) send a signal that prompts the detonators to fire using the associated charges.

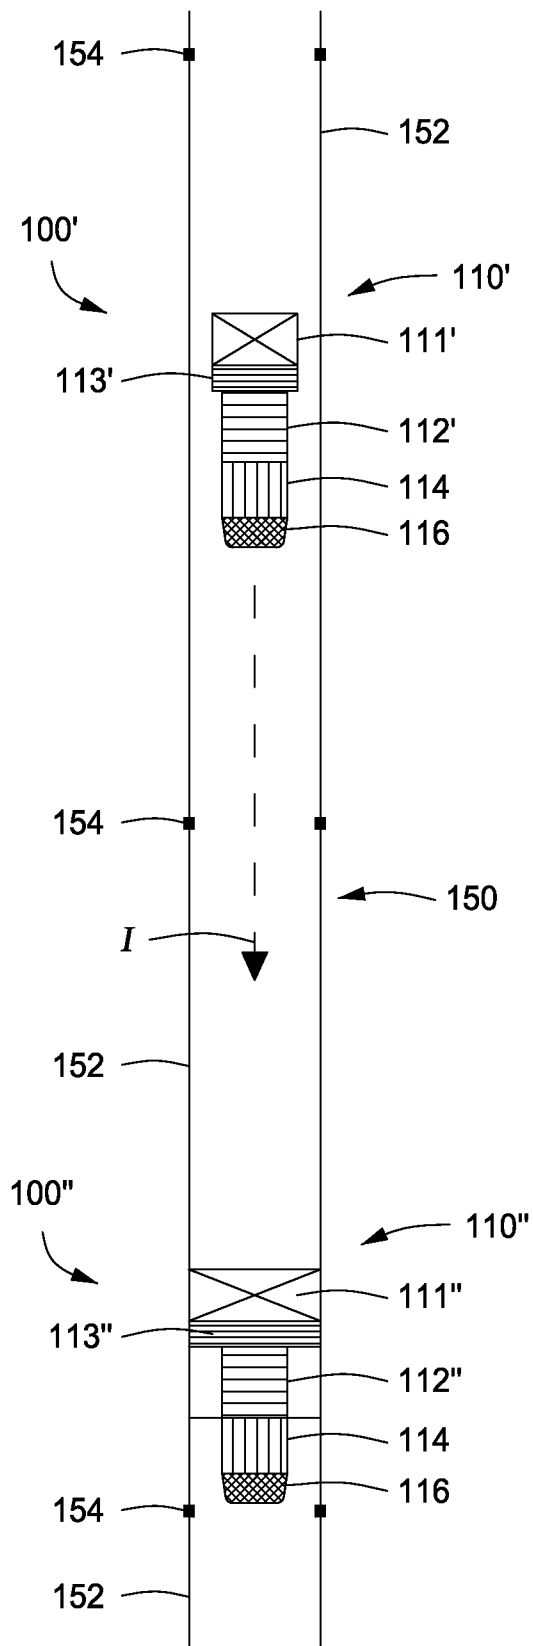


FIG. 1

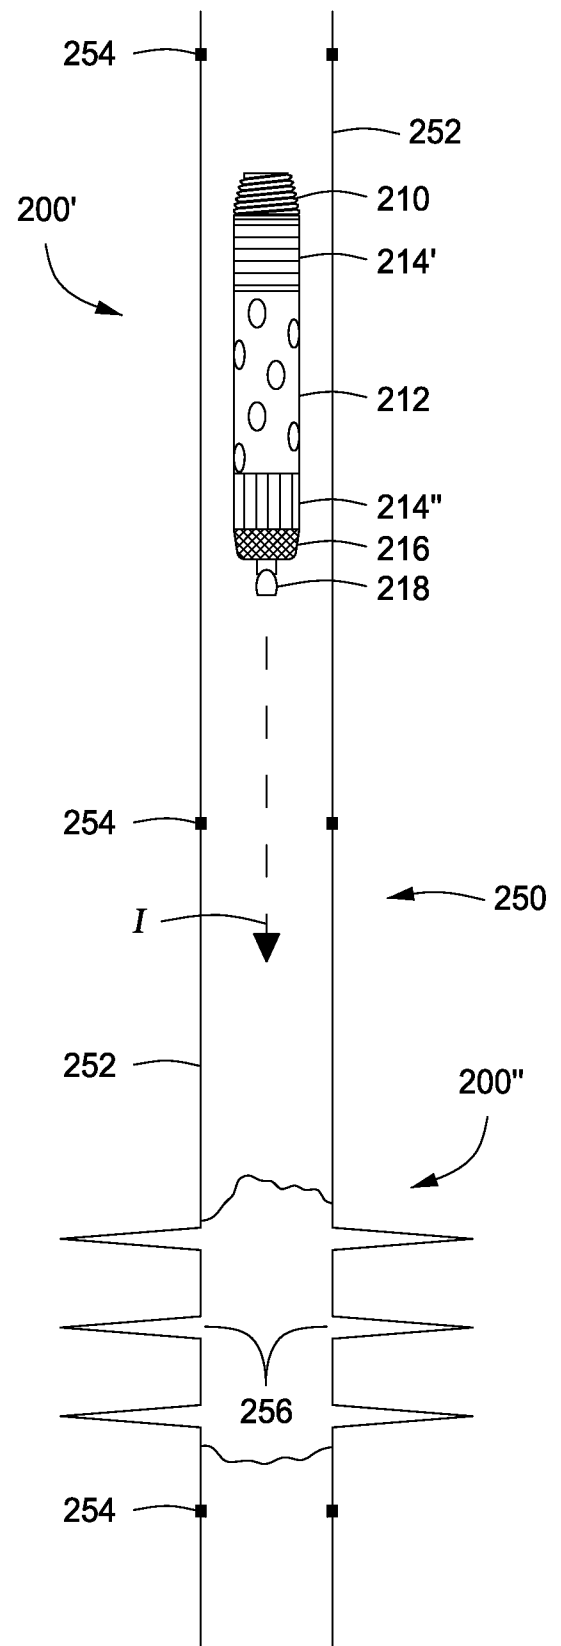


FIG. 2

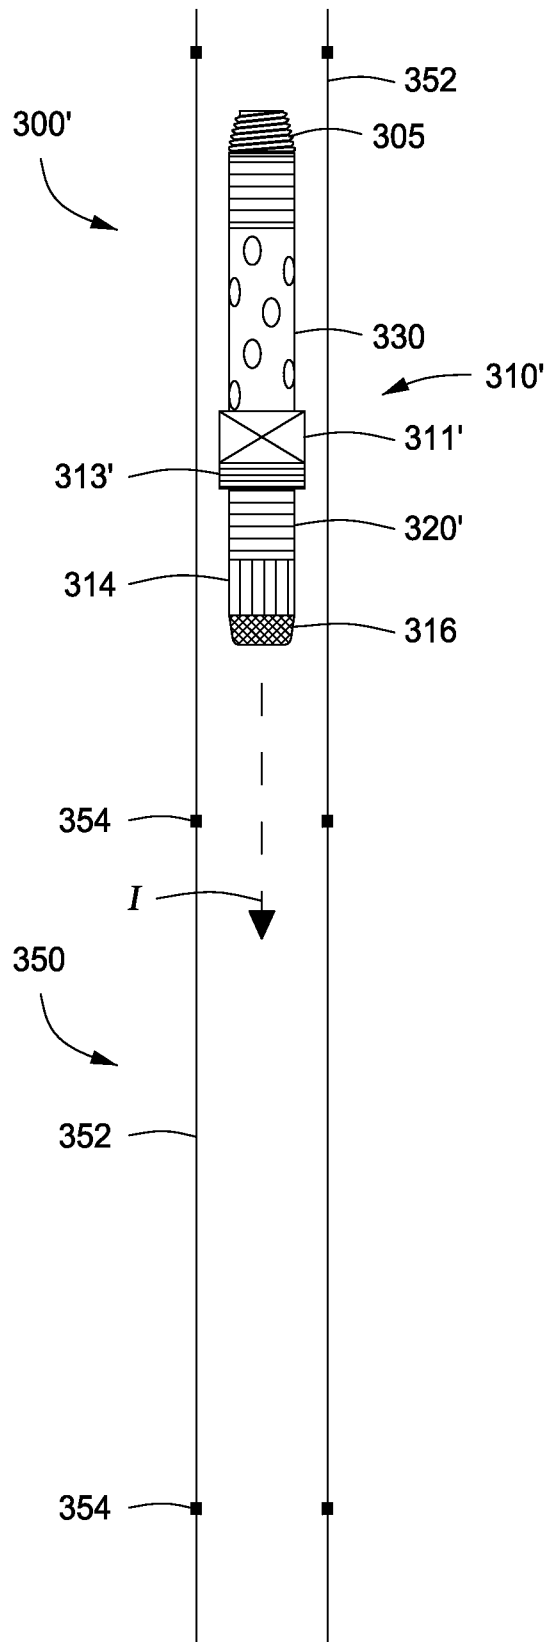


FIG. 3A

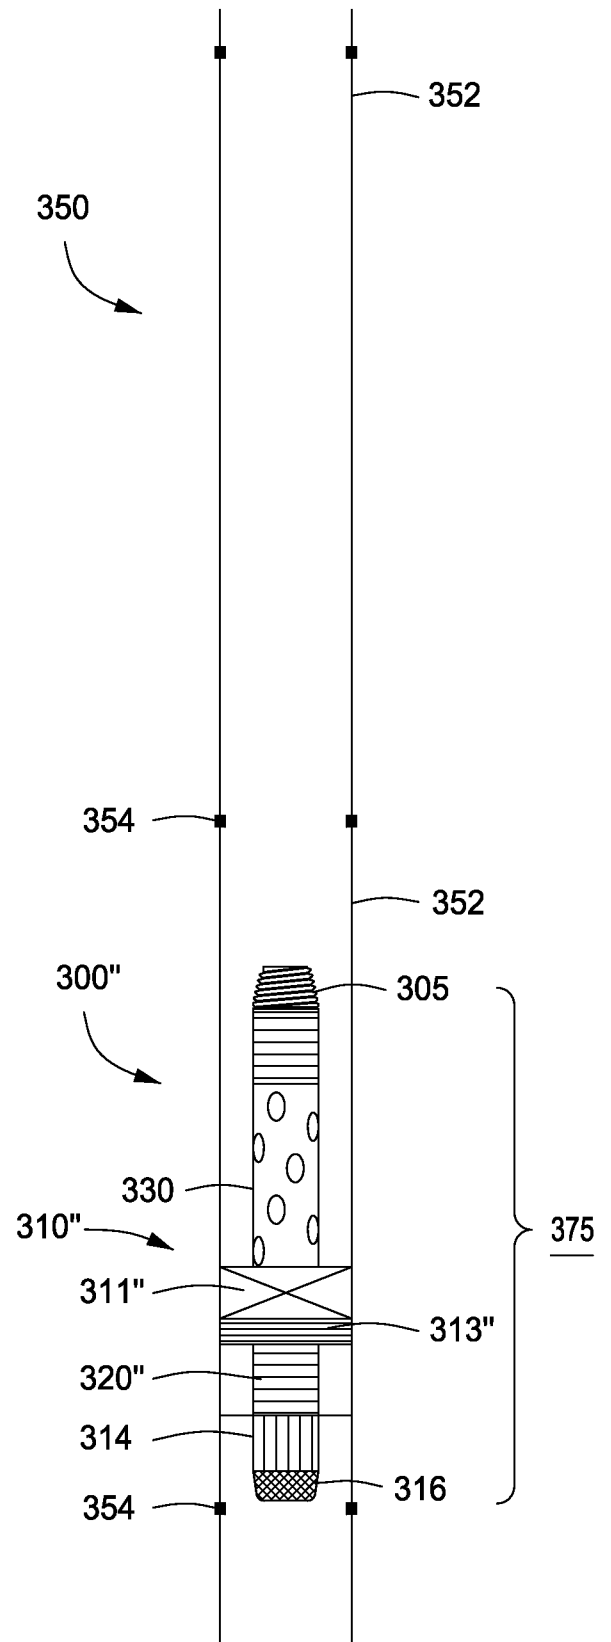


FIG. 3B

3/28

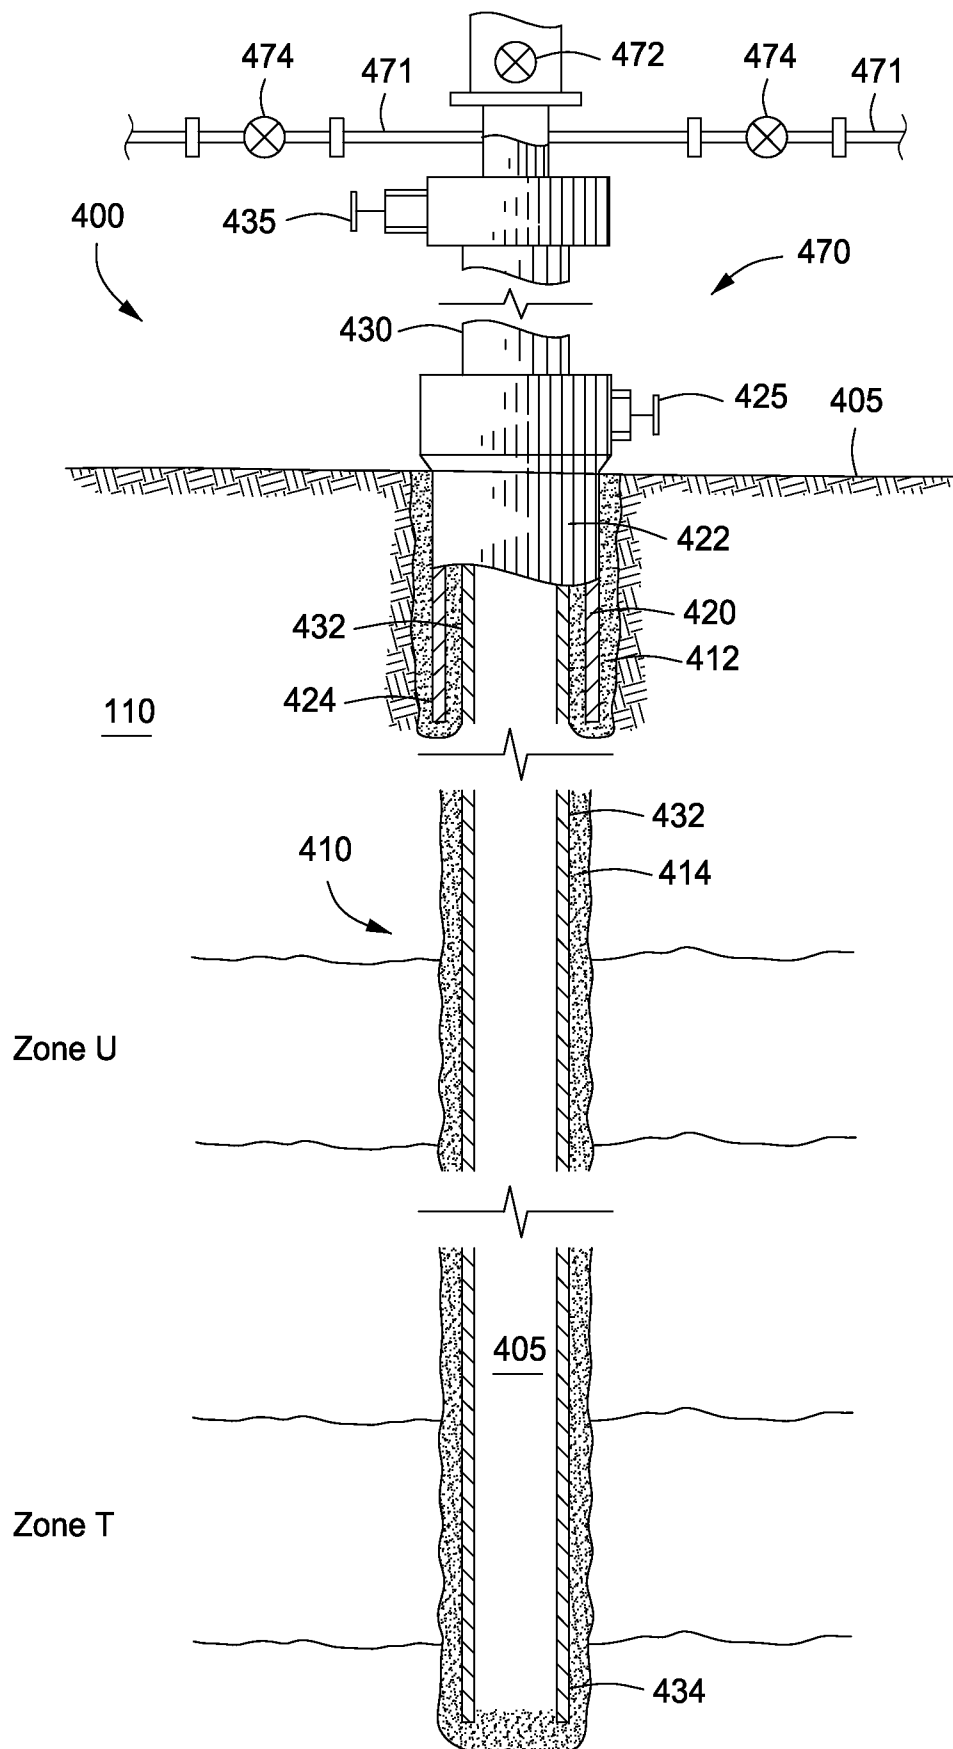


FIG. 4A

4/28

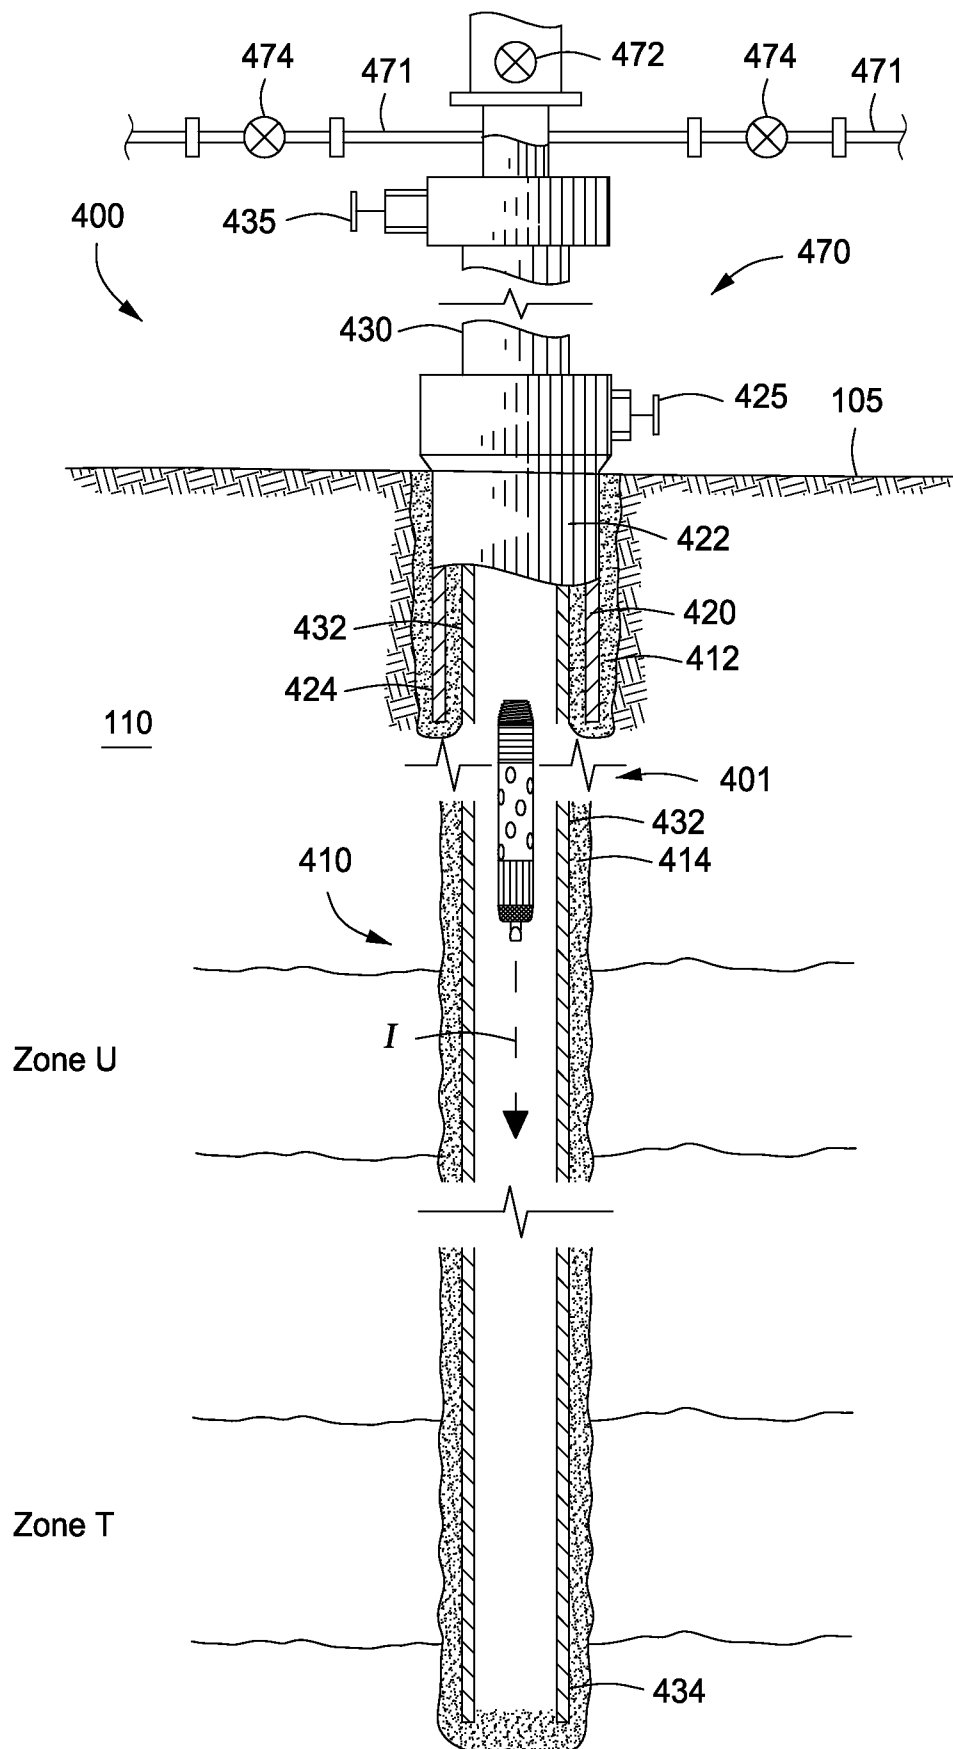


FIG. 4B

5/28

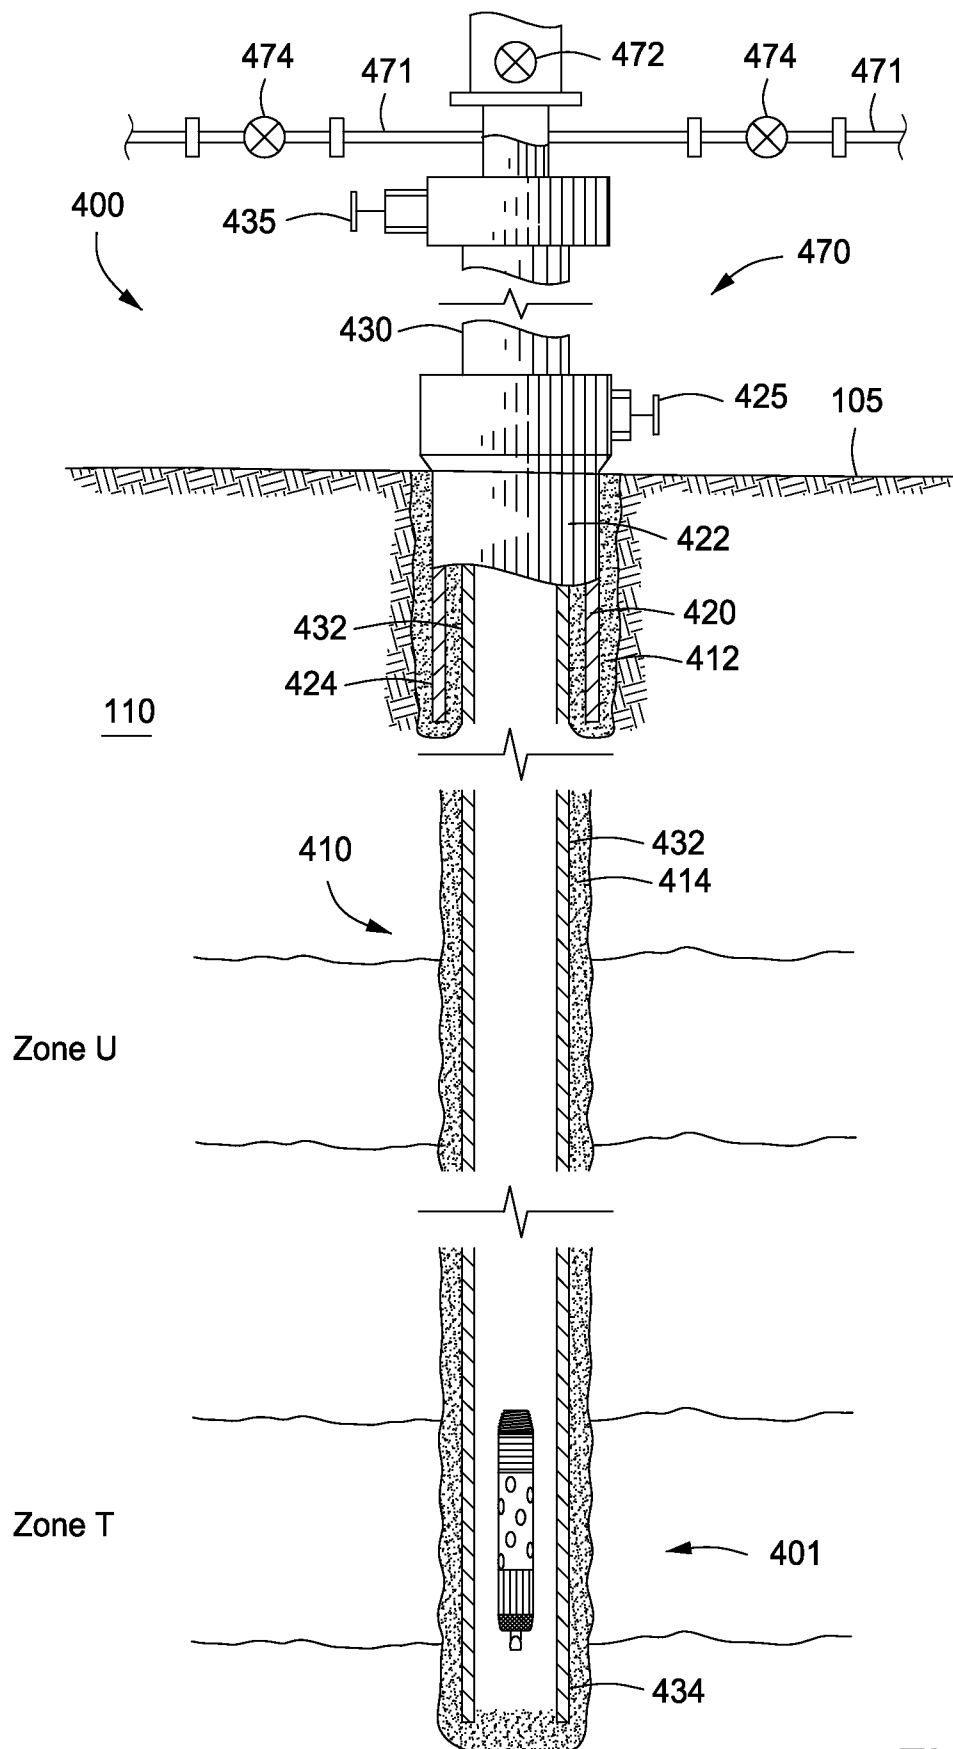


FIG. 4C

6/28

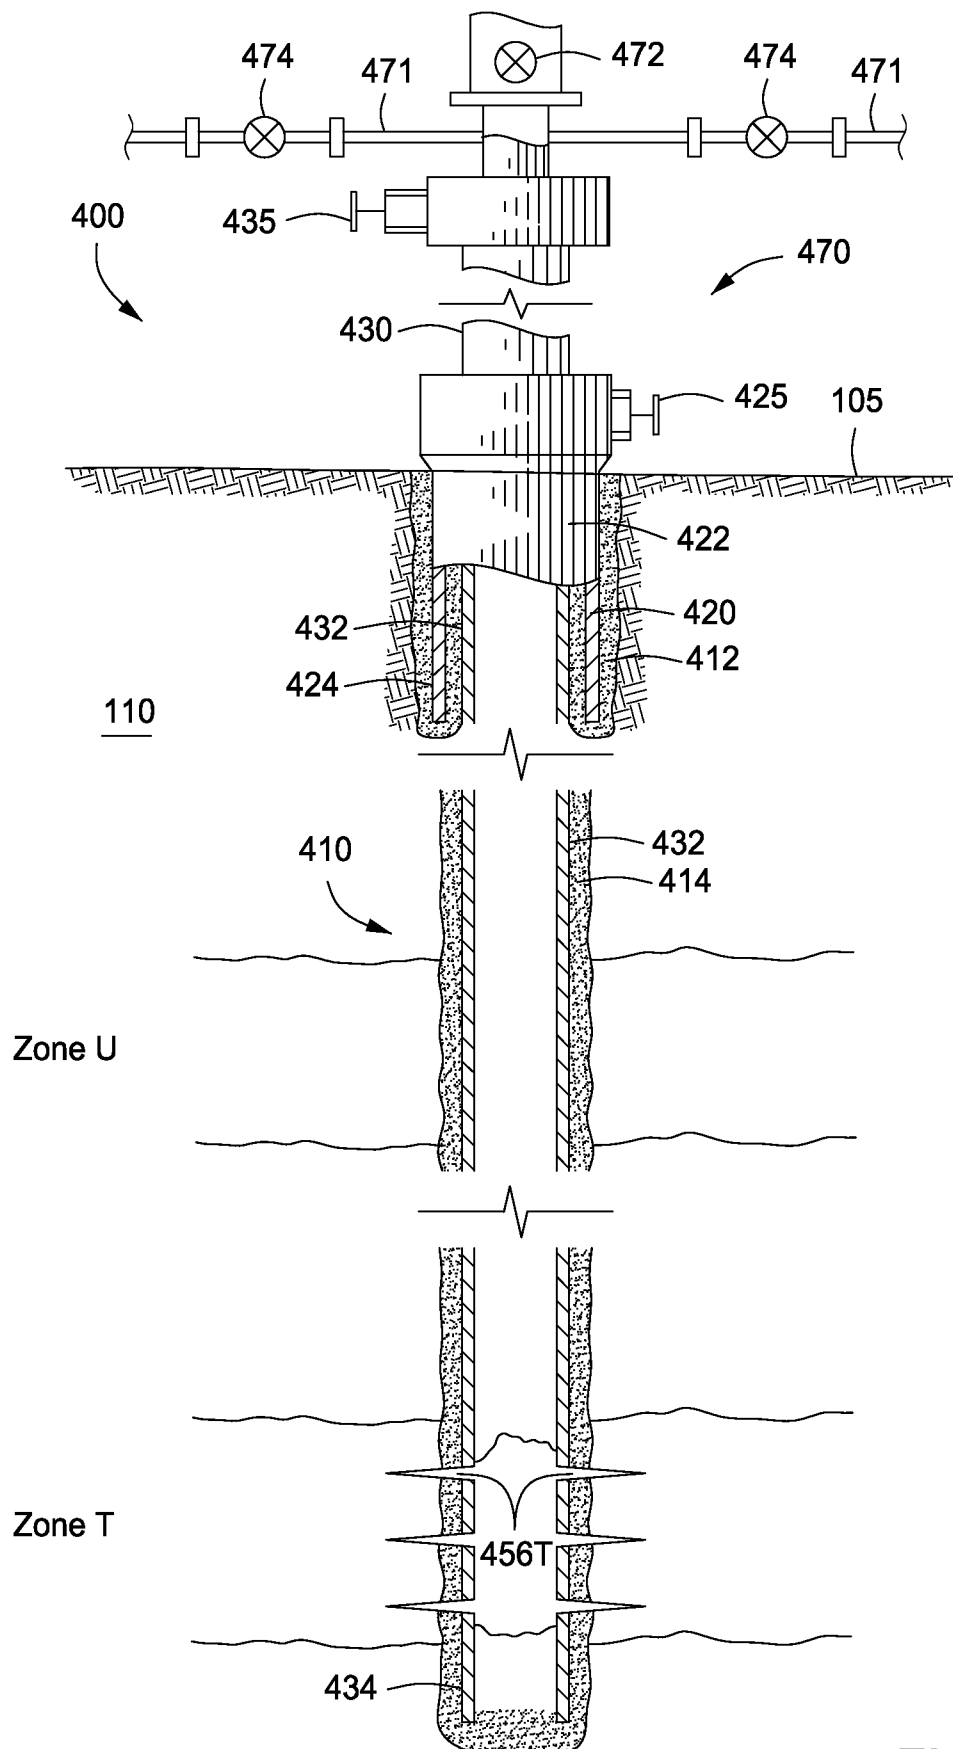


FIG. 4D

7/28

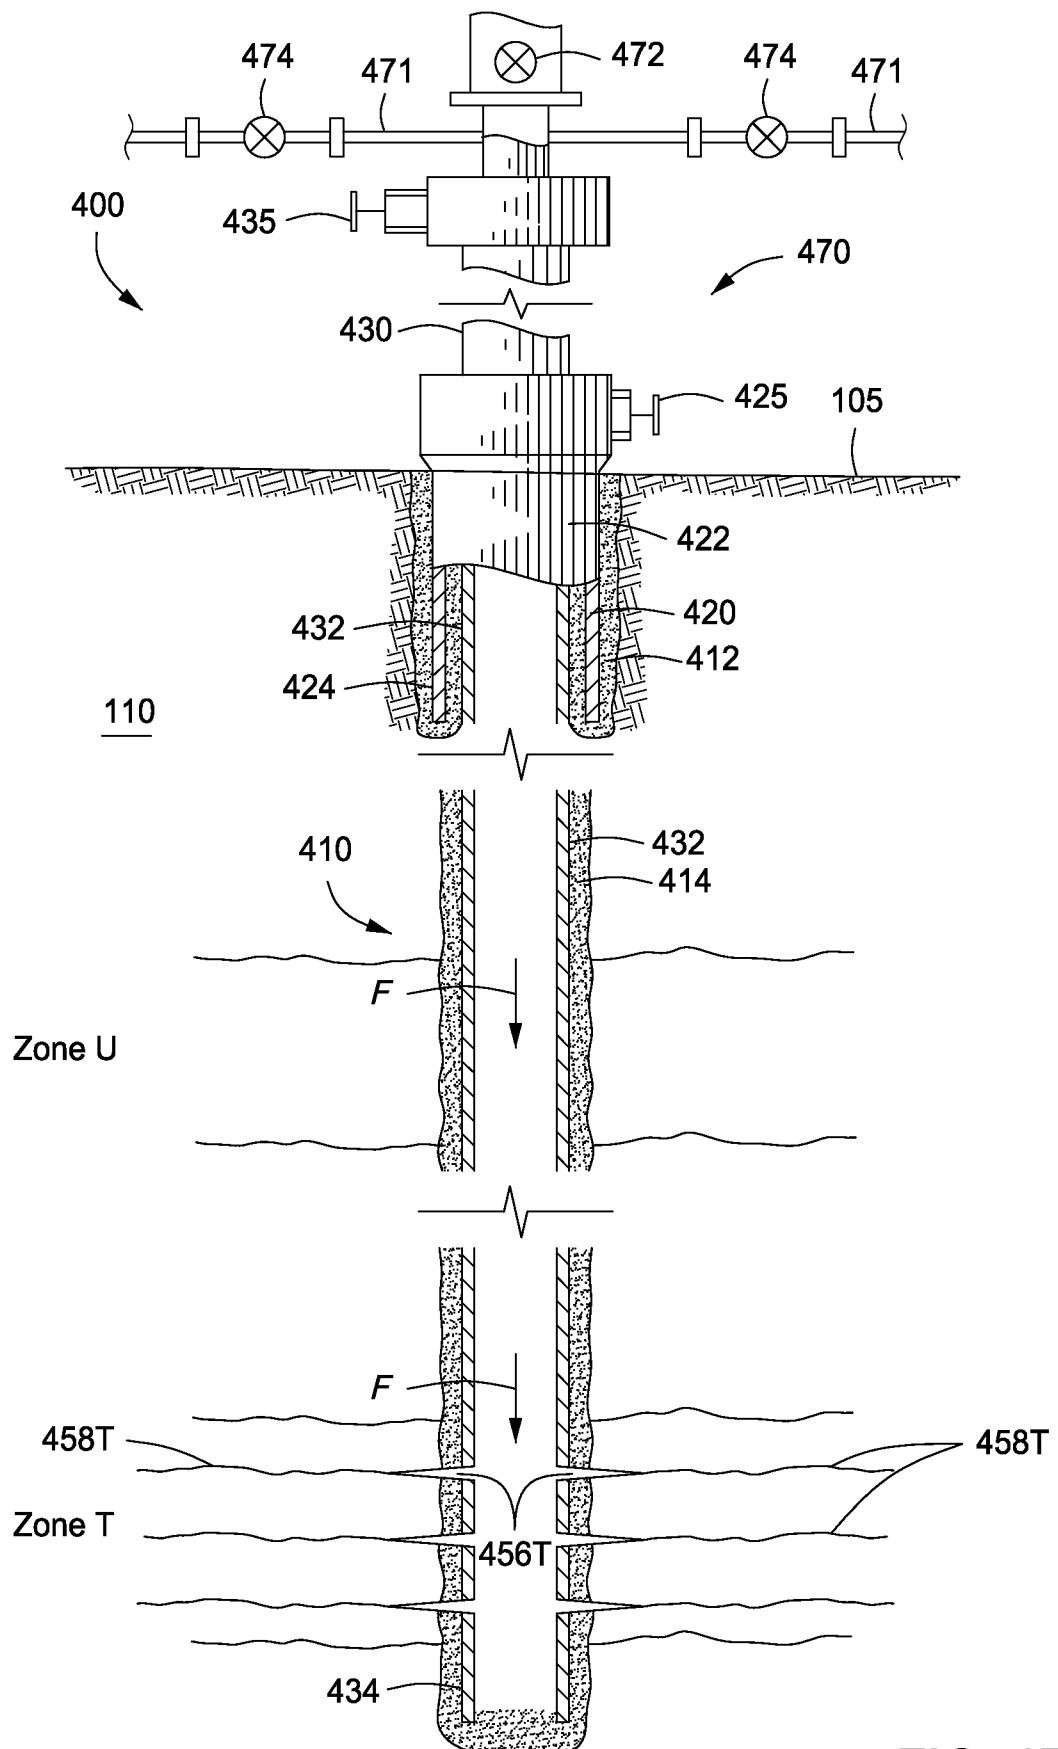


FIG. 4E

8/28

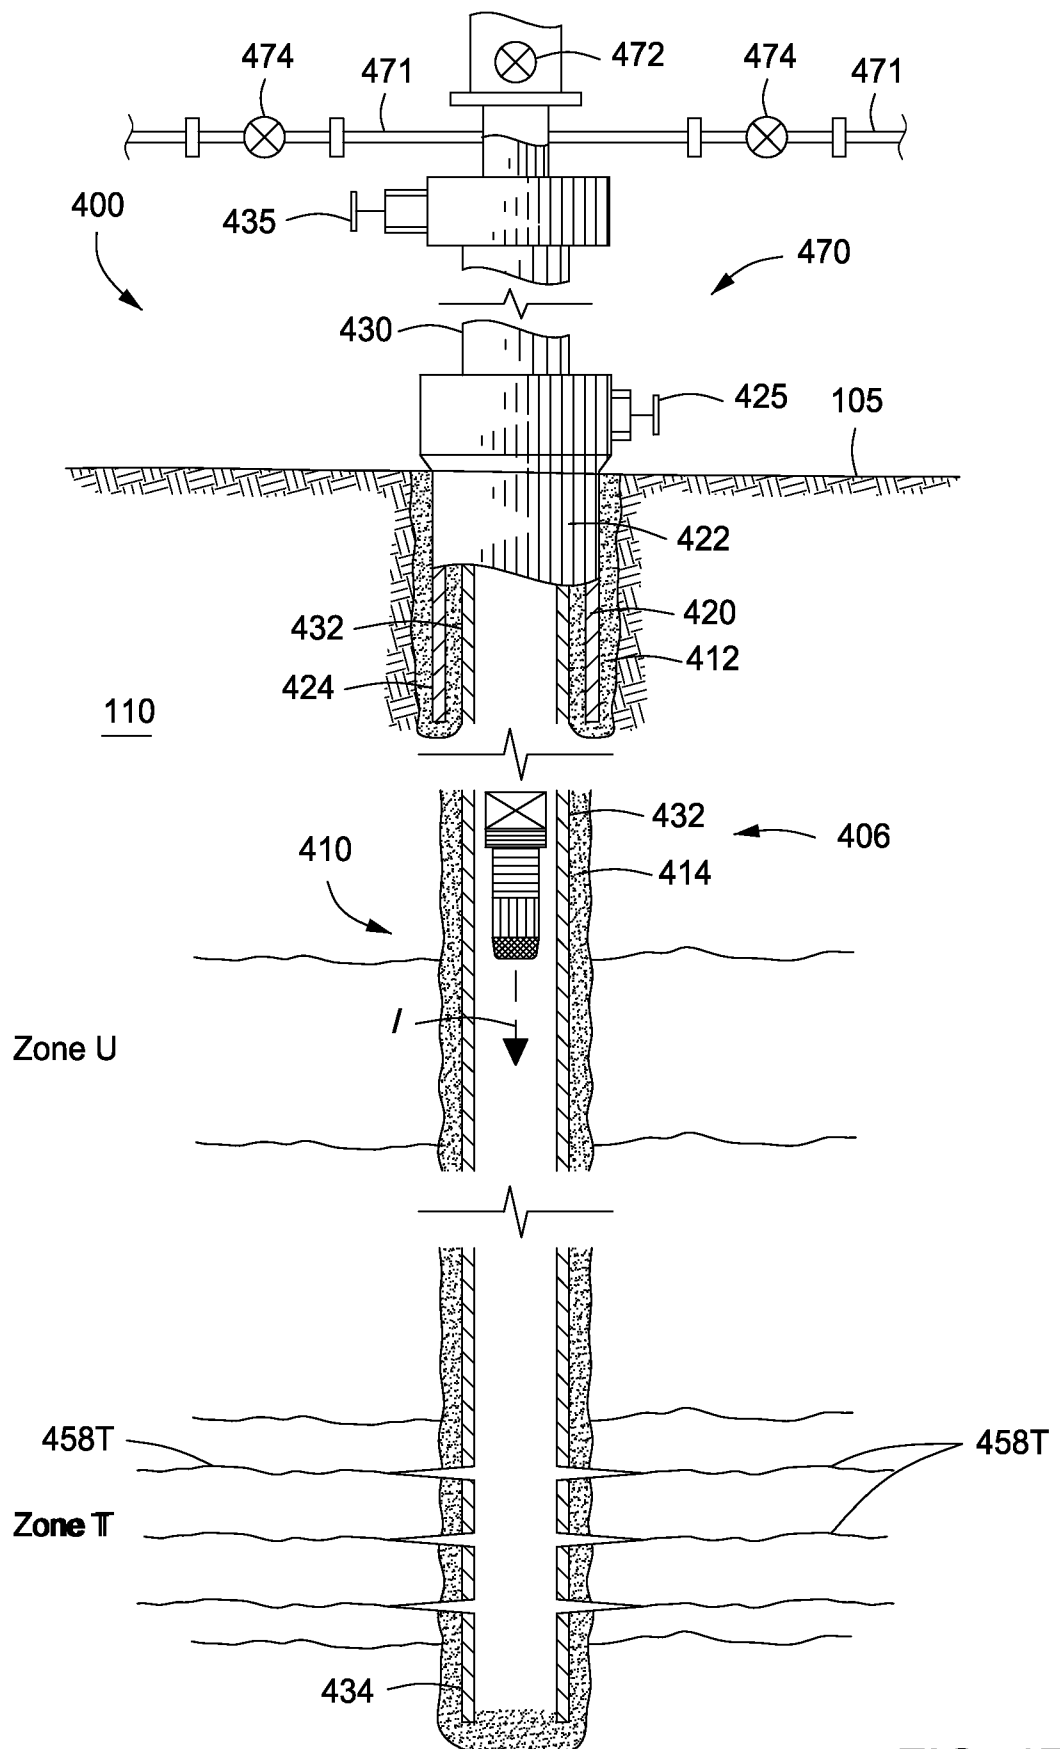


FIG. 4F

9/28

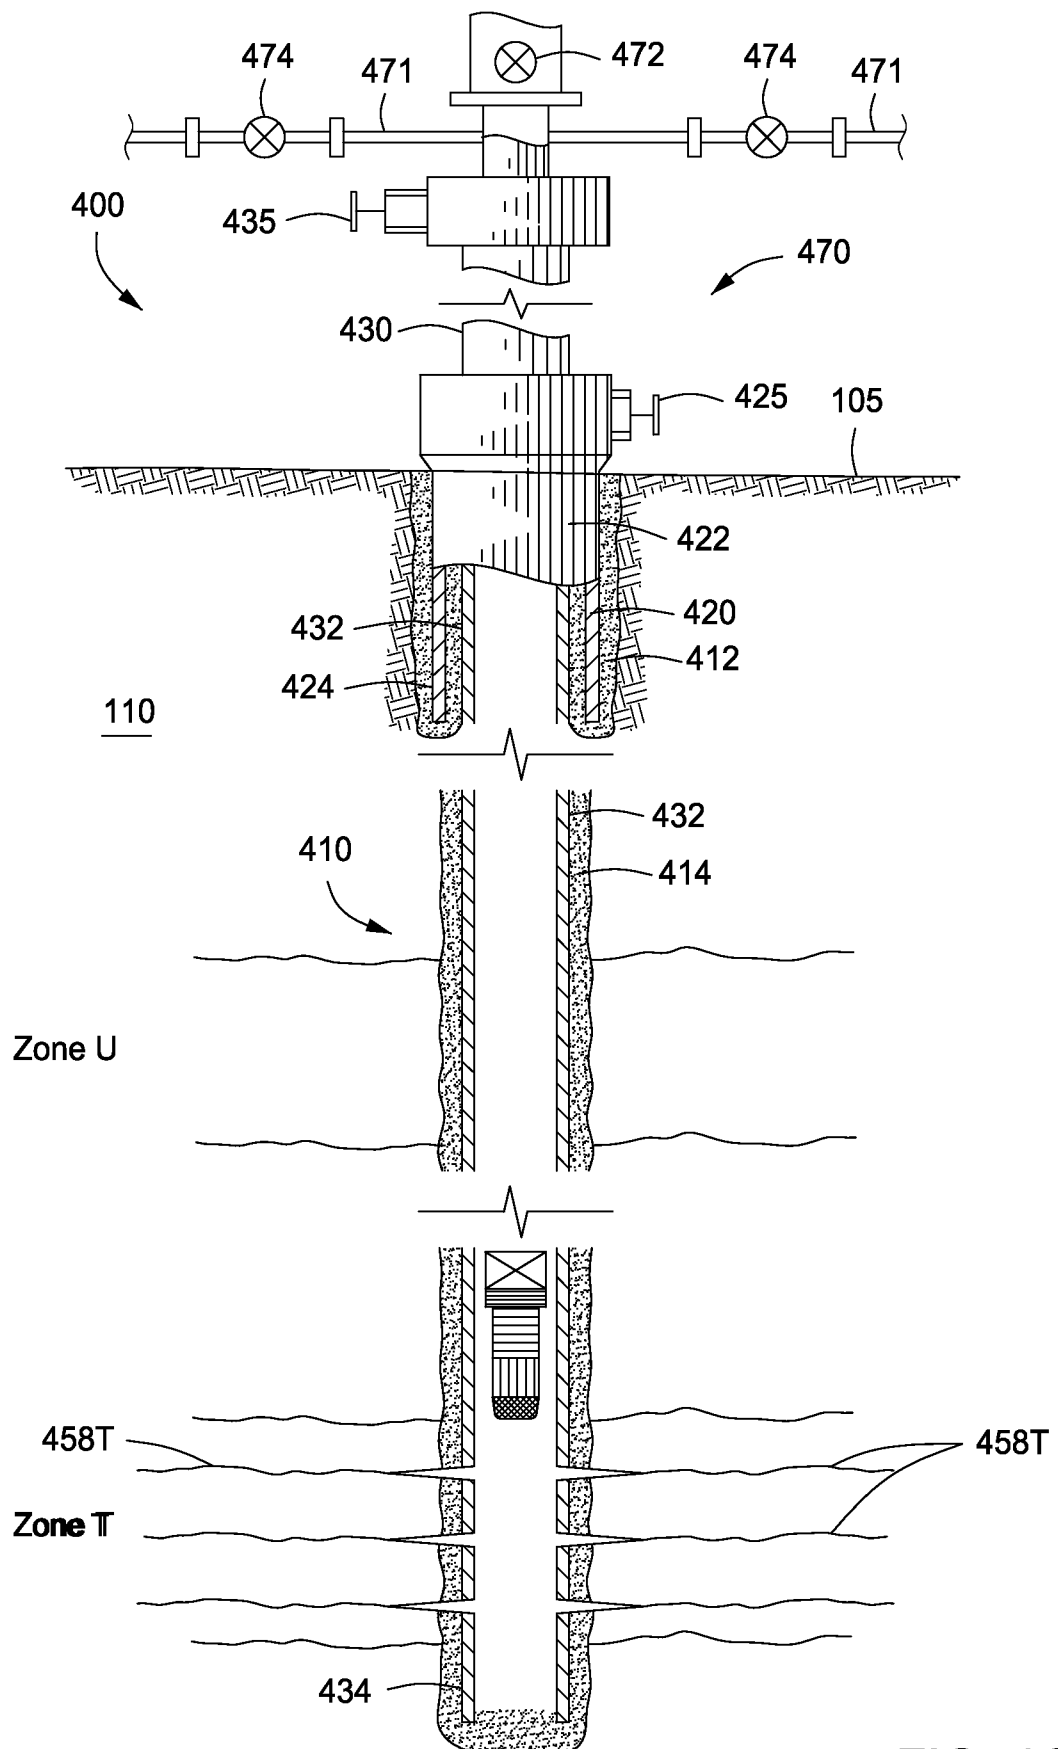


FIG. 4G

10/28

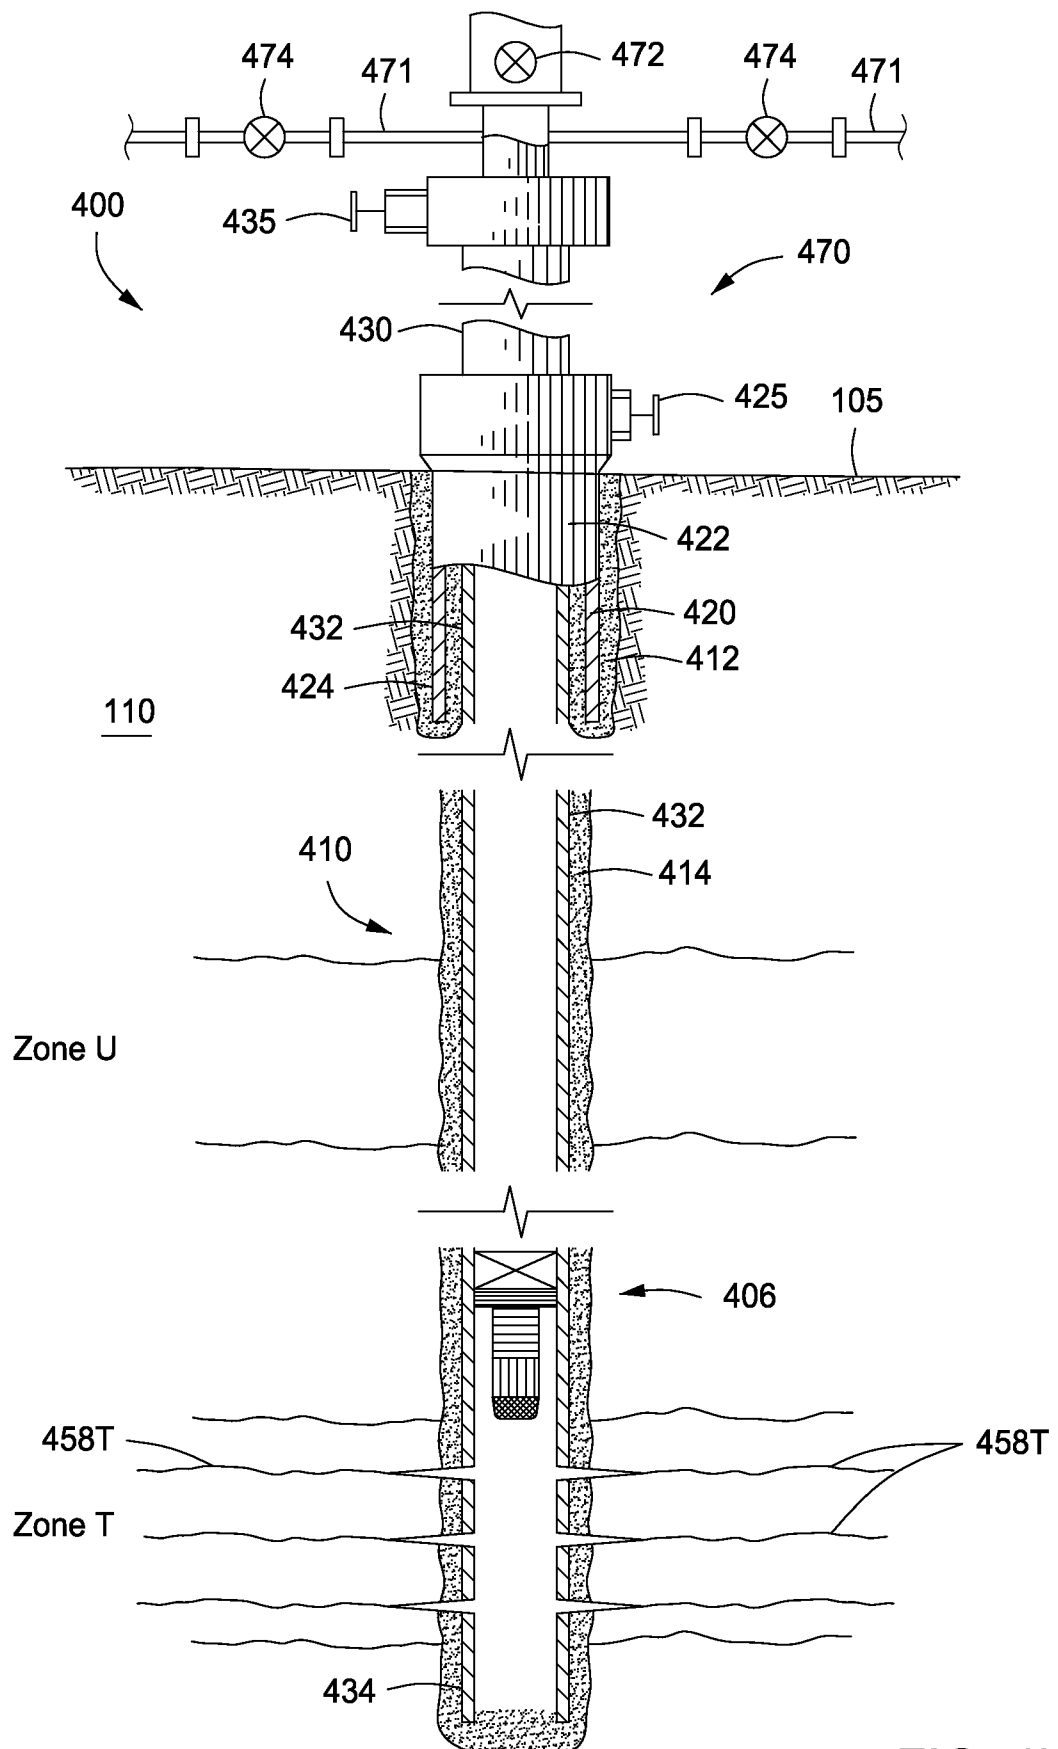


FIG. 4H

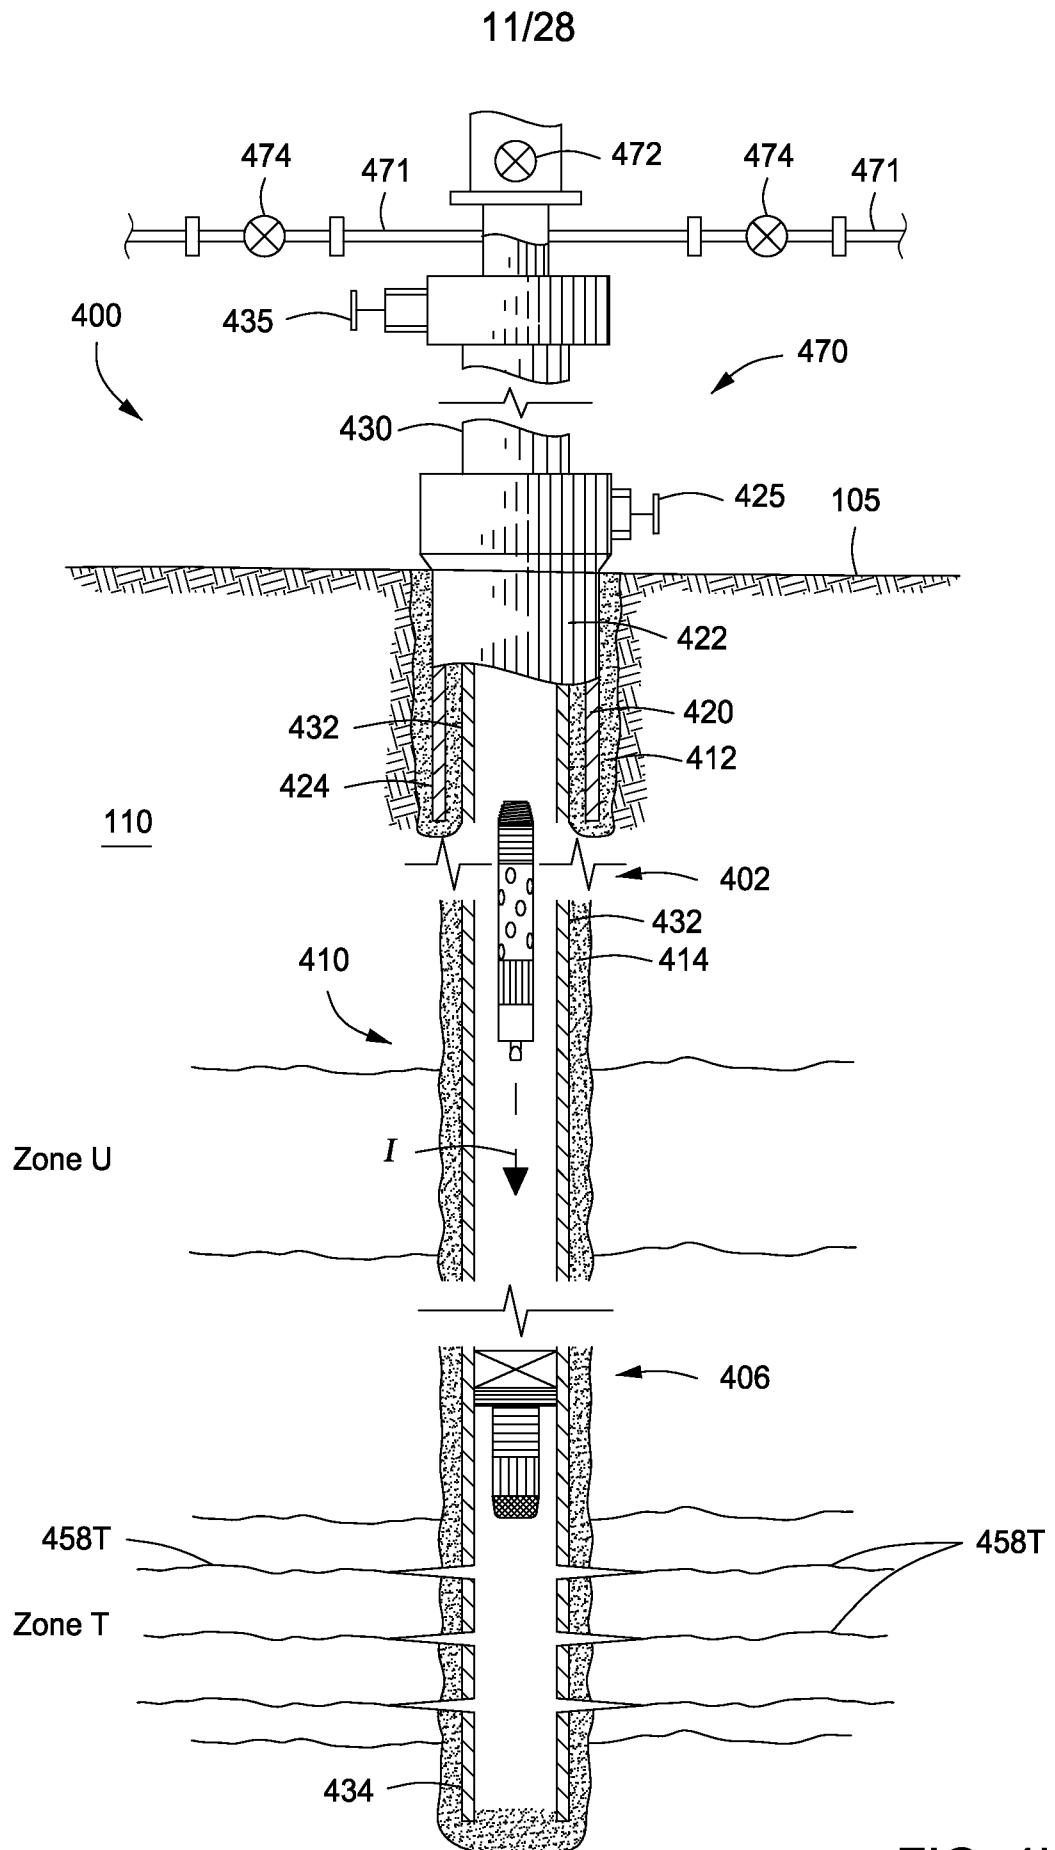


FIG. 4I

12/28

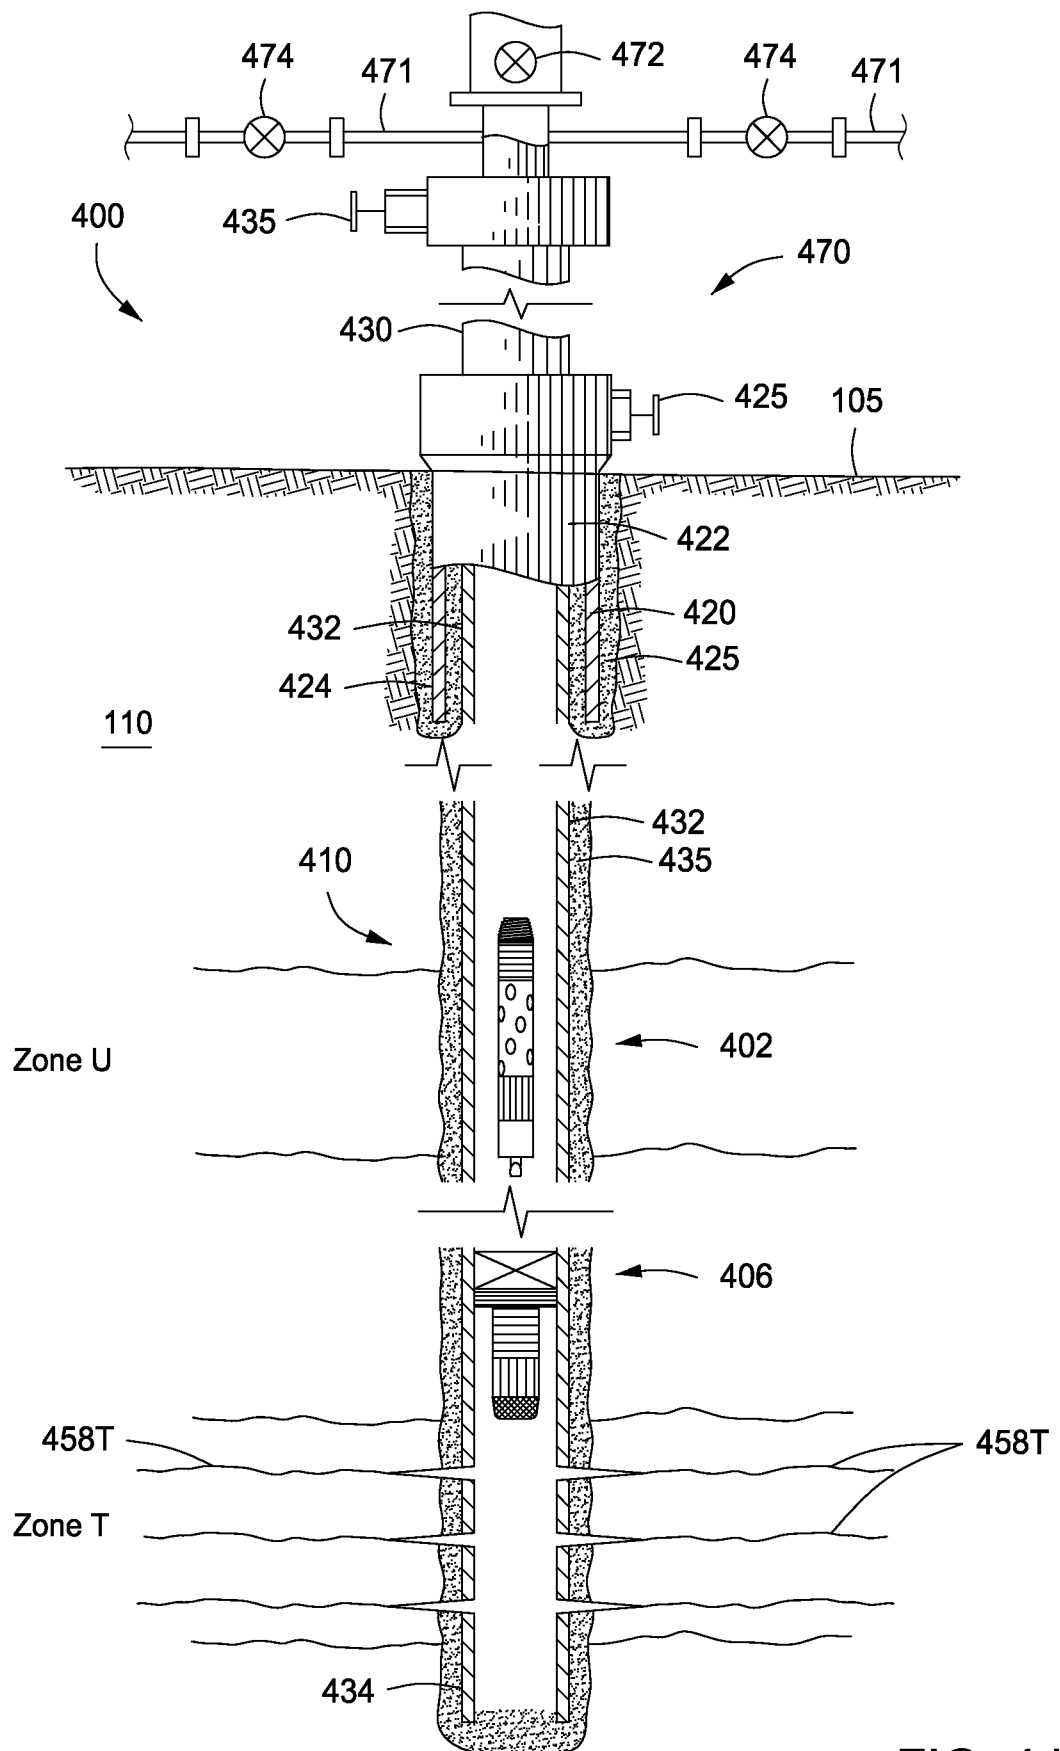


FIG. 4J

13/28

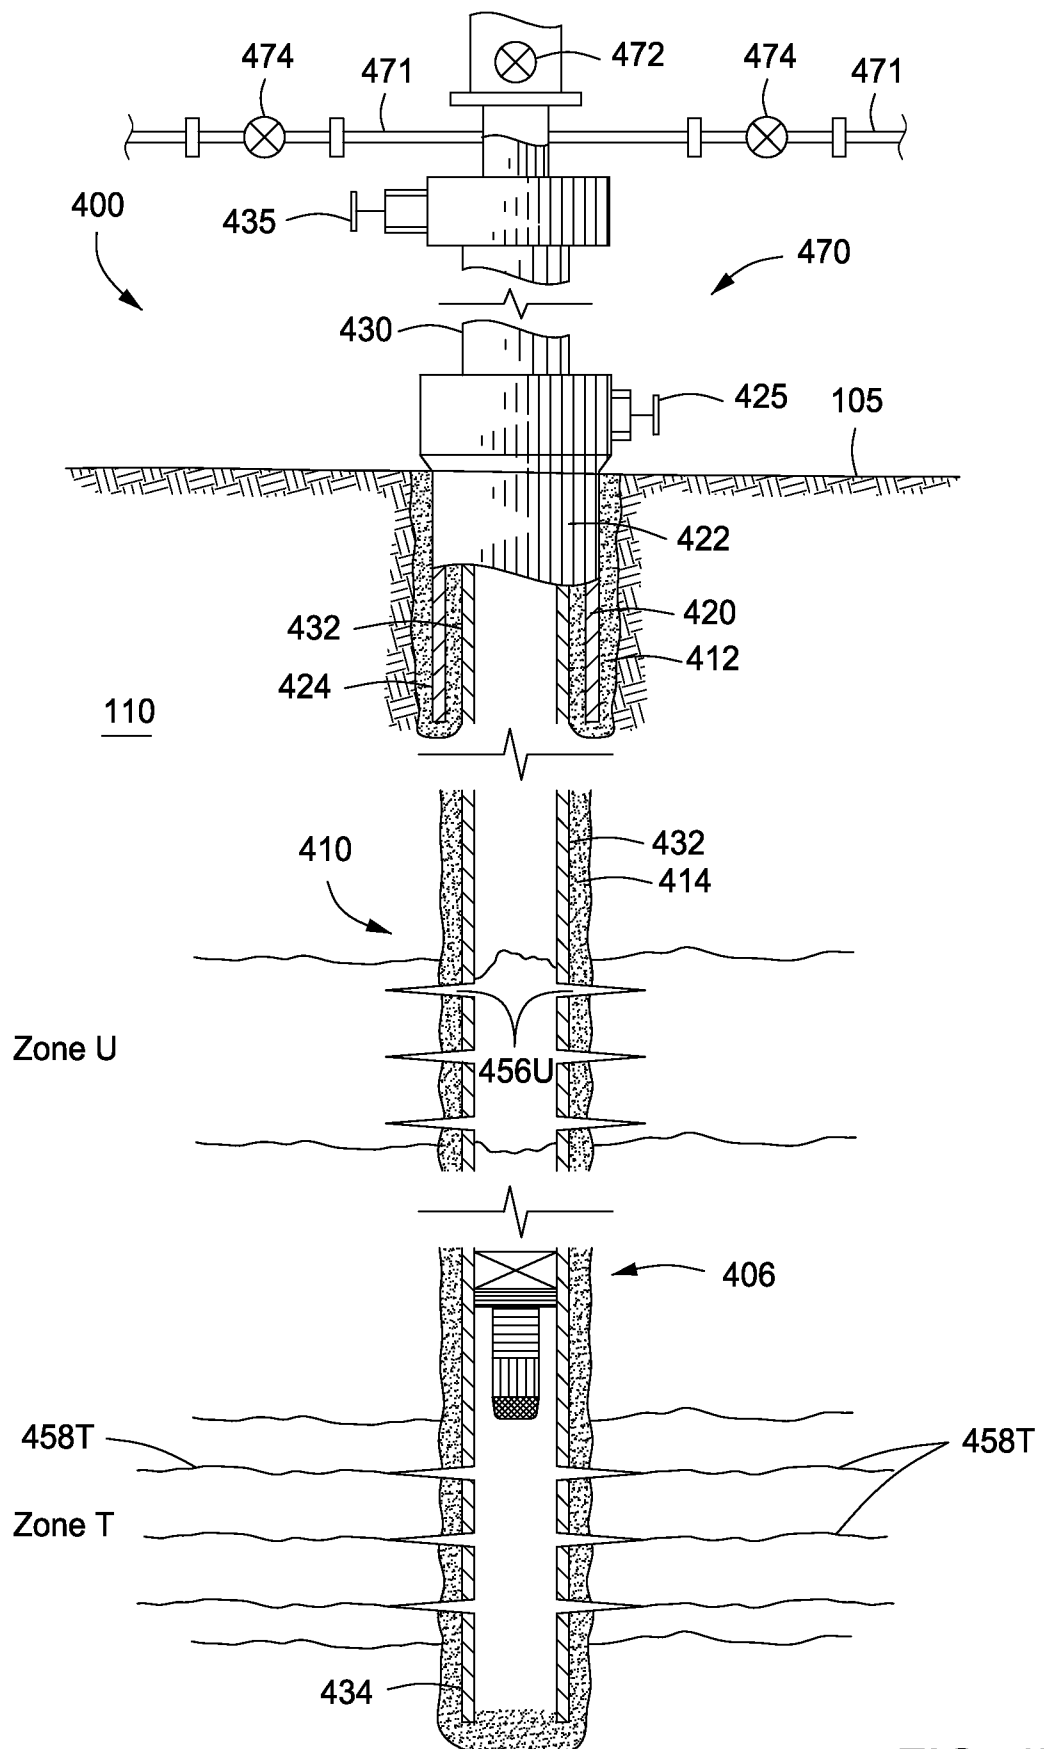


FIG. 4K

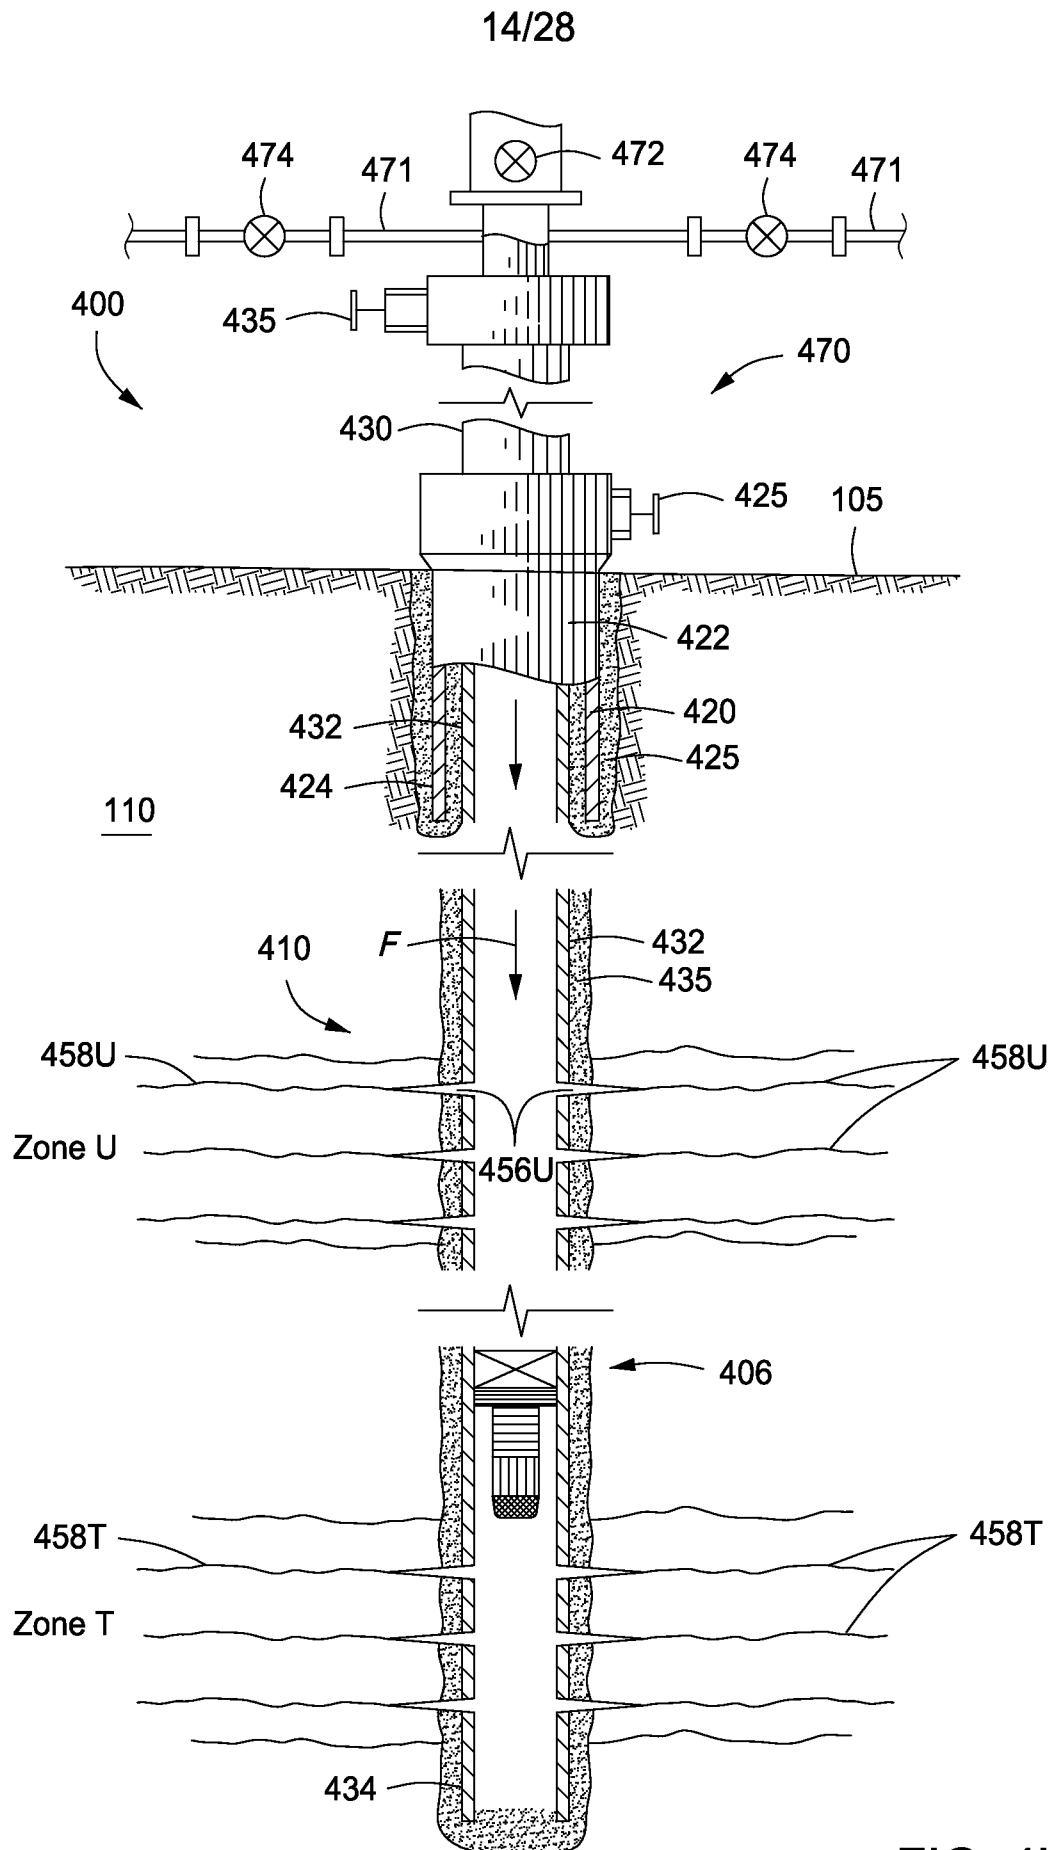


FIG. 4L

15/28

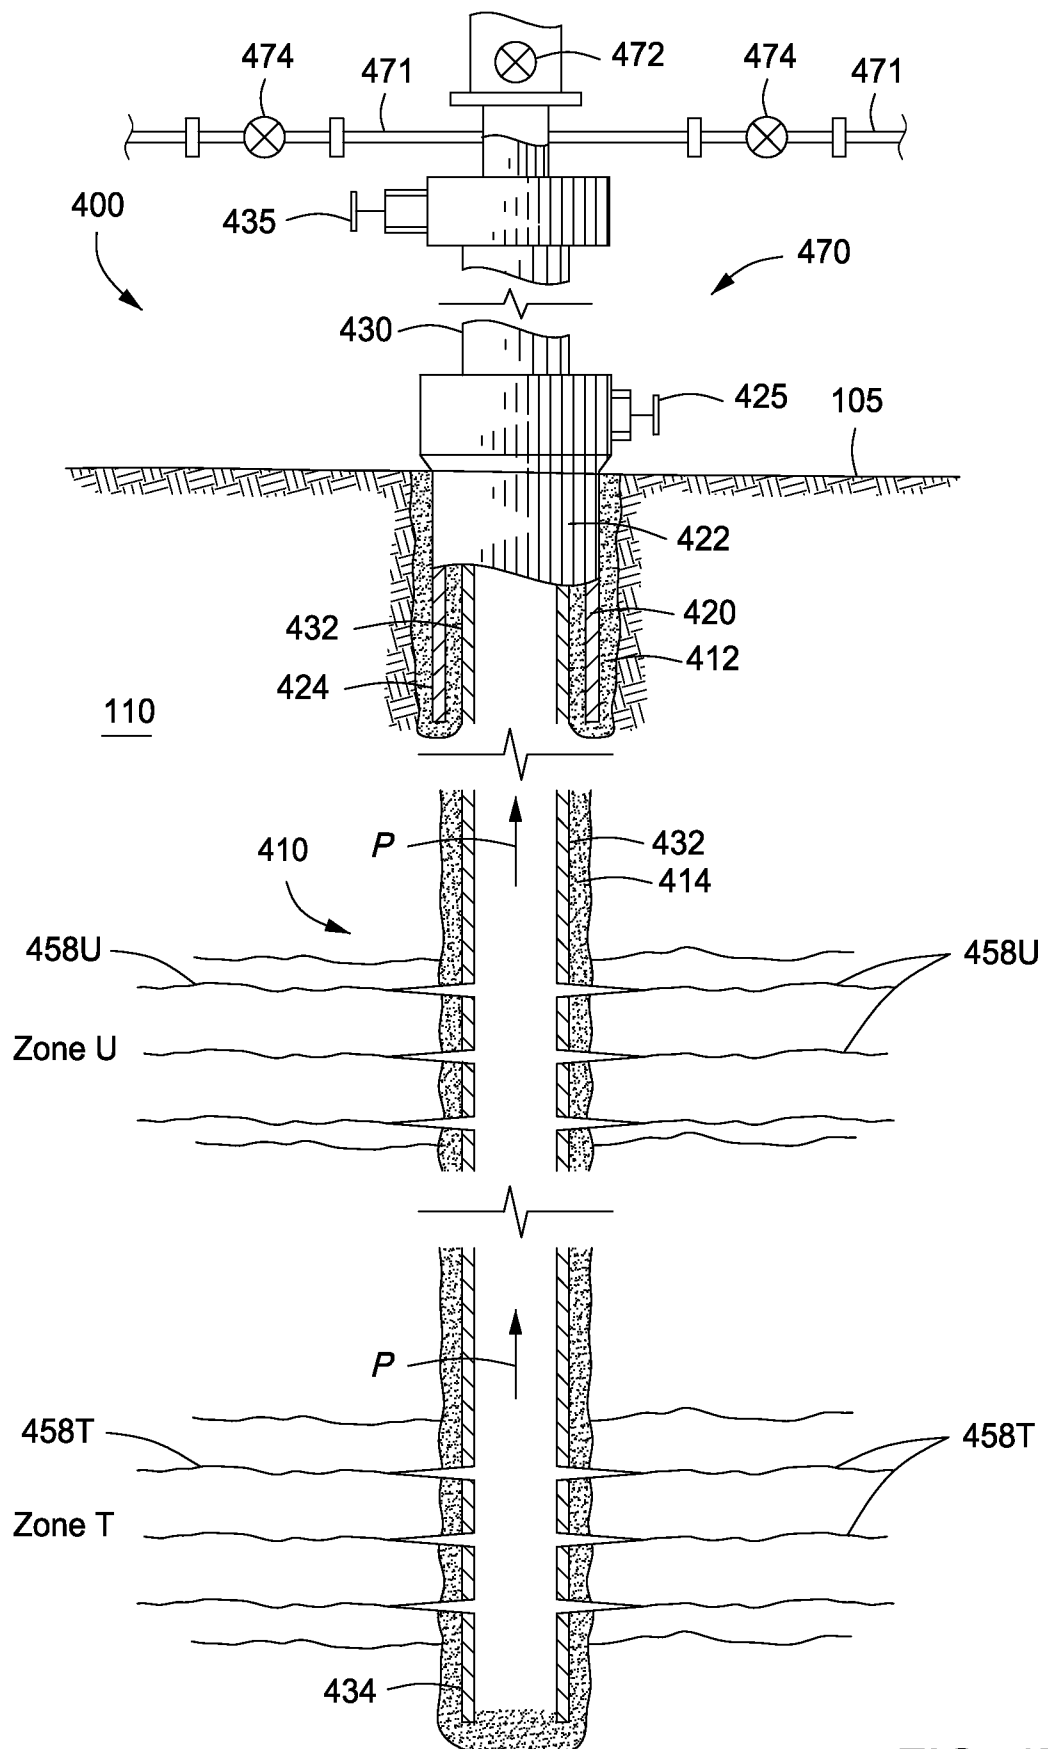


FIG. 4M

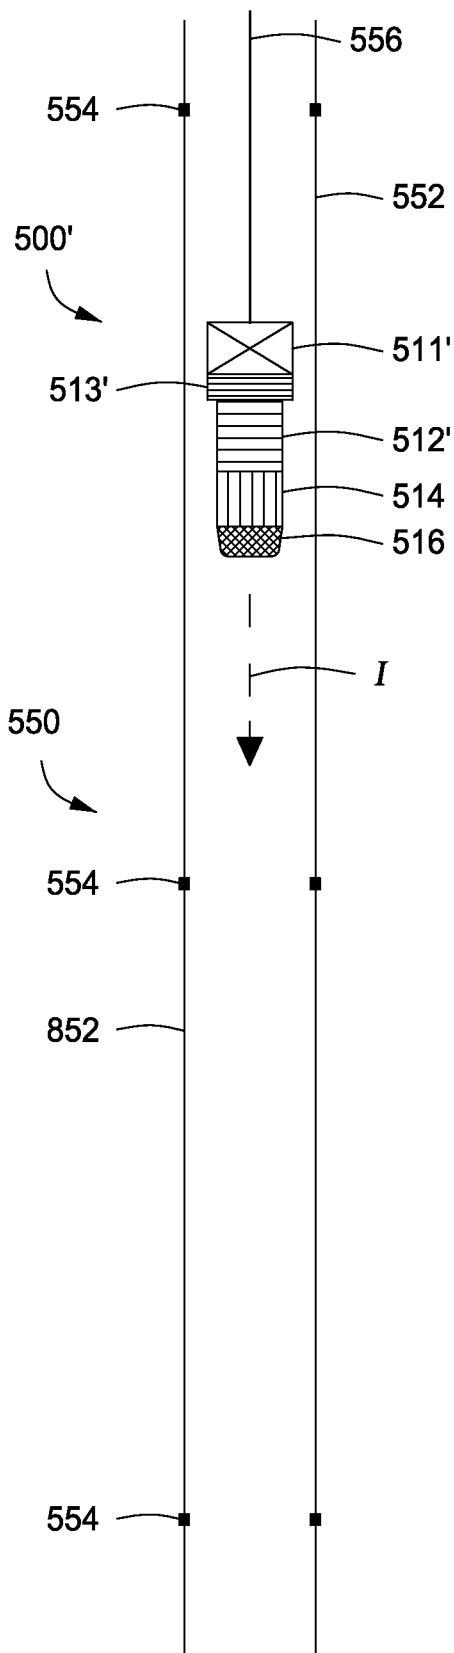


FIG. 5A

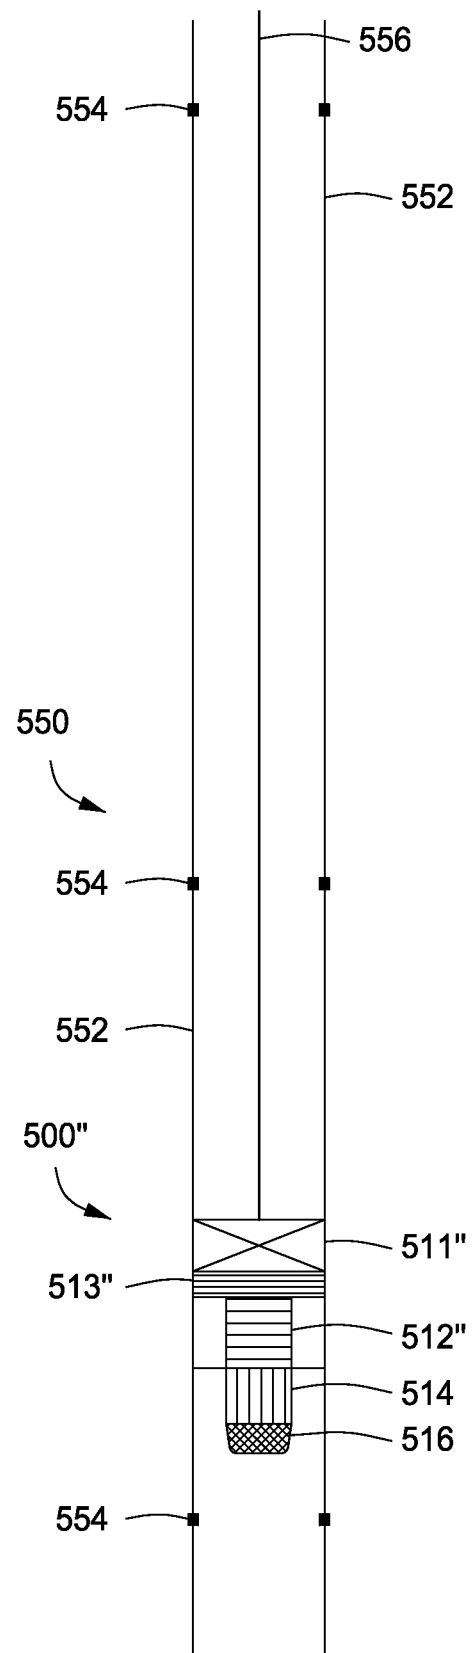


FIG. 5B

┌

17/28

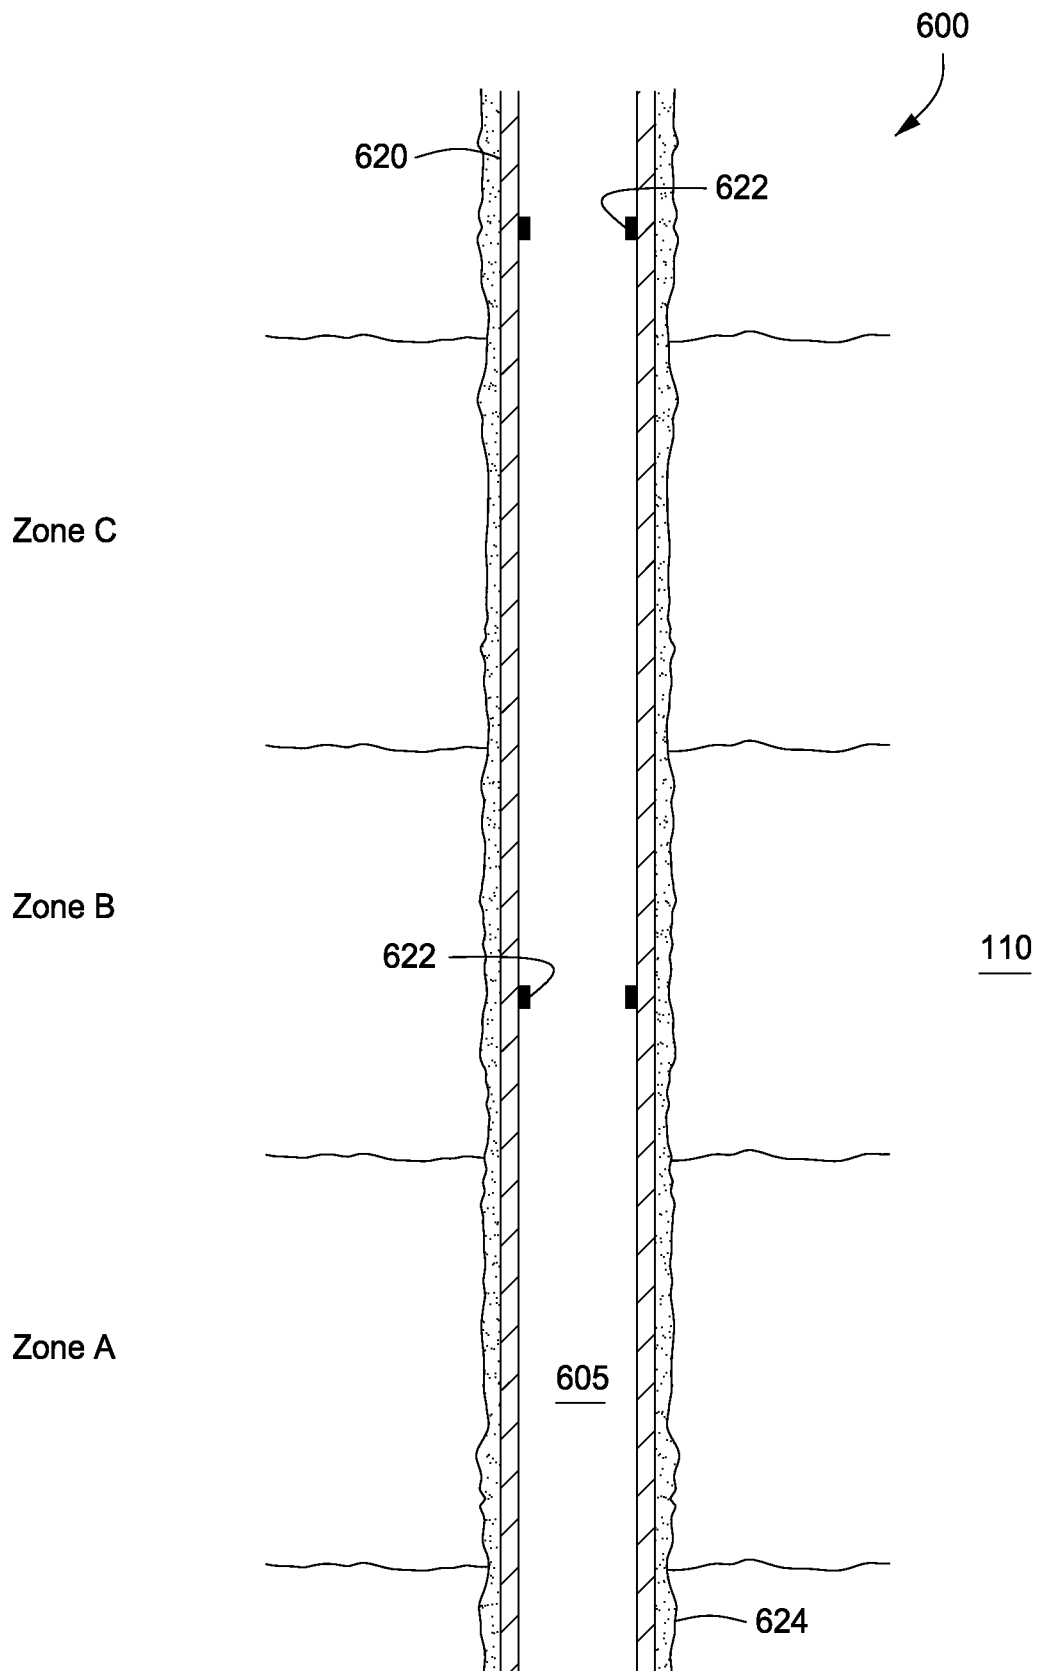


FIG. 6A

└

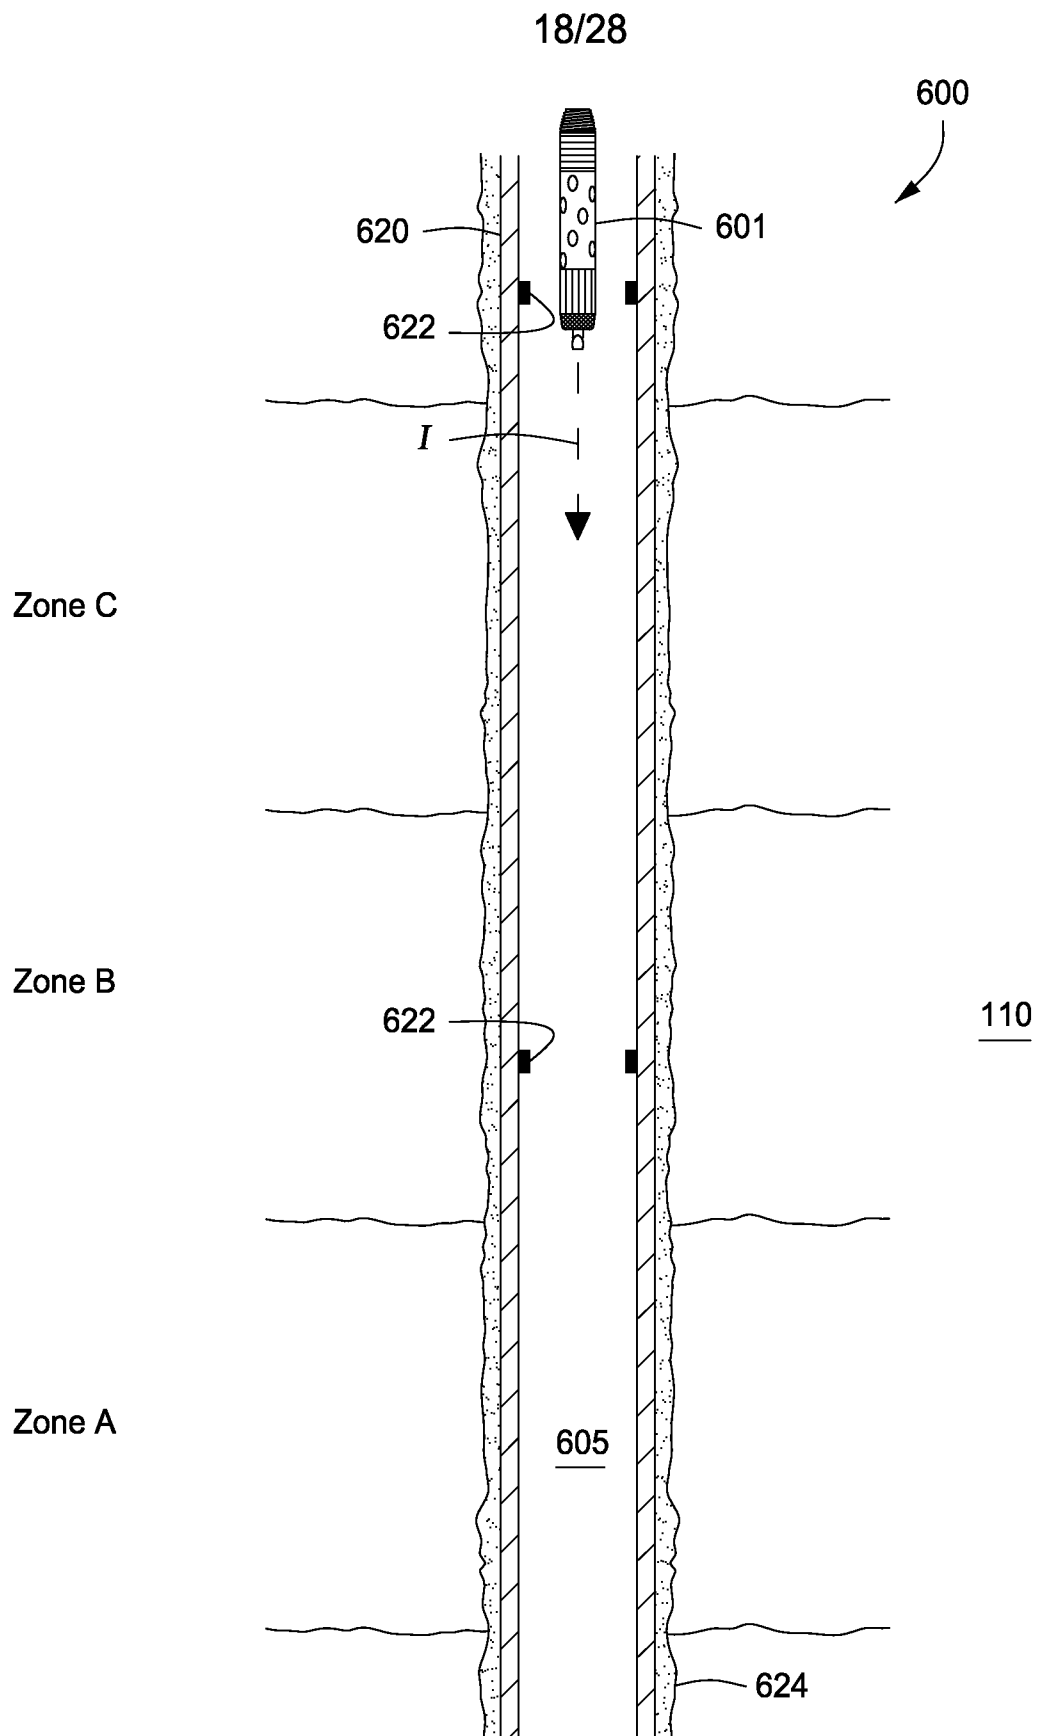


FIG. 6B

19/28

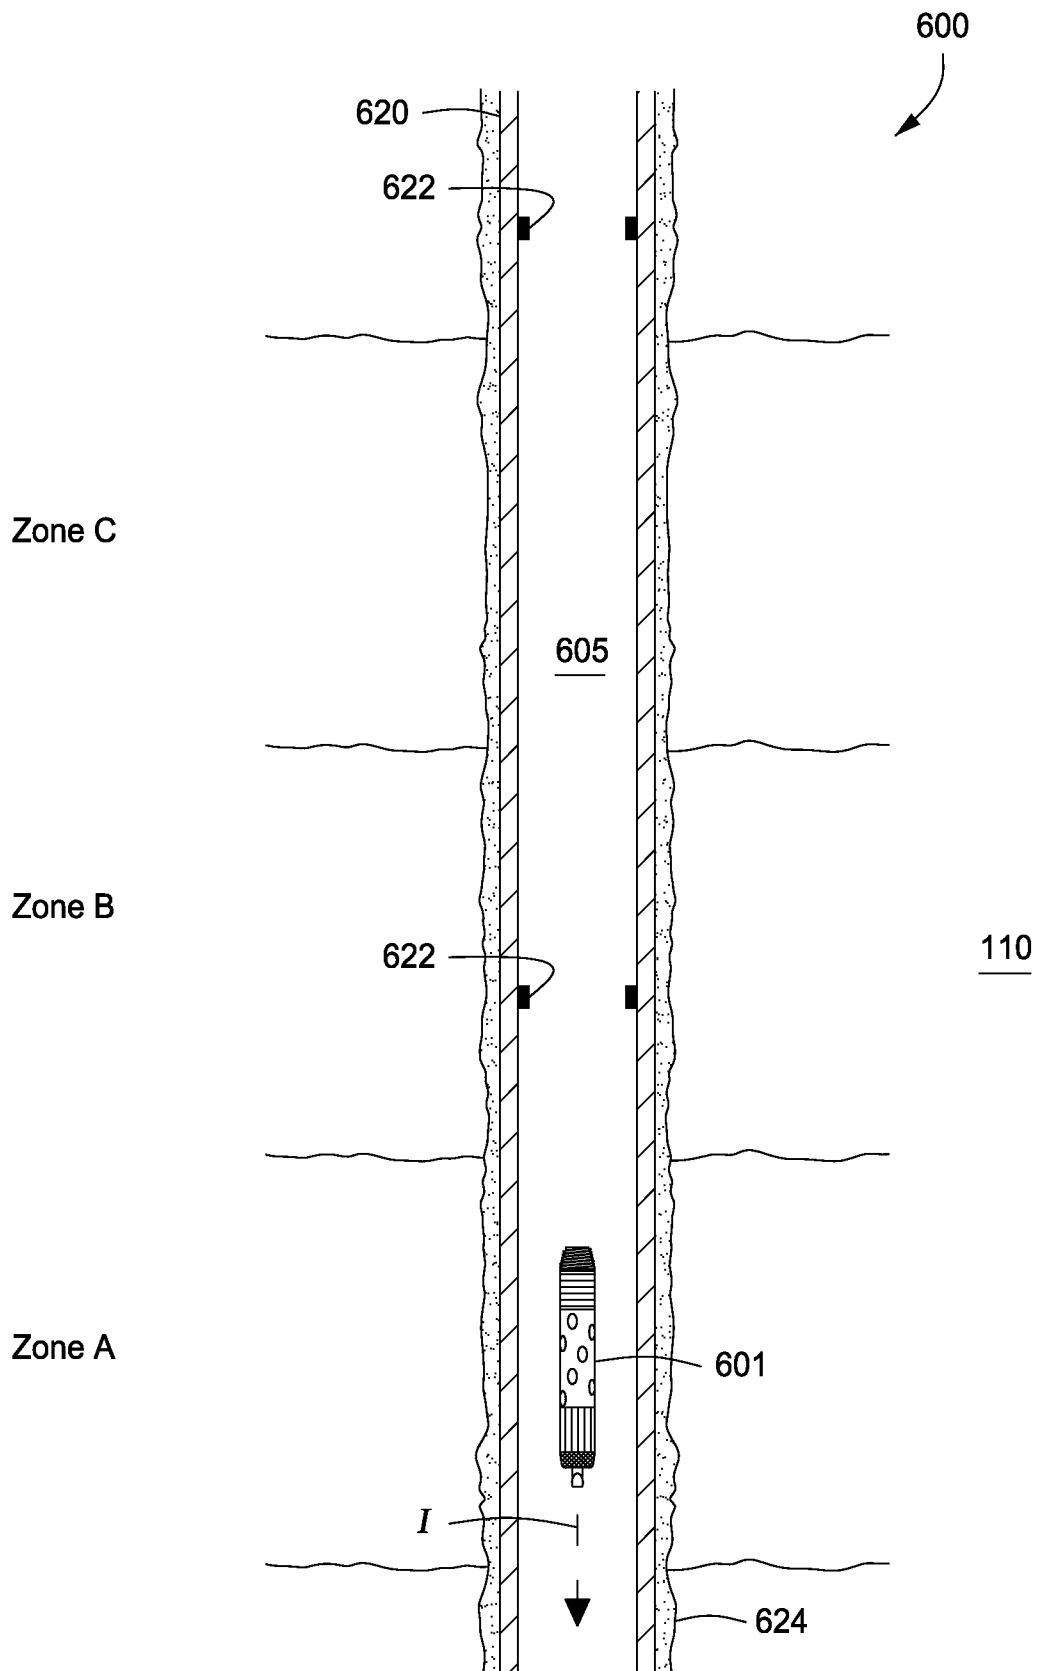


FIG. 6C

┌

20/28

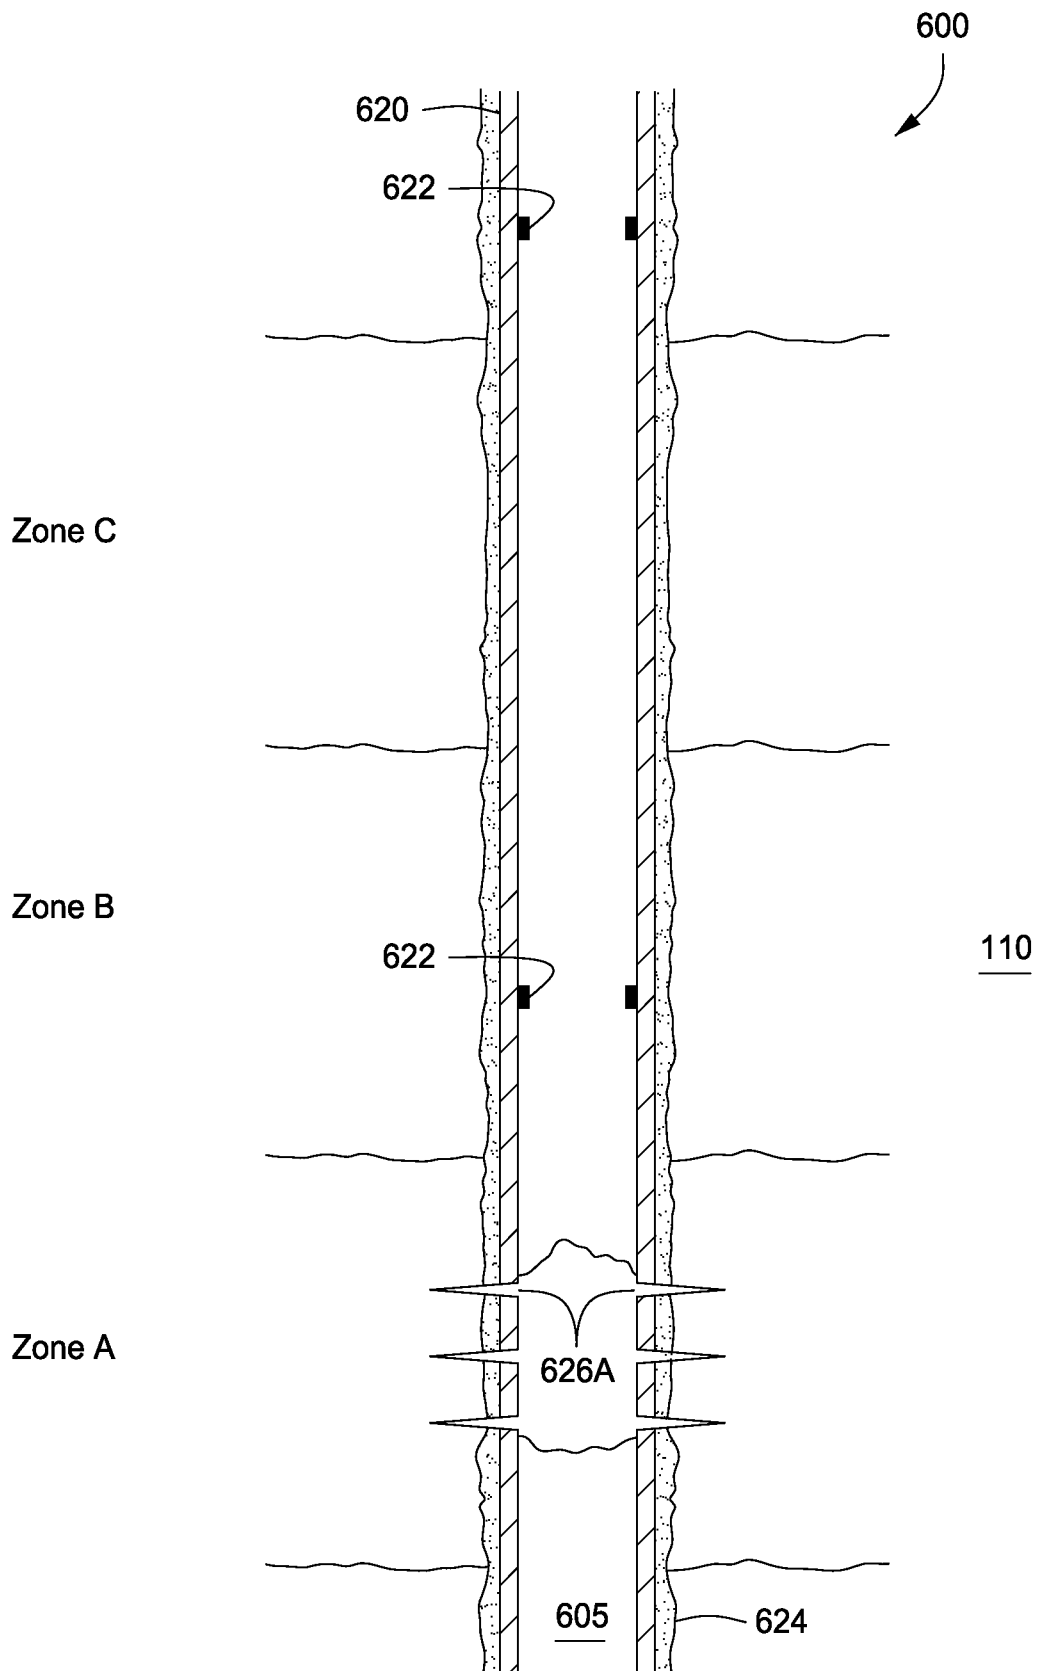


FIG. 6D

└

21/28

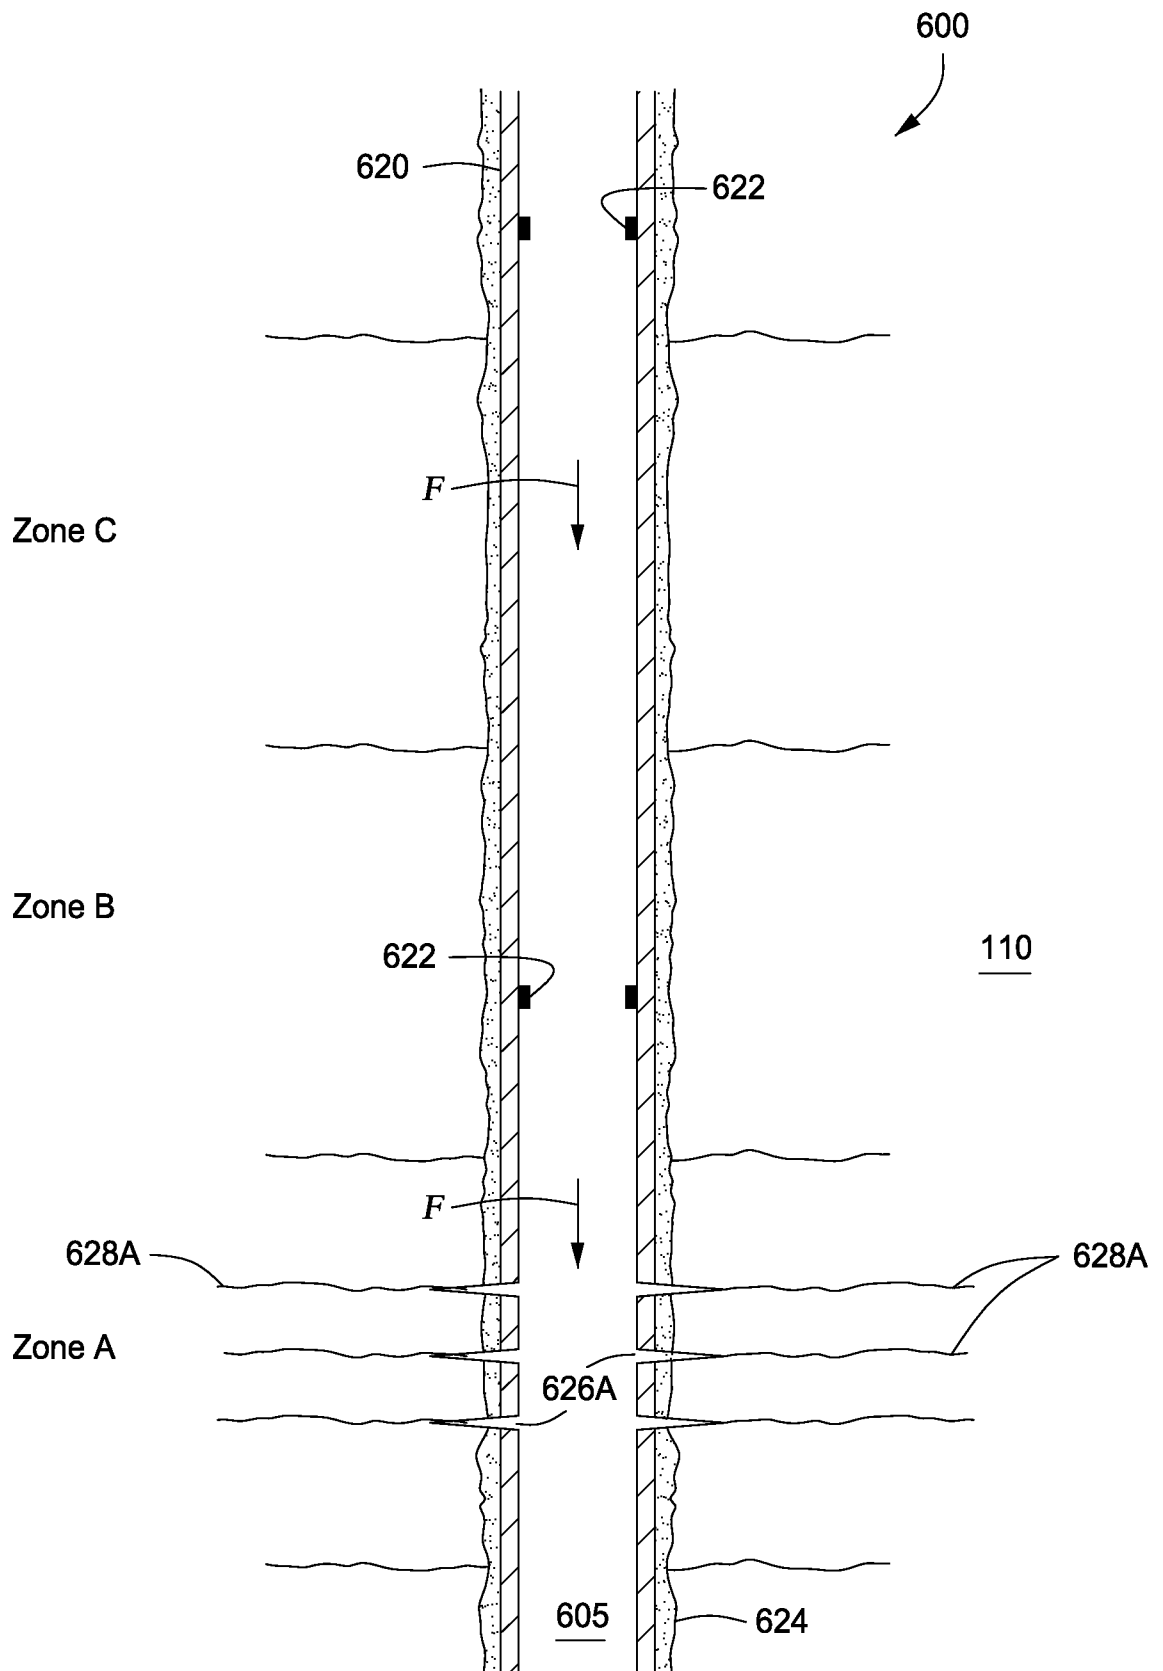


FIG. 6E

22/28

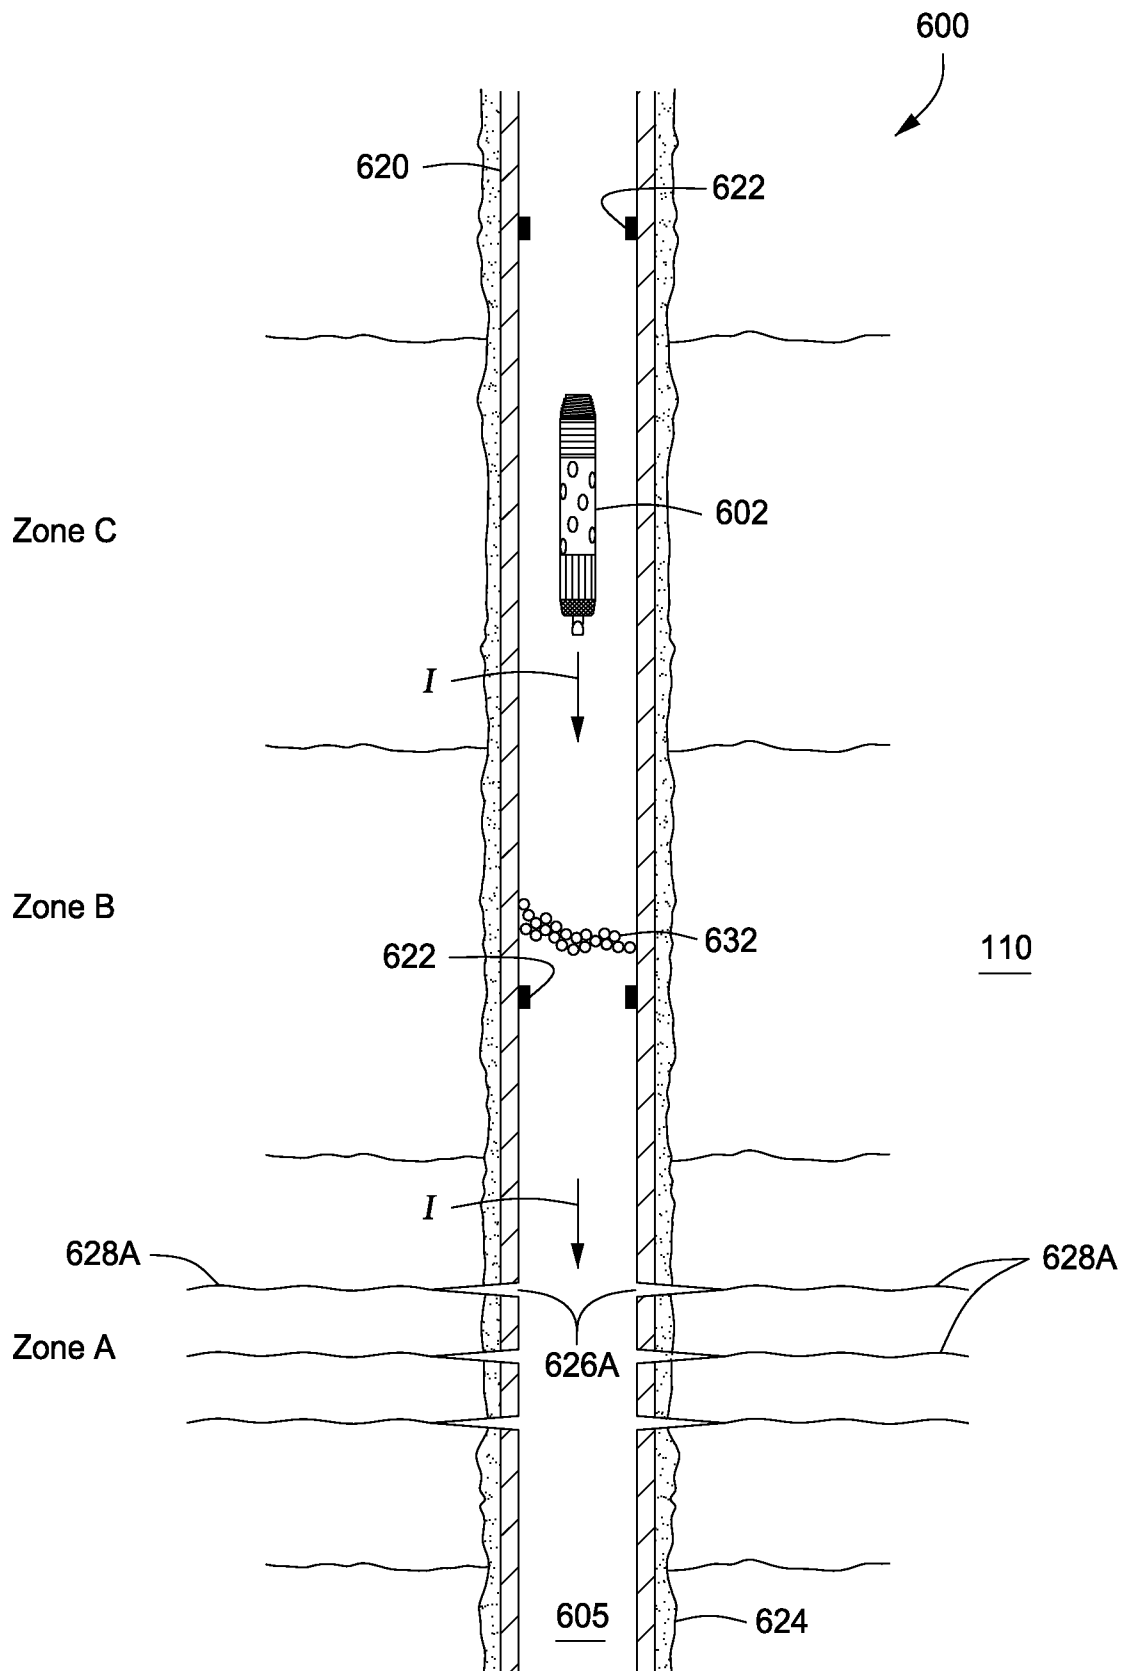


FIG. 6F

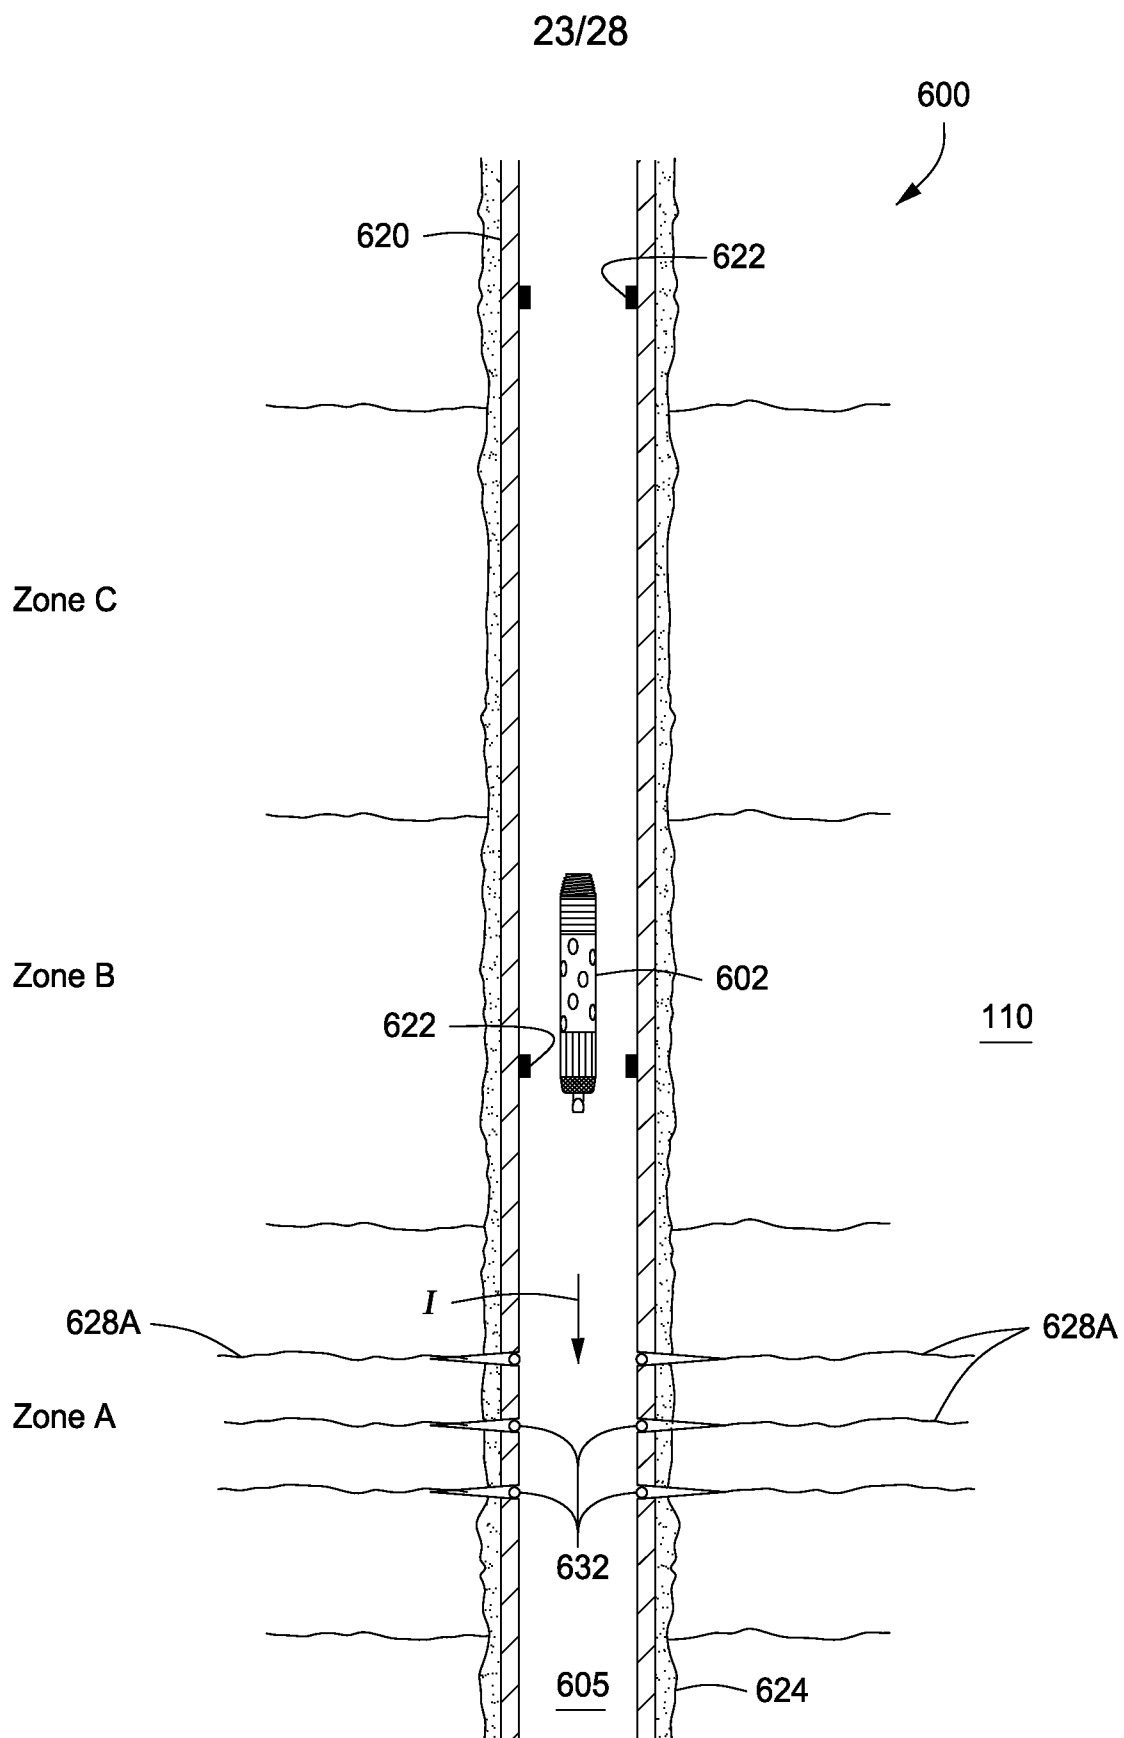


FIG. 6G

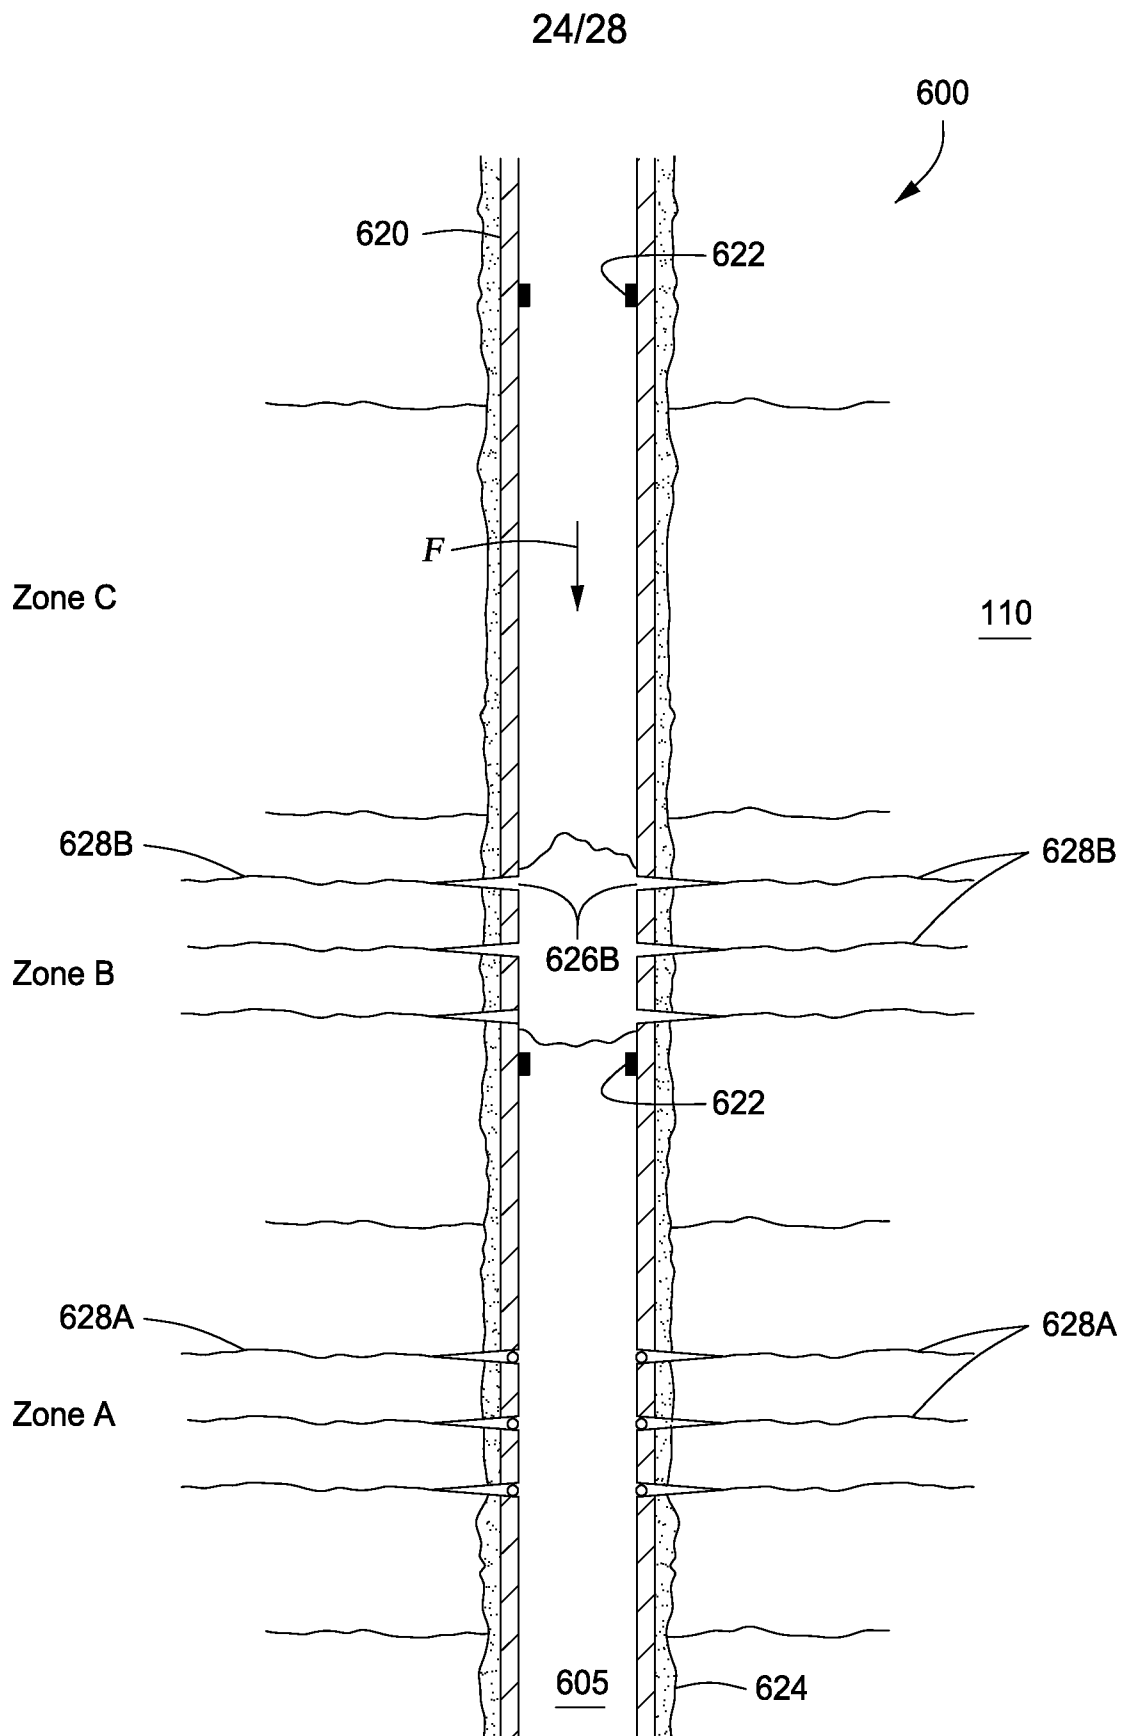


FIG. 6H


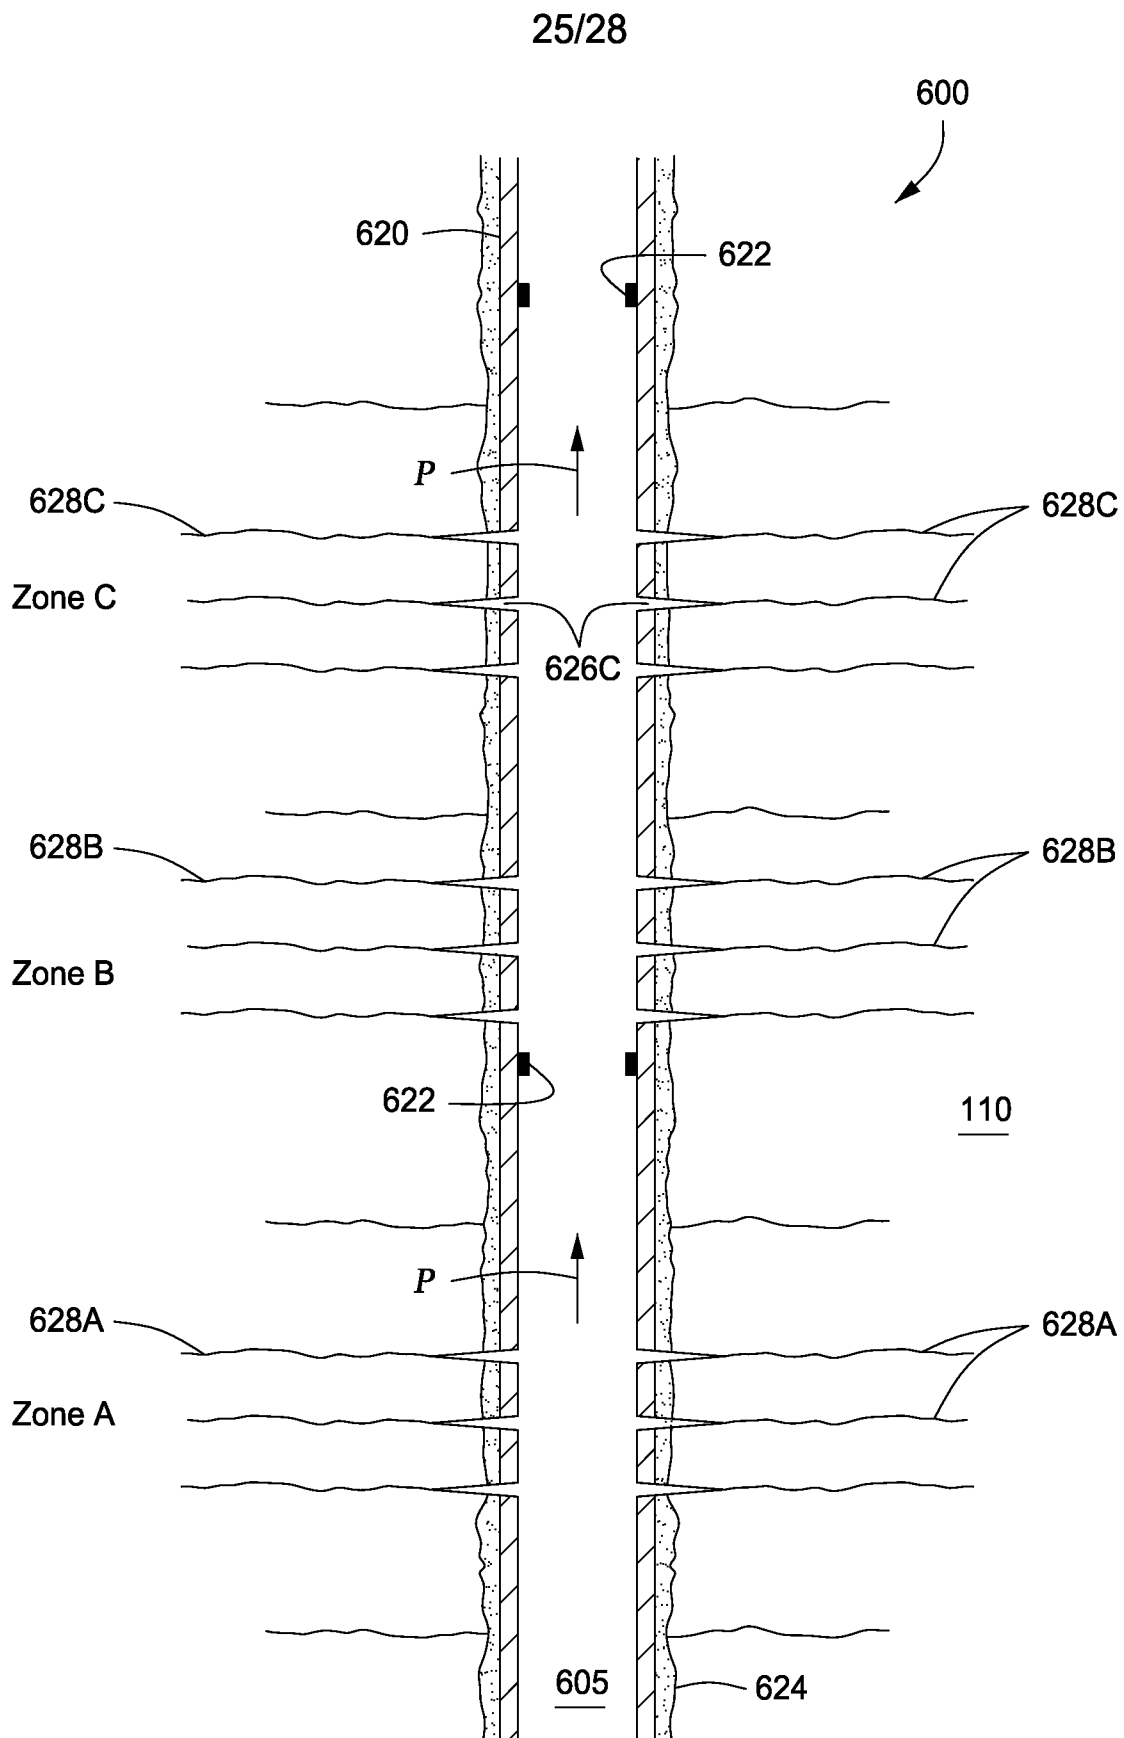


FIG. 6I

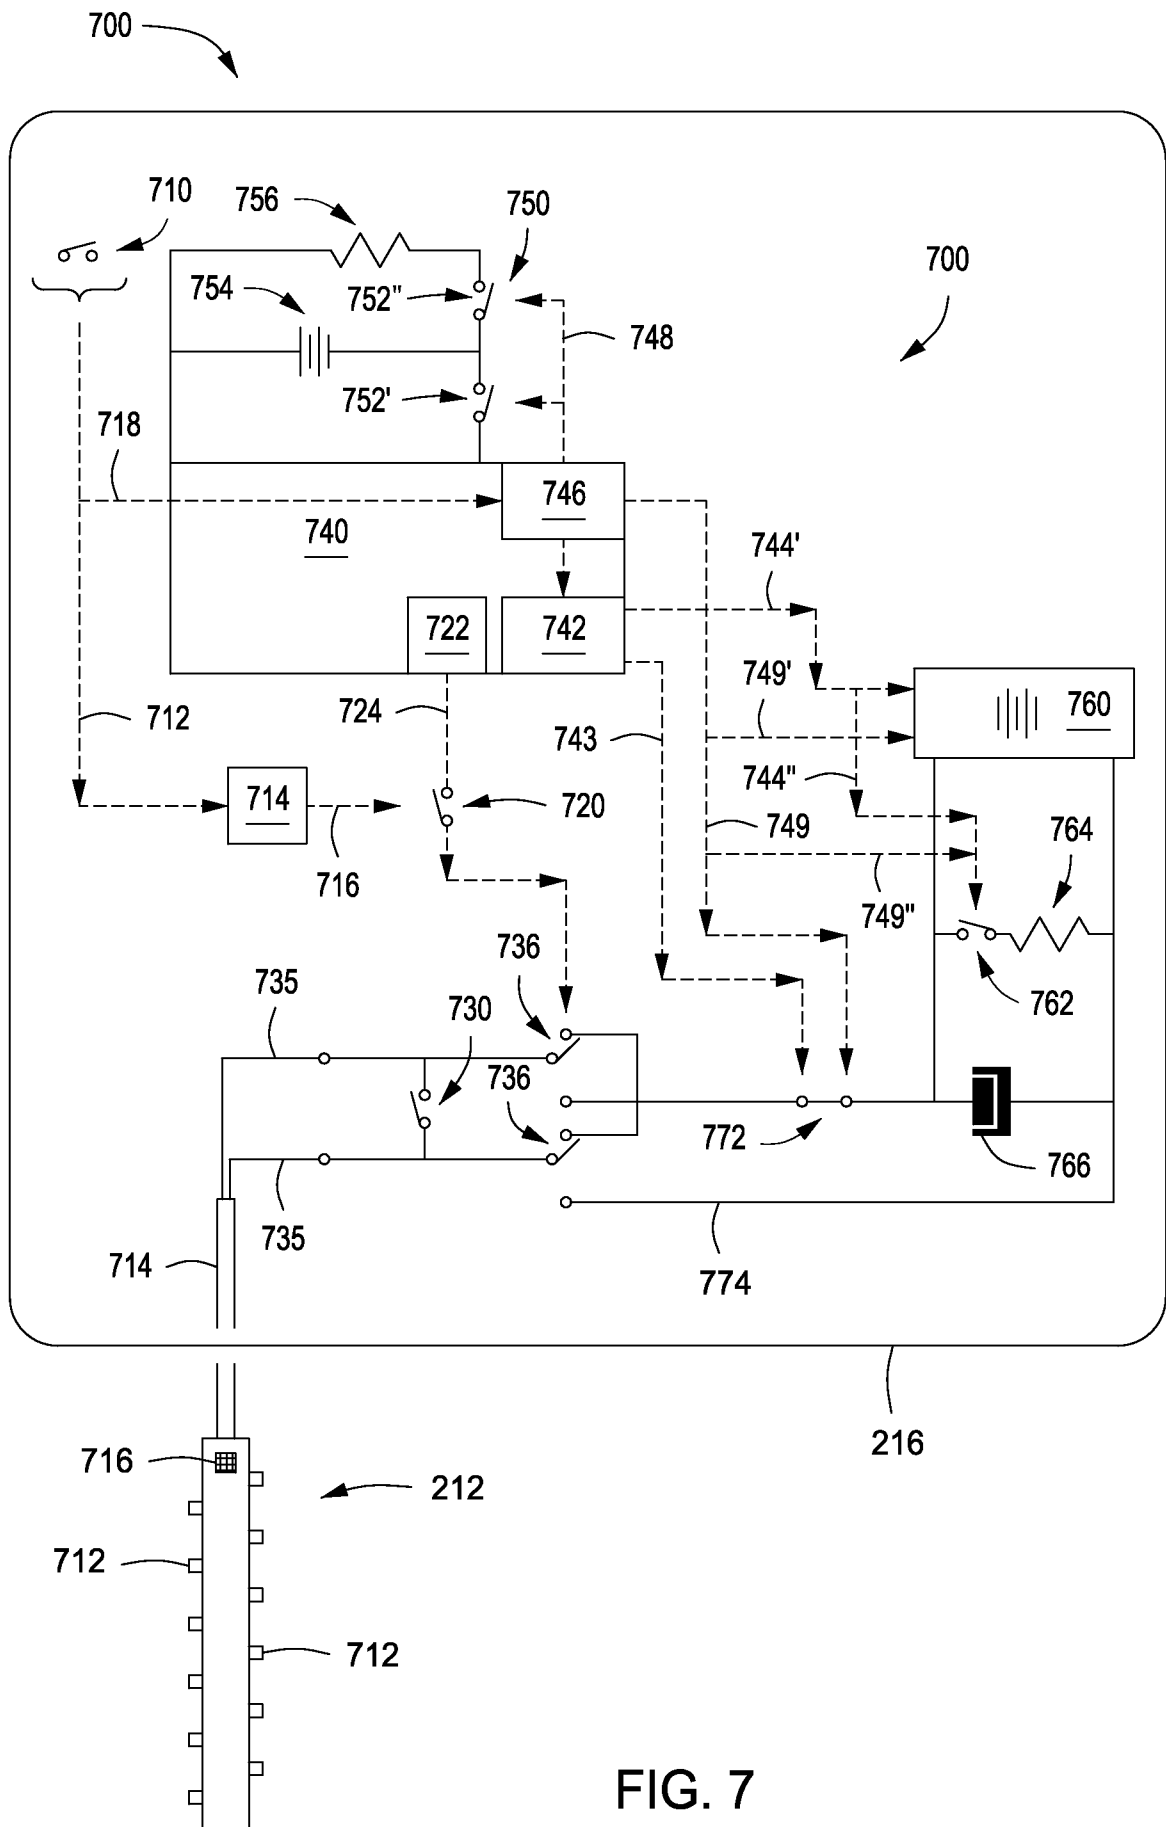

27/28

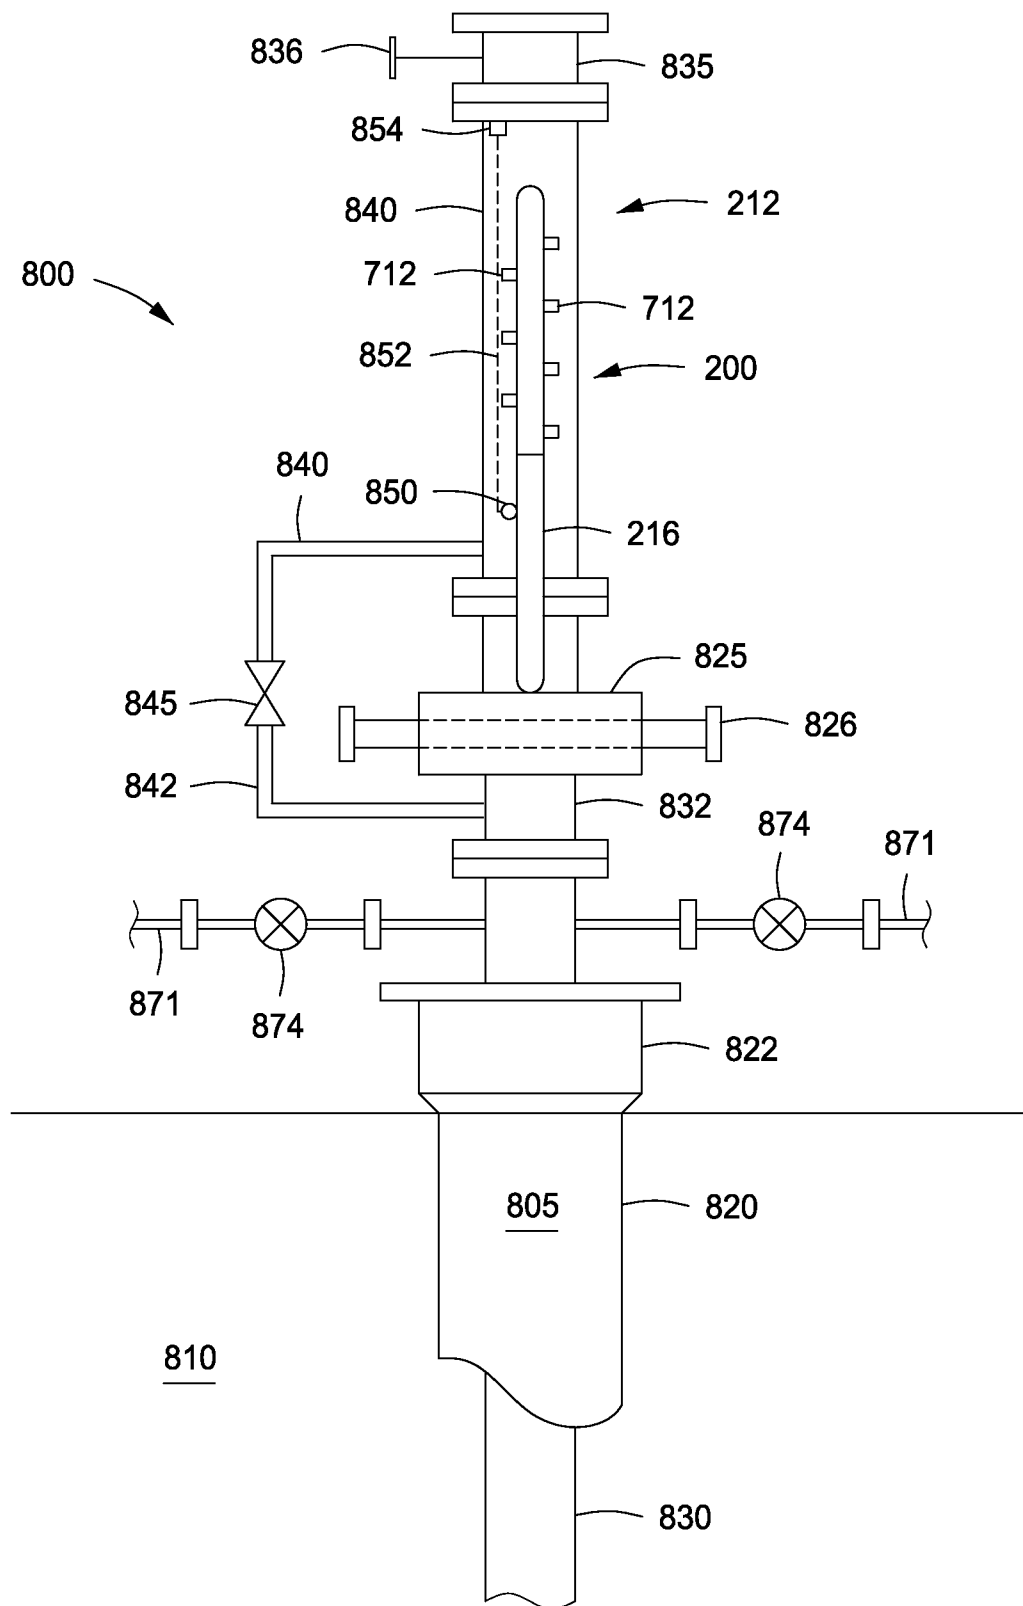


FIG. 8

28/28

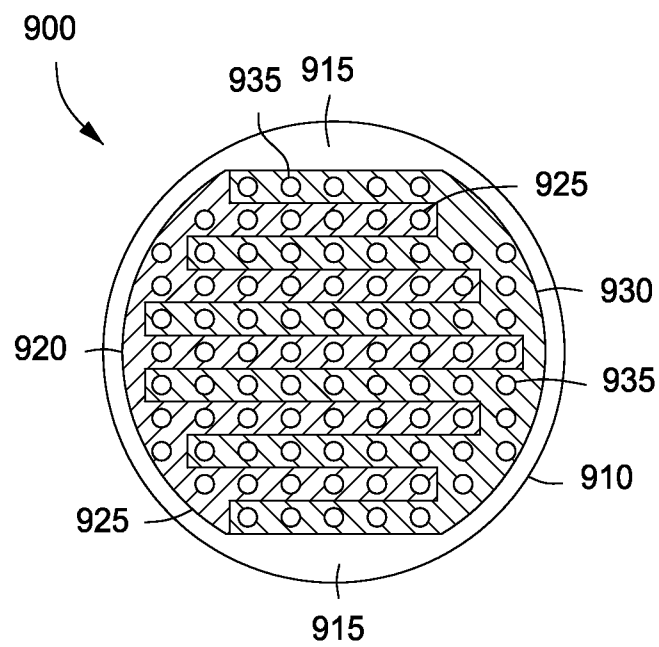


FIG. 9