




(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION
(13) **A1**

(22) Date de dépôt/Filing Date: 2017/06/16
(41) Mise à la disp. pub./Open to Public Insp.: 2018/02/28
(30) Priorité/Priority: 2016/08/31 (US15/253,306)

(51) Cl.Int./Int.Cl. *B64D 31/00* (2006.01),
B64D 43/00 (2006.01)
(71) Demandeur/Applicant:
THE BOEING COMPANY, US
(72) Inventeurs/Inventors:
JACKOWSKI, JASON J., US;
KARNOFSKI, KENT E., US...
(74) Agent: SMART & BIGGAR

(54) Titre : METHODES ET APPAREIL DE CONTROLE D'ACCELERATION DE POUSSEE D'UN MOTEUR D'AERONEF
(54) Title: METHODS AND APPARATUS TO CONTROL THRUST RAMPING OF AN AIRCRAFT ENGINE

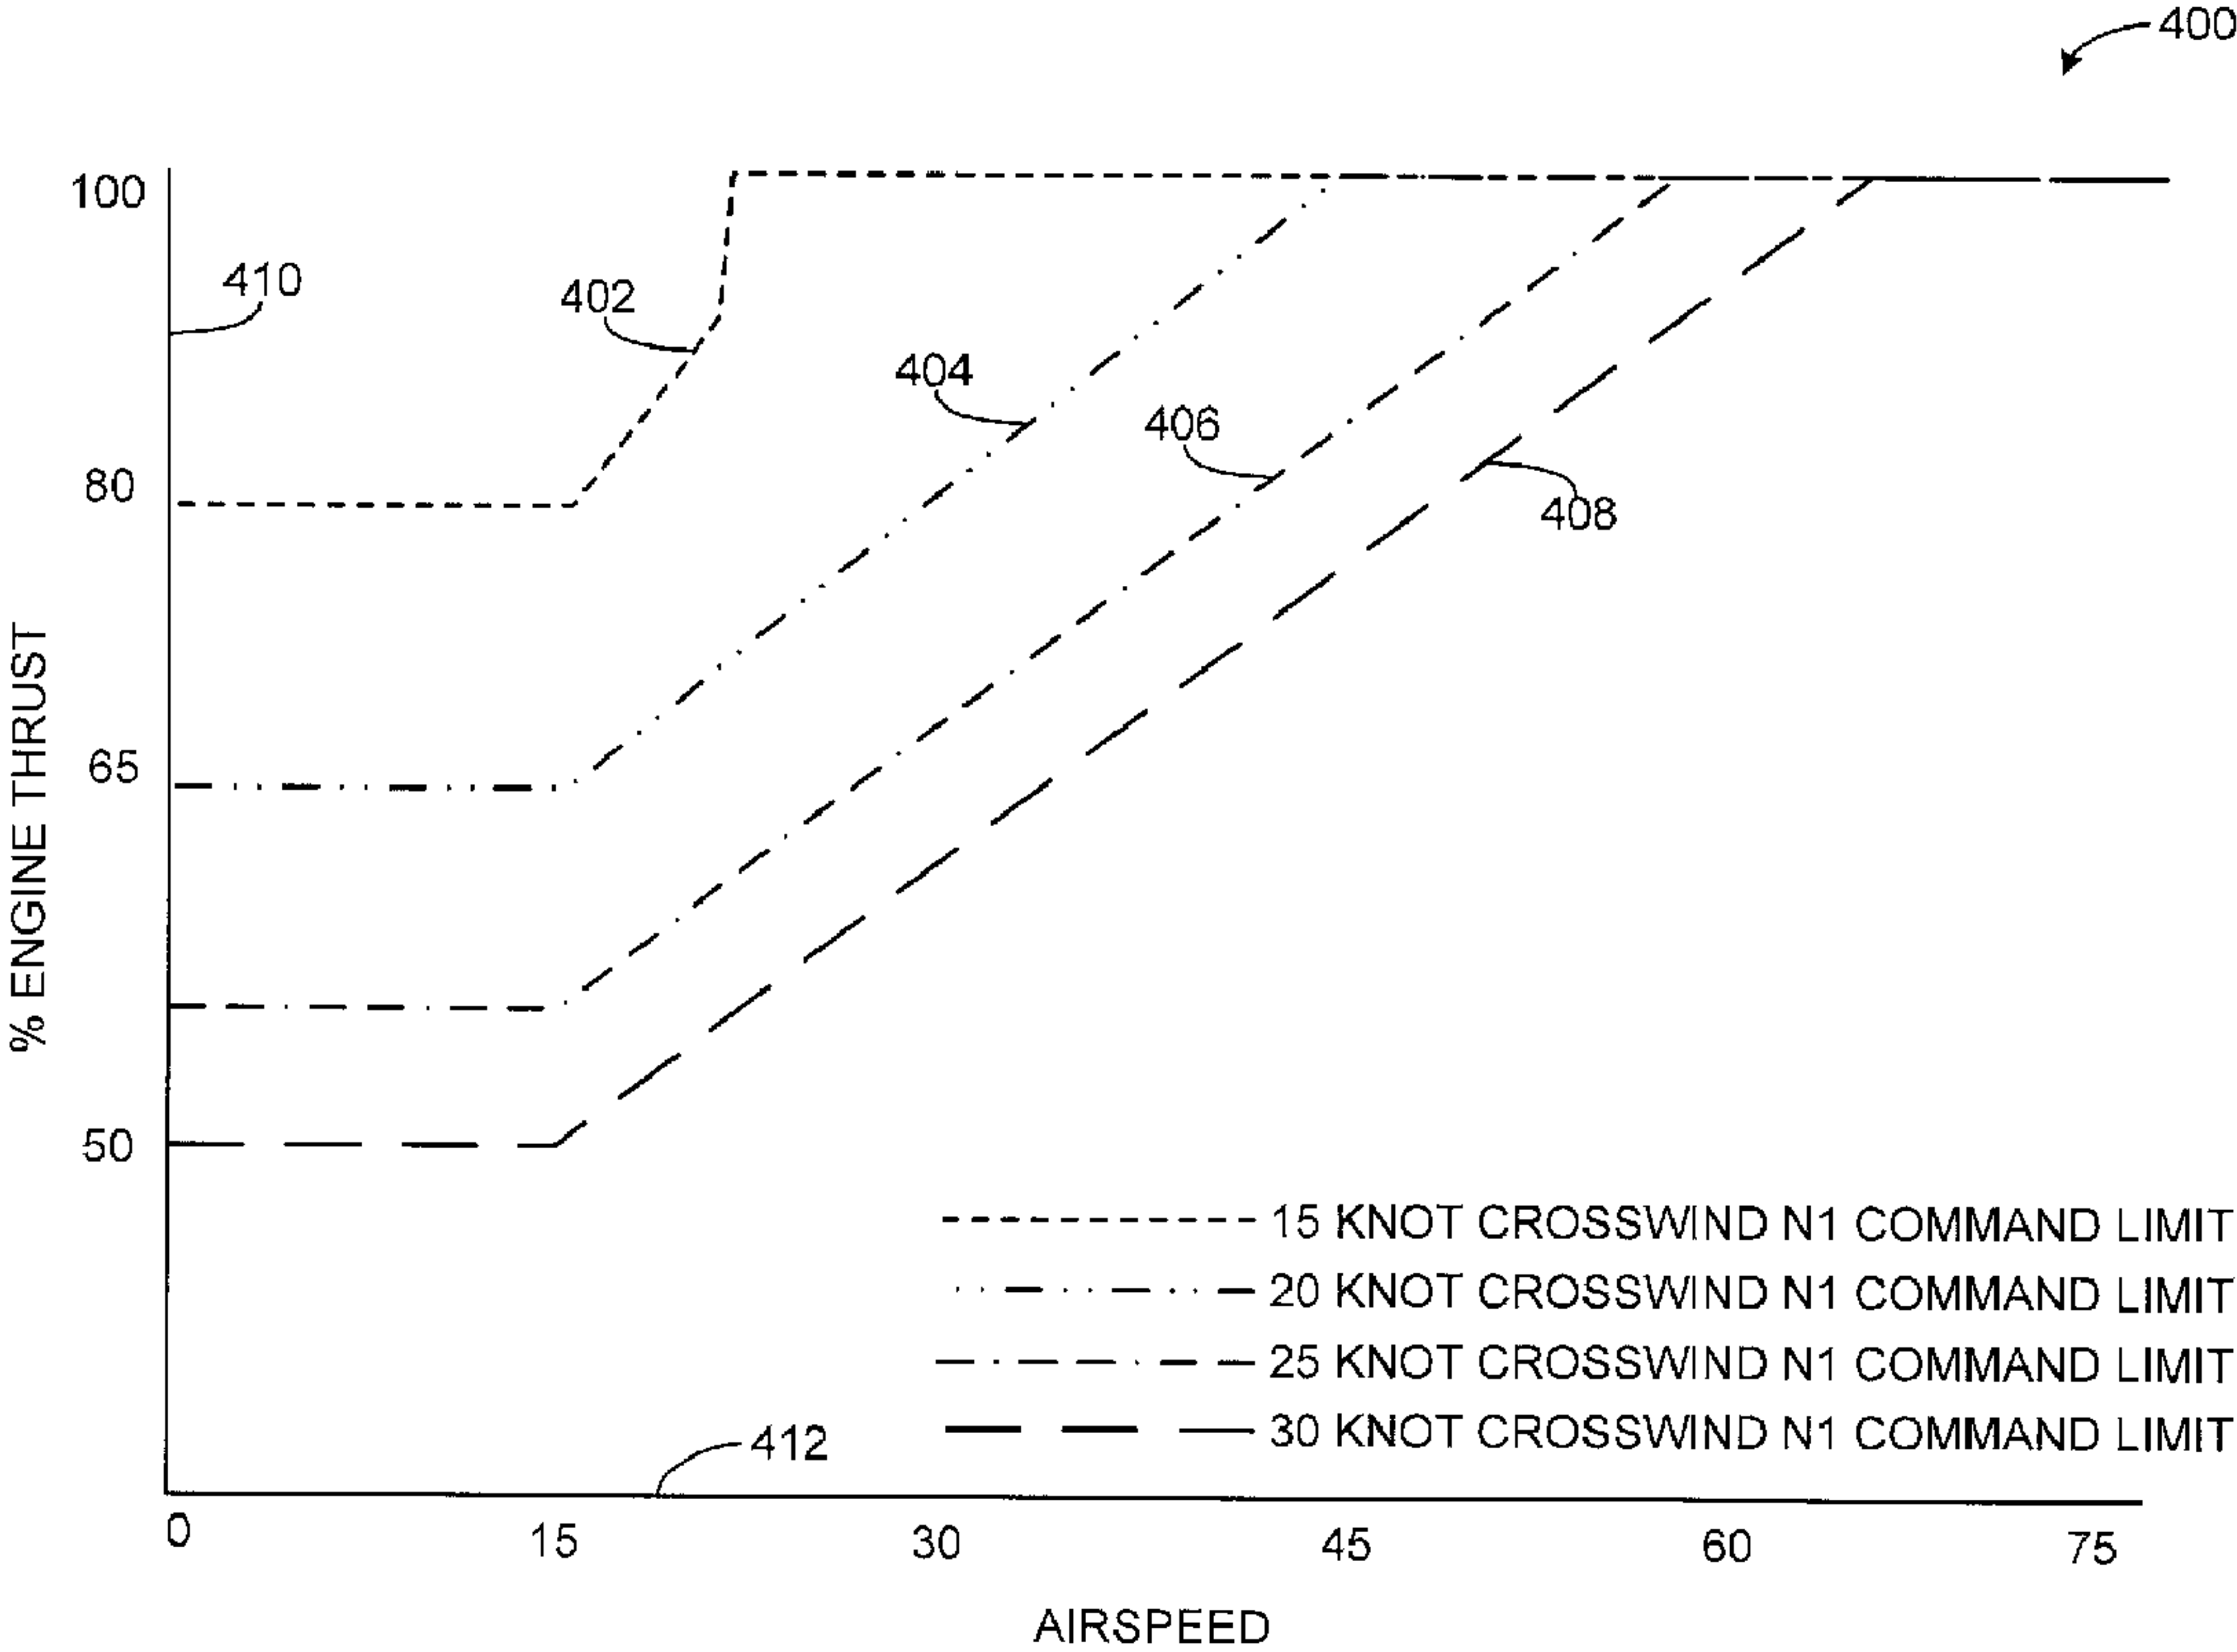

(57) **Abrégé/Abstract:**
Methods and apparatus to control thrust ramping of an aircraft engine are disclosed. An example thrust control system includes a sensor to measure a crosswind speed and a thrust manager to compare the measured crosswind speed to a crosswind threshold

(57) **Abrégé(suite)/Abstract(continued):**

range. The thrust manager activates a partial thrust ramping schedule during takeoff when the measured crosswind speed is within the crosswind threshold range. The partial thrust ramping schedule is selected from a plurality of thrust ramping schedules.

ABSTRACT

Methods and apparatus to control thrust ramping of an aircraft engine are disclosed. An example thrust control system includes a sensor to measure a crosswind speed and a thrust manager to compare the measured crosswind speed to a crosswind threshold range. The thrust manager activates a partial thrust ramping schedule during takeoff when the measured crosswind speed is within the crosswind threshold range. The partial thrust ramping schedule is selected from a plurality of thrust ramping schedules.

METHODS AND APPARATUS TO CONTROL THRUST RAMPING OF AN AIRCRAFT ENGINE

BACKGROUND

5 This disclosure relates generally to aircrafts and, more particularly, to methods and apparatus to control thrust ramping of an aircraft engine.

Engine thrust may be limited or controlled at low ground speed during the initial part of takeoff to reduce engine stress. For example, limiting available thrust during takeoff when certain crosswind conditions are present reduces wear on aircraft
10 engines, thereby reducing maintenance costs and/or noise.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an example aircraft implemented with an example thrust ramping system in accordance with the teachings of this disclosure.

FIG. 2 is a block diagram of an example thrust ramping controller of the example
15 thrust ramping system of FIG. 1.

FIGS. 3A and 3B are flowcharts representative of example methods that may be performed to implement the example thrust ramping controller of FIGS. 1 and 2.

FIG. 4 is an example graph representative of thrust ramping schedules that may be employed by the example thrust ramping controller of FIGS. 1 and 2.

20 FIG. 5 is a block diagram of an example processor platform capable of executing instructions to implement the methods of FIGS. 3A and 3B and the example thrust ramping controller of FIGS. 1 and 2.

SUMMARY

25 An example thrust control system includes a sensor to measure a crosswind speed and a thrust manager to compare the measured crosswind speed to a crosswind threshold range. The thrust manager to activate a partial thrust ramping schedule during takeoff when the measured crosswind speed is within the crosswind threshold range. The partial thrust ramping schedule is selected from a plurality of thrust ramping schedules.

An example method includes measuring a crosswind speed when the aircraft is taxiing; comparing the measured crosswind speed to a crosswind threshold range; and activating a partial thrust ramping schedule during takeoff based on the measured crosswind speed when the measured crosswind speed is within the crosswind threshold range.

An example tangible computer-readable medium includes instructions that, when executed, cause a machine to measure a crosswind speed; compare the measured crosswind speed to a crosswind threshold range; and activate a partial thrust ramping schedule during takeoff based on the measured crosswind speed when the measured crosswind speed is within the crosswind threshold range.

In one embodiment, there is provided a thrust control system for use with aircraft. The thrust control system includes a sensor to measure a crosswind speed. The thrust control system further includes a thrust ramping manager to compare the measured crosswind speed to a crosswind threshold range, the thrust ramping manager to activate a partial thrust ramping schedule during takeoff when the measured crosswind speed is within the crosswind threshold range, the partial thrust ramping schedule being selected from a plurality of thrust ramping schedules.

The thrust ramping manager may be to receive a reference crosswind speed.

The thrust ramping manager may compare the reference crosswind speed and the measured crosswind speed.

The system may include an alarm controller to initiate an alarm when the reference crosswind speed is less than the measured crosswind speed.

The thrust controller may be to activate a full thrust ramping schedule during takeoff when the measured crosswind speed is greater than an upper limit of the crosswind threshold range.

The thrust controller may be to deactivate thrust ramping when the measured crosswind speed is less than a lower limit of the crosswind threshold range.

In another embodiment, there is provided a method for controlling thrust of an aircraft. The method involves measuring a crosswind speed when the aircraft is taxiing, and comparing the measured crosswind speed to an crosswind threshold

range. The method further involves activating a partial thrust ramping schedule during takeoff based on the measured crosswind speed when the measured crosswind speed is within the crosswind threshold range.

5 The method may involve applying a full thrust ramping schedule during takeoff when the measured crosswind speed is greater than an upper limit of the crosswind threshold range.

The method may involve deactivating thrust ramping during takeoff when the measured crosswind speed is less than a lower limit of the crosswind threshold range.

10 The method may involve comparing a reference crosswind speed and the measured crosswind speed, and initiating an alarm when the reference crosswind speed is less than the measured crosswind speed.

Providing the partial thrust ramping schedule may include retrieving the partial thrust ramping schedule from a look-up table.

15 The method may involve measuring an airspeed of the aircraft during takeoff, and varying a thrust output limit as a function of the measured airspeed.

The method may involve decreasing the thrust output limit as the measured airspeed increases.

20 In another embodiment, there is provided a tangible computer-readable medium comprising instructions that, when executed, cause a machine to measure a crosswind speed, compare the measured crosswind speed to a crosswind threshold range, and activate a partial thrust ramping schedule during takeoff based on the measured crosswind speed when the measured crosswind speed is within the crosswind threshold range.

25 The computer-readable medium may include instructions that, when executed, cause the machine to apply a full thrust ramping schedule during takeoff when the measured crosswind speed is greater than an upper limit of the crosswind threshold range.

30 The computer-readable medium may include instructions that, when executed, cause the machine to deactivate thrust ramping during takeoff when the measured crosswind speed is less than a lower limit of the crosswind threshold range.

The computer-readable medium may include instructions that, when executed, cause the machine to compare a reference crosswind speed and the measured crosswind speed, and initiate an alarm when the reference crosswind speed is less than the measured crosswind speed.

5 The computer-readable medium may include instructions that, when executed, cause the machine to retrieve the partial thrust ramping schedule corresponding to the measured crosswind speed from a predetermined look-up table.

10 The computer-readable medium may include instructions that, when executed, cause the machine to measure an airspeed of an aircraft during takeoff, and vary a thrust output limit as a function of the measured airspeed.

 The computer-readable medium may include instructions that, when executed, cause the machine to decrease the thrust output limit as the measured airspeed increases.

15 **DETAILED DESCRIPTION**

Adverse aerodynamic conditions at an inlet of an aircraft engine affect performance of the engine. During takeoff conditions, for example, crosswinds may cause airflow through an inlet of an engine to separate along an inner surface of the inlet as the airflow moves toward a rotor or fan of the engine. Such airflow separation
20 may provide poor aerodynamics with respect to fan blades within the engine when the rotor or fan accelerates too rapidly during adverse aerodynamic conditions. For example, adverse aerodynamic conditions may impart vibrational forces on the fan blades that may wear and/or damage the fan blades, thereby resulting in increased replacement or maintenance of the blades. Thus, due to crosswind conditions during
25 takeoff, an acceleration rate of the rotor or fan blade may affect the maintenance schedule required for an engine. Increased maintenance increases costs and/or removes the aircraft from an available fleet.

To reduce or prevent damage to the aircraft engines due to crosswind conditions during takeoff, engine power or thrust may be limited (e.g., less than full available
30 power) and/or adjusted (e.g., progressively adjusted) gradually to control a rate of

acceleration of the rotor or fan until an aircraft speed (e.g., a forward speed of airflow parallel to a longitudinal axis of the aircraft engine) is such that adverse aerodynamics at an inlet of an engine no longer occur. For example, when airflow (e.g., relative velocity of airflow) into the inlet of the engine reaches a certain speed (e.g., when an aircraft reaches a relative velocity threshold suitable for liftoff), crosswinds of an airflow orthogonal to the inlet of the aircraft engine are negligible relative to the airflow parallel to the inlet of the aircraft engine. In other words, when the aircraft generates sufficient airspeed, an airflow vector flowing into the inlet parallel to a longitudinal axis of the engine is significantly greater than the airflow vector of the crosswind that is non-parallel (e.g., orthogonal) relative to the longitudinal axis of the aircraft inlet. Thus, the effects of crosswind become negligible and no longer impact engine performance and/or maintenance of the aircraft engine when the aircraft reaches a specific airspeed.

To reduce engine wear due to adverse crosswind conditions during a portion of a takeoff phase, some example aircraft employ thrust ramping systems to limit engine thrust output. For example, thrust ramping restricts a rate of acceleration of the rotor or fan when the aircraft is moving at relatively low ground speeds. For example, thrust ramping systems can cause an electronic engine controller to compensate for high stress loads on the fan blades due to crosswinds and low ground speeds by slowly increasing thrust until a threshold airspeed value is reached at which crosswind no longer impacts aerodynamic performance of an engine. Such airspeed threshold is dependent on performance characteristics of the engine (e.g., an inlet of a nacelle).

However, some thrust ramping systems are active for all takeoffs, regardless of whether crosswind conditions require thrust limiting. For example, thrust limits may be imposed when crosswind conditions (e.g., crosswinds of **10** knots or less) do not impact engine performance (e.g., allow use of full available thrust). Additionally, some thrust ramping systems apply the same thrust limit for all crosswind conditions. For example, some thrust limit systems may impose the same thrust limit value when crosswind conditions are **12** knots or **30** knots.

Although thrust ramping during takeoff reduces strain on an aircraft engine during high crosswind conditions, limiting thrust during takeoff affects takeoff speed and aircraft weight. For example, a heavier aircraft weight needs greater speed for liftoff. Thus, limiting thrust during takeoff may require additional runway length to reach proper takeoff speeds due to imposed thrust limits for duration of a takeoff phase. Thus, thrust ramping systems may impose a field length penalty and/or a payload penalty. For example, thrust ramping systems can impose a small field length penalty of **120** feet at a runway altitude of **14,000** feet. As a result, aircraft equipped with thrust ramping systems may require longer runways and/or may be required to carry lighter loads (e.g., loads that are less than a maximum allowable load). Thus, some thrust ramping systems may cause an aircraft to operate at less efficiency by limiting loads during crosswind conditions that may not require thrust limits or ramping during takeoff.

The example methods and apparatus disclosed herein selectively activate thrust ramping based on takeoff conditions (e.g., crosswind conditions). In particular, unlike some thrust ramping systems, the example methods and apparatus disclosed herein employ thrust control or ramping based on a measured crosswind determined during taxiing. For example, an example method disclosed herein includes measuring a crosswind speed during taxiing (e.g., when the aircraft is stationary) and compares the measured crosswind speed to a crosswind threshold range. In some examples, the methods and apparatus disclosed herein impose thrust limits and/or provide thrust ramping when a crosswind speed is greater than a crosswind threshold. Thus, the example methods and apparatus disclosed herein may not apply thrust limits and/or thrust ramping when the measured crosswind is less than a crosswind threshold. In this manner, an aircraft may employ full available thrust during takeoffs with non-adverse crosswind conditions (e.g., crosswind conditions that do not require thrust ramping). In some such instances, aircraft takeoff performance can be realized when thrust ramping is not activated. For example, without thrust ramping, an aircraft may takeoff using a shorter runway length and/or may takeoff with a heavier payload (e.g., cargo).

Additionally, the example methods and apparatus disclosed herein employ a plurality of different thrust ramping schedules corresponding to different measured crosswind conditions. The example methods and apparatus disclosed herein employ partial thrust ramping when a measured crosswind speed is within a crosswind threshold range, and employ full thrust ramping when the measured crosswind speed exceeds an upper limit of the crosswind threshold range.

In some examples, partial thrust ramping provides a scaled or optimized thrust ramping for a measured crosswind speed. Thus, when partial thrust ramping is activated, a thrust ramping schedule based on the measured crosswind speed. For example, a first thrust ramping schedule is selected when the measured crosswind speed is a first value within the crosswind threshold range and a second thrust ramping schedule when the measured crosswind speed is a second value within the crosswind threshold range. For example, a thrust output limit of the first thrust ramping schedule selected based on a first measured crosswind speed may be less than the thrust output limit of a second thrust ramping schedule selected based on a second measured crosswind speed (e.g., at an upper limit of the crosswind threshold range). For example, a thrust ramping schedule associated with a measured crosswind speed of approximately **15** knots may impose an initial thrust limit of approximately **80%** of available engine thrust, and a thrust ramping schedule associated with a measured crosswind speed of approximately **25** knots may impose an initial thrust limit of approximately **50%** of available engine thrust. Additionally, in some examples, a rate of engine acceleration between an initial thrust limit and full thrust availability varies with different thrust ramping schedules. For example, a rate of a first thrust ramping schedule associated with relatively low crosswind speeds may be greater than a rate of a second thrust ramping schedule associated with relatively higher crosswind speeds.

Full thrust ramping schedule is selected when the measured crosswind value is greater than an upper limit of the crosswind threshold range. For example, the same full thrust ramping schedule applies for all measured crosswind speeds that are greater than the upper limit of the crosswind threshold range. Thus, for all crosswind

values greater than, for example, **30** knots, the full thrust ramping schedule is activated. The thrust ramping is deactivated when the measured crosswind speed is less than a lower limit of the crosswind threshold range. Thus, the example methods disclosed herein do not impose thrust limits during takeoff when thrust ramping is in a deactivated state.

FIG. **1** is an example aircraft **100** implemented with a thrust control system **102**, also referred herein as a thrust ramping system **102**, in accordance with the teachings of this disclosure. The aircraft **100** is an example aircraft and, thus, the example methods and apparatus disclosed herein may be implemented with other aircraft, spacecraft or vehicles without departing from the scope of this disclosure. The example aircraft **100** of the illustrated example is a commercial aircraft having a first wing **104** and a second wing **106** extending from a fuselage **108**. The aircraft **100** of the illustrated example includes a first engine **110** coupled to the first wing **104** and a second engine **112** coupled to the second wing **106**. Thrust outputs of the first engine **110** and the second engine **112** are commanded via a thrust lever **114** positioned in a cockpit **115** of the aircraft **100**. For example, during operation, the thrust lever **114** is manipulated to command thrust outputs of the first engine **110** and the second engine **112**.

To control operation (e.g., thrust output) of the first engine **110** and the second engine **112** based on a thrust command input provided by the thrust lever **114**, each of the engines **110** and **112** of the illustrated example employs an electronic engine controller **116**. For example, the electronic engine controller **116** determines an amount of power or thrust output that is commanded from the first engine **110** and the second engine **112** via the thrust lever **114**. Additionally, the electronic engine controller **116** of the illustrated example determines or receives operating characteristic(s) (e.g., aircraft speed, angle of attack, altitude, static and/or dynamic air pressures, air speed, air density, air temperature, air pressure, engine pressure, engine temperature, etc.) to achieve the desired thrust set by the thrust lever **114**. For example, the electronic engine controller **116** computes a fan speed to achieve a thrust corresponding to thrust command input provided by the thrust lever **114**. Based

on a power or thrust output requirement and/or operating characteristic(s), the electronic engine controllers **116** modulate fuel flow (e.g., based on a fuel-to-air ratio) to the first engine **110** and the second engine **112**.

During takeoff, the aircraft **100** of the illustrated example selectively activates thrust ramping during certain crosswind condition(s). For example, the aircraft **100** of the illustrated example limits a rate of acceleration of the fan of the first engine **110** and the second engine **112** during adverse crosswind conditions that may otherwise cause damage to the fans (e.g., the fan blades) of the engines **110** and **112** when the ground speed of the aircraft **100** is relatively low. For example, during relatively low ground speeds, high crosswinds **118** orthogonal to longitudinal axes **120** of inlets **122** of the first engine **110** and the second engine **112** may cause flow separation along an inner surface of the inlets **122**. Such flow separation may cause turbulent flow, which can cause damage to the fan blades of the first engine **110** and/or the second engine **112** if a rate of acceleration of the engines **110** and **112** increases too rapidly. As airspeed **124** of the aircraft **100** increases (e.g., in forward direction parallel to the longitudinal axes **120**), the adverse crosswind conditions no longer affect a pattern of the airflow into the inlet **122**.

To selectively limit the rate of acceleration of the first engine **110** and the second engine **112**, the example aircraft **100** of the illustrated example employs the thrust ramping system **102**. More specifically, the example thrust ramping system **102** of the illustrated example employs thrust output limits to control a rate of acceleration of the first engine **110** and the second engine **112** when the thrust ramping system **102** detects certain operating condition(s). In some examples, the thrust ramping system **102** of the illustrated example provides on-demand thrust ramping. For example, the thrust ramping system **102** of the illustrated example determines if thrust ramping is needed by measuring a crosswind speed when the aircraft is taxiing (e.g., prior to takeoff). For example, the thrust ramping system **102** of the illustrated example measures crosswind speeds when the aircraft **100** is stationary (e.g., an initial crosswind speed). For example, when the aircraft **100** is stationary, a ground speed of the aircraft **100** is zero and a measured airflow equals a wind velocity. The wind

velocity vector may be analyzed to determine a speed of the crosswind **118**. Based on the crosswind speed, the thrust ramping system **102** of the illustrated example may limit thrust output during takeoff when crosswind conditions measured during taxiing are greater than a crosswind threshold (e.g., greater than **12** knots).

5 Additionally, as described in greater detail below, the example thrust ramping system of the illustrated example imposes different thrust ramping schedules having different thrust output limits based on the measured crosswind speed. When thrust ramping is activated to control the rate of acceleration of the fans of the first engine **110** and the second engine **112**, the thrust ramping system of the illustrated example
10 increases thrust output from an initial thrust output limit to a full available thrust output as a function of a measured airspeed of the aircraft **100** during takeoff. For example, the thrust ramping system **102** of the illustrated example limits thrust output during an initial portion of takeoff and gradually increases thrust output until full available thrust output is achieved. The thrust ramping system **102** may be communicatively coupled
15 to the electronic engine controllers **116** via a fiber optic cable **126**, a wireless system, a cellular system, and/or any other suitable communication system(s). In some examples, the thrust ramping system **102** may be formed with (e.g., embedded with) the electronic engine controllers **116**.

 To detect or measure air data associated with the airflow (e.g., crosswind
20 speed, etc.) and/or the airspeed of the aircraft **100**, the example thrust ramping system **102** of the illustrated example employs an optical sensor system **130** (e.g., a LIDAR sensor system). The optical sensor system **130** of the illustrated example includes a plurality of sensors **132** communicatively coupled to a thrust ramping controller **134** (e.g., a sensor signal processing unit), which analyzes signals from the
25 sensors **132** to determine or measure (e.g., calculate) air data such as wind velocity. In other words, the optical sensor system **130** of the illustrated example detects the crosswind **118** and the airspeed **124** of the aircraft **100** (e.g., the speed of the aircraft **100** relative to the airflow). For example, when the aircraft **100** is not moving (e.g., the ground speed is zero), the sensor **132** measure wind velocity of an airflow. When the

aircraft **100** moves relative to the ground, the sensors **132** measure airspeed of the aircraft **100**.

In the illustrated example, each of the sensors **132** is communicatively coupled to the thrust ramping controller **134** via a cable **136** (e.g., a fiber optic cable). In some examples, the optical sensor system **130** may be employed to measure or determine other air data or operating characteristic(s) such as, for example, air pressure, altitude, air temperature, air density, and/or other operating characteristic(s). In some such examples, the operating characteristic(s) may be communicated to the electronic engine controllers **116** and/or other controller system(s) of the aircraft **100** (e.g., a full authority digital electronic controller (FADEC)). In some examples, the aircraft **100** may employ other sensors to provide the operating characteristic(s) to the electronic engine controllers **116** such as, for example, air pressure, altitude, air temperature, engine temperature, engine pressure, etc. In some examples, information or data (e.g., reference crosswind value) may be provided to the thrust ramping system **102** and/or the electronic engine controller **116** via an input/output interface **138** (e.g., a display, a touch screen, a visual indicator, etc.) positioned in the cockpit **115** of the aircraft **100**.

The sensors **132** of the illustrated example include a first sensor **132a**, a second sensor **132b** and a third sensor **132c**. More specifically, the first sensor **132a** is positioned adjacent a first side **140** (e.g., a right side) of the aircraft **100**, the second sensor **132b** is positioned adjacent a second side **142** (e.g., a left side) of the aircraft **100** opposite the first side **140**, and the third sensor **132c** is positioned adjacent a nose **144** of the aircraft **100**. For example, the first sensor **132a** may detect or determine air data (e.g., wind velocity, relative velocity, etc.) of airflow adjacent the first engine **110** or the first side **140** of the aircraft **100**, the second sensor **132b** may detect or determine air data (e.g., wind velocity, relative velocity, etc.) of airflow adjacent the second engine **112** or the second side **142**, and the third sensor **132c** may detect or determine air data (e.g., wind velocity, relative velocity, etc.) of airflow adjacent the nose **144** of the aircraft **100**. In this manner, if the crosswind **118** is moving in a direction from the second engine **112** toward the first engine **110** in the

orientation of FIG. 1, the fuselage **108** may block or prevent the first sensor **132a** from accurately detecting the crosswind **118**. In some such instances, the second sensor **132b** and/or the third sensor **132c** may detect the crosswind **118** (e.g., crosswind speed). In some examples, the information provided by the first sensor **132a** may be used in conjunction with information provided by the second sensor **132b** and/or the third sensor **132c** to detect the air data or operating characteristic(s). For example, the airflow characteristic(s) provided by each of the sensors **132** can be used to map or graph overall characteristics of an airflow relative to the aircraft **100**. Although the examples shown in FIG. 1 illustrates the plurality of sensors **132**, the example optical sensor system **130** disclosed herein may be implemented with only one sensor, two sensors or more than three sensors.

The example sensors **132** of the illustrated example are laser radar sensors or transceivers (e.g., LIDAR sensors). For example, each of the sensors **132** of the illustrated example includes a laser transmitter and a receiver. The sensors **132** of the illustrated example may be mounted on the fuselage **108** of the aircraft **100**. In some examples, the sensors **132** may be positioned inside the fuselage **108** and positioned to emit laser energy through a window of the aircraft **100**. In some examples, the sensors **132** may be mounted to an outer surface of the aircraft **100** (e.g., an aerodynamic surface of a wing and/or the first engine **110**, the second engine **112** and/or the nose **144**). In some examples, the sensors **132** of the illustrated example may be flush mounted relative to an outer surface (e.g., an aerodynamic surface, the fuselage, etc.) of the aircraft **100** such that the sensors **132** do not interfere, disrupt, modify and/or obstruct (e.g., a pattern or profile of) airflow moving across the outer surface (e.g., the fuselage and/or the aerodynamic surface) to which the sensors **132** are mounted. In some examples, one or more covers (e.g., transparent covers) may be positioned over the laser transmitter and/or the receiver.

To measure airspeed, wind velocity, crosswind and/or other air data or characteristic(s), the optical sensor system **130** characterizes or analyzes a volume of air and/or an air cloud (e.g., air particles, air molecules, liquid droplets, etc.). To characterize or analyze the air volume or the air cloud, the example sensors **132**

generate or emit a laser beam or laser energy (e.g., radiation, one or more wavelengths, etc.) from, for example, a transmitter. For example, to measure a three-dimensional airflow velocity vector (e.g., wind velocity vector), each of the sensors **132** (e.g., a transmitter of the sensor) emits three laser beams **150** (e.g., orthogonal to the sensor and/or the fuselage) to measure three different velocity vectors at different predefined angles with respect to the transmitter and/or the fuselage **108**. In some examples, the laser energy (e.g., continuous or pulse) that is transmitted into the atmosphere is backscattered by the air cloud (e.g., due to collisions with the air particles, air molecules, etc.) and reflected and the backscattered laser energy is received by the receivers of the sensors **132**. As described in greater detail below in connection with FIG. 2, the thrust ramping controller **134** of the illustrated example converts or conditions the backscattered laser energy to generate electronic signals to measure airflow velocity.

FIG. 2 is a block diagram of the example thrust ramping controller **134** of FIG. 1. The example thrust ramping controller **134** of the illustrated example includes an example laser ranging unit **202**, an example thrust ramping manager **204**, an example data store **206** (e.g., memory), and an example alarm controller **208**.

The example laser ranging unit **202** of the illustrated example analyzes the signals from the sensors **132** of FIG. 1 to determine airflow data and/or operating characteristic(s) such as, for example, the crosswind and the airspeed. The laser ranging unit **202** of the illustrated example includes an example signal processor **210** that receives the signals (e.g., the backscattered laser energy) from the receiver of the sensors **132** of FIG. 1. For example, the signals provided by the sensors **132** to the signal processor **210** may be data (e.g., raw data) relating to information provided by the backscattered laser energy. The example signal processor **210** converts such information to computer processable electronic signals that may be used to determine operating characteristic(s) and/or parameters of airflow. For example, the signal processor **210** may include, for example, an analog to digital (A/D) converter and/or an optical transducer to convert the data from the sensors **132** to the electronic signals (e.g., digital electronic signals).

The converted or conditioned backscattered laser energy (e.g., electronic signals) is then processed or analyzed to measure air data (e.g., wind velocity). To measure the velocity of the airflow, the laser ranging unit **202** of the illustrated example includes an airflow velocity determiner **212**. The airflow velocity determiner **212** receives the electronic signals from the signal processor **210** and processes the electronic signals to determine a velocity of the airflow relative to the aircraft **100** using, for example, algorithms applying a Doppler velocity equation to determine the airflow or wind velocity from a frequency shift analysis. For example, the example signal processor **210** detects an amount of Doppler shift between the transmission light and the reception light to measure the velocity of airflow. In some examples, the backscattered laser energy may be processed to determine or measure air temperature, air pressure, air density, and/or other air data or characteristic(s).

To determine or measure airspeed of the aircraft **100**, the laser ranging unit **202** of the illustrated example includes an airspeed determiner **214**. Likewise, to determine or measure crosswind, the laser ranging unit includes a crosswind determiner **216**. The airspeed determiner **214** and the crosswind determiner **216** analyze the airflow velocity vector provided by the airflow velocity determiner **212**. For example, the airspeed determiner **214** determines or calculates airspeed of the aircraft **100** from an airflow velocity vector provided by the airflow velocity determiner **212** that is parallel relative to the longitudinal axes **120** of the engines **110** and/or **112**. In some examples, the airspeed determiner **214** calculates or measures an airspeed based on the angle of separation of the laser beams **150** of the sensors **132** (e.g., an angle of each of the laser beams **150** relative to the transmitter of the sensors **132** and/or the fuselage **108**). For example, the airflow velocity determiner **212** determines airspeed, which accounts for ground speed and wind characteristics (e.g., tailwinds, headwinds, updrafts, downdrafts, etc.) when the aircraft **100** is moving relative to the ground.

Similarly, the crosswind determiner **216** determines or calculates a crosswind value (a crosswind that is orthogonal to the longitudinal axes **120** of the engines **110** and **112**) from the airflow velocity vector provided by the airflow velocity determiner **212**. For example, when the airflow velocity determiner **212** measures airflow velocity

when the aircraft **100** is stationary, the airflow velocity equals the wind velocity. In some examples, the thrust ramping controller **134** determines (e.g., from a ground speed sensor of a landing gear of the aircraft **100**) that the aircraft **100** is taxiing or stationary. In some examples, the crosswind determiner **216**, based on the angles of the sensors **132** and/or the laser beams **150**, determines the orthogonal vector component of the measured airflow velocity (e.g., measured when the aircraft **100** is stationary) to determine a crosswind speed. The airspeed determiner **214** and the crosswind determiner **216** communicate the airspeed and the crosswind speed to the thrust ramping manager **204**.

The thrust ramping manager **204** receives the airspeed and/or the crosswind speed from the laser ranging unit **202**. Based on this received information, the thrust ramping manager **204** determines whether to activate thrust ramping (e.g., impose thrust output limits) or deactivate thrust ramping (e.g., remove thrust output limits). For example, the thrust ramping manager **204** determines whether to activate thrust ramping when the aircraft **100** is taxiing and prior to takeoff (e.g., when the aircraft **100** has a ground speed equal to zero). If the thrust ramping manager **204** activates thrust ramping, the thrust ramping manager **204** of the illustrated example communicates a thrust output limit to the electronic engine controllers **116**. The electronic engine controllers **116** prevent an output thrust of the engines **110** and **112** from exceeding the thrust output limit determined by the thrust ramping manager **204**. In such examples, the electronic engine controller **116** reduces a thrust command input from the thrust lever **114** that exceeds the thrust output limit. For example, the electronic engine controllers **116** set an output thrust of the engines **110** and **112** to the thrust output limit provided by the thrust ramping manager **204** when the thrust command input from the thrust lever **114** is greater than the thrust output limit provided by the thrust ramping manager **204**.

If the thrust ramping manager **204** determines that thrust ramping is not needed, the thrust ramping manager **204** deactivates thrust ramping. When thrust ramping is deactivated, a thrust output limit is not imposed by the thrust ramping manager **204** to the engines **110** and **112**. In such examples, the electronic engine controllers **116**

control the output thrust of the engines **110** and **112** based on the thrust command input from the thrust lever **114** and/or the operating condition(s).

To determine whether to impose thrust ramping, the example thrust ramping manager **204** includes a thrust limit determiner **218**, which receives the measured crosswind speed provided by the crosswind determiner **216**. To determine if thrust ramping is needed, the thrust limit determiner **218** compares, via a comparator **220**, the measured crosswind speed to a crosswind threshold range. The crosswind threshold range may be stored in the data store **206** (e.g., via a look-up table). The crosswind threshold range may vary based on a performance characteristic(s) of an aircraft engine. For example, aerodynamic characteristics of an inlet of a nacelle of an aircraft engine may be configured to prevent flow separation at greater crosswind speeds than aerodynamic characteristics of an inlet of another nacelle. In some such examples, an engine may have a first crosswind threshold range that may be different than a crosswind threshold range of a second engine different than the first engine. Thus, the crosswind threshold range may be different for different types of aircraft engines. For example, the crosswind threshold range may be provided by a predetermined look-up table determined in a lab during testing of a specific engine.

Based on the comparison between the crosswind speed and the crosswind threshold range, the thrust limit determiner **218** determines whether thrust ramping and/or whether full thrust ramping or a partial thrust ramping is needed. In the illustrated example, the thrust limit determiner **218** activates partial thrust ramping when the measured crosswind speed is within the crosswind threshold range, and activates the full thrust ramping when the measured crosswind speed is greater than an upper limit of the crosswind threshold range. In general, a full thrust ramping schedule may ramp acceleration of the engines **110** and **112** to full thrust output at a slower rate compared to a partial thrust ramping schedule.

Additionally, when partial thrust ramping is activated, the thrust limit determiner **218** of the illustrated example selects a thrust ramping schedule corresponding to the measured crosswind speed provided by the crosswind determiner **216**. For example, the data store **206** may store a plurality of thrust ramping schedules corresponding to

a plurality of crosswind conditions. Thus, the example thrust ramping manager **204** of the illustrated example applies or imposes different thrust ramping and/or different thrust output limits for different crosswind speeds that are within the crosswind threshold range. For example, a first partial thrust ramping schedule may allow
5 greater engine acceleration rates when a crosswind speed is closer to a lower limit of the crosswind threshold range compared to a crosswind speed that is closer to an upper limit of the crosswind threshold range. In other words, the partial thrust ramping of the illustrated example provides a sliding scale thrust ramping schedule dependent on measured crosswind conditions determined by the crosswind determiner **216**.
10 Thus, for relatively low crosswind speeds in the crosswind threshold range, the thrust ramping manager **204** of the illustrated example imposes thrust ramping for a shorter duration of a takeoff phase (e.g., requiring a smaller runway length) compared to thrust ramping imposed for a relatively high crosswind speeds in the crosswind threshold range. In some examples, the plurality of thrust ramping schedules may be
15 determined based on engine performance characteristics and may vary between different engines.

When either full thrust ramping or partial thrust ramping is active, the thrust ramping manager **204** of the illustrated example ramps the allowable thrust output (e.g., limits a rate of acceleration) of the engines **110** and **112** as a function of
20 airspeed of the aircraft **100**. A rate at which the thrust ramping manager **204** reduces the thrust limit on the engines **110** and **112** as a function of airspeed may be determined from the selected thrust ramping schedule retrieved from the data store **206** (e.g., via a look-up table).

A selected thrust ramping schedule based on a crosswind speed may include
25 adjustments (e.g., decreases) to thrust output limits as the airspeed increases. For example, the thrust ramping manager **204** of the illustrated example progressively reduces the restriction of engine power (e.g., a thrust limit) from an initial thrust limit imposed when the airspeed is zero to full available thrust (e.g., a zero thrust restriction) when the airspeed is such that adverse aerodynamics at the inlet **122** of
30 the first engine **110** and the second engine **112** due to crosswinds no longer occurs.

In other words, the thrust ramping manager **204** of the illustrated example progressively adjusts (e.g., reduces) a thrust output limit based on airspeed of the aircraft **100** as the aircraft **100** moves from a taxiing position (e.g., a stationary position with a ground speed of zero) to liftoff (e.g., when a takeoff speed is sufficient for liftoff).

5 The rate of the thrust reduction as a function of airspeed may be linear, exponentially, continuously, gradually, stepped and/or may have any other pattern. In addition, a rate of the thrust reduction as a function of airspeed may vary depending on a selected thrust ramping schedule. For example, a rate of a thrust reduction may be greater for thrust ramping schedules associated with crosswind speeds that are closer
10 to the lower limit of the crosswind threshold range compared to a rate of thrust reduction of thrust ramping schedules associated with crosswind speeds that are closer to the upper limit of the crosswind threshold range.

In some examples, the thrust limit determiner **218** of the illustrated example compares a crosswind reference input provided by the input/output interface **138** and
15 the crosswind speed provided by the crosswind determiner **216**. The thrust ramping manager **204** commands the alarm controller **208** to initiate an alarm in the cockpit **115** when the crosswind reference input is less than the measured crosswind speed provided by the crosswind determiner **216**. In some examples, a warning initiated by the alarm controller **208** alerts a pilot to reassess a payload of the aircraft **100**.

20 The example thrust ramping system **102** and/or the thrust ramping controller **134** of the illustrated example enable aircraft to have more payload when crosswind conditions do not require thrust ramping. For example, a maximum payload of the aircraft **100** is determined based on takeoff optimization that includes consideration of the reference crosswind value, a runway length, air pressure, air temperature, altitude,
25 etc. For example, prior to loading an aircraft, a traffic control tower provides the reference crosswind value to a pilot, who inputs the reference crosswind via the input/output interface **138**. Based on the reference crosswind and other parameters noted above, the pilot determines a maximum load for takeoff optimization based on airline and/or government agency safety standards. In some examples, if the
30 reference crosswind value is less than a lower limit of a crosswind threshold range

associated with the aircraft **100**, the aircraft **100** of the illustrated example may be loaded to a weight that does not account for runway penalty associated with known thrust ramping systems. However, other aircraft implemented with known thrust ramping systems require inclusion of thrust ramping factor when determining takeoff optimization, which reduces the maximum allowable payload of the aircraft. Additionally, the example thrust ramping system **102** and/or the thrust ramping controller **134** of the illustrated example improve takeoff optimization performance by activating partial thrust ramping during certain crosswind conditions. In this manner, less runway and/or weight penalty may be incurred by the aircraft **100**.

While an example manner of implementing the example thrust ramping controller **134** of FIG. **1** is illustrated in FIG. **2**, one or more of the elements, processes and/or devices illustrated in FIG. **2** may be combined, divided, re-arranged, omitted, eliminated and/or implemented in any other way. Further, the example laser ranging unit **210**, the example thrust ramping manager **204**, the example data store **206**, the example alarm controller **208**, the example signal processor **210**, the example airflow velocity determiner **212**, the example airspeed determiner **214**, the example crosswind determiner **216**, the example thrust limit determiner **218**, the example comparator **220** and/or, more generally, the example thrust ramping controller **134** of FIG. **2** may be implemented by hardware, software, firmware and/or any combination of hardware, software and/or firmware. Thus, for example, any of the example laser ranging unit **210**, the example thrust ramping manager **204**, the example data store **206**, the example alarm controller **208**, the example signal processor **210**, the example airflow velocity determiner **212**, the example airspeed determiner **214**, the example crosswind determiner **216**, the example thrust limit determiner **218**, the example comparator **220** and/or, more generally, the example thrust ramping controller **134** of FIG. **2** could be implemented by one or more analog or digital circuit(s), logic circuits, programmable processor(s), application specific integrated circuit(s) (ASIC(s)), programmable logic device(s) (PLD(s)) and/or field programmable logic device(s) (FPLD(s)). When reading any of the apparatus or system claims of this patent to cover a purely software and/or firmware implementation, at least one of the example laser ranging unit **210**,

the example thrust ramping manager **204**, the example data store **206**, the example alarm controller **208**, the example signal processor **210**, the example airflow velocity determiner **212**, the example airspeed determiner **214**, the example crosswind determiner **216**, the example thrust limit determiner **218**, the example comparator **220**
5 is/are hereby expressly defined to include a tangible computer readable storage device or storage disk such as a memory, a digital versatile disk (DVD), a compact disk (CD), a Blu-ray disk, etc. storing the software and/or firmware. Further still, the example thrust ramping controller **134** of FIG. **1** may include one or more elements, processes and/or devices in addition to, or instead of, those illustrated in FIG. **2**,
10 and/or may include more than one of any or all of the illustrated elements, processes and devices.

A flowchart representative of an example method **300** for implementing the thrust ramping controller **134** of FIGS. **1** and **2** is shown in FIGS. **3A** and **3B**. In this example, the methods may be implemented using machine readable instructions that
15 comprise a program for execution by a processor such as the processor **512** shown in the example processor platform **500** discussed below in connection with FIG. **5**. The program may be embodied in software stored on a tangible computer readable storage medium such as a CD-ROM, a floppy disk, a hard drive, a digital versatile disk (DVD), a Blu-ray disk, or a memory associated with the processor **512**, but the entire
20 program and/or parts thereof could alternatively be executed by a device other than the processor **512** and/or embodied in firmware or dedicated hardware. Further, although the example program is described with reference to the flowchart illustrated in FIGS. **3A** and **3B**, many other methods of implementing the example thrust ramping controller **134** may alternatively be used. For example, the order of execution of the
25 blocks may be changed, and/or some of the blocks described may be changed, eliminated, or combined.

As mentioned above, the example process of FIGS. **3A** and **3B** may be implemented using coded instructions (e.g., computer and/or machine readable instructions) stored on a tangible computer readable storage medium such as a hard
30 disk drive, a flash memory, a read-only memory (ROM), a compact disk (CD), a digital

versatile disk (DVD), a cache, a random-access memory (RAM) and/or any other storage device or storage disk in which information is stored for any duration (e.g., for extended time periods, permanently, for brief instances, for temporarily buffering, and/or for caching of the information). As used herein, the term tangible computer readable storage medium is expressly defined to include any type of computer readable storage device and/or storage disk and to exclude propagating signals and to exclude transmission media. As used herein, "tangible computer readable storage medium" and "tangible machine readable storage medium" are used interchangeably. Additionally or alternatively, the example processes of FIGS. 3A and 3B may be implemented using coded instructions (e.g., computer and/or machine readable instructions) stored on a non-transitory computer and/or machine readable medium such as a hard disk drive, a flash memory, a read-only memory, a compact disk, a digital versatile disk, a cache, a random-access memory and/or any other storage device or storage disk in which information is stored for any duration (e.g., for extended time periods, permanently, for brief instances, for temporarily buffering, and/or for caching of the information). As used herein, the term non-transitory computer readable medium is expressly defined to include any type of computer readable storage device and/or storage disk and to exclude propagating signals and to exclude transmission media. As used herein, when the phrase "at least" is used as the transition term in a preamble of a claim, it is open-ended in the same manner as the term "comprising" is open ended.

The method **300** of FIGS. 3A and 3B begins at block **302** when the thrust ramping manager **204** receives the reference crosswind speed (block **302**). For example, the thrust ramping manager **204** of the illustrated example receives the reference crosswind speed from the input/output interface **138** of the cockpit **115**. In some examples, the pilot receives the reference crosswind speed (e.g., **15** knots) from a traffic control tower. The thrust ramping manager **204** may store the reference crosswind speed in the data store **206**. The pilot may load the aircraft **100** based on runway length and engine thrust availability due to the reference crosswind speed

provided by the tower. In some examples, the pilot may add a crosswind buffer value (e.g., of **5** knots) to the reference crosswind speed.

The thrust ramping controller **134** measures a crosswind speed (block **304**). For example, the thrust ramping system **102** of the illustrated example measures the crosswind speed when the aircraft **100** is taxiing (e.g., stationary). The crosswind determiner **216** measures the crosswind speed based on an airflow velocity vector provided by the airflow velocity determiner **212** and communicates the measured crosswind speed to the thrust ramping manager **204**.

Next, the thrust ramping manager **204** compares the reference crosswind speed and the measured crosswind speed (block **306**). The thrust ramping manager **204** then determines if the reference crosswind speed is less than the measured crosswind speed (block **308**). If the reference crosswind speed is less than the measured crosswind speed at block **308**, the thrust ramping manager **204** causes the alarm controller **208** to initiate a return to gate warning (block **310**). For example, the alarm controller **208** may initiate an alarm in the cockpit **115** via the input/output interface **138** (e.g., an audible alarm, a visual indicator, etc.). For example, during taxi, if the thrust ramping system **102** measures a crosswind speed of **18** knots that is greater than the reference crosswind speed of **15** knots, the pilot is alerted to return to the gate to decrease a payload.

If the reference crosswind speed is less than the measured crosswind speed at block **308**, the thrust limit determiner **218** compares the measured crosswind speed to a crosswind threshold range (block **312**). For example, the thrust limit determiner **218** may determine/retrieve the crosswind threshold range from the data store **206**. For example, the crosswind threshold range may be between approximately **12** knots (e.g., a lower limit) and **25** knots (e.g., an upper limit).

The thrust limit determiner **218** determines if the measured crosswind speed is greater than a lower limit of the crosswind threshold range (block **314**). If the thrust limit determiner **218** determines that the measured crosswind speed is not greater than the lower limit of the crosswind threshold range at block **414**, the thrust limit determiner **218** deactivates thrust ramping (block **316**). For example, if the measured

crosswind speed is less than **12** knots, the thrust ramping manager **204** deactivates thrust ramping.

If the thrust limit determiner **218** determines that the measured crosswind speed is greater than the lower limit of the crosswind threshold range at block **414**, the thrust limit determiner **218** activates thrust ramping (block **318**). When thrust ramping is activated, the thrust limit determiner **218** determines if the measured crosswind speed is greater than an upper limit of the crosswind threshold range (block **320**). If the crosswind speed is greater than the upper limit of the crosswind threshold range at block **320**, the thrust ramping manager **204** selects or activates a full thrust ramping schedule (block **322**). If the crosswind speed is not greater than the upper limit of the crosswind threshold range at block **320**, the thrust ramping manager **204** selects or activates a partial thrust ramping schedule (block **324**). For example, thrust ramping manager **204** selects a partial thrust ramping schedule associated with the measured crosswind speed.

The airspeed determiner **214** then measures the airspeed of the aircraft **100** (block **326**). For example, the airspeed determiner **214** communicates the airspeed to the thrust ramping manager **204**. The thrust limit determiner **218** determines if the selected thrust ramping schedule requires a thrust output limit at the measured airspeed (block **328**). If the thrust limit determiner **218** determines that the selected thrust ramping schedule does not require a thrust output limit associated with the measured airspeed at block **328**, the thrust ramping manager **204** deactivates the selected thrust ramping schedule and the process ends. In some such examples, when the thrust ramping is deactivated, the electronic engine controller **116** sets a thrust output of the first engine **110** and the second engine **112** as a thrust command input from thrust lever **114**.

If the thrust limit determiner **218** determines that the selected thrust ramping schedule requires a thrust output limit at block **328**, the thrust limit determiner **218** determines a thrust output limit that corresponds to the measured airspeed from the selected thrust ramping schedule (block **330**). For example, the thrust limit determiner **218** retrieves a thrust output limit corresponding to the measured airspeed from a

look-up table associated with the selected thrust ramping schedule. The thrust ramping manager **204** sets the thrust output limit as a maximum allowable thrust output of the first engine **110** and the second engine **112** (block **332**). For example, the method **300** then returns to block **326** and continues to adjust a thrust output limit as the airspeed changes (e.g., increases) based on the selected thrust ramping schedule until the measured airspeed at block **328** does not require a thrust output limit. For example, a thrust output limit is not needed when the measured airspeed is such that the crosswind no longer impacts performance characteristics of the first engine **110** and the second engine **112**.

FIG. **4** is an example graph **400** representative of example thrust ramping schedules that may be used to implement the example thrust ramping controller **134** of FIGS. **1** and **2**. For example, the graph **400** illustrates a first thrust ramping schedule **402** associated with a first crosswind speed (e.g., **15** knots), a second thrust ramping schedule **404** associated with a second crosswind speed (e.g., **20** knots), a third thrust ramping schedule **406** associated with a third crosswind speed (e.g., **25** knots), and a fourth thrust ramping schedule **408** associated with a fourth crosswind speed (e.g., **30** knots). For example, the first, second and third ramping schedules **402-406** of the illustrated example provide partial thrust ramping and the fourth thrust ramping schedule **408** of the illustrated example provides full thrust ramping.

The graph **400** of the illustrated example provides a thrust limit vs. airspeed graph for the various example thrust ramping schedules **402-408**. In the illustrated example, the y-axis of the graph represents thrust output limit values **410** as a percentage of full available thrust and the x-axis represents airspeed **412** (e.g., a forward vector of the relative velocity of the aircraft **100**). Thus, for each thrust ramping schedules **402-408**, the thrust output limit **410** are provided as a function of the airspeed **412**.

During operation, for example, the thrust limit determiner **218** of the illustrated example determines a thrust output limit **410** as a function of the measured airspeed **412** for a selected one of the thrust ramping schedules **402-408**. For example, during operation, when the thrust ramping system **102** measures a crosswind speed of **15**

knots when the aircraft **100** is stationary or taxiing, the thrust ramping manager **204** selects or activates the first thrust ramping schedule **402** (e.g., a partial thrust ramping schedule). The thrust limit determiner **218** receives the airspeed **412** from the airspeed determiner **214** and employs the graph **400** to determine a thrust output limit **410** associated with the selected thrust ramping schedules **402-408** based on the measured airspeed **412**. Thus, when the first thrust ramping schedule **402** is selected and the measured airspeed **412** from the airspeed determiner **214** is between **0** knots and **15** knots, the thrust limit determiner **218** determines that the thrust output limit **410** is **80** percent engine thrust. As the airspeed **412** increases from **15** knots to approximately **20** knots, the thrust limit determiner **218** varies the thrust output limit **410** from **80** percent engine thrust to **100** percent engine thrust. Thus, the first thrust ramping schedule **402** of the illustrated example enables the first engine **110** and the second engine **112** to achieve full thrust when the airspeed **412** is approximately **20** knots.

On the contrary, the second thrust ramping schedule **404** limits thrust output to **65** percent engine thrust when the airspeed **412** is between approximately **0** knots and **15** knots and allows the first engine **110** and the second engine **112** to achieve **100** percent engine thrust when the airspeed **412** is approximately **45** knots. Thus, the second thrust ramping schedule **404** provides a more gradual thrust increase to **100** percent engine thrust than the first thrust ramping schedule **402**. The example thrust ramping schedules **402-408** of the illustrated example may be configured for different types of aircraft engines and/or may differ based on performance characteristics of different engines.

FIG. **5** is a block diagram of an example processor platform capable of executing instructions to implement the method **300** of FIGS. **3A** and **3B** and the example thrust ramping controller **134** of FIGS. **1** and **2**. The processor platform **500** can be, for example, a server, a personal computer, a mobile device (e.g., a cell phone, a smart phone, a tablet such as an iPadTM), a personal digital assistant (PDA), an Internet appliance, a DVD player, a CD player, a digital video recorder, a Blu-ray player, or any other type of computing device.

The processor platform **500** of the illustrated example includes a processor **512**. The processor **512** of the illustrated example is hardware. For example, the processor **512** can be implemented by one or more integrated circuits, logic circuits, microprocessors or controllers from any desired family or manufacturer.

5 The processor **512** of the illustrated example includes a local memory **513** (e.g., a cache). The processor **512** of the illustrated example is in communication with a main memory including a volatile memory **514** and a non-volatile memory **516** via a bus **518**. The volatile memory **514** may be implemented by Synchronous Dynamic Random Access Memory (SDRAM), Dynamic Random Access Memory (DRAM),
10 RAMBUS Dynamic Random Access Memory (RDRAM) and/or any other type of random access memory device. The non-volatile memory **516** may be implemented by flash memory and/or any other desired type of memory device. Access to the main memory **514**, **516** is controlled by a memory controller.

 The processor platform **500** of the illustrated example also includes an interface
15 circuit **520**. The interface circuit **520** may be implemented by any type of interface standard, such as an Ethernet interface, a universal serial bus (USB), and/or a PCI express interface.

 In the illustrated example, one or more input devices **522** are connected to the interface circuit **520**. The input device(s) **522** permit(s) a user to enter data and
20 commands into the processor **512**. The input device(s) can be implemented by, for example, an audio sensor, a microphone, a camera (still or video), a keyboard, a button, a mouse, a touchscreen, a track-pad, a trackball, isopoint and/or a voice recognition system.

 One or more output devices **524** are also connected to the interface circuit **520** of
25 the illustrated example. The output devices **524** can be implemented, for example, by display devices (e.g., a light emitting diode (LED), an organic light emitting diode (OLED), a liquid crystal display, a cathode ray tube display (CRT), a touchscreen, a tactile output device, and/or speakers). The interface circuit **520** of the illustrated example, thus, typically includes a graphics driver card, a graphics driver chip or a
30 graphics driver processor.

The interface circuit **520** of the illustrated example also includes a communication device such as a transmitter, a receiver, a transceiver, a modem and/or network interface card to facilitate exchange of data with external machines (e.g., computing devices of any kind) via a network **526** (e.g., an Ethernet connection,
5 a digital subscriber line (DSL), a telephone line, coaxial cable, a cellular telephone system, etc.).

The processor platform **500** of the illustrated example also includes one or more mass storage devices **528** for storing software and/or data. Examples of such mass storage devices **528** include floppy disk drives, hard drive disks, compact disk drives,
10 Blu-ray disk drives, RAID systems, and digital versatile disk (DVD) drives.

Coded instructions **532** to implement the methods of FIGS. **3A** and **3B** may be stored in the mass storage device **528**, in the volatile memory **514**, in the non-volatile memory **516**, and/or on a removable tangible computer readable storage medium such as a CD or DVD.

15 Although certain example methods, apparatus and articles of manufacture have been disclosed herein, the scope of coverage of this patent is not limited thereto. On the contrary, this patent covers all methods, apparatus and articles of manufacture fairly falling within the scope of the claims of this patent.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A thrust control system for use with aircraft comprising:

5 a sensor to measure a crosswind speed; and

a thrust ramping manager to compare the measured crosswind speed to a crosswind threshold range, the thrust ramping manager to activate a partial thrust ramping schedule during takeoff when the measured crosswind speed is within the crosswind threshold range, the partial thrust ramping
10 schedule being selected from a plurality of thrust ramping schedules.

2. The system of claim **1**, wherein the thrust ramping manager is to receive a reference crosswind speed.

3. The system of claim **2**, wherein the thrust ramping manager compares the reference crosswind speed and the measured crosswind speed.

15 **4.** The system of claim **3**, further including an alarm controller to initiate an alarm when the reference crosswind speed is less than the measured crosswind speed.

5. The system of any one of claims **1-4**, wherein the thrust ramping manager is to activate a full thrust ramping schedule during takeoff when the measured
20 crosswind speed is greater than an upper limit of the crosswind threshold range.

6. The system of claim **5**, wherein the thrust ramping manager is to deactivate thrust ramping when the measured crosswind speed is less than a lower limit of the crosswind threshold range.

7. A method for controlling thrust of an aircraft, the method comprising:

25 measuring a crosswind speed when the aircraft is taxiing;

comparing the measured crosswind speed to a crosswind threshold range;
and

activating a partial thrust ramping schedule during takeoff based on the
measured crosswind speed when the measured crosswind speed is within
the crosswind threshold range.

8. The method of claim **7**, further including applying a full thrust ramping schedule during takeoff when the measured crosswind speed is greater than an upper limit of the crosswind threshold range.

9. The method of claim **8**, further including deactivating thrust ramping during takeoff when the measured crosswind speed is less than a lower limit of the crosswind threshold range.

10. The method of any one of claims **7-9**, further including comparing a reference crosswind speed and the measured crosswind speed, and initiating an alarm when the reference crosswind speed is less than the measured crosswind speed.

11. The method of any one of claims **7-10**, wherein providing the partial thrust ramping schedule includes retrieving the partial thrust ramping schedule from a look-up table.

12. The method of any one of claims **7-11**, further including measuring an airspeed of the aircraft during takeoff, and varying a thrust output limit as a function of the measured airspeed.

13. The method of claim **12**, further including decreasing the thrust output limit as the measured airspeed increases.

14. A tangible computer-readable medium comprising instructions that, when executed, cause a machine to:

measure a crosswind speed;

compare the measured crosswind speed to a crosswind threshold range;
and

activate a partial thrust ramping schedule during takeoff based on the
measured crosswind speed when the measured crosswind speed is within
the crosswind threshold range.

15. The computer-readable medium as defined in claim **14** further including instructions that, when executed, cause the machine to apply a full thrust ramping schedule during takeoff when the measured crosswind speed is greater than an upper limit of the crosswind threshold range.

16. The computer-readable medium as defined in claim **15** further including instructions that, when executed, cause the machine to deactivate thrust ramping during takeoff when the measured crosswind speed is less than a lower limit of the crosswind threshold range.

17. The computer-readable medium as defined in any one of claims **14-16** further including instructions that, when executed, cause the machine to compare a reference crosswind speed and the measured crosswind speed, and initiate an alarm when the reference crosswind speed is less than the measured crosswind speed.

18. The computer-readable medium as defined in any one of claims **14-17** further including instructions that, when executed, cause the machine to retrieve the partial thrust ramping schedule corresponding to the measured crosswind speed from a predetermined look-up table.

19. The computer-readable medium as defined in any one of claims **14-18** further including instructions that, when executed, cause the machine to measure an

airspeed of an aircraft during takeoff, and vary a thrust output limit as a function of the measured airspeed.

- 20.** The computer-readable medium as defined in claim **19** further including instructions that, when executed, cause the machine to decrease the thrust output limit as the measured airspeed increases.

5

+

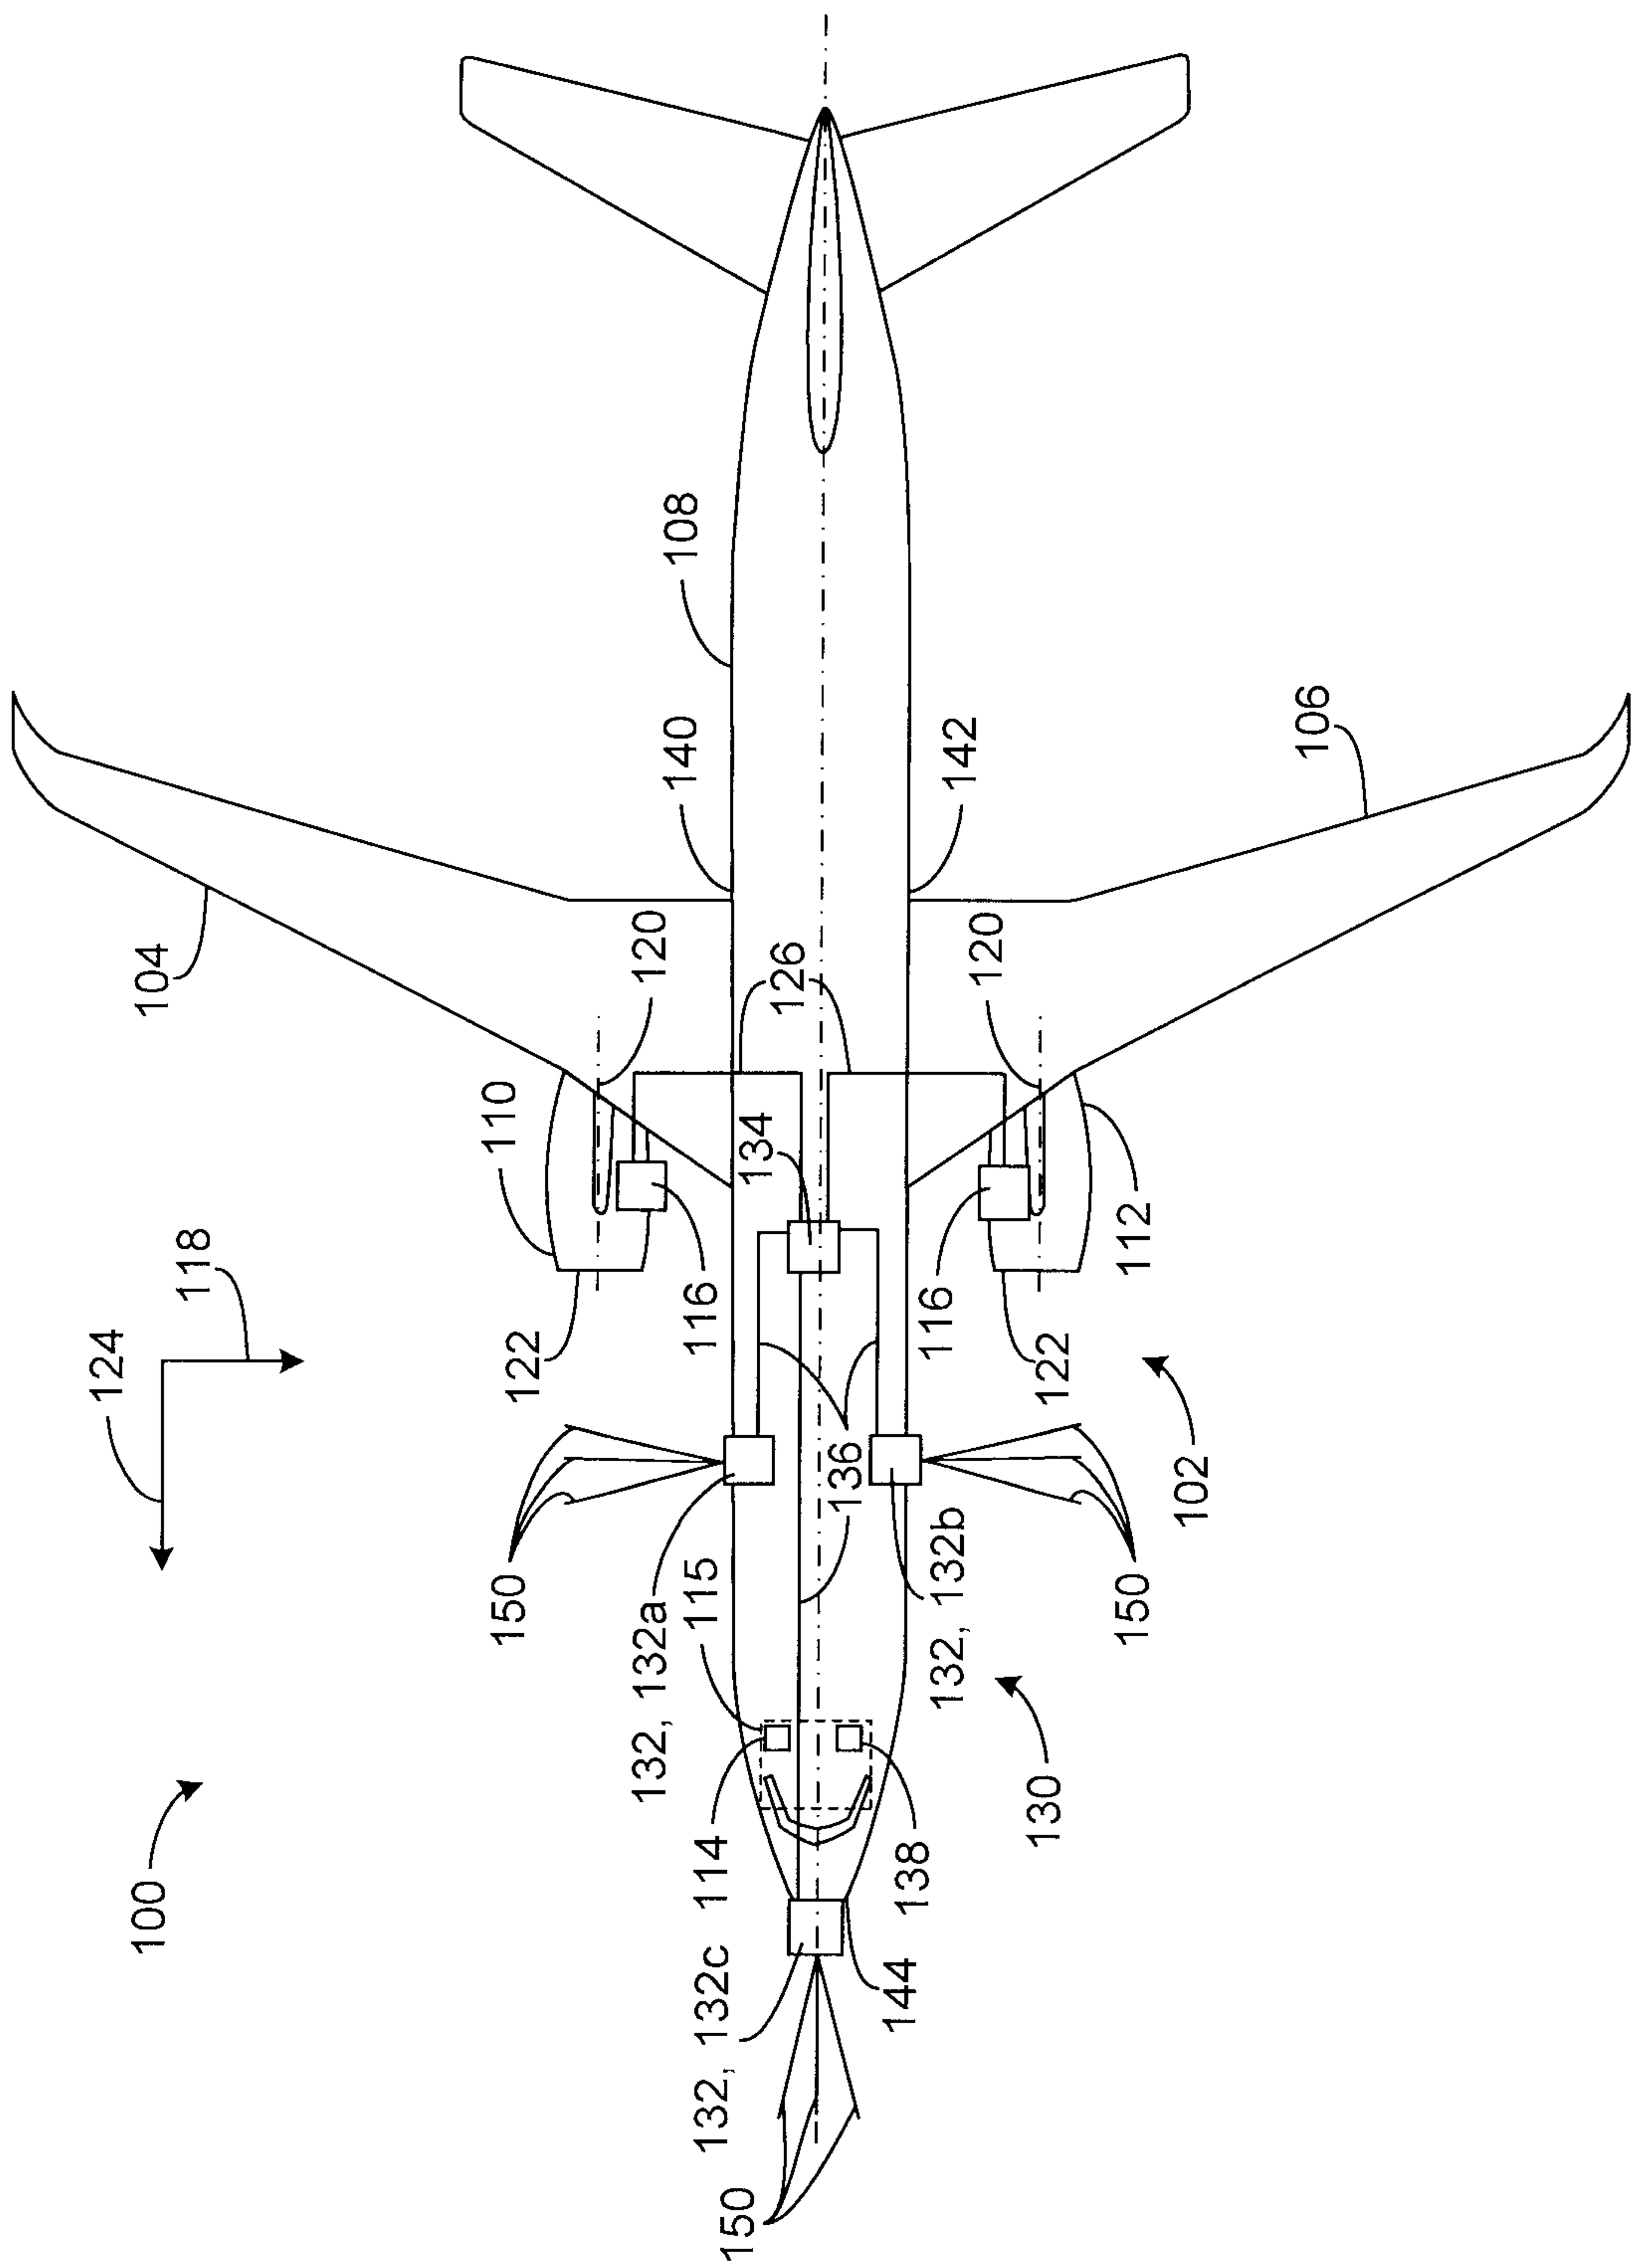


FIG. 1

+

+

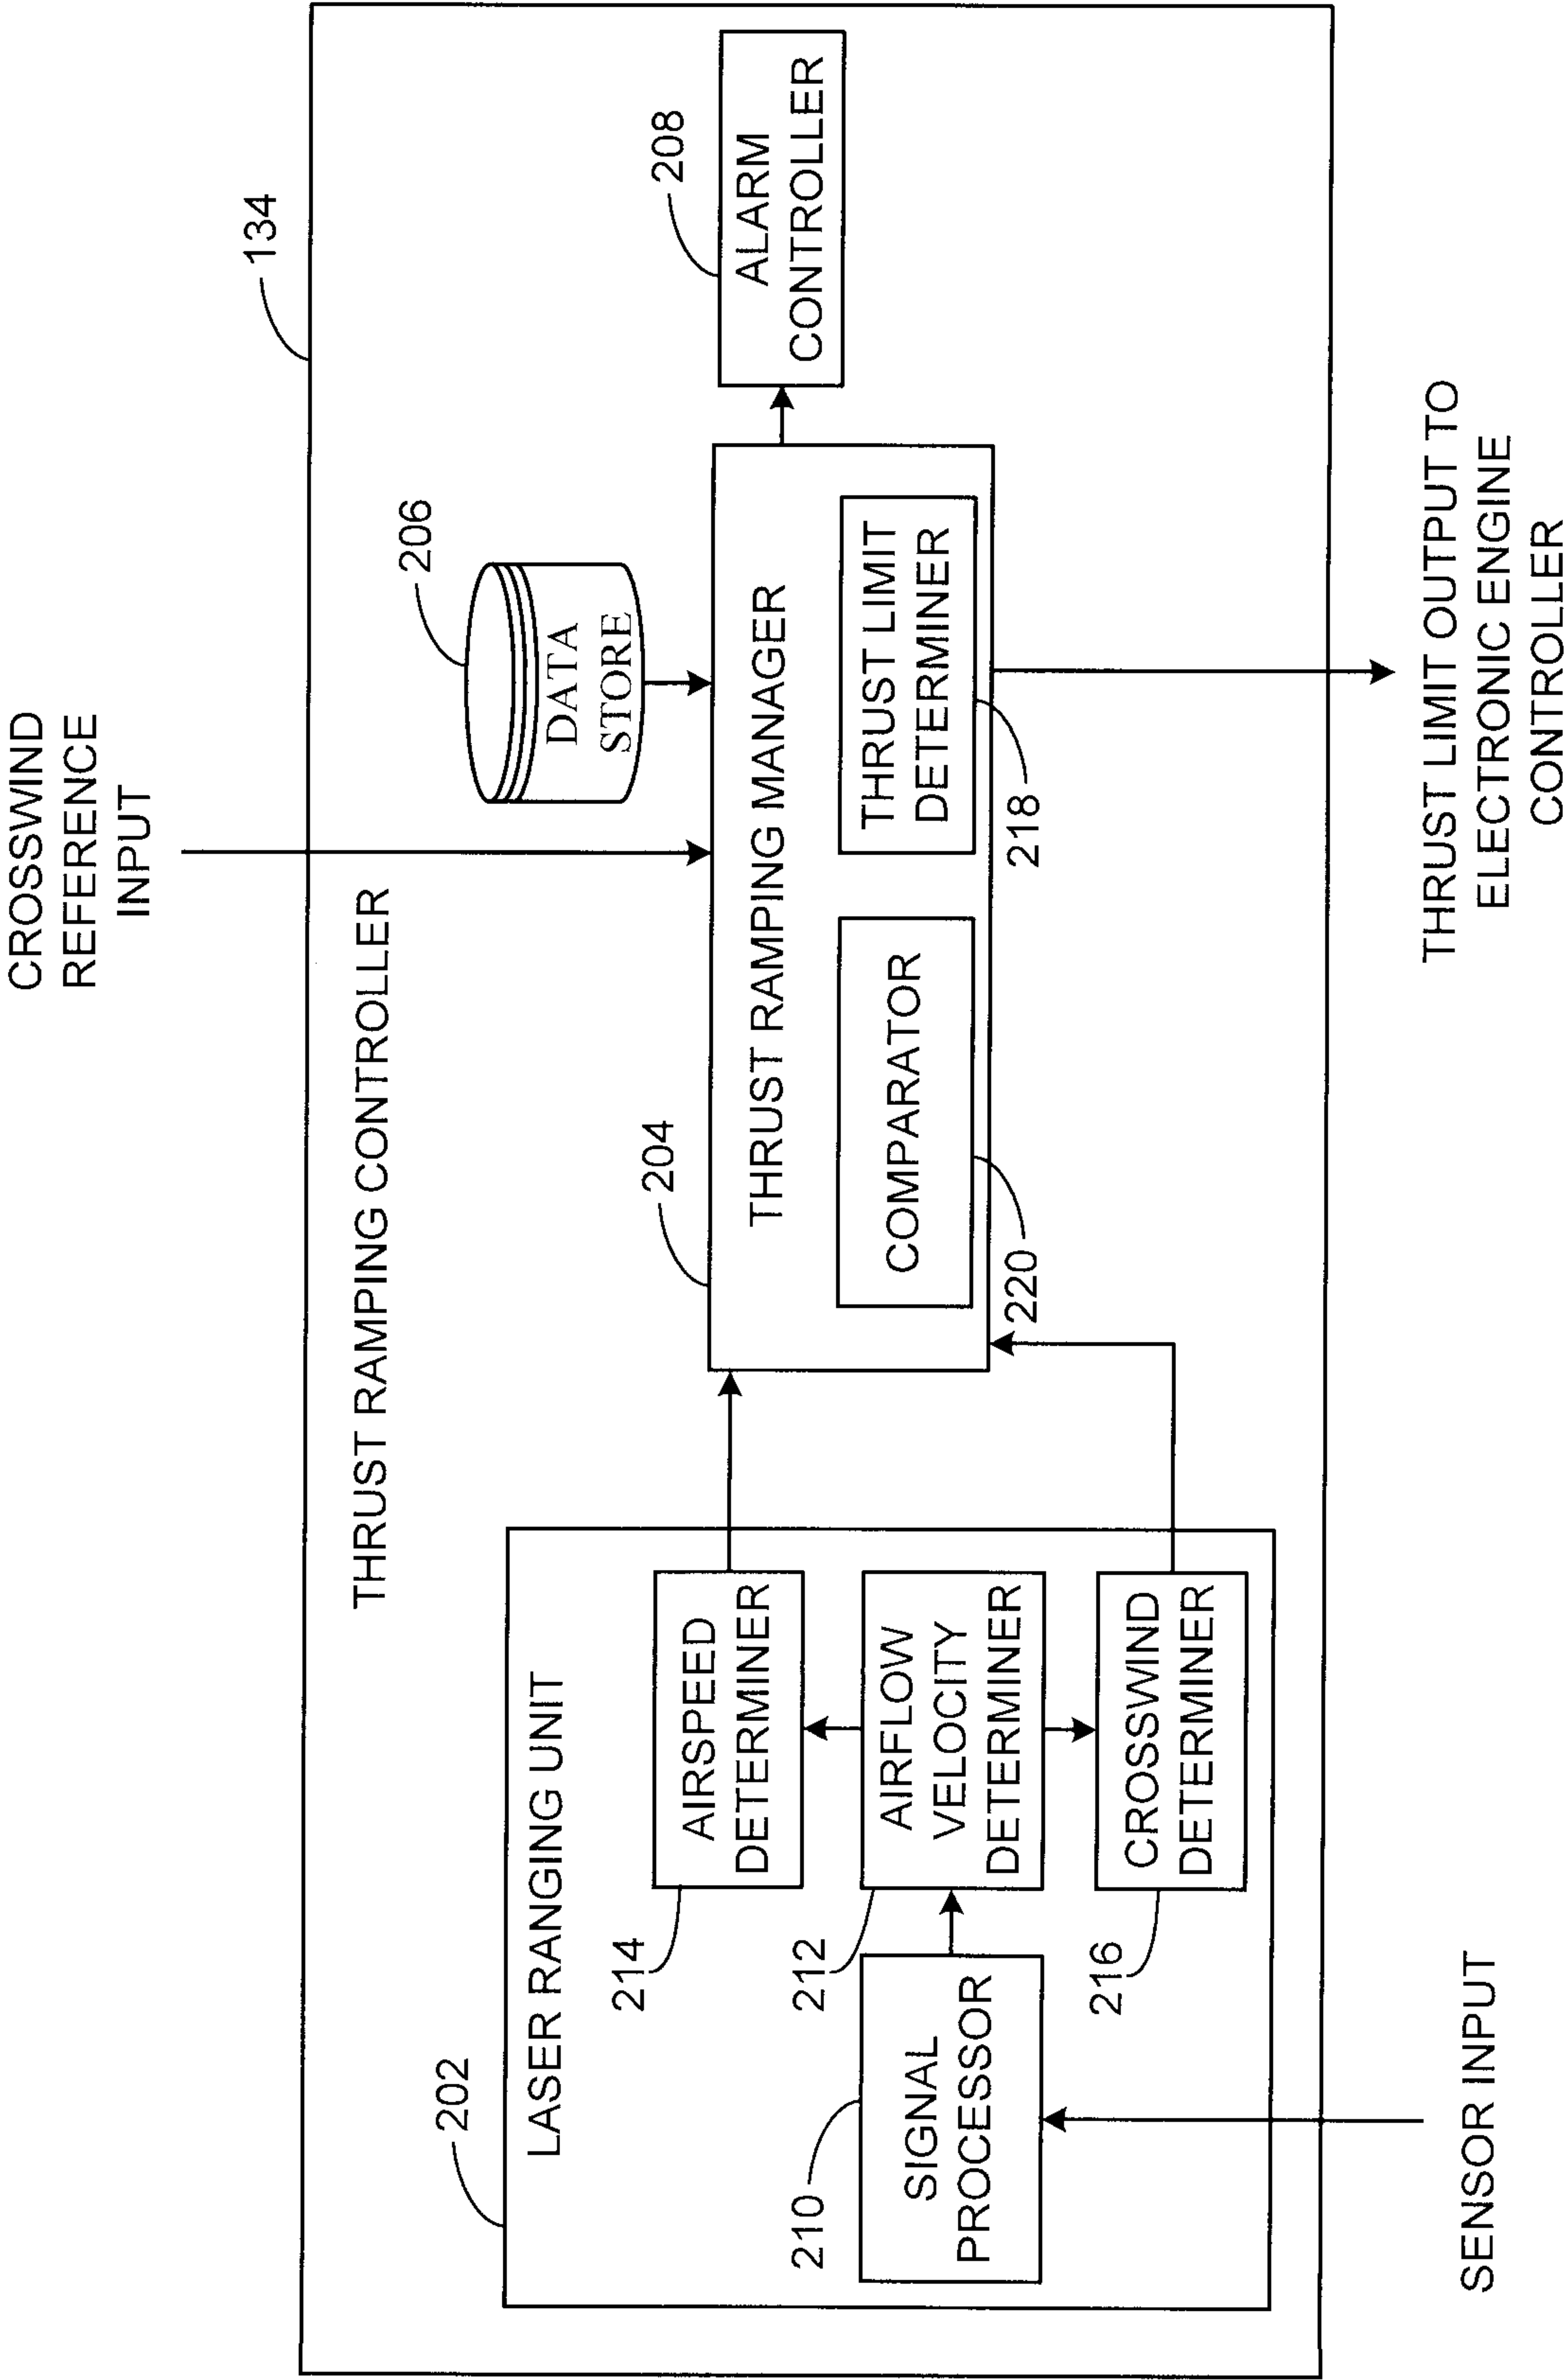


FIG. 2

+

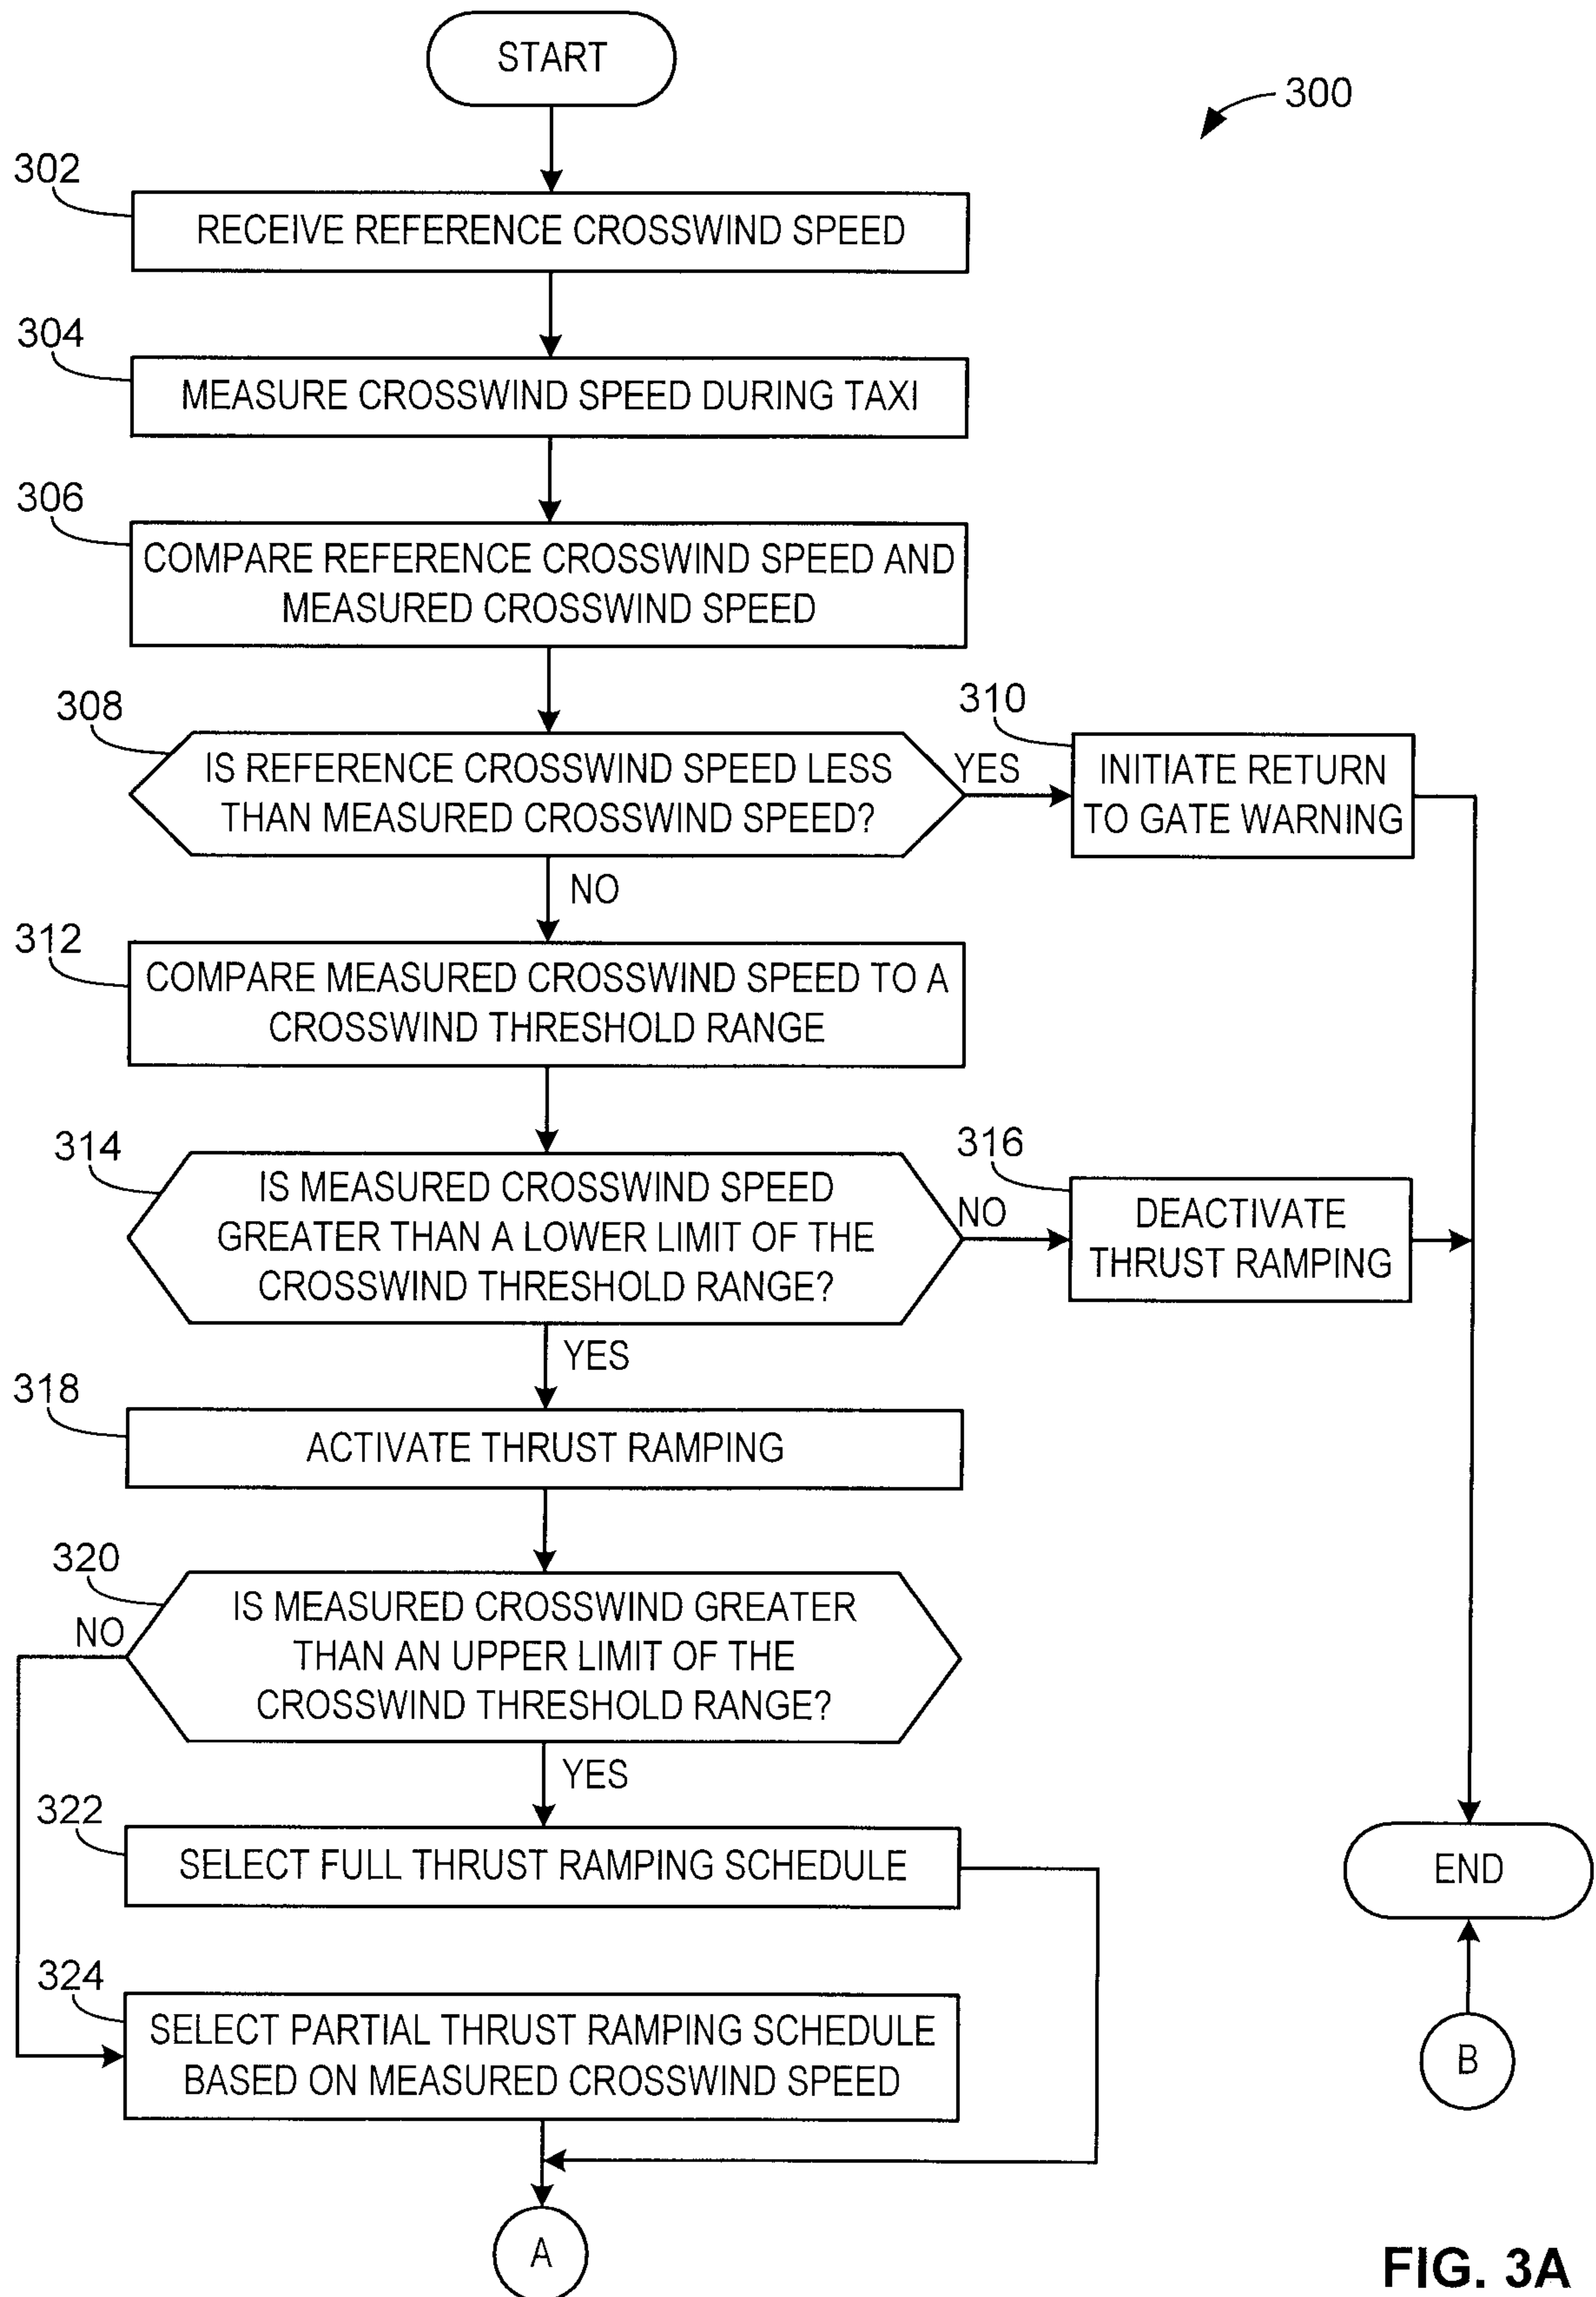
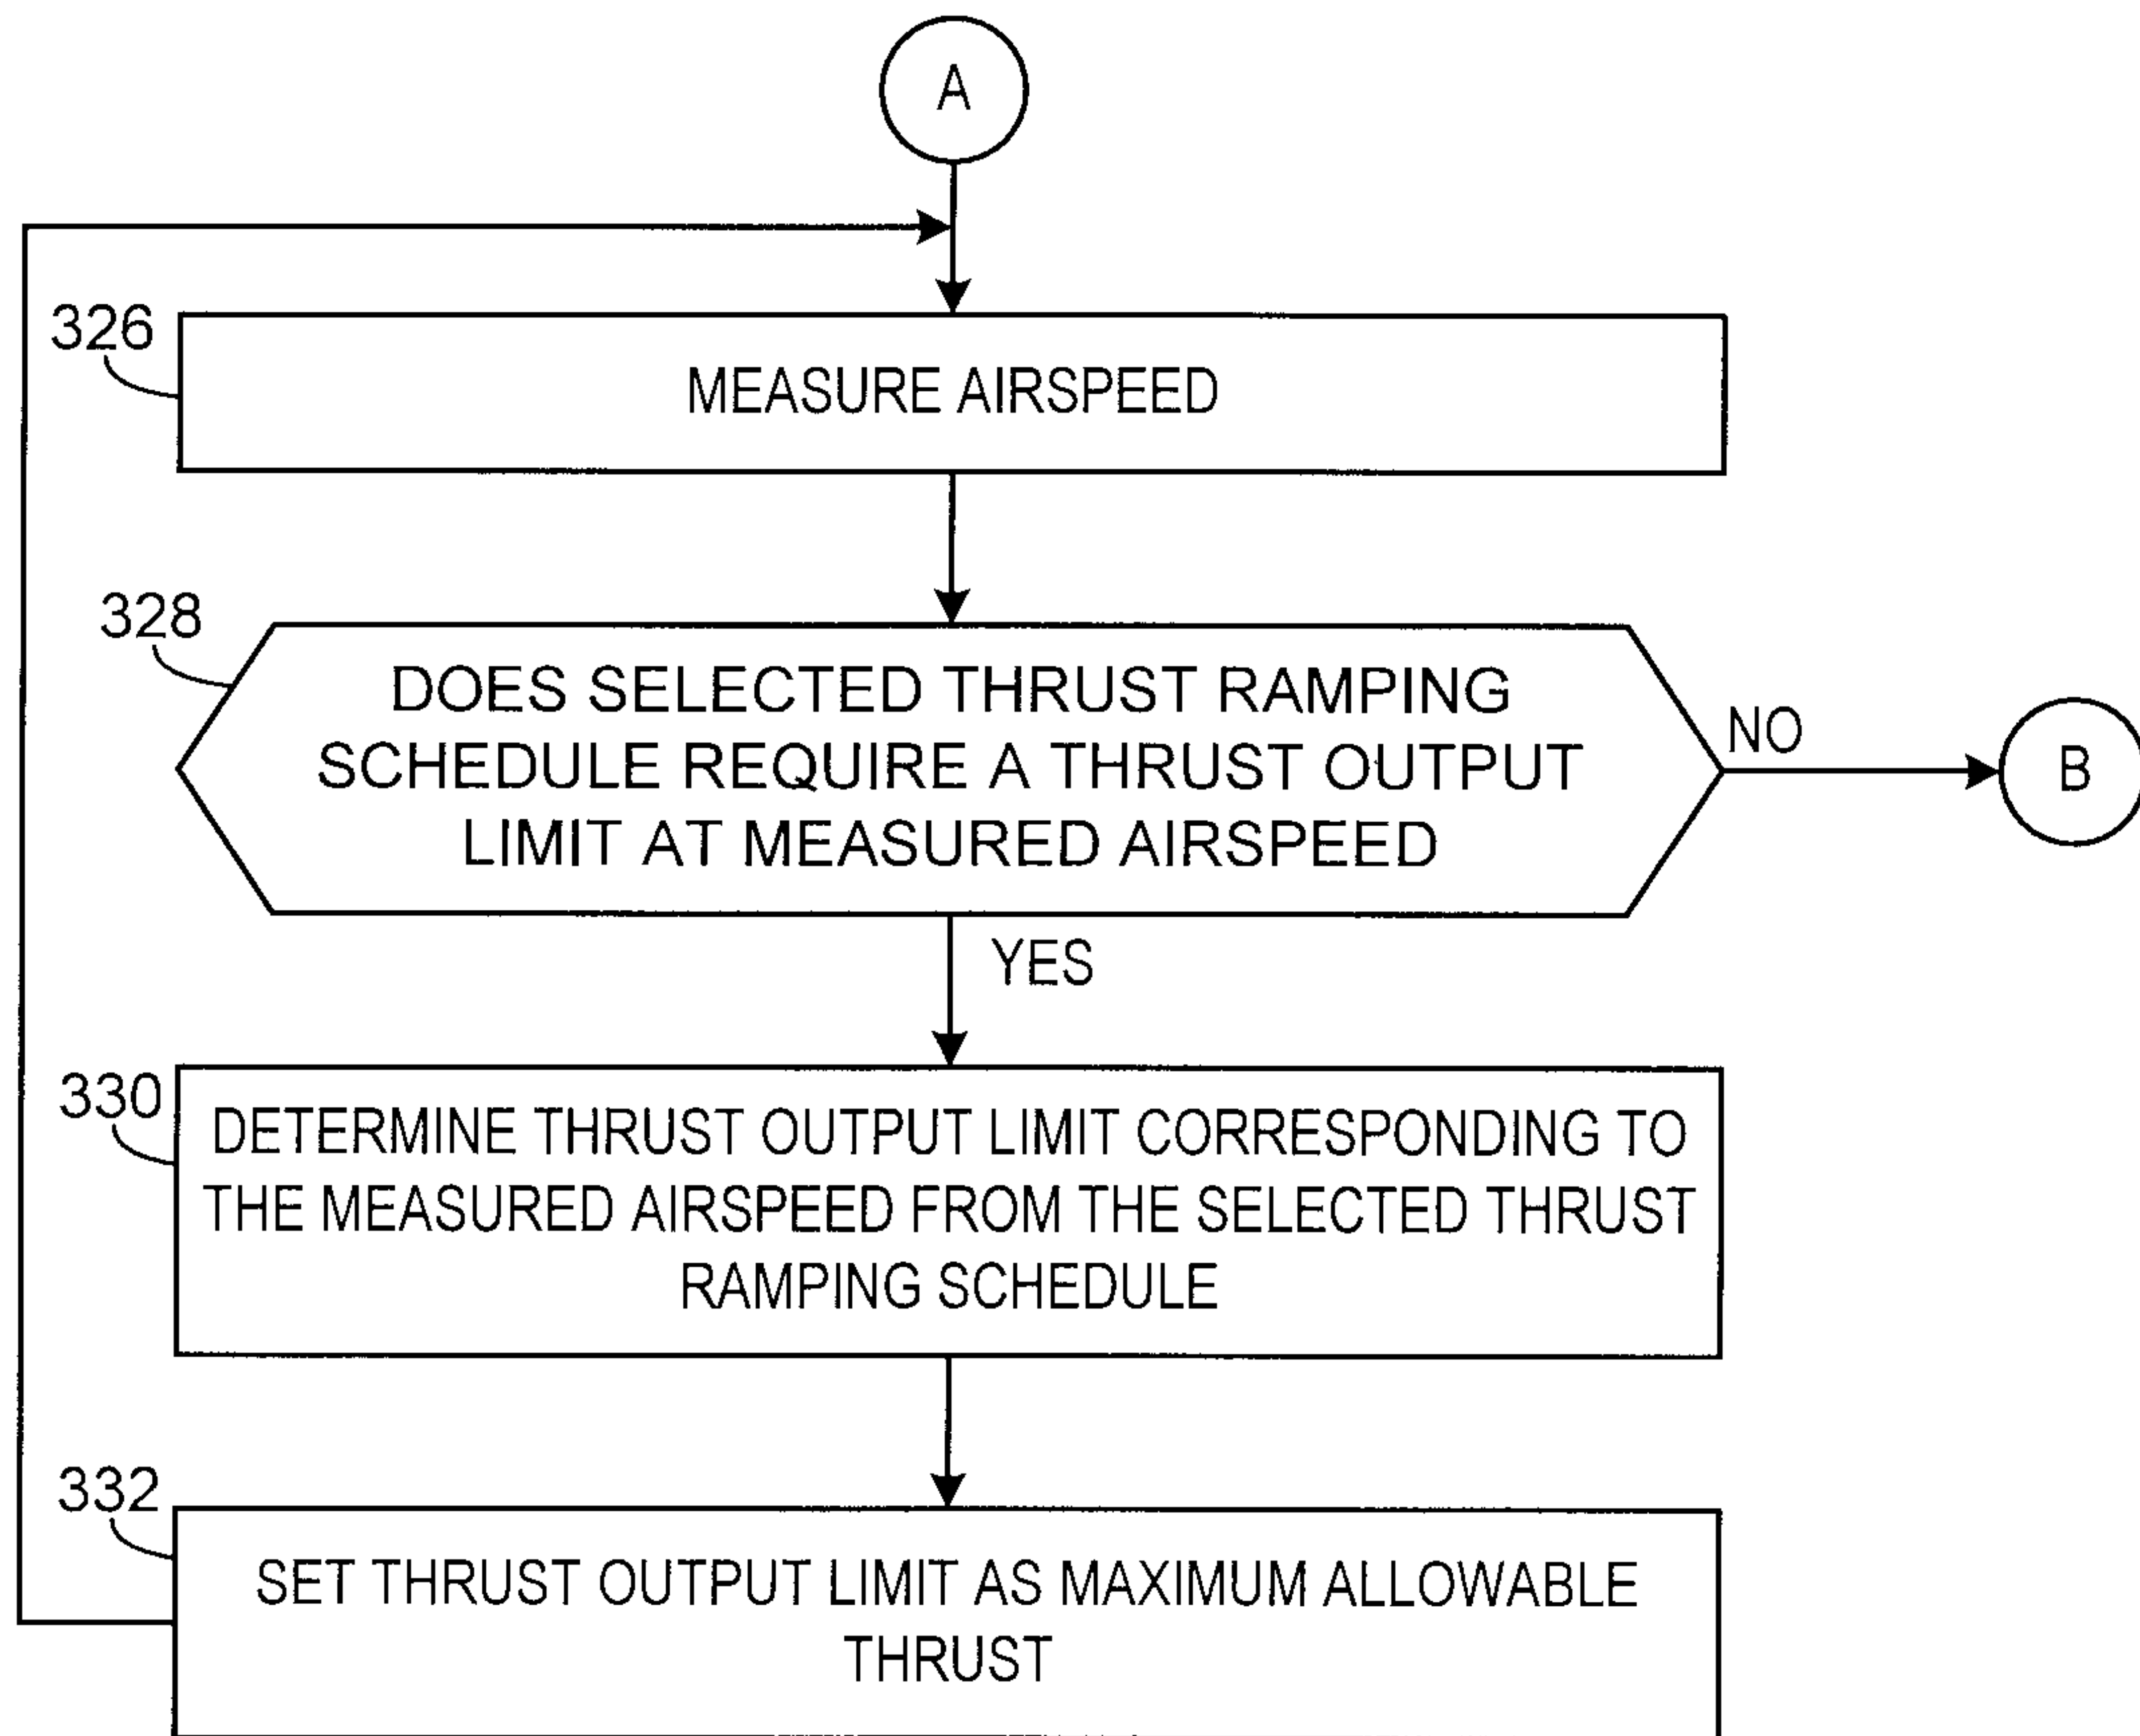


FIG. 3A

**FIG. 3B**

+

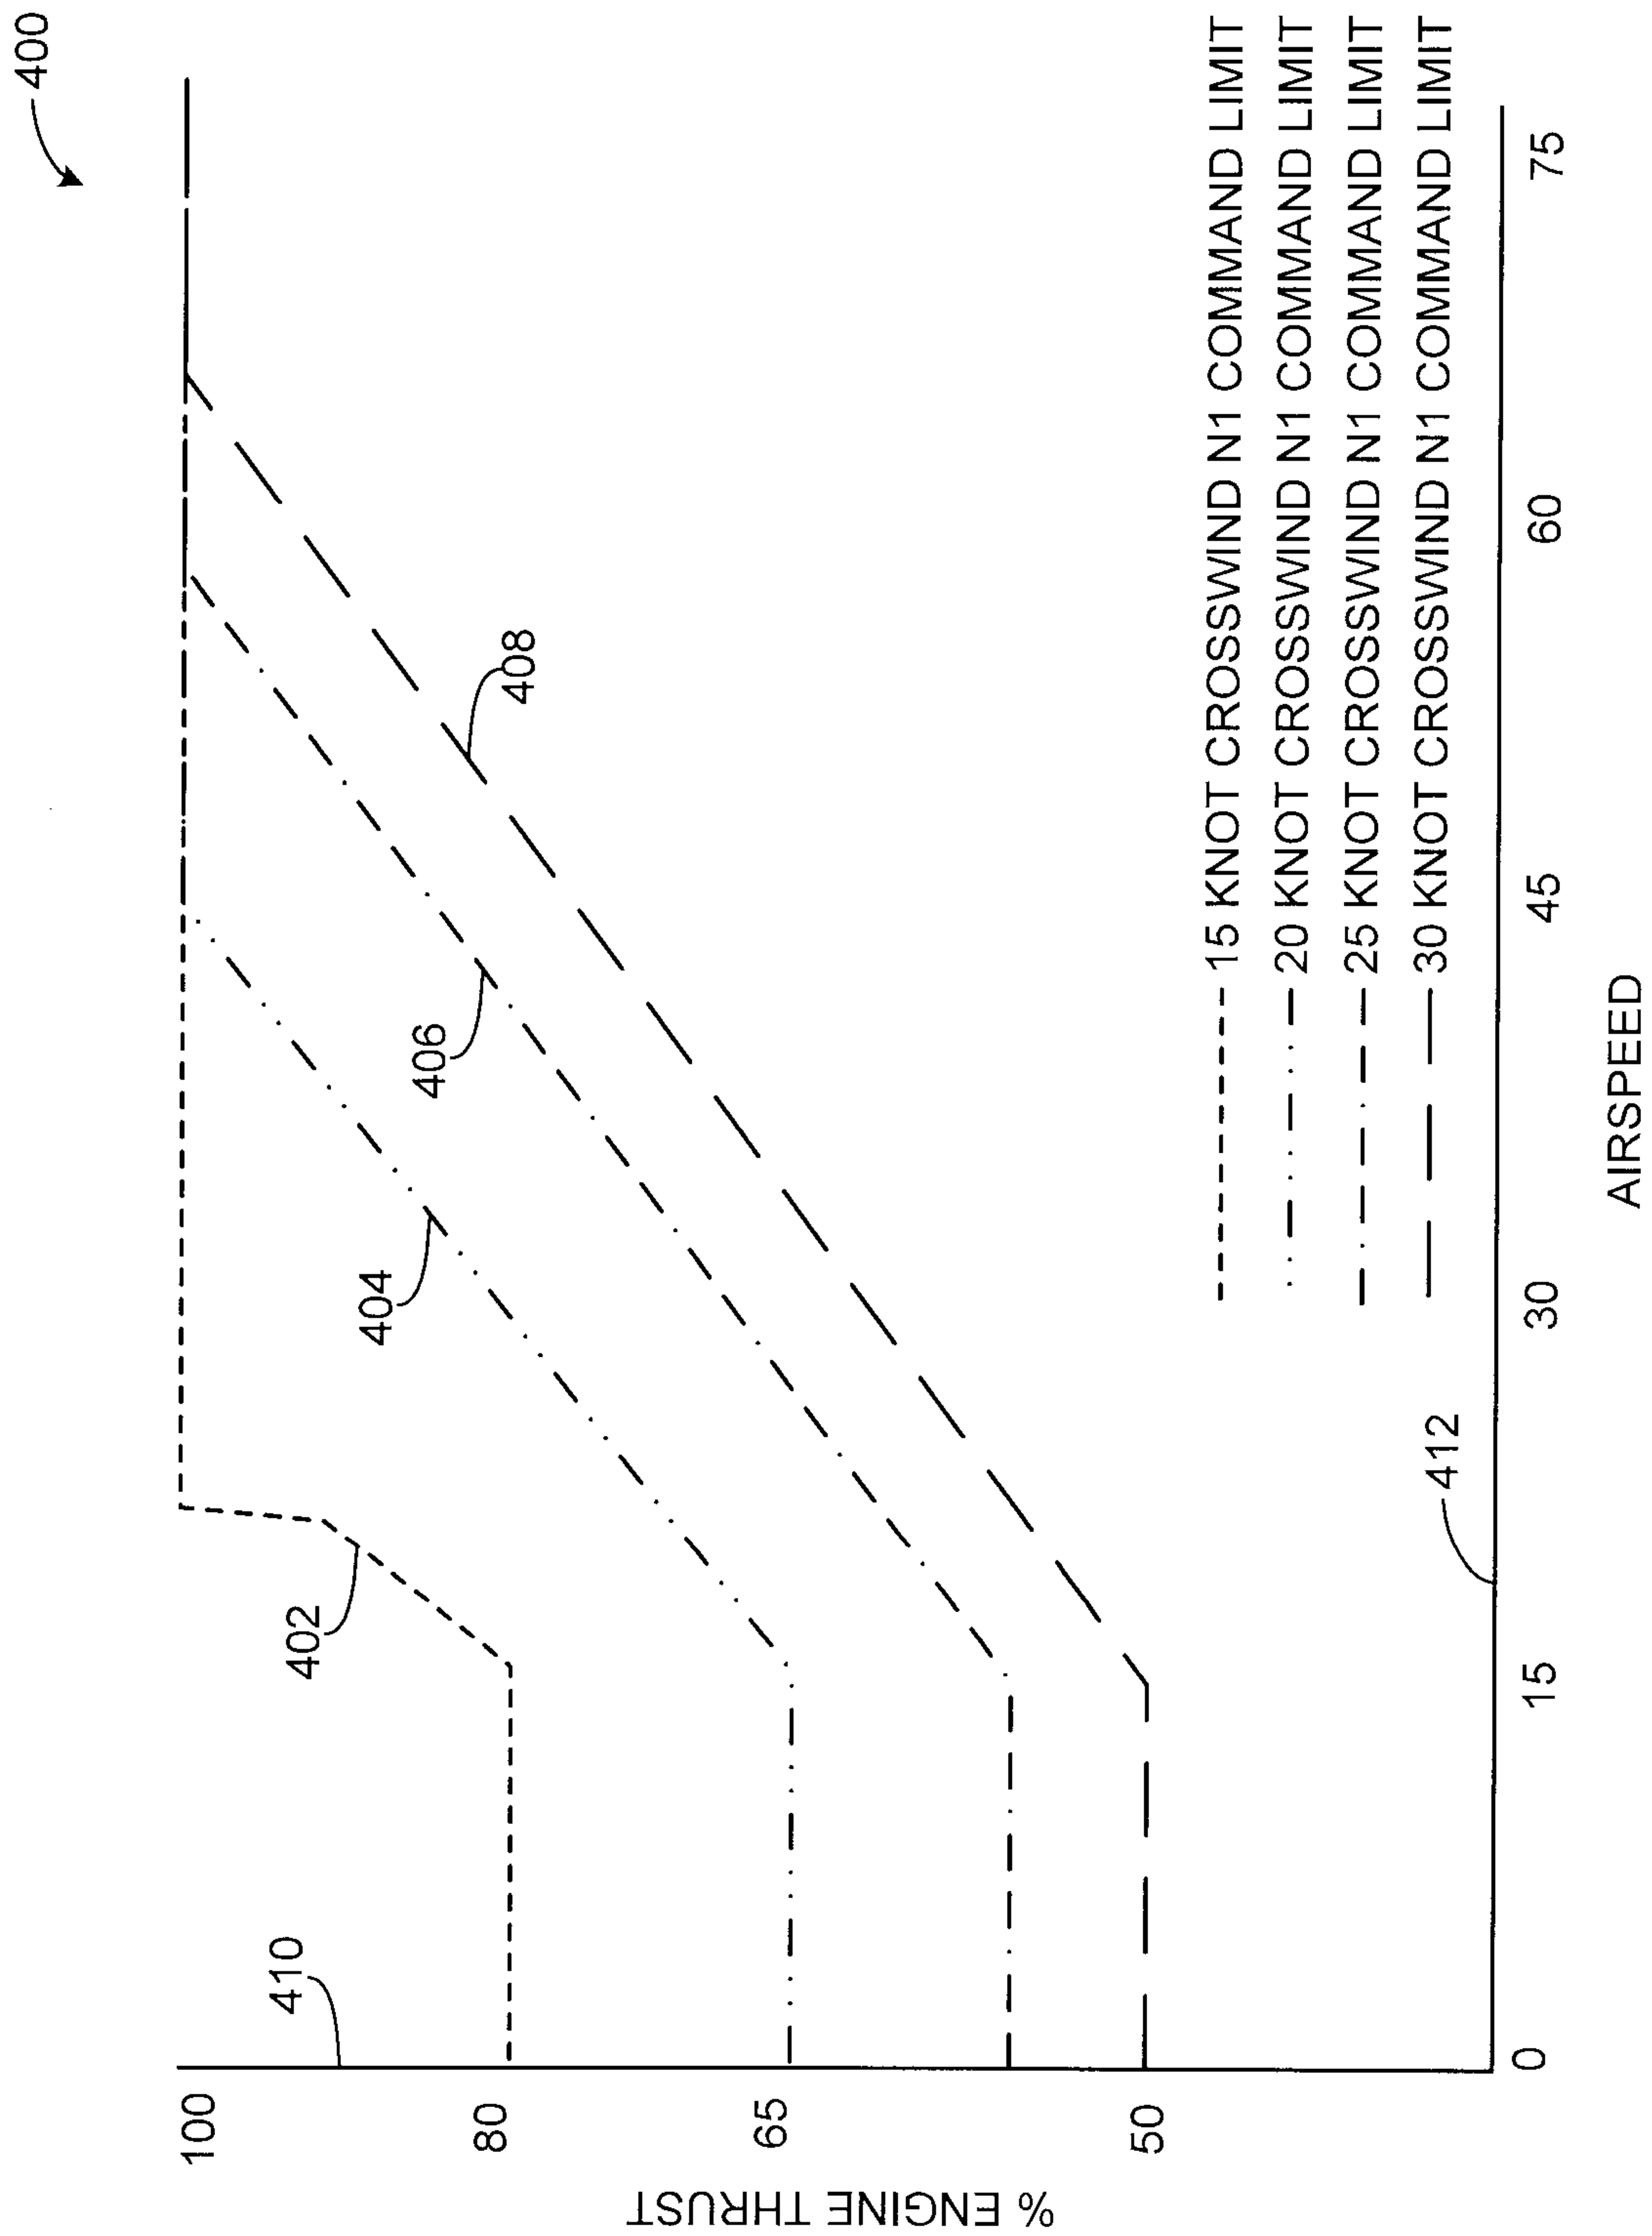


FIG. 4

+

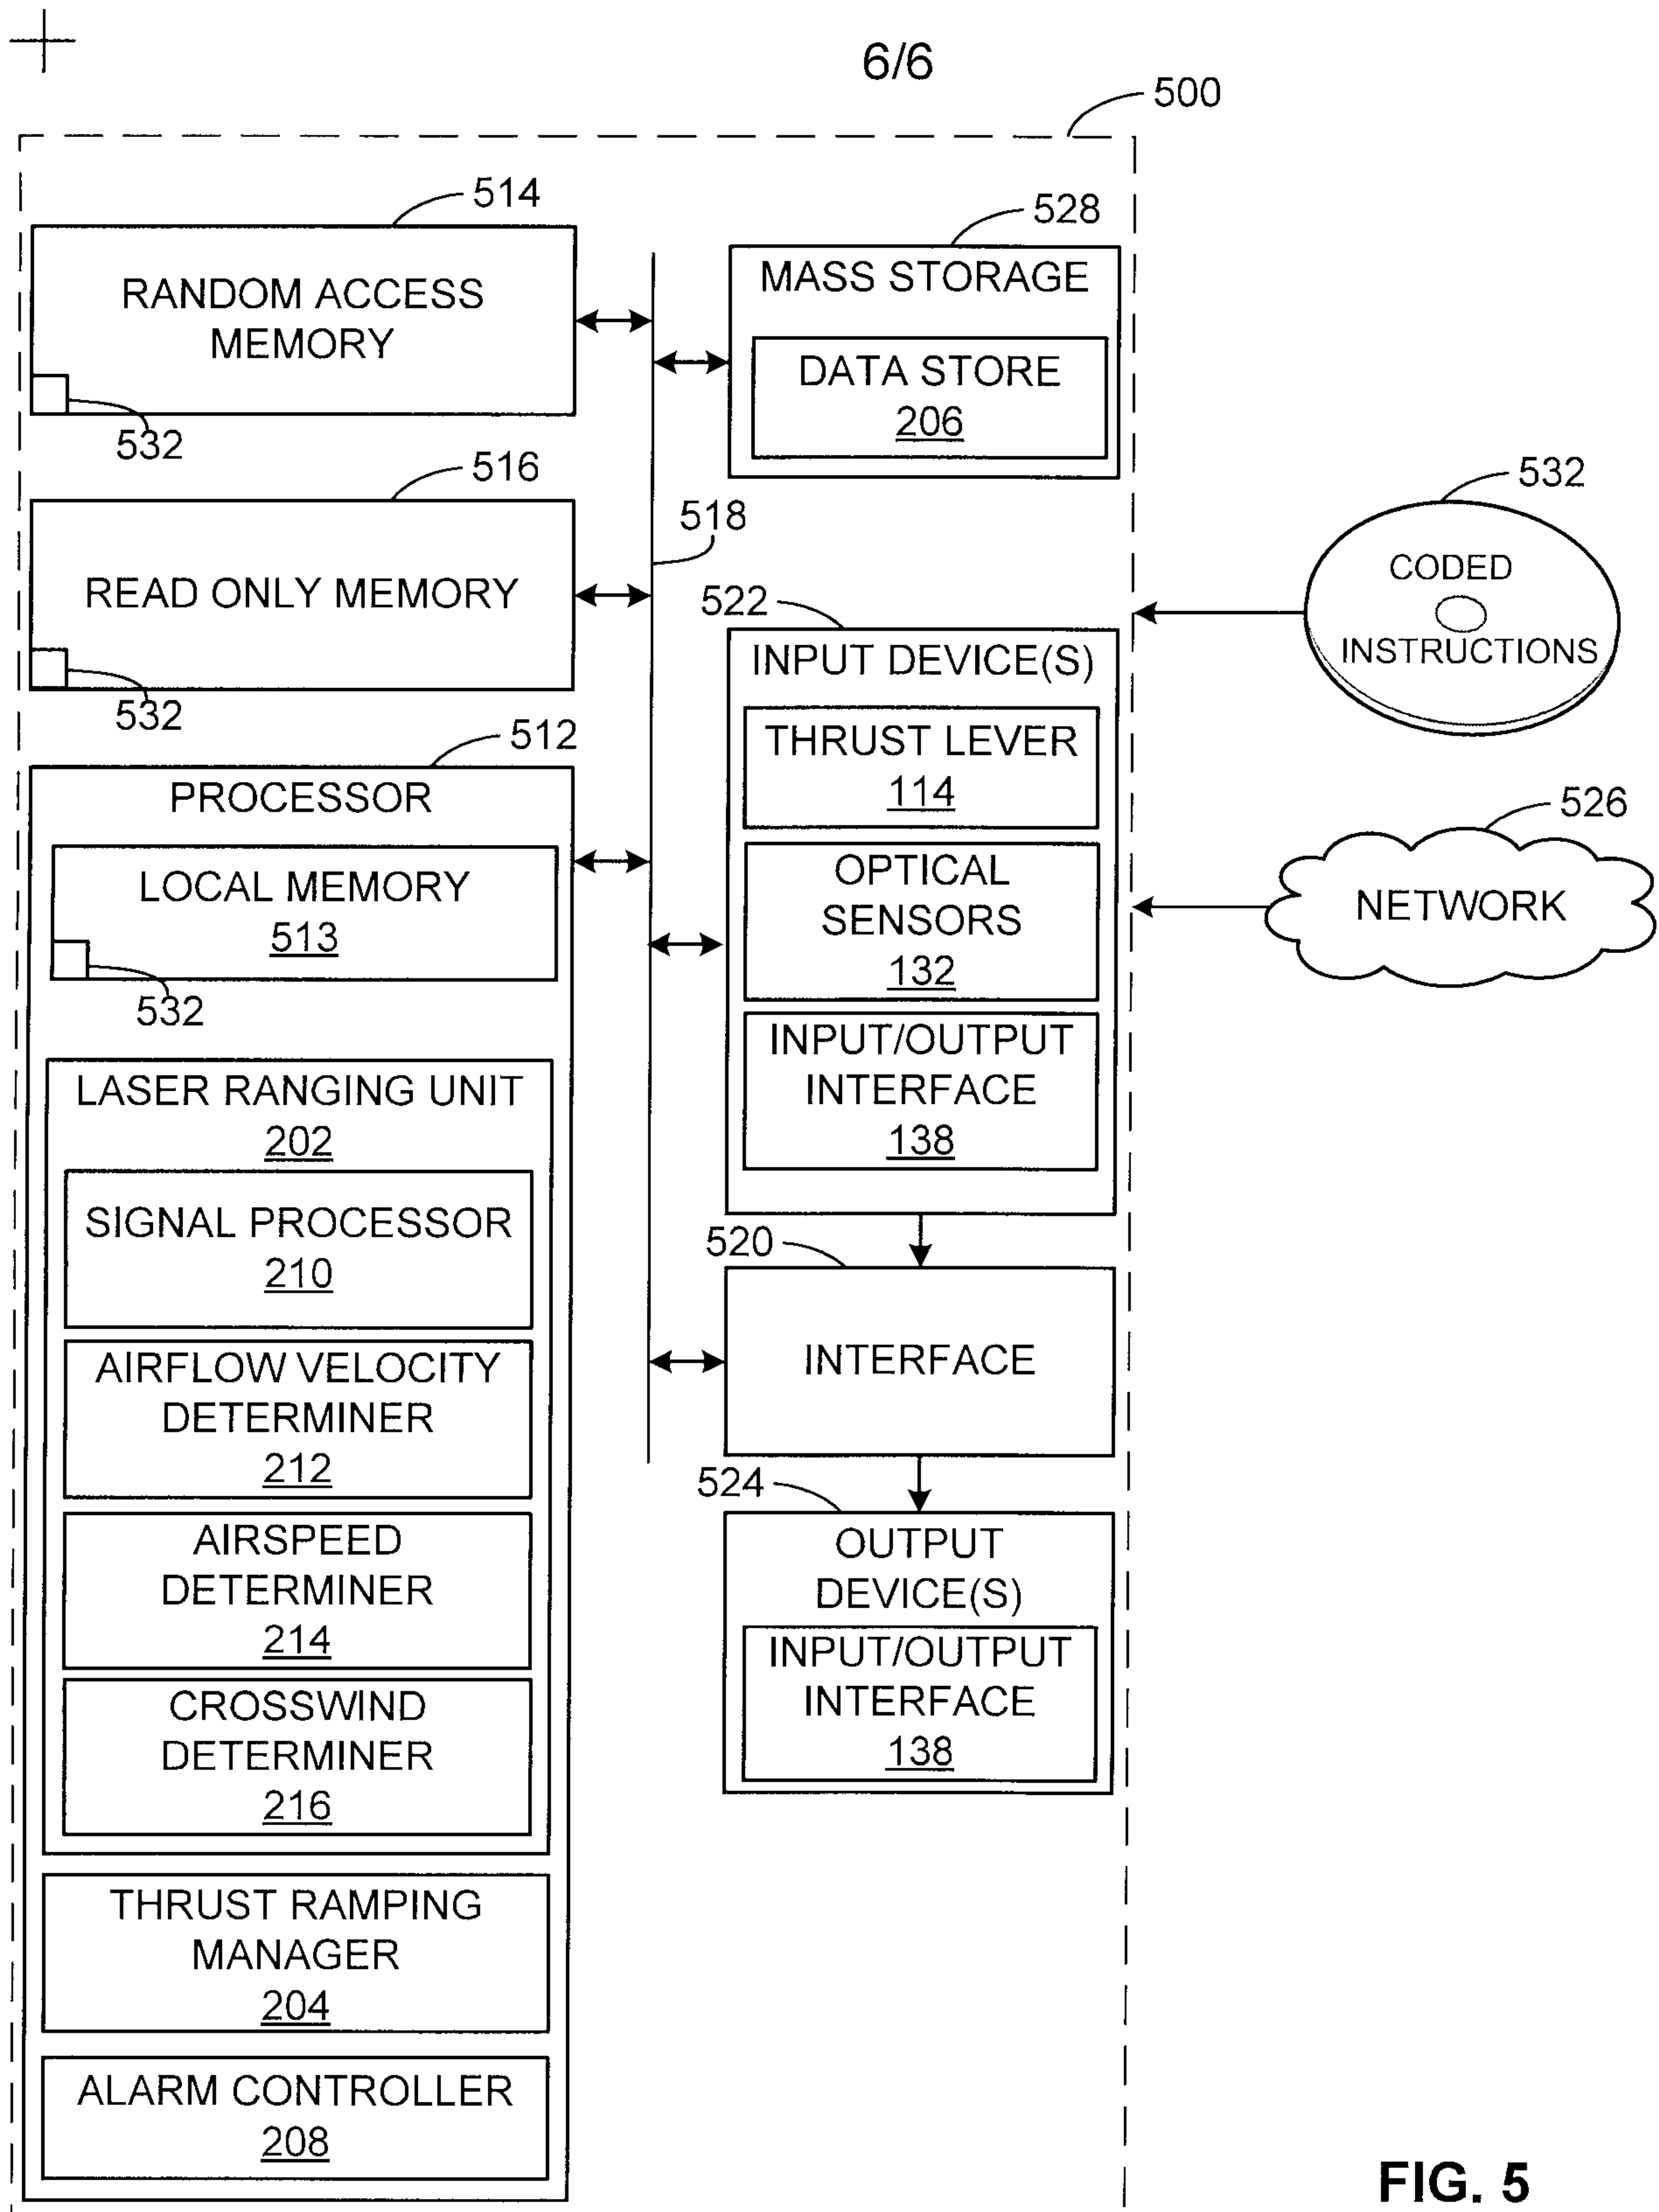


FIG. 5

