



(51) International Patent Classification:
G06F 3/041 (2006.01) *G06F 15/02* (2006.01)
G06F 3/048 (2006.01)

(21) International Application Number:
PCT/CA2012/000338

(22) International Filing Date:
5 April 2012 (05.04.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11161222.2 5 April 2011 (05.04.2011) EP

(71) Applicant (for all designated States except US): **RE-SEARCH IN MOTION LIMITED** [CA/CA]; 295 Phillip Street, Waterloo, ON, Ontario N2L 3W8 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MAK, Genevieve Elizabeth** [CA/CA]; c/o Torch Mobile, Inc., 40 Eglinton Ave. E., Suite 600, Ext. 19541, Toronto, Ontario M4P 3A2 (CA).

(74) Agents: **DE KLEINE, Geoffrey** et al.; Borden Ladner Gervais LLP, 1200 Waterfront Centre, 200 Burrard Street, P.O. Box 48600, Vancouver, British Columbia V7X 1T2 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: ELECTRONIC DEVICE AND METHOD OF DISPLAYING TOUCH-SENSITIVE INFORMATION

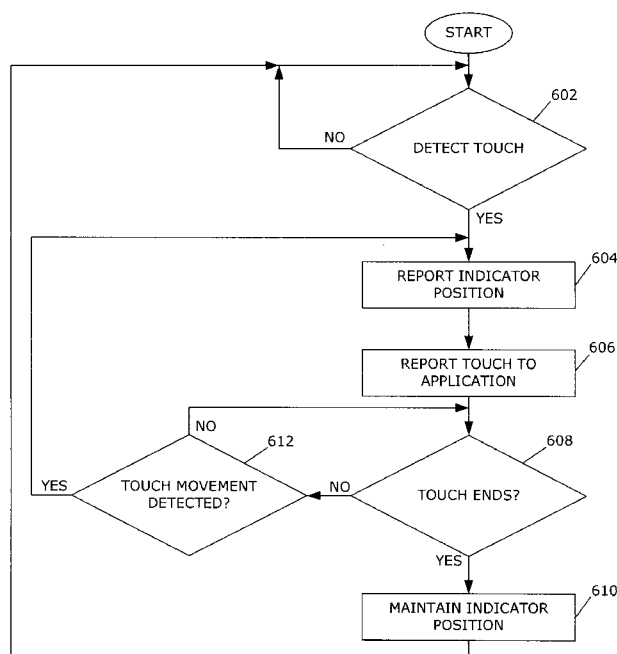


FIG. 6

(57) Abstract: A method includes utilizing an application, displaying information on a touch-sensitive display, detecting on the touch-sensitive display, a touch at a touch location associated with multiple functions, reporting, to the application, the touch location as a reported indicator position, and maintaining the reported indicator position to perform one of the multiple functions when the touch ends.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

ELECTRONIC DEVICE AND METHOD OF DISPLAYING TOUCH-SENSITIVE INFORMATION

FIELD OF TECHNOLOGY

[0001] The present disclosure relates to electronic devices including, but not limited to, portable electronic devices having touch-sensitive displays and their control.

BACKGROUND

[0002] Electronic devices, including portable electronic devices, have gained widespread use and may provide a variety of functions including, for example, telephonic, electronic messaging and other personal information manager (PIM) application functions. Portable electronic devices include several types of devices including mobile stations such as simple cellular telephones, smart telephones (smart phones), Personal Digital Assistants (PDAs), tablet computers, and laptop computers, with wireless network communications or near-field communications connectivity such as Bluetooth® capabilities.

[0003] Portable electronic devices such as PDAs, or tablet computers are generally intended for handheld use and ease of portability. Smaller devices are generally desirable for portability. A touch-sensitive display, also known as a touchscreen display, is particularly useful on handheld devices, which are small and may have limited space for user input and output. The information displayed on the display may be modified depending on the functions and operations being performed.

[0004] Improvements in electronic devices with displays are desirable.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 is a block diagram of an example of a portable electronic device in accordance with the disclosure.

[0006] FIG. 2 is a front view of an example of a portable electronic device in accordance with the disclosure.

[0007] FIG. 3 is a flowchart illustrating a method of controlling the portable electronic device in accordance with the disclosure.

[0008] FIG. 4 and FIG. 5 illustrate examples of detected touches on a portable

electronic device in accordance with the disclosure.

[0009] FIG. 6 is a flowchart illustrating another method of controlling the portable electronic device in accordance with the disclosure.

[0010] FIG. 7 illustrates another example of a detected touch on a portable electronic device in accordance with the disclosure.

DETAILED DESCRIPTION

[0011] The following describes an electronic device and a method that includes utilizing an application, displaying information on a touch-sensitive display, detecting on the touch-sensitive display, a touch at a touch location associated with multiple functions, reporting, to the application, a reported indicator position associated with the touch location, and maintaining the reported indicator position and performing one of the multiple functions based on the indicator position when the touch ends.

[0012] For simplicity and clarity of illustration, reference numerals may be repeated among the figures to indicate corresponding or analogous elements. Numerous details are set forth to provide an understanding of the embodiments described herein. The embodiments may be practiced without these details. In other instances, well-known methods, procedures, and components have not been described in detail to avoid obscuring the embodiments described. The description is not to be considered as limited to the scope of the embodiments described herein.

[0013] The disclosure generally relates to an electronic device, which is a portable or non-portable electronic device in the embodiments described herein. Examples of portable electronic devices include mobile, or handheld, wireless communication devices such as pagers, cellular phones, cellular smart-phones, wireless organizers, PDAs, wirelessly enabled notebook computers, tablet computers, and so forth. Examples of non portable electronic devices include electronic white boards, for example, on a wall, smart boards utilized for collaboration, built-in displays in furniture or appliances, and so forth. The portable electronic device may also be a portable electronic device without wireless communication capabilities.

[0014] A block diagram of an example of an electronic device 100 is shown in

FIG. 1. The electronic device 100, which may be a portable electronic device, includes multiple components, such as a processor 102 that controls the overall operation of the electronic device 100. The electronic device 100 presently described optionally includes a communication subsystem 104 and a short-range communications 132 module to perform various communication functions, including data and voice communications. Data received by the electronic device 100 is decompressed and decrypted by a decoder 106. The communication subsystem 104 receives messages from and sends messages to a wireless network 150. The wireless network 150 may be any type of wireless network, including, but not limited to, data wireless networks, voice wireless networks, and networks that support both voice and data communications. A power source 142, such as one or more rechargeable batteries or a port to an external power supply, powers the electronic device 100.

[0015] The processor 102 interacts with other components, such as Random Access Memory (RAM) 108, memory 110, a display 112 with a touch-sensitive overlay 114 operably connected to an electronic controller 116 that together comprise a touch-sensitive display 118, one or more optional force sensors 122, an auxiliary input/output (I/O) subsystem 124, a data port 126, a speaker 128, a microphone 130, short-range communications 132, and other device subsystems 134. User-interaction with a graphical user interface is performed through the touch-sensitive overlay 114. The processor 102 interacts with the touch-sensitive overlay 114 via the electronic controller 116. Information, such as text, characters, symbols, images, icons, and other items that may be displayed or rendered on an electronic device, is displayed on the touch-sensitive display 118 via the processor 102. The processor 102 may interact with an orientation sensor such as an accelerometer 136 to detect direction of gravitational forces or gravity-induced reaction forces, for example, to determine the orientation of the electronic device 100.

[0016] To identify a subscriber for network access, the electronic device 100 may optionally use a Subscriber Identity Module or a Removable User Identity Module (SIM/RUIM) card 138 for communication with a network, such as the wireless network 150. Alternatively, user identification information may be programmed into memory 110.

[0017] The electronic device 100 includes an operating system 146 and

software programs or components 148 that are executed by the processor 102 and are typically stored in a persistent, updatable store such as the memory 110. Additional applications or programs may be loaded onto the electronic device 100 through the wireless network 150, the auxiliary I/O subsystem 124, the data port 126, the short-range communications subsystem 132, or any other suitable subsystem 134.

[0018] A received signal, such as a text message, an e-mail message, or web page download, is processed by the communication subsystem 104 and input to the processor 102. The processor 102 processes the received signal for output to the display 112 and/or to the auxiliary I/O subsystem 124. A subscriber may generate data items, for example e-mail messages, which may be transmitted over the wireless network 150 through the communication subsystem 104, for example. For voice communications, the overall operation of the portable electronic device 100 is similar. The speaker 128 outputs audible information converted from electrical signals, and the microphone 130 converts audible information into electrical signals for processing.

[0019] The touch-sensitive display 118 may be any suitable touch-sensitive display, such as a capacitive, resistive, infrared, surface acoustic wave (SAW) touch-sensitive display, strain gauge, optical imaging, dispersive signal technology, acoustic pulse recognition, and so forth, as known in the art. A capacitive touch-sensitive display may include a capacitive touch-sensitive overlay 114. The overlay 114 may be an assembly of multiple layers in a stack including, for example, a substrate, a ground shield layer, a barrier layer, one or more capacitive touch sensor layers separated by a substrate or other barrier, and a cover. The capacitive touch sensor layers may be any suitable material, such as patterned indium tin oxide (ITO).

[0020] The display 112 of the touch-sensitive display 118 includes a display area in which information may be displayed, and a non-display area extending around the periphery of the display area. Information is not displayed in the non-display area, which is utilized to accommodate, for example, electronic traces or electrical connections, adhesives or other sealants, and/or protective coatings around the edges of the display area.

[0021] One or more touches, also known as touch contacts or touch events,

may be detected by the touch-sensitive display 118. The processor 102 may determine attributes of the touch, including a location of a touch. Touch location data may include an area of contact or a single point of contact, such as a point at or near a center of the area of contact. A signal is provided to the controller 116 in response to detection of a touch. A touch may be detected from any suitable input member, such as a finger, thumb, appendage, or other items, for example, a stylus, pen, or other pointer, depending on the nature of the touch-sensitive display 118. The controller 116 and/or the processor 102 may detect a touch by any suitable input member on the touch-sensitive display 118. Multiple simultaneous touches may be detected. Movement of a touch on the touch-sensitive display 118 may also be detected.

[0022] One or more gestures may be detected by the touch-sensitive display 118. A gesture, such as a swipe, also known as a flick, is a particular type of touch on a touch-sensitive display 118 and may begin at an origin point and continue to an end point. A gesture may be identified by attributes of the gesture, including the origin point, the end point, the distance traveled, the duration, the velocity, and the direction, for example. A gesture may be long or short in distance and/or duration. Two points of the gesture may be utilized to determine a direction of the gesture.

[0023] An optional force sensor 122 or force sensors may be disposed in any suitable location, for example, between the touch-sensitive display 118 and a back of the electronic device 100 to detect a force imparted by a touch on the touch-sensitive display 118. The force sensor 122 may be a force-sensitive resistor, strain gauge, piezoelectric or piezoresistive device, pressure sensor, or other suitable device. Force as utilized throughout the specification refers to force measurements, estimates, and/or calculations, such as pressure, deformation, stress, strain, force density, force-area relationships, thrust, torque, and other effects that include force or related quantities.

[0024] Force information related to a detected touch may be utilized to select information, such as information associated with a location of a touch. For example, a touch that does not meet a force threshold may highlight a selection option, whereas a touch that meets a force threshold may select or input that selection option. Selection options include, for example, displayed or virtual keys of a keyboard; selection boxes or windows, e.g., "cancel," "delete," or

“unlock”; function buttons, such as play or stop on a music player; and so forth. Different magnitudes of force may be associated with different functions or input. For example, a lesser force may result in panning, and a higher force may result in zooming.

[0025] A front view of an example of the electronic device 100 is shown in FIG. 2. The electronic device 100 includes a housing 202 in which the touch-sensitive display 118 is disposed. The housing 202 and the touch-sensitive display 118 enclose components such as the components shown in FIG. 1.

[0026] The touch-sensitive overlay 114 may extend to cover the display area 204 and the non-display area 206 such that a touch on either or both the display area 204 and the non-display area 206 may be detected. The density of touch sensors may differ between the display area 204 and the non-display area 206. For example, the density of nodes in a mutual capacitive touch-sensitive display, or density of locations at which electrodes of one layer cross over electrodes of another layer, may differ between the display area 204 and the non-display area 206.

[0027] A web page includes objects, or information resources, that may be accessed through a web browser and displayed on a display, such as the touch-sensitive display 118. A mark-up language, such as HyperText Markup Language (HTML), Extensible Markup Language (XML), XHTML (eXtensible HyperText Markup Language), and so forth, may be utilized to control the presentation or display of the objects. The objects may provide navigation to other web pages, such as via hypertext links, and may subsume other object or resources such as text, style sheets, scripts and images, into their displayed presentation. Information associated with a web page download may be displayed on the touch-sensitive display 118 and may include, for example, information from web pages, web applications, rich media applications, and widgets. In the example of FIG. 2, a web page download includes a document 210 and information associated with another application 212 that is included with, commonly referred to as embedded in, the document 210. The embedded application may be, for example, an ActionScript®-based application, an Adobe® Flash® Player application, and so forth. ActionScript, Adobe, and Flash are registered trademarks of Adobe Systems Incorporated. The document, which may be a hypertext markup language (HTML) document, includes information displayed

around the embedded application and may include content that is, for example, downloaded progressively or streamed from a server.

[0028] Web pages are typically designed according to a Document Object Model (DOM). A DOM is a cross-platform and language-independent convention for representing and interacting with objects, such as HTML, XHTML and XML objects. The DOM structures a webpage as a tree structure of elements. Typically, all elements, including associated text and attributes, are accessible and manipulatable through the DOM tree. When an event, such as a touch event, is detected, the event traverses the DOM tree, such as from a leaf node towards the root node of the DOM tree or from the root node outwards to leaf nodes of the DOM tree. To utilize an event, such as a touch event or mouse event, the event may be detected, also referred to as captured or intercepted, by event listeners or event handlers associated with or registered on elements of the DOM. An event handler includes a function or method, typically implemented in software, such as JavaScript® software, that executes functions associated with an event. Each event has an event target, e.g., a node of the DOM tree, towards which the event is directed by the DOM structure. When the event reaches the target, any event handlers registered on the event target are triggered or fired. For example, a mouseover or roll-over event handler triggered at an element of a webpage, such as a speaker icon of an embedded media player, may execute a function to display a volume control to increase or decrease volume. Multiple event handlers may be associated with an element of a webpage. The terms mouseover, roll-over, and mouse-hover are utilized interchangeably to describe positioning of an indicator, such as a cursor or pointer, over an element displayed on a display, without a mouse click event.

[0029] When a web page download is displayed on the touch-sensitive display 118, information may not be visible because all the information may not fit on the touch-sensitive display 118. The text of the document 210 may not fit on the page and may be displayed by, for example, scrolling, or zooming out to increase the quantity of information displayed on the touch-sensitive display 118. Touches on the touch-sensitive display 118 may be utilized to scroll, zoom in, and zoom out. Touches on the touch-sensitive display 118 may also be utilized to control features or functions of the embedded application 212.

[0030] Typically, features or functions for such embedded applications are

designed for an indicator-based control, such as utilized on a desktop or laptop computer. An indicator, such as a cursor, may be moved utilizing, for example, a mouse or trackpad, an optical joystick, or other control device. Multiple functions may be associated with a given location in the embedded application. Different input events may determine the function to be invoked. For example, a function associated with an element, such as an icon displayed in the embedded application, may be selected or invoked by a selection event detected at a location associated with the element. A selection event, such as a mouse click, may be performed, for example, by depressing a mouse button or trackpad button or by depressing the optical joystick. Displayed features may be selected by a left mouse click event. A roll-over event, such as detecting the indicator positioned over an element without a mouse click, may be utilized to provide animation, to display further features or controls, to display further information or a preview of further information, or to provide any other suitable function. For example, when an indicator is located on the speaker icon of an embedded media player, an mouseover event may be detected and may be utilized to display a volume control to increase or decrease volume. For example, when a mouse click event is detected at the location of the speaker icon, the mouse click event may be utilized to select the speaker to mute the volume.

[0031] When an application, such as an embedded application, that is designed for use with an indicator-based control device, such as a mouse, operates on device with a touch-sensitive display, the application may interpret touch events as mouse events or convert touch events into mouse events. For example, applications, when operated on a device with a touch-sensitive display, may convert various touch events into indicator-based control events, e.g., mouse events. Other applications utilized with a touch-sensitive display may display and maintain a cursor, responsive to touch events, to mimic mouse events. All touch events do not, however, correspond on a one-to-one base with indicator-based control events such as mouse events. For example, an end of a touch, e.g., when an input member releases or leaves the touch-sensitive display, referred to as a touch release, does not have a corresponding indicator-based control event, such as a mouse event, because an indicator-based control device such as a mouse always has a cursor or indicator location on a display. Applications convert a touch release to an indicator-based control event, such as

a mouse event, having a location that does not exist on the touch-sensitive display, e.g., (0,0), (-1,-1), or (x,y) where x and/or y are not valid locations on the touch-sensitive display. Such conversions may result in reporting an invalid indicator position to the application, and/or may move the cursor (if displayed) off the display such that the cursor does not interfere with displayed content. Such touch release conversions result in functions not being performed, such as functions invoked by a roll-over event, or other undesired results. Such problems are resolved by maintaining the touch location for a touch release at a known position on the touch-sensitive display, such as the last reported position, rather than assigning a non-existent location upon a touch release. When a touch-sensitive display utilizes a cursor, and the cursor remains on the display after the touch is released, the cursor typically remains at the same location when the touch is released. When a touch-sensitive display does not utilize a cursor, typically no valid touch location is persisted, and a current position of touch cannot be queried when no touch is detected.

[0032] The portable electronic device 100 illustrated in FIG. 2 includes a touch-sensitive display 118, and touches are utilized to provide input from a user rather than a mouse or other control device. The portable electronic device 100 utilizes touches and reports touch data as mouse events, such as indicator position and move events, and mouse click events to control, for example, roll-over and selection functionality that may be associated with the embedded application, and scrolling of the web page.

[0033] A flowchart illustrating a method of controlling an electronic device, such as the electronic device 100, is shown in FIG. 3. The method may be carried out by computer-readable code executed, for example, by the controller 116 and/or the processor 102. Coding of software for carrying out such a method is within the scope of a person of ordinary skill in the art given the present description and may be stored in a computer-readable storage medium. The method may contain additional or fewer processes than shown and/or described, and may be performed in a different order.

[0034] Information is displayed on the portable electronic device 100. The information may be information associated with a first application, such as an internet or web page download associated with an internet or web browser, and information associated with an embedded application. At a given time, the

information displayed may be from the first application, from the embedded application, or from both the first application and the embedded application.

[0035] A touch is detected 302 at a location associated with the embedded application. When the touch is detected, the location of the touch on the touch-sensitive display 118 is determined. A timer is started at 304. The timer may be a count-down timer, a count-up timer, or any suitable method to determine that a threshold period of time has passed after the touch is detected. An indicator position is reported 306 to the embedded application, for example, by a roll-over event handler.

[0036] When the embedded application utilizes the reported indicator position at 308, a response is provided by the embedded application, and the process continues at 310. When movement of the touch on the touch-sensitive display 118 is detected at 310, the new indicator position that is associated with the new touch location is reported 312 to the embedded application. Movement of the touch may be detected when the distance between a current touch location determined from the most recent scan of the touch-sensitive display 118 and a previously reported touch location determined from a previous scan differs by a threshold amount. A scan, as known in the industry, includes, for example, a plurality of frames utilizing different sensors in each frame to determine a touch location. Small movements of the touch caused by, for example, jitter or location determination errors are filtered out by reporting a new touch location when the distance between the previously reported touch location and the current touch location meets a threshold. When the touch ends or discontinues at 314, the reported indicator position is maintained 316 at the last reported position. A touch ends, for example, when the input member is no longer detected by the touch-sensitive display 118 after being detected by the touch-sensitive display 118.

[0037] When the embedded application does not utilize the reported indicator position at 308, such as to perform a function associated with a roll-over event, a response is not provided by the embedded application, and the process continues at 318. When the time, based on the timer started at 304, does not meet a threshold at 318, the process continues at 306. When the time meets the threshold at 318, the process continues at 320. The time threshold is utilized, for example, to provide sufficient time for the embedded application to

utilize the touch information, such as a mouse move or indicator movement, and respond.

[0038] When movement of the touch is detected at 320, the touch data is provided 322 to the application, such as a web browser, for example, to facilitate scrolling of the web page. Movement of the touch may be detected when the distance between a current touch location, determined from the most recent scan of the touch-sensitive display 118, and a previously reported touch location, determined from a previous scan, differs by a threshold amount. Small movements of the touch location caused, for example, by jitter or location determination errors are filtered out by detecting movement when the distance between touch locations meets a threshold. When movement of the touch is not detected at 320, the touch is reported 324 to the embedded application as a selection and the indicator position is maintained at the location associated with the touch.

[0039] Examples of touches and information displayed on an electronic device 100 are shown in FIG. 4 and FIG. 5. The term downward is utilized to provide reference to the orientation of the electronic device in the figures and is not otherwise limiting.

[0040] In the example illustrated in FIG. 4, information including an HTML document 402 and an advertisement 404 associated with an embedded application, e.g., an ActionScript-based application, are displayed on the touch-sensitive display 118. A touch on the touch-sensitive display 118 at a touch location associated with the embedded application 404, e.g., an ActionScript-based advertisement, is illustrated by a circle 406 on the touch-sensitive display 118. The touch is detected and the indicator position is reported, for example, by a roll-over event handler, as an indicator position to the embedded application. The reported indicator position is not utilized by the embedded application and a response is not received within a threshold period of time. Movement of the touch is not detected, and a mouse click event handler reports the event as a mouse click event to the embedded application in this example. The advertisement 404 is selected as a result in this example. Selection of the advertisement 404 may, for example, open another webpage associated with the advertisement. Thus, the embedded application is engaged.

[0041] Another example of a touch on the touch-sensitive display 118 is illustrated by the circle 410 and the arrow 412 leading from the circle 410. In this example, the touch is a swipe in a downward direction in the orientation illustrated in FIG. 4. The touch begins at the circle 410 at a location associated with the embedded advertisement 404. The touch is detected and the indicator position is reported to the embedded application. The indicator position is not utilized by the embedded application and a response is not received within a threshold period of time. Movement of the touch is detected and the touch data is utilized by the browser to scroll the HTML document downwardly. Thus, the embedded application is not engaged.

[0042] In the example illustrated in FIG. 5, information including an HTML document 502 and media player 504 associated with an embedded application, e.g., a Flash media application, is displayed on the touch-sensitive display 118. A touch on the touch-sensitive display 118 at a location associated with the media player 504 is illustrated by a circle 506 on the touch-sensitive display 118. The touch is detected and the indicator position is reported to the embedded application. The reported indicator position is utilized by the embedded application and a response is received from the embedded application within a threshold period of time. In the example of FIG. 5, the touch is associated with a displayed selectable speaker icon 508 and a volume control 510 is displayed in response to the reported indicator position. When the touch ends on the selectable speaker icon 508, the reported indicator position is maintained at the location associated with the selectable speaker icon 508, and display of the volume control 510 continues. The volume control 510 may be manipulated, for example, by a subsequent touch to move the control to increase or decrease volume. Thus, the volume control of the embedded application is engaged and managed.

[0043] A flowchart illustrating another method of controlling an electronic device, such as the electronic device 100, is shown in FIG. 6. The method may be carried out by computer-readable code executed, for example, by the controller 116 and/or the processor 102. Coding of software for carrying out such a method is within the scope of a person of ordinary skill in the art given the present description. The method may contain additional or fewer processes than shown and/or described, and may be performed in a different order.

[0044] Information associated with an embedded application is displayed on the electronic device 100, which may be a portable electronic device. The information may be displayed in response to selection of an option to display the embedded application across the full width of the display area from within a first application. Information associated with the HTML document is not displayed. A touch is detected 602 at a location associated with the embedded application. When the touch is detected, the location of the touch on the touch-sensitive display 118 is determined. An indicator position is reported 604 to the embedded application, for example, by a roll-over event handler. The reported indicator position is associated with the touch location. The touch is also intercepted by a selection event handler, such as a mouse click event handler, and reported 606 to the application as a mouse click event, such as a left button mouse click event, to select a feature associated with the touch location. The touch event may be reported as a left click that begins when the touch begins and ends when the touch ends.

[0045] When the touch continues, e.g., does not end, at 608, and movement is detected at 612, the indicator position is reported as a roll-over in which the indicator is at a position associated with the new touch location. Movement of the touch may be detected as described above.

[0046] When the touch ends at 608, the reported indicator position is maintained 610 at the last reported position. An indicator may optionally be displayed at the location or position where the indicator is maintained.

[0047] An example of a touch and information displayed on an electronic device 100 is shown in FIG. 7. The information displayed is a media player 704 associated with an embedded application, such as a Flash media application. A touch on the touch-sensitive display 118 at a location 706 associated with the media player 704 is illustrated by a circle on the touch-sensitive display 118. The touch is detected and the indicator position is reported to the embedded application. A function may be performed in response to the reported indicator position. The touch is also reported to the embedded application as a left button mouse click event in this example. Another function may be performed in response to the reported left button mouse click. In the example of FIG.7, the touch is detected at a location 706 that is associated with a displayed selectable speaker icon 708, and a volume control 710 is displayed in response to the

reported indicator position. The volume is also muted when the left mouse click event is reported in this example. When the touch ends, e.g., the end of the touch is detected, on the selectable speaker icon 708, the indicator position is maintained at the selectable speaker icon 708, and display of the volume control 710 continues. The volume control 710 may be moved to the left or right by a subsequent touch to move the control, to take the volume off mute, and to increase and decrease the volume in this example.

[0048] By maintaining the reported position of the indicator at the last touch location, selectable features that are displayed utilizing a mouseover, or roll-over, may be displayed after the touch ends, facilitating selection utilizing a subsequent touch. In the situation of an embedded application in an HTML document, touches on the touch-sensitive display 118 may be utilized by either the embedded application or the HTML document without loss of functionality. Utilizing a timer or delay period, the browser of the portable electronic device may wait to receive a response from the embedded application. The touch data may be utilized, for example, to scroll or zoom the HTML document, when a response is not received within the time period.

[0049] A method includes utilizing an application, displaying information on a touch-sensitive display, detecting on the touch-sensitive display, a touch at a touch location associated with multiple functions, reporting, to the application, an indicator position associated with the touch location, and maintaining the reported indicator position to perform one of the multiple functions when the touch ends.

[0050] An electronic device includes a touch-sensitive display and a processor coupled to the touch-sensitive display to display information utilizing an application, detect on the touch-sensitive display, a touch at a touch location associated with multiple functions, report, to the application, an indicator position associated with the touch location, and maintain the reported indicator position to perform one of the multiple functions when the touch ends.

[0051] The present disclosure may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the present disclosure is, therefore, indicated by the

appended claims rather than by the foregoing description. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

Claims

1. A method comprising:

displaying, utilizing an application, information on a touch-sensitive display;

detecting, on the touch-sensitive display, a touch at a touch location associated with multiple functions;

reporting, to the application, the touch location as a reported indicator position;

maintaining the reported indicator position to perform a first function of the multiple functions when the touch ends.

2. The method according to claim 1, wherein the application comprises an embedded application.

3. The method according to claim 1, wherein the application comprises one of an ActionScript[®]-based and a Flash[®] application.

4. The method according to claim 1, wherein the multiple functions comprise a first function performed in response to a roll-over event and a second function performed in response to a selection.

5. The method according to claim 1, wherein the touch location is associated with the information.

6. The method according to claim 1, wherein detecting the touch comprises detecting movement of the touch to the touch location associated with multiple functions.

7. The method according to claim 1, wherein the first function comprises a function in response to a roll-over event.
8. The method according to claim 1, wherein detecting the touch comprises detecting a beginning of the touch at the touch location and wherein a second function of the multiple functions is performed in response to detecting the beginning of the touch.
9. The method according to claim 8, wherein the second function of the multiple functions comprises a function performed in response to a selection.
10. A computer-readable storage medium having computer-readable code executable by at least one processor of the electronic device to perform the method of claim 1.

11. An electronic device comprising:

a touch-sensitive display;

a processor coupled to the touch-sensitive display to display information utilizing an application, detect on the touch-sensitive display, a touch at a touch location associated with multiple functions, report, to the application, the touch location as a reported indicator position, and maintain the reported indicator position to perform a first function of the multiple functions when the touch ends.

12. The electronic device according to claim 11, wherein the application comprises an embedded application.

13. The electronic device according to claim 11, wherein the application comprises one of an ActionScript®-based and a Flash® application.

14. The electronic device according to claim 11, wherein the multiple functions comprise a first function performed in response to a roll-over event and a second function performed in response to a selection.

15. The electronic device according to claim 11, wherein the touch location is associated with the information.

16. The electronic device according to claim 11, wherein movement of the touch to the touch location associated with multiple functions is detected and other functions of the multiple functions are not performed.

17. The electronic device according to claim 11, wherein the first function comprises a function performed in response to a roll-over event.

18. The electronic device according to claim 11, wherein a beginning of the touch is detected at the touch location and wherein the second function of the

multiple functions is performed in response to detecting the beginning of the touch.

19. The electronic device according to claim 18, wherein the second one of the multiple functions comprises a function performed in response to a selection.

20. A method comprising:

displaying information on a touch-sensitive display;

detecting, on the touch-sensitive display, a touch at a touch location associated with multiple functions of an embedded application;

reporting the touch location as a reported indicator position;

maintaining the reported indicator position at the touch location while performing a first function of the multiple functions when the touch ends.

1/7

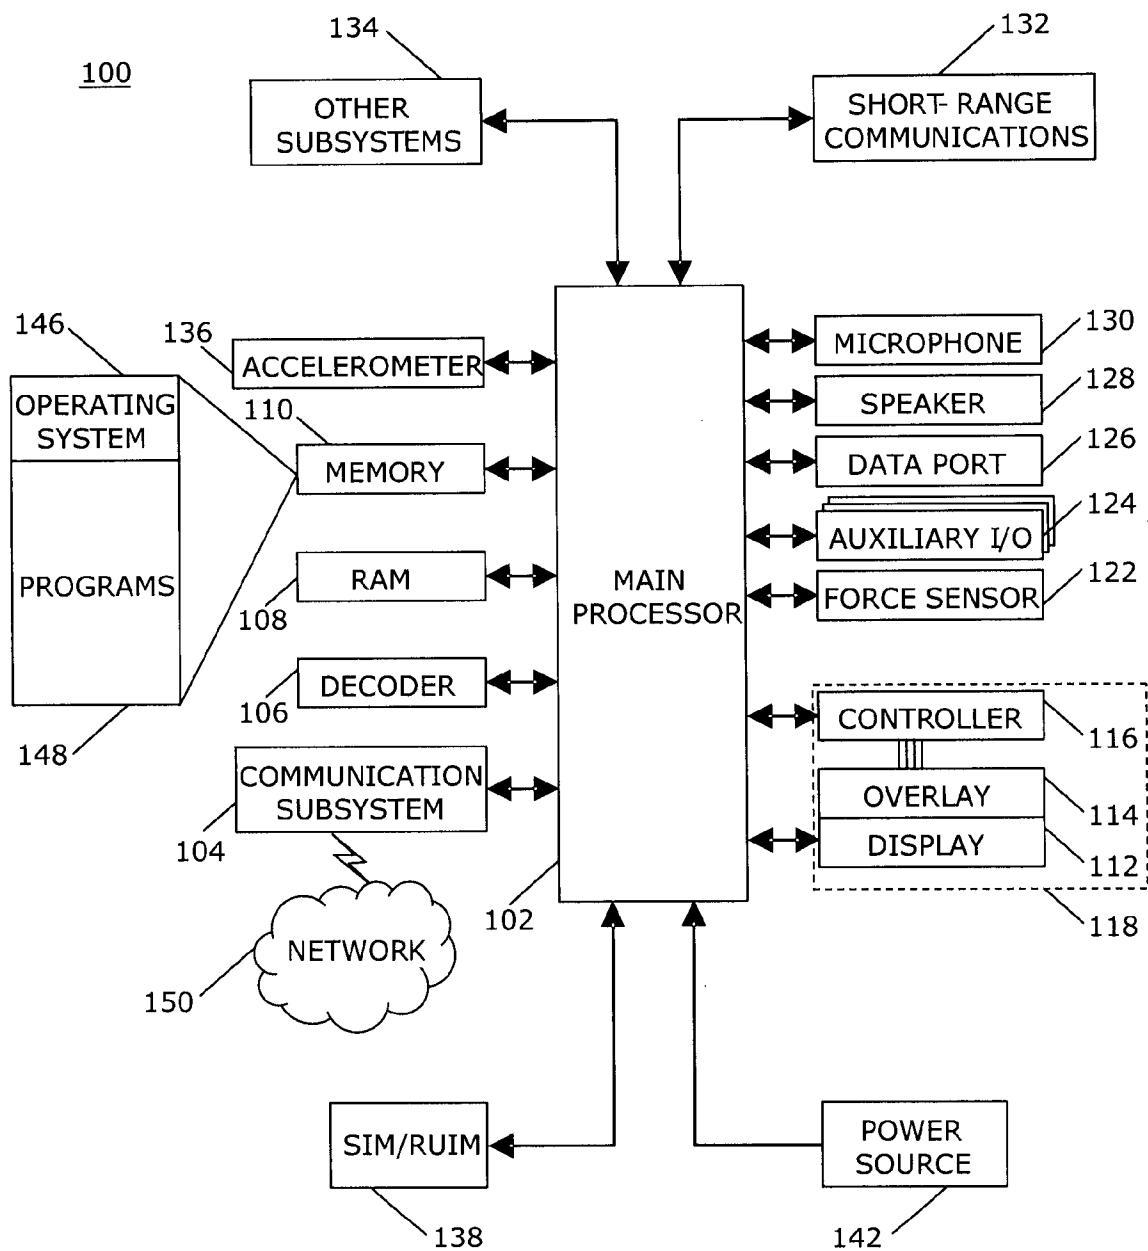


FIG. 1

2/7

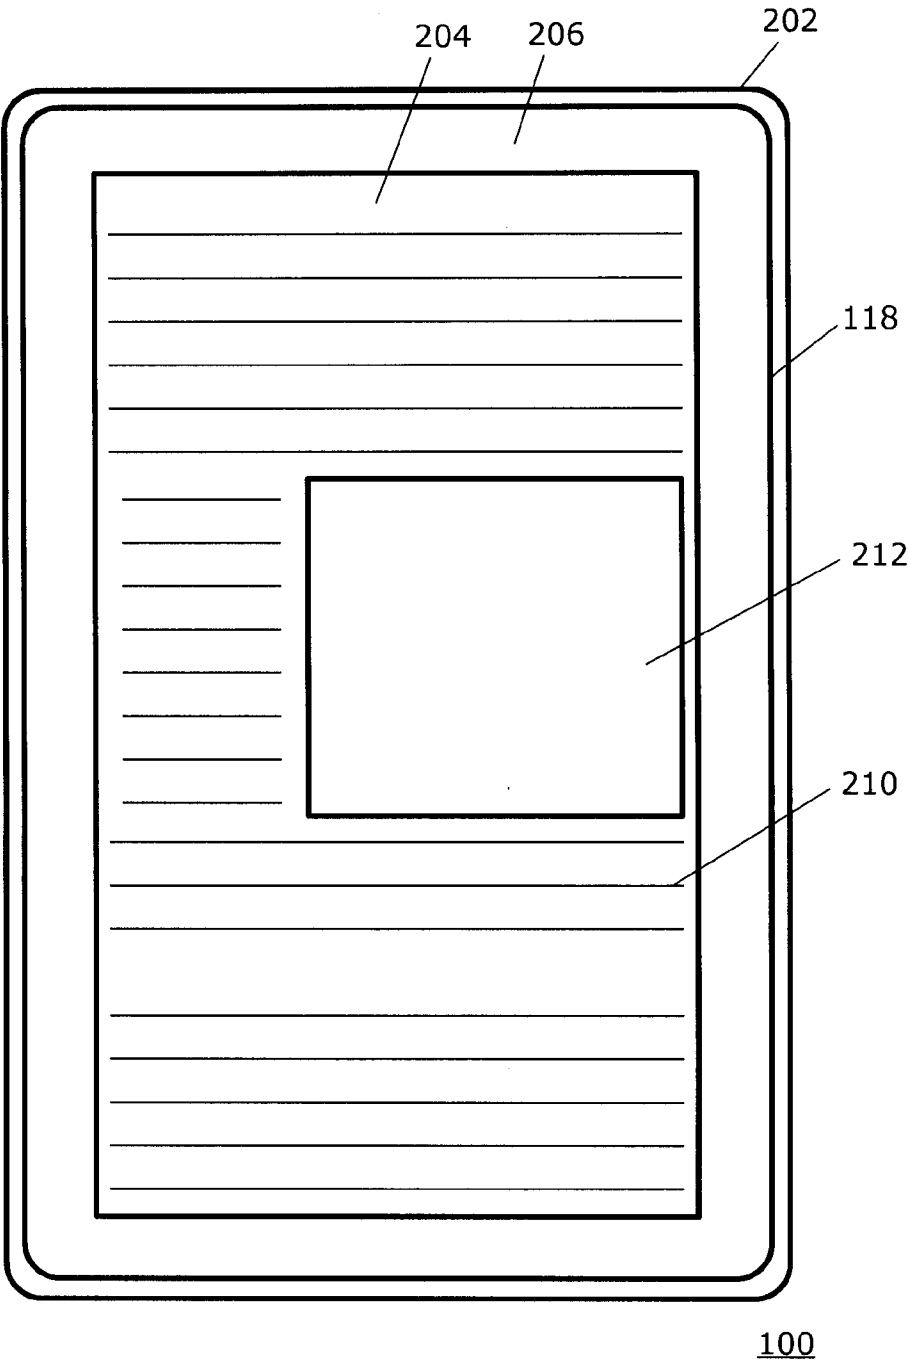


FIG. 2

3/7

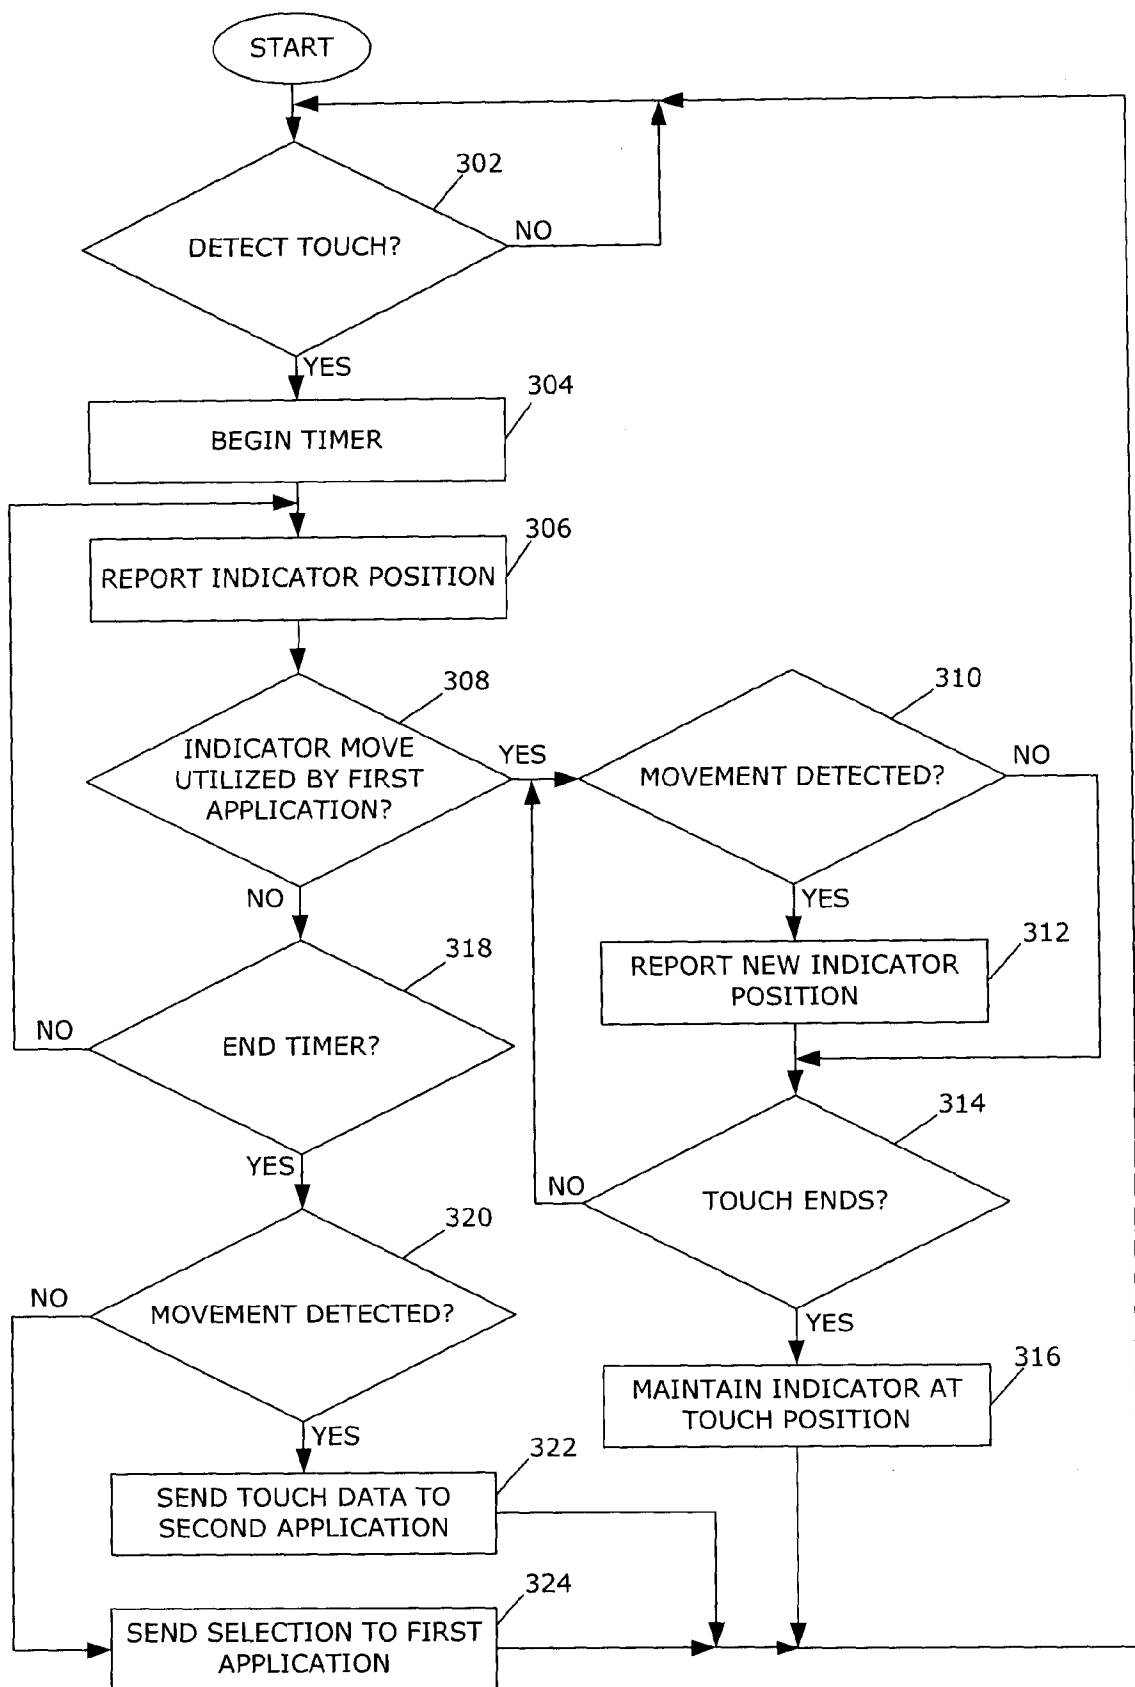


FIG. 3

4/7

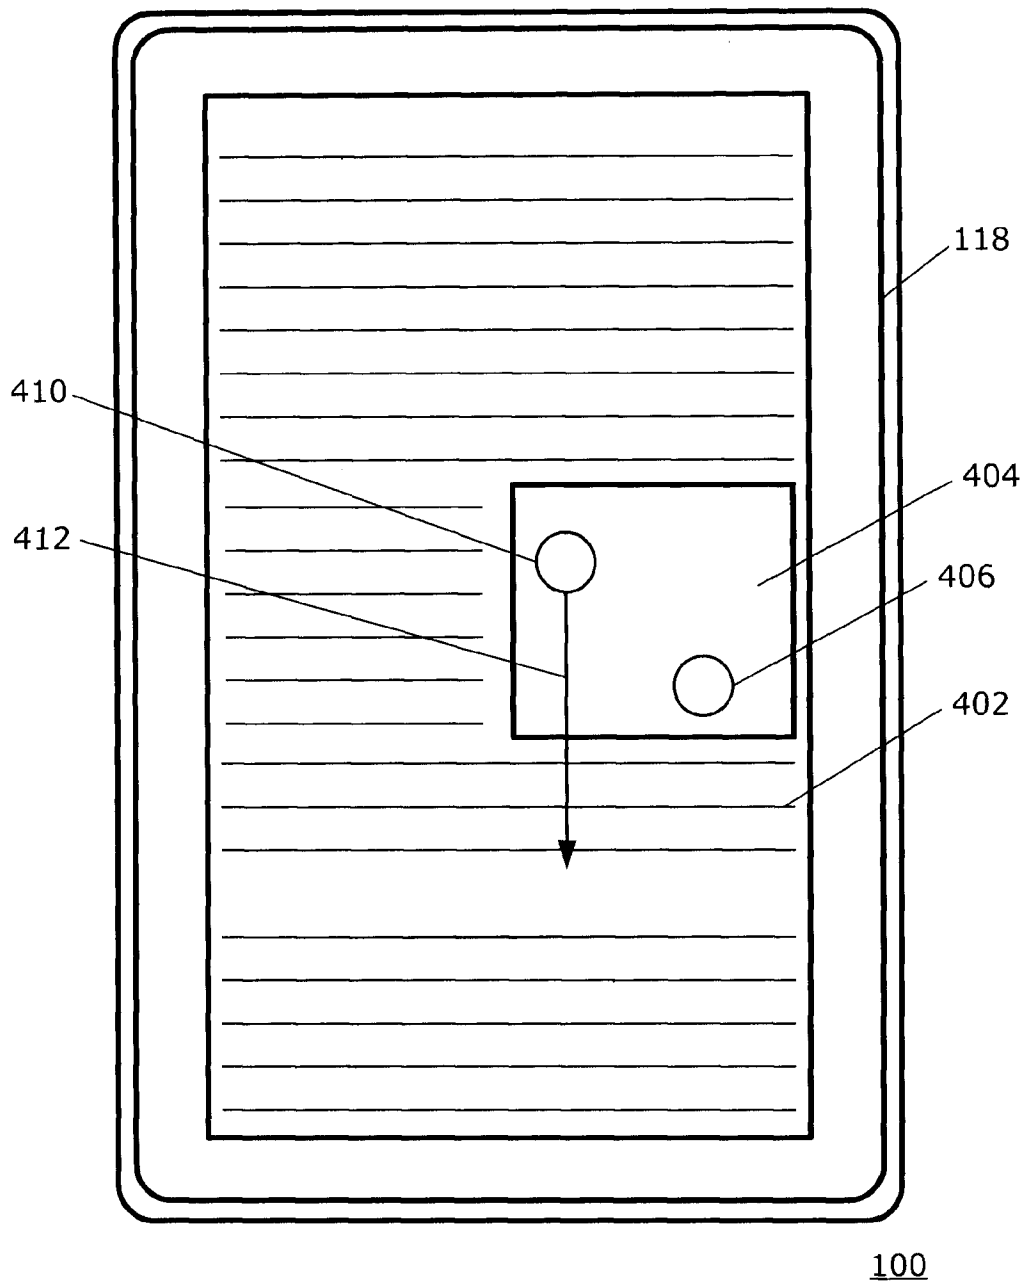


FIG. 4

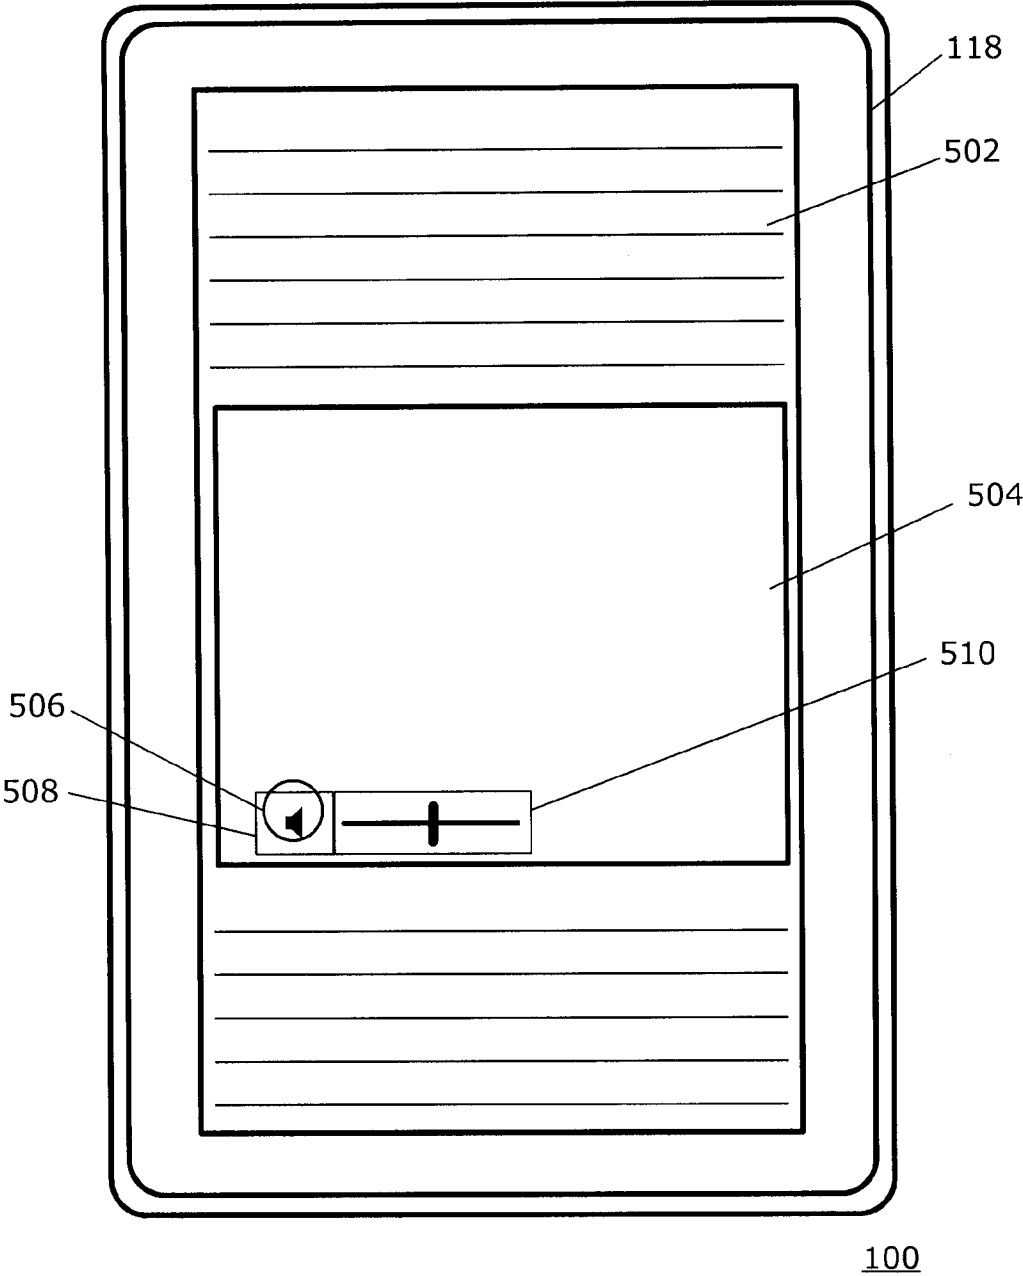


FIG. 5

6/7

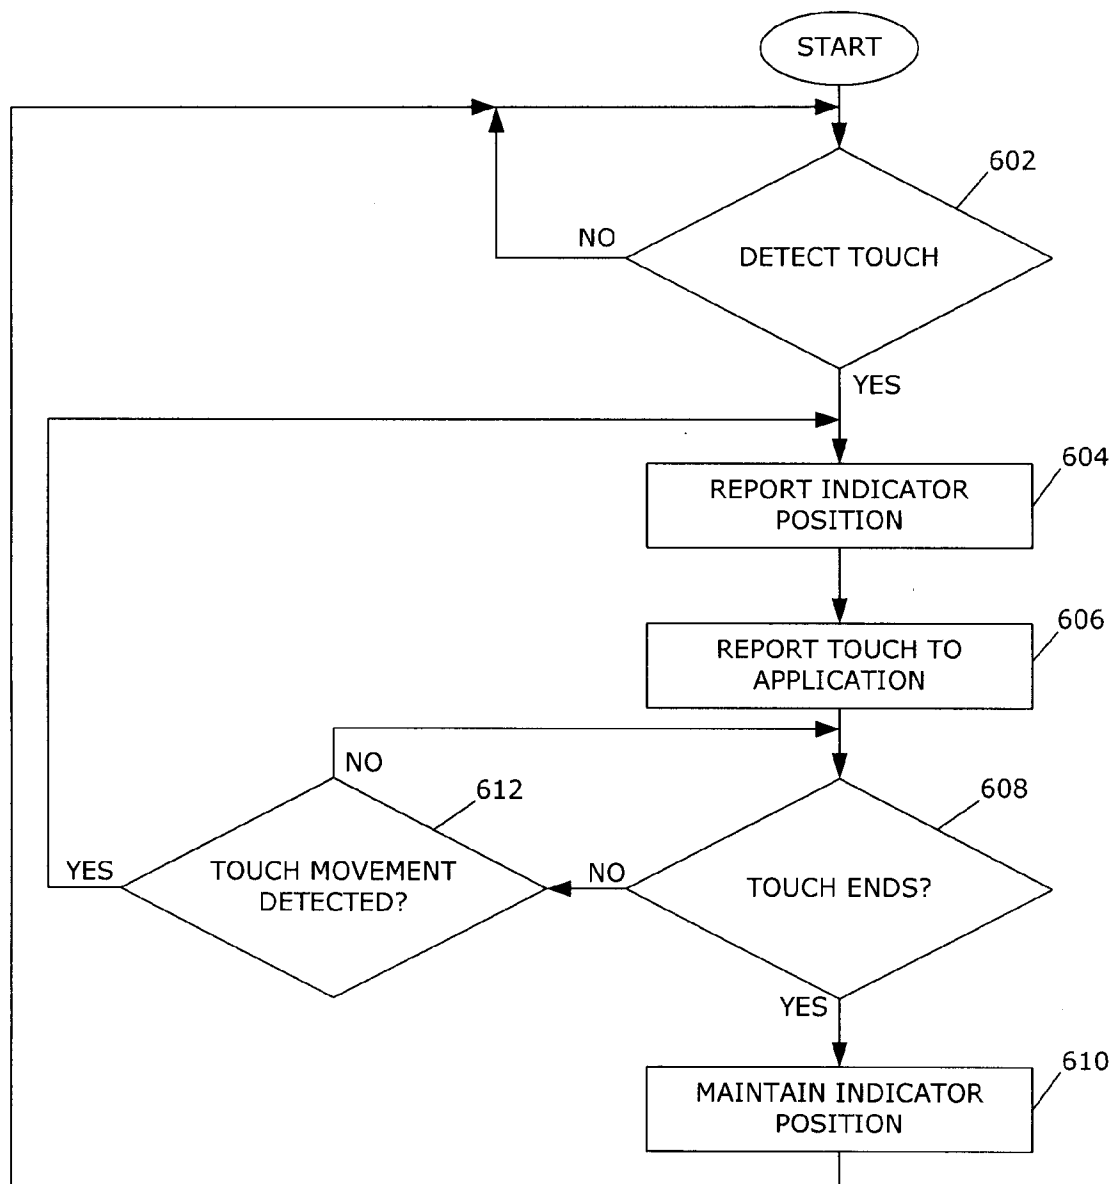


FIG. 6

7/7

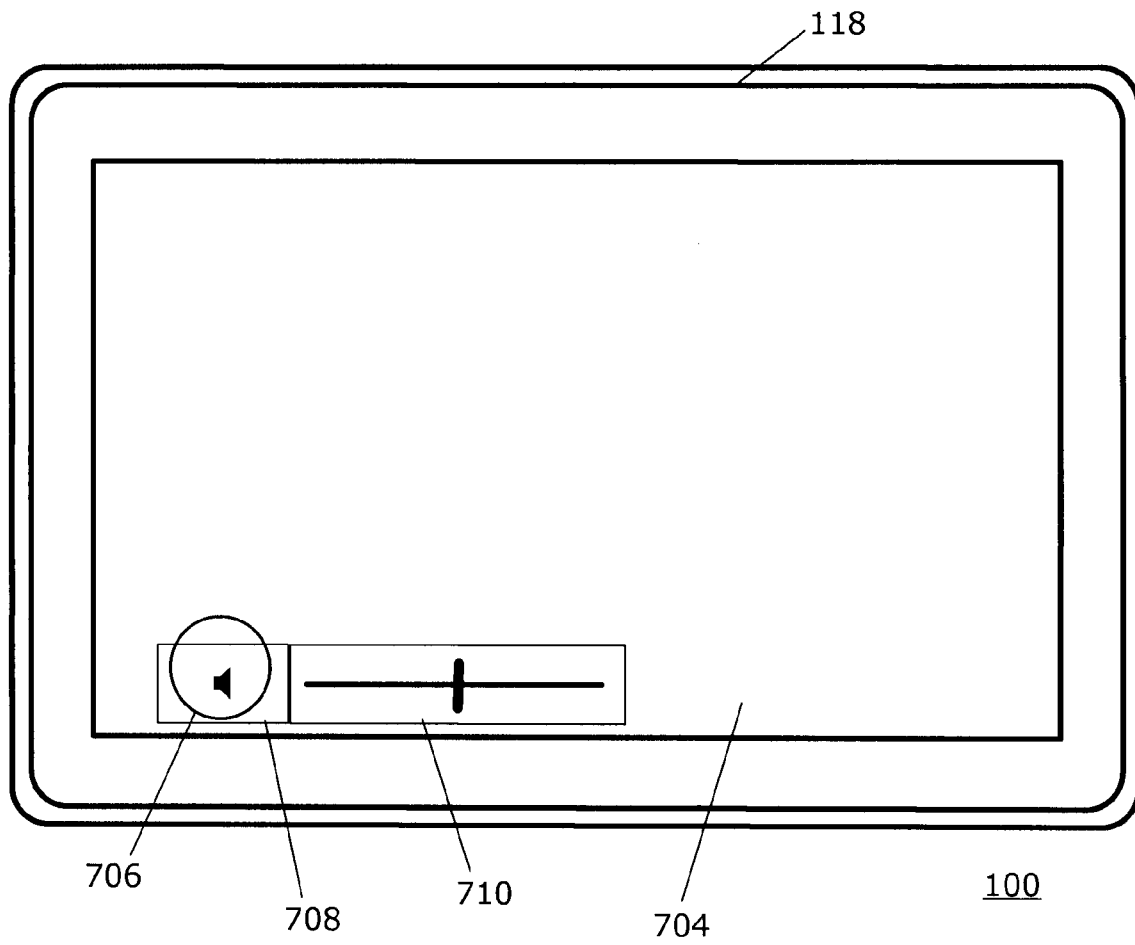


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2012/000338

A. CLASSIFICATION OF SUBJECT MATTER IPC: G06F 3/041 (2006.01) , G06F 3/048 (2006.01) , G06F 15/02 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC: G06F 3/041 (2006.01) , G06F 3/048 (2006.01) , G06F 15/02 (2006.01) Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Database: Epoque, TotalPatent, Canadian Patent Database (CPD) Keywords: roll-over, selection, touch sensitive /touch screen, function/operation, embedded application, HTML, Adobe		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CA 2738055 (Kwok et al.) 15 April 2010 (15-04-2010)	1, 4-11, 14-19
Y	the whole document, especially: Abstract; Figs. 1-7; Claims 1-5; Paragraphs 0025-0026; 0036; 0039-0046; 0050-0058	2-3, 12-13, 20
Y	US 2011019662 (Katis et al.) 27 January 2010 (27-01-2010) the whole document, especially: Figs. 3A-6B; Paragraphs 0050-0054	2-3, 12-13, 20
A	US 20100171713 (Kwok et al.) 08 July 2010 (08-07-2010) the whole document, especially: Abstract; Figs. 2-4; Paragraphs 0026; 0036-0039	1-20
A	CA 2681102 (Lee) 30 April 2010 (30-04-2010) the whole document, especially: Abstract; Figs. 5-11; Paragraphs 0045-0054	1-20
A	CA 2739167 (Kwok) 15 April 2010 (15-04-2010) the whole document, especially: Abstract; Fig. 3; Paragraphs 0040-0047	1-20
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
"A" document defining the general state of the art which is not considered to be of particular relevance		
"E" earlier application or patent but published on or after the international filing date		
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
22 May 2012 (22-05-2012)	24 May 2012 (24-05-2012)	
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476	Authorized officer Ning Huang (819) 934-7877	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2012/000338

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
CA2738055A1	15 April 2010 (15-04-2010)	CA2738055A1	15 April 2010 (15-04-2010)
		EP2175352A2	14 April 2010 (14-04-2010)
		EP2175352A3	05 May 2010 (05-05-2010)
		US2010085303A1	08 April 2010 (08-04-2010)
US2011019662A1	27 January 2011 (27-01-2011)	WO2010040207A1	15 April 2010 (15-04-2010)
		AT473582T	15 July 2010 (15-07-2010)
		AT507653T	15 May 2011 (15-05-2011)
		AT514273T	15 July 2011 (15-07-2011)
		AT516653T	15 July 2011 (15-07-2011)
		AT521184T	15 September 2011 (15-09-2011)
		AT526768T	15 October 2011 (15-10-2011)
		AT527800T	15 October 2011 (15-10-2011)
		AT528901T	15 October 2011 (15-10-2011)
		AT552689T	15 April 2012 (15-04-2012)
		AU2008270699A1	08 January 2009 (08-01-2009)
		AU2008270878A1	08 January 2009 (08-01-2009)
		AU2008270895A1	08 January 2009 (08-01-2009)
		AU2008270896A1	08 January 2009 (08-01-2009)
		AU2008270956A1	08 January 2009 (08-01-2009)
		AU2008270959A1	08 January 2009 (08-01-2009)
		AU2008270967A1	08 January 2009 (08-01-2009)
		AU2008311812A1	23 April 2009 (23-04-2009)
		AU2008312740A1	23 April 2009 (23-04-2009)
		AU2008312740B2	17 November 2011 (17-11-2011)
		AU2008317133A1	30 April 2009 (30-04-2009)
		AU2009338743A1	30 June 2011 (30-06-2011)
		CA2682184A1	08 January 2009 (08-01-2009)
		CA2691814A1	08 January 2009 (08-01-2009)
		CA2691817A1	08 January 2009 (08-01-2009)
		CA2691945A1	08 January 2009 (08-01-2009)
		CA2692928A1	08 January 2009 (08-01-2009)
		CA2692951A1	08 January 2009 (08-01-2009)
		CA2692976A1	08 January 2009 (08-01-2009)
		CA2701332A1	19 April 2009 (19-04-2009)
		CA2701408A1	30 April 2009 (30-04-2009)
		CA2707474A1	23 April 2009 (23-04-2009)
		CA2746734A1	05 August 2010 (05-08-2010)
		CN101682622A	24 March 2010 (24-03-2010)
		CN101690091A	31 March 2010 (31-03-2010)
		CN101690092A	31 March 2010 (31-03-2010)
		CN101690093A	31 March 2010 (31-03-2010)
		CN101690094A	31 March 2010 (31-03-2010)
		CN101690095A	31 March 2010 (31-03-2010)
		CN101730996A	09 June 2010 (09-06-2010)
		CN101822023A	01 September 2010 (01-09-2010)
		CN101828375A	08 September 2010 (08-09-2010)
		CN101904152A	01 December 2010 (01-12-2010)
		CN102292944A	21 December 2011 (21-12-2011)
		DE602008001712D1	19 August 2010 (19-08-2010)
		DE602008006511D1	09 June 2011 (09-06-2011)
		EP2080340A1	22 July 2009 (22-07-2009)
		EP2080340B1	27 April 2011 (27-04-2011)
		EP2080341A1	22 July 2009 (22-07-2009)
		EP2080341B1	22 June 2011 (22-06-2011)
		EP2080342A2	22 July 2009 (22-07-2009)
		EP2080342B1	07 July 2010 (07-07-2010)
		EP2137923A1	30 December 2009 (30-12-2009)
		EP2137923B1	05 October 2011 (05-10-2011)
		EP2143250A1	13 January 2010 (13-01-2010)
		EP2143250B1	13 July 2011 (13-07-2011)
		EP2147536A1	27 January 2010 (27-01-2010)
		EP2147536B1	28 September 2011 (28-09-2011)
		EP2151113A2	10 February 2010 (10-02-2010)
		EP2151113B1	12 October 2011 (12-10-2011)
		EP2171971A1	07 April 2010 (07-04-2010)
		EP2171982A1	07 April 2010 (07-04-2010)
		EP2171982B1	18 April 2012 (18-04-2012)
		EP2228950A2	15 September 2010 (15-09-2010)
		EP2228950A3	19 January 2011 (19-01-2011)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/CA2012/000338

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
		EP2171982B1	18 April 2012 (18-04-2012)
		EP2228950A2	15 September 2010 (15-09-2010)
		EP2228950A3	19 January 2011 (19-01-2011)
		EP2228950B1	17 August 2011 (17-08-2011)
		EP2228951A2	15 September 2010 (15-09-2010)
		EP2228951A3	12 January 2011 (12-01-2011)
		EP2228951B1	04 April 2012 (04-04-2012)
		EP2375686A2	12 October 2011 (12-10-2011)
		EP2375687A2	12 October 2011 (12-10-2011)
		EP2377279A1	19 October 2011 (19-10-2011)
		EP2391076A2	30 November 2011 (30-11-2011)
		EP2391076A3	08 February 2012 (08-02-2012)
		EP2393259A2	07 December 2011 (07-12-2011)
		JP2010532135A	30 September 2010 (30-09-2010)
		JP2010532636A	07 October 2010 (07-10-2010)
		JP2010533394A	21 October 2010 (21-10-2010)
		JP2010534872A	11 November 2010 (11-11-2010)
		JP2010534955A	11 November 2010 (11-11-2010)
		JP2010534956A	11 November 2010 (11-11-2010)
		JP2010534957A	11 November 2010 (11-11-2010)
		JP2011501569A	06 January 2011 (06-01-2011)
		JP2011501929A	13 January 2011 (13-01-2011)
		KR20100028118A	11 March 2010 (11-03-2010)
		KR20100028573A	12 March 2010 (12-03-2010)
		KR20100036220A	07 April 2010 (07-04-2010)
		KR20100037118A	08 April 2010 (08-04-2010)
		KR20100046156A	06 May 2010 (06-05-2010)
		KR20100046157A	06 May 2010 (06-05-2010)
		KR20100046158A	06 May 2010 (06-05-2010)
		KR20100072086A	29 June 2010 (29-06-2010)
		KR20100084661A	27 July 2010 (27-07-2010)
		KR20100086484A	30 July 2010 (30-07-2010)
		KR20110113751A	18 October 2011 (18-10-2011)
		US2009103476A1	23 April 2009 (23-04-2009)
		US7751361B2	06 July 2010 (06-07-2010)
		US2009103477A1	23 April 2009 (23-04-2009)
		US7751362B2	06 July 2010 (06-07-2010)
		US2009103528A1	23 April 2009 (23-04-2009)
		US8001261B2	16 August 2011 (16-08-2011)
		US2009103521A1	23 April 2009 (23-04-2009)
		US8090867B2	03 January 2012 (03-01-2012)
		US2009168760A1	02 July 2009 (02-07-2009)
		US8099512B2	17 January 2012 (17-01-2012)
		US2009003537A1	01 January 2009 (01-01-2009)
		US8107604B2	31 January 2012 (31-01-2012)
		US2009103560A1	23 April 2009 (23-04-2009)
		US8111713B2	07 February 2012 (07-02-2012)
		US2009003547A1	01 January 2009 (01-01-2009)
		US8121270B2	21 February 2012 (21-02-2012)
		US2009103475A1	23 April 2009 (23-04-2009)
		US8121271B2	21 February 2012 (21-02-2012)
		US2009003557A1	01 January 2009 (01-01-2009)
		US8130921B2	06 March 2012 (06-03-2012)
		US2009106617A1	23 April 2009 (23-04-2009)
		US8145780B2	27 March 2012 (27-03-2012)
		US2009003546A1	01 January 2009 (01-01-2009)
		US8175234B2	08 May 2012 (08-05-2012)
		US2009003558A1	01 January 2009 (01-01-2009)
		US8180029B2	15 May 2012 (15-05-2012)
		US2009003339A1	01 January 2009 (01-01-2009)
		US8180030B2	15 May 2012 (15-05-2012)
		US2009003247A1	01 January 2009 (01-01-2009)
		US2009003340A1	01 January 2009 (01-01-2009)
		US2009003536A1	01 January 2009 (01-01-2009)
		US2009003544A1	01 January 2009 (01-01-2009)
		US2009003545A1	01 January 2009 (01-01-2009)
		US2009003553A1	01 January 2009 (01-01-2009)
		EP2171982B1	18 April 2012 (18-04-2012)
		EP2228950A2	15 September 2010 (15-09-2010)
		EP2228950A3	19 January 2011 (19-01-2011)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/CA2012/000338

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
		EP2171982B1	18 April 2012 (18-04-2012)
		EP2228950A2	15 September 2010 (15-09-2010)
		EP2228950A3	19 January 2011 (19-01-2011)
		EP2228950B1	17 August 2011 (17-08-2011)
		EP2228951A2	15 September 2010 (15-09-2010)
		EP2228951A3	12 January 2011 (12-01-2011)
		EP2228951B1	04 April 2012 (04-04-2012)
		EP2375686A2	12 October 2011 (12-10-2011)
		EP2375687A2	12 October 2011 (12-10-2011)
		EP2377279A1	19 October 2011 (19-10-2011)
		EP2391076A2	30 November 2011 (30-11-2011)
		EP2391076A3	08 February 2012 (08-02-2012)
		EP2393259A2	07 December 2011 (07-12-2011)
		JP2010532135A	30 September 2010 (30-09-2010)
		JP2010532636A	07 October 2010 (07-10-2010)
		JP2010533394A	21 October 2010 (21-10-2010)
		JP2010534872A	11 November 2010 (11-11-2010)
		JP2010534955A	11 November 2010 (11-11-2010)
		JP2010534956A	11 November 2010 (11-11-2010)
		JP2010534957A	11 November 2010 (11-11-2010)
		JP2011501569A	06 January 2011 (06-01-2011)
		JP2011501929A	13 January 2011 (13-01-2011)
		KR20100028118A	11 March 2010 (11-03-2010)
		KR20100028573A	12 March 2010 (12-03-2010)
		KR20100036220A	07 April 2010 (07-04-2010)
		KR20100037118A	08 April 2010 (08-04-2010)
		KR20100046156A	06 May 2010 (06-05-2010)
		KR20100046157A	06 May 2010 (06-05-2010)
		KR20100046158A	06 May 2010 (06-05-2010)
		KR20100072086A	29 June 2010 (29-06-2010)
		KR20100084661A	27 July 2010 (27-07-2010)
		KR20100086484A	30 July 2010 (30-07-2010)
		KR20110113751A	18 October 2011 (18-10-2011)
		US2009103476A1	23 April 2009 (23-04-2009)
		US7751361B2	06 July 2010 (06-07-2010)
		US2009103477A1	23 April 2009 (23-04-2009)
		US7751362B2	06 July 2010 (06-07-2010)
		US2009103528A1	23 April 2009 (23-04-2009)
		US8001261B2	16 August 2011 (16-08-2011)
		US2009103521A1	23 April 2009 (23-04-2009)
		US8090867B2	03 January 2012 (03-01-2012)
		US2009168760A1	02 July 2009 (02-07-2009)
		US8099512B2	17 January 2012 (17-01-2012)
		US2009003537A1	01 January 2009 (01-01-2009)
		US8107604B2	31 January 2012 (31-01-2012)
		US2009103560A1	23 April 2009 (23-04-2009)
		US8111713B2	07 February 2012 (07-02-2012)
		US2009003547A1	01 January 2009 (01-01-2009)
		US8121270B2	21 February 2012 (21-02-2012)
		US2009103475A1	23 April 2009 (23-04-2009)
		US8121271B2	21 February 2012 (21-02-2012)
		US2009003557A1	01 January 2009 (01-01-2009)
		US8130921B2	06 March 2012 (06-03-2012)
		US2009106617A1	23 April 2009 (23-04-2009)
		US8145780B2	27 March 2012 (27-03-2012)
		US2009003546A1	01 January 2009 (01-01-2009)
		US8175234B2	08 May 2012 (08-05-2012)
		US2009003558A1	01 January 2009 (01-01-2009)
		US8180029B2	15 May 2012 (15-05-2012)
		US2009003339A1	01 January 2009 (01-01-2009)
		US8180030B2	15 May 2012 (15-05-2012)
		US2009003247A1	01 January 2009 (01-01-2009)
		US2009003340A1	01 January 2009 (01-01-2009)
		US2009003536A1	01 January 2009 (01-01-2009)
		US2009003544A1	01 January 2009 (01-01-2009)
		US2009003545A1	01 January 2009 (01-01-2009)
		US2009003553A1	01 January 2009 (01-01-2009)
		EP2171982B1	18 April 2012 (18-04-2012)
		EP2228950A2	15 September 2010 (15-09-2010)
		EP2228950A3	19 January 2011 (19-01-2011)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/CA2012/000338

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
		US2009003554A1	01 January 2009 (01-01-2009)
		US2009003559A1	01 January 2009 (01-01-2009)
		US2009003560A1	01 January 2009 (01-01-2009)
		US2009003563A1	01 January 2009 (01-01-2009)
		US2009103433A1	23 April 2009 (23-04-2009)
		US2009103522A1	23 April 2009 (23-04-2009)
		US2009103523A1	23 April 2009 (23-04-2009)
		US2009103527A1	23 April 2009 (23-04-2009)
		US2009103529A1	23 April 2009 (23-04-2009)
		US2009103531A1	23 April 2009 (23-04-2009)
		US2009103549A1	23 April 2009 (23-04-2009)
		US2009103689A1	23 April 2009 (23-04-2009)
		US2009103693A1	23 April 2009 (23-04-2009)
		US2009103695A1	23 April 2009 (23-04-2009)
		US2009104894A1	23 April 2009 (23-04-2009)
		US2009104915A1	23 April 2009 (23-04-2009)
		US2009168759A1	02 July 2009 (02-07-2009)
		US2009327422A1	31 December 2009 (31-12-2009)
		US2010069060A1	18 March 2010 (18-03-2010)
		US2010166159A1	01 July 2010 (01-07-2010)
		US2010198922A1	05 August 2010 (05-08-2010)
		US2010198923A1	05 August 2010 (05-08-2010)
		US2010198925A1	05 August 2010 (05-08-2010)
		US2010198988A1	05 August 2010 (05-08-2010)
		US2010199133A1	05 August 2010 (05-08-2010)
		US2010205320A1	12 August 2010 (12-08-2010)
		US2010211692A1	19 August 2010 (19-08-2010)
		US2010215158A1	26 August 2010 (26-08-2010)
		US2010217822A1	26 August 2010 (26-08-2010)
		US2010312844A1	09 December 2010 (09-12-2010)
		US2010312845A1	09 December 2010 (09-12-2010)
		US2010312914A1	09 December 2010 (09-12-2010)
		US2011035687A1	10 February 2011 (10-02-2011)
		US2011064027A1	17 March 2011 (17-03-2011)
		WO2009005882A1	08 January 2009 (08-01-2009)
		WO2009005885A2	08 January 2009 (08-01-2009)
		WO2009005885A3	19 February 2009 (19-02-2009)
		WO2009005893A1	08 January 2009 (08-01-2009)
		WO2009005896A1	08 January 2009 (08-01-2009)
		WO2009005913A1	08 January 2009 (08-01-2009)
		WO2009005913A4	26 February 2009 (26-02-2009)
		WO2009005914A1	08 January 2009 (08-01-2009)
		WO2009006101A2	08 January 2009 (08-01-2009)
		WO2009006101A3	04 June 2009 (04-06-2009)
		WO2009052000A1	23 April 2009 (23-04-2009)
		WO2009052428A1	23 April 2009 (23-04-2009)
		WO2009055220A2	30 April 2009 (30-04-2009)
		WO2009055220A3	04 June 2009 (04-06-2009)
		WO2009055221A2	30 April 2009 (30-04-2009)
		WO2009055221A3	11 June 2009 (11-06-2009)
		WO2009055246A2	30 April 2009 (30-04-2009)
		WO2009055246A3	02 July 2009 (02-07-2009)
		WO2010033390A1	25 March 2010 (25-03-2010)
		WO2010087879A1	05 August 2010 (05-08-2010)
		WO2011053371A1	05 May 2011 (05-05-2011)
US2010171713A1	08 July 2010 (08-07-2010)	US2010088653A1	08 April 2010 (08-04-2010)
CA2681102A1	30 April 2010 (30-04-2010)	CA2681102A1	30 April 2010 (30-04-2010)
		EP2184669A1	12 May 2010 (12-05-2010)
CA2739167A1	15 April 2010 (15-04-2010)	CA2739167A1	15 April 2010 (15-04-2010)
		EP2175357A1	14 April 2010 (14-04-2010)
		WO2010040211A1	15 April 2010 (15-04-2010)