



- (51) **International Patent Classification:**
F21K 99/00 (2010.01) *H01L 33/50* (2010.01)
- (21) **International Application Number:**
PCT/US2010/036583
- (22) **International Filing Date:**
28 May 2010 (28.05.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12/476,356 2 June 2009 (02.06.2009) US
- (71) **Applicant (for all designated States except US):** CREE, INC. [US/US]; 4600 Silicon Drive, Durham, NC 27703 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** VAN DE VEN, Antony, P. [AU/CN]; D45 Marina Cove, 380 Hiram's Hwy, Sai Kung, N.T., Hong Kong (CN). NEGLEY, Gerald H. [US/US]; 74 Bear Tree Creek, Chapel Hill, NC 27517 (US).
- (74) **Agent:** MYERS BIGEL SIBLEY & SAJOVEC, P.A.; P.O. Box 37428, Raleigh, NC 27627 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** LIGHTING DEVICES WITH DISCRETE LUMIPHOR-BEARING REGIONS ON REMOTE SURFACES THERE-OF

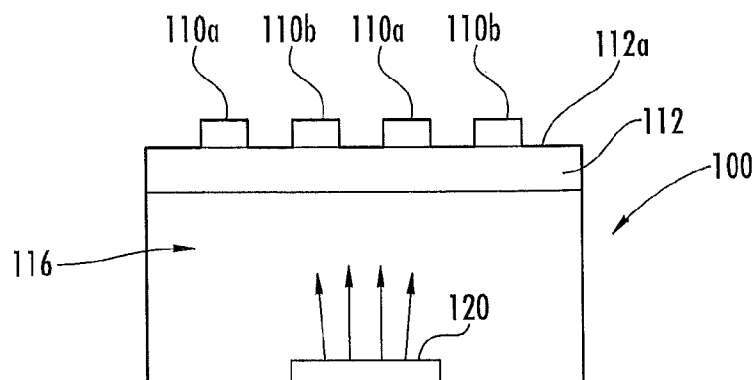


FIG. 2

(57) **Abstract:** A semiconductor device includes a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto, and a plurality of discrete lumiphor-containing regions remotely located from the LED. The lumiphor-containing regions may be located on a lens, a reflective element, or a combination thereof, that is remotely located from the LED. The lumiphor-containing regions may be located within an element that is remotely located from the LED.

LIGHTING DEVICES WITH DISCRETE LUMIPHOR-BEARING REGIONS ON REMOTE SURFACES THEREOF

FIELD OF THE INVENTION

[0001] This invention relates to lighting devices, and more particularly to semiconductor light emitting devices including wavelength conversion materials.

BACKGROUND

[0002] Light emitting diodes and laser diodes are well known solid state electronic devices capable of generating light upon application of a sufficient voltage. Light emitting diodes and laser diodes may be generally referred to as light emitting devices ("LEDs"). Light emitting devices generally include a p-n junction formed in an epitaxial layer grown on a substrate such as sapphire, silicon, silicon carbide, gallium arsenide and the like. The wavelength distribution of the light generated by the LED generally depends on the material from which the p-n junction is fabricated and the structure of the thin epitaxial layers that make up the active region of the device.

[0003] Typically, an LED chip includes a substrate, an n-type epitaxial region formed on the substrate and a p-type epitaxial region formed on the n-type epitaxial region (or vice-versa). In order to facilitate the application of a voltage to the device, an anode ohmic contact is formed on a p-type region of the device (typically, an exposed p-type epitaxial layer) and a cathode ohmic contact is formed on an n-type region of the device (such as the substrate or an exposed n-type epitaxial layer). In other embodiments, a substrate need not be included.

[0004] In order to use an LED chip in a circuit, it is known to enclose an LED chip in a package to provide environmental and/or mechanical protection, color selection, focusing and the like. An LED package also includes electrical leads, contacts or traces for electrically connecting the LED package to an external circuit. In a typical LED package 10 illustrated in FIG. 1, an LED chip 12 is mounted on a reflective cup 13 by means of a solder bond or conductive epoxy. One or more wirebonds 11 connect the ohmic contacts of the LED chip 12 to leads 15A and/or

15B, which may be attached to or integral with the reflective cup 13. The reflective cup 13 may be filled with an encapsulant material 16 containing a wavelength conversion material such as phosphor particles. The entire assembly may then be encapsulated in a clear protective resin 14, which may be molded in the shape of a lens to collimate the light emitted from the LED chip 12. The term "phosphor" is used herein to refer to any materials that absorb light at one wavelength and re-emit light at a different wavelength, regardless of the delay between absorption and re-emission and regardless of the wavelengths involved. Accordingly, the term "phosphor" is used herein to refer to materials that are sometimes called fluorescent and/or phosphorescent. In general, phosphor particles absorb light having low wavelengths and re-emit light having longer wavelengths.

[0005] Typically, phosphor particles are randomly distributed within the matrix of encapsulant material. Some or all of the light emitted by the LED chip 12 at a first wavelength may be absorbed by the phosphor particles, which may responsively emit light at a second wavelength. For example, a blue-emitting chip may be encapsulated with an encapsulant matrix including a yellow-emitting phosphor. The combination of blue light (from the chip) with yellow light (from the phosphor) may produce a light that appears white. Some red-emitting phosphor particles may be included in the encapsulant matrix to improve the color rendering properties of the light, i.e. to make the light appear more "warm." Similarly, a UV-emitting chip may be encapsulated with an encapsulant material including phosphor particles that individually emit red, green and blue light upon excitation by UV light. The resulting light, which is a combination of red, green and blue light, may appear white and may have good color rendering properties.

[0006] However, the deposition of more than one phosphor material on an LED chip may be desirable under certain circumstances. For example, it may be desirable to include a red phosphor along with a yellow phosphor on a blue LED chip to improve the color rendering characteristics of the light produced by the chip. That is, it is known that white emitters including a blue light emitting device and a yellow phosphor may have poor color rendering characteristics due to the binary nature of the emitted light. In order to provide better color rendering, a red phosphor, that may also emit light in response to stimulation by light emitted by the blue LED chip, may provide a red light emission complement to the overall light emitted by the LED chip. The resulting light may have a warmer appearance that may give objects a more

natural appearance when illuminated. However, the excitation curve of the red phosphor material may overlap with the emission curve of the yellow emitting phosphor, meaning that some light emitted by the yellow phosphor may be reabsorbed by the red phosphor, which may result in a loss of efficiency. The use of patterns of multiple phosphors on an LED chip is described in U.S. Patent Application Publication No. 2009/0108269, which is incorporated herein by reference, in its entirety.

[0007] The junction temperature of phosphor converted LEDs is typically controlled to provide a long life for LEDs. The degradation resulting from the higher temperature may result, at least in part, from temperature degradation of the phosphor and the material the phosphor is bound in, such as silicone, epoxy, etc. To overcome this difficulty, remote phosphor devices have been proposed. One remote phosphor device is the FORTIMO® brand downlight module available from Philips. The Philips remote phosphor device has a lens with phosphor in the lens. The lens is remote from the LED light sources. However, the conventional remote phosphor devices may have the same shortcomings with regard to efficiency as conventional phosphor LEDs.

SUMMARY

[0008] Some embodiments of the present invention provide a lighting device that includes a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto, an element in adjacent, spaced-apart relationship with the LED, and a pattern of discrete lumiphor-containing regions on a surface of the element. The lumiphor-containing regions are configured to receive light emitted by the LED and convert at least a portion of the received light to light having a longer wavelength than the first peak wavelength. In some embodiments, the remote element is a lens. In some embodiments, the remote element is a reflective element. In some embodiments, the remote element may be a combination of a lens and reflective element. In some embodiments the lumiphor-containing regions are within the element.

[0009] In some embodiments, the pattern of discrete lumiphor-containing regions includes a plurality of first and second lumiphor-containing regions. The first lumiphor-containing region is configured to convert light emitted by the LED to light having a second peak wavelength and the second lumiphor-containing region is

configured to convert light emitted by the LED to light having a third peak wavelength, shorter than the second peak wavelength. The first and second discrete lumiphor-containing regions may be spaced apart from one another on the surface of the remote element or may be in adjacent, substantially contacting relationship. In some embodiments, an intermediate material may be located between adjacent ones of the spaced apart first and second discrete lumiphor containing regions. The intermediate material can have a different (e.g., lower, higher) index of refraction than the first discrete lumiphor containing regions. For example, the intermediate material can have a lower index of refraction than the first discrete lumiphor containing regions, and a higher index of refraction than the second discrete lumiphor containing regions.

[0010] In some embodiments, the first peak wavelength is a blue or UV wavelength, and the first discrete lumiphor-containing regions comprise a first color phosphor and the second discrete lumiphor containing regions comprise a second color phosphor.

[0011] The lighting device may be a component, a module, a self-ballasted lamp or a light fixture.

[0012] In other embodiments, a lighting device includes a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto, a lens in adjacent, spaced-apart relationship with the LED, and a pattern of discrete lumiphor-containing regions on a surface of the lens. The pattern of discrete lumiphor-containing regions includes a plurality of first and second lumiphor-containing regions. The first lumiphor-containing region is configured to convert light emitted by the LED to light having a second peak wavelength and the second lumiphor-containing region is configured to convert light emitted by the LED to light having a third peak wavelength, shorter than the second peak wavelength. The first and second discrete lumiphor-containing regions may be spaced apart from one another on the surface of the lens, and may include an intermediate material between adjacent ones of the spaced apart first and second discrete lumiphor containing regions.

[0013] In other embodiments, a lighting device includes a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto, a reflective element in adjacent, spaced-apart relationship with the LED, and a pattern of discrete lumiphor-containing regions on a

surface of the reflective element. The pattern of discrete lumiphor-containing regions includes a plurality of first and second lumiphor-containing regions. The first lumiphor-containing region is configured to convert light emitted by the LED to light having a second peak wavelength and the second lumiphor-containing region is configured to convert light emitted by the LED to light having a third peak wavelength, shorter than the second peak wavelength. The first and second discrete lumiphor-containing regions may be spaced apart from one another on the surface of the reflective element, and may include an intermediate material between adjacent ones of the spaced apart first and second discrete lumiphor containing regions.

[0014] In other embodiments, a lighting device includes a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto, an element, such as a lens, in adjacent, spaced-apart relationship with the LED, and a pattern of discrete lumiphor-containing regions within the element. The lumiphor-containing regions are configured to receive light emitted by the LED and to convert at least a portion of the received light to light having a longer wavelength than the first peak wavelength.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate certain embodiment(s) of the invention.

[0016] Fig. 1 is a cross-sectional side view illustrating a conventional packaged light emitting device.

[0017] Fig. 2 is a cross sectional view of a light emitting device structure illustrating discrete lumiphor-bearing regions on a remote surface, according to some embodiments of the present invention.

[0018] Fig. 3 is a cross sectional view of a light emitting device structure illustrating discrete lumiphor-bearing regions on a remote surface, according to some embodiments of the present invention.

[0019] Figs. 4A-4B are cross sectional views illustrating light emitting device structures including discrete lumiphor-bearing regions that may be utilized according to some embodiments of the invention.

[0020] Figs. 5A-5B are cross sectional views illustrating light emitting device structures including discrete lumiphor-bearing regions that may be utilized according to further embodiments of the invention.

[0021] Fig. 6 is a cross sectional view illustrating a light emitting device structure including discrete lumiphor-bearing regions with reflective material disposed therebetween, according to further embodiments of the invention.

[0022] Fig. 7 is a cross sectional view illustrating a lighting fixture according to further embodiments of the present invention.

[0023] Fig. 8 is a cross sectional view illustrating a self-ballasted lamp according to further embodiments of the invention.

[0024] Fig. 9 is a cross sectional view illustrating a light emitting device module according to further embodiments of the invention.

[0025] Fig. 10 is a cross sectional view illustrating a component according to further embodiments of the invention.

DETAILED DESCRIPTION

[0026] The present invention now will be described more fully with reference to the accompanying drawings, in which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, the size and relative sizes of layers and regions may be exaggerated for clarity. Like numbers refer to like elements throughout.

[0027] It will be understood that when an element such as a layer, region or substrate is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present. It will be understood that if part of an element, such as a surface, is referred to as "inner," it is farther from the outside of the device than other parts of the element. Furthermore, relative terms such as "beneath" or "overlies" may be used herein to describe a relationship of one layer or region to another layer or region relative to a substrate or base layer as illustrated in the figures. It will be understood that these terms are intended to encompass different orientations of the device in addition to the orientation depicted in the figures. Finally, the term "directly" means that there are no intervening elements. As used

herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0028] It will be understood that, although the terms first, second, etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the present invention.

[0029] Embodiments of the invention are described herein with reference to cross-sectional, perspective, and/or plan view illustrations that are schematic illustrations of idealized embodiments of the invention. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments of the invention should not be construed as limited to the particular shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing. For example, a region illustrated or described as a rectangle will, typically, have rounded or curved features due to normal manufacturing tolerances. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the precise shape of a region of a device and are not intended to limit the scope of the invention.

[0030] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and this specification and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0031] The term "reflective material" is intended to include materials that are partially reflective.

[0032] Various embodiments of the present invention for packaging a semiconductor light emitting device will be described herein. As used herein, the term semiconductor light emitting device may include a light emitting diode, laser

diode and/or other semiconductor device which includes one or more semiconductor layers, which may include silicon, silicon carbide, gallium nitride and/or other semiconductor materials. A light emitting device may or may not include a substrate such as a sapphire, silicon, silicon carbide and/or another microelectronic substrate. A light emitting device may include one or more contact layers which may include metal and/or other conductive layers. In some embodiments, ultraviolet, blue and/or green light emitting diodes may be provided. Red and/or amber LEDs may also be provided. The design and fabrication of semiconductor light emitting devices are well known to those having skill in the art and need not be described in detail herein. For example, the semiconductor light emitting device may be gallium nitride-based LEDs or lasers fabricated on a silicon carbide substrate such as those devices manufactured and sold by Cree, Inc. of Durham, North Carolina. The present invention may be suitable for use with LEDs and/or lasers as described in United States Patent Nos. 6,201,262; 6,187,606; 6,120,600; 5,912,477; 5,739,554; 5,631,190; 5,604,135; 5,523,589; 5,416,342; 5,393,993; 5,338,944; 5,210,051; 5,027,168; 5,027,168; 4,966,862 and/or 4,918,497, the disclosures of which are incorporated herein by reference as if set forth fully herein. Other suitable LEDs and/or lasers are described in published U.S. Patent Publication No. US 2003/0006418 A1 entitled Group III Nitride Based Light Emitting Diode Structures With a Quantum Well and Superlattice, Group III Nitride Based Quantum Well Structures and Group III Nitride Based Superlattice Structures, published January 9, 2003, as well as published U.S. Patent Publication No. US 2002/0123164 A1 entitled Light Emitting Diodes Including Modifications for Light Extraction and Manufacturing Methods Therefor. Furthermore, phosphor coated LEDs, such as those described in U.S. Patent Publication No. 2004/0056260 A1, entitled Phosphor-Coated Light Emitting Diodes Including Tapered Sidewalls and Fabrication Methods Therefor, the disclosure of which is incorporated by reference herein as if set forth fully, may also be suitable for use in embodiments of the present invention. The LEDs and/or lasers may be configured to operate such that light emission occurs through the substrate. In such embodiments, the substrate may be patterned so as to enhance light output of the devices as is described, for example, in the above-cited U.S. Patent Publication No. US 2002/0123164 A1.

[0033] Embodiments of the present invention provide light emitting device structures with discrete lumiphor-bearing regions on a remote surface thereof. The

term "discrete" means that the lumiphor-bearing regions are separate, non-overlapping (except for manufacturing tolerances) regions. For example, in some embodiments discrete lumiphor-bearing regions may be provided as a pattern of phosphors on a lens, reflective surface, etc.

[0034] As used herein, the term lumiphor refers to a wide variety of luminescent materials including, but not limited to, phosphors, dyes, nanoparticles, crystalline converters, etc., which are well-known to those of skill in the art. For example, a phosphor is a luminescent material that emits a responsive radiation (e.g., visible light) when excited by a source of exciting radiation. In many instances, the responsive radiation has a wavelength which is different from the wavelength of the exciting radiation.

[0035] The pattern may be any suitable pattern and may, for example, take into account the efficacy of the particular phosphors used. The amount of phosphor (e.g., the thickness of the phosphor) and the area covered by the phosphor may be selected to provide a desired light output. The selection may be made in advance or may be tuned when the LED device is constructed. The phosphor may be applied using any suitable phosphor deposition technique, such as by inkjet or bubble jet printing, screen deposition or other techniques. Techniques for providing patterned phosphors on glass such as used in making color cathode ray tubes may, for example, be utilized.

[0036] In some embodiments, light from the phosphor may pass through the surface (e.g., when the phosphor is on a lens surface). In other embodiments, light from the phosphor may be reflected by the surface (e.g., when the phosphor is on a reflector). In other embodiments, portions of light from the phosphor may pass through a surface and portions may be reflected (e.g., when a lens and reflective surface are used in the LED device).

[0037] Embodiments of the present invention can overcome problems with conventional remote phosphor devices by providing patterned remote phosphors where multiple phosphors are provided with little or no overlap between the phosphors. By using patterned remote phosphors, the need for a separate mixing optic may be reduced or eliminated. The size of a phosphor pattern may be kept small such that the light from the different phosphors mixes and appears uniform. Furthermore, the optical loss from a diffuser may be avoided. In addition, optical efficiency of LED devices, according to embodiments of the present invention, may

be enhanced since light radiated from one phosphor may not be absorbed by another phosphor due to the separation of the phosphors.

[0038] According to some embodiments, the phosphors may be provided on a flame resistant material, such as glass or polycarbonate. In such embodiments, an additional lens for meeting flame rating requirements for luminaires may not be required.

[0039] Figs. 2 and 3 illustrate discrete lumiphor-containing regions 110a, 110b spaced apart laterally across a surface 112a of a light emitting device 100, wherein the surface 112a is remote from an LED excitation source 120. In Fig. 2, the remote surface 112a is the surface of a lens 112 and the lumiphor-containing regions 110a, 110b are spaced apart laterally across the surface 112a of the lens 112. The space 116 between the LED excitation source 120 and the lens 112 may be a vacuum or contain air, gas, encapsulant material, transparent liquid, glass, mineral oxide, crystalline or polycrystalline material, etc. In Fig. 3, the remote surface 114a is the surface of a reflective element 114 and the lumiphor-containing regions 110a, 110b are spaced apart laterally across the reflective surface 114a. The space 116 between the LED excitation source 120 and the reflective element 114 may be a vacuum or contain air, gas, encapsulant material, transparent liquid, glass, mineral oxide, crystalline or polycrystalline material, etc.

[0040] Discrete lumiphor-containing regions 110a, 110b can have virtually any shape, configuration, and size. Lumiphor particle size utilized may be dependent upon the printing process utilized. Typically, phosphor particle size range from about 50 microns to about 5 millimeters.

[0041] In general, light is emitted by a phosphor when a photon having energy higher than a bandgap of the phosphor material passes through the phosphor and is absorbed. When the photon is absorbed, an electronic carrier in the phosphor is stimulated from a resting state to an excited state. When the electronic carrier decays back to a resting state, a photon can be emitted by the phosphor. However, the emitted photon may have an energy that is less than the energy of the absorbed photon. Thus, the emitted photon may have a wavelength that is longer than the absorbed photon.

[0042] The LED excitation source 120 of Figs. 2 and 3 may be configured to generate light having a first peak wavelength, for example, in the blue or UV region of the visible spectrum. The first lumiphor-containing region 110a is configured to

convert light emitted by the LED excitation source 120 to light having a second peak wavelength that is longer than the first peak wavelength. That is, the first lumiphor-containing region 110a is configured to absorb light emitted by the LED's excitation source 120 and to responsively emit light having a longer wavelength. For example, the first lumiphor-containing region 110a may be configured to emit red light in response to absorbing blue or UV light. The second lumiphor-containing region 110b is configured to absorb light emitted by the LED excitation source 120 and to responsively emit light having a third peak wavelength that is longer than the first peak wavelength (of light emitted by the LED excitation source 120) but that is shorter than the second peak wavelength. For example, the second lumiphor-containing region 110b may be configured to emit yellow, yellow-green or green light in response to absorbing blue or UV light from the LED excitation source 120. As used herein, the term green/yellow includes yellow, yellow-green and/or green.

[0043] Suitable red phosphors for embodiments of the present invention include, but are not limited to, $\text{Sr}_2\text{Si}_5\text{N}_8\text{:Eu}^{2+}$, and $\text{CaAlSiN}_3\text{:Eu}$. Other red phosphors that can be used include, but are not limited to, phosphors from the Eu^{2+} -SiAlON family of phosphors, as well as $\text{CaSiN}_2\text{:Ce}^{3+}$, $\text{CaSiN}_2\text{:Eu}^{2+}$ and/or phosphors from the $(\text{Ca},\text{Si},\text{Ba})\text{SiO}_4\text{:Eu}^{2+}$ (BOSE) family. Suitable yellow phosphors include, but are not limited to, $\text{Y}_3\text{Al}_5\text{O}_{12}\text{:Ce}^{3+}$ (Ce:YAG), $\text{CaAlSiN}_3\text{:Ce}^{3+}$, and phosphors from the Eu^{2+} -SiAlON-family, and/or the BOSE family. Suitable green phosphors include, but are not limited to, phosphors from the BOSE family, as well as $\text{CaSi}_2\text{O}_2\text{N}_2\text{:Eu}^{2+}$. The phosphor may also be doped at any suitable level to provide a desired wavelength of light output. In some embodiments, Ce and/or Eu may be doped into a phosphor at a dopant concentration in a range of about 0.1% to about 20%. Suitable phosphors are available from numerous suppliers, including Mitsubishi Chemical Corporation, Tokyo, Japan, Leuchtstoffwerk Breitung GmbH, Breitung, Germany, and Intematix Company, Fremont, California.

[0044] Other suitable phosphors that may be utilized according to embodiments of the present invention include nanocrystals (NCs) with a cadmium selenide (CdSe) core surrounded by a zinc sulfide (ZnS) shell that can convert short wavelengths to longer ones. Such crystals can effectively absorb UV-green light and emit green-red light. The absorption and emission spectra of these NCs can be tuned by controlling the diameter of the CdSe core and the thickness of the ZnS shell. Moreover, the NCs have the advantages of high quantum efficiency and

photostability. In particular, mixing the NCs with gold nanoparticles induces coupling between CdSe/ZnS NCs and surface plasmons (SPs) on the gold that can enhance the color conversion efficiency.

[0045] As will be appreciated by those of skill in the art in light of the present disclosure, phosphors may also be incorporated with other materials, for example, to provide a protective coating, to provide a coating that secures the phosphors to a surface, etc. In addition, embodiments of the present invention may utilize dyes or any other type of lumiphor that can be "printed" or implanted, for example, as described in Luminescence Conversion of Blue Light Emitting Diodes, P. Schlotter et al., Appl. Phys. A 64, 417–418 (1997), which is incorporated herein by reference in its entirety.

[0046] According to some embodiments of the present invention, patterns of discrete metal-organic chemical vapor deposition (MOCVD) deposited crystalline or polycrystalline convertors on a surface of a lens or reflective surface can be utilized. MOCVD deposited crystalline and polycrystalline convertors are described in U.S. Patent No. 6,337,536, and in U.S. Patent Application Publication No. 2005/0006659, which are incorporated herein by reference in their entireties.

[0047] The LED excitation source 120 may be any suitable LED light source that excites phosphor, such as blue LEDs or UV LEDs. However, other types of LED excitation sources may be utilized.

[0048] Figs. 4A-4B and 5A-5B illustrate various ways in which discrete lumiphor-containing regions can be spaced laterally across a remote surface, such as the surface 112a of a remote lens 112, according to some embodiments of the present invention. For example, as shown in Fig. 4A, a plurality of first and second discrete lumiphor-containing regions 110a, 110b are provided on a remote surface 112a. The discrete lumiphor-containing regions 110a, 110b can include different types of phosphors and/or phosphors having different doping levels that are configured to emit different colors of light when stimulated by light within their respective excitation regions.

[0049] The first discrete lumiphor-containing regions 110a can be configured to emit longer wavelength light, such as red light, in response to blue or UV light emitted by an LED excitation source 120 (Fig. 2), while the second discrete lumiphor-containing regions 110b can be configured to emit shorter wavelength light, such as green/yellow light, in response to blue or UV light emitted by the LED excitation

source 120.

[0050] As illustrated in Figs. 4A and 4B, the first and second discrete lumiphor-containing regions 110a, 110b can be disposed on the remote surface 112a in an alternating manner. However, in some embodiments, two discrete lumiphor-containing regions of the same type can be disposed adjacent one another and may abut or be spaced apart from one another as shown in Fig. 4A.

[0051] As shown in Fig. 4B, intermediate regions 111 can be disposed between adjacent ones of the discrete lumiphor-containing regions 110a, 110b. The intermediate regions 111 can be provided to reduce the possibility of light emitted by one discrete lumiphor-containing region passing into another discrete lumiphor-containing region and being reabsorbed therein. In some embodiments, the intermediate regions 111 can have a lower index of refraction than either the first discrete lumiphor-containing regions 110a or the second discrete lumiphor-containing regions 110b. In some embodiments, the intermediate regions 111 can have an index of refraction that is lower than the index of refraction of the second lumiphor-containing regions 110b and that is higher than the index of refraction of the first lumiphor-containing regions 110a. Silicone polymer, which can have an index of refraction of about 1.3 to about 1.55 is a suitable material for forming the intermediate regions 111. The phosphors in the discrete lumiphor-containing regions 110a and 110b can have an index of refraction of about 1.5 to about 2.5.

[0052] In some embodiments, the intermediate regions 111 can include reflective material, as illustrated in Fig. 6. For example, inward facing reflective intermediate regions 111 can reflect some light back into a chamber for color mixing or recycling. In some embodiments, these reflectors could be wavelength selective, diachronic, or tuned reflectors so that, for example, the excitation wavelength is reflected back, whereas the phosphor emitted wavelength can pass through. The use of reflectors and partial reflectors has some efficiency benefit as the phosphor wavelengths are not scattered when they are recycled.

[0053] Referring to Fig. 5A, according to some embodiments of the invention, discrete lumiphor-containing regions 110 may be provided on a remote surface 112a at regular and/or irregular intervals. Furthermore, multiple lumiphor-containing regions 110 having different types of phosphors may be provided on the remote surface 112a. The lumiphor-containing regions 110 can abut one another and/or be spaced apart as shown in Fig. 5A.

[0054] Referring to Fig. 5B, an overlayer 140 may be provided on the LED structure 100 including the discrete lumiphor-containing regions 110. The overlayer 140 may include, for example, a layer of silicone or other encapsulant material, and in some embodiments may include a lumiphor-containing material. In some embodiments, the overlayer 140 may include a different phosphor material from the phosphor material contained in the discrete lumiphor-containing regions 110. For example, the discrete lumiphor-containing regions 110 can include a red phosphor, while the overlayer 140 may include a green/yellow phosphor, or vice versa.

[0055] The overlayer 140 may include other materials/structures that can change optical properties of light emitted by the LED structure 120. For example, the overlayer 140 can include optical diffusing/scattering particles and/or the overlayer 140 can be textured and/or patterned to increase optical extraction from the device.

[0056] Discrete lumiphor-containing regions provided on a remote surface of an LED structure, according to embodiments of the present invention, may have any desired pattern, such as dots, lines, triangles, hexagons, etc., with any desired periodicity. Further, the discrete lumiphor-containing regions 110 provided on the illustrated remote surface 112a may be in contact with adjacent lumiphor-containing regions and/or may be separated from adjacent lumiphor-containing regions. For example, in a warm white LED application, red and yellow phosphors may be physically separated to reduce reabsorption of yellow light by the red phosphors. The discrete lumiphor-containing regions 110 provided on the remote surface 112a can remain at different thicknesses and/or can be planarized.

[0057] Embodiments of the present invention may be utilized in a wide range of illumination devices including, but not limited to, A-lamps, downlights, lay-in fixtures, and the like. Figs. 7 through 10 illustrate exemplary alternative embodiments of lighting devices according to the present inventive subject matter.

[0058] Fig. 7 illustrates a light fixture 700 incorporating embodiments of the present inventive subject matter. As used herein, the term light fixture includes devices that are classified under UL 1598 safety standard. As seen in Fig. 7, the light fixture 700 includes discrete lumiphor-containing regions 710 on a remote surface 712. The light fixture 700 also includes one or more solid state light sources 720, such as LEDs, a power supply 722 and a heat sink 724. While a lay-in fixture, such as the LR24 from Cree LED Lighting, is illustrated in Fig. 7, other light fixtures may

be provided. For example, downlights, wall washer, pendants, surface mount or other types of fixtures may be provided.

[0059] As seen in Fig. 8, a lighting device according to embodiments of the present inventive subject matter may be provided as a self-ballasted lamp 800, such as an A-lamp. The lamp of Fig. 8 includes discrete lumiphor-containing regions 810 on a remote surface 812. The lamp 800 also includes one or more solid state light sources 820, such as LEDs, a power supply 822 and a connector 824. The connector 824 is illustrated as an Edison screw-base, however, other connector types, such as a pin base or GU-24 base, could also be utilized. Furthermore, while the lamp 800 is illustrated as an A-lamp, other lamp configurations may be provided, such as a PAR or BR lamp or non-standard lamp configurations. As used herein, a self-ballasted lamp includes lamps that are classified under UL 1993 safety standard.

[0060] The lighting device according to embodiments of the present inventive subject matter illustrated in Fig. 9 is provided as a module 800. As used herein, an LED module refers to multiple interconnected LEDs on a circuit board or other substrate but does not include a power supply. The module 900 of Fig. 9 includes discrete lumiphor-containing regions 910 on a remote surface 912. The module 900 also includes component solid state light sources 920, such as component LEDs, a substrate 922, an insulating/interconnection structure 924 and contact pads 926.

[0061] Fig. 10 illustrates a component 1000 incorporating embodiments of the present inventive subject matter. As seen in Fig. 10, the component 1000 includes discrete lumiphor-containing regions 1010 on a remote surface 1012. The component 1000 also includes one or more solid state light sources 1020 and a component package 1022. Such component packages may include multiple LED die, such as is provided by the X Lamp and MC components provided by Cree, Inc. of Durham, NC. The discrete lumiphor-containing regions 1010 may be provided on a lens of the component or may be on a separate structure.

[0062] The discrete lumiphor-containing regions illustrated in Figs. 7 through 10 are illustrated as being provided on light transmitting structures. However, the discrete lumiphor-containing regions may be provided on opaque surfaces as well. For example, the discrete lumiphor-containing regions 710 in Fig. 7 may be provided on the slanted surfaces between the LEDs 720 and the remote surface 712. These opaque surfaces may be highly reflective to improve overall system efficacy. Likewise, combinations of reflective and transmitting structures may also be

provided. These reflective and transmitting structures may be provided as separate or combined structures. [0053] While particular embodiments are described herein, various combinations and sub-combinations of the structures described herein are contemplated and will be apparent to a skilled person having knowledge of this disclosure.

[0063] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. Therefore, it is to be understood that the foregoing is illustrative of the present invention and is not to be construed as limited to the specific embodiments disclosed, and that modifications to the disclosed embodiments, as well as other embodiments, are intended to be included within the scope of the appended claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

WHAT IS CLAIMED IS:

1. A lighting device, comprising:
a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto;
an element in adjacent, spaced-apart relationship with the LED; and
a pattern of discrete lumiphor-containing regions on a surface of the element, wherein the lumiphor-containing regions are configured to receive light emitted by the LED and to convert at least a portion of the received light to light having a longer wavelength than the first peak wavelength.
2. The lighting device of Claim 1, wherein the element comprises a lens.
3. The lighting device of Claim 1, wherein the element comprises a reflective element.
4. The lighting device of Claim 1, wherein the pattern of discrete lumiphor-containing regions comprises a plurality of first and second lumiphor-containing regions, wherein the first lumiphor-containing region is configured to convert light emitted by the LED to light having a second peak wavelength and the second lumiphor-containing region is configured to convert light emitted by the LED to light having a third peak wavelength, shorter than the second peak wavelength.
5. The lighting device of Claim 4, wherein the first and second discrete lumiphor-containing regions are spaced apart from one another on the surface of the element.
6. The lighting device of Claim 5, further comprising an intermediate material between adjacent ones of the spaced apart first and second discrete lumiphor containing regions.
7. The lighting device of Claim 6, wherein the intermediate material comprises reflective material.

8. The lighting device of Claim 6, wherein the intermediate material has a lower index of refraction than the first discrete lumiphor containing regions.

9. The lighting device of Claim 6, wherein the intermediate material has a higher index of refraction than the second discrete lumiphor containing regions.

10. The lighting device of Claim 4, wherein the first peak wavelength comprises a blue or UV wavelength, wherein the first discrete lumiphor-containing regions comprise a first color phosphor and wherein the second discrete lumiphor containing regions comprise a second color phosphor.

11. The lighting device of Claim 1, wherein the lighting device comprises a component.

12. The lighting device of Claim 1, wherein the lighting device comprises a module.

13. The lighting device of Claim 1, wherein the lighting device comprises a self-ballasted lamp.

14. The lighting device of Claim 1, wherein the lighting device comprises a light fixture.

15. A lighting device, comprising:
a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto;
a lens in adjacent, spaced-apart relationship with the LED; and
a pattern of discrete lumiphor-containing regions on a surface of the lens, wherein the pattern of discrete lumiphor-containing regions comprises a plurality of first and second lumiphor-containing regions, wherein the first lumiphor-containing region is configured to convert light emitted by the LED to light having a second peak wavelength and the second lumiphor-containing region is configured to convert light

emitted by the LED to light having a third peak wavelength, shorter than the second peak wavelength.

16. The lighting device of Claim 15, wherein the first and second discrete lumiphor-containing regions are spaced apart from one another on the surface of the lens.

17. The lighting device of Claim 16, further comprising an intermediate material between adjacent ones of the spaced apart first and second discrete lumiphor containing regions.

18. The lighting device of Claim 17, wherein the intermediate material comprises reflective material.

19. A lighting device, comprising:
a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto;
a reflective element in adjacent, spaced-apart relationship with the LED; and
a pattern of discrete lumiphor-containing regions on a surface of the reflective element, wherein the pattern of discrete lumiphor-containing regions comprises a plurality of first and second lumiphor-containing regions, wherein the first lumiphor-containing region is configured to convert light emitted by the LED to light having a second peak wavelength and the second lumiphor-containing region is configured to convert light emitted by the LED to light having a third peak wavelength, shorter than the second peak wavelength.

20. The lighting device of Claim 19, wherein the first and second discrete lumiphor-containing regions are spaced apart from one another on the surface of the reflective element.

21. The lighting device of Claim 20, further comprising an intermediate material between adjacent ones of the spaced apart first and second discrete lumiphor containing regions.

22. The lighting device of Claim 21, wherein the intermediate material comprises reflective material.

23. A lighting device, comprising:
a semiconductor light emitting device (LED) configured to emit light having a first peak wavelength upon the application of a voltage thereto;
an element in adjacent, spaced-apart relationship with the LED; and
a pattern of discrete lumiphor-containing regions within the element, wherein the lumiphor-containing regions are configured to receive light emitted by the LED and to convert at least a portion of the received light to light having a longer wavelength than the first peak wavelength.

24. The lighting device of Claim 23, wherein the element comprises a lens.

25. The lighting device of Claim 24, wherein the pattern of discrete lumiphor-containing regions comprises a plurality of first and second lumiphor-containing regions, wherein the first lumiphor-containing region is configured to convert light emitted by the LED to light having a second peak wavelength and the second lumiphor-containing region is configured to convert light emitted by the LED to light having a third peak wavelength, shorter than the second peak wavelength.

26. The lighting device of Claim 25, wherein the first and second discrete lumiphor-containing regions are spaced apart from one another within the element.

27. The lighting device of Claim 26, further comprising an intermediate material between adjacent ones of the spaced apart first and second discrete lumiphor containing regions.

28. The lighting device of Claim 27, wherein the intermediate material comprises reflective material.

1/6

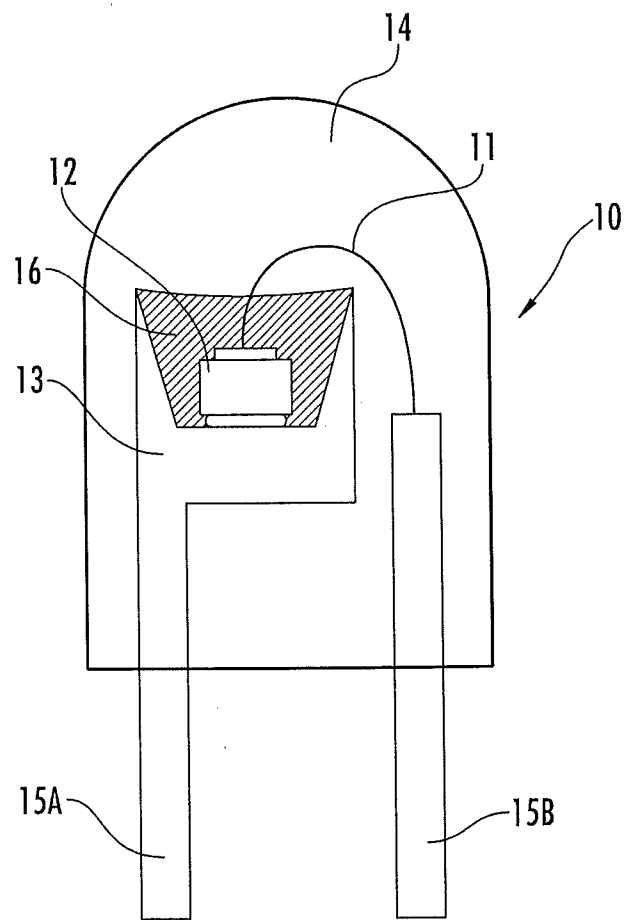


FIG. 1
(PRIOR ART)

2/6

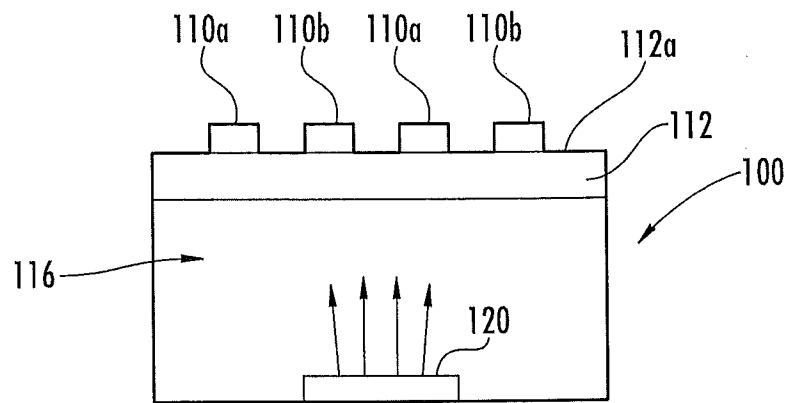


FIG. 2

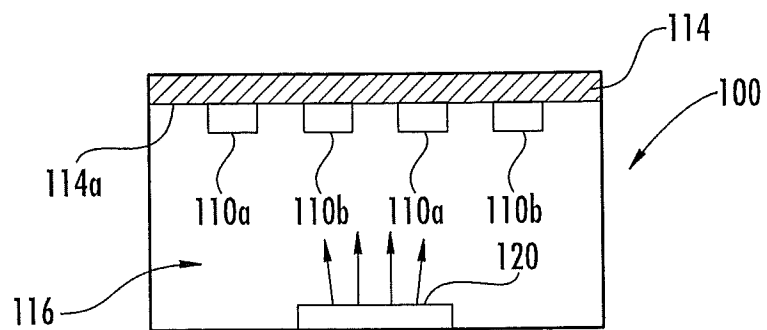


FIG. 3

3/6

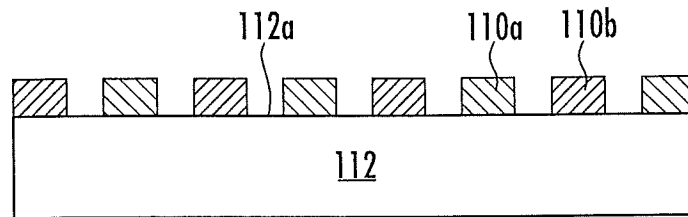


FIG. 4A

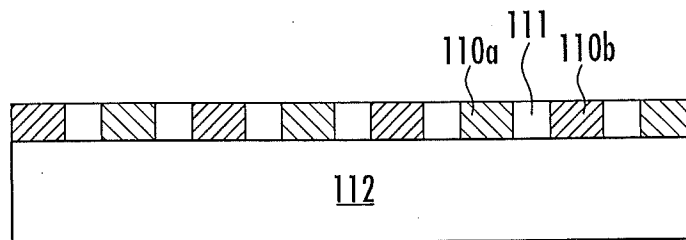


FIG. 4B

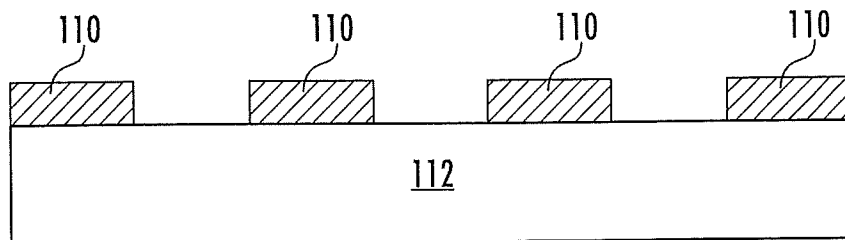


FIG. 5A

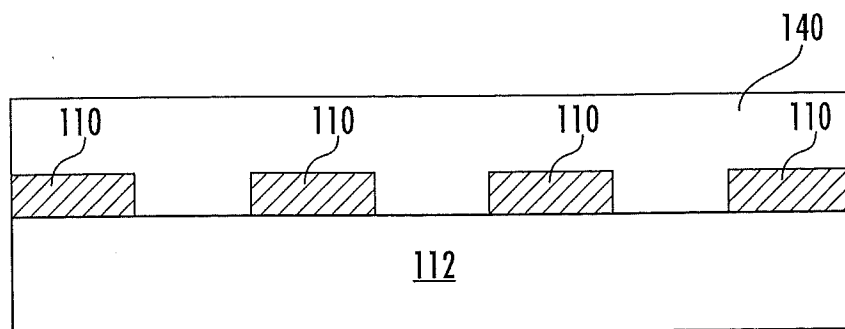


FIG. 5B

4/6

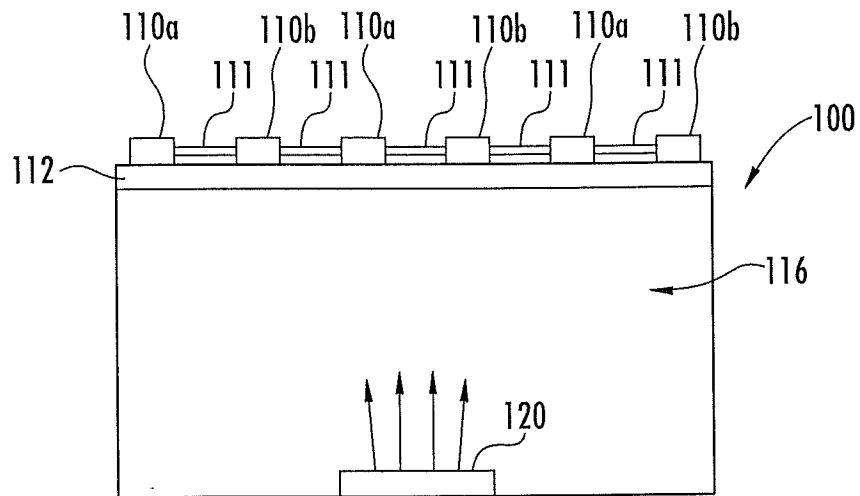


FIG. 6

5/6

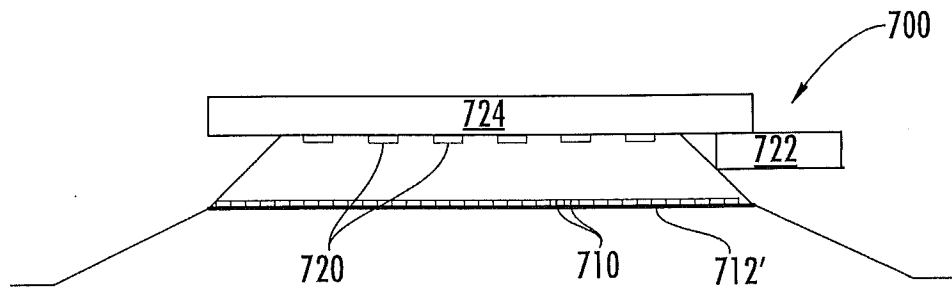


FIG. 7

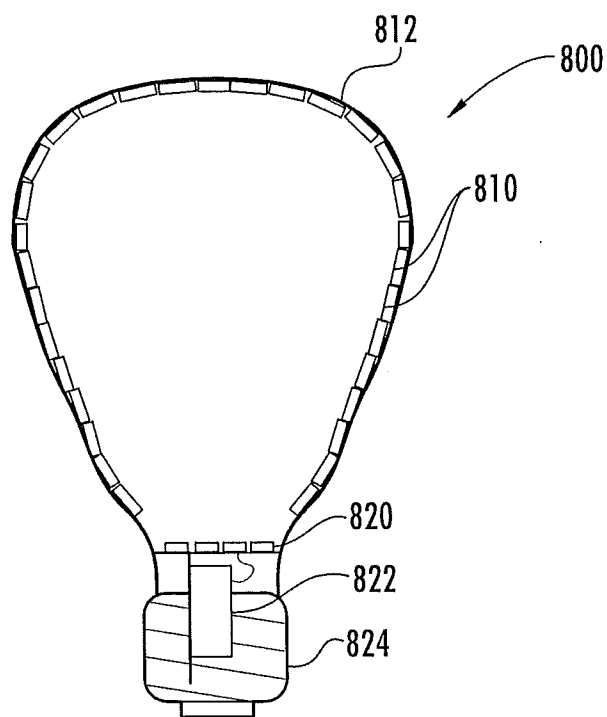


FIG. 8

6/6

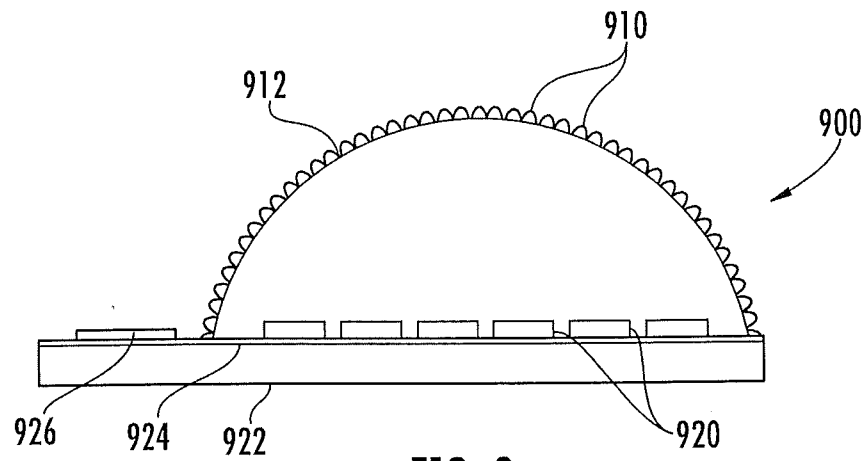


FIG. 9

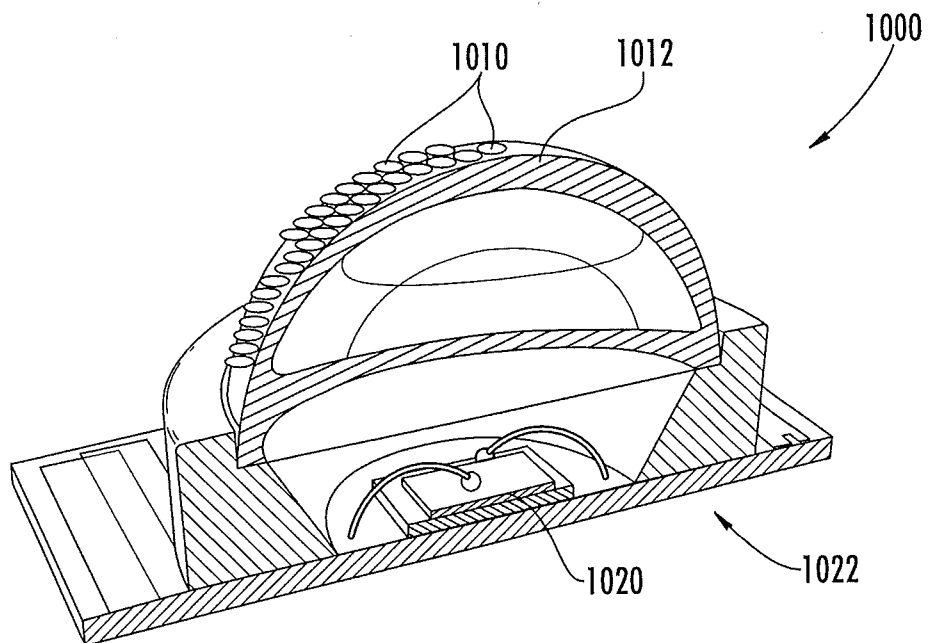


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/036583

A. CLASSIFICATION OF SUBJECT MATTER
INV. F21K99/00 H01L33/50
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F21K H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/101930 A1 (LI YI-QUN [US]) 23 April 2009 (2009-04-23)	1,2,4-6, 8-17, 23-27
Y	the whole document	3,19-21
X	US 2009/086475 A1 (CARUSO JAMES [US] ET AL) 2 April 2009 (2009-04-02) paragraph [0057]; figure 5	1
Y	US 6 841 804 B1 (CHEN LUNG-CHIEN [TW] ET AL) 11 January 2005 (2005-01-11) the whole document	3,19-21
X,P	WO 2009/107052 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; HOELEN CHRISTOPH G A [NL]; DEEBEN) 3 September 2009 (2009-09-03) page 30, line 10 - line 34; figures 7a,7b	1,4,5, 10-14, 23,25,26
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 September 2010

Date of mailing of the international search report

27/09/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Berthommé, Emmanuel

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/036583

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	WO 2009/146266 A1 (BRIDGELUX INC [US]; XU TAO [US]; HELBING RENE PETER [US]) 3 December 2009 (2009-12-03) the whole document -----	1,23
X,P	WO 2009/136351 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; DEEBEN JOSEPHUS P A [NL]; HENDRIK) 12 November 2009 (2009-11-12) * abstract; figures -----	1,23
X,P	WO 2009/119034 A1 (PANASONIC CORP [JP]; NAGAI HIDEO; UENO YASU HARU) 1 October 2009 (2009-10-01) paragraph [0102] - paragraph [0108]; figure 8b -----	23-28
E	WO 2010/062525 A1 (BRIDGELUX INC [US]; HELBING RENE P [US]; SHAIKEVITCH ALEX [US]) 3 June 2010 (2010-06-03) * abstract; figures -----	1,23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/036583

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009101930 A1	23-04-2009	CA 2702436 A1 CN 101828271 A EP 2201617 A1 KR 20100077199 A WO 2009052329 A1	23-04-2009 08-09-2010 30-06-2010 07-07-2010 23-04-2009
US 2009086475 A1	02-04-2009	WO 2009045922 A2	09-04-2009
US 6841804 B1	11-01-2005	NONE	
WO 2009107052 A1	03-09-2009	NONE	
WO 2009146266 A1	03-12-2009	US 2009296369 A1	03-12-2009
WO 2009136351 A1	12-11-2009	NONE	
WO 2009119034 A1	01-10-2009	NONE	
WO 2010062525 A1	03-06-2010	US 2010127289 A1	27-05-2010