



US 20100191206A1

(19) **United States**(12) **Patent Application Publication****Hird et al.**(10) **Pub. No.: US 2010/0191206 A1**(43) **Pub. Date: Jul. 29, 2010**(54) **ABSORBENT ARTICLES COMPRISING A SLOW RECOVERY ELASTOMER**

(76) Inventors: **Bryn Hird**, Colerain Twp., OH (US); **Robin Lynn McKiernan**, Mason, OH (US); **Edward Joseph Urankar**, Mason, OH (US); **Janet Neton**, West Chester, OH (US); **Mattias Schmidt**, Idstein, OH (US); **Joerg Mueller**, Karben (DE)

Correspondence Address:


THE PROCTER & GAMBLE COMPANY**Global Legal Department - IP****Sycamore Building - 4th Floor, 299 East Sixth Street****CINCINNATI, OH 45202 (US)**(21) Appl. No.: **12/752,373**(22) Filed: **Apr. 1, 2010****Related U.S. Application Data**


(63) Continuation of application No. 11/144,508, filed on Jun. 3, 2005, now Pat. No. 7,717,893.

(60) Provisional application No. 60/577,037, filed on Jun. 4, 2004.

Publication Classification(51) **Int. Cl.****A61F 13/45** (2006.01)**A61F 13/15** (2006.01)(52) **U.S. Cl.** **604/367**; 604/385.23; 604/385.29; 604/385.28; 604/385.19(57) **ABSTRACT**

An absorbent article comprising at least one topsheet; a liquid impervious backsheet joined with the topsheet; an absorbent core interposed between the topsheet and backsheet; and a slow recovery elastomer. The slow recovery elastomer exhibits a normalized unload force at 37° C. of greater than about 0.04N and at least about 20% post elongation strain at 22° C. after 15 seconds of recovery.

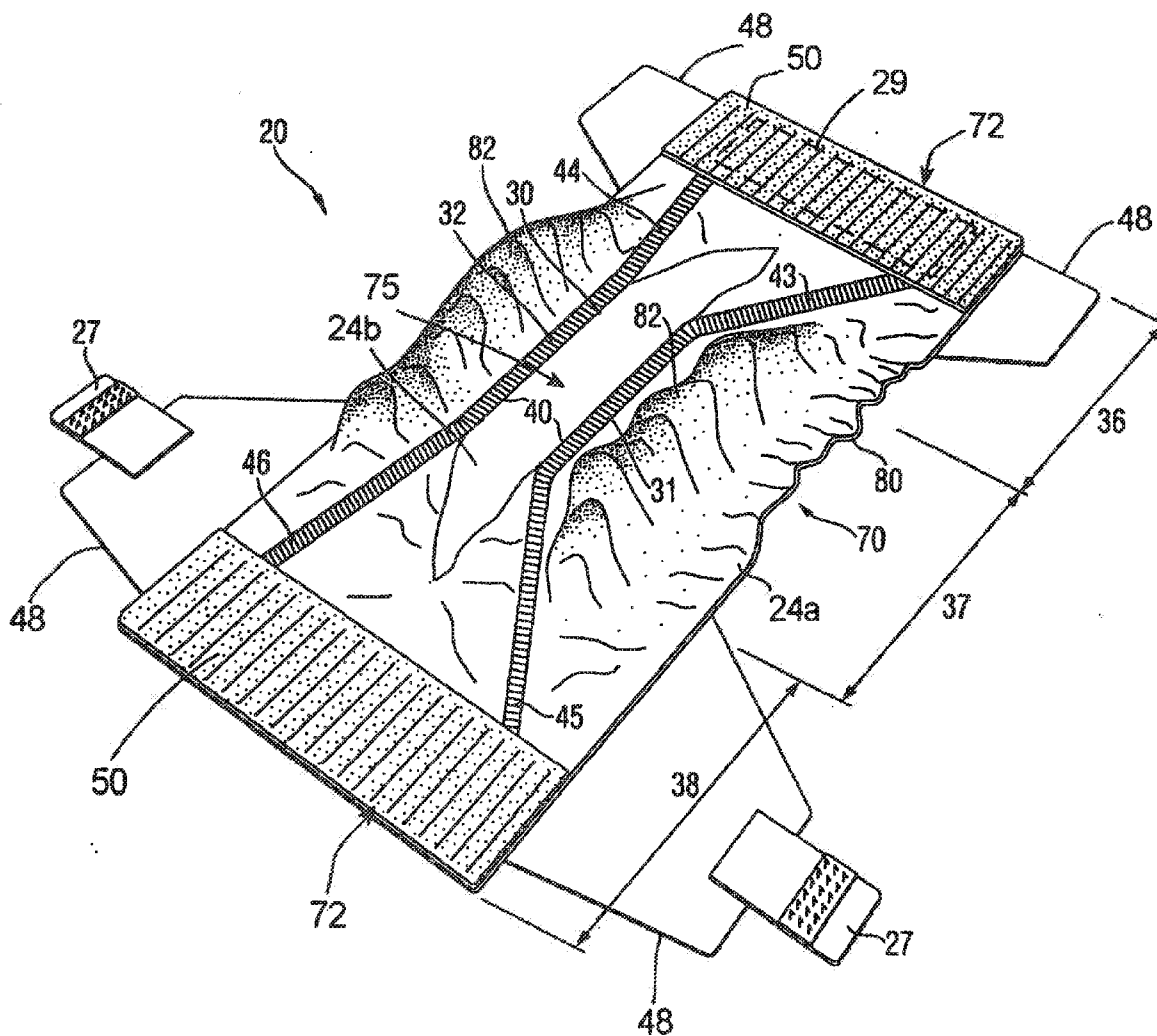

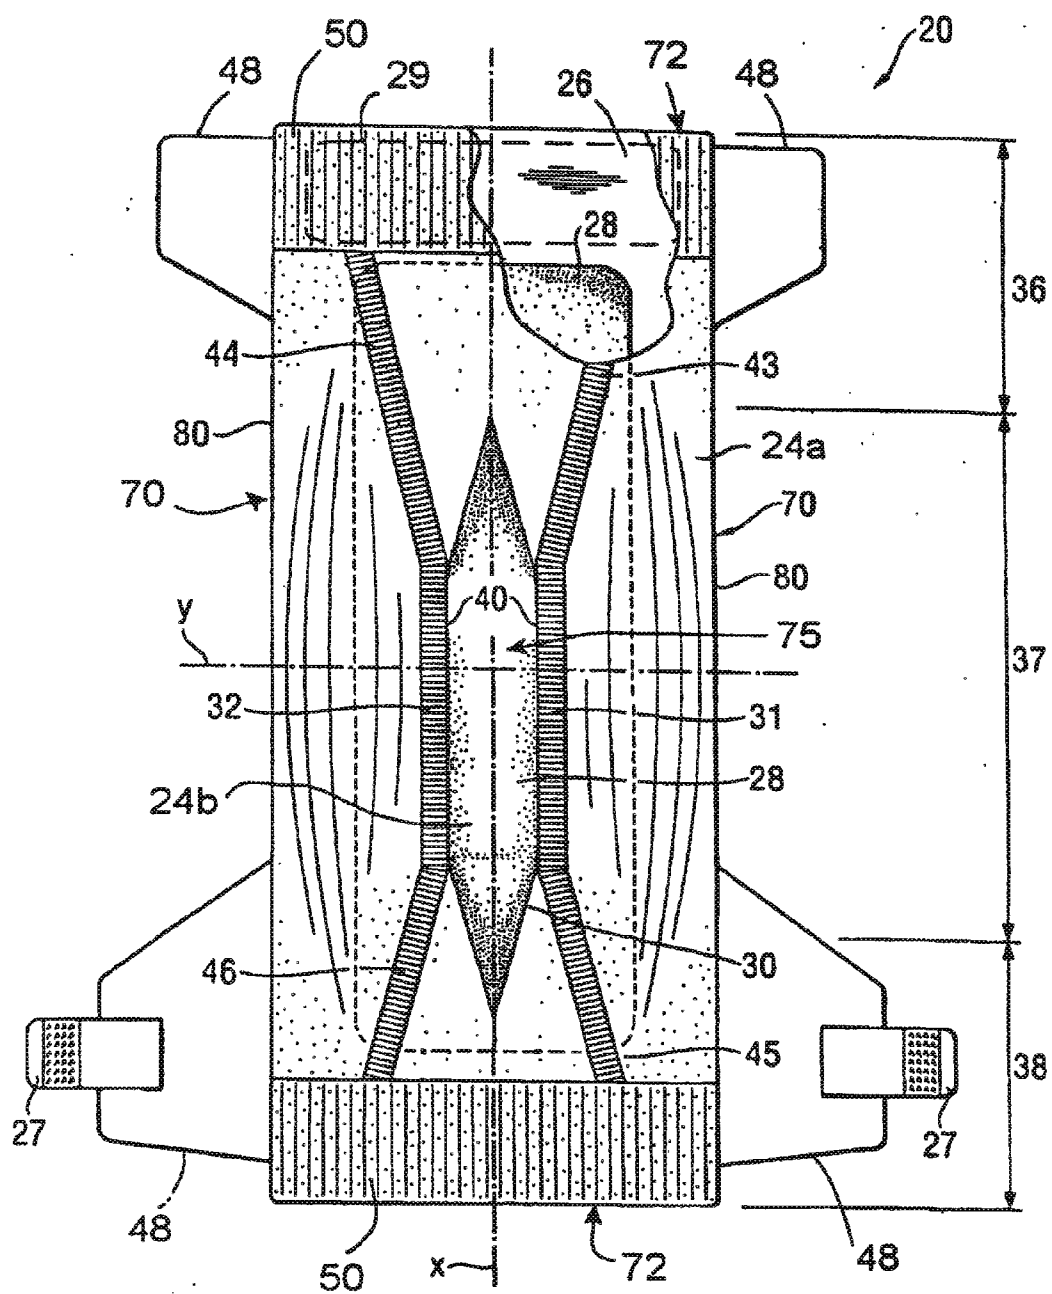

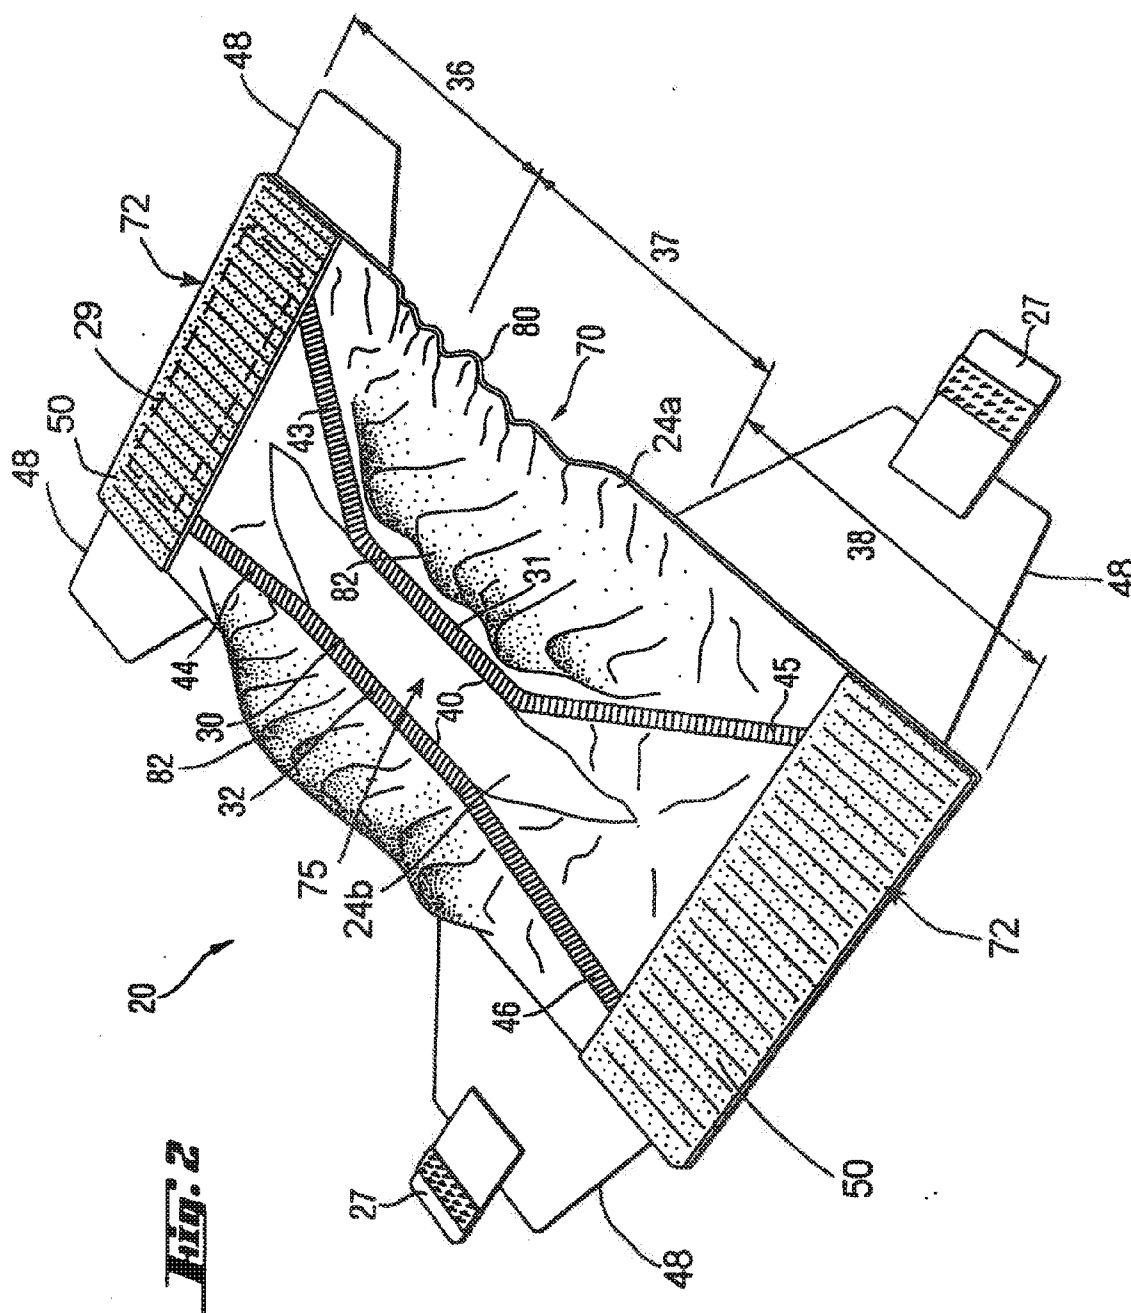


Fig. 3a

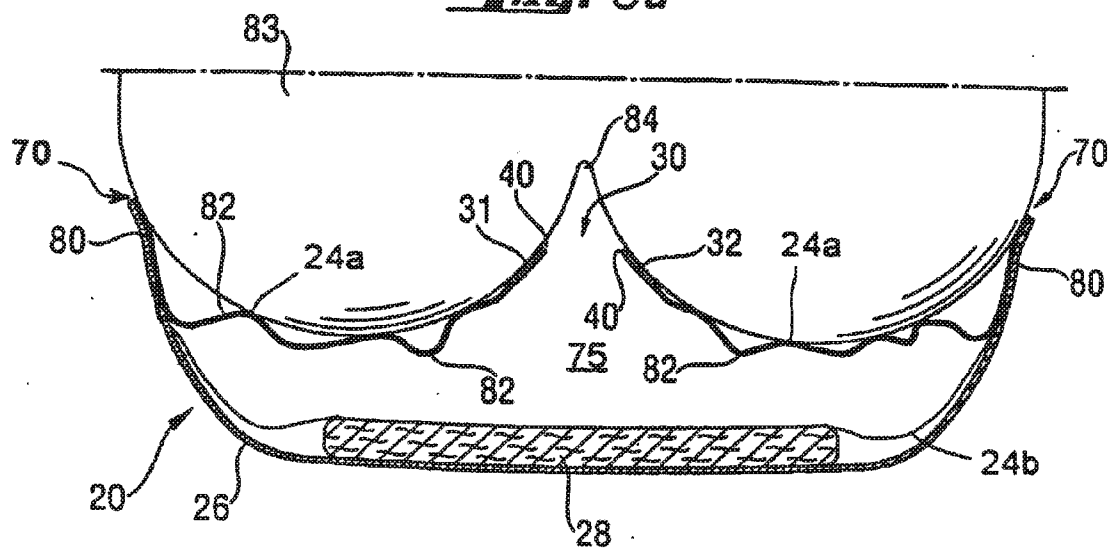
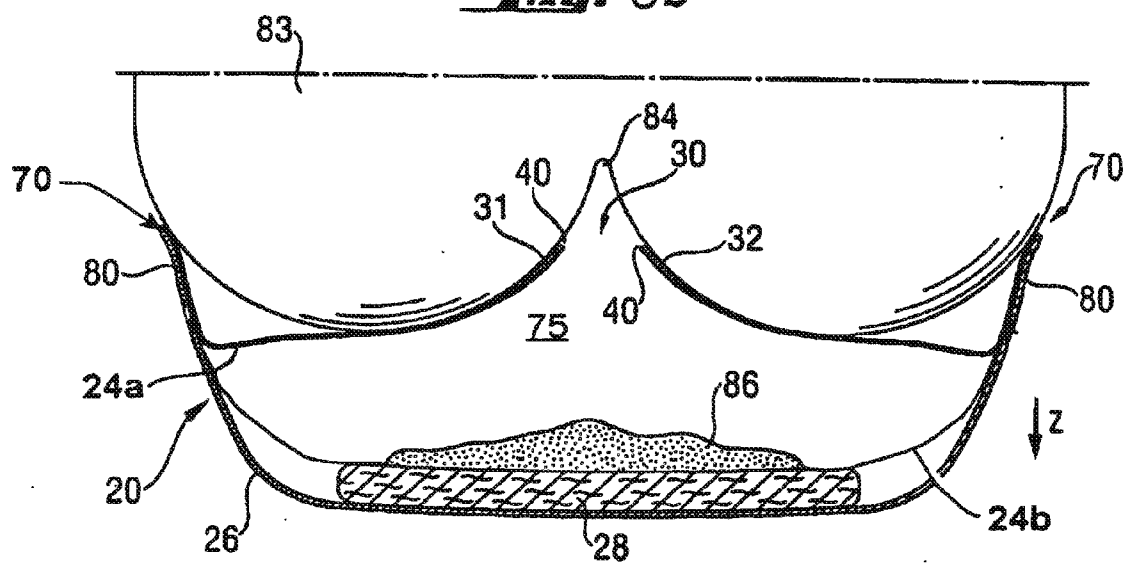
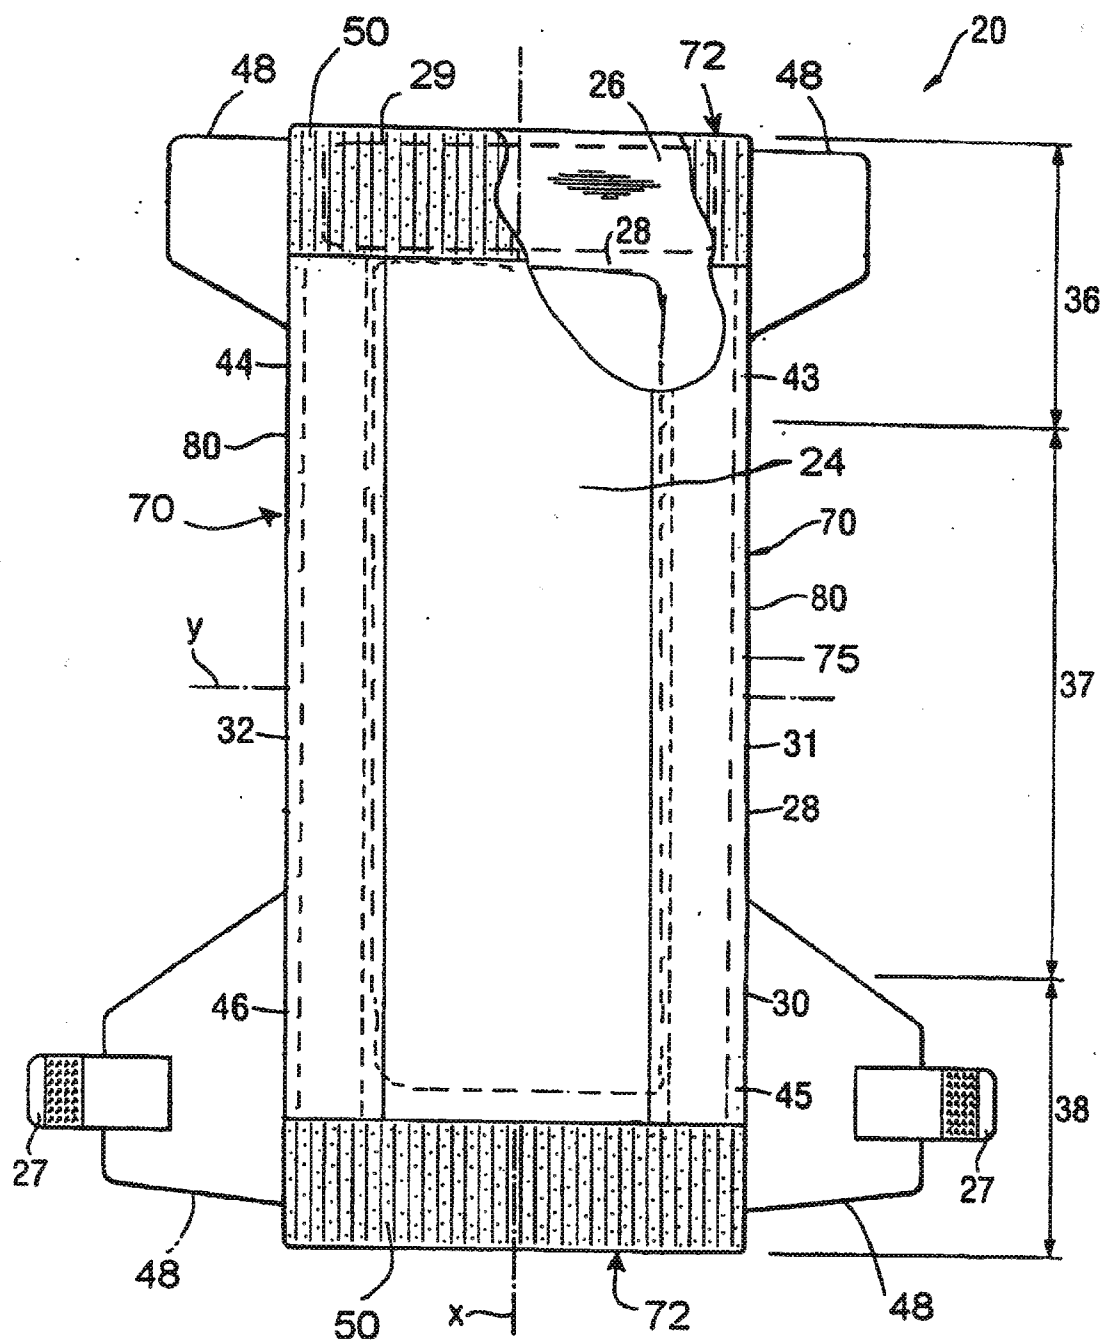


Fig. 3b





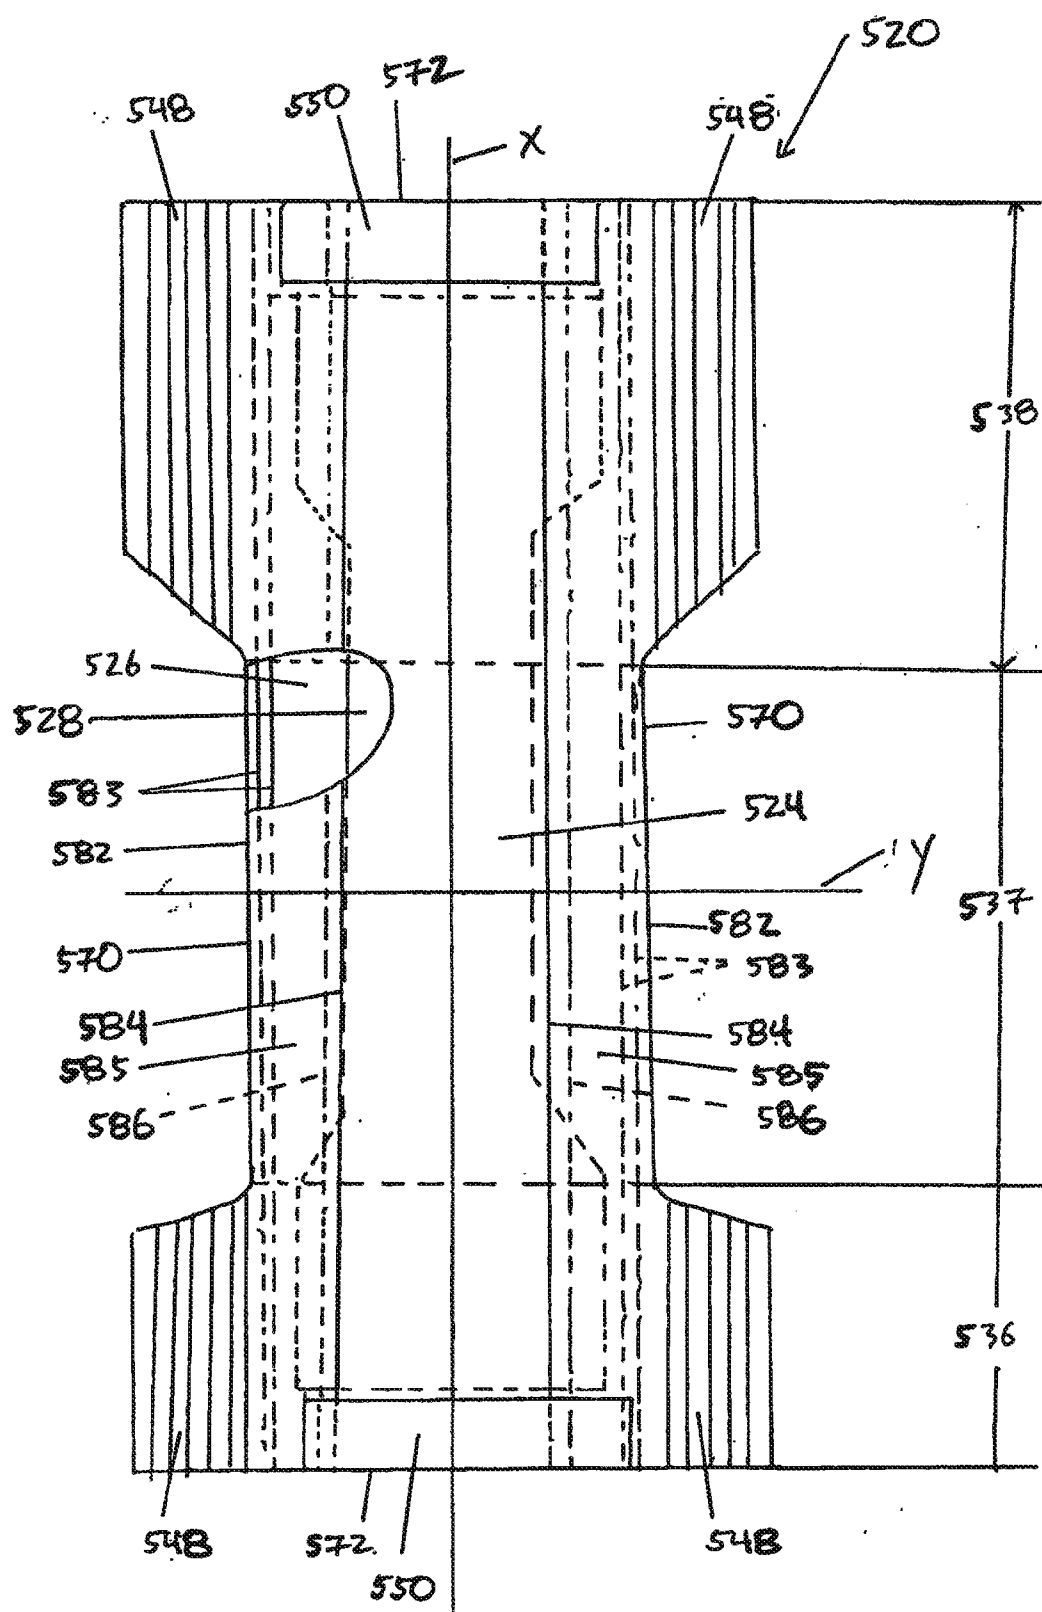


Fig. 5a

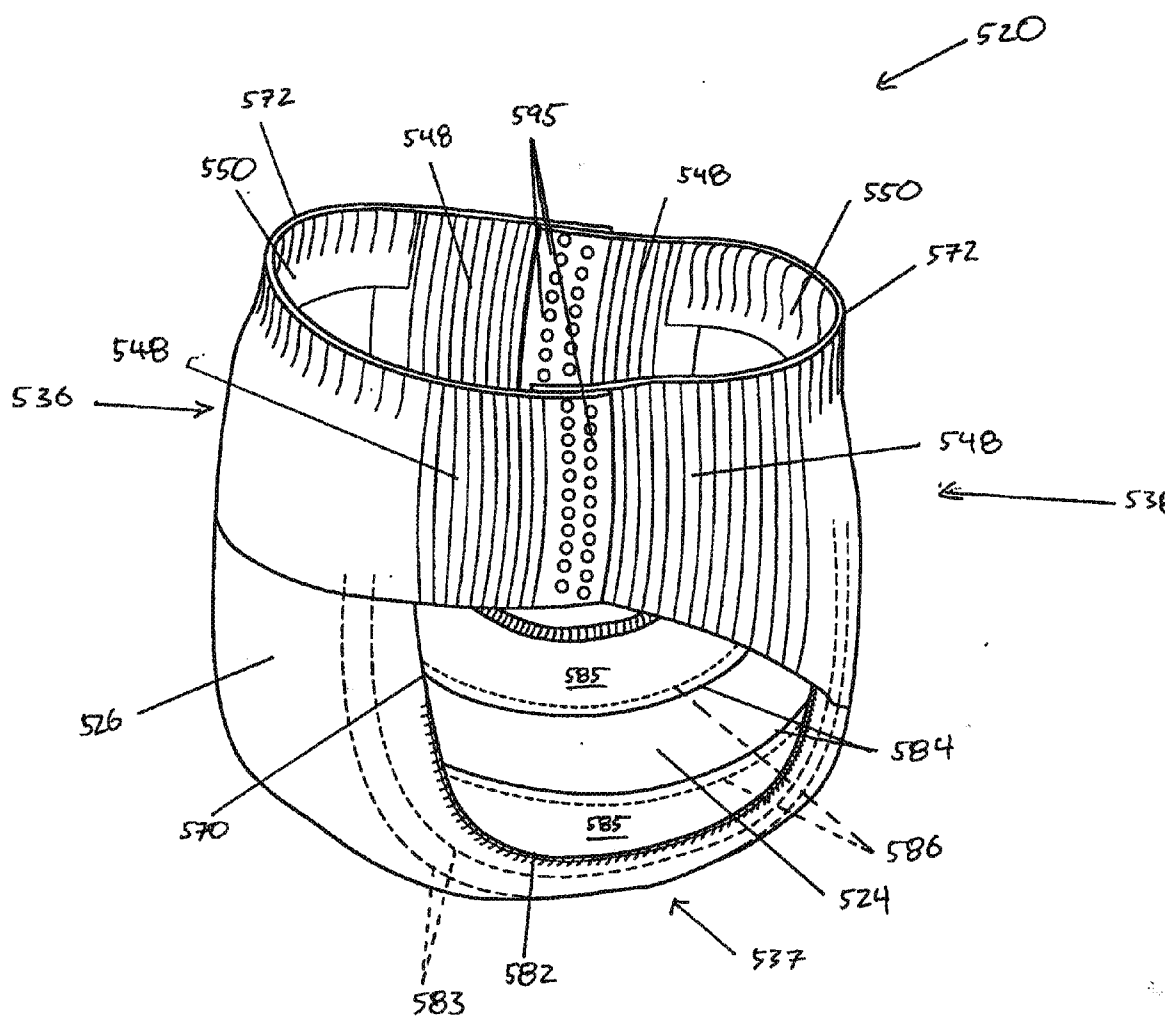


Fig. 5b

ABSORBENT ARTICLES COMPRISING A SLOW RECOVERY ELASTOMER

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. application Ser. No. 11/144,508, filed Jun. 3, 2005, which claims the benefit of U.S. Provisional Application No. 60/577,037, filed Jun. 4, 2004.

FIELD OF THE INVENTION

[0002] This invention is directed to absorbent articles such as diapers, training pants, adult incontinence articles, feminine hygiene articles, and the like comprising a slow recovery elastomer.

BACKGROUND OF THE INVENTION

[0003] Elastomeric compositions are well known in the art. Further, it has long been known in the field of disposable absorbent articles that it is desirable to construct absorptive devices, such as disposable diapers with fasteners, pull-on diapers, training pants, sanitary napkins, pantliners, incontinence briefs, and the like, with elastic elements to improve the ease of motion and maintenance of a sustained fit. Furthermore, elastic elements allow the diaper to accommodate a range of different sized wearers. A diaper may have elastic elements in a number of its structures including the waist band, leg cuffs, side panels, elasticized topsheets, and backsheet. Diapers and other absorbent articles fitted with elastic elements, such as elasticized leg cuffs or elasticized waist bands, providing comfortable fit and leakage control are known in the art.

[0004] Many elastomeric compositions used to form elastic elements within current diapers are variants of synthetic rubber compositions. However, these elastomeric compositions tend to retract relatively rapidly when released from a stretched state. This complicates application of the absorbent article onto the wearer.

[0005] During application, a diaper generally may be stretched and elongated longitudinally and/or laterally from its initial substantially compacted and untensioned state. Upon release of the elongating tension, the diaper often contracts, constricts, and/or folds before it can be successfully applied to or adjusted on a wearer. In traditional taped diapers, the diaper generally is stretched longitudinally prior to application onto a wearer. However, if a continuous force is not maintained, the diaper will quickly retract. Generally, a caregiver needs to apply a continuous elongating force to the diaper while at the same time positioning the diaper onto the wearer and tending to the wearer who may uncooperative (e.g., crying, fussing, moving, resisting, etc.) in the diapering process. These multiple simultaneous requirements may lead to frustration for the caregiver. The multiple simultaneous requirements may result in the diaper being positioned improperly on the wearer.

[0006] Similarly, in pant-type articles, the waist region generally must be stretched and elongated to enlarge the waist opening from an initial substantially constricted and untensioned state. The waist often requires a continuous force to be applied during the application process, generally by a caregiver or wearer, to counteract the rapid retraction of the waist opening that would be experienced without a continuous application of the force. Leg openings in pants-type articles

also tend to retract quickly and/or constrict the leg with force during application, increasing the difficulty of pulling the article up to the desired location on the wearer's upper thigh. Applying a continuous force to maintain an enlarged waist opening may be difficult for young children who lack the hand strength and dexterity to apply the continuous force while simultaneously pulling on the pant.

[0007] Recent diaper advancements have focused on the acceptance and storage of feces. In conventional diaper designs, feces remain between the diaper's topsheet and the wearer's skin. As a result, the wearer experiences excessive soiling, irritation, and the potential of leakage generally around the leg cuff. Advances in diaper design include the use of an apertured elasticized topsheet to isolate feces away from the wearer's skin thus preventing leakage and irritation. The apertured elasticized topsheet forms a void between the elasticized topsheet and the underlying diaper structure. The elastic within the elasticized topsheet aids in keeping the elasticized topsheet substantially in contact with the wearer's skin. Furthermore, the elastic aids in keeping the aperture positioned so as to receive fecal insult.

[0008] While elasticized topsheets are conceptually advantageous, diapers with elasticized topsheets comprising conventional elastomers are often difficult to apply. Application of the diaper requires a caregiver to stretch the diaper so that it is in a substantially planar position. Upon release, the elastic within elasticized topsheet contracts at a rate that makes it difficult for the caregiver to position the diaper correctly onto the wearer. This "snap-back" of the elasticized topsheet may increase the difficulty of applying the diaper to the wearer. If the diaper is difficult to apply, there may be a tendency for mispositioning the aperture. A mispositioned aperture may result in fecal deposit on the elasticized topsheet rather than through the aperture within the elasticized topsheet. Mispositioning of the aperture can destroy the benefit of isolating feces from the wearer's skin. Examples of diapers comprising an elasticized topsheet having an aperture have been disclosed in U.S. Pat. No. 4,892,536, issued to Des Marais et al. and U.S. Pat. No. 4,990,147 issued to Freeland.

[0009] Thus, there is a need for an absorbent product comprising elastomeric compositions that retract slowly upon being released from a stretched state, thus facilitating application and positioning of the product correctly onto the wearer.

SUMMARY OF THE INVENTION

[0010] In response to the deficiencies of prior diapers with elasticized topsheets, the present invention is directed to an absorbent article comprising a topsheet; a backsheet joined with the topsheet; an absorbent core interposed between the topsheet and backsheet; and a slow recovery elastomer joined to one or more article portions such as the topsheet, the backsheet, the core, an anal cuff, an elasticized topsheet, a fastening system, a leg cuff, an waist elastic feature, a side panel, a pocket, a spacer, and combinations thereof. The slow recovery elastomer may comprise about 20% to about 70%, by weight, of at least one elastomeric polymer. The slow recovery elastomer exhibits a normalized unload force at 37° C. of greater than about 0.04 N/mm² and a post elongation strain of at least about 50% after 15 seconds of recovery at 22° C.

[0011] The present invention also relates to an absorbent article comprising a topsheet; a backsheet joined with the topsheet; an absorbent core interposed between the topsheet

and backsheet; and an elastic member comprising a slow recovery elastomer; wherein the slow recovery elastomer exhibits a normalized unload force at 37° C. of greater than about 0.04 N/mm² and a post elongation strain of at least about 50% after 15 seconds of recovery at 22° C.

[0012] The present invention also relates to an absorbent article comprising an elasticized topsheet; a secondary topsheet; a backsheet joined with the secondary topsheet; and an absorbent core interposed between the topsheet and secondary topsheet. The secondary topsheet may be positioned between the core and the elasticized topsheet. The elasticized topsheet has a slit opening through the elasticized topsheet. The slit opening allows entry to a void space between the elasticized topsheet and the secondary topsheet. The absorbent article also comprises a slow recovery elastomer joined to said elasticized topsheet and in proximity to the slit opening wherein the slow recovery elastomer exhibits a normalized unload force at 37° C. of greater than about 0.04 N/mm² and a post elongation strain of at least about 50% after 15 seconds of recovery at 22° C.

[0013] The present invention also relates to methods for applying the aforementioned absorbent articles.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] FIG. 1 is a top plan view of a diaper containing the slow recovery elastomer.

[0015] FIG. 2 is a perspective view of the diaper, as shown in FIG. 1, containing the slow recovery elastomer.

[0016] FIGS. 3a and 3b are cross-sectional views of the diaper, as shown in FIGS. 1 and 2, while in use before and after being soiled.

[0017] FIG. 4 is a top plan view of another embodiment of a diaper containing the slow recovery elastomer.

[0018] FIG. 5a is a top plan view of another embodiment of the absorbent article as a pant in an unseamed state.

[0019] FIG. 5b is a perspective view of the pant of FIG. 5a shown in a seamed state.

DETAILED DESCRIPTION OF THE PRESENT INVENTIONS

[0020] As used herein, the term “absorbent article” or “article” refers to a wearable device that absorbs and/or contains liquid and, more specifically, refers to a device that is placed against or in proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. Suitable examples include diapers, training pants, pull-on garments, adult incontinence products and feminine care products such as sanitary napkins. Furthermore, “absorbent article” includes “disposable absorbent article” which is intended to be discarded and not laundered or otherwise restored after no more than ten uses, preferably after no more than five uses, and most preferably after a single use (although certain components may be recycled, reused, or composted).

[0021] As used herein, the term “elastic laminate” generally refers to a slow recovery elastomer which is attached to at least one substrate such as a polymeric film, a nonwoven, a woven, or a scrim. The elastomer may be attached to the substrate by any of a number of bonding methods known to those skilled in the art, including adhesive bonding, thermal bonding, pressure bonding, ultrasonic bonding, and the like.

[0022] As used herein, the term “diaper” refers to an absorbent article generally worn by infants and incontinent persons about the lower torso.

[0023] As used herein, the term “longitudinal” generally means a direction running parallel to the maximum linear dimension, typically the longitudinal axis, of the article and includes directions within 45° of the longitudinal direction.

[0024] As used herein, the term “length” of the article or component thereof generally refers to the size/distance of the maximum linear dimension, or typically to the size/distance of the longitudinal axis, or an article or part thereof.

[0025] As used herein, the terms “lateral” or “transverse” refer to a direction generally orthogonal to the longitudinal direction, e.g. in the same plan of the majority of the article and the longitudinal axis, and the transverse direction is parallel to the transverse axis.

[0026] As used herein, the term “width” of the article or of a component thereof refers to the size/distance of the dimension orthogonal to the longitudinal direction of the article or component thereof, e.g. orthogonal to the length of the article or component thereof, and typically it refers to the distance/size of the dimension parallel to the transverse axis of the article or component.

[0027] As used herein, the term “attached” encompasses configurations whereby an element is directly secured to another element by affixing the element directly to the other element.

[0028] As used herein, the term “joined” or “connected” encompasses configurations whereby an element is directly secured to another element by affixing the element directly to the other element and configurations whereby an element is indirectly secured to another element by affixing the element to intermediate member(s), which in turn are affixed to the other element.

[0029] As used herein, “relaxed” or “relaxed state” means the state that no forces are applied to the article (other than naturally occurring forces such as gravity), when the article is laid on a horizontal surface.

[0030] As used herein, the terms “extendibility” and “extensible”, e.g. extendibility of the elastomer, mean that the width or length of the item in the relaxed position can be extended or increased.

[0031] As used herein, “elasticated” or “elasticized” means that the component comprises at least a portion made of elastic material.

[0032] As used herein, the terms “elastic”, “elastomer” and “elastomeric” refer to a material which generally is able to extend to a strain of at least 50% without breaking or rupturing, and is able to recover substantially to its original dimensions after the deforming force has been removed.

[0033] As used herein, “along the longitudinal axis” means at least partially parallel to the longitudinal axis.

[0034] As used herein, the term “impermeable” generally refers to articles and/or elements that are not penetrative by fluid through the entire Z-directional thickness of the article under pressure of 0.14 lb/in² or less. Preferably, the impermeable article or element is not penetrative by fluid under pressures of 0.5 lb/in² or less. More preferably, the impermeable article or element is not penetrative by fluid under pressures of 1.0 lb/in² or less. The test method for determining impermeability conforms to Edana 120.1-18 or INDA IST 80.6, as described in copending U.S. patent application Ser. No. 10/844,182 filed May 12, 2004.

[0035] As used herein, the term “copolymer” refers to a polymer synthesized from two or more monomers with different chemical structures.

[0036] As used herein, the terms “temperature responsive” and “temperature responsiveness” refer to a slow recovery elastomer exhibiting less post elongation strain after a specified amount of time at higher temperatures than at lower temperatures.

[0037] The absorbent article of the present invention comprises a slow recovery elastomer. The slow recovery elastomer may be used within the absorbent article wherever an elastic material is desired. The slow recovery elastomer may be used discretely in the absorbent article. The slow recovery elastomer may be joined to another material or substrate (such as a polymeric film, a nonwoven, a woven, or a scrim) and used in the absorbent article. The slow recovery elastomer may be prepared from a composition comprising an elastomeric polymer, optionally at least one modifying resin, and optionally one or more additives. The slow recovery elastomer exhibits a normalized unload force at 37° C. of at least about 0.04 N/mm² as measured by the Two Cycle Hysteresis Test. The slow recovery elastomer exhibits a post elongation strain of 20% or greater after 15 seconds of recovery at 22° C. as measured by the Post Elongation Recovery Test.

[0038] A number of elastomeric polymers can be used to prepare the slow recovery elastomer with the requisite normalized unload force and post elongation strain.

[0039] Elastomeric polymers include, but are not limited to, homopolymers (e.g., crosslinked poly(isoprene)), block copolymers, random copolymers, alternating copolymers, and graft copolymers. Suitable elastomeric polymers comprise styrenic block copolymers, natural and synthetic rubbers, polyisoprene, neoprene, polyurethanes, silicone rubbers, hydrocarbon elastomers, ionomers, and the like.

[0040] In one embodiment, the elastomeric polymer may be a block copolymer. A number of block copolymers may be used to prepare the slow recovery elastomer including multi-block, tapered block and star block copolymers. Generally, the block copolymers suitable for use in the slow recovery elastomer may exhibit both elastomeric and thermoplastic characteristics. In such block copolymers a hard block (or segment) may have a glass transition temperature (T_g) greater than about 25° C. or is crystalline or semicrystalline with a melting temperature (T_m) above about 25° C. Preferably, the hard block has a T_g greater than about 35° C. or is crystalline or semicrystalline with a T_m above about 35° C. The hard block portion is typically derived from vinyl monomers including vinyl arenes such as styrene and alpha-methylstyrene or combinations thereof.

[0041] Glass transition temperatures referred to herein are determined by tensile dynamic mechanical analysis performed in the linear elastic region of the material at a frequency of 1 Hz using a temperature ramp method. Suitably, film samples with a uniform thickness of about 0.3 mm or less may be used with a temperature ramp rate of about 1° C./min or slower. The Tan δ peak temperature is taken as the T_g of the particular material or phase.

[0042] Crystalline melting temperatures referred to herein are determined by Differential Scanning Calorimetry using a temperature ramp rate of 10° C./min. The melting endotherm peak temperature is taken as the T_m of the particular crystalline region.

[0043] The block copolymers may comprise a soft block (or segment). The soft block generally exhibits a sufficiently low glass transition temperature and/or melting temperature so as not to form glassy or crystalline regions at the use temperature of the copolymer. In one embodiment, the use temperature may be between about room temperature (about 22° C.) and about body temperature (about 37° C.). However, other use temperatures are feasible and within the scope of this invention. Such soft blocks are generally physically incompatible with the hard blocks and form separate regions, domains, or phases.

[0044] The soft block portion may be a polymer derived from conjugated aliphatic diene monomers. Typically, the soft block monomers contain fewer than about 6 carbon atoms. Suitable diene monomers include butadiene, isoprene, and the like. Particularly preferred soft block polymers include poly(butadiene) and poly(isoprene). Furthermore, it is envisioned that the soft block may be modified to tailor the T_g of the soft block. For example, a random copolymer of isoprene and styrene or a graft of styrene onto poly(isoprene) may be used. In such cases, lower amounts of the modifying resin may be used.

[0045] Suitable block copolymers for use in this invention may comprise at least one hard block (A) and at least one soft block (B). The block copolymers may have multiple blocks. In a preferred embodiment, the block copolymer may be an A-B-A triblock copolymer, an A-B-A-B tetrablock copolymer, or an A-B-A-B-A pentablock copolymer. Also, useful herein are triblock copolymers having endblocks A and A', wherein A and A' may be derived from different vinyl compounds. Also, useful in the present invention are block copolymers having more than one hard block and/or more than one soft block, wherein each hard block may be derived from the same or different monomers and each soft block may be derived from the same or different monomers.

[0046] It should be noted that where the copolymer contains residual olefinic double bonds, the copolymer may be partially or fully hydrogenated if desired. Saturation may often yield beneficial effects in the elastomeric properties of the copolymer.

[0047] The elastomeric polymer may be used in the slow recovery elastomer in an effective amount so as to achieve the desired normalized unload forces and post elongation strains. The slow recovery elastomer generally may comprise from about 20% to about 70%, preferably about 30% to about 65%, and most preferably about 45% to about 60% of the elastomeric polymer.

[0048] Preferred elastomeric polymers include styrene-olefin-styrene triblock copolymers such as styrene-butadiene-styrene (S-B-S), styrene-ethylene/butylene-styrene (S-EB-S), styrene-ethylene/propylene-styrene (S-EP-S), styrene-isoprene-styrene (S-I-S), hydrogenated polystyrene-isoprene/butadiene-styrene (S-EPP-S), and mixtures thereof. The block copolymers may be employed alone or in a blend of block copolymers.

[0049] Particularly preferred block copolymers include styrene-butadiene-styrene (S-B-S) and styrene-isoprene-styrene (S-I-S) block copolymers. Such linear block copolymers of styrene-butadiene-styrene (S-B-S) and styrene-isoprene-styrene (S-I-S) are commercially available under the trade designation Vector from Dexco Polymers L.P., Houston, Tex., and under the trade designation Kraton from Kraton Polymers, Houston, Tex.

[0050] Various modifying resins may be used in this slow recovery elastomer. Suitable modifying resins should preferably associate or phase mix with the soft blocks of the elastomeric polymer. Modifying resins should have a sufficiently high molecular weight average such that the glass transition temperature of the soft block is increased resulting in an increase of post elongation strain at 22° C. after 15 seconds of recovery. While not intending to be bound by this theory, it is believed that the modifying resins raise the T_g of the soft phase to the point where molecular relaxation at the in-use temperature is slowed. This is evidenced by a relatively high post elongation strain.

[0051] The slow recovery elastomer may comprise the modifying resin in amounts from about 0% to about 60% by weight. Preferably, the composition comprises from about 20% to about 55% and even more preferably from about 35% to about 45% of the modifying resin.

[0052] Suitable modifying resins useful herein may have glass transition temperatures ranging from about 60° C. to about 180° C., more preferably from about 70° C. to about 150° C., and more preferably from about 90° C. to about 130° C.

[0053] Suitable modifying resins useful herein should preferably be soft block associating. A solubility parameter is useful in determining whether the modifying resin will phase mix with the soft block of the block copolymer. Generally, modifying resins are selected so that the solubility parameter of the modifying resin is similar to the solubility parameter of the soft block phase. Since common soft block phases have solubility parameters from about 7.0 (cal/cm³)^{1/2} to about 9.0 (cal/cm³)^{1/2}, the modifying resins should have similar solubility parameters. For example in the case where the solubility parameter of the soft block phase is about 8 (cal/cm³)^{1/2}, the solubility parameter of the modifying resin should be from about 7.5 (cal/cm³)^{1/2} to about 8.5 (cal/cm³)^{1/2}. The solubility parameters of the modifying resins may also approximate the solubility of the hard block. However, as long as phase mixing of the modifying resin with the soft block exists, hard block phase mixing should not be read as limiting. A list of solubility parameters for common polymers or resins, along with methods for determining or approximating the solubility parameters can be found in the Polymer Handbook, Third Edition; Wiley Interscience; Section VII pages 519-559.

[0054] Modifying resins useful herein include, but are not limited to, unhydrogenated C5 hydrocarbon resins or C9 hydrocarbon resins, partially and fully hydrogenated C5 hydrocarbon resins or C9 hydrocarbon resins; cycloaliphatic resins; terpene resins; polystyrene and styrene oligomers; poly(*t*-butylstyrene) or oligomers thereof; rosin and rosin derivatives; coumarone indenenes; polycyclopentadiene and oligomers thereof; polymethylstyrene or oligomers thereof; phenolic resins; indene polymers, oligomers and copolymers; acrylate and methacrylate oligomers, polymers, or copolymers; derivatives thereof; and combinations thereof. Preferably, the resin is selected from the group consisting of the oligomers, polymers and/or copolymers derived from: *t*-butylstyrene, cyclopentadiene, iso-bornyl methacrylate, methyl methacrylate, isobutyl methacrylate, indene, coumarone, vinylcyclohexane, methylstyrene, and 3,3,5-trimethylcyclohexyl methacrylate. Preferred modifying resins also include alicyclic terpenes, hydrocarbon resins, cycloaliphatic resins, poly-beta-pinene, terpene phenolic resins, and combinations thereof. "C5 hydrocarbon resins" and "C9 hydrocarbon resins" are disclosed in U.S. Pat. No. 6,310,154.

[0055] In general, a variety of additives may be employed to yield a slow recovery elastomer with more favorable characteristics. For example, stabilizers, antioxidants, and bacteriostats may be employed to prevent thermal, oxidative, and bio-chemical degradation of the slow recovery elastomer. Generally, the additive or additives may account for about 0.01% to about 60% of the total weight of the slow recovery elastomer. In other embodiments, the composition comprises from about 0.01% to about 25%. In other suitable embodiments, the composition comprises from about 0.01% to about 10% by weight, of additives.

[0056] Various stabilizers and antioxidants are well known in the art and include high molecular weight hindered phenols (i.e., phenolic compounds with sterically bulky radicals in proximity to the hydroxyl group), multifunctional phenols (i.e., phenolic compounds with sulfur and phosphorous containing groups), phosphates such as tris(*p*-nonylphenyl)-phosphite, hindered amines, and combinations thereof. Representative hindered phenols include *t*-butylhydroxyquinone; 1,3,5-trimethyl-2,4,6-tris(3-*tert*-butyl-4-hydroxybenzyl) benzene; pentaerythritol tetrakis-3(3,5-di-*tert*-butyl-4-hydroxyphenyl) propionate; *n*-octadecyl-3(3,5-di-*tert*-butyl-4-hydroxyphenyl) propionate; 4,4'-methylenebis(4-methyl-6-*tert*-butylphenol); 4,4'-thiobis(6-*tert*-butyl-*o*-cresol); 2,6-di-*tert*-butylphenol; 6-(4-hydroxyphenoxy)-2,4-bis(*n*-octylthio)-1,3,5-triazine; 2,4,6-tris(4-hydroxy-3,5-di-*tert*-butyl-phenoxy)-1,3,5-triazine; di-*n*-octadecyl-3,5-di-*tert*-butyl-4-hydroxybenzylphosphonate; 2-(*n*-octylthio)ethyl-3,5-di-*tert*-butyl-4-hydroxybenzoate; and sorbitol hexa-(3,3,5-di-*tert*-butyl-4-hydroxy-phenyl) propionate. Proprietary commercial stabilizers and/or antioxidants are available under a number of trade names including a variety of Wingstay®, Tinuvin® and Irganox® products.

[0057] Various bacteriostats are known in the art and may be included as additives within the slow recovery elastomer. Examples of suitable bacteriostats include benzoates, phenols, aldehydes, halogen containing compounds, nitrogen compounds, and metal-containing compounds such as mercurials, zinc compounds and tin compounds. A representative bacteriostat is 2,4,4'-trichloro-2'-hydroxy-diphenyl-ether which is available under the trade designation Irganon Pa. from Ciba Specialty Chemical Corporation, Tarrytown, N.Y.

[0058] Other optional additives include thermoplastic polymers or thermoplastic polymer compositions which preferentially associate with the hard blocks or segments of the block copolymers. Without intending to be bound by theory, it is believed that these thermoplastic polymers become incorporated into the entangled three-dimensional network structure of the hard phase. This entangled network structure can provide improved tensile, elastic and stress relaxation properties of the elastomeric composition. Where the elastomeric polymer comprises a styrenic block copolymer, thermoplastic polymer additives such as polyphenylene oxide and vinylarene polymers derived from monomers including styrene, alpha-methyl styrene, para-methyl styrene, other alkyl styrene derivatives, vinyl toluene, and mixtures thereof, are useful in the present invention because they are generally considered to be chemically compatible with the styrenic hard blocks of the block copolymer.

[0059] Various viscosity modifiers, processing aids, slip agents or anti-block agents can be employed as additives to yield a slow recovery elastomer with, for example, improved handling characteristics or surface characteristics. Processing aids include processing oils, which are well known in the art

and include synthetic and natural oils, naphthenic oils, paraffinic oils, olefin oligomers and low molecular weight polymers, vegetable oils, animal oils, and derivatives of such including hydrogenated versions. Processing oils also may incorporate combinations of such oils. A particularly preferred processing oil is mineral oil. Viscosity modifiers are also well known in the art. For example, petroleum derived waxes can be used to reduce the viscosity of the slow recovery elastomer in thermal processing. Suitable waxes include low number-average molecular weight (e.g., 600-6000) polyethylene; petroleum waxes such as paraffin wax and microcrystalline wax; atactic polypropylene; synthetic waxes made by polymerizing carbon monoxide and hydrogen such as Fischer-Tropsch wax; and polyolefin waxes.

[0060] Various colorants and fillers are known in the art and may be included as additives within the slow recovery elastomer. Colorants can include dyes and pigments such as titanium dioxide. Fillers may include such materials as talc and clay. Other additives may include dyes, UV absorbers, odor control agents, perfumes, fillers, desiccants, and the like.

[0061] The slow recovery elastomers of the present invention exhibit unique elastic and recovery characteristics. The slow recovery elastomer exhibits a normalized unload force of greater than about 0.04 N/mm^2 at 37°C . as measured by the Two Cycle Hysteresis Test. Normalized unload forces of less than about 0.04 N/mm^2 at 37°C . are believed to be insufficient for use as an elastomer within absorbent articles. Materials having normalized unload forces less than 0.04 N/mm^2 at 37°C . are unable to keep an absorbent article in snug, close contact to the wearer's skin. Preferably, the slow recovery elastomer exhibits a normalized unload force of greater than about 0.08 N/mm^2 at 37°C ., and, most preferably, exhibits a normalized unload force of greater than about 0.12 N/mm^2 at 37°C .

[0062] Traditional elastomers (i.e., those commonly used in disposable absorbent articles such as Vector 4211 from Dexco Polymers L.P., Houston, Tex.) exhibit minimal post elongation strain at 22°C . after 15 seconds of recovery. Qualitatively, traditional elastomers exhibit "snap back" (i.e., the elastomer contracts relatively quickly after being released from a stretched state). In the case of a diaper comprising an elasticized topsheet with a conventional elastomer, upon stretching and release of the diaper, the elastomer contracts relatively quickly, causing the diaper to fold, thus making it difficult to position and apply the diaper successfully. In contrast, the slow recovery elastomers of the current invention exhibit at least about 20% post elongation strain at 22°C . after 15 seconds of recovery, as measured by the Post Elongation Recovery Test. In other embodiments, the slow recovery elastomer exhibits at least about 50% post elongation strain after 15 seconds of recovery at 22°C . In other suitable embodiments, at 22°C . the slow recovery elastomer exhibits a post elongation strain from about 75% to about 150% after 15 seconds of recovery. However, post elongation strain after 15 seconds of recovery may exceed about 170% at 22°C .

[0063] Furthermore, the slow recovery elastomers of the present invention may exhibit a specified post elongation strain at 22°C . after 30 seconds, 60 seconds, or three minutes of recovery. In certain embodiments, the slow recovery elastomer may exhibit at least about a 70% post elongation strain after 30 seconds of recovery at 22°C . In other embodiments, the slow recovery elastomer may exhibit at least about a 40% post elongation strain after 60 seconds of recovery at 22°C .

[0064] The slow recovery elastomer may exhibit temperature responsiveness. In one embodiment, a temperature responsive slow recovery elastomer may exhibit a post elongation strain after 15 seconds at 32°C . that is at least 35% less than the post elongation strain after 15 seconds at 22°C . Preferably, at least a 50% reduction in post elongation strain is exhibited. Most preferably, at least a 75% reduction in post elongation strain is exhibited. It is believed that a slow recovery elastomer exhibiting temperature responsiveness may further facilitate diaper application. When the diaper is applied at about room temperature (e.g., approximately 22°C .), the slow recovery elastomer exhibits a relatively high degree of post elongation strain for a prescribed period of time. Upon application of the diaper, the slow recovery elastomer will rise in temperature because of the close proximity of the wearer's skin. As the temperature of the slow recovery elastomer increases and nears body temperature (e.g., approximately 32°C .), the reduced post elongation strain is exhibited. Temperature responsiveness allows for application of the diaper without "snap-back" while providing for increased recovery after application.

[0065] The slow recovery elastomer of the present invention may exist in a variety of forms. The slow recovery elastomer forms include, but are not limited to films, bands, strands, individualized fibers, or combinations thereof. Furthermore, the slow recovery elastomer may take any of the previous forms and be further combined with a traditional elastic not exhibiting the unique rate of recovery of the present invention (i.e., an elastic not exhibiting at least about 50% post elongation strain after 15 seconds of recovery at 22°C .). The slow recovery elastomer may be utilized in a variety of articles. However, the composition has particular benefit within absorbent articles, particularly disposable absorbent articles such as diapers and the like. The slow recovery elastomer may be used in place of or in addition to traditional elastomers commonly present in absorbent articles. The slow recovery elastomer may be used discretely or be may be joined to another material or substrate (such as a polymeric film, a nonwoven, a woven, or scrim).

[0066] In the embodiment that follows, the absorbent article is in the form of a diaper **20**. The elastomeric laminate of the present invention may be used in said embodiment whenever an elastic material is desired. FIG. 1 illustrates a diaper **20** in a top plan view, stretched, and in a substantially planar state. The surface of the diaper **20** that is positioned proximate to the wearer (i.e., wearer-facing surface) is shown. Portions of the diaper **20** have been cut away to more clearly show the underlying structure. One end portion of the diaper **20** may be configured as a first waist region **36** of the diaper **20**. The opposite end portion may be configured as a second waist region **38** of the diaper **20**. An intermediate portion of the diaper **20** may be configured as a crotch region **37** that extends longitudinally between the first and second waist regions **36** and **38**. The crotch region **37** is that portion of the diaper **20** which, when the diaper **20** is worn, is generally positioned between the legs of the wearer. The waist regions **36** and **38** generally may comprise those waist portions of the diaper **20** which, when worn, encircle the waist of the wearer. The waist regions **36** and **38** may include elements which can gather about the waist of the wearer to provide improved fit and containment, or which typically can gather around the waist and can be fastened around the waist by use of a fastening system, such as tabs **27**, which are fastened to landing zones **29**.

[0067] The diaper 20 may comprise two longitudinal edges 70 and two lateral edges 72. The diaper 20 may also have a longitudinal axis designated as line x. The diaper may also have a lateral axis designated as line y.

[0068] The diaper 20 may comprise at least one topsheet (FIG. 1 shows two topsheets designated 24a and 24b) that may be partially, fully, or not elasticized; a backsheet 26; and an absorbent core 28 interposed between the topsheet 24b and the backsheet 26. The diaper may also include side panels 48, a fastening system which may include fastening tabs 27 that can be secured to a landing zone 29, one or more pairs of leg cuffs 80, and/or a waist feature 50.

[0069] The diaper 20 may comprise more than one topsheet. In FIG. 1, the diaper exhibits two topsheets, an elasticized topsheet 24a and a secondary topsheet 24b. The secondary topsheet 24b may extend the width of the diaper 20 and may be positioned adjacent to the wearer-facing surface of the absorbent core 28. The secondary topsheet 24b may be used so that fecal insult will not adversely associate with the absorbent core 28. Generally in a diaper comprising two topsheets, the secondary topsheet 24b is the topsheet proximate to the garment-facing surface of the diaper 20 whereas the elasticized topsheet 24a is proximate to the wearer-facing surface. The secondary topsheet 24b may be joined to the core 28 and/or to the backsheet 26 by any attachment means known in the art. Suitable attachment means for joining the topsheets 24a and 24b are the same as those means, as described below, for joining the backsheet 26 to other elements of the diaper 20. In one embodiment of the present invention, the topsheets 24a and 24b and the backsheet 26 are joined along their respective longitudinal edge 70 and lateral edges 72. The elasticized topsheet 24a and the secondary topsheet 24b may be joined along one or more of their longitudinal edges 70 or lateral edges 72 and not along a substantial portion of their contacting planar faces. In certain embodiments, the secondary topsheet 24b is not attached to the core 28.

[0070] The secondary topsheet 24b may be liquid pervious, permitting liquids to readily penetrate through its thickness. The elasticized topsheet 24a is preferably compliant, soft-feeling, and non-irritating to the wearer's skin. The elasticized topsheet 24a may be hydrophobic in order to isolate liquids contained in the absorbent core 28 from the wearer's skin.

[0071] Suitable topsheets may be manufactured from a wide range of materials, such as porous foams, reticulated foams, apertured plastic films, or woven or nonwoven materials of natural fibers (e.g., wood or cotton fibers), synthetic fibers (e.g., polyester or polypropylene fibers), or a combination of natural and synthetic fibers. If the topsheets include fibers, the fibers may be spunbond, carded, wet-laid, melt-blown, hydroentangled, or otherwise processed as is known in the art. One suitable secondary topsheet 24b comprising a web of hydrophilically treated spunbond polypropylene is available from BBA Fiberweb, Old Hickory, Tenn., under the designation P10 or 055SLPIO9E. Suitable formed film topsheets are described in U.S. Pat. Nos. 3,929,135; 4,324,246; 4,342,314; 4,463,045; and 5,006,394. Other suitable conventional topsheets 24b may be made in accordance with U.S. Pat. Nos. 4,609,518 and 4,629,643. Exemplary formed films include "DRI-WEAVE" and "CLIFF-T" both from Tredegar Corporation, Richmond, Va.

[0072] In certain embodiments, at least a portion of the secondary topsheet 24b and the elasticized topsheet 24a may comprise a hydrophobic material or may be treated to be hydrophobic in order to isolate the wearer's skin from liquids contained in the absorbent core 28. Hydrophobicity may be achieved by eliminating the hydrophilizing treatment step from the production process and/or applying a hydrophobic treatment to the topsheets 24a and 24b, such as a fluoryl, paraffin, or silicone-based compound like Repellan ZN by Cognis Corporation, a hydrophobic surface coating as described in copending U.S. Provisional Application No. 60/543,785, which was filed Feb. 11, 2004, or a hydrophobic lotion composition, as described below. If the secondary topsheet 24b is made of a hydrophobic material, preferably at least a portion of its upper surface is treated to be hydrophilic so that liquids will transfer through the topsheet more rapidly. The secondary topsheet 24b can be rendered hydrophilic by treating it with a surfactant or by incorporating a surfactant into the topsheet. Suitable methods for treating the secondary topsheet 24b with a surfactant include spraying the material with the surfactant and/or immersing the material into the surfactant. A more detailed discussion of such a treatment and hydrophilicity is contained in U.S. Pat. Nos. 4,988,344 and 4,988,345. A more detailed discussion of some suitable methods for incorporating a surfactant in the topsheet can be found in U.S. Statutory Invention Registration No. H1670 published on Jul. 1, 1997 to Aziz et al. Alternatively, the secondary topsheet 24b may include an apertured web or film which is hydrophobic. In such embodiments, it is preferred that the apertures be large enough to allow the penetration of aqueous fluids like urine without significant resistance.

[0073] Any portion of the topsheets 24a and 24b, with preference to the elasticized topsheet 24a alone, may be coated with a lotion as is known in the art. Examples of suitable lotions include those described in U.S. Pat. Nos. 5,607,760; 5,609,587; 5,635,191; 5,643,588; and 5,968,025. The lotion may function alone or in combination with another agent as the hydrophobizing treatment described above. The topsheets may also include or be treated with antibacterial agents, such as disclosed in U.S. Statutory Invention Registration No. H1732 published on Jun. 2, 1998 to Johnson. Further, the topsheets 24a and 24b, the backsheet 26, or any portion of the topsheet or backsheet may be embossed and/or matte finished to provide a more cloth like appearance.

[0074] The diaper 20 may comprise a slit opening 30 through the elasticized topsheet 24a. The slit opening 30 may be located so that fecal exudates pass through the slit opening 30 and into a void space 75 formed between the elasticized topsheet 24a and the secondary topsheet 24b. In other embodiments without a secondary topsheet 24b, the void space 75 may be formed between the elasticized topsheet 24a and the absorbent core 28 and/or other underlying layers such as sub layers, acquisition layers and the like. The void space 75 entraps or encapsulates bodily waste. It is also contemplated that the void space 75 may be formed between two elements of the diaper 20, including but not limited to a topsheet (either a conventional or elasticized topsheet) and the backsheet 26, the acquisition layer and the core 28, the core 28 and the backsheet 26, etc.

[0075] The slit opening 30 may be shaped to allow passage of bodily waste. An example of a suitable shaped slit opening 30 is a hexagonal shaped slit opening 30 as shown in FIG. 1. However, it will be apparent to one of skill in the art that other shapes and sizes of the slit opening 30 are feasible.

[0076] The elasticized topsheet **24a** may comprise an elastic member **31, 32**. The elastic member **31, 32** may be located along at least a portion of the longitudinal edges **40** of the slit opening **30**. The longitudinal edge **40** of the slit opening may be held against the wearer's skin allowing the feces to penetrate the slit opening **30** without deflection, via only the elastic forces supplied by the elastic member **31, 32**, or optionally by use of a body adhering adhesive. The elastic member **31, 32** may assist in maintaining the elasticized topsheet **24a** in close contact to the wearer's skin. The elastic member **31, 32** also may assist in maintaining the position of the slit opening **30** along a gluteal groove, including a perianal region.

[0077] The elastic member **31, 32** may be the slow recovery elastomer of the present invention in the form of a film, band, stand, scrim, or any other like form that can be joined to the elasticized topsheet **24a**. The elastic member **31, 32** may comprise other traditional "fast" elastic materials including synthetic rubber such as supplied by Fulflex International, Ireland; polyurethane such as Lycra® available from Invista Inc., Wilmington, Del.; or a VFE material available from Tredegar Corporation, Richmond, Va. The slow recovery elastomer may be bonded to the elasticized topsheet **24a** by any method well known in the art including heat bonding and the use of adhesives (e.g., HL-1620 available by H. B. Fuller Company of St. Paul, Minn.). The elastic laminate **31, 32** may be positioned along the longitudinal edges **40** of the slit opening **30**. The elastic laminate **31, 32** may extend from the slit opening **30** in the direction of the waist regions, preferably in an X-shape, with a front elastic laminate **43, 44** and/or a back elastic laminate **45, 46**. The elastic laminate may be attached to a waistband, if present.

[0078] The elastic member **31, 32** may be an elastic laminate that is formed and attached to the elasticized topsheet **24a**. Elastic laminate formation is well known in the art. In one method for creating an elastic laminate, elastic stands, bands, films, or the like are attached to a substrate while in a stretched configuration. After attachment, the elastic strands are allowed to relax thereby gathering the substrate and creating an elastic laminate. In an alternative method, elastic strands or a film can be attached to one or more substrates in either a relaxed configuration or partially stretched configuration. The resulting laminate can be made stretchable (or more stretchable in the case of partially stretched strands or film) by subjecting the laminate to an elongation process which elongates the substrate permanently, but the elastic stands or layer only temporarily. Such processes are known in the art as "zero strain" elastic laminate formation, and the elongation of such laminates may be accomplished with suitable means such as rollers, engaging teeth, or the like. Examples of zero strain activation processing and formations of resulting elastic laminates are described in U.S. Pat. No. 5,167,897 issued to Weber et al. and U.S. Pat. No. 5,156,793 issued to Buell et al. Other methods for elastic laminate formation are conventional and within the scope of this description.

[0079] FIG. 2 shows a perspective view of the diaper **20** of FIG. 1 in a stretched and substantially planar state. The elasticized topsheet **24a** may comprise folds **82** which unfold when a low force, such as less than about 1N, is applied to the elasticized topsheet **24a**. The folds **82** may allow the elasticized topsheet **24a** to extend during wear. For example, when the secondary topsheet **24b**, backsheet **26**, and core **28** become heavier upon receipt of bodily exudates and start to

sag downwards, the folds **82** can straighten thus allowing the elasticized topsheet **24** to extend and remain positioned in close proximity to the wearer's skin. Also, with limited or no attachment of the elasticized topsheet **24a** to the core **28**, when the core **28** and backsheet **26** are pulled downwards due to the weight of the exudates received by the diaper **20**, the elasticized topsheet **24a** and the slit opening **30** do not move automatically with the core but remain against the skin of the wearer, or in very close proximity to the wearer. It is believed that, by minimizing or preventing movement, the slit opening **30** will not increase significantly in lateral size; thus, minimizing potential skin contact with fecal matter.

[0080] FIG. 3a-b are cross-sectional views of the diaper **20** taken along a sectional line designated y (i.e., the lateral axis) of FIG. 1. The diaper **20** is being worn by a wearer **83** such that the elasticized topsheet **24a** and elastic laminate **31, 32** are in close proximity to the wearer **83**. The longitudinal edges **40** are positioned such that the slit opening **30** is positioned along a gluteal groove **84** so as to receive fecal insult. The position of the longitudinal edges **40** and the slit opening **30** may be positioned with respect to the gluteal groove **84** so as to prevent fecal insult on the elasticized topsheet **24a**. FIG. 3a shows the diaper prior to receiving exudates. In FIG. 3b, the diaper **20** has received bodily exudates **86**. The exudates **86** have passed through the slit opening **30**, into the void space **75**, and are deposited on the secondary topsheet **24b**. The secondary topsheet **24b**, core **28**, and backsheet **26** now having this increased load may move downward in the z direction (i.e., exhibit sagging). However, the elastic laminates **31, 32** and the slit opening **32** have not moved substantially from the original position shown in FIG. 3a. The folds present in the elasticized topsheet **24a** unfurl (i.e., straighten out or unfold) and compensate for the extension of the backsheet **26**, core **28**, and secondary topsheet **24b** in the downward direction.

[0081] In other embodiments, the elasticized topsheet **24a** and the secondary topsheet **24b** may both comprise the elastic laminate of the present invention. In other embodiments, the diaper **20** may take a variety of other forms and constructions as exemplified in U.S. patent application Ser. No. 10/764,939 (U.S. Publication No. US 2004/0193134 A1) entitled "Articles with Cuffs" and filed on Jan. 26, 2004 to Joerg Mueller et al.; U.S. Pat. No. 6,482,191 to Roe et al.; U.S. patent application Ser. No. 10/764,850 (U.S. Publication No. US 2004/0162538 A1) entitled "Articles with Elasticated Topsheets" filed on Jan. 26, 2004 to Joerg Mueller et al.; and U.S. patent application Ser. No. 10/703,239 (U.S. Publication No. US 2004/0092902 A1) entitled "Disposable Absorbent Articles With Masking Topsheet" filed on Nov. 7, 2003 to Anja Hoffmann et al.; U.S. patent application Ser. No. 10/703,233 (U.S. Publication No. US 2004/0092900 A1) entitled "Disposable Absorbent Article With Improved Topsheet" and filed on Nov. 7, 2003 to Anja Hoffmann et al. The slow recovery elastomer of the present invention may be substituted for the elastic regions, bands, or member as disclosed in the referenced application.

[0082] The backsheet **26** is generally that portion of the diaper **20** positioned adjacent to the garment facing surface of the absorbent core **28** which prevents the exudates absorbed and contained therein from soiling articles which may contact the diaper **20**, such as bedsheets and undergarments. In certain embodiments, the backsheet **26** is impervious to liquids (e.g., urine) and comprises a thin plastic film such as a thermoplastic film having a thickness of about 0.012 min (0.5 mil) to about 0.051 mm (2.0 mils). Suitable backsheet films

include those manufactured by Tredegar Corporation, Richmond, Va., and sold under the trade name CPC2 film. Other suitable backsheet materials may include breathable materials which permit vapors to escape from the diaper **20** while still preventing exudates from passing through the backsheet **26**. Exemplary breathable materials may include materials such as woven webs, nonwoven webs, composite materials such as film-coated nonwoven webs, microporous films such as manufactured by Mitsui Toatsu Co., of Japan under the designation ESPOIR NO and by Tredegar Corporation of Richmond, Va. and sold under the designation EXAIRE., and monolithic films such as manufactured by Clopay Corporation, Cincinnati, Ohio under the name HYTREL blend P18-3097. Some breathable composite materials are described in greater detail in PCT Application No. WO 95/16746; U.S. Pat. Nos. 5,938,648; 5,865,823; and 5,571,096.

[0083] The backsheet **26**, or any portion thereof, may be elastically extensible in one or more directions. In one embodiment, the backsheet **26** may comprise a structural elastic-like film ("SELF") web as described in more detail in U.S. Pat. No. 5,518,801. In other embodiments, the backsheet **26** may comprise elastomeric films, foams, strands, or combinations of these or other suitable materials with nonwovens or synthetic films.

[0084] The backsheet **26** may be joined to the topsheets **24a** and **24b**, the absorbent core **28** and/or any other element of the diaper **20** by any attachment means known in the art. For example, the attachment means may include a uniform continuous layer of adhesive, a patterned layer of adhesive, or an array of separate lines, spirals, or spots of adhesive. One preferred attachment means comprises an open pattern network of filaments of adhesive as disclosed in U.S. Pat. No. 4,573,986. Other suitable attachment means include several lines of adhesive filaments which are swirled into a spiral pattern, as is illustrated by the apparatus and methods shown in U.S. Pat. Nos. 3,911,173; 4,785,996; and 4,842,666. Adhesives that have been found to be satisfactory are manufactured by H. B. Fuller Company, St. Paul, Minn., and marketed as HL-1620 and HL-1358-XZP. Alternatively, the attachment means may comprise heat bonds, pressure bonds, ultrasonic bonds, dynamic mechanical bonds, or any other suitable attachment means or combinations of these attachment means as are known in the art.

[0085] The absorbent core **28** may comprise any absorbent material which is generally compressible, conformable, non-irritating to the wearer's skin, and capable of absorbing and retaining liquids such as urine and other certain body exudates. The absorbent core **28** may be manufactured in a wide variety of sizes and shapes (e.g., rectangular, hourglass, "T"-shaped, asymmetric, etc.) and may comprise a wide variety of liquid-absorbent materials commonly used in disposable diapers and other absorbent articles such as comminuted wood pulp, which is generally referred to as airlift. Examples of other suitable absorbent materials include creped cellulose wadding; meltblown polymers, including coform; chemically stiffened, modified or cross-linked cellulosic fibers; tissue, including tissue wraps and tissue laminates; absorbent foams; absorbent sponges; superabsorbent polymers; absorbent gelling materials; or any other known absorbent material or combinations of materials.

[0086] The configuration and construction of the absorbent core **28** may also be varied (e.g., the absorbent core(s) or other absorbent structure(s) may have varying caliper zones, hydrophilic gradient(s), a superabsorbent gradient(s), or lower average density and lower average basis weight acquisition

zones; or may comprise one or more layers or structures). Exemplary absorbent structures for use as the absorbent core **28** are described in U.S. Pat. Nos. 4,610,678; 4,673,402; 4,834,735; 4,888,231; 5,137,537; 5,147,345; 5,342,338; 5,260,345; 5,387,207; and 5,625,222.

[0087] The diaper **20** may include a fastening system. The fastening system preferably maintains the first waist region **36** and the second waist region **38** in a configuration so as to provide lateral tensions about the circumference of the diaper **20** to hold the diaper **20** on the wearer. The fastening system typically includes at least one engaging component and at least one receiving component. An exemplary fastening system comprises fastening tabs **27** that may be secured to a landing zone **29**. Other exemplary fastening systems include, but are not limited to, tape tabs, hook and loop fastening components, interlocking fasteners such as tabs and slots, buckles, buttons, snaps, adhesives, cohesives, and/or hermaphroditic fastening components, although other known fastening means are generally acceptable. Other exemplary surface fastening systems are disclosed in U.S. Pat. Nos. 3,848,594; 4,662,875; 4,846,815; 4,894,060; 4,946,527; 5,151,092; and 5,221,274. An exemplary interlocking fastening system is disclosed in U.S. Pat. No. 6,432,098 entitled "Absorbent Article Fastening Device." The fastening system may also provide a means for holding the article in a disposal configuration as disclosed in U.S. Pat. No. 4,963,140. The fastening system may also include primary and secondary fastening systems, as disclosed in U.S. Pat. No. 4,699,622. The fastening system may also reduce shifting of overlapped portions or improve fit as disclosed in U.S. Pat. Nos. 5,242,436; 5,499,978; 5,507,736; and 5,591,152.

[0088] The diaper **20** may include leg cuffs **80** along the longitudinal edges **70** of the diaper **20** and typically attached to the backsheet **26**. Leg cuffs **80** may also be referred to as leg bands, side flaps, barrier cuffs, or elastic cuffs. Furthermore, the diaper may include one or more first cuffs which provide improved containment of liquids and other body exudates. First cuffs may also be referred to as outer leg cuff, leg bands, side flaps, leg cuffs or elastic cuffs. Additionally, the diaper may include one or more barrier cuffs which also provide improved containment of liquids and other body exudates. Barrier cuffs may also be referred to as second cuffs, inner leg cuffs or "stand-up" elasticized flaps. U.S. Pat. Nos. 4,695,278 and 4,795,454 issued describe disposable diapers having dual cuffs, including first cuff and second cuff.

[0089] FIG. 4 illustrates a diaper **20** in a top plan view, stretched, and in a substantially planar state. The surface of the diaper **20** that is positioned proximate to the wearer (i.e., wearer-facing surface) is shown. Portions of the diaper **20** have been cut away to more clearly show the underlying structure. The diaper **20** of FIG. 4 is configured with a single topsheet **24** and has two pairs of leg cuffs, a pair of gasketing cuffs and a pair of barrier cuffs.

[0090] The gasketing cuff **82** may be substantially inelastic or may be elastically extensible to dynamically fit at the wearer's leg. The gasketing cuff **82** may be formed by one or more elastic members **83** operatively joined to the topsheet **24**, backsheet **26**, or any other suitable substrate used in the formation of the diaper **20**. In one suitable embodiment, the gasketing cuff **82** has a plurality of elastic member **83** joined between the backsheet **26** and the topsheet **24**. The elastic member **83** may be an elastic material that provides elasticity to the gasketing cuff **82** and may include the slow recovery elastomer of the present invention.

[0091] The barrier cuff **84** may be formed by a flap **85** and an elastic member **86**. The flap **85** may be a continuous extension of any of the existing materials or elements that form diaper **20**. For example, flap **85** may be a portion of the topsheet **24** treated to be hydrophobic or the flap **85** may be a discrete element separately attached to diaper **20**. The elastic member **86** may be an elastic material that provides elasticity to the barrier cuff **84** and may include the slow recovery elastomer of the present invention. It is desirable that elastic member **86** exhibits sufficient elasticity such that the barrier cuff may remain in contact with the wearer during normal wear thus enhancing the barrier properties of the barrier cuff **84**. U.S. Pat. Nos. 4,808,178 and 4,909,803 describe disposable diapers having barrier cuffs that improve the containment at the leg regions.

[0092] The leg cuffs **80** may be treated, in full or in part, with a lotion, as described above. The leg cuffs may further be constructed in a number of different configurations, including those described in U.S. Pat. Nos. 4,636,207; 4,704,115; 4,900,317; 5,085,654; 5,492,751; 6,476,288; and SIR H1630. Any of the leg cuffs disclosed herein as well as other absorbent article components may also be fully or partially coated with a hydrophobic surface coating as detailed in U.S. application Ser. No. 11/055,743, which was filed Feb. 10, 2005.

[0093] In some embodiments, such as shown in FIGS. 1 and 4, the diaper **20** may also comprise side panels **48**. The side panels **48** may be elastic or extensible to provide a more comfortable and contouring fit by initially conformably fitting the diaper **20** to the wearer and sustaining this fit throughout the time of wear well past when the diaper **20** has been loaded with exudates since the elasticized side panels **48** allow the sides of the diaper **20** to expand and contract. Exemplary construction and configuration of side panels **48** are disclosed in U.S. Pat. Nos. 3,860,003; 4,857,067; 4,381,781; 4,938,753; 5,151,092; 5,221,274; 5,669,897; and 6,004,306.

[0094] The diaper **20** may also comprise at least one elastic waist feature **50** that helps to provide improved fit and containment. The elastic waist feature **50** is generally intended to elastically expand and contract to dynamically fit the wearer's waist. The diaper may have two elastic waist features **50**, one positioned in the first waist region **36** and one positioned in the second waist region **38**. The elastic waist feature **50** may be constructed in a number of different configurations including those described in U.S. Pat. Nos. 4,515,595; 4,710,189; 5,151,092; and 5,221,274. Other suitable waist configurations may include waistcap features such as those described in U.S. Pat. Nos. 5,026,364 and 4,816,025. Elasticity may be provided to the elastic waist feature by inclusion of the slow recovery elastomeric of the present invention.

[0095] Some embodiments may also include pockets for receiving and containing waste, spacers which provide voids for waste, barriers for limiting the movement of waste in the article, compartments or voids which accept and contain waste materials deposited in the diaper **20**, and the like, or any combinations thereof. Examples of pockets and spacers for use in absorbent products are described in U.S. Pat. Nos. 5,514,121; 5,171,236; 5,397,318; 5,540,671; 6,168,584; 5,306,266; and 5,997,520. Examples of compartments or voids are disclosed in U.S. Pat. Nos. 4,968,312; 4,990,147; 5,062,840; and 5,269,755. Examples of suitable transverse barriers are described in U.S. Pat. No. 5,554,142; WO 94/14395; and U.S. Pat. No. 5,653,703. Examples of other

structures especially suitable for management of low viscosity feces are disclosed in U.S. Pat. Nos. 5,941,864; 5,977,430; and 6,013,063.

[0096] In alternative embodiments, the diaper may be pre-formed by the manufacturer to create a pant. Pant generically refers to disposable garments having a waist opening and leg openings designed for infant or adult wearers. Pants are also commonly referred to as "closed diapers," "prefastened diapers," "pull-on diapers," "training pants," and "diaper-pants." The pant may be placed in position on the wearer by inserting the wearer's legs into the leg openings and sliding the pant into position about the wearer's lower torso. An exemplary pant **520** is shown in FIG. 5a-b. The pant **520** is in a planar unseamed state in FIG. 5a with the wearer-facing surface facing the viewer and is shown seamed in the perspective view of FIG. 5b. The pant **520** has many of the same elements as the diapers of FIGS. 1-4. One end portion of the pant **520** may be configured as a first waist region **536**. The opposite end portion may be configured as a second waist region **538**. An intermediate portion of the pant **520** may be configured as a crotch region **37** that extends longitudinally between the first and second waist regions **536** and **538**.

[0097] The pant **520** may comprise two longitudinal edges **570** and two lateral edges **572**. The pant **520** may also have a longitudinal axis designated as line x. The diaper may also have a lateral axis designated as line y. The pant **520** may comprise at least one topsheet **524** that may be partially, fully, or not elasticated; a backsheet **526**; and an absorbent core **528** interposed between the topsheet **524** and the backsheet **526**. The pant **520** may also include side panels **548**; one or more pairs of leg cuffs such as gasketing cuffs **582** which may have an elastic member **583** and barrier cuffs **584** which may have a flap **585** and an elastic member **586**; and/or a waist feature **550**.

[0098] The pant may be pre-formed such that the first waist region **536** is joined to the second waist region **538** thereby forming a waist opening and a pair of leg openings. The pant **520** may be pre-formed by having opposing side panels **548** in the first waist region **536** joined to the opposing side panels **548** in the second waist region **538** by a seam **595**, as shown in FIG. 5b. The seam **595** may be formed by any suitable bonding means known in the art which is appropriate for the specific materials employed. For example, suitable bonding means may include ultrasonic sealing, heat sealing, pressure bonding, adhesive bonding, sewing, autogenous bonding, and the like. The seams **595** may be permanent, that is, they may be bonded such that separation of the joined opposing side edges **548** requires the rupture or other destructive manipulation of the bonded materials that prevents refastening of the side edges **548**. Alternatively, the seam **595** may be refastenable such that it can be opened and refastened repeatedly. Refastenable seams may include hook and loop fasteners and the like. Suitable pants are disclosed in U.S. Pat. Nos. 5,246,433; 5,569,234; 6,120,487; 6,120,489; 4,940,464; 5,092,861; 5,897,545; 5,957,908; and U.S. patent application Ser. No. 10/171,249.

[0099] Another embodiment of the present invention is directed toward a method of applying any of the absorbent articles as disclosed above. The absorbent article may be provided to a caregiver for application onto a wearer. The absorbent article may be in a compacted state such that an elastic laminate comprising a slow recovery elastomer is in a relaxed, substantially untensioned state. The caregiver may stretch the absorbent article thereby expanding and tension-

ing the elastic laminate. The article is generally stretched in preparation for application. The absorbent article can maintain a functionally elongated state for an effective period of time. In one embodiment, the article may maintain an elongated state for a sufficient amount of time necessary for the caregiver to apply the article to the wearer. Upon release of the diaper after stretching, the diaper often contracts and/or folds before it can be successfully applied to a wearer. In one embodiment, slow recovery elastomer exhibits a post elongation strain of at least about 50% after 15 seconds of recovery at 22° C. and an initial strain of 400%. After application, the article may continue to contract so as to provide a snug, ideal fit. This method may be repeated upon soiling of the article during wear.

[0100] In another embodiment, a plurality of absorbent articles as disclosed above may be packaged in a kit. Generally, the kit allows for a quantity of absorbent articles to be delivered to and purchased by a consumer while economizing space and simplifying transport and storage. The kit may require activation so that the article becomes accessible (e.g., opening of a lid, removal of a panel, etc.). In one embodiment, the kit is defined by numerous absorbent articles bound together as an entity and covered by a thermoplastic film overwrap as disclosed in U.S. Pat. No. 5,934,470. The thermoplastic film cover may contain an opening means to allow removal of a portion of the thermoplastic film cover and access to the articles. A typical opening means may include a substantially continuous line of weakness, preferably perforations within the thermoplastic film cover. An exemplary opening means is presented in U.S. Pat. No. 5,036,978.

[0101] While one kit embodiment is described above, other variations to the kit are clearly envisioned. The overwrap may comprise a variety of materials including, but not limited to, thermoplastic films, nonwovens, wovens, foils, fabrics, papers, cardboard, elastics, cords, straps, and combinations thereof. The overwrap may completely or partially bind and/or cover the plurality of pull-on garments. Other particularly preferred packages and methods for packaging are disclosed in U.S. Pat. Nos. 5,050,742 and 5,054,619. Furthermore, a kit may contain multiple overwraps. For example, a plurality of pull-on garments of the present inventions may be packaged with a thermoplastic film overwrap and then a plurality of film wrapped pull-on garments being overwrapped in a cardboard box or a second thermoplastic film overwrap. Furthermore, the kit may not contain a dedicated opening means. For example, a thermoplastic film overwrap without perforation may simply be opened by tearing the film.

Test Methods

Post Elongation Recovery

[0102] This method is used to determine the post elongation strain of an elastomer as a function of temperature and time. The measurement is done at 22° C. (72° F.) or at 32° C. (90° F.). The measurement at 22° C. (72° F.) is designed to simulate the recovery of the elastomer at room temperature, while the measurement at 32° C. (90° F.) is designed to measure the recovery of the elastomer near skin temperature. A two-step analysis, Stretch and Recovery, is performed on the samples. The method employs a Dynamic Mechanical Analyzer (DMA) such as a TA Instruments DMA 2980 (hereinafter "DMA 2980"), available from TA Instruments, Inc., of New Castle, Del.; equipped with a film clamp, Thermal Advantage/Thermal Solutions software for data acquisition,

and Universal Analysis 2000 software for data analysis. Many other types of DMA devices exist, and the use of dynamic mechanical analysis is well known to those skilled in the art of polymer and copolymer characterization.

[0103] Methods of operation, calibration and guidelines for using the DMA 2980 are found in TA Instruments DMA 2980 Operator's Manual issued March 2002, Thermal Advantage User's Reference Guide issued July 2000 and Universal Analysis 2000 guide issued February 2003. To those skilled in the use of the DMA 2980, the following operational run conditions should be sufficient to replicate the stretch and recovery of the samples.

[0104] The experimental conditions are selected on the DMA 2980 which specify operation in the Controlled Force Mode with the film clamp. The film clamp is mounted onto the DMA 2980 and calibrated according to the User's Reference Guide. The material to be tested is cut into samples of substantially uniform dimension. Appropriate sample dimensions may be selected to achieve the required strain. For the DMA 2980, suitable sample dimensions are approximately 6.4 mm wide by approximately 0.15 mm thick. The floating film clamp of the DMA 2980 is adjusted to a position which provides approximately 6 mm between the clamping surfaces, and is locked in this position. The sample is mounted in the film clamps and the lower clamp is allowed to float to allow determination of the actual gauge length which exists between the film clamps. The sample ID and dimensions are recorded. The furnace is closed.

[0105] Stretch Method—Specific DMA 2980 parameter settings for the above sample dimensions are set as follows: Preload force applied to sample in clamp (0.01N); auto zero displacement (on) at the start of the test; furnace (close), clamp position (lock), and temperature held at T_i (22° C. or 32° C.) at the end of the stretch method. Data acquisition rate is set at 0.5 Hz (1 point per 2 seconds). The stretch method is loaded onto the DMA 2980. The method segments are (1) Initial Temperature T_i (22° C. or 32° C.), (2) Equilibrate at T_i , (3) Data Storage ON, and (4) Ramp Force 5.0 N/min to 18.0 N.

[0106] Upon initiation of the test, the temperature ramps to the specified T_i (22° C. or 32° C.) [method segment 1], and the temperature is maintained at this T_i [method segment 2]. After a minimum of 15 minutes at T_i , the operator initiates the sample stretching and concurrent data collection [method segments 3 and 4]. The sample is stretched with an applied ramp force of 5 N per minute to approximately 30 mm in length. The gradual increase in force more closely simulates application of the article and prevents breakage. The sample is locked in place at the stretched length of approximately 30 mm and maintained at T_i . The force required to reach the 400% strain is recorded manually from the digital readout on the instrument.

[0107] For samples of different dimensions, the applied force is adjusted to achieve an applied ramp force of 5 N/min per square millimeter of initial sample cross-sectional area; and the maximum displacement is adjusted to achieve a strain of 400%. The percent strain is calculated by subtracting the gauge length from the stretched length, then dividing the result by the gauge length and multiplying by 100. A sample stretched from an initial length of 6 mm to a length of 30 mm results in a 400% strain.

[0108] Recovery Method—The Recovery Method is loaded onto the instrument and initiated 15 seconds after reaching the desired strain (400%) in the Stretch Method. The

four segments of the recovery method are (1) Data Storage ON, (2) Force 0.01N, (3) Ramp to T_r , and (4) Isotherm for 3.0 minutes. The following DMA 2980 parameter setting is changed from the Stretch Method: auto zero displacement is changed to (OFF). The Recovery Method measures the length of the sample over a 3 minute time period at the specified temperature (T_r =either 22° C. or 32° C.). The sample length, percent strain, and test temperature are recorded as a function of recovery time. The post elongation strain is reported as percent strain after different times of recovery (15 seconds, 30 seconds, 60 seconds, and 3 minutes).

[0109] For different sample dimensions, the force is adjusted to achieve 0.01 N per square millimeter of initial sample cross-sectional area (determined prior to stretching the sample).

Two Cycle Hysteresis Test

[0110] This method is used to determine properties that may correlate with the forces experienced by the consumer during application of the product containing the elastomeric composition and how the product fits and performs once it is applied.

[0111] The two cycle hysteresis test method is performed at room temperature (21° C./70° F.) and also at body temperature (37° C./99° F.). The material to be tested is cut into a substantially rectilinear shape. Sample dimensions should be selected to achieve the required strain with forces appropriate for the instrument. Suitable instruments for this test include tensile testers commercially available from MTS Systems Corp., Eden Prairie, Minn. (e.g. Alliance RT/1 or Sintech 1/S) or from Instron Engineering Corp., Canton, Mass. For either the Alliance RT/1 or Sintech 1/S instruments listed above, suitable sample dimensions are approximately 0.13 mm thick, approximately 20 mm wide by approximately 100 mm long.

[0112] The following procedure illustrates the measurement when using the above sample dimensions and either an Alliance RT/1 or Sintech 1/S. The instrument is interfaced with a computer. TestWorks 4™ software controls the testing parameters, performs data acquisition and calculation, and provides graphs and data reports.

[0113] The grips used for the test are wider than the sample. Typically 1" (2.54 cm) wide grips are used. The grips are air actuated grips designed to concentrate the entire gripping force along a single line perpendicular to the direction of testing stress having one flat surface and an opposing face from which protrudes a half round (radius=6 mm) to minimize slippage of the sample. In the case of the measurement at 37° C., the upper grip is a lightweight grip with serrated faces.

[0114] The load cell is selected so that the forces measured will be between 10% and 90% of the capacity of the load cell or the load range used. Typically a 25 N load cell is used. The fixtures and grips are installed. The instrument is calibrated according to the manufacturer's instructions. The distance between the lines of gripping force (gauge length) is 2.50" (63.5 mm), which is measured with a steel ruler held beside the grips. The load reading on the instrument is zeroed to account for the mass of the fixture and grips. The mass and thickness of the specimen are measured before testing. The specimen is mounted into the grips in a manner such that there is no slack and the load measured is between 0.00N and 0.02N. After being mounted in the grips, the sample is equilibrated at the testing temperature for 5 minutes before starting

the test. A suitable environmental chamber is used to maintain the temp at 37° C. for measurements performed at this temperature. The instrument is located in a temperature-controlled room for measurements performed at 21° C.

[0115] The two cycle hysteresis test method involves the following steps:

[0116] (1) Strain the sample to the specified maximum percent strain (i.e., $\text{Strain}_{\max}=150\%$) at a constant cross-head speed of 20"/min. (50.8 cm/min) with no hold.

[0117] (2) Reduce strain to 0% strain (i.e., return grips to original gauge length of 2.50") at a constant crosshead speed of 3"/min. (7.62 cm/min) with no hold.

[0118] (3) Strain the sample to Strain_{\max} at a constant cross-head speed of 20"/min. (50.8 cm/min) with no hold.

[0119] (4) Reduce strain to 60% strain at a constant cross-head speed of 3"/min. (7.62 cm/min)

[0120] (5) Hold at 60% strain for 5 minutes.

[0121] (6) Go to 0% strain at a constant crosshead speed 3"/min. (7.62 cm/min)

[0122] The measured unload force is the force at 60% strain after the 5 minute hold in step 5. This force is normalized to Newtons per square millimeter of initial sample cross-sectional area (determined before the sample is stretched) as follows: Normalized unload force=measured unload force÷[initial sample thickness in mm×initial sample width in mm]

[0123] For different sample dimensions, the crosshead speed is adjusted to maintain the appropriate strain rate for each portion of the test. For example; a crosshead speed of 10"/min (25.4 cm/min) would be used in Steps 1 and 3 for a sample gauge length of 1.25" (31.7 mm).

EXAMPLES

[0124] Exemplary films are prepared by blending varying amounts of elastomeric polymer, modifying resin and mineral oil as shown in Table 1. The blending is accomplished by extrusion of the mixture (Examples 2 and 3) or by solvent casting the mixture and pressing into a film on a heated Carver Press (Examples 1, 4, 5, 6 and 7). The amount of each component is expressed in weight percent of the elastomeric composition. The examples in Table 1 comprise a triblock elastomeric copolymer, styrene-isoprene-styrene (S-I-S), commercially available under the trade designation Vector 4211 from Dexco Polymers L.P., Houston, Tex. In some examples (Examples 2, 3, 4, 6 and 7), a component of the elastomeric composition is white mineral oil, commercially available under the trade designation Britol® 50T from Crompton Corporation, Petrolia, Pa. Modifying resins suitable for use that are disclosed in the examples in Table 1 are an alicyclic hydrocarbon resin under the trade designation Arkon P140 (Tg of 86° C.), available from Arakawa Chemical Inc., Chicago, Ill., and poly(t-butyl styrene) (Tg of 126° C. and 130° C. for the 14 kDa and 19 kDa resins, respectively), synthesized at Procter & Gamble Company via free radical polymerization of t-butylstyrene monomer available from Aldrich Chemical Company.

TABLE 1

Sample	Elastomeric Composition (Weight %)						
	1*	2	3	4	5	6	7
Vector 4211 (SIS, 29% S)	100	45	45	49	60	59	45
Poly(t-butyl styrene), 14 kDa		45					

TABLE 1-continued

Sample	Elastomeric Composition (Weight %)						
	1*	2	3	4	5	6	7
Poly(t-butyl styrene), 19 kDa			45		40	39	45
Arkton P140				49			
Mineral Oil, White Britol- 50T		10	10	2		2	10

*Sample 1 is a comparative example whereas Sample 2-7 are embodiments of the present invention.

[0125] The weight average molecular weights of the poly (t-butylstyrene) samples are 14 and 19 kDa as determined by gel permeation chromatography using polystyrene standards in tetrahydrofuran.

[0126] Films of the elastomeric compositions in Table 1 are measured according to the Post Elongation Recovery method described in the Test Methods section above. The thickness of the film tested and the force (not normalized for film thickness) in Newtons to strain the sample to 400% strain are shown in Table 2. The post elongation strain is reported at different recovery times (15 seconds, 30 seconds, 60 seconds, and 3 minutes).

TABLE 2

Sample	Post Elongation Strains of Films of the Elastomeric Compositions of Table 1						
	1	2	3	4	5	6	7
Post Elongation Strain at 22° C. (72° F.)							
Film Thickness (mm)	0.16	0.13	0.14	0.14	0.16	0.16	0.13
% Strain after 15 seconds recovery	13	137	178	102	153	104	157
% Strain after 30 seconds recovery	13	98	141	73	117	71	122
% Strain after 60 seconds recovery	12	64	105	50	88	44	88
% Strain after 3 minutes recovery	11	29	59	28	48	19	48
Force (N)	2.5	1.0	1.3	1.1	1.7	1.1	1.2
Post Elongation Strain at 32° C. (90° F.)							
Film Thickness (mm)	0.15	0.14	0.13	0.14	0.16	0.14	0.14
% Strain after 15 seconds recovery	16	43	109	41	58	56	81
% Strain after 30 seconds recovery	15	24	74	27	37	34	53
% Strain after 60 seconds recovery	15	13	46	18	23	21	33
% Strain after 3 minutes recovery	14	7	19	11	11	11	16
Force (N)	1.8	0.6	0.7	0.7	1.0	0.7	0.8

[0127] The normalized unload forces of films of the elastomeric compositions in Table 1 are measured at 21° C. and 37° C. according to the 2-Cycle Hysteresis Test described in the Test Methods Section above. The data are shown in Table 3.

TABLE 3

Sample	Normalized Unload Forces (N/mm ²) of Films of the Elastomeric Compositions of Table 1							
	1	2	3	4	5	6	7	8 ¹
Normalized Unload Force at 21° C. (70° F.) [N/mm ²]	0.50	0.06	0.08	0.13	0.15	0.17	0.10	N.A.
Normalized Unload Force at 37° C. (99° F.) [N/mm ²]	0.63	0.08	0.08	0.12	0.14	0.16	0.10	0.03

¹Sample No. 8 is a comparative example of Findley H2401 adhesive (pressed into a film using a heated Carver Press).

[0128] All documents cited in the Detailed Description of the Invention are, in relevant part, incorporated herein by reference; the citation of any document is not to be construed as an admission that it is prior art with respect to the present invention. To the extent that any definition or meaning of a term in this written document conflicts with a definition or meaning of the term in a document incorporated by reference, the definition or meaning assigned to the term in this document shall govern.

[0129] While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

What is claimed is:

1. An absorbent article comprising:

- a) a topsheet;
- b) a backsheet joined with the topsheet;
- c) an absorbent core interposed between the topsheet and backsheet; and

d) an elastic laminate comprising a slow recovery elastomer, wherein the elastic laminate exhibits a normalized unload force at 37° C. of greater than about 0.04 N/mm² and a post elongation strain of at least about 50% after 15 seconds of recovery at 22° C.

2. The absorbent article of claim 1, wherein the slow recovery elastomer is an elastomeric polymer selected from the group consisting of styrenic block copolymers, natural and synthetic rubbers, polyisoprene, neoprene, polyurethanes, silicone rubbers, hydrocarbon elastomers, ionomers, and combinations thereof.

3. The absorbent article of claim 2, wherein the slow recovery elastomer is a block copolymer comprising at least one substantially soft block and at least one substantially hard block.

4. The absorbent article of claim 3, wherein the slow recovery elastomer is a triblock copolymer comprising a hard/soft/hard block configuration.

5. The absorbent article of claim 4, wherein the slow recovery elastomer is a triblock copolymer selected from the group comprising styrene/isoprene/styrene, styrene/butadiene/styrene, and combinations thereof.

6. The absorbent article of claim 1, wherein the slow recovery elastomer comprises about 0.01% to about 60%, by weight, of at least one modifying resin.

7. The absorbent article of claim 6, wherein the modifying resin is selected from the group consisting of unhydrogenated C5 hydrocarbon resins or C9 hydrocarbon resins, partially and fully hydrogenated C5 hydrocarbon resins or C9 hydrocarbon resins; cycloaliphatic resins; terpene resins; polystyrene and styrene oligomers; poly(*t*-butylstyrene) or oligomers thereof; rosin and rosin derivatives; coumarone indenes; polycyclopentadiene and oligomers thereof; polymethylstyrene or oligomers thereof; phenolic resins; indene polymers, oligomers and copolymers; acrylate and methacrylate oligomers, polymers, or copolymers; derivatives thereof; and combinations thereof.

8. The absorbent article of claim 7, wherein the modifying resin is selected from the group consisting of C5 hydrocarbon resins or C9 hydrocarbon resins and hydrogenated derivatives thereof, alicyclic hydrocarbon resin, terpene phenolic resin, poly(*t*-butylstyrene), poly(iso-bornylmethacrylate), poly(indene-co-coumarone), poly(vinylcyclohexane), terpenes, poly(methylstyrene-co-indene), cycloaliphatic resin, poly-beta-pinene, and poly(3,3,5-trimethylcyclohexyl methacrylate), polycyclopentadiene, polymethylstyrene, derivatives thereof, and combinations thereof.

9. The absorbent article of claim 1, wherein the slow recovery elastomer comprises an additive selected from the group comprising stabilizers, antioxidants, viscosity modifiers, processing aids, bacteriostats, colorants, fillers, or combinations thereof.

10. The absorbent article of claim 1, wherein the post elongation strain of the elastic laminate after 15 seconds of recovery at 32° C. is at least about 35% less than the post elongation strain of the slow recovery elastomer after 15 seconds of recovery at 22° C.

11. The absorbent article of claim 1, further comprising an elasticized topsheet.

12. The absorbent article of claim 11, wherein the elasticized topsheet includes a slit opening allowing for passage of waste therethrough.

13. The absorbent article of claim 12, wherein the elastic laminate is joined to the elasticized topsheet and runs substantially longitudinally adjacent to the slit opening.

14. The absorbent article of claim 1, wherein the article portion with the elastic laminate joined thereto comprises a secondary elastomer joined to the article portion, wherein the secondary elastomer does not exhibit at least about 20% post elongation strain at 22° C. after 15 seconds of recovery.

15. The absorbent article of claim 1, further comprising an elastic waist feature, wherein the elastic waist feature includes the elastic laminate.

16. The absorbent article of claim 1, further comprising at least one of a gasketing cuff and a barrier cuff, wherein at least one of the gasketing cuff and barrier cuff include the elastic laminate.

17. The absorbent article of claim 1, further comprising at least one extensible side panel, wherein the extensible side panel includes the elastic laminate.

18. The absorbent article of claim 1, further comprising an extensible backsheet, wherein the extensible backsheet includes the elastic laminate.

19. The absorbent article of claim 1, wherein a plurality of said articles are at least partially covered by an overwrap so as to form a kit.

20. A method for applying an absorbent article comprising the steps of:

- a) providing to a caregiver an absorbent article comprising:
 - i) a topsheet;
 - ii) a backsheet joined with the topsheet;
 - iii) an absorbent core interposed between the topsheet and backsheet; and
 - iv) an elastic laminate comprising a slow recovery elastomer joined to one or more article portions selected from the group consisting of the topsheet, the backsheet, the core, an anal cuff, an elasticized topsheet, a fastening system, a leg cuff, an waist elastic feature, a side panel, a pocket, a spacer, and combinations thereof;

wherein said slow recovery elastomer comprises about 20% to about 70%, by weight, of at least one elastomeric polymer; and

wherein the slow recovery elastomer exhibits a normalized unload force at 37° C. of greater than about 0.04 N/mm² and a post elongation strain of at least about 50% after 15 seconds of recovery at 22° C.;

- b) stretching the article in preparation for application; and
- c) applying the article to a wearer.

* * * * *