



(86) Date de dépôt PCT/PCT Filing Date: 2011/11/14
(87) Date publication PCT/PCT Publication Date: 2012/05/18
(85) Entrée phase nationale/National Entry: 2013/05/10
(86) N° demande PCT/PCT Application No.: US 2011/060658
(87) N° publication PCT/PCT Publication No.: 2012/065187
(30) Priorité/Priority: 2010/11/12 (US61/413,134)

(51) Cl.Int./Int.Cl. *G06F 17/00* (2006.01)
(71) Demandeur/Applicant:
OUTSMART POWER SYSTEMS, LLC, US
(72) Inventeurs/Inventors:
HILTON, PAUL C.M., US;
MEHLMAN, JEFFREY A., US;
ARMSTRONG, TOM, US
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : MAINTIEN D'INTEGRITE D'INFORMATIONS TOUT EN REDUISANT AU MINIMUM L'UTILISATION DE RESEAU DE DONNEES ACCUMULEES DANS RESEAU DISTRIBUE
(54) Title: MAINTAINING INFORMATION INTEGRITY WHILE MINIMIZING NETWORK UTILIZATION OF ACCUMULATED DATA IN A DISTRIBUTED NETWORK

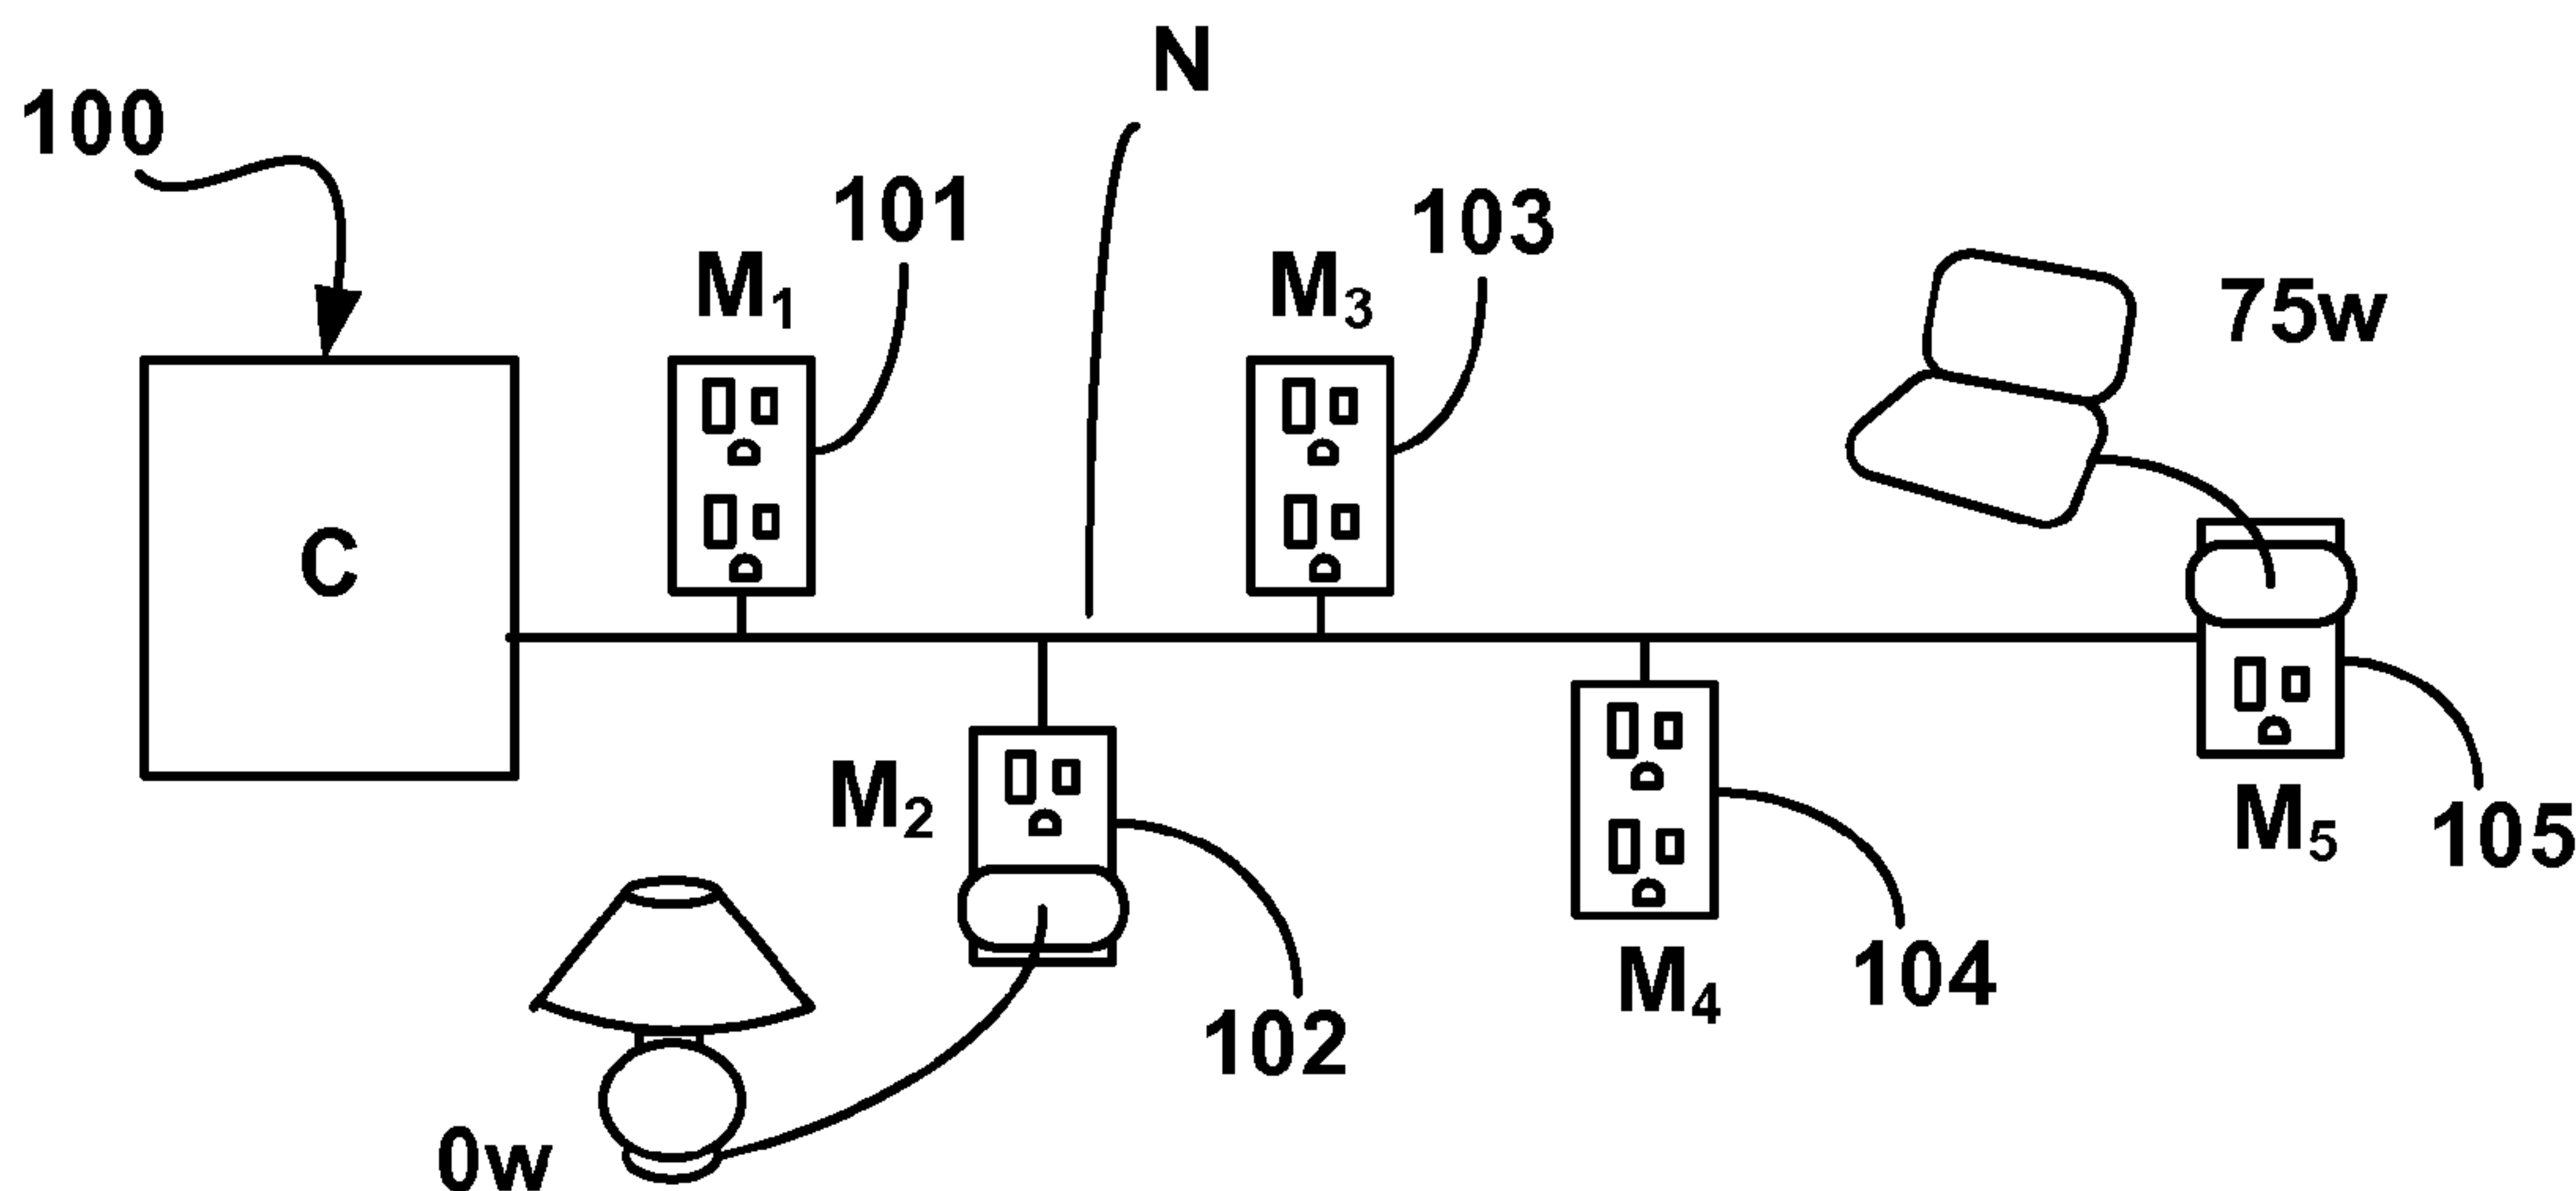


FIG. 1a

(57) **Abrégé/Abstract:**

A method and systems for gathering information regarding usage of a resource from at least one of a plurality of measuring nodes operatively coupled to a controller, wherein the measuring node includes at least one sensor and a node processor operatively coupled to the sensor, and the controller includes a controller processor. The method includes predicting an estimated resource usage value associated with the at least one sensor with the node processor and separately with the controller each using a predictor algorithm and dataset. The method further includes measuring resource usage to which the estimated resource usage value applies with the sensor and calculating a difference between the estimated resource usage value and the measured resource usage with the node processor. If the difference falls outside of a bound the measured resource usage is communicated to the controller.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 May 2012 (18.05.2012)(10) International Publication Number
WO 2012/065187 A1(51) International Patent Classification:
G06F 17/00 (2006.01)(21) International Application Number:
PCT/US2011/060658(22) International Filing Date:
14 November 2011 (14.11.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/413,134 12 November 2010 (12.11.2010) US(71) Applicant (for all designated States except US): **OUT-SMART POWER SYSTEMS, LLC** [US/US]; 11 Mercer Road, Natick, Massachusetts 01760 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HILTON, Paul C.M.** [US/US]; 225 Pleasant Street, Millis, Massachusetts 02054 (US). **MEHLMAN, Jeffrey A.** [US/US]; 2 Old Wolomolopoag Street, Sharon, Massachusetts 02067 (US). **ARMSTRONG, Tom** [US/US]; 50 North Tessier Street, Northbridge, Massachusetts 01534 (US).(74) Agents: **FILIP, Beth A.** et al.; Grossman, Tucker, Perreault & Pfleger, PLLC, 55 South Commercial Street, Manchester, New Hampshire 03101 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: MAINTAINING INFORMATION INTEGRITY WHILE MINIMIZING NETWORK UTILIZATION OF ACCUMULATED DATA IN A DISTRIBUTED NETWORK

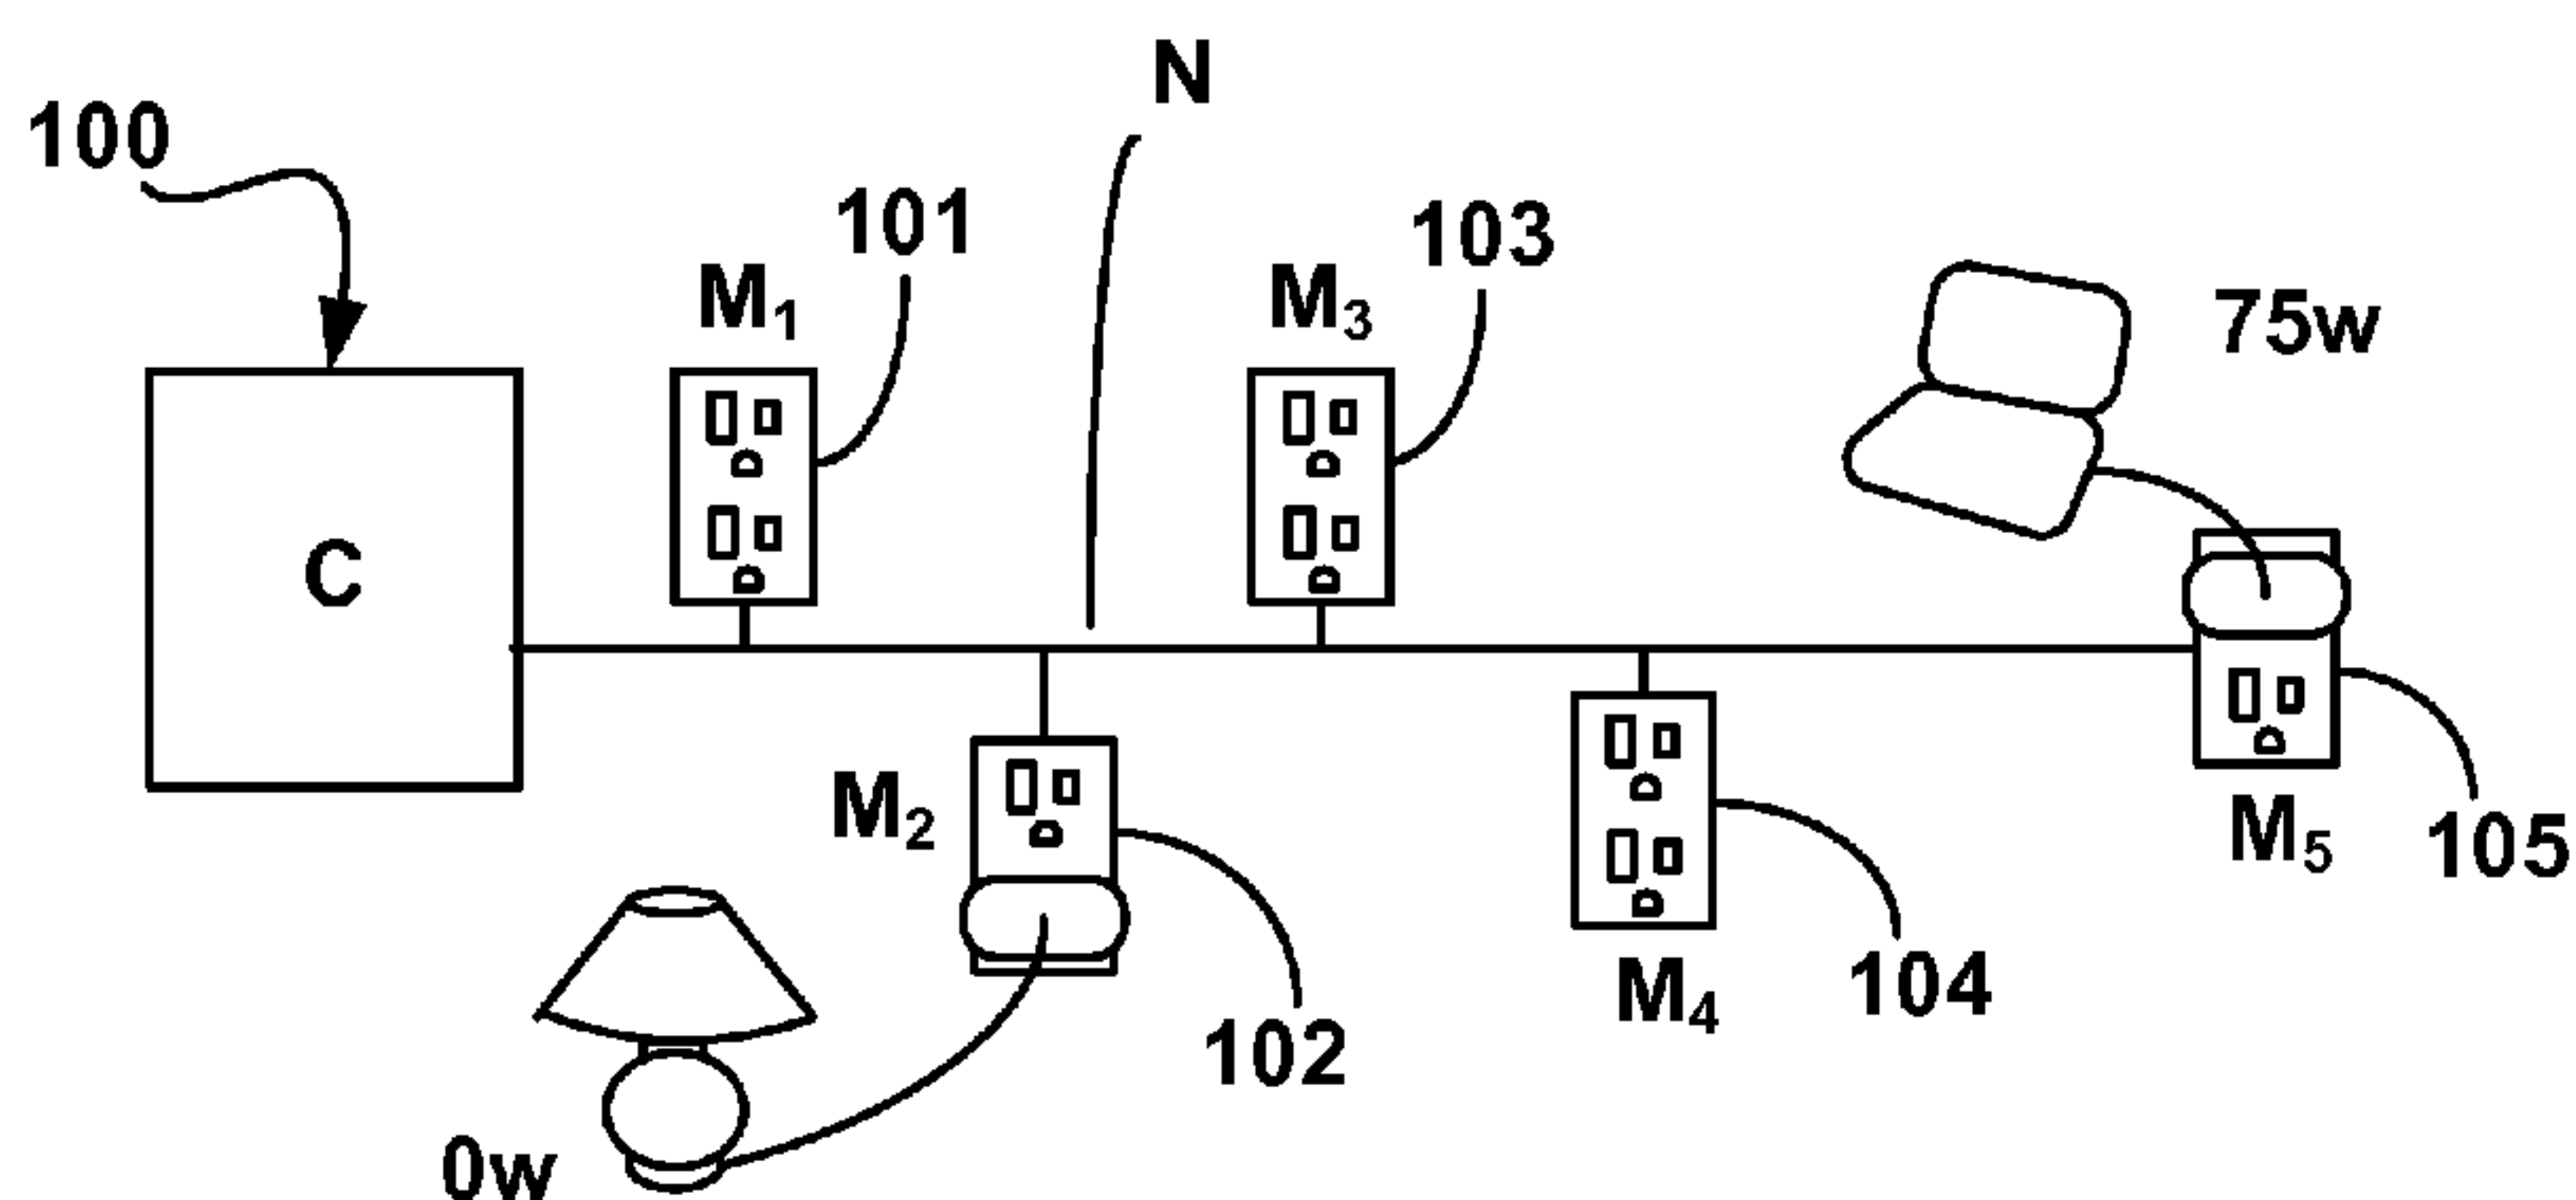


FIG. 1a

(57) **Abstract:** A method and systems for gathering information regarding usage of a resource from at least one of a plurality of measuring nodes operatively coupled to a controller, wherein the measuring node includes at least one sensor and a node processor operatively coupled to the sensor, and the controller includes a controller processor. The method includes predicting an estimated resource usage value associated with the at least one sensor with the node processor and separately with the controller each using a predictor algorithm and dataset. The method further includes measuring resource usage to which the estimated resource usage value applies with the sensor and calculating a difference between the estimated resource usage value and the measured resource usage with the node processor. If the difference falls outside of a bound the measured resource usage is communicated to the controller.



WO 2012/065187 A1

MAINTAINING INFORMATION INTEGRITY WHILE MINIMIZING NETWORK UTILIZATION OF ACCUMULATED DATA IN A DISTRIBUTED NETWORK

Cross-Reference to Related Applications

5 The present application claims the benefit of the filing date of U.S. Provisional Application Serial Number 61/413,134, filed on November 12, 2010, the teachings of which are incorporated herein by reference.

Field of the Invention

10 The present disclosure relates to methods, systems and algorithms for gathering information, or data, which may be collected and accumulated on at least one of a plurality of measuring nodes and transferred to a controller node. In particular, contemplated herein is a method and system that may collect resource consumption data over a distributed network of sensors and generate and/or accumulate statistics from the distributed network.

15

Background

Distributed sensor networks may have a number of applications in various fields, including examples such as area monitoring of a battlefield; environmental monitoring for permafrost or water temperature; as well as industrial monitoring of waste or ground water.

20 One application, in particular, may include monitoring energy consumption in one or more buildings. However, sensor networks, such as the networks described above, may have a limited available bandwidth and limited available energy to transmit data packets at each node. Thus it may be desirable to optimize inter-node communication to reduce overall energy use and to minimize network traffic.

25

Summary

An aspect of the present disclosure relates to a method for gathering information regarding usage of a resource from at least one of a plurality of measuring nodes operatively coupled to a controller, wherein the measuring node includes at least one sensor and a node

30 processor operatively coupled to the sensor and the controller includes a controller processor. The method may include predicting an estimated resource usage value associated with the at

least one sensor with the node processor, wherein the node processor uses a predictor algorithm and a dataset, wherein the dataset comprises data which are available at both the measuring node and the controller. The method may also include predicting the estimated resource usage value with the controller, wherein the controller uses the predictor algorithm and the dataset to arrive at the estimated resource usage value. The method may also include measuring resource usage to which the estimated resource usage value applies with the sensor and calculating a difference between the estimated resource usage value and the measured resource usage using the node processor and if the difference falls outside of a bound communicating the measured resource usage to said controller.

The present disclosure also relates to a system for gathering information regarding usage of a resource from a plurality of measuring nodes. The system may include a plurality of measuring nodes, wherein each of the measuring nodes includes at least one sensor configured to measure resource usage and a node processor operatively coupled to the sensor. The node processor may be configured to predict an estimated resource usage value associated with the at least one sensor using a predictor algorithm and a dataset, wherein the dataset comprises data which is available at both the measuring node and the controller, measure resource usage to which the estimated resource usage value applies with the sensor, and calculate a difference between the estimated resource usage value and the measured resource usage using the node processor and if the difference falls outside of a bound communicating the measured resource usage and any other data necessary for the controller to continue the predictor algorithm to the controller. The system may also include a controller operatively coupled to the plurality of measuring nodes wherein the controller includes a controller processor. The controller processor may be configured to predict the estimated resource usage value, wherein the controller uses the predictor algorithm and the dataset to arrive at the estimated resource usage value.

The present disclosure further relates to a system comprising one or more storage mediums having stored thereon, individually or in combination, instructions that when executed by one or more processors result in a number of operations. The operations may include predicting an estimated resource usage value associated with at least one sensor operatively coupled to a measuring node using a node processor, wherein the node processor uses a predictor algorithm and a dataset, wherein the dataset comprises data which is available at both the measuring node and a controller. The operations may also include

predicting the estimated resource usage value separately with the controller, wherein the controller uses the algorithm and the dataset to arrive at the estimated resource usage value. The operations may further include measuring resource usage to which the estimated resource usage value applies with the sensor and calculating a difference between the estimated
 5 resource usage value and the measured resource usage using the node processor and if the difference falls outside of a bound communicating the measured resource usage and any other data necessary for the controller to continue the predictor algorithm to the controller.

Brief Description of the Drawings

10 The above-mentioned and other features of this disclosure, and the manner of attaining them, may become more apparent and better understood by reference to the following description of embodiments described herein taken in conjunction with the accompanying drawings, wherein:

FIG. 1a illustrates an example of a plurality of measuring nodes operatively coupled
 15 to a controller over a power circuit in a residence. The measuring nodes are also individually operatively coupled to outlets, wherein resource consuming devices are plugged into the outlets and drawing different loads.

FIG. 1b illustrates the example of **FIG. 1a**, wherein different loads are being drawn by the resource consuming devices plugged into the outlets.

20 **FIG. 2** illustrates an example of a measuring node, which may be directly or indirectly connected to a power source (such a circuit breaker) via a circuit and associated with a receptacle. A resource consuming device may be coupled to the receptacle.

FIG. 3 illustrates an example of a controller, which may include similar components as a measuring node.

25 **FIGS. 4a, 4b and 4c** illustrates an example of a timing diagram of a dynamic reporting process with respect to an example of energy use for a particular load, wherein the time scale on the figures is the same.

Detailed Description

30 The present disclosure contemplates a system including a collection of one or more nodes (measuring or metering nodes) which may measure and accumulate data regarding the

use of a resource or a parameter pertaining to resource use, (e.g. energy, volt amps, water, gas, oil, etc.) and a second node (consumer or controller node) where the information may be collected or aggregated for reference. Resources may be understood herein as electricity, water, or fuel including natural gas, oil, propane, wood pellets, feed stock, food, etc.

5 Resource usage may be understood as the consumption or use of an available resource by a resource consuming device, such as an appliance, a furnace, etc. The information available on the controller node may, with reasonable accuracy and currency, correlate with actual information detected by the measuring node. The nodes associated with a system may be located throughout one or more buildings over a campus, wherein the buildings may be
10 proximally located, or throughout one or more buildings located across one or more states or one or more countries. The measuring nodes may also be associated with other facilities, including storage tanks, silos, pipelines, supply lines, burners, engines, etc.

The nodes may be present in a system including a communication network, an example of which is as illustrated in **FIGS. 1a** and **1b**. As alluded to above, the system **100**
15 may include at least one controller (**C**) or consumer node, referred to herein as a controller, and at least one metering or measuring node, referred to herein as a measuring node, (**M_x**, where x in this example represents measuring nodes 1 to 5), which may be operatively coupled together via the communication network (**N**). A communication network **N** may include, for example, power supply lines or an electrical network, a computer network, a
20 telecommunications network, a radio network, an optical network, etc.

The measuring nodes may also be operatively coupled to dual receptacle outlets **101**, **102**, **103**, **104** to **105**; however, it may be appreciated that the measuring nodes may be connected to other resource consuming devices, resource supply lines, resource storage devices or resource generating devices, such as switches, appliances, furnaces, generators,
25 gas lines, water lines, water tanks, oil tanks, propane tanks, silos, solar panels, generators, etc. Various loads may be applied to the outlets **101** to **105**, such as a light plugged into (or operatively coupled to) outlet **102** and laptop plugged into to outlet **105** as illustrated. The resource consuming devices, supply lines or storage devices may be residential, business or industrial scale.

30 As understood herein operative coupling may refer to an electrical, mechanical and/or wireless connection providing communication as between two or more objects or devices, either directly or indirectly. In non-limiting examples, operative coupling may be provided

by electrical wiring, circuitry, magnetic induced effects, optical interaction, mechanical or physical contact, etc. Operative coupling may occur indirectly, for example, over a bus or network. For example, the measuring nodes **M_x** may communicate with the controller **C** over power lines using power line communication protocols, wirelessly using e.g., radio
 5 frequency or optically using e.g., infrared, as well as through local area networks or wide area networks.

A measuring node may be directly or indirectly operatively coupled to each receptacle of the outlets or switches or a single measuring node may be coupled to an entire outlet bank or switch bank, including two, three or more outlets or switches. For example, the measuring
 10 node may be physically located within, or at least partially within, the resource consuming device, supply line, storage device, or generating device. Or, the measuring node may also be located within a junction box proximal to the resource device. Therefore, in embodiments, operatively coupling of the measuring node may be understood as positioning a sensor associated with the node in such a way that resource usage relative to the node may be
 15 measured directly or indirect.

FIG. 1a illustrates a first example, wherein the light plugged into outlet **102** is not drawing power and the laptop plugged into outlet **105** is drawing 75 W. **FIG. 1b** illustrates the system of **FIG. 1a**, wherein after a period of time, the light is turned on resulting in a power draw of 40 W and the laptop remains on drawing 75 W. The measuring nodes may
 20 provide to the controller data regarding the resource usage, such as changes in resource usage, rate of resource usage, etc. to the controller, as illustrated between **FIGS. 1a** and **1b**.

Data may be understood herein as numbers, text, images or sounds in a form suitable for storage in and/or processing by components that may be found in the measuring node, controller, computers, etc. The data may represent information regarding or relating to, for
 25 example, energy, fuel consumption, water consumption, etc. Data may include or pertain to, for example, measured resource usage, time rate of resource use, estimated resource usage values, probable resource usage, bounds, etc or parameters utilized to determine the foregoing. Data may also include information indicating types or versions of algorithms, software, firmware, hardware, etc. A dataset may be understood to include one or more
 30 pieces or portions of data.

FIG. 2 illustrates an example of a measuring node **200**. A measuring node **200** may include a power supply **202**, a processor **208**, a communications function **210**, a sensor **212**,

and a coupler **216**, which enables communication to take place on the power lines or another type of communication network. In addition, the measuring node may optionally include a switchable micro-load **214**. The measuring node **200** may be operatively coupled to the power supply via line power **206** and **207**, which may be wired to an outlet **220**. A resource
5 drawing device **222** may be plugged into (or operatively coupled to) the outlet **220**, thus operatively coupling the measuring node **200** to the resource drawing device **222**, such as a lamp or dryer.

The power supply may draw power from a power source **204** through power line **206** with a return path for the current, neutral line **207**. The power supply may be a low voltage
10 power supply (e.g. less than 30 volts), and may be configured to transform the power from AC to DC, and reduce the voltage to a level acceptable for the processor, the switchable micro-load and communication functions. In addition, the power supply may include a battery, which may be charged with energy available between line power **206** and neutral
15 **207**. A processor is illustrated at **208** for controlling the actions of the unit based on logic inputs. The processor may also include arithmetic elements, as well as volatile and/or non-volatile memory. In addition, the processor may include identifier information for identifying the node, such as a serial number stored in the controller or measuring node. In
embodiments, the processor may include a microcontroller.

A communications function **210** may also be provided. The communication function
20 may be provided on the processor or micro-controller as input and output interfaces. The communication function may create and receive node electronic signals which may be interpreted by the various electronics within the node, other nodes or in a central processor (controller) with which the node may communicate. Signals received by the node may be filtered from and to the power line by a coupler **216**. The coupler **216** may allow for one or
25 more communication signals to be sent over the power line **206** and may utilize existing communication standards. In other embodiments, the communications function **210** may include a transmitter, a receiver or a transceiver configured to provide radio frequency or optical communications wirelessly. In further embodiments, as alluded to above, the communications function **210** may provide electrical communications over a local area
30 network.

One or more sensors **212**, which may include devices that measure key aspects of power (current, voltage, phase...etc.) or another resource such as gas flow, water flow, oil

flow, propane flow, etc., may also be operatively coupled to the microcontroller such as by integration into the micro-controller or via communication therewith. In one example, a sensor **212** may measure the magnetic field generated by current and/or the voltage across the node **200** over the power line **206** and to the receptacle **220**. Such sensors may include Hall effect sensors, current transformers, Rogowski coils, etc. In another example, the sensor may be a meter, such as a flow meter, configured to measure the flow of gas or water through a supply line. In yet a further example, the sensor may be a gauge, such as a gauge configured to measure the level or pressure of other resources that may be held in a tank or other storage device. It may be appreciated that resource usage may not be measured directly and indirect methods of measurement may be employed.

As noted above, a switchable “micro-load” **214** may be optionally included. The switchable “micro-load” may create a detectable resource consumption event. The micro-load may be activated when directed by the microcontroller, such as during reporting to a controller or inquiring information from a measuring node. The powered micro-controller may direct the switchable micro-load to trigger, providing a signal over, for example, a powerline where power line communication (PLC) is employed.

In addition to the above, the measuring node electronics may also include a number of other functions. For example, the electronics may include a temperature sensor (or other environmental sensors). Furthermore, the electronics may also provide user-detectable signals, such as audio or optical signals for alerting a user to the physical location of the node. In addition, memory, one or more multiplexers, one or more clocks or timers, one or more transformers or converters (analog to digital or digital to analog), and/or one or more logic inputs or outputs may be provided.

The controller or controller node may include similar components as that of the measuring node. For example, as illustrated in **FIG. 3**, the controller may also include a power supply **302**, a processor such as a microcontroller **308**, a communications function **310**, a sensor **312**, and a coupler **316**, as well as an optional micro-load **314**, as described above. The controller may be located locally, i.e., within the buildings or campus being monitored or remotely at a location apart from the campus or buildings where the measuring nodes are located.

As alluded to above, the measuring nodes may provide information regarding resource usage to the controller. One method to gather this information may be through

polling. Polling may be understood as periodically requesting an update of each measuring node regarding resource use at that measuring node. The interval between updates determines the maximum latency of the information gathered. For example with 1000 measuring nodes and a desire to keep the latency below 1 minute, each node would have to send data once a minute, for a total of 1000 updates per minute. With **X** measuring nodes, (**X** representing the number of measuring nodes) the demand on the network may be proportional to **X**, and inversely proportional to the latency time (**T_l**). This approach may not scale well if the network bandwidth remains constant as the number of measuring nodes increases. If the rate of resource usage being measured by one node changes, the average latency before the controller node will be notified of the change, may be determined by Equation 1.

$$\text{Eq.1) Average Latency} = (T_c * X) / 2$$

wherein, **T_c** is the time to communicate one node's data to the controller **C**. Since this latency may be at least partially dependent on the number of nodes in a network, the latency may increase as the network grows, even if the number of changes in the rate of resource usage is small.

The collected information of particular interest may include data that shows a change in a rate at which a given resource is being used. "Interesting" information may include unpredicted changes in resource usage. In many situations the amount of resource used may be relatively predictable over a short timescale, relative to the measured parameter. For example, an outlet with no power being drawn from it will be highly likely to have no power being drawn from it a relatively short time later, such as a few seconds or minutes later. A light drawing 60W will be highly likely to continue consuming 60W over a few seconds or minutes. A furnace that is consuming oil at 4 gallons per hour will be highly likely to consume 4 gallons per hour a relatively short time later, such as a few seconds later. Embodiments of the methods and systems herein may leverage these observations to minimize both the network utilization and the energy expended by each node in reporting and accumulating data relative to resource usage.

For example, in a distributed network there may be a multitude of measuring nodes, **M_x** (**x** varying from 1 to **X**, the number of measuring nodes), operatively coupled with a data consumer or controller, **C**. Each measuring node **M_x** may contain at least the components required for sensing and measuring a resource usage (ex., energy, oil, gas, etc.), accumulating

a total resource usage, determining a rate of resource usage, storing some number of data samples locally, and communicating the information back to **C** as discussed above. **C** may contain at least the components required to communicate with the multitude of measuring nodes **M_x**, store information, and some kind of external communication capability.

5 In one example, the controller **C** may be concerned with or programmed to maintain a relatively accurate and recent value of the total resource usage (e.g., kWh) at each node, reported in widely spaced, discrete increments (i.e. >10 minutes). This shall be referred to as case **A**. **C** may also be interested in or programmed to determine shorter time resolution (i.e. <1 second) of resource consumption data for other purposes like safety, demand response,
10 etc. This shall be referred to as case **B**.

Accordingly, one example for collection of usage data would be to setup a polling process for information on usage from the network. In this case the controller may ask each node individually for results, or set up a schedule on which each node has a time-slot in which to report results (Time Domain Multiple Access). This standard approach, which may
15 be fundamentally easy to implement, may not always be desirable for a few reasons:

1. The maximum plausible update rate, f_{ur} , is inversely proportional to the number of nodes **X**, as represented in Equation 2.

$$\text{Eq. 2)} \quad f_{ur} \propto \frac{1}{X}$$

If the required update rate and size of data packet is fixed, and the number of nodes is
20 increased, then the communication protocol may be scaled and designed to operate at a relatively fast effective data rate in order to cope with large networks. As the network speed increases, so does the overall cost of implementation and use of the network. The increasing update rate may be of particular concern in case **B**, where the network may be interested in short-time scale power consumption events.

25 2. In some cases, there may be some number of nodes for which the averaged rate of resource usage has not changed significantly since the last update (i.e., the rate of total energy consumption has not increased/decreased significantly for that node). Combined with (1), this means that the network communication performance may be required to be far more capable than is actually necessary. As a result, this may lead to relatively more
30 expensive/complex/power hungry communication protocols than may be actually required.

3. Additionally, because of (2), some set of nodes within **X** may implicitly communicate resource usage data even though it is not necessary, i.e. an unnecessarily relatively large number of transmission events may take place. This may cost increase the cost of the network in terms of implementation and utilization.

5 Accordingly, provided herein are methodologies, systems and algorithms for dynamic reporting of resource usage data between the multitude of measuring nodes **M_x** and at least one controller **C**. One such system may include a distributed algorithmic decision making process. The process may be recorded on a tangible storage medium and stored on and/or executed by a processor provided in a computer, a controller node, a measuring node or a
10 combination thereof.

In embodiments, a given measuring node **M_x** and controller **C** may independently calculate and predict an estimated resource usage value associated with a given sensor operatively coupled to the measuring node. The predictor algorithms used by the measuring node **M_x** and controller **C** may be the same. In addition, the dataset used in predictions by
15 the measuring node **M_x** and the controller **C** may be the same. The measuring node **M_x** may then measure the resource usage and the predicted estimates may be periodically adjusted.

As alluded to above, the sensor may include devices that may measure aspects of the resource usage, such as current, voltage, tank level, pressure, etc. and the resource usage may be determined from these measured aspects. A difference between the estimated resource
20 usage value and the measured resource usage may then be calculated by the measuring node processor. If the difference falls outside of a bound, e.g., exceeds a limit or threshold, data regarding resource usage, and other data necessary to continue making predictions, may be communicated to the controller. If the difference remains within the bound, the measuring node will refrain from communicating the data regarding resource usage.

25 If the data provided by the measuring node regarding resource usage is indeed received by the controller, the controller may provide a notification to the measuring node that the data has been received. The measuring node and controller may then use the shared dataset, or data available at both the measuring node and controller, in making further predictions.

30 The method may be repeated periodically, such as at a given time interval. For example, in embodiments, the interval may be every line cycle or a clock cycle. For a line cycle, this means that the measuring node may measure or accumulate energy usage for a

time period, which may be some integer multiple of rising zero crossings of line voltage, e.g. 1/60 of a second or 1/50 of a second. In embodiments, the interval may be 1 microsecond or greater, such as in the range of 1 microsecond to annually, including all values and ranges therein. The estimated and measured resource usage may be quantified in terms of a rate, such as the total resource usage over a given time period. In embodiments, only the number related to the measured resource usage itself is communicated, not the calculated difference between the estimated and measured resource usage. Further, the measured resource usage that may be communicated to the controller may include rate of resource usage, the accumulated or total resource usage or both.

FIG. 4a illustrates a graph of rate of resource usage (e.g., power draw) **400**, estimated resource usage **402** as calculated by the controller and measured resource usage **404** over time. **FIG. 4b** illustrates a graph of the calculated difference between the estimated resource usage **406** and the bound **408** over time (wherein the time scale is the same as in **FIG. 4a**). The bound may be fixed, or as illustrated adjusted over time using a bound algorithm. The bound may include an upper limit and a lower limit, wherein the upper and lower limits may exhibit the same, similar or different magnitudes. **FIG. 4c** illustrates a graph of reporting events by the measuring node to the controller, wherein the measured resource usage is reported or sent to the controller **410**. The lag time between the reporting by the measuring node and the time in which the controller updates its prediction **412** of the estimated resource usage is also illustrated.

As alluded to above, in embodiments, the bound may be a magnitude or a fixed number or calculated using a bound algorithm. For example, when the bound is a fixed number, if the difference between the estimated resource usage value and the measured resource usage is more than the fixed value, the measured resource usage at the measuring node may be communicated to the controller. If the difference is less than the fixed value, the measuring node will not send the measured resource usage to the controller.

The bound may also be related to the rate of resource usage. For example, if the difference between the estimated resource usage and the measured resource usage is more than the rate of resource usage multiplied by a fixed time, then a message may be sent to the controller and the measured resource usage may be communicated to the controller.

The bound may also be varied with time, and in particular, how much time has past since the last message was sent. For example, if the difference between the estimated

resource usage value and the measured value is more than a fixed rate of resource usage multiplied by the time since the last usage, then the measured resource usage may be communicated to the controller.

In addition, the bound may be varied when the difference falls outside of the bound
5 and a communication is sent to the controller, the bound may then be increased by a factor, such as a factor of greater than 1, such as in the range of 1.01 to 10.00.

Further, the bound may be calculated such that it varies with time. For example, the bound algorithm may set the bound to an initial value. If a message has not been sent after a certain time period has lapsed, the reducing time, the bound may be multiplied by a first
10 factor, which is less than 1, for example 0.5, reducing the bound. This may continue until the difference of the estimated resource usage and the measured resource usage falls outside of or exceeds the bound.

Once the difference falls outside of the bound, a message may be sent including data allowing the controller to determine what the bound was at the time of the communication,
15 the rate of resource usage, whether any prior communications were not received by the controller and the measured resource usage. The bound may then be multiplied by a second factor, greater than 1, such as 2. Therefore, the average rate of sending messages or communications to the controller may be determined by the reducing time and the factor applied. For example, if the reducing time is one minute and the first factor is 0.5 and the
20 second factor is 2, then messages will be sent at an average rate of one per minute. A minimum bound may also be set, so that nuisance messages may be avoided for insignificant errors reducing the overall average rate at which messages may be sent.

In embodiments, the bound may be determined using one or a combination of the above algorithms.

25 From the above, it may become apparent that the frequency of reporting events (i.e., transmission or communication events) may be adjusted by adjusting the reducing time and factors by which the bound may be multiplied. For example, as alluded to above, by reducing the reducing time, i.e., the amount of time which passes before the bound is multiplied by a factor of less than 1, the frequency of reporting events may increase. Further,
30 increasing the factor by which the bound may be multiplied after the measured deviation in resource usage falls outside the bound may reduce the frequency in reporting time, wherein the factor may be greater than 1. Adjustments in reducing time and the factors allow for the

ability to tune the algorithms related to specific measuring nodes, and thereby sensors, to adjust the frequency in which the measuring nodes communicate with the controller **C**.

The controller, utilizing the bound algorithm utilized by the node processor, may also calculate a range of probable measured resource usage values. For example, if a fixed bound is set, the controller may indicate that the range of probable measured resource values fall at the estimated predicted resource usage value plus or minus the fixed bound value.

In addition, the controller may change aspects of the bound algorithm stored at the node processor and controller processor, including the reducing time, the factors, the minimum bound, set a fixed value, or all of the above, to tune the average rate of data communicated from a measuring node, prioritizing information received regarding individual resources. Given the above, relatively small errors may eventually be reported whereas larger errors may be tolerated for shorter periods of time. If the rate of usage changes substantially then a message may be sent quickly. Further, if resource usage rates change frequently, the algorithm may desensitize itself to these changes and send messages about changes which are notable in view of the usage characteristics.

It is also noted that the failure of a particular message to be delivered does not “break” the algorithm, but may degrade the short term accuracy and latency of the information that the controller has and similarly degrade the estimated resource usage data predicted by the controller. Thus, the controller may provide a relatively good estimate at any point in time about resource usage, the latency of that information and the difference between that information and the measured resource usage.

For illustration, if the nodes are measuring energy, each node **M_x** may be configured to operate in line-cycle based energy accumulation mode. This means that the measuring node may measure or accumulate energy usage for a time period, which may be some integer multiple of rising zero crossings of line voltage, e.g. 1/60th of a second.

A set of rules i.e., a predictor algorithm and a bound algorithm, may be provided in memory or in another medium and stored and/or executed by the processors included in the measuring nodes **M_x** and controller **C** regarding energy data and when to report it or when it is reported. Controller **C** may still obtain a relatively accurate total energy consumption figure from each node **M_x** while avoiding the necessity of a static reporting structure and may also gain the ability to resolve shorter time-scale events.

For an example of a set of rules, the following variables are defined:

Symbol	Name	Definition
n	Current cycle	Line cycle count
Eest[n]	Estimated Energy	Calculated Estimate of total energy used up to cycle n
Em[n]	Total Energy	Measured total energy used up to cycle n
Edev[n]	Error Energy	Difference between Eest and Em at cycle n
Eb	Error Bound	Value for Edev that will cause a data transmission
Ecyc[n]	Cycle Energy	Energy accumulated in line cycle n
Ntrans	Last transmission event cycle number	n when last data transmission sent

In the energy measurement and calculation processes of a measuring node **Mx** the total energy may be determined as set forth in Equation 3 below.

5 Eq. 3) $Em[n] = Em[n-1] + Ecyc[n]$,

where n is a given line cycle and $Ecyc[n]$ is defined as the energy accumulated over a single line cycle. This process may be consistent across all line-cycle accumulation based energy measurement.

A predicted or estimated energy may then be calculated at each line cycle as
10 illustrated in Equation 4 below.

Eq. 4) $Eest[n] = Eest[n-1] + Ecyc[Ntrans]$

Additionally, an energy deviation or error may be calculated as set forth in Equation 5 below.

Eq. 5) $Edev[n] = Eest[n] - Em[n]$

15 Upon completion of a line-cycle accumulation event and acquisition of the $Ecyc[n]$ sample, equations Eq. 3, Eq. 4 and Eq. 5 may be re-calculated, repeating the calculations every line cycle.

The next step may include determining if conditions for a transmit event are met, i.e., whether the node should send a message to the controller **C**. For example, an update at line
20 cycle n may be transmitted if there is reason to believe that $Edev[n]$ may be outside of the bound Eb . In an embodiment, $Edev[n]$ may be compared against the positive and negative

limit. If the $E_{dev}[n]$ is above the positive or negative bound, communication may occur. Determining if $E_{dev}[n]$ is outside of bound E_b , may include indirect methods, such as seeing that the current has changed.

If conditions for a transmit event are met, data may be sent to the controller **C** to
 5 update the prediction algorithm. The data may include one or more of the following: n , $E_m[n]$, $E_{cyc}[n]$, $E_{dev}[n]$ and E_b or combinations thereof. Once such update is acknowledged by the controller, or other such stipulations for a transmit event have been met, N_{trans} may be updated to the n at which it was transmitted. Once the measuring node receives the controller's acknowledgement of the data packet, the measuring node may then adjust its
 10 prediction as well using the same dataset available at the controller **C**, so that the prediction made on the measuring node may be the same as the prediction made on the controller. This may be accomplished by the node adjusting its prediction upon receipt of the acknowledgement such that $E_{est}[n] = E_{est}[N_{trans}] + (n - N_{trans}) * E_{cyc}[N_{trans}]$.

The bound **E_b** may be adjusted by the measuring node, the controller or both. In
 15 embodiments, the measuring node may adjust the bound algorithmically whenever a data packet generated by the bound or bound algorithm is sent to the controller **C** and then acknowledged. In embodiments where the controller is configured to calculate the expected value of the bound, it does so using the same parameters as the node, i.e., using the same bound algorithm and data set.

20 As previously noted, the measuring node may also reduce the bound over time (possibly subject to some limits) to guarantee the resolution of the information communicated to the controller over a long interval of time. The controller may also communicate to the measuring node a change in the parameters of the bound algorithm, which would then be utilized by the measuring node and increase and/or decrease the rate of the data packets being
 25 generated or collected. In this way, the overall utilization of the network may be throttled. For example, when a reducing time is raised for a given measuring node, fewer events may be generated over any given interval of time, and therefore the network utilization may be lower for that measuring node.

Reference is again made to **FIGS. 4a, 4b and 4c**. At point "A" the power draw
 30 increases, accompanied by a rise in the measured energy usage **404**. However, a deviation is created between the predicted estimated energy usage **402** and the measured energy usage **404**. At point "B", the difference **406** between the accumulated energy **404** and predicted

energy usage **402** increases outside of the bound value **408**, causing a transmit event or communication to occur between the measuring node and controller at point “C”. The measuring node may report the changes in power draw, the accumulated energy and/or the bound crossing to the controller when the bound crossing occurs.

5 The measuring node may increase the bound by a factor, such as a factor of two, at point “D.” At point “E” the controller acknowledges that the update is received and at about the same time, the controller at point “F” revises the prediction of energy usage. In addition, once the controller confirms the receipt of the update, the measuring node may begin using the transmitted data regarding resource usage in its own prediction of estimated energy usage.

10 Then the measuring node and/or controller “reset” the deviation at “G” that accumulated prior to the update and a difference is calculated utilizing the new bound. After the passage of some amount of time without a transmit event, which may be a predetermined amount of time (the reducing time), the controller may revise the bound by multiplying the bound by a factor of less than 1, at point “H”. As can be seen, the measured accumulated energy **404** and

15 the predicted energy usage **402** may track closely, with differences visible at e.g., points “ α ”, where the power draw rises, and “ β ” where the power draw changes and increases, and “ γ ” where the power draw changes and decreases.

After point “I”, when power draw is reduced and remains relatively constant, the bound may be reduced by a factor of less than 1 after a reducing time. This reduction in the

20 bound may occur multiple times until the difference between the measured energy usage and the predicted estimated energy usage falls outside of bound “J” and a reporting event is triggered at point “K”. The prediction calculations may then again be adjusted and the bound may optionally be increased by a factor of greater than 1.

Any of the operations described herein may be implemented in a system that includes

25 one or more tangible machine-readable storage mediums having stored thereon, individually or in combination instructions that when executed by one or more processors perform the methods. Here the processors may include, for example, a system CPU, other programmable circuitry or both. Also, it is intended that operations described herein may be distributed across a plurality of physical devices, such as processing structures at more than one different

30 physical locations. The tangible computer-readable storage medium may include, but is not limited to, any type of disk including floppy disks, optical disks, compact disk read-only memories (CD-ROMs), compact disk rewritables (CD-RWs), and magneto-optical disks,

semiconductor devices such as read-only memories (ROMs), random access memories (RAMs) such as dynamic and static RAMs, erasable programmable read-only memories (EPROMs), electrically erasable programmable read-only memories (EEPROMs), flash memories, magnetic or optical cards, or any type of tangible media suitable for storing
5 electronic instructions. The computer may include any suitable processing platform, device or system, computing platform, device or system and may be implemented using any suitable combination of hardware and/or software. The instructions may include any suitable type of code and may be implemented using any suitable programming language. Other embodiments may be implemented as software modules executed by a programmable control
10 device.

As used in any embodiment herein, the term “module” may refer to software, firmware and/or circuitry configured to perform the stated operations. The software may be embodied as a software package, code and/or instruction set or instructions, and “circuitry”, as used in any embodiment herein, may comprise, for example, singly or in any combination,
15 hardwired circuitry, programmable circuitry, state machine circuitry, and/or firmware that stores instructions executed by programmable circuitry. The modules may, collectively or individually, be embodied as circuitry that forms part of a larger system, for example, an integrated circuit (IC), system on-chip (SoC), etc.

The foregoing description of several methods and embodiments has been presented
20 for purposes of illustration. It is not intended to be exhaustive or to limit the claims to the precise steps and/or forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be defined by the claims appended hereto.

What is claimed is:

Claims

1. A method for gathering information regarding usage of a resource from at least one of a plurality of measuring nodes operatively coupled to a controller, wherein said measuring node includes at least one sensor and a node processor operatively coupled to said sensor, and
5 said controller includes a controller processor, comprising:

predicting an estimated resource usage value associated with said at least one sensor with said node processor, wherein said node processor uses a predictor algorithm and a dataset to predict said estimate resource usage value, wherein said dataset comprises data which is available at both said measuring node and said controller;

10 predicting said estimated resource usage value with said controller processor, wherein said controller uses said predictor algorithm and said dataset to arrive at said estimated resource usage value;

measuring resource usage to which said estimated resource usage value applies with said sensor; and

15 calculating a difference between said estimated resource usage value and said measured resource usage using said node processor and if said difference falls outside of a bound communicating said measured resource usage to said controller.

2. The method of claim 1, wherein said bound is a fixed value.

20

3. The method of claim 1, wherein said bound is calculated using a bound algorithm.

4. The method of claim 3, wherein said bound algorithm is calculated separately by said controller processor.

25

5. The method of claim 4, further comprising calculating a range of probable resource usage values by said controller processor using said bound algorithm.

6. The method of claim 1, wherein said measuring node includes node memory and said
30 method further comprises storing more than one measured resource usage in said node memory and communicating said more than one measured resource usage to said controller when said difference exceeds said bound.

7. The method of claim 1, wherein said method is repeated.

8. The method of claim 7, wherein said method is repeated every line cycle.

5

9. The method of claim 1, wherein said measuring node includes a plurality of sensors and said method is executed for more than one of said sensors.

10. The method of claim 1, wherein said bound changes with time.

10

11. The method of any one of claims 1 to 5, wherein said method is repeated.

12. The method of claim 11, wherein said method is repeated every line cycle.

15

13. The method of any one of claims 1 to 5, or 11 to 12, wherein said measuring node includes a plurality of sensors and said method is executed for more than one of said sensors.

14. The method of any one of claims 1 to 5, or 11 to 13, wherein said bound changes with time.

20

15. The method of any one of claims 1 to 5, or 11 to 14, wherein said measuring node includes node memory and said method further comprises storing more than one measured resource usage in said node memory and communicating said more than one measured resource usage to said controller when said difference exceeds said bound.

25

16. A system for gathering information regarding usage of a resource from a plurality of measuring nodes, comprising:

a plurality of measuring nodes, wherein each of said measuring nodes includes at least one sensor configured to measure resource usage and a node processor operatively coupled to said sensor, wherein said node processor is configured to

30

predict an estimated resource usage value associated with said at least one sensor using a predictor algorithm and a dataset, wherein said dataset comprises data which is available at both said measuring node and a controller,

measure resource usage to which said estimated resource usage value applies with said sensor, and

calculate a difference between said estimated resource usage value and said measured resource usage and if said difference falls outside of a bound communicating said measured resource usage to said controller; and

said controller operatively coupled to said plurality of measuring nodes wherein said controller includes a controller processor, wherein said controller processor is configured to predict said estimated resource usage value, wherein said controller uses said predictor algorithm and said dataset to arrive at said estimated resource usage value.

17. The system of claim 16, wherein each of said measuring nodes includes more than one sensor.

18. The system of claim 16, wherein said resource usage is selected from the group consisting of energy, fuel consumption and water consumption.

19. The system of claim 16, wherein said at least one sensor is operatively coupled to a resource consuming device.

20. The system of claim 16, wherein said at least one sensor is operatively coupled to a resource supply line.

21. The system of claim 16, wherein said at least one sensor is operatively coupled to a resource storage device.

22. The system of claim 16, wherein said at least one sensor is operatively coupled to a resource generating device.

23. The system of claim 16, wherein said sensor includes a device selected from the group consisting of Hall sensors, current transformers, and Rogowski coils.

24. The system of claim 16, wherein said sensor includes a device selected from the group
5 consisting of a flow meter, a pressure gauge, and a level gauge.

25. The system of any one of claims 16 to 17, wherein said resource usage is selected from the group consisting of energy, fuel consumption and water consumption.

10 26. The system of any one of claims 16 to 17, or 25, wherein said at least one sensor is operatively coupled to a resource consuming device.

27. The system of any one of claims 16 to 17, or 25, wherein said at least one sensor is operatively coupled to a resource supply line.

15

28. The system of any one of claims 16 to 17, or 25, wherein said at least one sensor is operatively coupled to a resource storage device.

29. The system of any one of claims 16 to 17, or 25, wherein said at least one sensor is
20 operatively coupled to a resource generating device.

30. The system of any one of claims 16 to 17, or 25 to 29, wherein said sensor includes a device selected from the group consisting of Hall sensors, current transformers, and Rogowski coils.

25

31. The system of any one of claims 16 to 17, or 25 to 29, wherein said sensor includes a device selected from the group consisting of a flow meter a pressure gauge, and a level gauge.

30 32. A system comprising, one or more storage mediums having stored thereon, individually or in combination, instructions that when executed by one or more processors result in the following operations comprising:

predicting an estimated resource usage value associated with at least one sensor operatively coupled to a measuring node using a node processor, wherein said node processor uses a predictor algorithm and a dataset, wherein said dataset comprises data which is available at both said measuring node and a controller;

- 5 predicting said estimated resource usage value separately with said controller, wherein said controller uses said algorithm and said dataset to arrive at said estimated resource usage value;

measuring resource usage to which said estimated resource usage value applies with said sensor; and

- 10 calculating a difference between said estimated resource usage value and said measured resource usage using said node processor and if said difference falls outside of a bound communicating said measured resource usage to said controller.

15

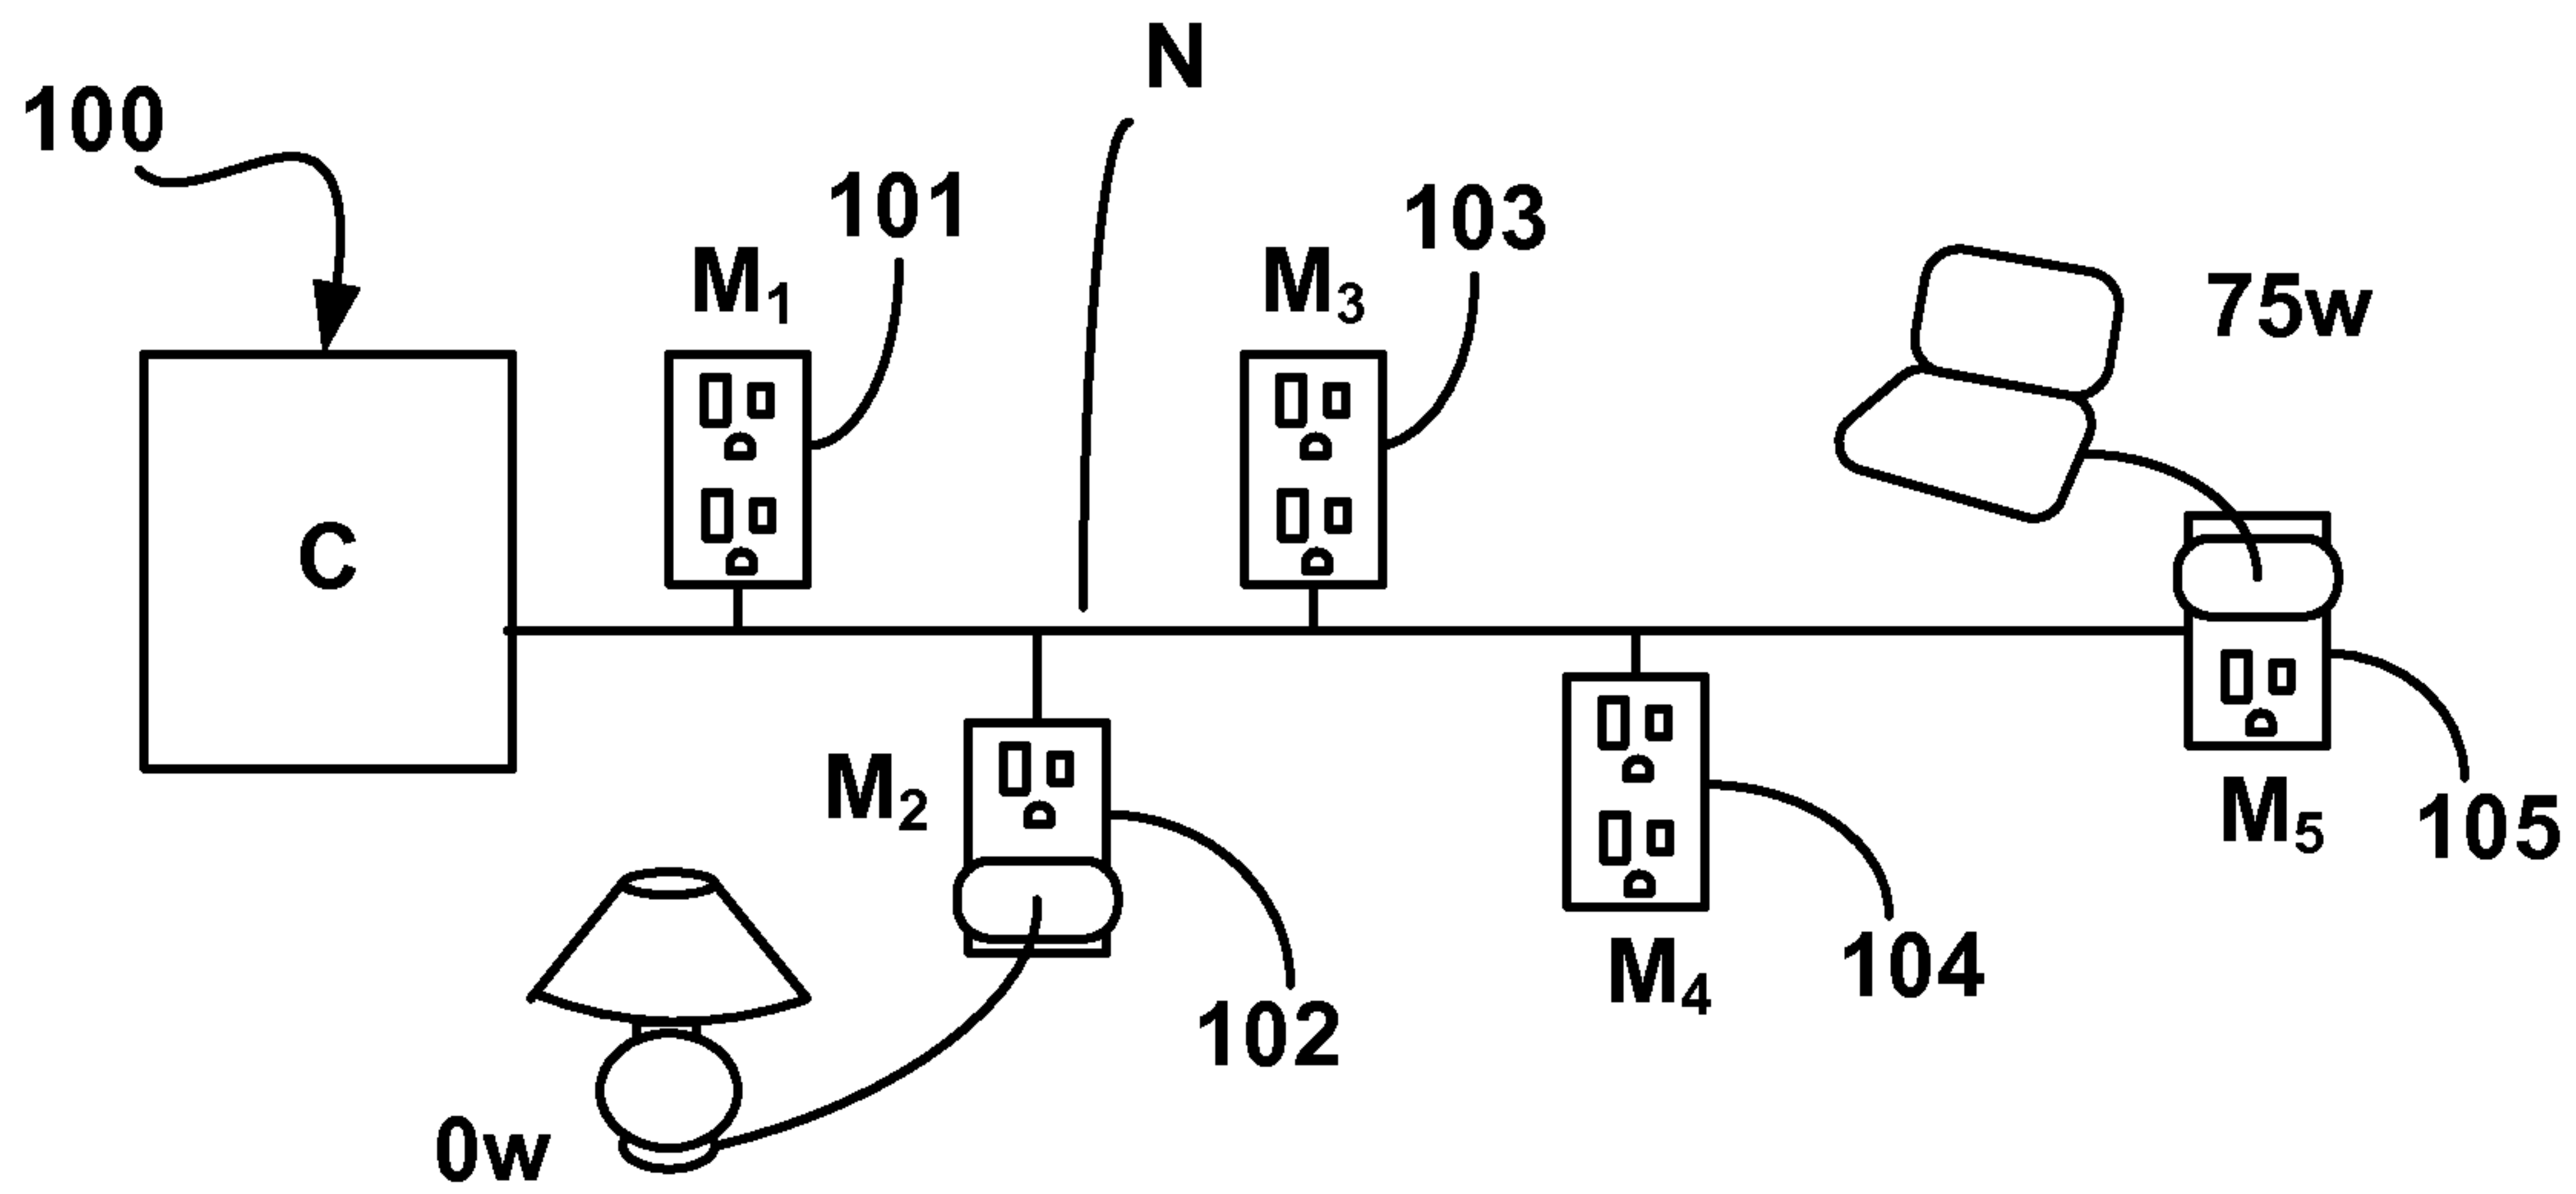


FIG. 1a

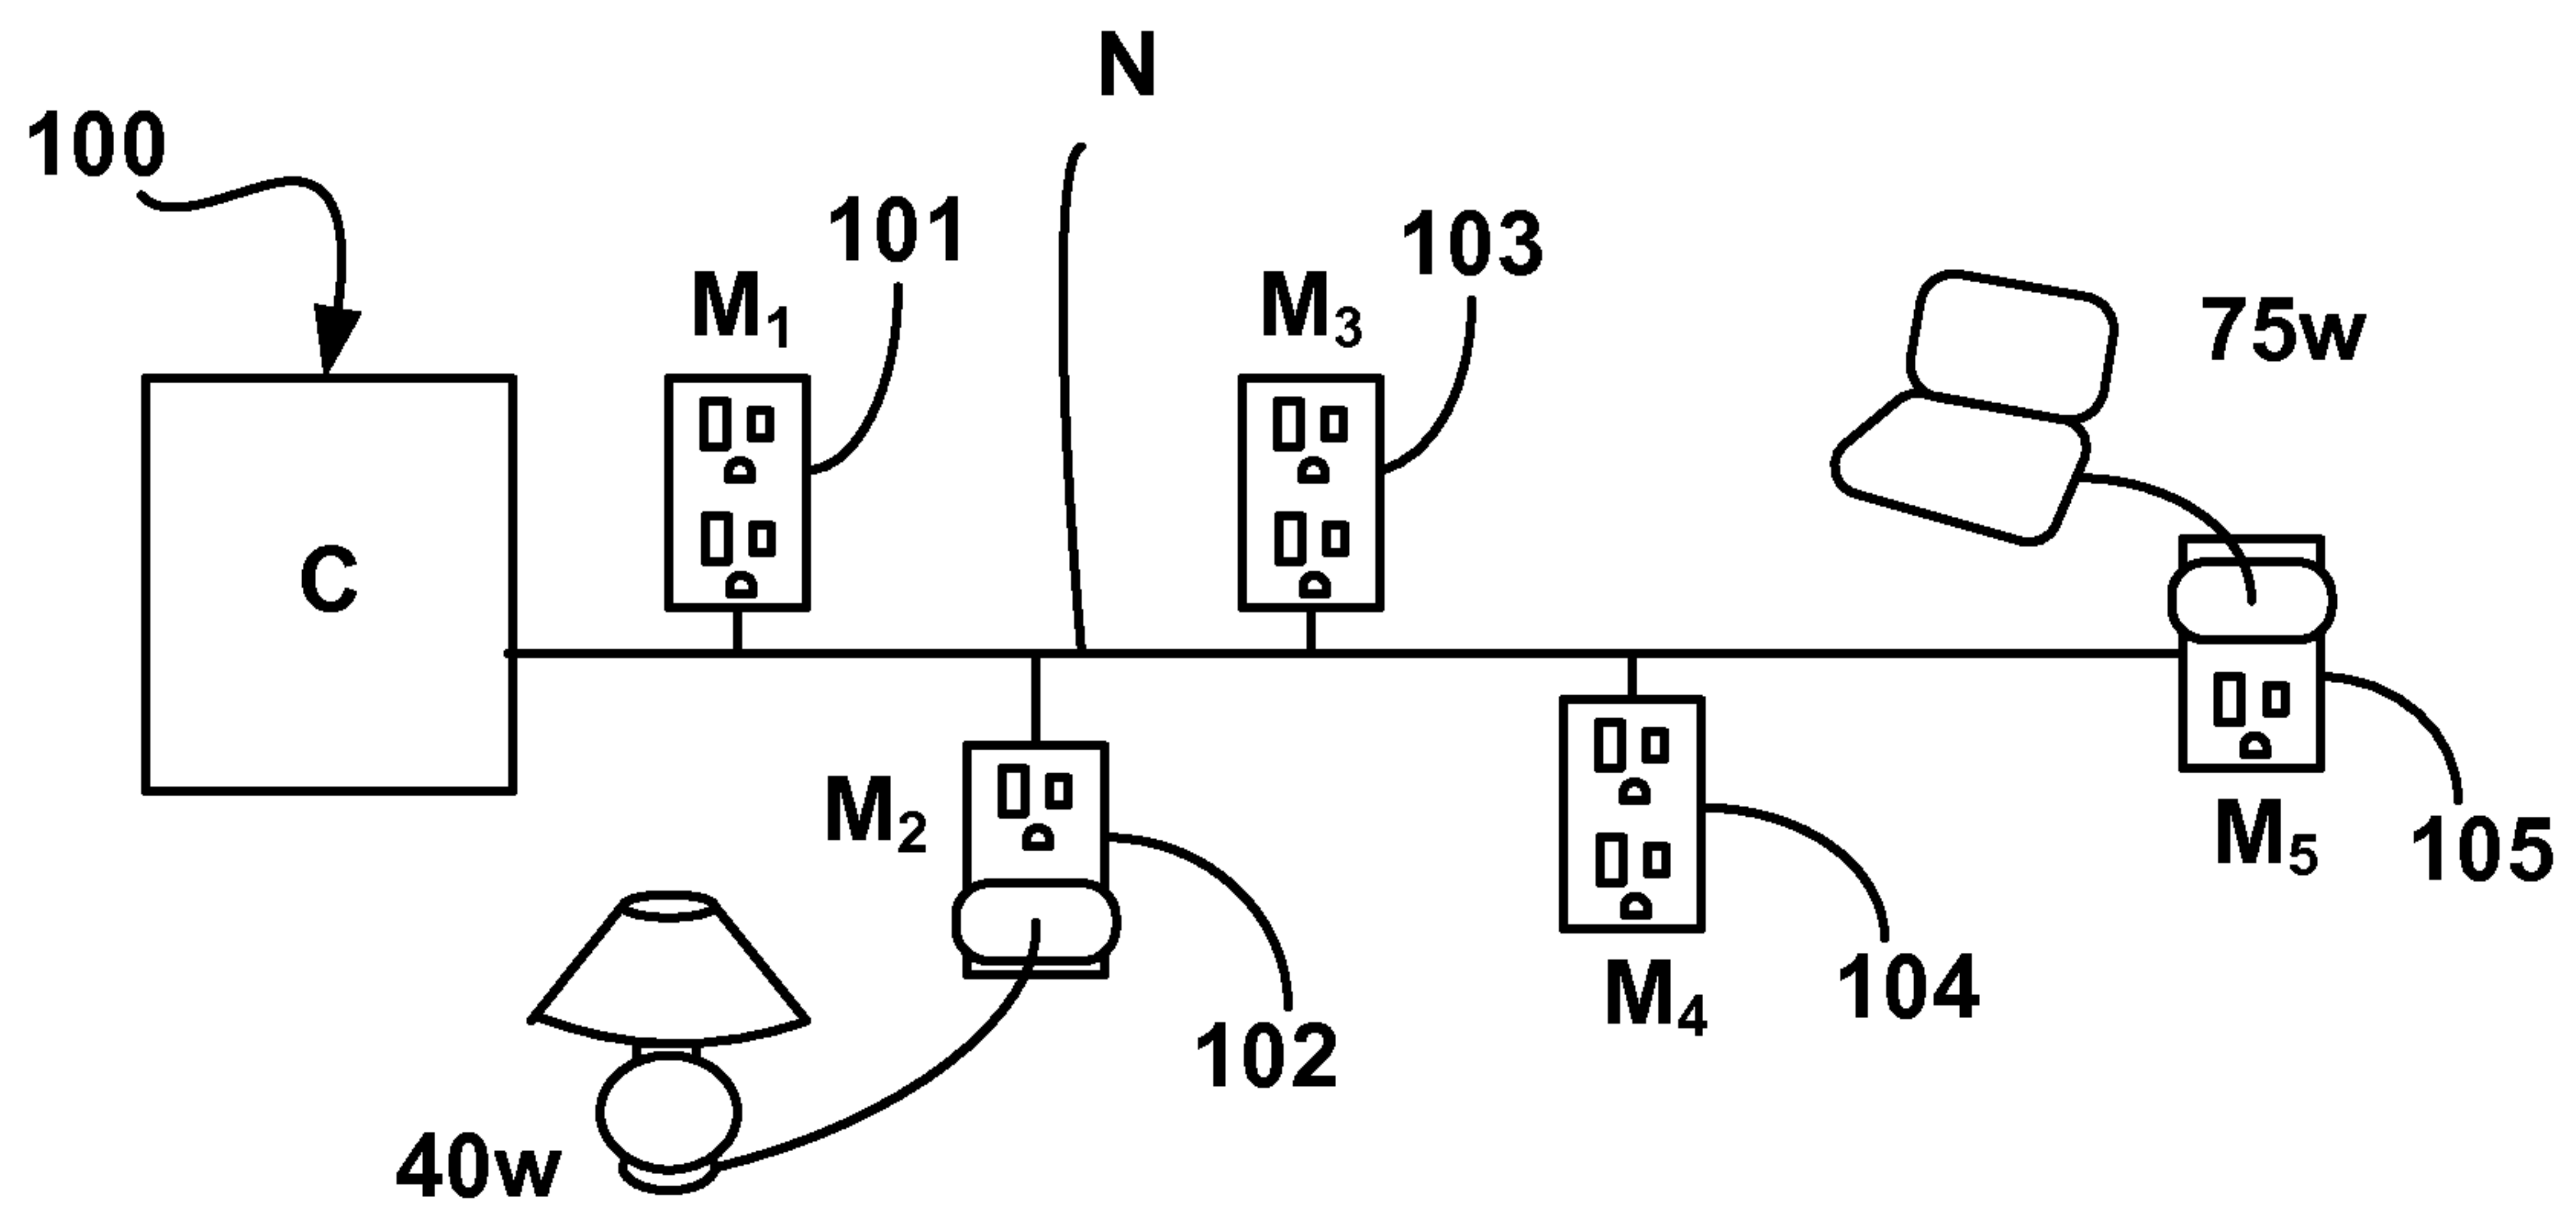


FIG. 1b



FIG. 2

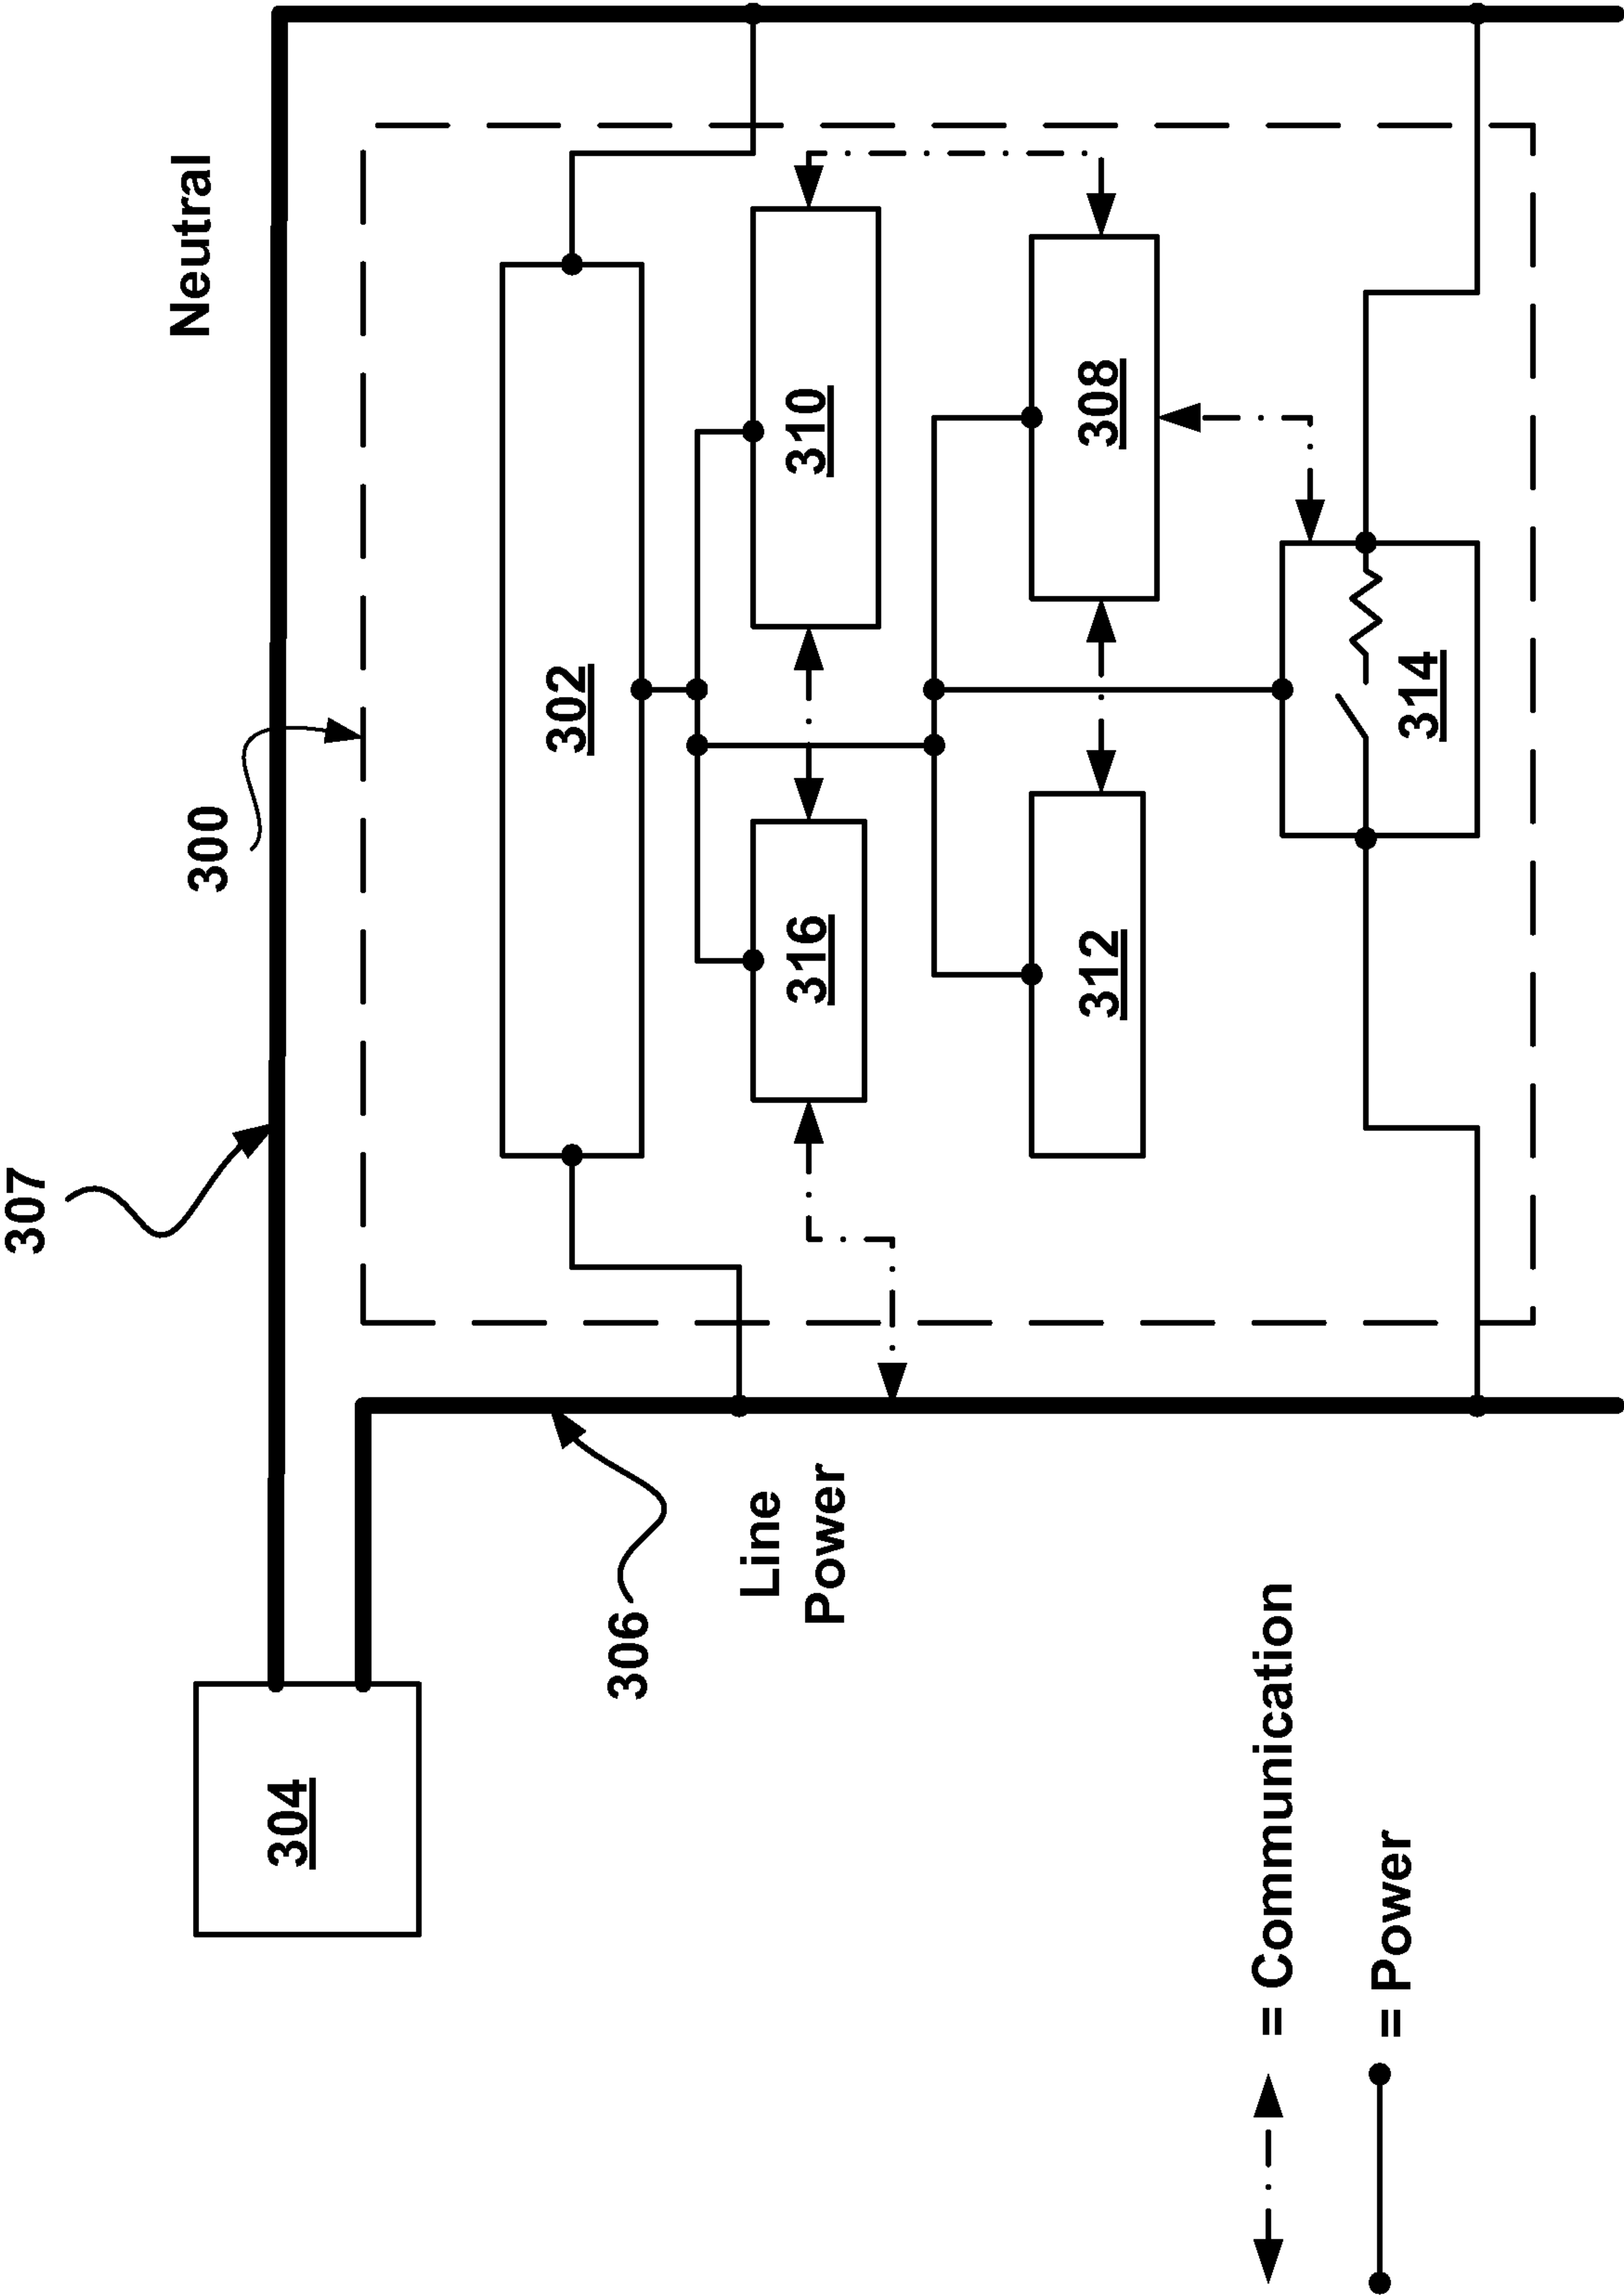
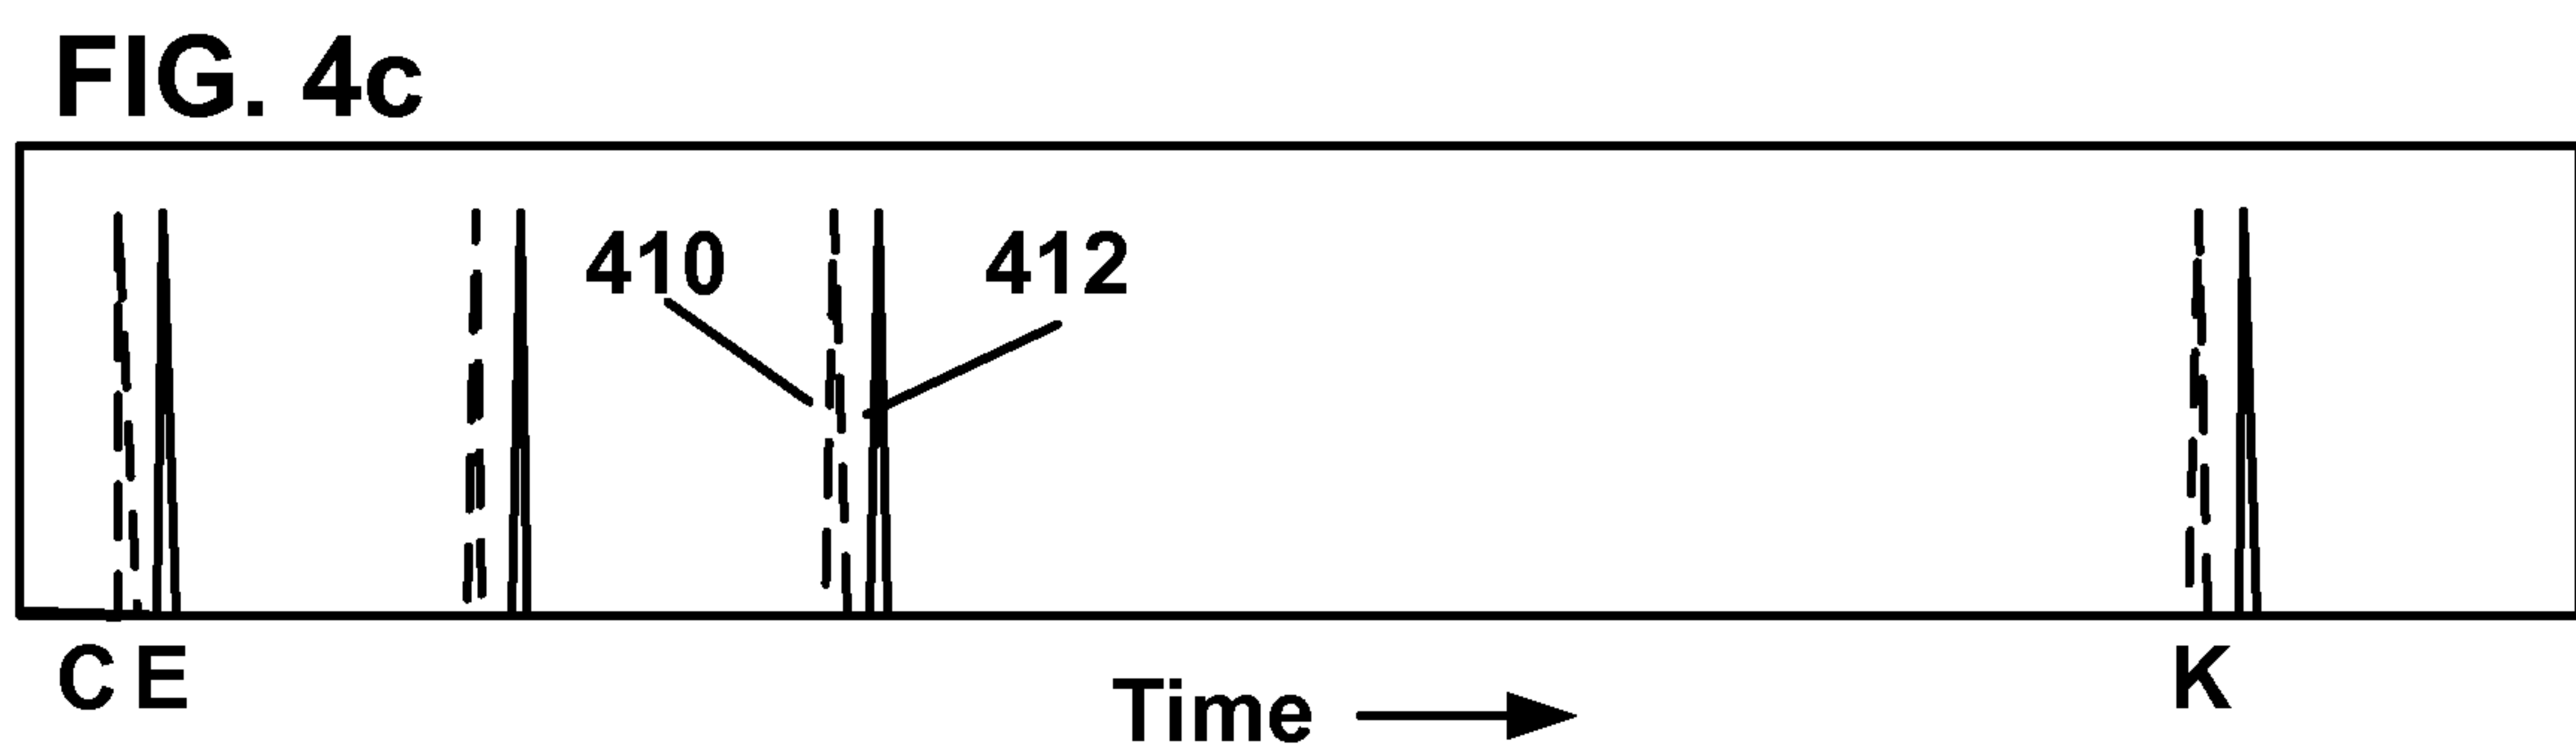
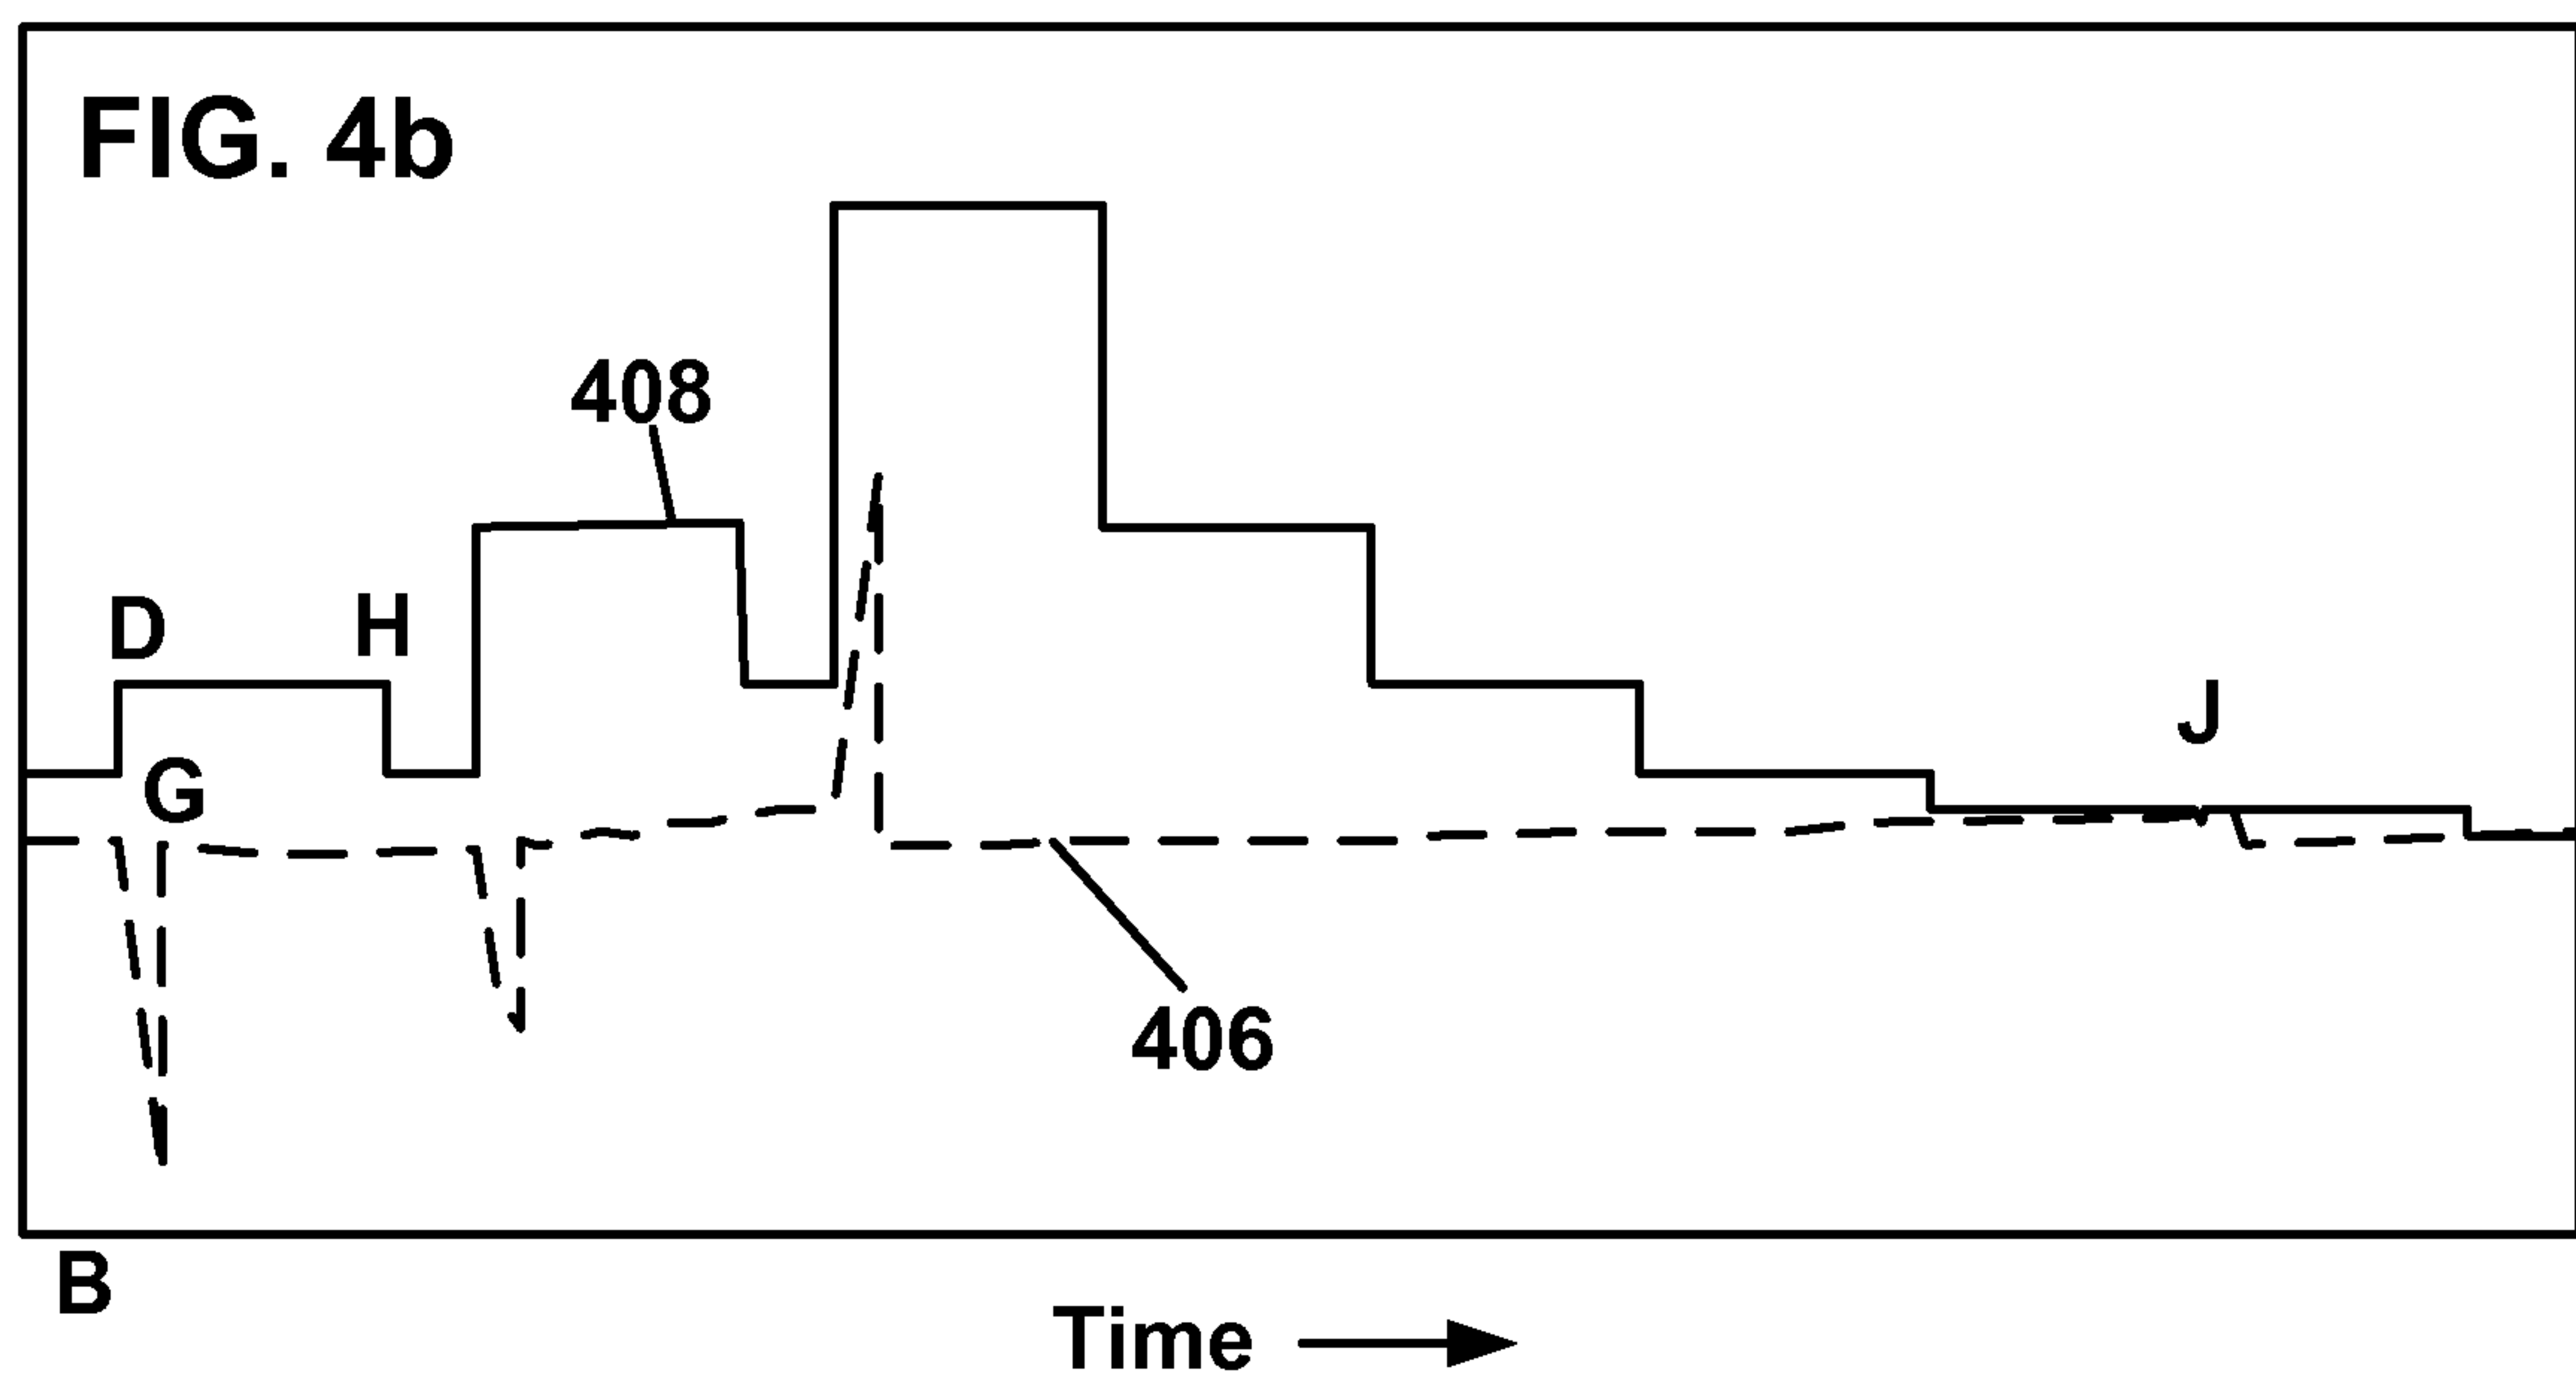
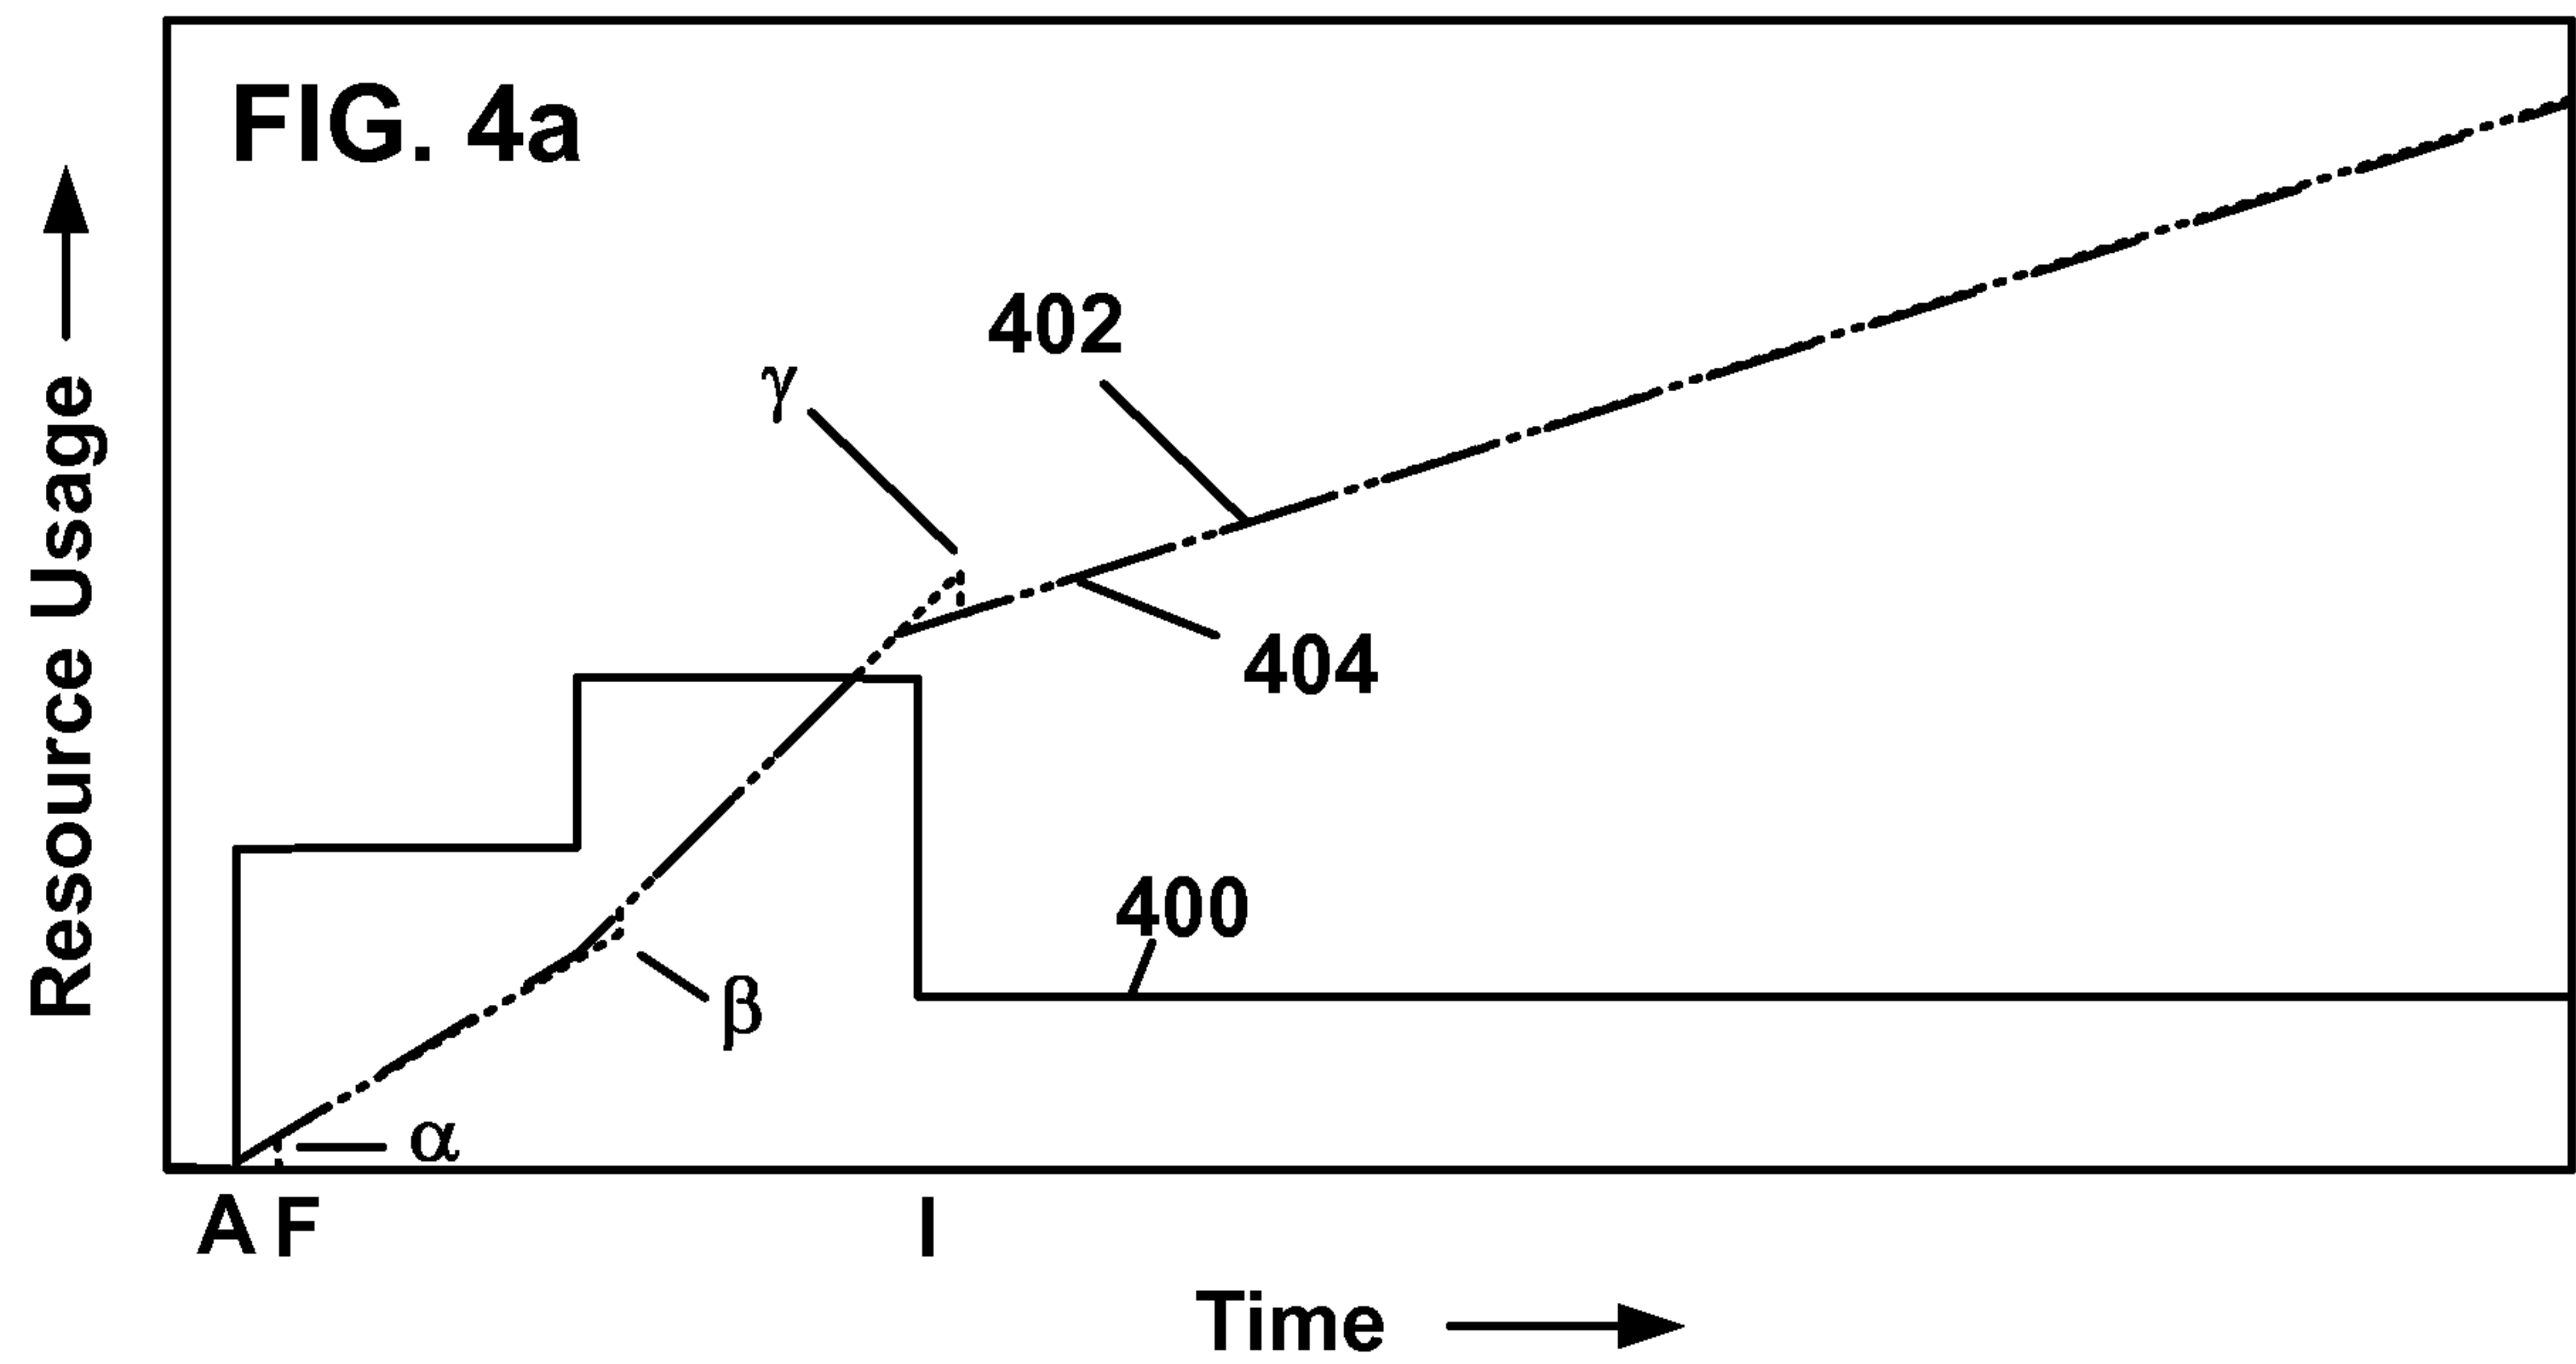


FIG. 3



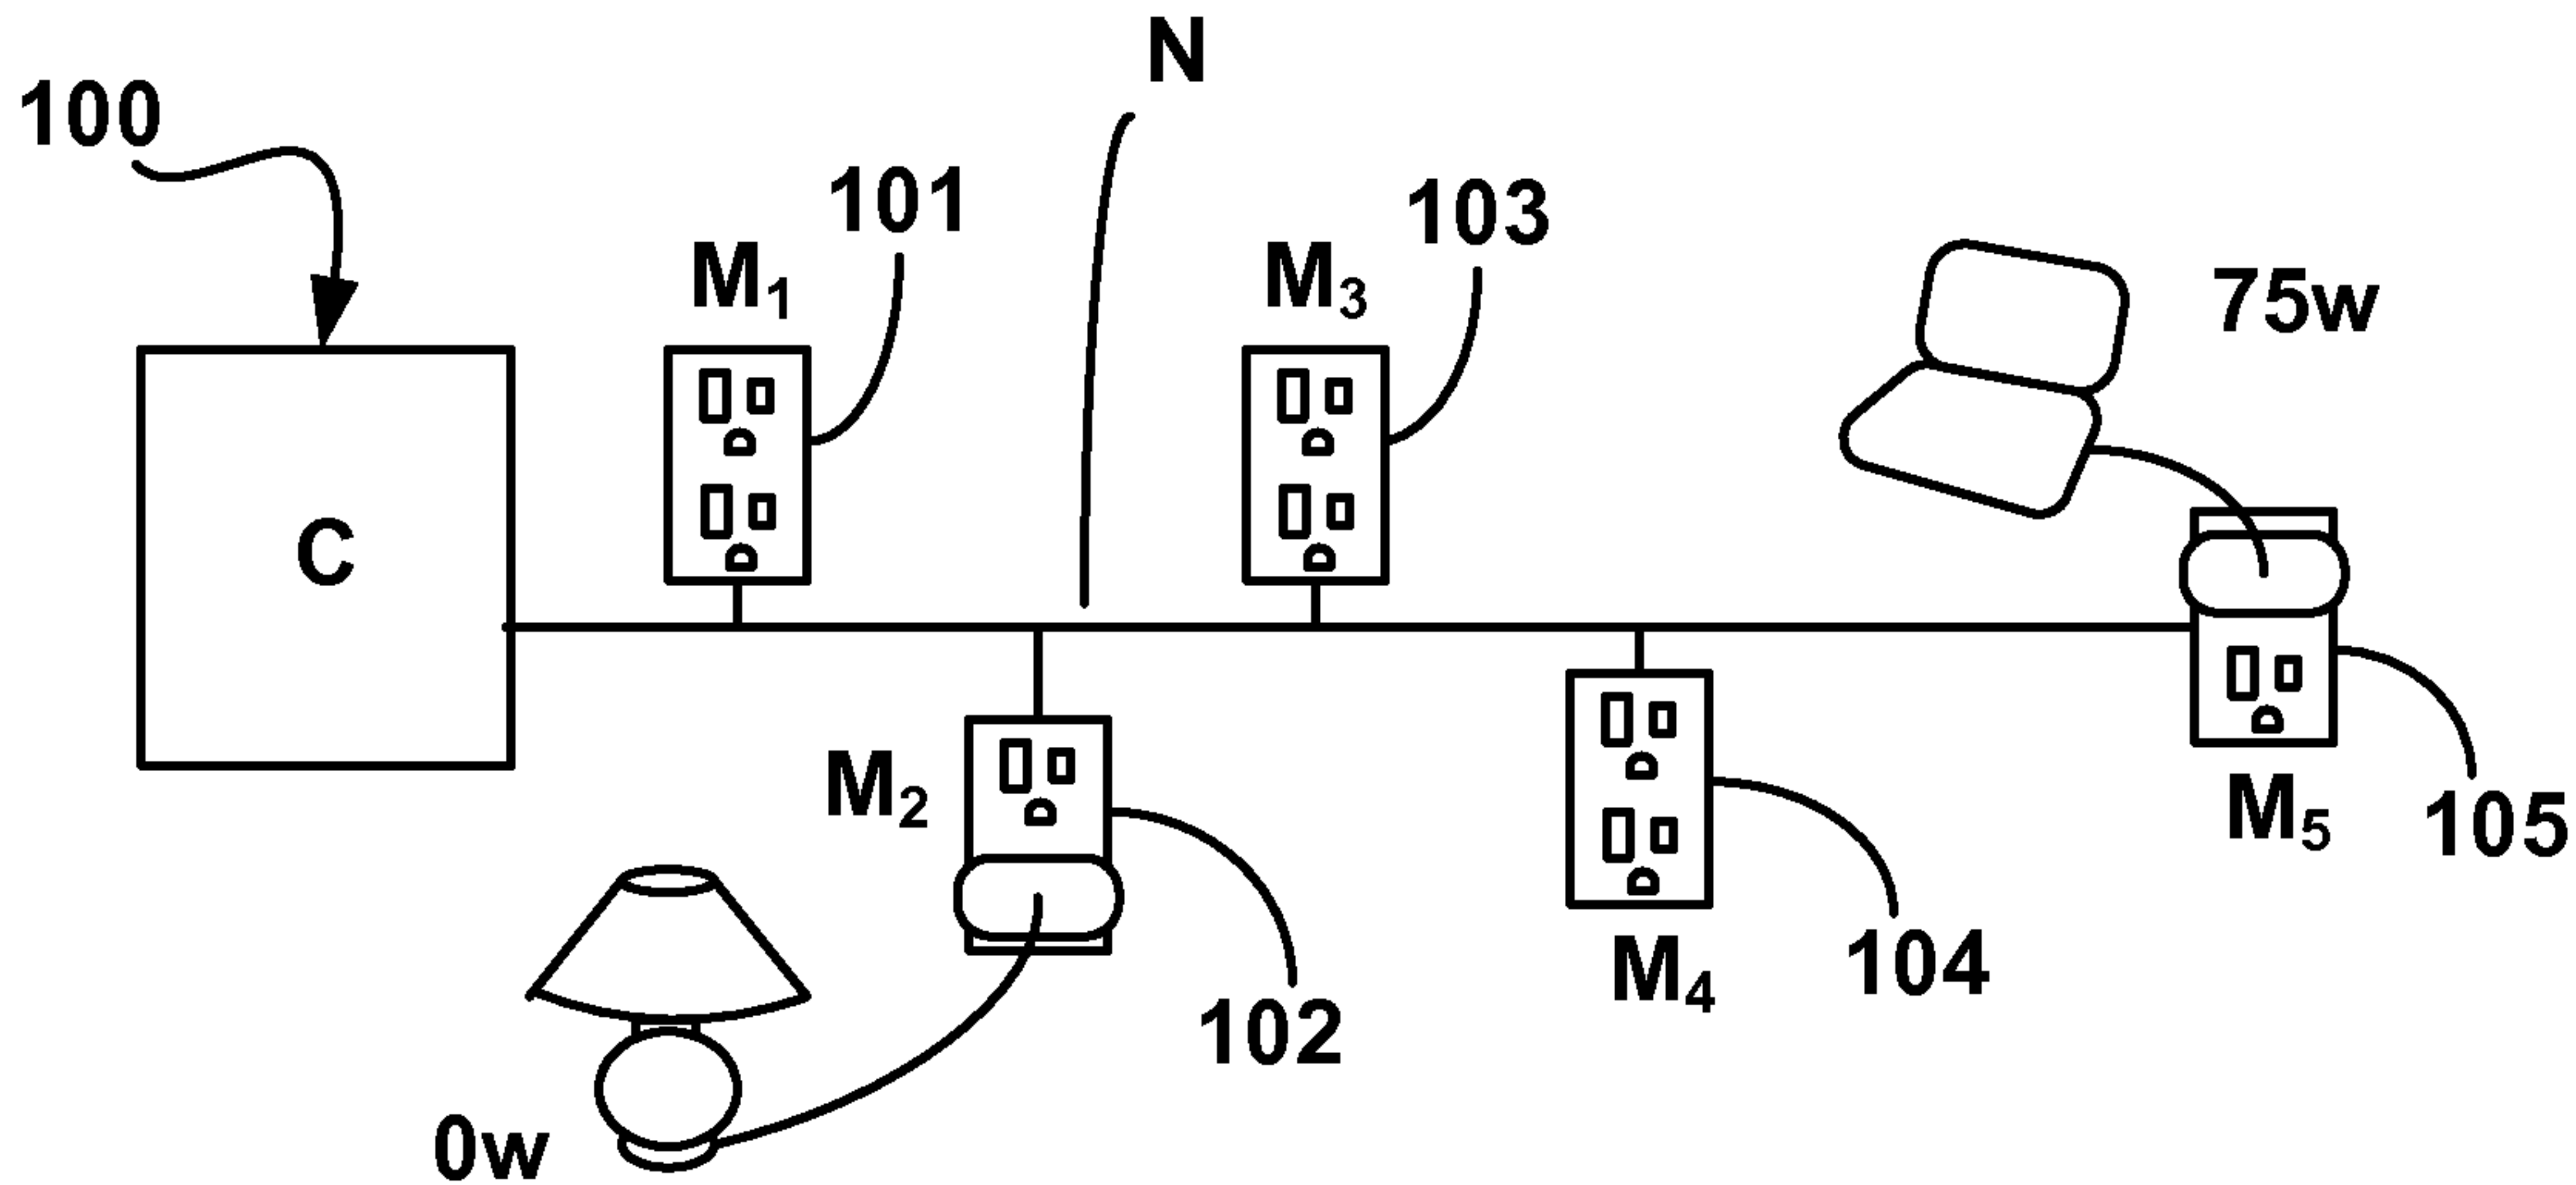


FIG. 1a