

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 August 2008 (14.08.2008)

PCT

(10) International Publication Number
WO 2008/095801 A2

(51) International Patent Classification:
C09B 67/04 (2006.01) **C09B 67/50** (2006.01)
C09B 67/22 (2006.01) **G03F 7/00** (2006.01)

(74) Common Representative: CIBA HOLDING INC.;
Patent Department, Klybeckstrasse 141, CH-4057 Basel
(CH).

(21) International Application Number:
PCT/EP2008/050916

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 28 January 2008 (28.01.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07101892.3 7 February 2007 (07.02.2007) EP

(71) Applicant (for all designated States except US): CIBA HOLDING INC. [CH/CH]; Klybeckstrasse 141, CH-4057 Basel (CH).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LEE, HyeonKook [KR/KR]; Lotte Inverse-ga 102-dong 501-ho, 130 Ok-Dong, Nam-Ku, Ulsan KOREA (680-845) (KR). JUNG, JangWon [KR/KR]; HangYang Koa Apt. 102-dong 402-ho, 196 Ok-Dong, Nam-Ku, Ulsan KOREA (680-845) (KR). DENO, Takashi [JP/JP]; 7-3, 1-chome, Najiominamidai, Nishinomiya-shi, Hyogo 669-1132 (JP). OHWA, Masaki [JP/JP]; 1-1-4, Kotoku-cho, Nada-ku, Kobe-shi, Hyogo 657-0025 (JP).

Published:
— without international search report and to be republished upon receipt of that report



WO 2008/095801 A2

(54) Title: BLUE PHTHALOCYANINE PIGMENT COMPOSITION AND ITS PREPARATION

(57) Abstract: The invention pertains to pigment compositions comprising from 70 to 93%, preferably from 81 to 93%, of ecopper phthalocyanine, from to 18% of an aminomethyl-substituted phthalocyanine, from 2 to 15% of an ammonium sulfonato phthalocyanine and less than 2% of other phthalocyanine compounds, preferably 5 made by wet-milling a mixture of ecopper phthalocyanine and ecopper phthalocyanine together with the aminomethyl-substituted phthalocyanine and a milling aid in an organic liquid and adding the ammonium sulfonato phthalocyanine before the milling aid and the organic liquid are separated from the wet-milled mixture.

Blue phthalocyanine pigment composition and its preparation

The invention pertains to the field of colour filters. Normally, trichromatism is achieved by using each a blue, red and green filter. These filters must be highly transparent, homogeneous and have a very uniform layer thickness.

- 5 The correct position and the absolute value of the transmission window are very important parameters for colour filters. There is a desire for high transmission in the wavelength range surrounding the light emission, coupled with as high as possible an absorption for different-coloured light. In addition, there is a strongly increasing demand for a higher display contrast (ratio of luminances in the ON/OFF states).
- 10 Though there have been many proposals to improve the properties of ϵ copper phthalocyanine (C. I. Pigment Blue 15:6), the desired properties have not yet been obtained and the still increasing requirements are not fully satisfied.

EP-A-1 489 143 discloses pigment compositions comprising copper phthalocyanine and at least one compound selected from the group consisting of aminomethyl-

15 substituted phthalocyanines, phthalimidomethyl phthalocyanines and ammonium salts of sulfonated phthalocyanines. However, the β crystal form (C. I. Pigment Blue 15:4) is not suitable for colour filters due to its greenish blue hue.

JP-A-H01 / 152 141 discloses blends comprising ϵ copper phthalocyanine, phthalimidomethyl copper phthalocyanine and sulfonated copper phthalocyanine or an

20 alkali metal salt thereof. The purpose is to avoid mechanical pulverisation of the pigment for use in thermoplastic resins. However, the transparency is insufficient for use in colour filters.

EP-A-1 130 065 discloses pigment compositions comprising ϵ copper phthalocyanine and azo or other polycyclic pigments. Phthalocyanine derivatives may

25 optionally be added, for example amongst many others phthalocyanines with phthalimidomethyl and /or sulfonic groups or salts thereof. In comparative example 1 of EP-A-1 130 065, α copper phthalocyanine is salt-kneaded together with

phthalimidomethyl copper phthalocyanine and a small amount of ϵ copper phthalocyanine, leading to a product which is coloristically inferior according to comparative example 2 of EP-A-1 130 065.

JP-A-2000/258 620 discloses a process wherein acid-pasted pure α copper phthalocyanine is salt-kneaded together with a crystal stabilizer selected from phthalocyanine derivatives such as for example copper phthalocyanine having phthalimidomethyl or ammonium sulfo groups. The importance of the product not to contain more than 3% of non-phthalocyanine impurities is emphasized. However, there is no quantitative conversion to the ϵ crystal phase, and the hue, contrast as well as thermal stability are not fully satisfactory. JP-A-2000/258 620 fails to disclose the use of ϵ copper phthalocyanine as a further starting material.

JP-A-2005/234 009 uses an entirely different approach, starting from a modified ϵ copper phthalocyanine stabilized with a copper phthalocyanine sulfonamide, which is salt-kneaded with phthalimidomethyl copper phthalocyanine then removing the organic solvent and the inorganic salt and subsequently performing surface treatment with a sulfonated copper phthalocyanine or its salt. Potassium, sodium, calcium, strontium, aluminum, ammonium and lower alkyl ammonium cations are disclosed. These compositions, however, consist of aggregates of excessively small, fragile primary particles. Thus, it is difficult to obtain reproducible coloristic properties.

EP-A-0 808 878 discloses a process for producing β copper phthalocyanine pigment compositions for printing inks by dry-milling together with a resin in the absence of oxygen.


Surprisingly, a new, simple way was now found, which leads to blue pigment compositions better fulfilling the requirements of the colour filter industry.

The properties of reddish-blue colour filters are enhanced to an amazing degree by using pigment compositions comprising from 70 to 93%, preferably from 81 to 93%, of ϵ copper phthalocyanine, from 5 to 18% of an aminomethyl-substituted


phthalocyanine, from 2 to 15% of an ammonium sulfonato phthalocyanine and less than 2% of other phthalocyanine compounds, preferably made by wet-milling a mixture of α copper phthalocyanine and ϵ copper phthalocyanine together with the aminomethyl-substituted phthalocyanine and a milling aid in an organic liquid and
 5 adding the ammonium sulfonato phthalocyanine before the milling aid and the organic liquid are separated from the wet-milled mixture.


Thus, the invention relates to a process for the preparation of a pigment composition, comprising the steps of:

- wet-milling a mixture of α copper phthalocyanine and ϵ copper phthalocyanine
 10 together with an aminomethyl-substituted phthalocyanine of formula (I), or a mixture thereof, and a milling aid in an organic liquid;

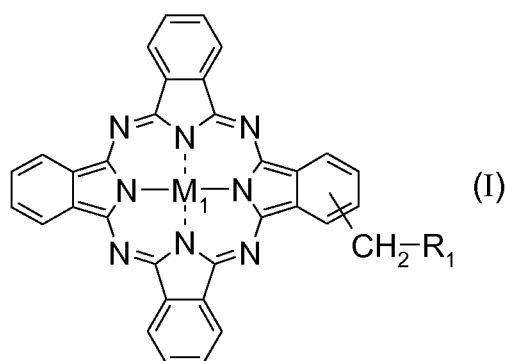

- wherein M_1 is 2 H, Al(Cl), Al(OH), Bi(OH), Ca, Cd, Ce(Cl), Cr(OH), Co, Cu, Mn, Fe, Fe(Cl), Fe(OH), In(Cl), Mg, Mn(O), Ni, Os, Pb, Pd, Pt, Re, Rh, Rh(O), Ru,
 15 Si(Cl)₂, Si(OC₁-C₅alkyl)₂, Si(OH)₂, Sn, Sr, Ti(O), V(O), Zn, Zr(O) or Zr(OH)₂, preferably 2 H, Co, Cu or Ni, most preferred Cu;

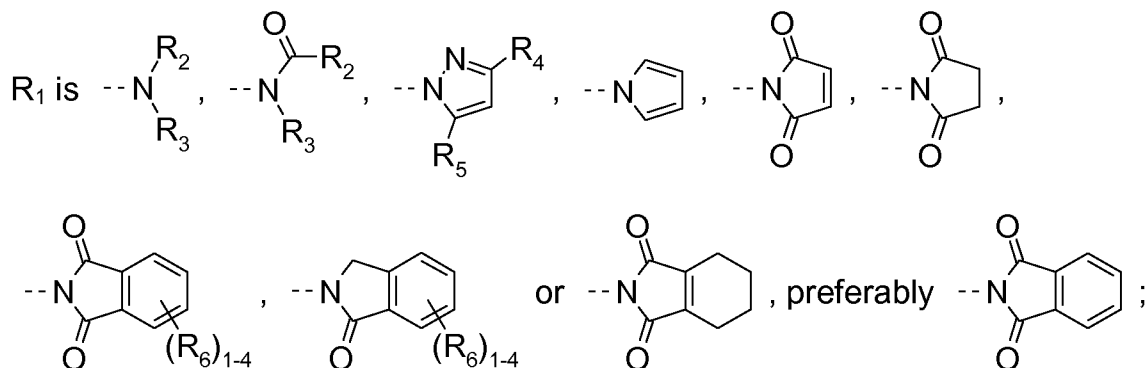

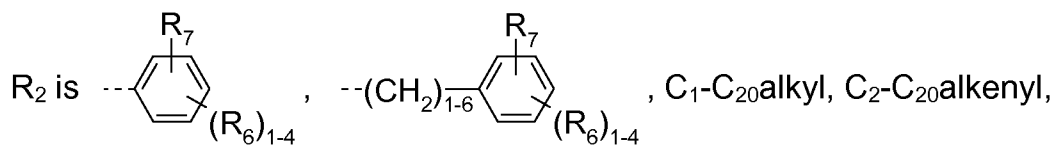

[C₂-C₆alkylen-O-]₁₋₃H, [C₂-C₆alkylen-O-]₁₋₃C₁-C₈alkyl, [C₂-C₆alkylen-NH-]₁₋₃-C₁-C₈alkyl or [C₂-C₆alkylen-N(C₁-C₄alkyl)-]₁₋₃C₁-C₈alkyl;


5 R₃ is H, C₁-C₂₀alkyl, C₂-C₂₀alkenyl, [C₂-C₆alkylen-O-]₁₋₃H, [C₂-C₆alkylen-O-]₁₋₃-C₁-C₈alkyl or [C₂-C₆alkylen-N(C₁-C₄alkyl)-]₁₋₃C₁-C₈alkyl;

R₄ and R₅ are independently from one another H or C₁-C₆alkyl, preferably both H or both methyl;

each R₆ is independently from all others H, C₁-C₈alkyl, Cl or NO₂; and

R₇ is H, COOH, CONH₂, CONHC₁-C₈alkyl or CON(C₁-C₈alkyl)₂;

- 10 • adding an ammonium sulfonato phthalocyanine of formula (II), or a mixture thereof, before the milling aid and the organic liquid are separated from the wet-milled mixture;

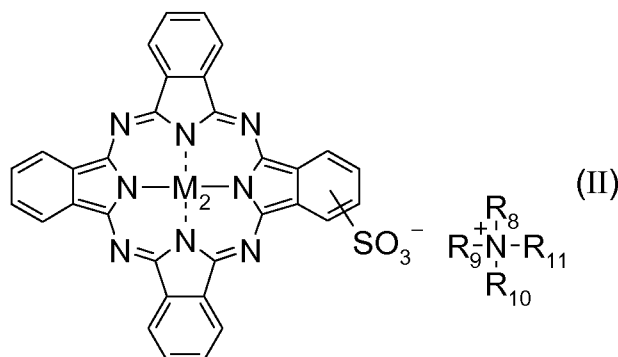

15 wherein M₂ is 2 H, Al(Cl), Al(OH), Bi(OH), Ca, Cd, Ce(Cl), Cr(OH), Co, Cu, Mn, Fe, Fe(Cl), Fe(OH), In(Cl), Mg, Mn(O), Ni, Os, Pb, Pd, Pt, Re, Rh, Rh(O), Ru, Si(Cl)₂, Si(OC₁-C₅alkyl)₂, Si(OH)₂, Sn, Sr, Ti(O), V(O), Zn, Zr(O) or Zr(OH)₂, preferably 2 H, Co, Cu or Ni, most preferred Cu;

R₈ and R₉ are each independently of one another H or C₁-C₄alkyl, preferably H or methyl, particularly preferred H;

20 R₁₀ is H, phenyl, benzyl, 2-phenylethyl, naphthyl, C₁-C₂₀alkyl, C₈-C₂₀alkenyl, [C₂-C₆alkylen-O-]₁₋₆H, [C₂-C₆alkylen-O-]₁₋₆C₁-C₈alkyl, [C₂-C₆alkylen-NH-]₁₋₆-C₁-C₈alkyl or [C₂-C₆alkylen-N(C₁-C₄alkyl)-]₁₋₆C₁-C₈alkyl, preferably H; and

R₁₁ is C₈-C₂₀alkyl, C₈-C₂₀alkenyl, [C₂-C₆alkylen-O-]₃₋₆H, [C₂-C₆alkylen-O-]₃₋₆-C₁-C₈alkyl, [C₂-C₆alkylen-NH-]₃₋₆C₁-C₈alkyl or [C₂-C₆alkylen-N(C₁-C₄alkyl)-]₃₋₆-C₁-C₈alkyl, preferably C₈-C₂₀alkyl or C₈-C₂₀alkenyl, most preferred C₁₀-C₁₈alkyl; with the proviso that the total number of carbon atoms in R₈, R₉, R₁₀ and R₁₁ is from 8 to 30;

- separating the milling aid and the organic liquid from the wet-milled mixture after addition of the ammonium salt of formula (II); and
- isolating the pigment composition;

wherein the thus isolated pigment composition comprises, by weight based on the total content of components having a phthalocyanine core,

- from 70 to 93%, preferably from 81 to 93%, especially from 81 to 91%, of ε copper phthalocyanine;
- from 5 to 18%, especially from 6 to 15%, most preferred from 6 to 12%, of the aminomethyl-substituted phthalocyanine of formula (I) or mixture thereof;
- from 2 to 15%, especially from 3 to 12%, most preferred from 3 to 9%, of the ammonium sulfonato phthalocyanine of formula (II) or mixture thereof; and
- from 0 to 2%, preferably from 0 to 1%, of other phthalocyanine compounds.

C₃-C₂₀Alkyl and C₃-C₂₀alkenyl are linear, branched or cyclic.

C₁-C₂₀Alkyl is, for example, methyl, ethyl, n-propyl, isopropyl, n-butyl, sec-butyl, isobutyl, tert-butyl, 2-methyl-butyl, n-pentyl, 2-pentyl, 3-pentyl, 2,2-dimethylpropyl, n-hexyl, heptyl, n-octyl, 1,1,3,3-tetramethylbutyl, 2-ethylhexyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, eicosyl, cyclopropyl, cyclopropyl-methyl, cyclobutyl, cyclopentyl, cyclohexyl, cyclohexyl-methyl, trimethylcyclohexyl, thujyl, norbornyl, bornyl, norcaryl, caryl, menthyl, norpinyl, pinyl, 1-adamantyl, 2-adamantyl, 5α-gonyl, 5ξ-pregnyl, (+) 1,3,3-trimethylbicyclo[2.2.1]heptyl (fenchyl) or, where applicable, the optical antipodes thereof.

C₂-C₂₀Alkenyl is, for example, vinyl, allyl, 2-propen-2-yl, 2-buten-1-yl, 3-buten-1-yl, 1,3-butadien-2-yl, 2-penten-1-yl, 3-penten-2-yl, 2-methyl-1-buten-3-yl, 2-methyl-3-buten-2-yl, 3-methyl-2-buten-1-yl, 1,4-pentadien-3-yl, or any desired isomer of hexenyl, octenyl, nonenyl, decenyl, dodecenyl, tetradecenyl, hexadecenyl, 5 octadecenyl, eicosenyl, heneicosenyl, docosenyl, tetracosenyl, hexadienyl, octadienyl, nonadienyl, decadienyl, dodecadienyl, tetradecadienyl, hexadecadienyl, octadecadienyl, eicosadienyl, 2-cyclobuten-1-yl, 2-cyclopenten-1-yl, 2-cyclohexen-1-yl, 3-cyclohexen-1-yl, 2,4-cyclohexadien-1-yl, 1-*p*-menthen-8-yl, 4(10)-thujen-10-yl, 2-norbornen-1-yl, 2,5-norbornadien-1-yl, 7,7-dimethyl-2,4-norcaradien-3-yl or 10 camphenyl.

Preferably, the composition obtainable according to the invention comprises from 6 to 20% by weight, most preferably from 9 to 16% by weight, based on the total content of components having a phthalocyanine core, of the aminomethyl-substituted phthalocyanine of formula (I) or mixture thereof plus the ammonium 15 sulfonato phthalocyanine of formula (II) or mixture thereof, and the molar ratio of the aminomethyl-substituted phthalocyanine of formula (I) or mixture thereof to the ammonium sulfonato phthalocyanine of formula (II) or mixture thereof is from 1 : 1 to 5 : 1. The ratio of α copper phthalocyanine to ϵ copper phthalocyanine at the beginning of wet-milling is generally from 1 : 99 to 99 : 1, preferably from 1 : 4 to 20 20 : 1, most preferred from 1 : 1 to 10 : 1.

There is a synergism between all these components. If the quantities of ϵ copper phthalocyanine or aminomethyl-substituted phthalocyanine of formula (I) are too low, there will be insufficient conversion into the desired ϵ crystal form. If the ammonium sulfonato phthalocyanine of formula (II) is added too late or its quantity 25 is too low, the pigment composition has poor rheology, dispersibility and contrast ratio. If the quantity of aminomethyl-substituted phthalocyanine of formula (I) is too high, the conversion rate to the ϵ -form is low and the viscosity and storage stability become poor. If the quantity of ammonium sulfonato phthalocyanine of formula (II) is too high, the contrast ratio and chroma become poor.

Too much further phthalocyanine components, such as especially phthalocyanine amides and sulfonamides, lead to poorer crystallinity of the ϵ crystal phase and aggregation of the primary particles.

5 The wet-milling step can be performed either in an usual milling apparatus, such as for example an agitated media pearl mill (e.g. attritor), or in a kneader. The milling aid can be either an insoluble inert solid material, or a crystalline organic compound or inorganic salt.

It is generally preferable to use insoluble inert solid materials in an usual milling apparatus and crystalline organic compound or inorganic salts in kneaders.

10 As insoluble inert solid materials there are used, for example in an agitated media pearl mill, grinding elements such as balls of from 0.1 to 1 mm in diameter made from zirconium oxide, mixed zirconium oxide, aluminium oxide, quartz or a metal such as steel, preferably mixed zirconium oxide balls having a diameter of from 0.2 to 0.3 mm.

15 The agitated media pearl mill is a known apparatus, it being possible to control the specific power density. Though it is possible to reach very high speeds and power specific densities, it is preferable to limit the specific power density to at most $2.0 \text{ kJ}\cdot\text{s}^{-1}$ per litre of grinding space to avoid too high a heat of friction to develop. The peripheral speed of the agitator should then preferably be from 5 to $12 \text{ m}\cdot\text{s}^{-1}$.

20 The viscosity plays a rather subordinate role. It is necessary, however, to select a viscosity range that is suitable for the apparatus used, for example from $5\cdot 10^{-2} \text{ Pa}\cdot\text{s}$ to $5 \text{ Pa}\cdot\text{s}$, preferably from $10^{-1} \text{ Pa}\cdot\text{s}$ to $5\cdot 10^{-1} \text{ Pa}\cdot\text{s}$ (at 500 s^{-1}). The temperature is advantageously in the range between the freezing point and the boiling point of the organic liquid, preferably from 20 to 180°C , especially from 50 to 130°C . The
25 treatment period in the agitated media pearl mill is usually from 20 to 300 minutes (including dwell time in the storage vessel between individual passes), a longer treatment period having generally no significant effect on the properties of the product. As a result, the risk of overmilling can advantageously be excluded.

Preferably, however, the wet-milling step of the invention is performed in a kneader, using as milling aid a crystalline organic compound or inorganic salt. Judiciously, the crystalline organic compound or inorganic salt is poorly soluble in the organic liquid, for example to an extent ≤ 100 mg/l at 20°C, preferably ≤ 10 mg/l at 20°C, and with particular preference is virtually insoluble at 20°C.

On the other hand, the crystalline organic compound or inorganic salt and also the organic liquid are preferably each soluble to the extent of at least 10 g / 100 ml in water. Suitable crystalline organic compounds are for example urea, sugars such as glucose, and salts of organic acids such as sodium formate or sodium acetate. Preferably, inorganic salts are used such as for example aluminium sulfate, calcium chloride, potassium chloride, sodium carbonate, sodium bicarbonate, sodium chloride or sodium sulfate, where applicable with or without water of crystallization, particular preference being given to sodium sulfate, potassium chloride or sodium chloride.

For kneading, it is preferred to use a milling aid (especially an inorganic salt) having an average particle size of from 5 to 200 μm , with particular preference a milling aid having an average particle size from 10 to 50 μm .

Particular preference is given to using as the organic liquid for wet-milling an alcohol (including polyalcohols such as glycerol, glycols and polyglycols), an ether (such as C_1 - C_8 alkyl ethers of polyetheralcohols), a ketone, an ester, an amide, a sulfone, a sulfoxide, a nitro compound or a mono-, bis- or tris-hydroxy- C_2 - C_{12} alkane compound which is substituted by one or two oxo groups and may be esterified with C_1 - C_8 alkylcarbonyl or etherified with C_1 - C_8 alkyl on one or more hydroxyl groups, or a mixture thereof.

Preferably, the organic liquid is neutral per se, although acidic or basic impurities in customary small amounts are not disruptive. Illustrative examples of organic liquids, which, however, in no way restrict the invention, are ethylene glycol, propylene glycol, diethylene glycol, dipropylene glycol, triethylene glycol, tripropylene glycol, tetraethylene glycol, tetrapropylene glycol, polyethylene glycol and polypropylene

glycol, including mono- and di-C₁-C₄alkylethers thereof (for example monomethyl, monoethyl, dimethyl or diethyl ethers), dimethylformamide, dimethylacetamide, N-methylpyrrolidone, ethyl methyl ketone, cyclohexanone, diacetone alcohol, butyl acetate, n-propylalcohol, isopropylalcohol, n-butylalcohol, isobutylalcohol, triacetin, nitromethane, dimethyl sulfoxide and sulfolane. The organic liquids may optionally be halogenated, for example through Cl or F, such as 2,2,3,3-tetrafluoro-1-propanol or 2,2,2-trifluoroethanol.

With preference, the temperature during kneading is from 10 to 180°C, especially from 20 to 150°C, most preferably from 60 to 130°C. The rotary speed should be set, taking into account the cooling where appropriate, in such a way that the kneaded mass is moved homogeneously under uniform shear and the temperature does not exceed the temperature range of the invention. Instances of local overheating or excessive mechanical stress should as far as possible be avoided. The kneading time is generally from 1 to 200 hIn the course of kneading, preferably the ratio of organic liquid to crystalline organic compound or inorganic salt is from 3 ml : 7 g to 1 ml : 6 g, the ratio of organic liquid to the total weight of the crystalline organic compound or inorganic salt and components having a phthalocyanine core is from 1 ml : 2.5 g to 1 ml : 7.5 g, and the weight ratio of components having a phthalocyanine core to crystalline organic compound or inorganic salt is from 1 : 3 to 1 : 20, especially 1 : 4 to 1 : 10.

As the components having a phthalocyanine core are not soluble in the liquid used for wet-milling, their respective quantities in the composition do not change during the process of the invention, with the exception that upon wet-milling, the α copper phthalocyanine is converted into ϵ copper phthalocyanine, preferably to an extent of from 97 to 100%.

For the wet-milling step, it is preferable to use as starting materials acid-pasted α copper phthalocyanine and aminomethyl-substituted phthalocyanine of formula (I), as well as finely divided ϵ copper phthalocyanine. With particular preference, α copper phthalocyanine which has been acid-pasted together with the aminomethyl-

substituted phthalocyanine of formula (I) and ϵ copper phthalocyanine which has been wet-milled are used as starting materials. The ϵ copper phthalocyanine composition obtainable according to the invention can also be used as a starting material, or ϵ copper phthalocyanine can be wet-milled alone or with ammonium sulfonato phthalocyanine of formula (II). The most preferred wet-milling method for the ϵ copper phthalocyanine to be used as starting material is salt-kneading similarly to the process of the invention.

Adequately, the ammonium sulfonato phthalocyanine of formula (II) is added at any stage of wet-milling prior to isolation of the composition of the invention, for example before, during (that is, at any time from the start to the end of wet-milling) or after wet-milling. However, preferably from 1 to 100%, especially from 5 to 100%, with particular preference from 30 to 100% of the ammonium sulfonato phthalocyanine of formula (II) is added before the end of wet-milling, most preferred before or before the end phase (about last 2 hours) of wet-milling.

Instead of the pure monosulfonato phthalocyanine salt, it is also possible to use salts of partially sulfonated phthalocyanines having statistically from 0.5 to 1.5 sulfo groups on the phthalocyanine core. In this case, the quantity of sulfonato phthalocyanine ammonium has to be calculated to be molar equivalent to the theoretical amount of pure monosulfonato phthalocyanine salt, based on the amount of sulfonato groups.

After kneading, the milling aid and the organic liquid are removed from the composition of the invention, for example by filtration. It is preferred to wash out the crystalline organic compound or inorganic salt and the organic liquid with water, especially demineralized water, which water is preferably added in part before filtration for better dissolution. The water may optionally contain acid or bases, especially mineral acids or inorganic bases, preferably alkali metal hydroxides. Washing with further water, especially demineralized water, ensures a low conductivity. Drying of the moist presscake is conducted for example at from -20 to 150°C / 10^{-1} to 10^5 Pa.

The new composition is also an object of the invention. Hence, the invention also pertains to a pigment composition comprising, by weight based on the total content of components having a phthalocyanine core,

- 5 ▪ from 70 to 93%, preferably from 81 to 93%, especially from 81 to 91%, of ϵ copper phthalocyanine;
- from 5 to 18%, especially from 6 to 15%, most preferred from 6 to 12%, of the aminomethyl-substituted phthalocyanine of formula (I) or mixture thereof;
- from 2 to 15%, especially from 3 to 12%, most preferred from 3 to 9%, of the ammonium sulfonato phthalocyanine of formula (II) or mixture thereof; and
- 10 ▪ from 0 to 2%, preferably from 0 to 1%, of other phthalocyanine compounds.

The phthalocyanine pigment composition of the invention has preferably a specific surface area of from from 50 to 110 m²/g, more preferred from 80 to 110 m²/g, most preferred from 85 to 100 m²/g, as determined by the BET method. Due to the presence of phthalocyanine derivatives, the measured specific surface area of the composition is often much lower than that of the phthalocyanine pigment comprised

15 therein. The average particle size is preferably about from 20 to 60 nm, most preferred about from 30 to 50 nm, as determined on electron microscopy pictures.

The phthalocyanine pigment composition of the invention can be used for any known colouring purpose, for example as pigment for colour filters, printing inks,

20 toners, plastics and coatings.

High molecular weight organic materials to be pigmented with the phthalocyanine pigment composition of the invention are of natural or synthetic origin (for example polymers) and have usually a molecular weight usually in the range from 10³ to 10⁸ g/mol. They can be in the form of fibres, surface-coating compositions

25 (including special-effect finishes, including those for the automotive sector) and printing inks, or preferably also in so-called resists (for example for colour filters) or as toners. Such and further known uses of colourants will be so obvious to the person skilled in the art that it is possible to dispense with describing them here in

more detail. They are also disclosed in numerous patent specifications and technical works, for example "Industrielle Organische Pigmente" (W. Herbst + K. Hunger, VCH Weinheim / New York, new editions continually published in German and English).

- 5 The total amount of phthalocyanine pigment composition of the invention is adequately from 0.01 to 70% by weight, based on the total weight of colourants and high molecular weight organic material.

The phthalocyanine pigment composition of the invention can be used for making colour filters as the only colourant of the blue layer, as well as in combination with
10 customary other colourants (pigments or dyes) either in the same blue layer, or in different layers of the colour filter.

Pigments useful in combination with the phthalocyanine pigment composition of the invention are, for example, Colour Index Pigment Yellow 3, 12, 13, 14, 17, 24, 34, 42, 53, 62, 74, 83, 93, 95, 108, 109, 110, 111, 119, 123, 128, 129, 139, 147, 150,
15 164, 168, 173, 174, 184, 188, 191, 191:1, 191:2, 193, 199, Pigment Orange 5, 13, 16, 34, 40, 43, 48, 49, 51, 61, 64, 71, 73, Pigment Red 2, 4, 5, 23, 48:1, 48:2, 48:3, 48:4, 52:2, 53:1, 57, 57:1, 88, 89, 101, 104, 112, 122, 144, 146, 149, 166, 168, 177, 178, 179, 181, 184, 190, 192, 194, 202, 204, 206, 207, 209, 214, 216, 220, 221, 222, 224, 226, 254, 255, 262, 264, 270, 272, 282, 283, Pigment Brown 23, 24,
20 33, 42, 43, 44, Pigment Violet 1, 19, 23, 27, 29, 30, 31, 32, 37, 40, 42 or 50, Pigment Blue 15, 15:1, 15:2, 15:3, 15:4, 16, 28, 29, 60, 64, 66, Pigment Green 7, 17, 36, 37, 50, Pigment White 6, Pigment Black 7, 12, 27, 30, 31, 32, Vat Red 74, 3,6-di(3'-cyano-phenyl)-2,5-dihydro-pyrrolo[3,4-c]pyrrole-1,4-dione or 3-phenyl-6-(4'-tert-butyl-phenyl)-2,5-dihydro-pyrrolo[3,4-c]pyrrole-1,4-dione.

- 25 Especially useful in the same layer or an adjacent blue layer of colour filters are dioxazines (such as C. I. Pigment Violet 23), quinacridones (such as C. I. Pigment Violet 19), aminoanthraquinones (such as C. I. Pigment Red 144) or diketopyrrolo-pyrroles (such as C. I. Pigment Red 254).

Dyes useful in combination with the phthalocyanine pigment composition of the invention, particularly synergistically in the same layer of colour filters, are preferably the anthraquinone colourants disclosed in PCT/EP07/051 154.

5 The invention further pertains to a composition comprising from 0.1 to 70% by weight of the phthalocyanine pigment composition of the invention and a liquid medium comprising a binder or a polymerisable compound.

10 The invention finally pertains to a process for manufacturing a colour filter, wherein a composition comprising from 0.1 to 70% by weight of the phthalocyanine pigment composition of the invention and a liquid medium comprising a binder or a polymerisable compound is applied onto a transparent substrate optionally comprising patterned or not patterned layers thereon, and the composition is dried and/or cured to give a patterned or not patterned layer.

The drying, patterning and curing processes are well-known in the art, but are nevertheless described below in more detail for illustration purpose.

15 The invention in particular also pertains to the use of the phthalocyanine pigment compositions of the invention in colour filters, which can themselves be used for example in electro-optical systems such as TV screens, computer screens, portable telephone screens, navigation systems, CCD cameras, liquid crystal displays, flat panel displays, charge coupled devices, plasma displays and electro-
20 luminescent displays, or the like. These may be, for example, active (twisted nematic) or passive (supertwisted nematic) ferroelectric displays or light-emitting diodes.

25 The compositions according to the invention exhibit in particular an improved better rheology. The colour filters manufactured according to the invention exhibit outstanding hue, light stability, transparency and contrast, as well as in particular an improved contrast ratio, as compared with previous technology.

The phthalocyanine pigment composition of the invention will generally be used in

the manufacture of colour filters as a solution or dispersion in an organic solvent or water. There are several ways to manufacture these colour filters, which follow two mainstreams:

- Direct patterning during applying;
- 5 • Patterning after applying the colourant.

Direct patterning can be obtained by several printing techniques, such as impact (off-set, flexography, stamping, letterpress etc.) as well as non-impact (ink jet techniques).

Other direct patterning techniques are based on lamination processes, electronic
10 discharging processes like electro-deposition and some special colour proofing methods, like the so-called Chromalin™ process (DuPont).

For impact printing techniques, colourants may be dissolved or dispersed in water or organic solvents by standard deagglomeration methods (Skandex™, Dynamill™, Dispermat™ and the like) in the presence of a dispersant and a polymeric binder to
15 produce an ink. Any dispersion technique known in the field, including the choice of solvent, dispersant and binder, can be used. The type of ink and its viscosity depend on the application technique and are well-known to the skilled artisan. Most usual binders, to which the invention is of course not limited, are (meth)acrylates, epoxies, PVA, polyimids, Novolak systems and the like as well as combinations of
20 these polymers.

The ink dispersion then can be printed on all kind of standard printing machines. Curing of the binder system is preferably achieved by a heating process. The three colours can be applied at once or in different printing steps with intermediate drying and/or curing steps, for example one colour at a time in three printing steps.

25 Inks for use in ink jet, for example piezo or bubble jet, can be prepared likewise. They generally contain a colourant dissolved or dispersed in water and/or one or a mixture of many hydrophilic organic solvents in combination with a dispersant and a binder.

For ink jet printing, a standard ink jet printer can be used or a dedicated printer can be built in order to optimize for example the printing speed etc.

For lamination techniques, like thermal transfer and the like, a web system has to be made: the colourant is dispersed in a solvent or water with dispersant and binder and coated on a foil and dried. The colourant/binder system can be patternwise or uniformly transferred to a colour filter substrate with the help of energy (UV, IR, heat, pressure etc.). Depending on the technique used, the colourant for example may be transferred alone (dye diffusion or sublimation transfer), or the colourant dispersion may be entirely transferred including the binder (wax transfer).

For electrodeposition, the colourant has to be dispersed in water together with an ionized polymer. By means of an electrical current, the ionized polymer is deionized at the anode or the cathode and, being insoluble then, deposited together with the pigments. This can be done on patterned or patternwise shielded, by a photoresist, (transparent) photo-conductors like ITO etc.

The Chromalin™ process makes use of a photosensitive material, deposited on a colour filter substrate. The material becomes tacky upon UV exposure. The so called 'toner', comprising a mixture or compound of colourant and polymer, is distributed on the substrate and sticks on the tacky parts. This process has to be done three to four times for R, G, B and eventually black.

Patterning after applying is a method based mostly on the known photoresist technology, wherein the colourant is dispersed in the photoresist composition. Other methods are indirect patterning with the help of a separate photoresist or lamination techniques.

The colourant may be dissolved or dispersed into photoresists by any standard method such as described above for the printing processes. The binder systems may also be identical. Further suitable compositions are described for example in EP 0654 711, WO 98/45 756 or WO 98/45 757.

Photoresists comprise a photoinitiator and a poly-crosslinkable monomer (negative radical polymerization), a material to crosslink the polymers itself (for example a photoacid generator or the like) or a material to chemically change the solubility of the polymer in certain developing media. This process, however, can also be done
5 with heat (for example using thermal arrays or a NIR beam) instead of UV, in the case of some polymers which undergo chemical changes upon heating, resulting in changes of solubility in the mentioned developing media. A photoinitiator is then not needed.

The photosensitive or heat sensible material is coated on a colour filter substrate,
10 dried and UV (or heat) irradiated, sometimes again baked (photoacid generators) and developed with a developing medium (mostly a base). In this last step only the non-exposed (negative systems) or only the exposed (positive systems) parts are washed away, giving the wanted pattern. This operation has to be repeated for all the colours used.

15 Photosensitive lamination techniques are using the same principle, the only difference being the coating technique. A photosensitive system is applied as described above, however on a web instead of a colour filter substrate. The foil is placed on the colour filter substrate and the photosensitive layer is transferred with the help of heat and/or pressure.

20 Indirect processes, with the above mentioned polymeric binders without a photosensitive component, make use of an extra photoresist, coated on top of the pigmented resist. During the patterning of the photoresist, the coloured resist is patterned as well. The photoresist has to be removed afterwards.

More details about the manufacture of colour filters can be found in text books,
25 reviews and other scientific articles. The skilled artisan will associate the instant invention with the use of any such known technique as well.

For example, which is of course in no way limitative, substantially colourless methacrylic resin are commonly used in colour filters, examples thereof which are

known to the skilled artisan being copolymers of aromatic methacrylates with methacrylic acid of M_w from 30'000 to 60'000. Such resins are highly appropriated to make films by spin-coating.

5 The colour filters of the invention contain the phthalocyanine pigment composition of the invention judiciously in a concentration of from 1 to 75% by weight, preferably from 5 to 50% by weight, with particular preference from 25 to 40% by weight, based on the overall weight of the layer comprising said colourant.

10 The invention therefore likewise provides a colour filter comprising a transparent substrate and one layer or multiple layers thereon, at least one layer comprising from 1 to 75% by weight, preferably from 5 to 50% by weight, with particular preference from 25 to 40% by weight, based on the overall weight of the layer comprising said colourant, of a phthalocyanine pigment composition of the invention dispersed in a high molecular mass organic material. The substrate is preferably essentially colourless ($T \geq 95\%$ all over the visible range from 400 to 700
15 nm).

The instant printing inks or photoresists for making colour filters contain the phthalocyanine pigment composition of the invention judiciously in a concentration of from 0.01 to 40% by weight, preferably from 1 to 25% by weight, with particular preference from 5 to 10% by weight, based on the overall weight of the printing ink
20 or photoresist.

The invention therefore likewise provides a composition for making colour filters comprising from 0.01 to 40% by weight, preferably from 1 to 25% by weight, with particular preference from 5 to 10% by weight, based on the overall weight of the composition, of a phthalocyanine pigment composition of the invention dispersed
25 therein.

This colourant composition also may additionally contain other colourants of different structure. The additional components will shift the mixture's spectrum hypsochromically or bathochromically depending on their own hue. The skilled

artisan will appreciate by himself which colourants can additionally be used, and in which amounts, depending on the desired colour.

In certain cases, it is advantageous to use the inventive phthalocyanine pigment compositions in mixture or in combination with other additives such as wetting
5 agents, surfactants, defoamers, antioxidants, UV absorbers, light stabilizers, plasticizers, or general texture improving agents and so forth. Generally such additives can be used in a concentration from about 0.1 to 25 percent, preferably from about 0.2 to 15 % and most preferably from about 0.5 to 8 %, by weight based on the weight of the phthalocyanine pigment composition.

10 Further surfactants can be used to help dispersing the phthalocyanine pigment composition of the invention. Cationic, anionic, amphoteric, zwitterionic or neutral nonionic surfactants are very well known to the person skilled in the art. Suitable surfactants include for example anionic surfactants such as alkylbenzene- or
15 alkyl-naphthalene-sulfonates, alkylsulfosuccinates or naphthalene formaldehyde sulfonates; cationic surfactants including, for example, quaternary salts such as benzyl tributyl ammonium chloride; or nonionic or amphoteric surfactants such as polyoxyethylene surfactants and alkyl- or amidopropyl betaines, respectively. Most preferred surfactant, which leads to excellent colourant dispersions and especially highly transparent colour filters, is EFKA[®] 3440 (CIBA Specialty Chemicals Inc.).

20 Suitable texture improving agents are, for example, fatty acids such as stearic acid or behenic acid, and fatty amines such as laurylamine and stearylamine. In addition, fatty alcohols or ethoxylated fatty alcohols, polyols such as aliphatic 1,2-diols or epoxidized soy bean oil, waxes, resin acids and resin acid salts may be used for this purpose.

25 Suitable UV stabilizers are, for example, the known benzotriazole derivatives known under the trade name TINUVIN[®] or CIBA[®] Fast H Liquid an aryl sulfonated benzotriazol, both being products of CIBA Specialty Chemicals Inc.

The phthalocyanine pigment compositions of the invention will prove particularly

useful alone or in combination with fine or transparent pigments.

The materials used for manufacturing colour filters according to above-mentioned and other processes are well-known in the art.

For example, a binder may be used which is alkali-soluble, preferably a linear
5 organic polymer that is soluble in an organic solvent and developable with a weak
alkali aqueous solution. As such binder used in a colour filter resist composition,
which is soluble in an alkaline aqueous solution and insoluble in water, for example,
a homopolymer of a polymerizable compound having one or more acid groups and
one or more polymerizable unsaturated bonds in the molecule, or a copolymer of
10 two or more kinds thereof, and a copolymer of one or more polymerizable
compounds having one or more unsaturated bonds copolymerizable with these
compounds and containing no acid group, can be used. Such compounds can be
obtained by copolymerizing one or more kinds of a low molecular compound having
one or more acid groups and one or more polymerizable unsaturated bonds in the
15 molecule with one or more polymerizable compounds having one or more
unsaturated bonds copolymerizable with these compounds and containing no acid
group. Examples of acids groups are a -COOH group, a -SO₂NHCO- group, a
-SO₃H group, a phenolic hydroxy group, a -SO₂NH- group, and a -CO-NH-CO-
group. Among those, a high molecular compound having a -COOH group is
20 particularly preferred.

Preferably, the organic polymer binder in the colour filter resist composition
comprises an alkali soluble copolymer comprising, as addition polymerizable
monomer units, at least an unsaturated organic acid compound such as acrylic
acid, methacrylic acid and the like. It is preferred to use as a further co-monomer
25 for the polymer binder an unsaturated organic acid ester compound such as methyl
acrylate, ethyl (meth)acrylate, benzyl (meth)acrylate, styrene and the like to balan-
ce properties such as alkaline solubility, adhesion rigidity, chemical resistance etc.

The organic polymer binder can for example be either a random copolymer or a
block copolymer, such as described in US-5,368,976.

Polymerizable compounds suitable for the preparation of colour filters according to the invention, are also well-known in the art. They may for example have one or more acid group and one or more polymerizable unsaturated bond in the molecule.

5 Examples of the polymerizable compounds having one or more -COOH groups and one or more polymerizable unsaturated bonds in a molecule are (meth)acrylic acid, 2-carboxyethyl (meth)acrylic acid, 2-carboxypropyl (meth)acrylic acid, crotonic acid, cinnamic acid, mono[2-(meth)acryloyloxyethyl] succinate, mono[2-(meth)acryloyloxyethyl] adipate, mono[2-(meth)acryloyloxyethyl] phthalate, mono[2-(meth)acryloyloxyethyl] hexahydrophthalate, mono[2-(meth)acryloyloxyethyl] maleate, mono-
10 [2-(meth)acryloyloxypropyl] succinate, mono[2-(meth)acryloyloxypropyl] adipate, mono[2-(meth)acryloyloxypropyl] phthalate, mono[2-(meth)acryloyloxypropyl] hexahydrophthalate, mono[2-(meth)acryloyloxypropyl] maleate, mono[2-(meth)acryloyloxybutyl] succinate, mono[2-(meth)acryloyloxybutyl] adipate, mono-
15 [2-(meth)acryloyloxybutyl] phthalate, mono[2-(meth)acryloyloxybutyl] hexahydrophthalate, mono[2-(meth)acryloyloxybutyl] maleate, 3-(alkylcarbamoyl)acrylic acid, α -chloroacrylic acid, maleic acid, monoesterified maleic acid, fumaric acid, itaconic acid, citraconic acid, mesaconic acid, maleic anhydride, and ω -carboxypolycaprolactone mono(meth)acrylate.

20 Vinylbenzenesulfonic acid and 2-(meth)acrylamide-2-methylpropanesulfonic acid are examples of the polymerizable compounds having one or more -SO₃H groups and one or more polymerizable unsaturated bonds.

N-methylsulfonyl (meth)acrylamide, N-ethylsulfonyl (meth)acrylamide, N-phenylsulfonyl (meth)acrylamide, and N-(p-methylphenylsulfonyl) (meth)acrylamide are examples of the polymerizable compounds having one or more -SO₂NHCO- groups
25 and one or more polymerizable unsaturated bonds.

Examples of polymerizable compounds having one or more phenolic hydroxy groups and one or more polymerizable unsaturated bonds in a molecule include hydroxyphenyl (meth)acrylamide, dihydroxyphenyl (meth)acrylamide, hydroxyphenyl-carbonyloxyethyl (meth)acrylate, hydroxyphenyloxyethyl (meth)acrylate,

hydroxyphenylthioethyl (meth)acrylate, dihydroxyphenylcarbonyloxyethyl (meth)acrylate, dihydroxyphenyloxyethyl (meth)acrylate, and dihydroxy-phenylthioethyl (meth)acrylate.

5 Examples of the polymerizable compound having one or more $-\text{SO}_2\text{NH}-$ groups and one or more polymerizable unsaturated bonds in the molecule include compounds represented by formula (a) or (b):



10 wherein Y_1 and Y_2 each represents $-\text{COO}-$, $-\text{CONA}_7-$, or a single bond; A_1 and A_4 each represents H or CH_3 ; A_2 and A_5 each represents C_1 - C_{12} alkylene optionally having a substituent, cycloalkylene, arylene, or aralkylene, or C_2 - C_{12} alkylene into which an ether group and a thioether group are inserted, cycloalkylene, arylene, or aralkylene; A_3 and A_6 each represents H, C_1 - C_{12} alkyl optionally having a substituent, a cycloalkyl group, an aryl group, or an aralkyl group; and A_7 represents H, C_1 - C_{12} alkyl optionally having a substituent, a cycloalkyl group, an aryl group, or an aralkyl group.

The polymerizable compounds having one or more $-\text{CO}-\text{NH}-\text{CO}-$ group and one or more polymerizable unsaturated bond include maleimide and N-acryloyl-acrylamide. These polymerizable compounds become the high molecular compounds comprising a $-\text{CO}-\text{NH}-\text{CO}-$ group, in which a ring is formed together with a primary chain by polymerization. Further, a methacrylic acid derivative and an acrylic acid derivative each having a $-\text{CO}-\text{NH}-\text{CO}-$ group can be used as well. Such methacrylic acid derivatives and the acrylic acid derivatives include, for example, a methacrylamide derivative such as N-acetylmethacrylamide, N-propionylmethacrylamide, N-butanoylmethacrylamide, N-pentanoylmethacrylamide, N-decanoylmethacrylamide, N-dodecanoylmethacrylamide, N-benzoylmethacrylamide, N-(p-methylbenzoyl)methacrylamide, N-(p-chlorobenzoyl)methacrylamide, N-(naphthyl-carbonyl)methacrylamide, N-(phenylacetyl)methacrylamide, and 4-methacryloylamino-phthalimide, and an acrylamide derivative having the same substituent as these. These polymerizable compounds polymerize to be compounds having a

-CO-NH-CO- group in a side chain.

Examples of polymerizable compounds having one or more polymerizable unsaturated bond and containing no acid group include a compound having a polymerizable unsaturated bond, selected from esters of (meth)acrylic acid, such as methyl (meth)acrylate, ethyl (meth)acrylate, propyl (meth)acrylate, butyl (meth)acrylate, tetrahydrofurfuryl (meth)acrylate, benzyl (meth)acrylate, 2-ethylhexyl (meth)acrylate, hydroxyethyl (meth)acrylate, hydroxypropyl (meth)acrylate, hydroxybutyl (meth)acrylate, glycerol mono(meth)acrylate, dihydroxypropyl (meth)acrylate, allyl (meth)acrylate, cyclohexyl (meth)acrylate, phenyl (meth)acrylate, methoxyphenyl (meth)acrylate, methoxyethyl (meth)acrylate, phenoxyethyl (meth)acrylate, methoxydiethyleneglycol (meth)acrylate, methoxytriethyleneglycol (meth)acrylate, methoxypropyl (meth)acrylate, methoxydipropylenglycol (meth)acrylate, isobornyl meth(acrylate), dicyclopentadienyl (meth)acrylate, 2-hydroxy-3-phenoxypropyl (meth)acrylate, tricyclo[5.2.1.0^{2,6}]decan-8-yl (meth)acrylate, aminoethyl (meth)acrylate, N, N-dimethylaminoethyl (meth)acrylate, aminopropyl (meth)acrylate, N, N-dimethylaminopropyl (meth)acrylate, glycidyl (meth)acrylate, 2-methylglycidyl (meth)acrylate, 3,4-epoxybutyl (meth)acrylate, 6,7-epoxyheptyl (meth)acrylate; vinyl aromatic compounds, such as styrene, α -methylstyrene, vinyltoluene, p-chlorostyrene, polychlorostyrene, fluorostyrene, bromostyrene, ethoxymethyl styrene, methoxystyrene, 4-methoxy-3-methylstyrene, dimethoxystyrene, vinylbenzyl methyl ether, vinylbenzyl glycidyl ether, indene, 1-methylindene; vinyl or allyl esters, such as vinyl acetate, vinyl propionate, vinyl butylate, vinyl pivalate, vinyl benzoate, vinyl trimethylacetate, vinyl diethylacetate, vinyl borate, vinyl caproate, vinyl chloroacetate, vinyl dichloroacetate, vinyl methoxyacetate, vinyl butoxyacetate, vinyl phenylacetate, vinyl acetate, vinyl acetoacetate, vinyl lactate, vinyl phenylbutylate, vinyl cyclohexylcarboxylate, vinyl salicylate, vinyl chlorobenzoate, vinyl tetrachlorobenzoate, vinyl naphthoate, allyl acetate, allyl propionate, allyl butylate, allyl pivalate, allyl benzoate, allyl caproate, allyl stearate, allyl acetoacetate, allyl lactate; vinyl or allyl ethers, such as vinyl methyl ether, vinyl ethyl ether, vinyl hexyl ether, vinyl octyl ether, vinyl ethylhexyl ether, vinyl methoxyethyl ether, vinyl ethoxyethyl ether, vinyl chloroethyl ether, vinyl hydroxyethyl ether,

vinyl ethylbutyl ether, vinyl hydroxyethoxyethyl ether, vinyl dimethylaminoethyl ether, vinyl diethylaminoethyl ether, vinyl butylaminoethyl ether, vinyl benzyl ether, vinyl tetrahydrofurfuryl ether, vinyl phenyl ether, vinyl tolyl ether, vinyl chlorophenyl ether, vinyl chloroethyl ether, vinyl dichlorophenyl ether, vinyl naphthyl ether, vinyl anthryl ether, allyl glycidyl ether; amide type unsaturated compounds, such as (meth)acrylamide, N, N-dimethyl (meth)acrylamide, N, N-diethyl (meth)acrylamide, N, N-dibutyl (meth)acrylamide, N, N-diethylhexyl (meth)acrylamide, N, N-dicyclohexyl (meth)acrylamide, N, N-diphenyl (meth)acrylamide, N-methyl-N-phenyl (meth)acrylamide, N-hydroxyethyl-N-methyl (meth)acrylamide, N-methyl (meth)acrylamide, N-ethyl (meth)acrylamide, N-propyl (meth)acrylamide, N-butyl (meth)acrylamide, N-hydroxyethyl (meth)acrylamide, N-heptyl (meth)acrylamide, N-octyl (meth)acrylamide, N-ethylhexyl (meth)acrylamide, N-hydroxyethyl (meth)acrylamidecyclohexyl, N-benzyl (meth)acrylamide, N-phenyl (meth)acrylamide, N-tolyl (meth)acrylamide, N-hydroxyphenyl (meth)acrylamide, N-naphthyl (meth)acrylamide, N-phenylsulfonyl (meth)acrylamide, N-methylphenylsulfonyl (meth)acrylamide and N-(meth)acryloylmorpholine, diacetone acrylamide, N-methylol acrylamide, N-butoxyacrylamide; polyolefin type compounds, such as butadiene, isoprene, chloroprene and the like; (meth)acrylonitrile, methyl isopropenyl ketone, maleimide, N-phenylmaleimide, N-methylphenylmaleimide, N-methoxyphenylmaleimide, N-cyclohexylmaleimide, N-alkylmaleimide, maleic anhydride, polystyrene macromonomer, polymethyl (meth)acrylate macromonomer, polybutyl (meth)acrylate macromonomer; crotonates, such as butyl crotonate, hexyl crotonate, glycerine monocrotonate; and itaconates, such as dimethyl itaconate, diethyl itaconate, dibutyl itaconate; and maleates or fumarates, such as dimethyl maleate, dibutyl fumarate.

Preferable examples of copolymers are copolymers of methyl (meth)acrylate and (meth)acrylic acid, copolymers of benzyl (meth)acrylate and (meth)acrylic acid, copolymers of methyl (meth)acrylate/, ethyl (meth)acrylate and (meth)acrylic acid, copolymers of benzyl (meth)acrylate, (meth)acrylic acid and styrene, copolymers of benzyl (meth)acrylate, (meth)acrylic acid and 2-hydroxyethyl (meth)acrylate, copolymers of methyl (meth)acrylate/, butyl (meth)acrylate, (meth)acrylic acid and

styrene, copolymers of methyl (meth)acrylate, benzyl (meth)acrylate, (metha)crylic acid and hydroxyphenyl (meth)acrylate, copolymers of methyl (meth)acrylate, (metha)crylic acid and polymethyl (meth)acrylate macromonomer, copolymers of benzyl (meth)acrylate, (metha)crylic acid and polymethyl (meth)acrylate

5 macromonomer, copolymers of tetrahydrofurfuryl (meth)acrylate, styrene and (meth)acrylic acid, copolymers of methyl (meth)acrylate, (meth)acrylic acid and polystyrene macromonomer, copolymers of benzyl (meth)acrylate, (meth)acrylic acid and polystyrene macromonomer, copolymers of benzyl (meth)acrylate, (meth)acrylic acid, 2-hydroxyethyl (meth)acrylate and polystyrene macromonomer,

10 copolymers of benzyl (meth)acrylate, (meth)acrylic acid, 2-hydroxypropyl (meth)acrylate and polystyrene macromonomer, copolymers of benzyl (meth)acrylate, (meth)acrylic acid, 2-hydroxy-3-phenoxypropyl (meth)acrylate and polymethyl (meth)acrylate macromonomer, copolymers of methyl (meth)acrylate, (meth)acrylic acid, 2-hydroxyethyl (meth)acrylate and polystyrene macromonomer, copolymers of

15 benzyl (meth)acrylate, (metha)crylic acid, 2-hydroxyethyl (meth)acrylate and polymethyl (meth)acrylate macromonomer, copolymers of N-phenylmaleimide, benzyl (meth)acrylate, (metha)crylic acid and styrene, copolymers of benzyl (meth)acrylate, (meth)acrylic acid, N-phenylmaleimide, mono-[2-(meth)acryloyloxyethyl] succinate and styrene, copolymers of allyl (meth)acrylate, (meth)acrylic acid,

20 N-phenylmaleimide, mono-[2-(meth)acryloyloxyethyl] succinate and styrene, copolymers of benzyl (meth)acrylate, (meth)acrylic acid, N-phenylmaleimide, glycerol mono(meth)acrylate and styrene, copolymers of benzyl (meth)acrylate, ω -carboxypolycaprolactone mono(meth)acrylate, (meth)acrylic acid, N-phenylmaleimide, glycerol mono(meth)acrylate and styrene, and copolymers of benzyl (meth)acrylate,

25 (meth)acrylic acid, N-cyclohexylmaleimide and styrene.

There can be used as well hydroxystyrene homo- or co-polymers or a novolak type phenol resin, for example, poly(hydroxystyrene) and poly(hydroxystyrene-co-vinylcyclohexanol), a novolak resin, a cresol novolak resin, and a halogenated phenol novolak resin. More specifically, it includes, for example, the methacrylic acid copolymers, the acrylic acid copolymers, the itaconic acid copolymers, the crotonic acid copolymers, the maleic anhydride co-polymers, for example, with

30

styrene as a co-monomer, and maleic acid copolymers, and partially esterified maleic acid copolymers each described in, for example, JP-B-S59/44 615, JP-B-S54/34 327, JP-B-S58/12 577, JP-B-S54/25 957, JP-A-S59/53 836, JP-A-S59/71 048, JP-A-S60/159 743, JP-A-S60/258 539, JP-A-H01/152 449, 5 JP-A-H02/199 403 and JP-A-H02/199 404, and which copolymers can be further reacted with an amine, as e.g. disclosed in US-5,650,263; further, a cellulose derivative having a carboxyl group on a side chain can be used, and particularly preferred are copolymers of benzyl (meth)acrylate and (meth)acrylic acid and copolymers of benzyl (meth)acrylate, (meth)acrylic acid and other monomers, for 10 example as described in US-4,139,391, JP-B-S59/44 615, JP-A-S60/159 743 and JP-A-S60/258 539.

With respect to those having carboxylic acid groups among the above organic binder polymers, it is possible to react some or all of the carboxylic acid groups with glycidyl(meth)acrylate or an epoxy(meth)acrylate to obtain photopolymerizable 15 organic binder polymers for the purpose of improving the photosensitivity, coating film strength, the coating solvent and chemical resistance and the adhesion to the substrate. Examples are disclosed in JP-B-S50/34 443 and JP-B-S50/34 444, US-5,153,095, US-5,650,233 and US-5,677,385, as well as by T. Kudo et al. in J. Appl. Phys., Vol. 37 (1998), p. 3594-3603. The entire contents of all above- 20 mentioned patents and patent applications is enclosed herein by reference.

Among these various kinds of alkali-soluble binders, acrylic acid homo- and copolymers as well as methacrylic acid homo- and copolymers are particularly preferred.

The weight-average molecular weight of the binders is preferably from 500 to 25 1'000'000, e.g. from 3'000 to 1'000'000, more preferably from 5'000 to 400'000.

The content of an alkali-soluble binder in the dye-containing curable resin composition is preferably from 10 to 90% by weight, more preferably from 20 to 80% by weight, and particularly preferably from 30 to 70% by weight, based on the total solid content of the dye-containing curable resin composition.


Photopolymerisable vinyl compounds are also well known to the person skilled in the art. These monomers contain at least one ethylenic double bond and usually have a boiling point of 100°C or more.

5 Examples of suitable photopolymerisable vinyl compounds are polyethylene glycol monoacrylate, polyethylene glycol monomethacrylate, polypropylene glycol monoacrylate, polypropylene glycol monomethacrylate, phenoxyethyl acrylate, phenoxyethyl methacrylate, polyethylene glycol diacrylate, polyethylene glycol dimethacrylate, trimethylolpropane triacrylate, trimethylolpropane triamethacrylate, neopentylglycol diacrylate, neopentylglycol dimethacrylate, pentaerythritol tri-
10 acrylate, pentaerythritol triamethacrylate, pentaerythritol tetraacrylate, pentaerythritol tetramethacrylate, dipentaerythritol pentaacrylate, dipentaerythritol pentamethacrylate, dipentaerythritol hexaacrylate, dipentaerythritol hexamethacrylate, tri(acryloyloxyethyl)isocyanurate. Preferred photopolymerisable vinyl compounds are dipentaerythritol pentaacrylate and dipentaerythritol
15 pentamethacrylate.


The total content of such a photopolymerisable vinyl compound in a colourant-containing curable composition is, while it varies depending on the material thereof, generally from 5 to 70% by weight, preferably from 5 to 50% by weight, and particularly preferably from 7 to 30% by weight, based on the solid content of the
20 composition.

Suitable photoinitiators are also well-known to the person skilled in the art and are preferably selected from halomethyloxadiazols, halomethyl-s-triazines, 3-aryl-substituted coumarins, benzophenones, acetophenones, cyclopentadiene-benzene-iron complexes, oxime esters and oximes.

25 Suitable photoinitiators are described, for example, in GB-2,339,571, US-6,485,885, GB-2,358,017, GB-2,357,293, WO-02/100 903, J. Photopolym. Sci. Technol. 15, 51-57 (2002), IP. com. Journal IPCOM 000012462D, 3(6), 101-109 (2003), US-2004/0 102 548, US-2004/0 102 673, PCT/EP2006/068 202 and PCT/EP2006/068 254.

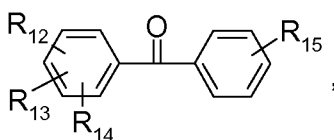
Preferred photoinitiators are benzophenones of the formula ,

wherein R₁₂, R₁₃ and R₁₄ independently of one another are hydrogen, C₁-C₄-alkyl, C₁-C₄-halogenalkyl, C₁-C₄-alkoxy, chlorine or N(C₁-C₄-alkyl)₂; R₁₅ is hydrogen, C₁-C₄-alkyl, C₁-C₄-halogenalkyl, phenyl, N(C₁-C₄-alkyl)₂, COOCH₃,


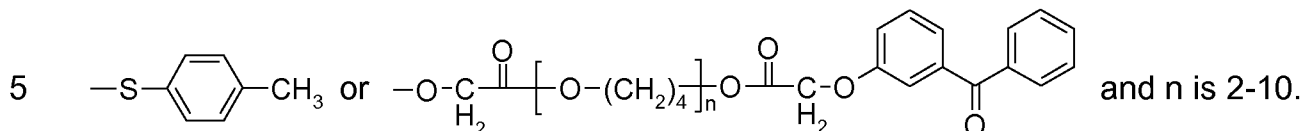


Specific examples are ESACURE TZT[®] available from Lamberti, (a mixture of 2,4,6-trimethylbenzophenone and 4-methylbenzophenone) and DAROCUR[®] BP (benzophenone).

Further preferred photoinitiators are alpha-hydroxy ketones, alpha-alkoxyketones or

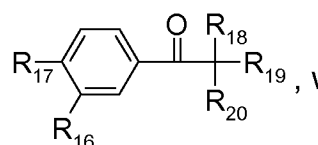
10 alpha-aminoketones of the formula , wherein R₁₆ is hydrogen or

C₁-C₁₈-alkoxy; R₁₇ is hydrogen, C₁-C₁₈-alkyl, C₁-C₁₂hydroxyalkyl, C₁-C₁₈-alkoxy, -OCH₂CH₂-OR₂₁, morpholino, C₁-C₁₈alkyl-S-, a group H₂C=CH-, H₂C=C(CH₃)-,

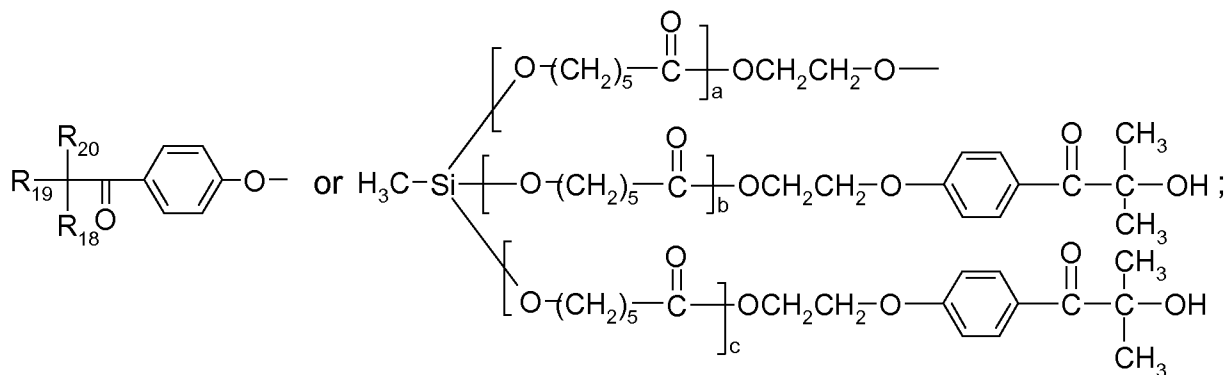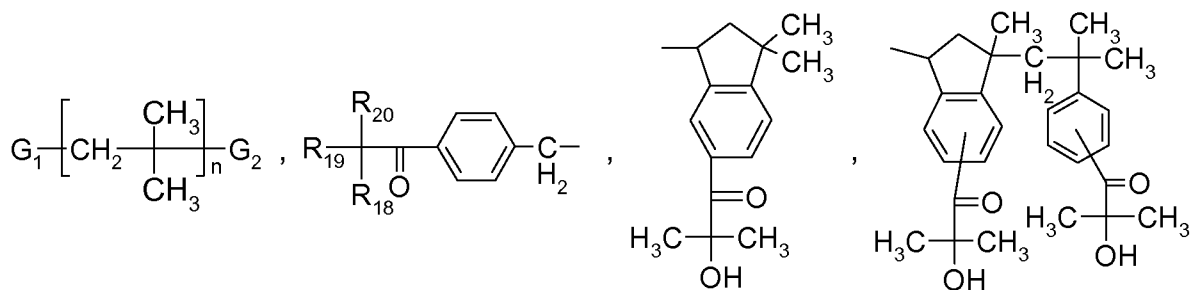


15 a, b and c are 1-3; n is 2-10 ; G₁ and G₂ independently of one another are end

groups of the polymeric structure, preferably hydrogen or methyl; R₁₈ is hydroxy, C₁-C₁₆-alkoxy, morpholino, dimethylamino or -O(CH₂CH₂O)_m-C₁-C₁₆-alkyl; R₁₉ and R₂₀ independently of one another are hydrogen, C₁-C₆-alkyl, C₁-C₁₆-alkoxy or -O(CH₂CH₂O)_m-C₁-C₁₆-alkyl; or unsubstituted phenyl or benzyl; or phenyl or benzyl substituted by C₁-C₁₂-alkyl; or R₁₉ and R₂₀ together with the carbon atom to which they are attached form a cyclohexyl ring; m is 1-20; with the proviso that R₁₈, R₁₉ and R₂₀ are not all together C₁-C₁₆-alkoxy or -O(CH₂CH₂O)_m-C₁-C₁₆-alkyl; and R₂₁ is




Specific examples are 1-hydroxy-cyclohexyl-phenyl-ketone, a mixture of 1-hydroxy-cyclohexyl-phenyl-ketone with benzophenone, 2-methyl-1[4-(methylthio)phenyl]-2-morpholinopropan-1-one, 2-benzyl-2-dimethylamino-1-(4-morpholinophenyl)-butanone-1, 2-dimethylamino-2-(4-methyl-benzyl)-1-(4-morpholin-4-yl-phenyl)-butan-1-one, 1-[4-(2-hydroxyethoxy)-phenyl]-2-hydroxy-2-methyl-1-propan-1-one, 2,2-dimethoxy-1,2-diphenylethan-1-one, 2-hydroxy-2-methyl-1-phenyl-propan-1-one, 2-hydroxy-1-{4-[4-(2-hydroxy-2-methyl-propionyl)-benzyl]-phenyl}-2-methyl-propan-1-one, 2-benzyl-1-(3,4-dimethoxy-phenyl)-2-dimethylamino-butan-1-one, 2-hydroxy-1-{4-[4-(2-hydroxy-2-methyl-propionyl)-phenoxy]-phenyl}-2-methyl-

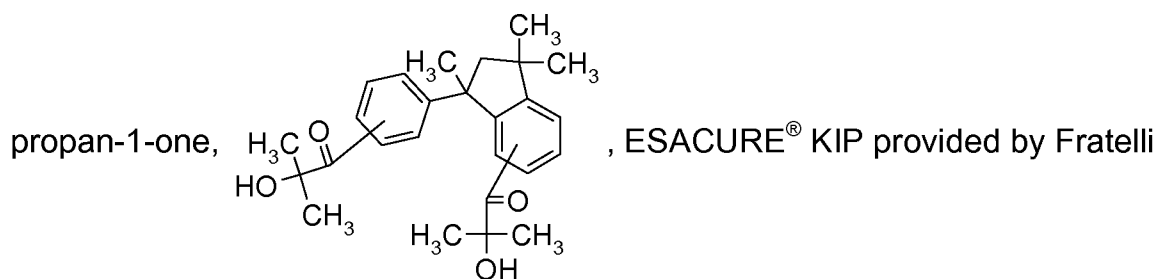

Lamberti and 2-hydroxy-1-{1-[4-(2-hydroxy-2-methyl-propionyl)-phenyl]-1,3,3-trimethyl-indan-5-yl}-2-methyl-propan-1-one.

Further preferred photoinitiators are acylphosphine oxides of the formula





C₁-C₂₀-alkyl, cyclohexyl, cyclopentyl, phenyl, naphthyl or biphenyl; or C₁-C₂₀-alkyl,


cyclohexyl, cyclopentyl, phenyl, naphthyl or biphenyl substituted by halogen, C₁-C₁₂-alkyl, C₁-C₁₂-alkoxy, C₁-C₁₂alkylthio or NR₂₅R₂₆, or R₂₂ and R₂₃ are independently of one another -(CO)R₂₄; R₂₅ and R₂₆ independently of one another are hydrogen, unsubstituted C₁-C₁₂-alkyl or C₁-C₁₂-alkyl substituted by OH or SH
 5 wherein the alkyl chain may be interrupted by one to four oxygen atoms; or R₂₅ and R₂₆ independently of one another are C₂-C₁₂-alkenyl, cyclopentyl, cyclohexyl, benzyl or phenyl; R₂₄ is unsubstituted cyclohexyl, cyclopentyl, phenyl, naphthyl or biphenyl, or cyclohexyl, cyclopentyl, phenyl, naphthyl or biphenyl substituted by halogen, C₁-C₄-alkyl and/or C₁-C₄-alkoxy; or R₂₄ is a 5- or 6-membered heterocyclic
 10 ring having an S atom or N atom. Specific examples thereof are bis(2,4,6-trimethylbenzoyl)-phenylphosphine oxide, bis(2,4,6-trimethylbenzoyl)-phenyl-ethoxy-phosphine oxide, 2,4,6-trimethylbenzoyl-diphenyl-phosphine oxide and bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentylphosphine oxide.

Further preferred photoinitiators are titanocenes of the formula $R_{27} \begin{array}{c} R_{28} \\ | \\ \text{Ti} \\ | \\ R_{30} \end{array} - R_{29}$, wherein

15 R₂₇ and R₂₈ independently of one another are cyclopentadienyl optionally mono-, di-, or tri-substituted by C₁-C₁₈-alkyl, C₁-C₁₈-alkoxy, cyclopentyl, cyclohexyl or halogen; R₂₉ and R₃₀ are phenyl having at least one F or CF₃ substituent in ortho position to the Ti-C bond and having at least a further substituent which is unsubstituted pyrrolinyl or polyoxaalkyl or which is pyrrolinyl or polyoxaalkyl
 20 substituted by one or two C₁-C₁₂-alkyl, di(C₁-C₁₂-alkyl)aminomethyl, morpholinomethyl, C₂-C₄-alkenyl, methoxymethyl, ethoxymethyl, trimethylsilyl,


formyl, methoxy or phenyl; or R₂₉ and R₃₀ are  or ; G₅ is O,

S, or NR₃₄; R₃₁, R₃₂ and R₃₃ independently of one another are hydrogen, halogen, C₂-C₁₂-alkenyl, C₁-C₁₂alkoxy, C₂-C₁₂-alkoxy interrupted by one to four oxygen
 25 atoms, cyclohexyloxy, cyclopentyloxy, phenoxy, benzyloxy, unsubstituted phenyl or biphenyl or phenyl or biphenyl substituted by C₁-C₄-alkoxy, halogen, phenylthio or C₁-C₄-alkylthio, with the proviso that R₃₁ and R₃₃ are not both hydrogen and that,

with respect to the residue  , at least one substituent R₃₁ or R₃₃ is


C₁-C₁₂alkoxy or C₁-C₁₂alkoxy interrupted by one to four oxygen atoms, cyclohexyl-
oxy, cyclopentyloxy, phenoxy or benzyloxy; and R₃₄ is C₁-C₈alkyl, phenyl or
cyclophenyl. Specific examples thereof are bis(η⁵-2,4-cyclopentadien-1-yl)-
5 bis(2,6-difluoro-3-(1H-pyrrol-1-yl)-phenyl)-titanium and bis(2,6-difluorophenyl)-
bis[(1,2,3,4,5-η)-1-methyl-2,4-cyclopentadien-1-yl]-titanium.

Further preferred photoinitiators are phenylglyoxalates of the formula

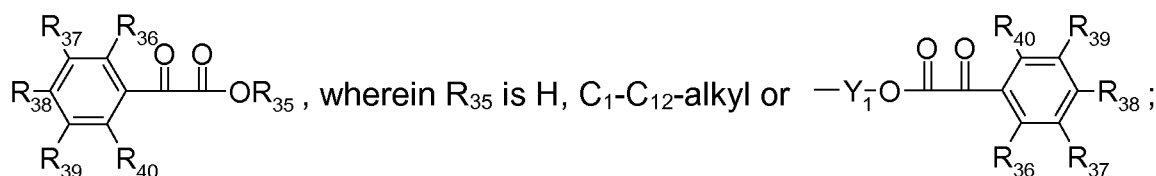


R₃₆, R₃₇, R₃₈, R₃₉ and R₄₀ independently of one another are hydrogen,
10 unsubstituted C₁-C₁₂-alkyl or C₁-C₁₂-alkyl substituted by OH, C₁-C₄-alkoxy, phenyl,
naphthyl, halogen or CN; wherein the alkyl chain optionally is interrupted by one or
more oxygen atoms; or R₃₆, R₃₇, R₃₈, R₃₉ and R₄₀ independently of one another are
C₁-C₄-alkoxy, C₁-C₄-alkylthio or NR₂₅R₂₆; R₂₅ and R₂₆ independently of one another
are hydrogen, unsubstituted C₁-C₁₂-alkyl or C₁-C₁₂-alkyl substituted by OH or SH
15 wherein the alkyl chain optionally is interrupted by one to four oxygen atoms; or R₂₅
and R₂₆ independently of one another are C₂-C₁₂-alkenyl, cyclopentyl, cyclohexyl,
benzyl or phenyl; and Y₁ is C₁-C₁₂-alkylene optionally interrupted by one or more
oxygen atoms. A specific example thereof is oxo-phenyl-acetic acid 2-[2-(2-oxo-
2-phenyl-acetoxy)-ethoxy]-ethyl ester.

20 Further preferred photoinitiators are oxime esters of the formula

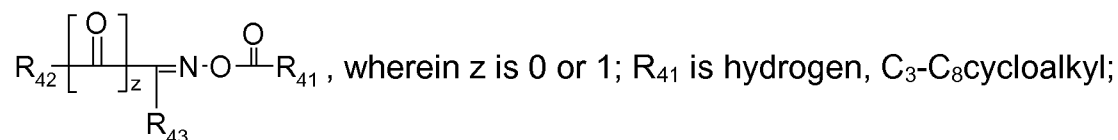

C₁-C₁₂alkyl which is unsubstituted or substituted by one or more halogen, phenyl
and/or CN; or R₄₁ is C₂-C₅alkenyl; phenyl which is unsubstituted or substituted by


one or more C₁-C₆alkyl, halogen, CN, OR₄₄, SR₄₅ and/or NR₄₆R₄₇; or R₄₁ is C₁-C₈-alkoxy, benzyloxy; or phenoxy which is unsubstituted or substituted by one or more C₁-C₆alkyl and/or halogen; R₄₂ is phenyl, naphthyl, benzoyl or naphthoyl, each of which is substituted 1 to 7 times by halogen, C₁-C₁₂alkyl, C₃-C₈cycloalkyl, benzyl, phenoxy, 5
 phenoxy, C₂-C₁₂alkoxycarbonyl, OR₄₄, SR₄₈, SOR₄₅, SO₂R₄₅ and/or NR₄₆R₄₇, wherein the substituents OR₄₄, SR₄₅ and NR₄₆R₄₇ optionally form 5- or 6-membered rings *via* the radicals R₄₄, R₄₅, R₄₆ and/or R₄₇ with further substituents on the phenyl or naphthyl ring; or each of which is substituted by phenyl or by phenyl which is substituted by one or more OR₄₄, SR₄₅ and/or NR₄₆R₄₇; or R₄₂ is

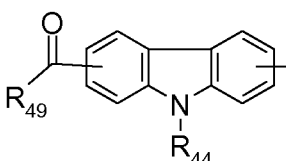10 thioxanthylor ; R₄₃ is hydrogen; unsubstituted C₁-C₂₀alkyl or


C₁-C₂₀alkyl substituted by one or more halogen, OR₄₄, phenyl; or is C₃-C₈cycloalkyl; phenyl which is unsubstituted or substituted by one or more C₁-C₆alkyl, phenyl, halogen, OR₄₄, SR₄₅ and/or NR₄₆R₄₇; or is C₂-C₂₀alkanoyl or benzoyl which is unsubstituted or substituted by one or more C₁-C₆alkyl, phenyl, OR₄₄, SR₄₅ and/or 15
 NR₄₆R₄₇; or is C₂-C₁₂alkoxycarbonyl, phenoxy, CN, -CONR₄₆R₄₇, NO₂, C₁-C₄haloalkyl, S(O)_y-C₁-C₆alkyl or S(O)_y-phenyl; y is 1 or 2; R₄₄ and R₄₅ independently of one another are hydrogen, C₁-C₂₀alkyl, C₂-C₁₂alkenyl, C₃-C₈cycloalkyl, phenyl-C₁-C₃alkyl; or are C₁-C₈alkyl which is substituted by -OH, -SH, -CN, C₁-C₈alkanoyl, benzoyl, which is unsubstituted or substituted by one or more 20
 C₁-C₆alkyl, halogen, -OH, C₁-C₄alkoxy or C₁-C₄alkylsulfanyl; or are phenyl or naphthyl, each of which is unsubstituted or substituted by halogen, C₁-C₁₂alkyl, C₁-C₁₂alkoxy, phenyl-C₁-C₃alkoxy, phenoxy, C₁-C₁₂alkylsulfanyl, phenylsulfanyl, -N(C₁-C₁₂alkyl)₂, diphenylamino; R₄₆ and R₄₇ independently of one another are independently of each other are hydrogen, C₁-C₂₀alkyl, C₂-C₄hydroxyalkyl, 25
 C₂-C₁₀alkoxyalkyl, C₂-C₅alkenyl, C₃-C₈cycloalkyl, phenyl-C₁-C₃alkyl, C₁-C₈alkanoyl, C₃-C₁₂alkenoyl, benzoyl; or are phenyl or naphthyl, each of which is unsubstituted or substituted by C₁-C₁₂alkyl, benzoyl or C₁-C₁₂alkoxy; or R₄₆ and R₄₇ together are C₂-C₆alkylene optionally interrupted by -O- or -NR₄₄- and/or optionally substituted by hydroxyl, C₁-C₄alkoxy, C₂-C₄alkanoyloxy or benzoyloxy; R₄₉ is C₁-C₁₂alkyl,

phenyl, C₁-C₁₂alkylphenyl or 2-(2'-tetrahydrofuryl)-phenyl. Specific examples thereof are 1,2-octanedione 1-[4-(phenylthio)phenyl]-2-(O-benzoyloxime), ethanone 1-[9-ethyl-6-(2-methylbenzoyl)-9H-carbazol-3-yl]-1-(O-acetyloxime) and 9H-thioxanthene-2-carboxaldehyde 9-oxo-2-(O-acetyloxime).

- 5 A further example of a photoinitiator is Esacure[®] 1001 available from Lamberti: 1-[4-(4-benzoylphenylsulfanyl)phenyl]-2-methyl-2-(4-methylphenylsulfonyl)propan-



The most preferred photoinitiators are the following compounds:

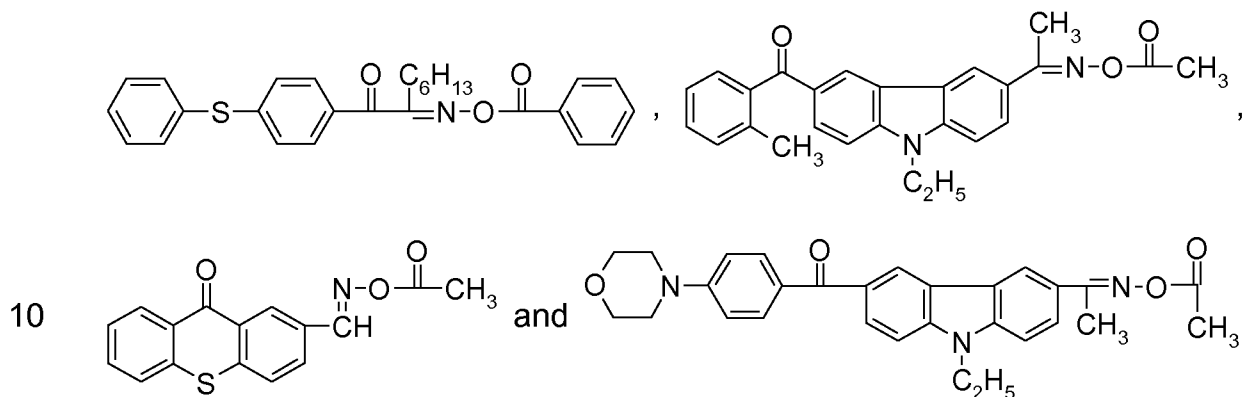

The photoinitiator may be used in combination with a sensitizer and/or a photostabiliser.

- The total content of the photoinitiator is preferably from 0.01 to 10% by weight, preferably from 0.05 to 8% by weight, and particularly preferably from 1 to 5% by weight, based on the solid content of the composition.

- Upon preparation of the dye-containing curable composition, a solvent is generally used. The solvent is not particularly limited as far as it satisfies solubility to the respective components and coating property of the dye-containing curable composition and it is preferably selected under particular consideration of the solubility of the alkali-soluble binder, the coating property and the safety.

Suitable solvents include esters, e.g. ethyl acetate, butyl acetate, butyl butyrate and

methyl methoxyacetate, ether esters such as 1-methoxy-2-propyl-acetate (PGMEA), 2-methoxy-1-propyl-acetate, methylcellosolve acetate, diethylene glycol dimethyl ether, butylcarbitol acetate and polyethylene glycol methyl ether acrylate (PEGMEA), ethers, e.g. tetrahydrofuran, ketones, e.g. 2-butanone, cyclopentanone
5 and cyclohexanone, and aromatic hydrocarbons such as toluene and xylene.

The examples which follow illustrate the invention, without limiting it. Where not otherwise specified, "parts" and "%" are by weight. Volume parts correspond to weight parts of water.

Comparative example 1: 92 parts of Heliogen[®] Blue D6700T (ϵ copper phthalocyanine, BASF) and 8 parts of phthalimidomethyl copper phthalocyanine are
10 kneaded at 90°C for 15 hours in a 1000 volume parts kneader with 100 parts of diethylene glycol and 700 parts of ground sodium chloride. This kneading chip is then poured into 1% aqueous HCl solution, and the resulting slurry is heated to about 70°C for 2 hours while being stirred. The slurry is filtrated, and the filtercake
15 is washed with water until the filtrate is free of chloride ions. The wet filtercake is reslurried and treated under high shear at 70°C for 2 hours while be stirring and adjusting pH 7.5 with aqueous sodium hydroxide, then filtrated and washed with water until the filtrate is neutral. The filtercake of the ϵ copper phthalocyanine composition is finally dried at 90°C and dry-ground at 50°C. Extremely tiny particles
20 are obtained, which however have a poor rheology and do not lead to a better contrast.

Example 1a: 92 parts of β copper phthalocyanine crude and 8 parts of phthalimidomethyl copper phthalocyanine are acid pasted in concentrated sulphuric acid for 4 hours at 40°C (1 part copper phthalocyanine : 8 parts H₂SO₄), then drowned-out
25 into water using an exit aspirator unit. The slurry is filtrated, and the α copper phthalocyanine / phthalimidomethyl copper phthalocyanine filtercake is washed with water until the filtrate is acid free.

Example 1b: 80 parts of the product of example 1a, 18.4 parts of ϵ copper phthalocyanine (D6700T[™], BASF) and 1.6 parts of phthalimidomethyl copper phthalocyanine

cyanine are kneaded at 120°C for 12 hours in a 1000 volume parts kneader with 100 parts of diethylene glycol and 500 parts of ground sodium chloride. This kneading chip is then poured into water, and the resulting slurry is heated to about 70°C for 2 hours while being stirred. The slurry is filtrated, and the filtercake is washed with water until the filtrate is free of chloride ions. The wet filtercake is reslurried and treated under high shear at 70°C for 2 hours while stirring and adjusting the pH to 7.5 with aqueous sodium hydroxide, then filtrated and washed with water until the filtrate is neutral. The ϵ copper phthalocyanine filtercake is finally dried at 90°C and dry-ground at 50°C.

10 Example 1c: 80 parts of the product of example 1a and 20 parts of the product of example 1b are kneaded at 120°C for 12 hours in a 1000 volume parts kneader with 100 parts of diethylene glycol and 500 parts of ground sodium chloride followed by further kneading at 90°C for 8 hours after adding 5 parts of lauryl ammonium monosulfo copper phthalocyanine. This kneading chip is then poured into water, and the resulting slurry is heated to about 70°C for 2 hours while being stirred. The slurry is filtrated, and the filtercake is washed with water until the filtrate is free of chloride ions. The wet filtercake is reslurried and treated under high shear at 70°C for 2 hours while stirring and adjusting the pH to 7.5 with aqueous sodium hydroxide, then filtrated and washed with water until the filtrate is neutral. The filtercake of the ϵ copper phthalocyanine composition is finally dried at 90°C and dry-ground at 50°C. The BET specific surface area is between 85 and 95 m²/g, with particles in the range from 20 to 50 nm and a very narrow particles size distribution.

Example 2: 80 parts of the product of example 1a, 20 parts of the product of example 1b and 5 parts of lauryl ammonium monosulfo copper phthalocyanine are kneaded at 120°C for 12 hours in a 1000 volume parts kneader with 100 parts of diethylene glycol and 500 parts of ground sodium chloride followed by further kneading at 90°C for 8 hours. This kneading chip is then poured into water, and the resulting slurry is heated to about 70°C for 2 hours while being stirred. The slurry is filtrated, and the filtercake is washed with water until the filtrate is free of chloride ions. The wet filtercake is reslurried and treated under high shear for 2 hours while

stirring and adjusting the pH to 7.5 with aqueous sodium hydroxide, then filtrated and washed with water until the filtrate is neutral. The filtercake of the ϵ copper phthalocyanine composition is finally dried at 90°C and dry-ground at 50°C.

Example 3: 80 parts of the product of example 1a, 20 parts of the product of example 1b and 5 parts of lauryl ammonium monosulfo copper phthalocyanine are kneaded at 120°C for 12 hours in a 1000 volume parts kneader with 100 parts of diethylene glycol and 500 parts of ground sodium chloride followed by further kneading at 105°C for 8 hours. This kneading chip is then poured into water, and the resulting slurry is heated to about 70°C for 2 hours while being stirred. The slurry is filtrated, and the filtercake is washed with water until the filtrate is free of chloride ions. The wet filtercake is reslurried and treated under high shear at 70°C for 2 hours while stirring and adjusting the pH to 7.5 with aqueous sodium hydroxide, then filtrated and washed with water until the filtrate is neutral. The filtercake of the ϵ copper phthalocyanine composition is finally dried at 90°C and dry-ground at 50°C.

Examples 4 – 8: The following substances are charged into a 37 ml screw bottle;

- 1.0 g Pigments (as indicated in below table);
- 10.0 g Propylene glycol 1-monomethyl ether 2-acetate;
- 0.04 g Solsperse[®] 5000 (Lubrizol);
- 0.36 g Ajisper[®] PB821 (Ajinomoto Fine-Techno Co., Inc.);
- 4.0 g Poly(benzylmethacrylate-co-methacrylic acid (25% in 1-methoxy-2-propyl-acetate, weight ratio of benzylmethacrylate : methacrylic acid 80 : 20);
- 50.0 g zirconium oxide beads (diameter 0.5 mm).

The bottle is sealed with an inner cup then applied to a paint conditioner for 3 hours to give a dispersion. The viscosity of the dispersion is measured with a rheometer (LVDV-III[™], Brookfield Engineering).

The dispersion thus obtained is cast onto a glass substrate by means of spin

coating, wherein a layer thickness is adjusted to give a film having a desired color points by controlling rotation speed, then dried at 60°C for 1 hour.

The optical properties of the dispersion films thus obtained are measured by use of a spectrophotometer (UV-2500PC™, Shimadzu) and color points (C.I.E. 1931 x, y chromaticity diagram) are calculated using standard C light, observation 2 degree. Contrast ratio of the films is measure by a contrast tester (CT-1, Tsubosaka Electric Co., Ltd.).

The results are as follows:

Example	Pigment	Optical properties at y=0.0850 by C light, 2°			Viscosity (cps)	
		x	Y	Contrast ratio	Initial	1 week
4	Lionol® Blue E [†]	0.1322	8.20	2470	20.3	> 100
5	Comparative example 1	0.1328	8.38	2580	30.0	> 100
6	Example 1c	0.1331	8.38	3180	10.5	14.6
7	Example 2	0.1329	8.22	2850	15.4	21.1
8	Example 3	0.1326	8.34	3240	15.4	18.6

[†] Toyo Ink Mfg. Co. Ltd.

10 Example 9: It is proceeded in analogy to examples 1a, 1b, 2 and 7, with the difference that, instead of the quantities indicated therein, 93.87 parts of β copper phthalocyanine crude and 6.13 parts of phthalimidomethyl copper phthalocyanine are used in example 1a; 18.77 parts of ϵ copper phthalocyanine and 1.23 parts of phthalimidomethyl copper phthalocyanine are used in example 1b; and 2.04 parts
15 of lauryl ammonium monosulfo copper phthalocyanine are used in example 1c. The optical properties are similar to those of example 7, with a slightly improved viscosity:

Example	Pigment	Optical properties at $y = 0.0850$ by C light, 2°			Viscosity (cps)	
		x	Y	Contrast ratio	Initial	1 week
9		0.1328	8.46	2840	13.5	12.3

Examples 10 – 13: It is proceeded in close analogy to example 9, with the difference that the ratio of α copper phthalocyanine to ϵ copper phthalocyanine (4 : 1 in example 9) was 1 : 1 (example 10), 2 : 1 (example 11), 6 : 1 (example 12) and 10 : 1 (example 13), respectively. The results are similar to those of example 9, with the highest contrast ratio for example 11 and the lowest contrast ratio for examples 10 and 13.

Example 14: It is proceeded in close analogy to example 9, with the difference that, instead of the quantities indicated therein, 94.85 parts of β copper phthalocyanine crude and 5.15 parts of dimethylaminomethyl (instead of phthalimidomethyl) copper phthalocyanine are used in example 1a; 18.97 parts of ϵ copper phthalocyanine and 1.03 parts of dimethylaminomethyl (instead of phthalimidomethyl) copper phthalocyanine are used in example 1b; and 3.09 parts of lauryl ammonium monosulfo copper phthalocyanine are used in example 1c. The optical properties are similar to those of example 7.

Example 15: It is proceeded in close analogy to example 9, with the difference that, instead of the quantities indicated therein, 89.7 parts of β copper phthalocyanine crude and 10.3 parts of aminomethyl (instead of phthalimidomethyl) copper phthalocyanine are used in example 1a; 17.94 parts of ϵ copper phthalocyanine and 2.06 parts of aminomethyl (instead of phthalimidomethyl) copper phthalocyanine are used in example 1b; and 3.09 parts of lauryl ammonium monosulfo copper phthalocyanine are used in example 1c. The optical properties are similar to those of example 7.

Example 16: It is proceeded in close analogy to example 9, with the difference that,

instead of the quantities indicated therein, 96.48 parts of β copper phthalocyanine crude and 3.52 parts of dimethylaminomethyl (instead of phthalimidomethyl) copper phthalocyanine are used in example 1a; 19.30 parts of ϵ copper phthalocyanine and 0.70 parts of dimethylaminomethyl (instead of phthalimido) copper phthalocyanine are used in example 1b; and 17.65 parts of stearyl (instead of lauryl) ammonium monosulfo copper phthalocyanine are used in example 1c. The optical properties are similar to those of example 7.

Example 17: It is proceeded in close analogy to example 9, with the difference that, instead of the quantities indicated therein, 84.55 parts of β copper phthalocyanine crude and 15.45 parts of phthalimidomethyl copper phthalocyanine are used in example 1a; 16.91 parts of ϵ copper phthalocyanine and 3.09 parts of phthalimidomethyl copper phthalocyanine are used in example 1b; and 3.09 parts of lauryl ammonium monosulfo copper phthalocyanine are used in example 1c. The contrast ratio is excellent (better than in example 8), but the viscosity is much poorer.

Example 18: It is proceeded in close analogy to example 9, with the difference that, instead of the quantities indicated therein, 82.76 parts of β copper phthalocyanine crude and 17.24 parts of phthalimidomethyl copper phthalocyanine are used in example 1a; 16.55 parts of ϵ copper phthalocyanine and 3.45 parts of phthalimidomethyl copper phthalocyanine are used in example 1b; and 14.94 parts of lauryl ammonium monosulfo copper phthalocyanine are used in example 1c. The contrast ratio is good (better than in example 7), but the viscosity is not fully satisfactory.


Example 19: It is proceeded in close analogy to example 9, with the difference that, instead of the quantities indicated therein, 80.0 parts of β copper phthalocyanine crude and 20.0 parts of dimethylaminomethyl (instead of phthalimidomethyl) copper phthalocyanine are used in example 1a; 16.0 parts of ϵ copper phthalocyanine and 4.0 parts of dimethylaminomethyl (instead of phthalimidomethyl) copper phthalocyanine are used in example 1b; and 11.11 parts of stearyl (instead of lauryl) ammonium monosulfo copper phthalocyanine are used in example 1c. The contrast ratio is good, but the viscosity is not fully satisfactory.

Claims:

1. A process for the preparation of a pigment composition, comprising the steps of:


- wet-milling a mixture of α copper phthalocyanine and ϵ copper phthalocyanine together with an aminomethyl-substituted phthalocyanine of formula (I), or a mixture thereof, and a milling aid in an organic liquid;

5

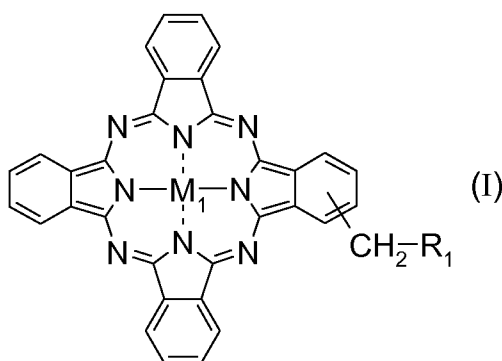

wherein M_1 is 2 H, Al(Cl), Al(OH), Bi(OH), Ca, Cd, Ce(Cl), Cr(OH), Co, Cu, Mn, Fe, Fe(Cl), Fe(OH), In(Cl), Mg, Mn(O), Ni, Os, Pb, Pd, Pt, Re, Rh, Rh(O), Ru, Si(Cl)₂, Si(OC₁-C₅alkyl)₂, Si(OH)₂, Sn, Sr, Ti(O), V(O), Zn, Zr(O) or Zr(OH)₂, preferably 2 H, Co, Cu or Ni, most preferred Cu;

10

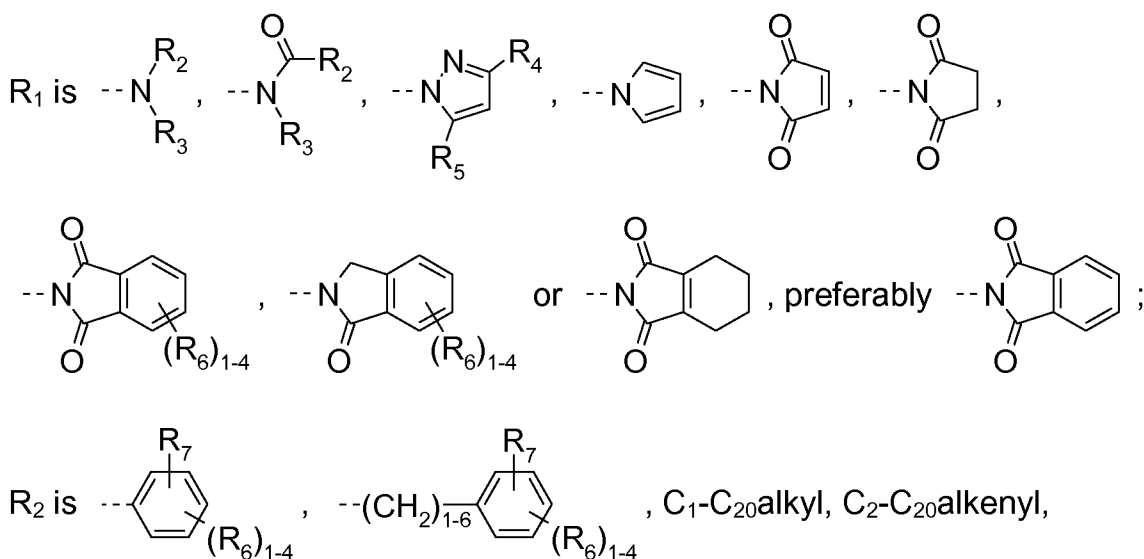

15

R_3 is H, C₁-C₂₀alkyl, C₂-C₂₀alkenyl, [C₂-C₆alkylen-O-]₁₋₃H, [C₂-C₆alkylen-O-]₁₋₃-


C₁-C₈alkyl or [C₂-C₆alkylen-N(C₁-C₄alkyl)-]₁₋₃C₁-C₈alkyl;

R₄ and R₅ are independently from one another H or C₁-C₆alkyl, preferably both H or both methyl;

each R₆ is independently from all others H, C₁-C₈alkyl, Cl or NO₂; and

5 R₇ is H, COOH, CONH₂, CONHC₁-C₈alkyl or CON(C₁-C₈alkyl)₂;

- adding an ammonium sulfonato phthalocyanine of formula (II), or a mixture thereof, before the milling aid and the organic liquid are separated from the wet-milled mixture;

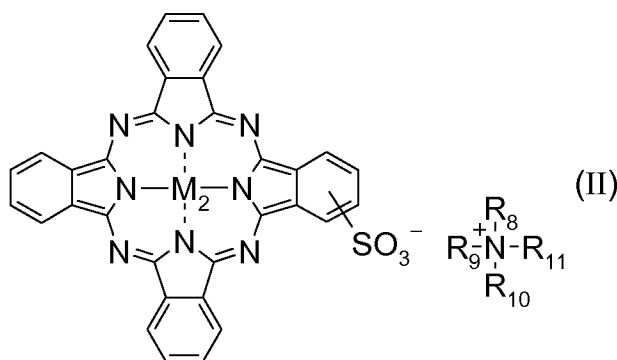

10 wherein M₂ is 2 H, Al(Cl), Al(OH), Bi(OH), Ca, Cd, Ce(Cl), Cr(OH), Co, Cu, Mn, Fe, Fe(Cl), Fe(OH), In(Cl), Mg, Mn(O), Ni, Os, Pb, Pd, Pt, Re, Rh, Rh(O), Ru, Si(Cl)₂, Si(OC₁-C₅alkyl)₂, Si(OH)₂, Sn, Sr, Ti(O), V(O), Zn, Zr(O) or Zr(OH)₂, preferably 2 H, Co, Cu or Ni, most preferred Cu;

15 R₈ and R₉ are each independently of one another H or C₁-C₄alkyl, preferably H or methyl, particularly preferred H;

R₁₀ is H, phenyl, benzyl, 2-phenylethyl, naphthyl, C₁-C₂₀alkyl, C₈-C₂₀alkenyl, [C₂-C₆alkylen-O-]₁₋₆H, [C₂-C₆alkylen-O-]₁₋₆C₁-C₈alkyl, [C₂-C₆alkylen-NH-]₁₋₆-C₁-C₈alkyl or [C₂-C₆alkylen-N(C₁-C₄alkyl)-]₁₋₆C₁-C₈alkyl, preferably H; and

20 R₁₁ is C₈-C₂₀alkyl, C₈-C₂₀alkenyl, [C₂-C₆alkylen-O-]₃₋₆H, [C₂-C₆alkylen-O-]₃₋₆-C₁-C₈alkyl, [C₂-C₆alkylen-NH-]₃₋₆C₁-C₈alkyl or [C₂-C₆alkylen-N(C₁-C₄alkyl)-]₃₋₆-C₁-C₈alkyl, preferably C₈-C₂₀alkyl or C₈-C₂₀alkenyl, most preferred C₁₀-C₁₈alkyl;

with the proviso that the total number of carbon atoms in R₈, R₉, R₁₀ and R₁₁ is from 8 to 30;

- separating the milling aid and the organic liquid from the wet-milled mixture after addition of the ammonium salt of formula (II); and
- isolating the pigment composition;

wherein the thus isolated pigment composition comprises, by weight based on the
5 total content of components having a phthalocyanine core,

- from 70 to 93%, preferably from 81 to 93%, especially from 81 to 91%, of ϵ copper phthalocyanine;
- from 5 to 18%, especially from 6 to 15%, most preferred from 6 to 12%, of the aminomethyl-substituted phthalocyanine of formula (I) or mixture thereof;
- 10 ▪ from 2 to 15%, especially from 3 to 12%, most preferred from 3 to 9%, of the ammonium sulfonato phthalocyanine of formula (II) or mixture thereof; and
- from 0 to 2%, preferably from 0 to 1%, of other phthalocyanine compounds.

2. A process according to claim 1, wherein the pigment composition comprises
from 6 to 20% by weight, preferably from 9 to 16% by weight, based on the total
15 content of components having a phthalocyanine core, of the aminomethyl-
substituted phthalocyanine of formula (I) or mixture thereof plus the ammonium
sulfonato phthalocyanine of formula (II) or mixture thereof, and the molar ratio of
the aminomethyl-substituted phthalocyanine of formula (I) or mixture thereof to the
ammonium sulfonato phthalocyanine of formula (II) or mixture thereof is from 1 : 1
20 to 5 : 1.

3. A process according to claim 1 or 2, wherein the ratio of α copper phthalocyanine to ϵ copper phthalocyanine at the beginning of wet-milling is from 1 : 99 to 99 : 1, preferably from 1 : 4 to 20 : 1, most preferred from 1 : 1 to 10 : 1.

4. A process according to claim 1, 2 or 3, wherein the wet-milling step is performed
25 in an agitated media pearl mill with an insoluble inert solid material or in a kneader
with a crystalline organic compound or inorganic salt, preferably in a kneader with
an inorganic salt.

5. A process according to claim 4, wherein the temperature during kneading is from 10 to 180°C, preferably from 60 to 130°C.
6. A process according to claim 1, 2, 3, 4 or 5, wherein the ammonium sulfonato phthalocyanine of formula (II) is added before the end phase of wet-milling.
- 5 7. A pigment composition comprising, by weight based on the total content of components having a phthalocyanine core,
- from 70 to 93%, preferably from 81 to 93%, especially from 81 to 91%, of ϵ copper phthalocyanine;
 - from 5 to 18%, especially from 6 to 15%, most preferred from 6 to 12%, of the
10 aminomethyl-substituted phthalocyanine of formula (I) or mixture thereof;
 - from 2 to 15%, especially from 3 to 12%, most preferred from 3 to 9%, of the ammonium sulfonato phthalocyanine of formula (II) or mixture thereof; and
 - from 0 to 2%, preferably from 0 to 1%, of other phthalocyanine compounds.
8. A pigment composition according to claim 7, which has a specific surface area of
15 from from 50 to 110 m²/g, more preferred from 80 to 110 m²/g, most preferred from 85 to 100 m²/g, as determined by the BET method.
9. A composition comprising a high molecular weight organic material and from 0.01 to 70% by weight, based on the total weight of colourants and high molecular weight organic material, of a composition according to claim 7 or 8.
- 20 10. A composition comprising from 0.1 to 70% by weight of the phthalocyanine pigment composition of the invention and a liquid medium comprising a binder or a polymerisable compound.
11. The use of a composition according to claim 7, 8, 9 or 10 for making colour
25 filters, preferably colour filters for electro-optical systems selected from the group consisting of TV screens, computer screens, portable telephone screens, navigation systems, CCD cameras, liquid crystal displays, flat panel displays,

charge coupled devices, plasma displays and electroluminescent displays.

12. A colour filter comprising a transparent substrate and one layer or multiple layers thereon, at least one layer comprising from 1 to 75% by weight, preferably from 5 to 50% by weight, with particular preference from 25 to 40% by weight, based on the overall weight of the layer comprising said colourant, of a phthalocyanine pigment composition according to claim 7 or 8.

13. A process for manufacturing a colour filter, wherein a composition comprising from 0.1 to 70% by weight of the phthalocyanine pigment composition of the invention and a liquid medium comprising a binder or a polymerisable compound is applied onto a transparent substrate optionally comprising patterned or not patterned layers thereon, and the composition is dried and/or cured to give a patterned or not patterned layer.