



(86) Date de dépôt PCT/PCT Filing Date: 2002/06/21

(87) Date publication PCT/PCT Publication Date: 2003/01/09

(45) Date de délivrance/Issue Date: 2008/03/11

(85) Entrée phase nationale/National Entry: 2003/11/26

(86) N° demande PCT/PCT Application No.: CA 2002/000928

(87) N° publication PCT/PCT Publication No.: 2003/002852

(30) Priorité/Priority: 2001/06/27 (US09/891,326)

(51) Cl.Int./Int.Cl. *F01N 3/28* (2006.01)

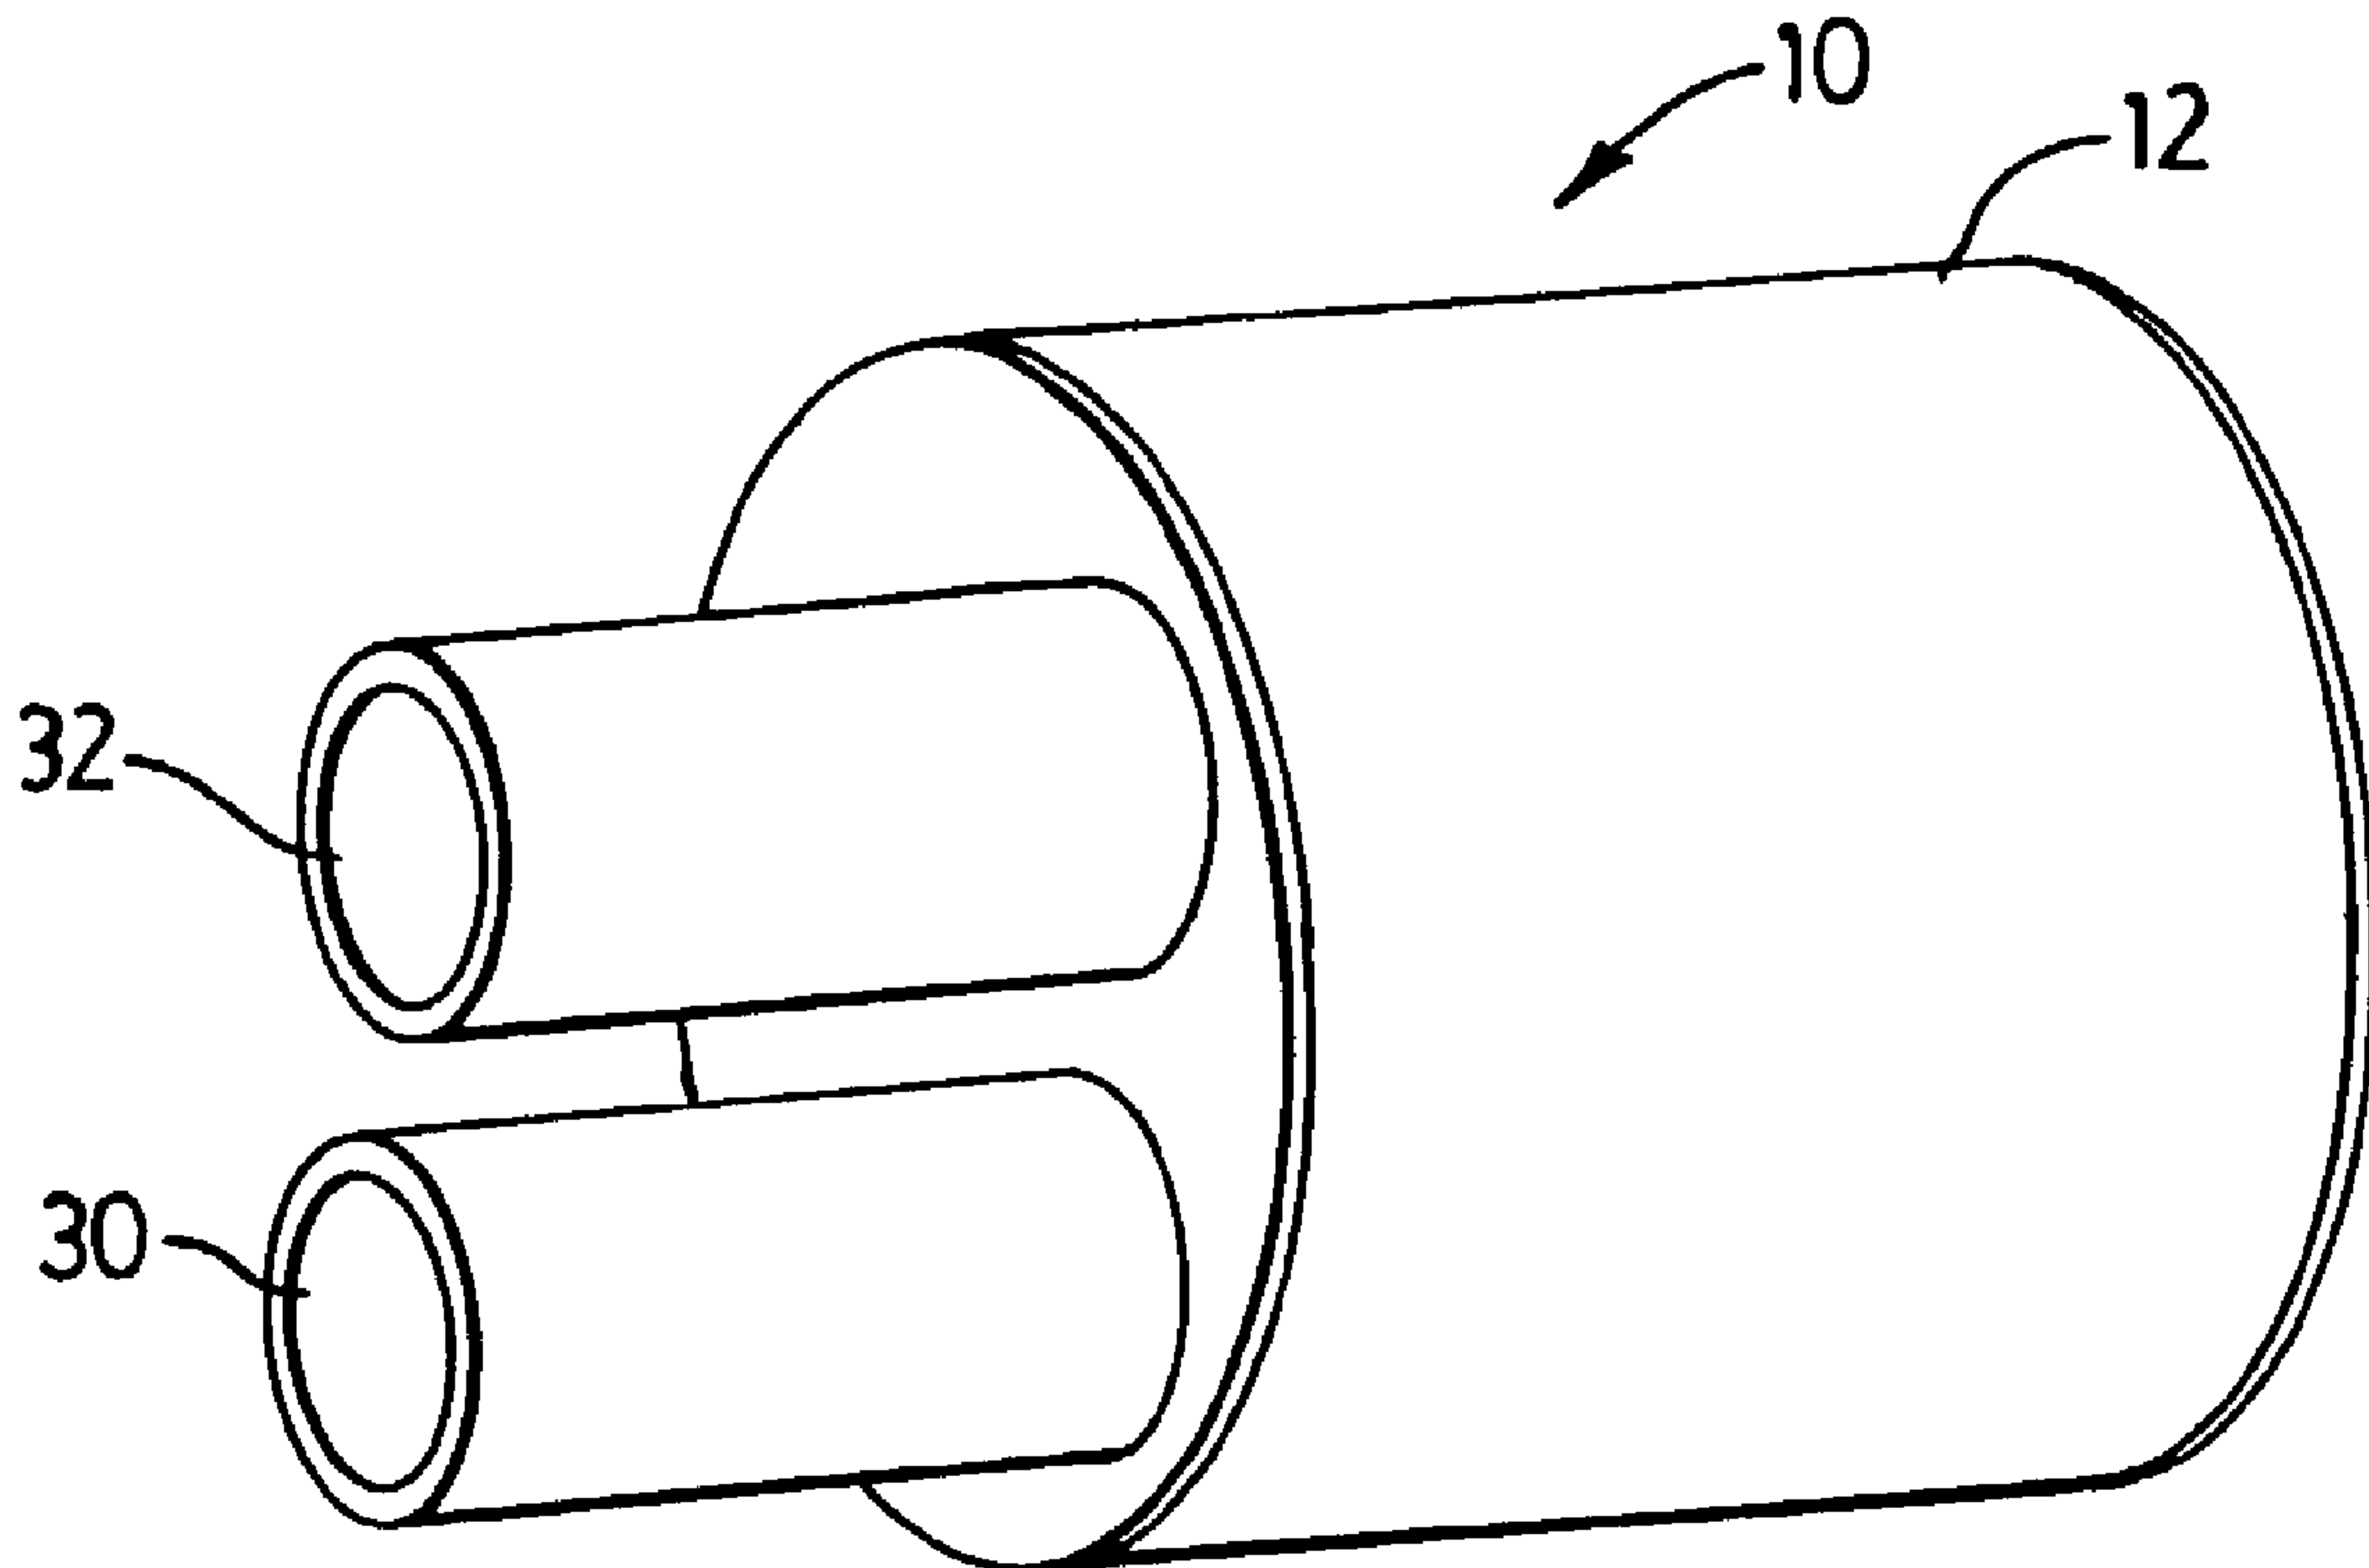
(72) Inventeur/Inventor:  
KNIGHT, GLENN, CA

(73) Propriétaire/Owner:  
ENVIRONMENTAL CONTROL CORPORATION, CA

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : ATTENUATEUR CATALYTIQUE A DEBIT INVERSE

(54) Title: REVERSE FLOW CATALYTIC MUFFLER



(57) Abrégé/Abstract:

A catalytic muffler having a housing with a first chamber and a second chamber fluidly communicating through a catalyst bed interspersed there between. A first baffle assembly in the first chamber extends between the catalyst bed and the housing. An inlet passage extends through the housing into the first chamber. An outlet passage extends through the housing into one of the first and second chambers. A second baffle assembly in the second chamber extends between the catalyst bed and the housing. The first and second baffle assemblies act in conjunction with the housing and the reactor bed to define a flow passage through the housing from the inlet passage through at least three discrete zones of the reactor bed to the outlet passage.





## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
9 January 2003 (09.01.2003)

PCT

(10) International Publication Number  
**WO 03/002852 A2**

(51) International Patent Classification<sup>7</sup>: **F01N**  
(21) International Application Number: PCT/CA02/00928  
(22) International Filing Date: 21 June 2002 (21.06.2002)  
(25) Filing Language: English  
(26) Publication Language: English

(30) Priority Data:  
09/891,326 27 June 2001 (27.06.2001) US

(71) Applicant (for all designated States except US): **ENVIRONMENTAL CONTROL CORPORATION**  
[CA/CA]; P.O. Box 8340, Station A, St. John's, Newfoundland A1B 3N7 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KNIGHT, Glenn**  
[CA/CA]; P.O. Box 217 Pouch Cove, St. John's, Newfoundland A0A 3L0 (CA).

(74) Agent: **GOWLING LAFLEUR HENDERSON LLP**;  
Suite 4900, Commerce Court West, Toronto, Ontario M5L 1J3 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

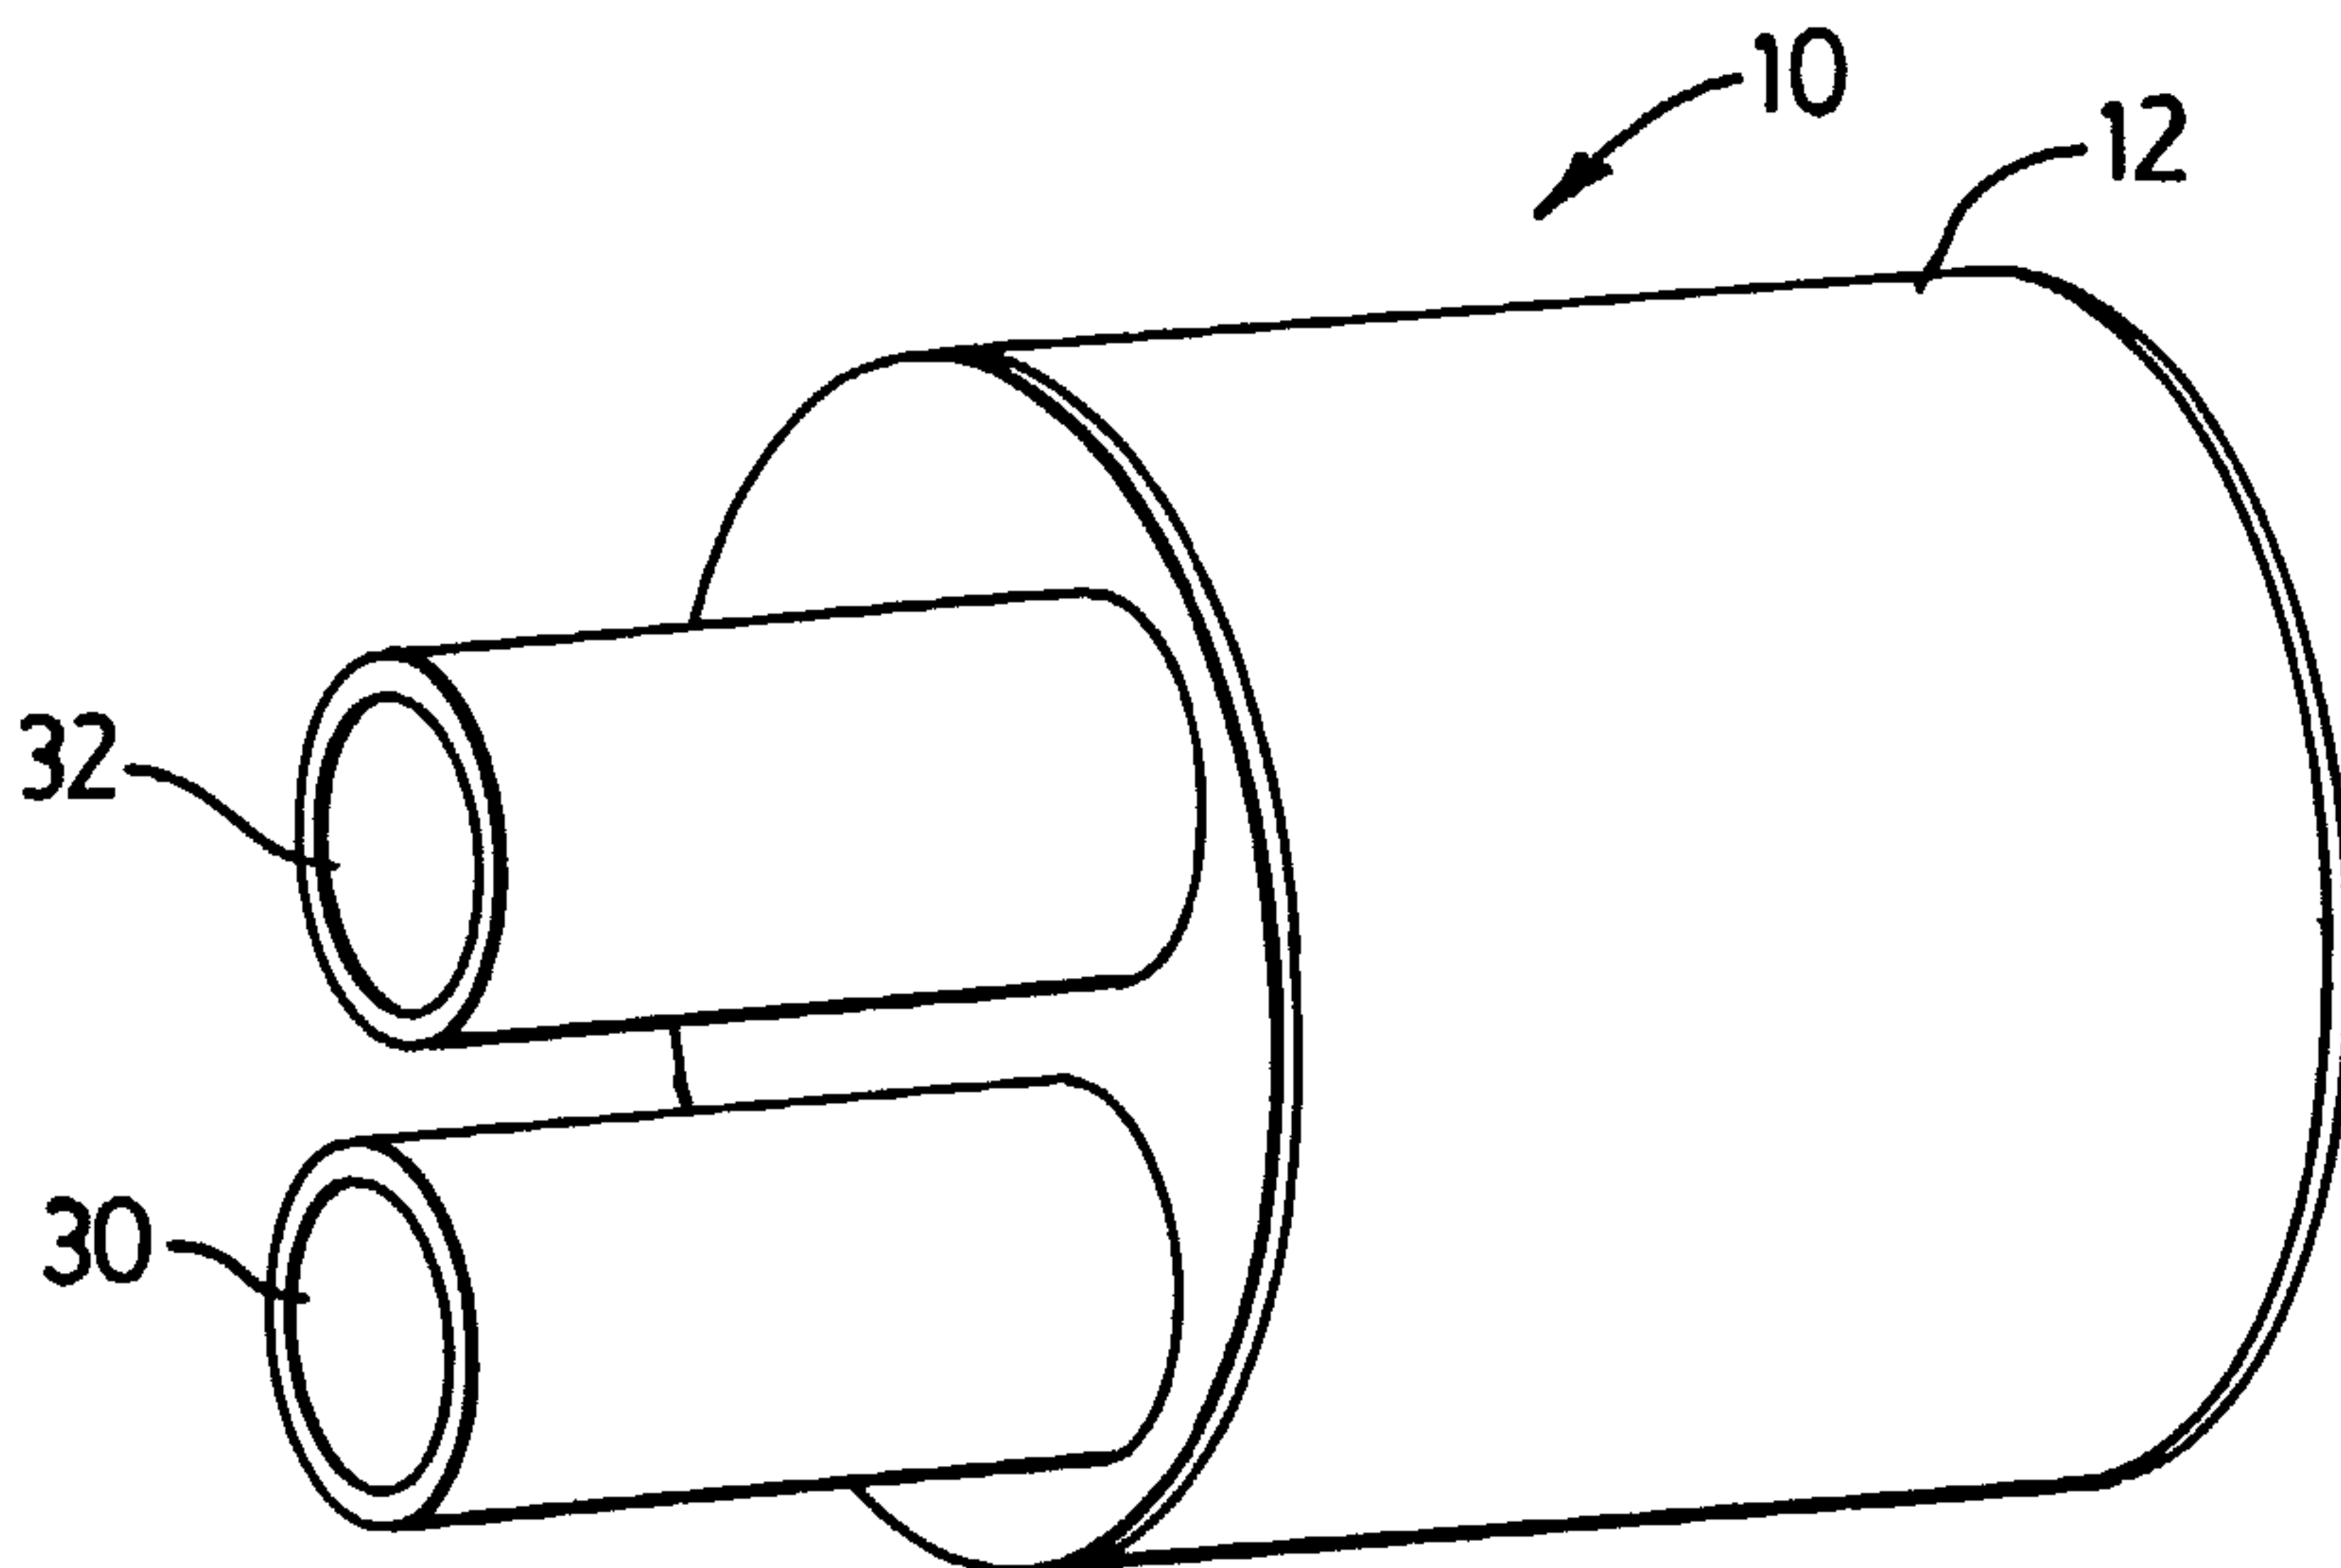
(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

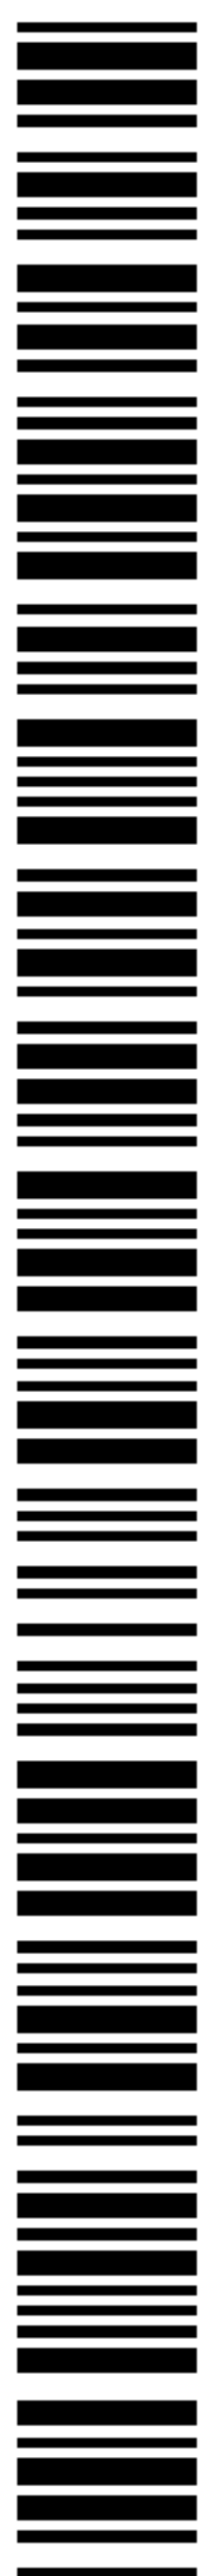
For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REVERSE FLOW CATALYTIC MUFFLER



(57) Abstract: A catalytic muffler having a housing with a first chamber and a second chamber fluidly communicating through a catalyst bed interspersed there between. A first baffle assembly in the first chamber extends between the catalyst bed and the housing. An inlet passage extends through the housing into the first chamber. An outlet passage extends through the housing into one of the first and second chambers. A second baffle assembly in the second chamber extends between the catalyst bed and the housing. The first and second baffle assemblies act in conjunction with the housing and the reactor bed to define a flow passage through the housing from the inlet passage through at least three discreet zones of the reactor bed to

the outlet passage.



**WO 03/002852 A2**



**TITLE: REVERSE FLOW CATALYTIC MUFFLER****FIELD OF THE INVENTION**

This invention relates generally to engine exhaust handling apparatus, and more particularly, to apparatus for noise abatement  
5 and catalytic treatment of internal combustion engine exhaust gasses.

**BACKGROUND OF THE INVENTION**

In the burning of petroleum fuels in an internal combustion engine, hydrocarbons in the fuel and nitrogen and oxygen from the  
10 air used to combust the fuel combine to yield various oxides and nitrides, principally comprising carbon monoxide, carbon dioxide, nitrous oxide and nitric oxide. Waste materials in the fuel, such as sulphur produce other oxides such as sulphur dioxide. Additionally, some of the fuel passes into the exhaust partially  
15 combusted or uncombusted.

Often the particular oxides are more harmful to human beings than other oxides of the same elements. For example carbon dioxide may pose less of a hazard than carbon monoxide. In order to minimize the more harmful emissions, most larger internal  
20 combustion engines, particularly those used in automobiles are equipped with exhaust gas catalysts in their exhaust systems ("catalytic converters") to convert less desirable oxides to more desirable oxides.



Automobiles generally have a fair amount of space available for both a catalytic converter and for noise abatement apparatus such as a muffler and a resonator to suppress the noise ordinarily associated with internal combustion engine operation.

5           Smaller engines in applications such as lawnmowers are significant generators of pollutants but in the past have seldom if ever been equipped with exhaust treatment apparatus, despite that for their size they often generate proportionately more harmful emissions. A reason for this may be the lack of expensive and  
10 sophisticated engine management systems found in more expensive applications such as automobiles.

It is an object of the present invention to provide a catalytic muffler of compact dimensions which is easily accommodated in small displacement internal combustion engine applications.

15           It is a further object of the present invention to provide such a compact catalytic muffler which also has noise attenuation capabilities to obviate the need for a separate muffler.

It is also an object of the present invention to provide a noise abating catalytic muffler design for small engine applications  
20 which is simple and comparatively inexpensive to produce and which lends itself readily both to O.E.M. and retrofit applications.

### **SUMMARY OF THE INVENTION**

A catalytic muffler having a housing with a first chamber and a second chamber fluidly communicating through a catalyst  
25 bed interspersed there between. A first baffle assembly in the first



chamber extends between the catalyst bed and the housing. An inlet passage extends through the housing into the first chamber. An outlet passage extends through the housing into one of the first and second chambers. A second baffle assembly in the second  
5 chamber extends between the catalyst bed and the housing. The first and second baffle assemblies act in conjunction with the housing and the reactor bed to define a flow passage through the housing from the inlet passage through at least three discrete zones of the reactor bed to the outlet passage.

10 The inlet and outlet passages may extend through the first chamber, either through an end of the first chamber or a side of the first chamber as desired. Alternatively, the inlet passage may extend into the first chamber and the outlet passage may extend into the second chamber.

15 The reactor bed may include an oxidizing catalyst in one part thereof and a reducing catalyst in another part thereof.

The reducing catalyst may be upstream of the oxidizing catalyst.

The housing may be cylindrical.

20 **DESCRIPTION OF DRAWINGS**

Preferred embodiments of the invention are described in detail below with reference to the accompanying figures in which:

Figure 1 is perspective view of a catalytic muffler according to the present invention;



Figure 2 is an exploded perspective view corresponding to Figure 1;

Figure 2A is a partially exploded view of a catalytic converter according to Figure 2 showing an alternate housing design;

Figure 2B is a partially exploded view of yet another embodiment for the housing of the catalytic converter of Figure 2;

Figure 3 is an elevational view of the catalytic muffler of Figure 1;

Figure 4 is an end elevation of the left side of the catalytic muffler of Figure 1;

Figure 5 is an end elevation of the right side of the catalytic muffler of Figure 1;

Figure 6 is a section on line 6-6 of Figure 3;

Figure 7 is a section on line 7-7 of Figure 3;

Figure 8 is a perspective view of an alternate embodiment of a catalytic muffler according to the present invention having an end inlet and a side outlet;

Figure 8A is a perspective view of another alternate embodiment of a catalytic muffler according to the present invention having a side inlet and a side outlet; and,

Figure 9 is an exploded view of an alternate embodiment catalytic muffler according to the present invention;



## **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

A catalytic muffler according to the present invention is generally indicated by reference 10 in the accompanying illustrations. The catalytic muffler 10 is illustrated as having a generally cylindrical housing 12 however it will be appreciated that  
5 other shapes of housing might also be utilized.

The housing 12 has a first chamber 14 at one end thereof, and, a second chamber 16 at the opposite end. A catalyst bed 18 occupies the space between the first chamber 14 and the second  
10 chamber 16. The catalyst bed may be a catalyst bearing ceramic (or possibly other) substrate having a honeycomb like configuration with a plurality of discrete flow passages 20 extending longitudinally therethrough. Accordingly, the first and second chambers, 14 and 16 respectively, fluidly communicate with each  
15 other through the reactor bed 18.

An inlet passage 30 extends through the housing 12 into the first chamber 14. Depending on the application, the inlet passage may extend into either a side (Figure 8) or an end of the housing. Also depending on the application, the inlet passage may have  
20 various configurations and include such arrangements as a threaded opening and a tubular elbow. The specific configuration chosen will generally depend on the exhaust system configuration and availability of space in the intended application.

An outlet passage 32 may extend either from the first  
25 chamber 14 or the second chamber 16. The outlet passage 32 may extend either from a side or an end of the housing 12. As with the



inlet passage 30, the location and configuration of the outlet passage 32 will generally depend on the parameters associated with the intended application.

A first baffle assembly 40 is housed within the first chamber 14. The first baffle assembly 40 is a member with a generally T-shaped configuration. The member extends between the housing 12 and the reactor bed so as to divide the first chamber 14 into first, second and third parts, 42, 44 and 46 respectively. The first part 42 and the third part 46 each represent about one fourth ( $1/4$ ) of the volume of the first chamber 14. The third part represents about one half ( $1/2$ ) of the volume of the first chamber 14.

A second baffle assembly 50 is housed within the second chamber 16 and extends between the housing 12 and the reactor bed 18 to divide the second chamber into first and second parts 52 and 54 respectively. The first part 52 and the second part 54 are of roughly equal volume.

The first baffle assembly 40, second baffle assembly 50, housing 12 and reactor bed 18 cooperate to define a flow passage through at least first, second and third discrete zones, 60, 62 and 64, respectively, of the reactor bed 18.

Gas is therefore directed to flow from the inlet passage 30 into the first part 42 of the first chamber 14, through the first zone 60, through the first part 52 of the second chamber 16, through the second zone 62 of the reactor bed 18 into the second part 44 of the first chamber 12 and through the third zone 64 of the reactor bed into the second part 54 of the second chamber 18. If the outlet



passage 32 communicates with the second part 54 of the second chamber 18, gas will be discharged therethrough.

If the outlet passage 32 communicates with the third part 46 of the first chamber 14, gas will flow from the second part 54 of the second chamber 16 through a fourth zone 66 of the reactor bed, into the third part of the first chamber 14 and out through the outlet 32. In this latter embodiment, gas will flow four times through the reactor bed 18 albeit through a different zone each time. In the former embodiment, gas will flow three times through the reactor bed 18, through a different zone each time.

The reactor bed 18 may itself be made up of more than one section and one section may bear an oxidizing catalyst with another section bearing a reducing catalyst. It is expected that the catalytic muffler 10 will be more effective if the reducing section is upstream of the oxidizing section, for example, if the first zone 60 and second zone 62 promote reduction and the third zone 64 and fourth zone 66 (if there is a fourth zone) promote oxidation.

One manner of configuring the catalytic muffler 10 is illustrated in the exploded view of Figure 2. The housing 12 is made up of first and second disc-shaped parts 80 and 82 which may be joined at respective outer edges to a sleeve 90. The first baffle member 40 may be generally P-shaped, or alternatively, T-shaped and act as a spacer to locate the reactor bed 16 within the housing 12. The second baffle member 50 may be rectangular or alternatively, generally D-shaped and act as a further spacer to locate the reactor bed 18 within the housing 12. Retainer rings 92



may also be provided to engage the interior of the sleeve 90 to locate the reactor bed 18.

Alternatively, as illustrated in Figure 2B the housing 12 may be in three parts with a first cup-shaped part 88 and second cup-  
5 shaped part 92 capping opposite ends of the sleeve 90.

As yet a further alternative, the housing may be made up of first and second cup-shaped parts 94, 96 respectively which may be joined at respective outer edges 98 and 100.

The above description is intended in an illustrative rather  
10 than a restrictive sense. Variations to the exact structures described may be apparent to those skilled in such structures without departing from the spirit and scope of the present invention as defined by the claims set out below.



**CLAIMS:**

1. A catalytic muffler (10) comprising:

a housing (12) having a first chamber (14), and a second chamber (16) fluidly communicating through a catalyst bearing reactor bed (18) interspersed therebetween; said reactor bed (18) having a plurality of discrete flow passages (20) extending longitudinally therethrough to provide fluid communication between said first and second chamber (14, 16); characterised in that the catalytic muffler (10) further comprises:

a first baffle assembly (40) extending longitudinally through said first chamber (14) between said catalyst bearing reactor bed (18) and said housing (12) to longitudinally partition said first chamber (14);

an inlet passage (30) extending through said housing (12) into said first chamber (14);

an outlet passage (32) extending through said housing (12) into one of said first chamber (14) and said second chamber (16);

a second baffle assembly (50) in said second chamber (16) extending between said reactor bed (18) and said housing (12);

said first and second baffle assemblies (40, 50) are configured in a manner that they are acting in conjunction with said housing (12) and said reactor bed (18) to define a flow passage through said housing (12) from said inlet passage (30) to said outlet



passage (32) requiring at least three sequential longitudinal passes through said reactor bed (18) with each subsequent of said passes being through a discrete, laterally adjacent zone (60, 62, 64, 66)

of said reactor bed (18) and opposite in direction to an immediately preceding of said passes.

2. A catalytic muffler (10) as claimed in claim 1 wherein:

one of said inlet and said outlet passages (30, 32) extends through an end wall of said housing (12);

the other of said inlet and said outlet passages (32, 30) extends through a side wall of said housing (12).

3. A catalytic muffler (10) as claimed in claim 1 wherein:

said inlet and said outlet passages (30, 32) extend through a side wall of said housing (12).

4. A catalytic muffler (10) as claimed in claim 1 wherein:

said inlet and outlet passages (30, 32) extend through an end wall of said housing (12).

5. A catalytic muffler (10) as claimed in any one of claims 2, 3 or 4 wherein:

said reactor bed (18) includes an oxidizing catalyst in one part thereof and a reducing catalyst in another part thereof.



6. A catalytic muffler (10) as claimed in claim 4 wherein:  
  
said inlet passage (30) extends into said first chamber (14);  
  
said outlet passage (32) extends into said second chamber (16).
7. A catalytic muffler (10) as claimed in claim 6 wherein:  
  
said reducing catalyst is upstream of said oxidizing catalyst.
8. A catalytic muffler (10) as claimed in claim 7 wherein:  
  
said reactor bed (18) is made up of sections with said oxidizing catalyst and said reducing catalyst being on different of said sections.
9. A catalytic muffler (10) as claimed in any one of claims 1 to 8, wherein:  
  
said housing (12) is cylindrical.
10. A catalytic muffler (10) as claimed in claim 1 or 2 wherein:  
  
said housing (12) is cylindrical and defined by cup shaped first and second parts (94, 96) joined at respective outer edges (98, 100); and,  
  
said first and second baffle members (40, 50) act as spacers to locate said reactor bed (18) within said housing (12).
11. A catalytic muffler (10) as claimed in claim 1 or 2 wherein:

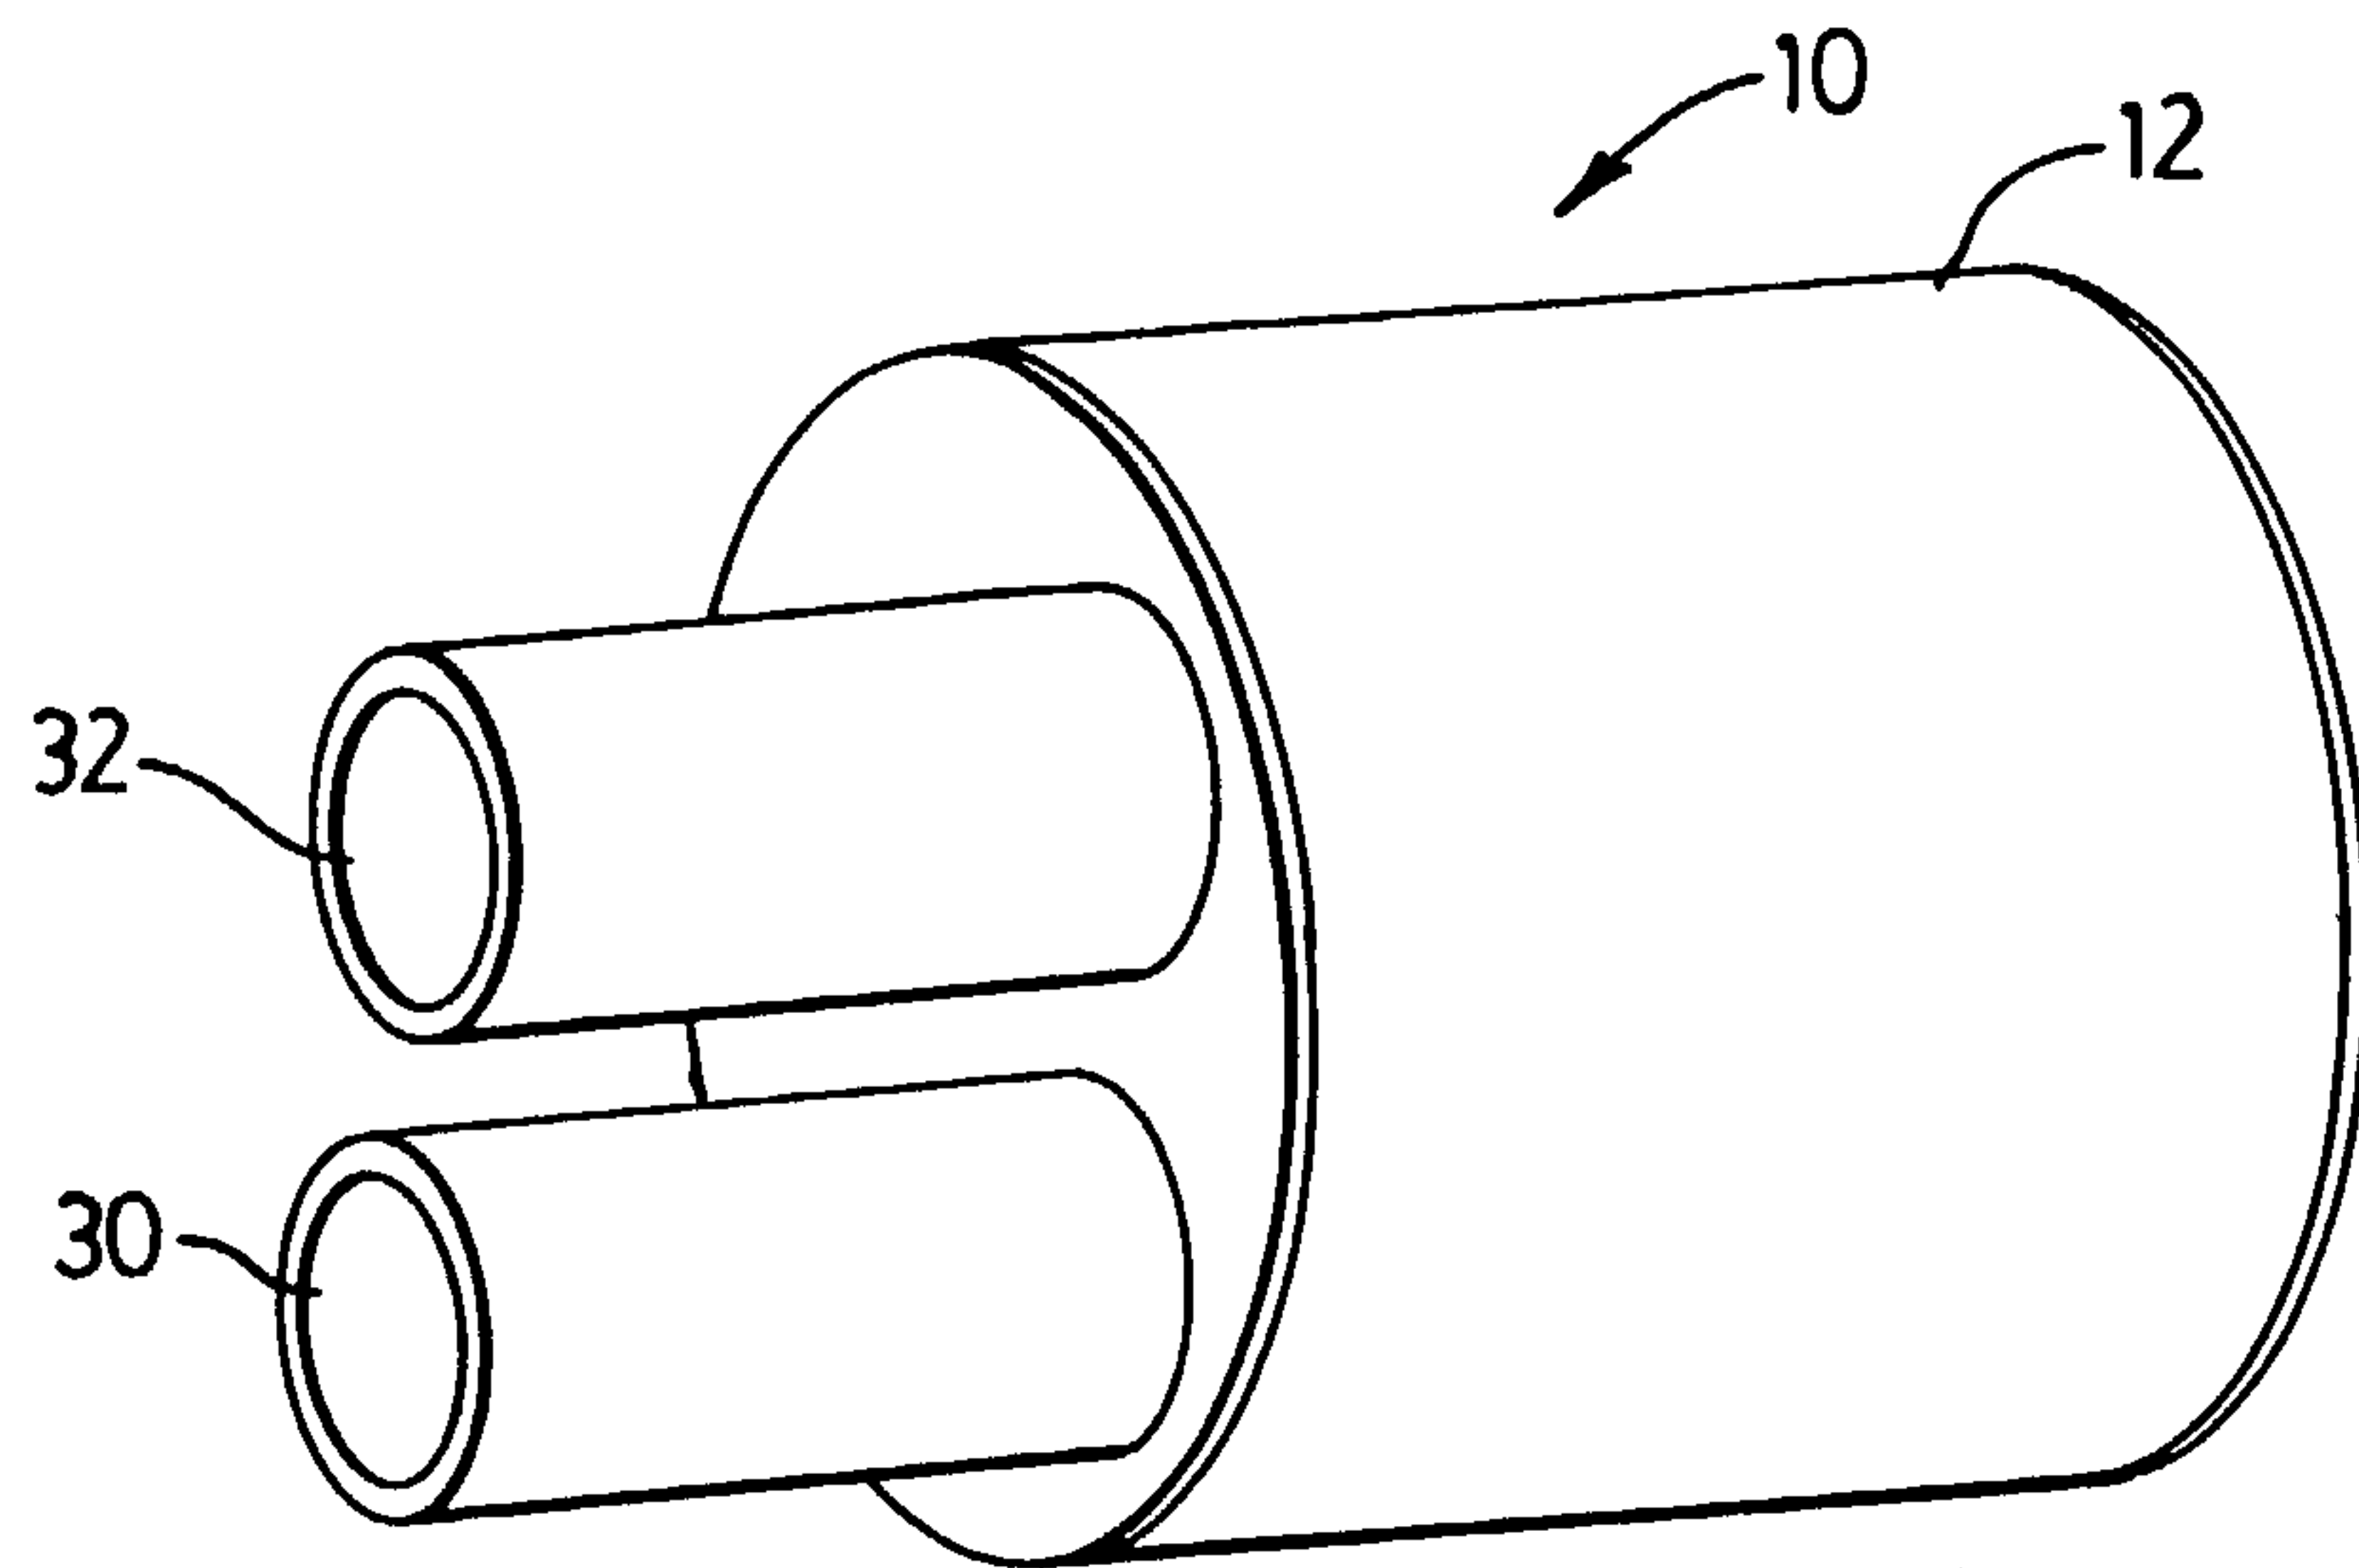
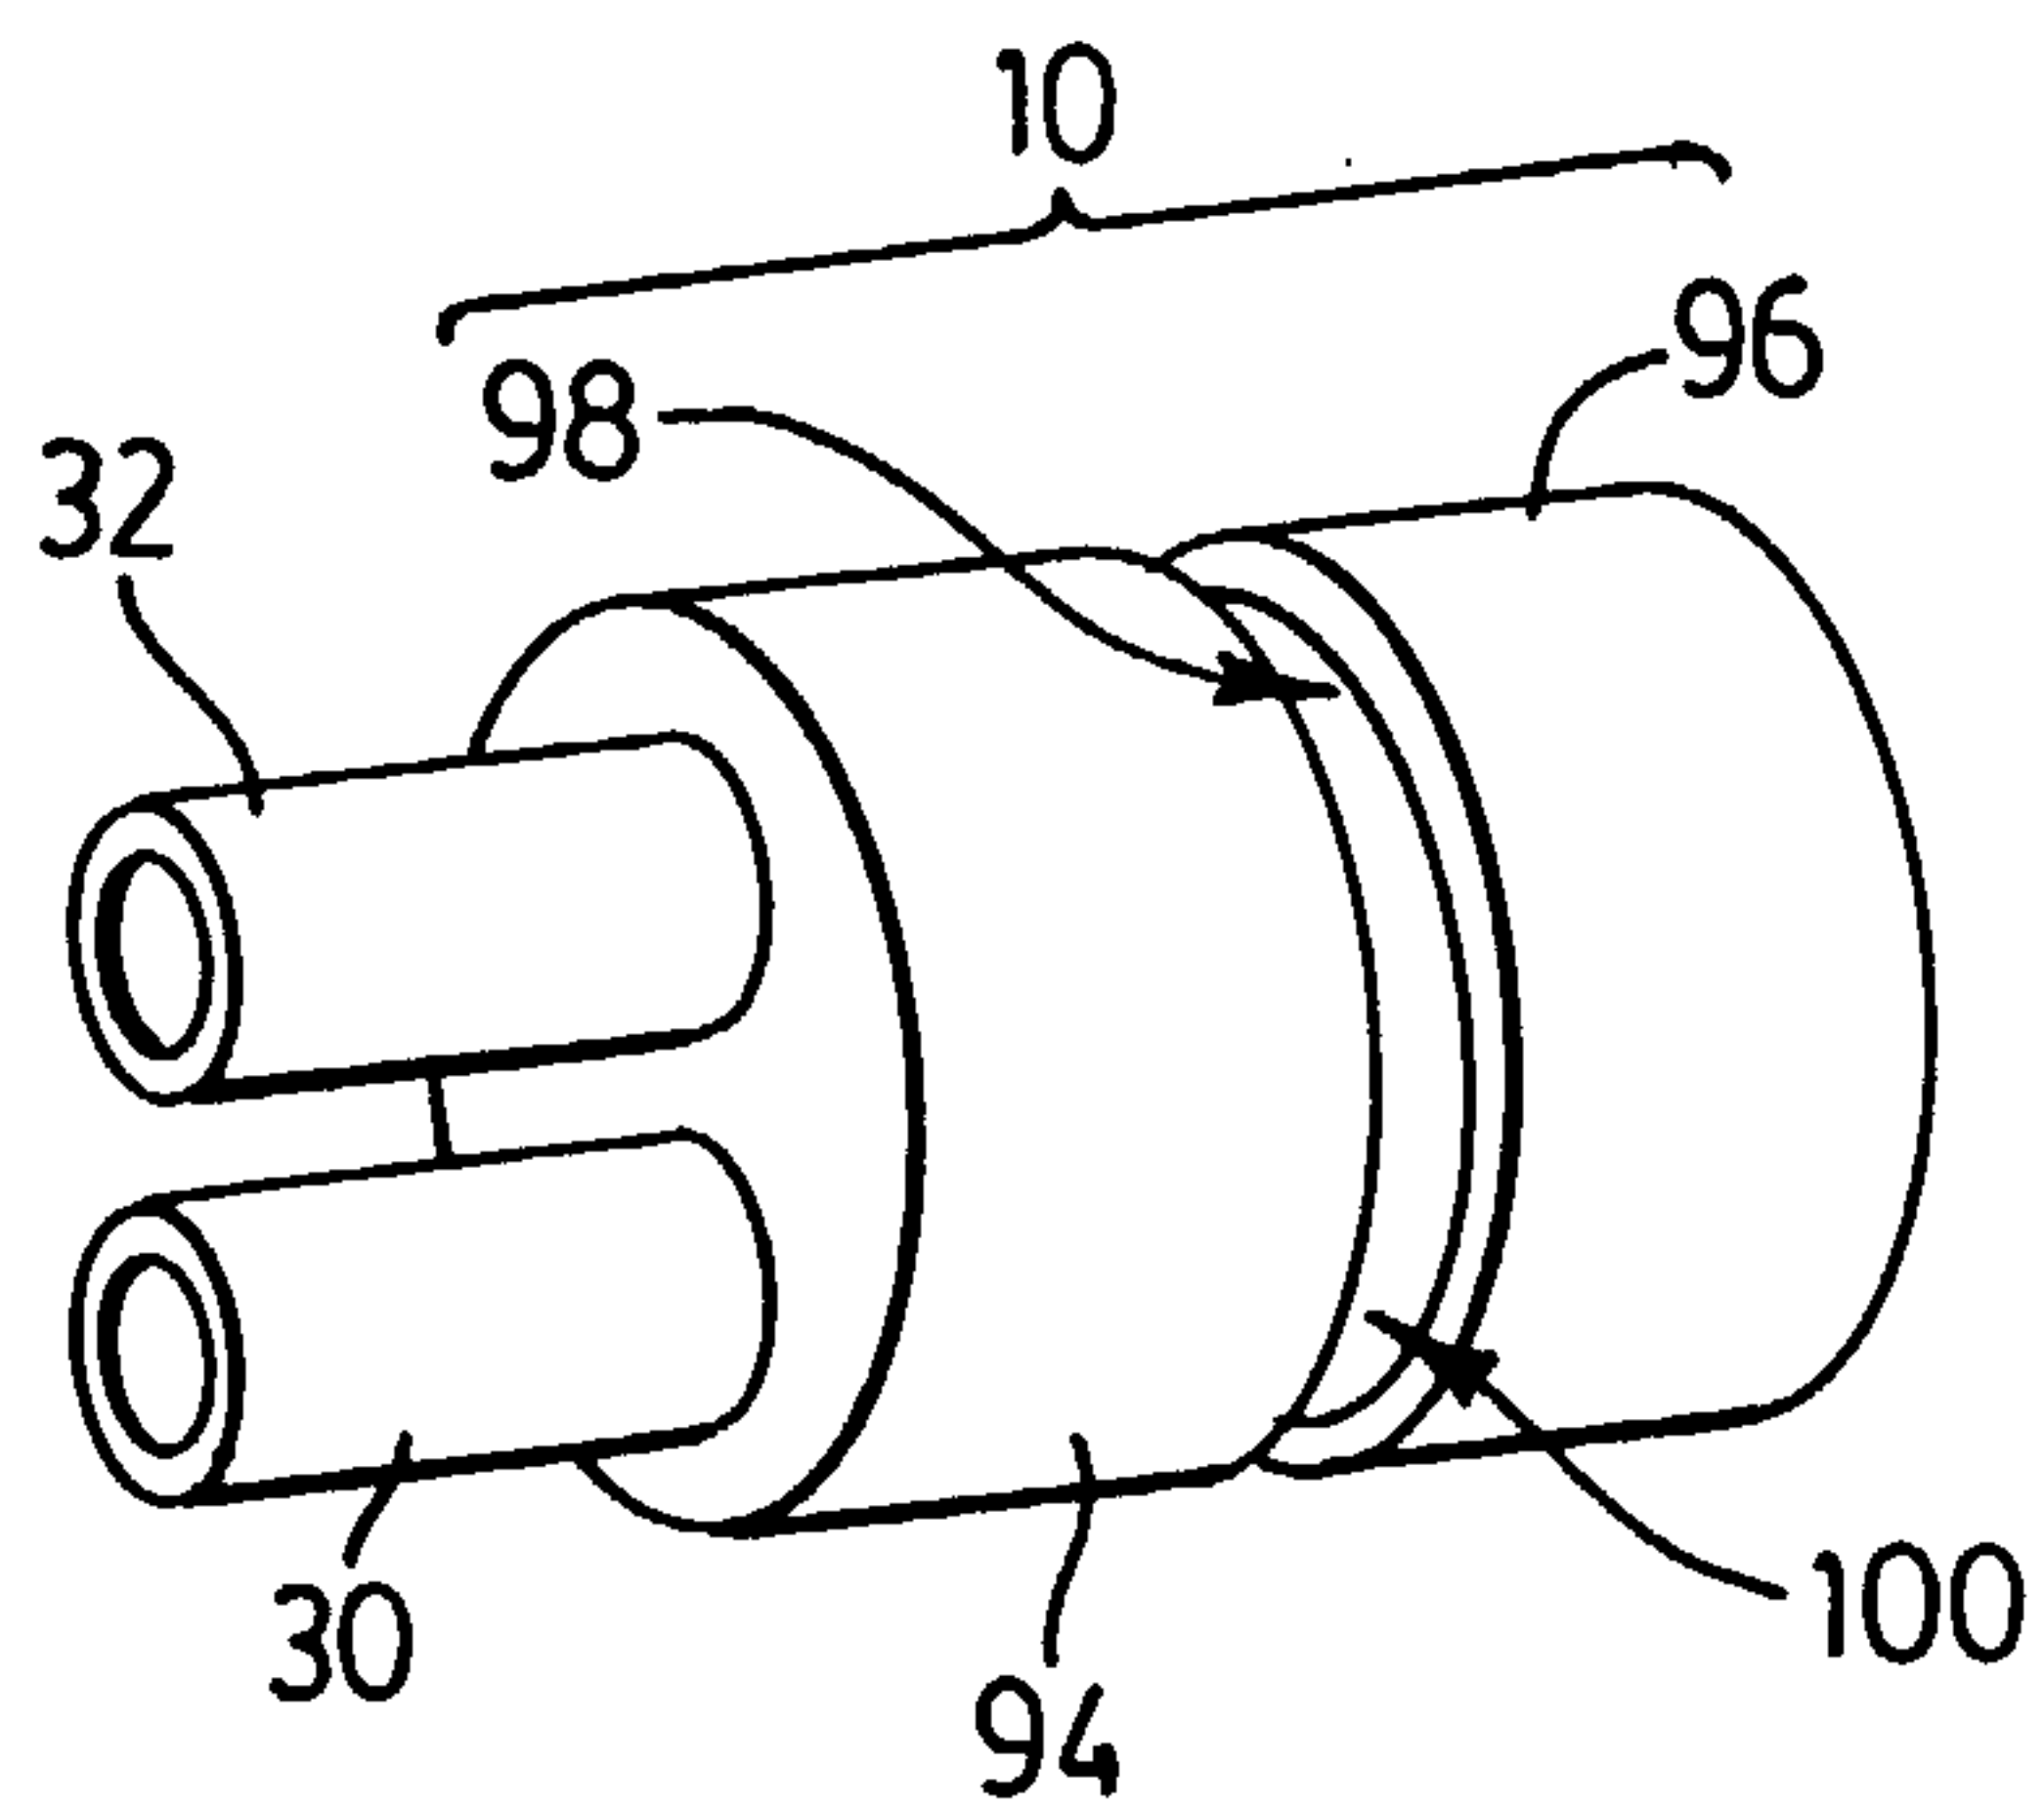
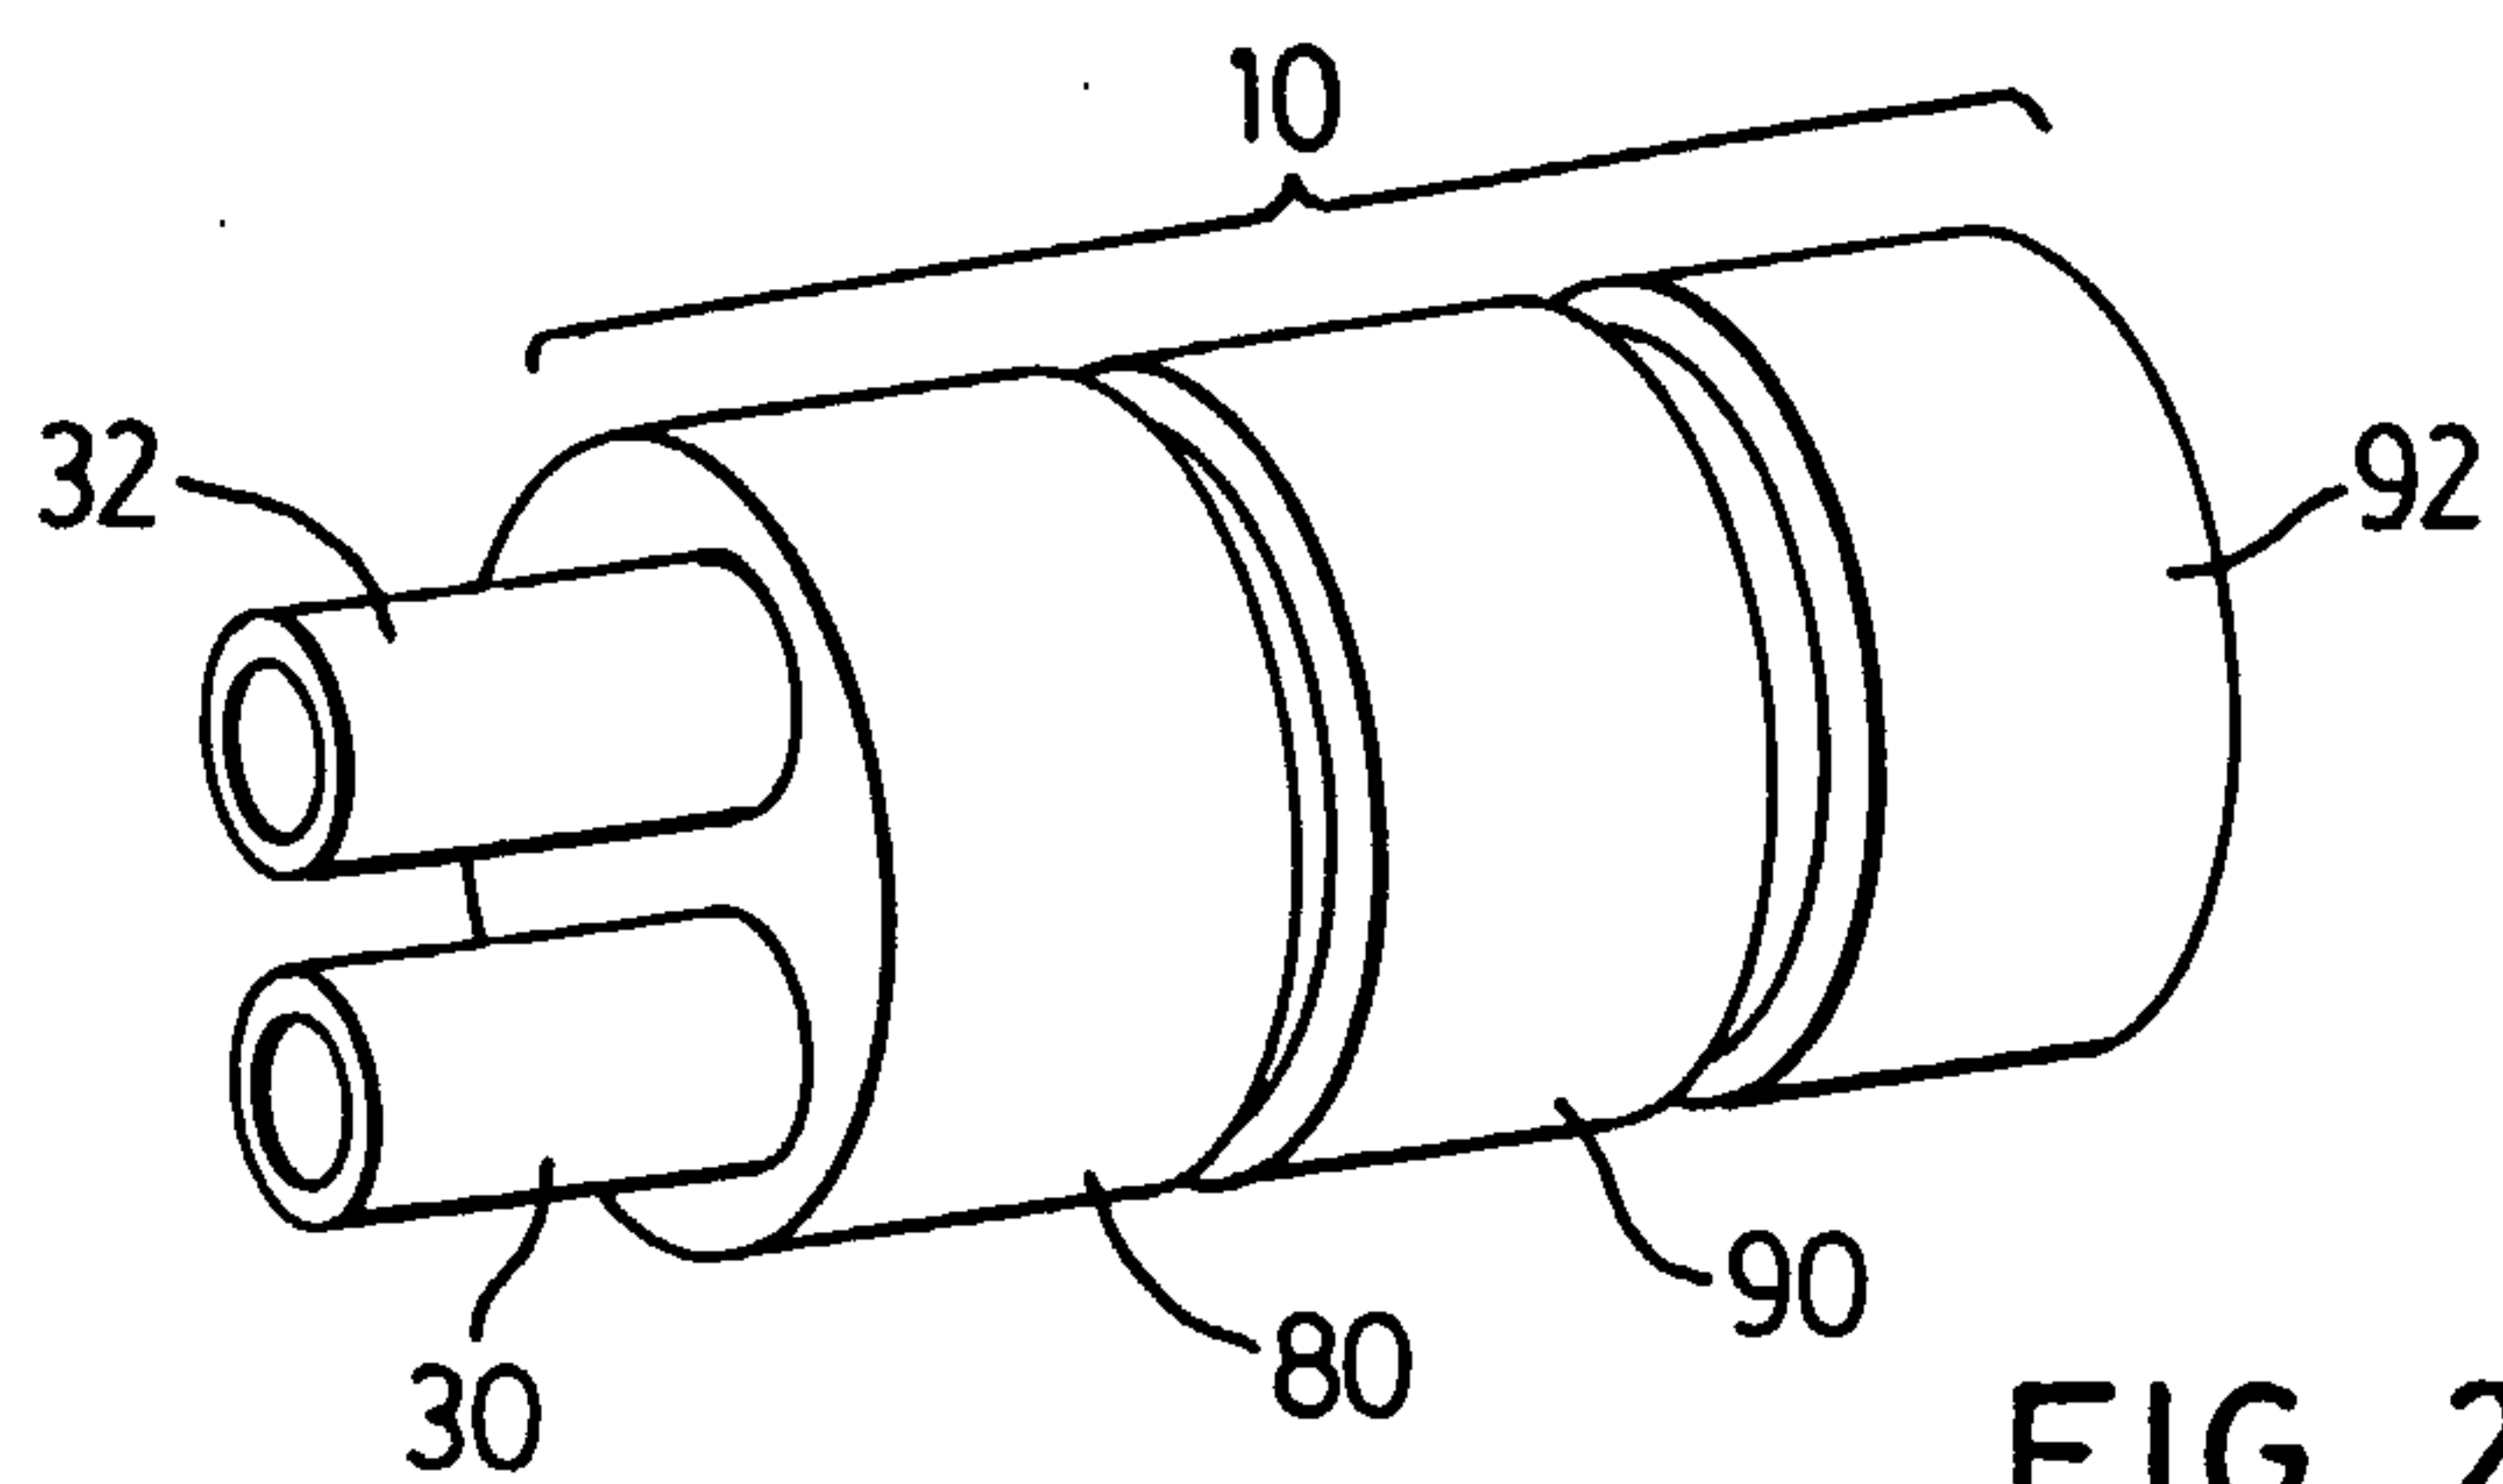


said housing (12) is cylindrical and made up of cup shaped first and second parts (94, 96), joined at respective outer edges (98, 100) to respective ends of a sleeve (90); and,

said first and second baffle assemblies (40, 50) act as spacers to locate said reactor bed (18) within said housing (12).

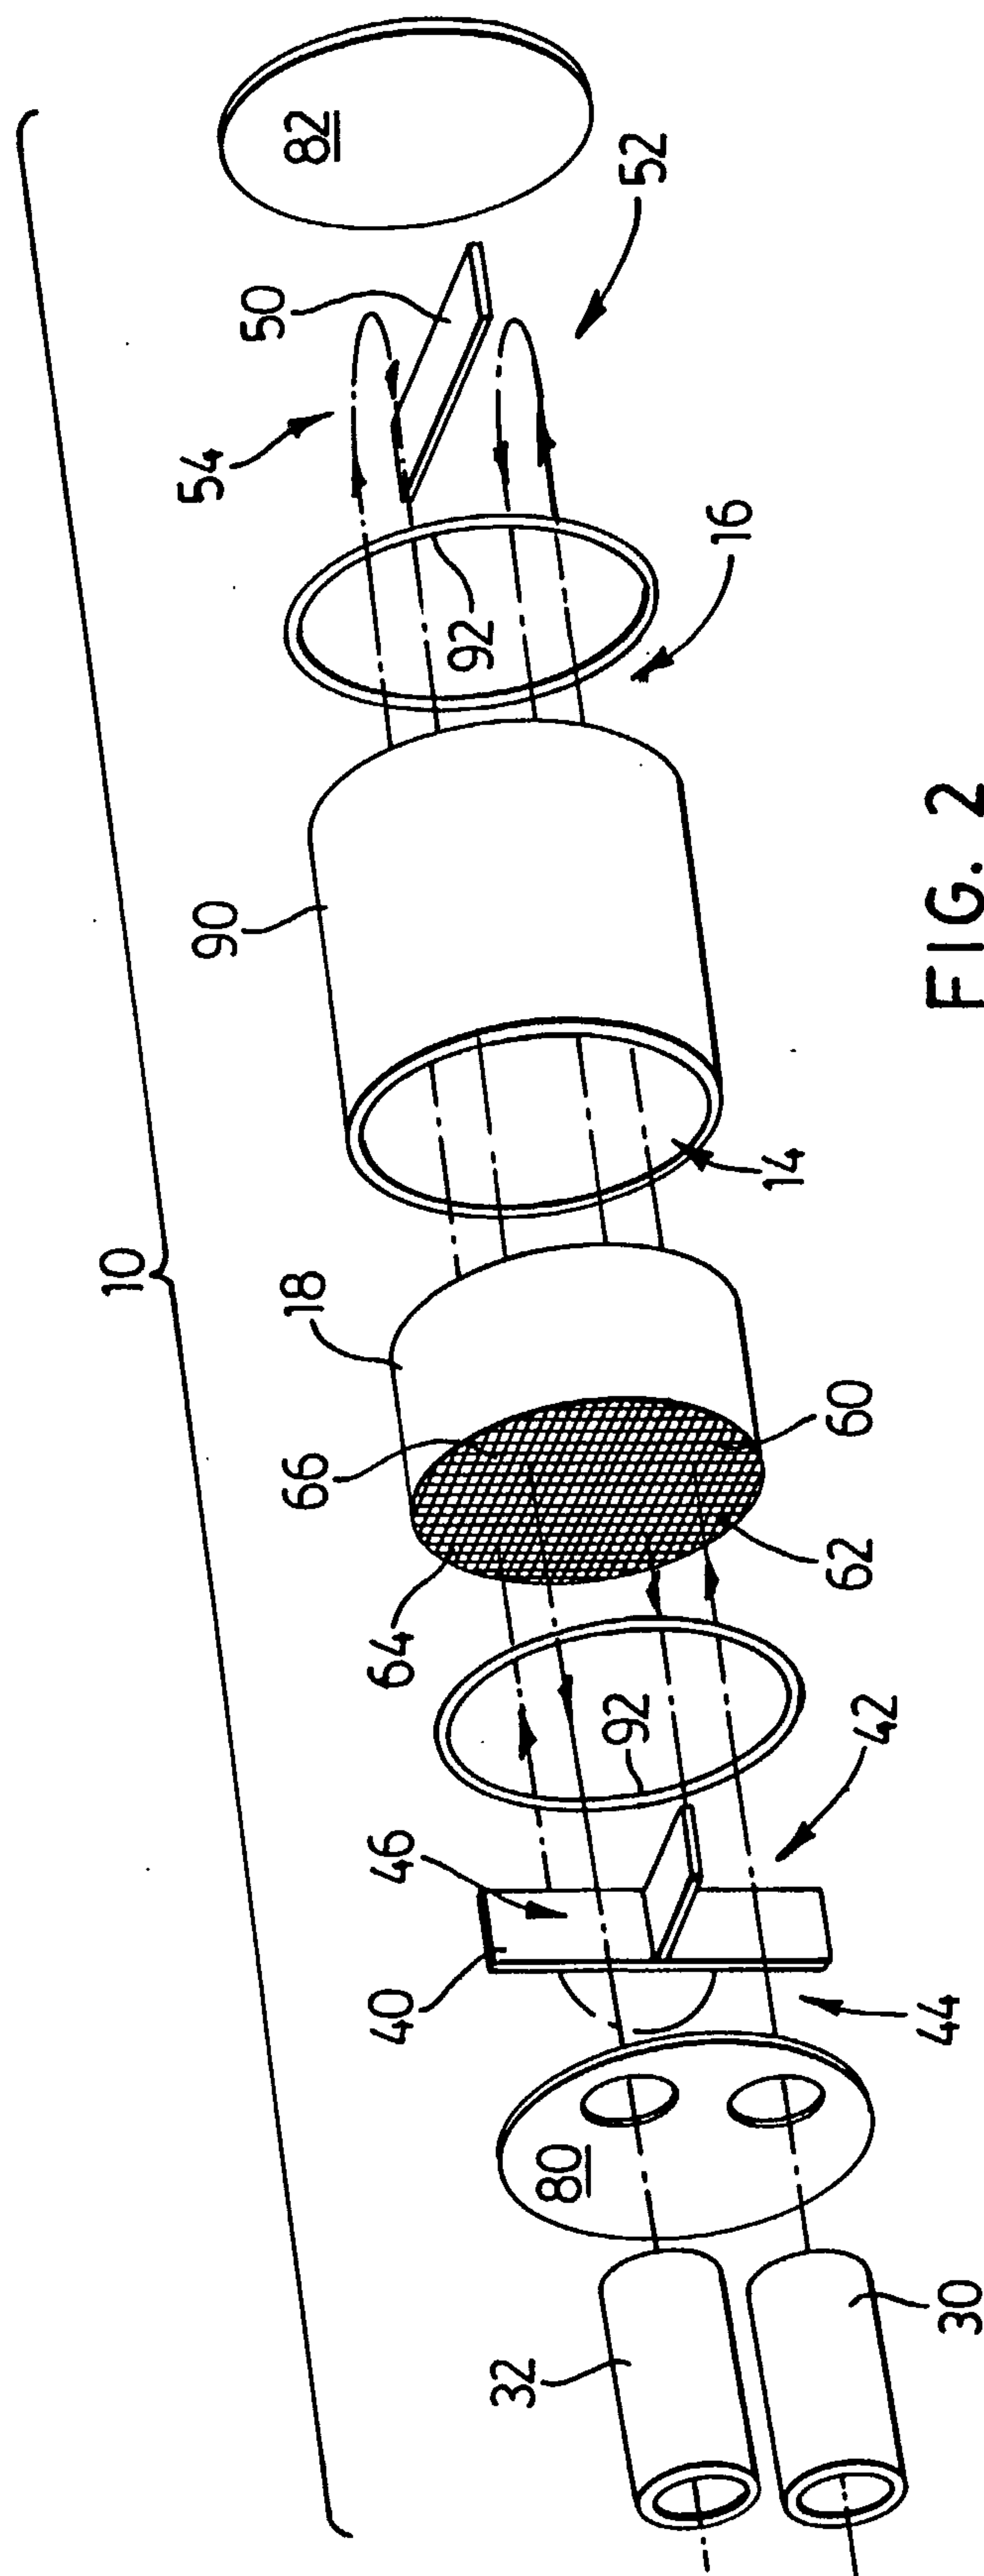


1/6

FIG. 1FIG. 2AFIG. 2B

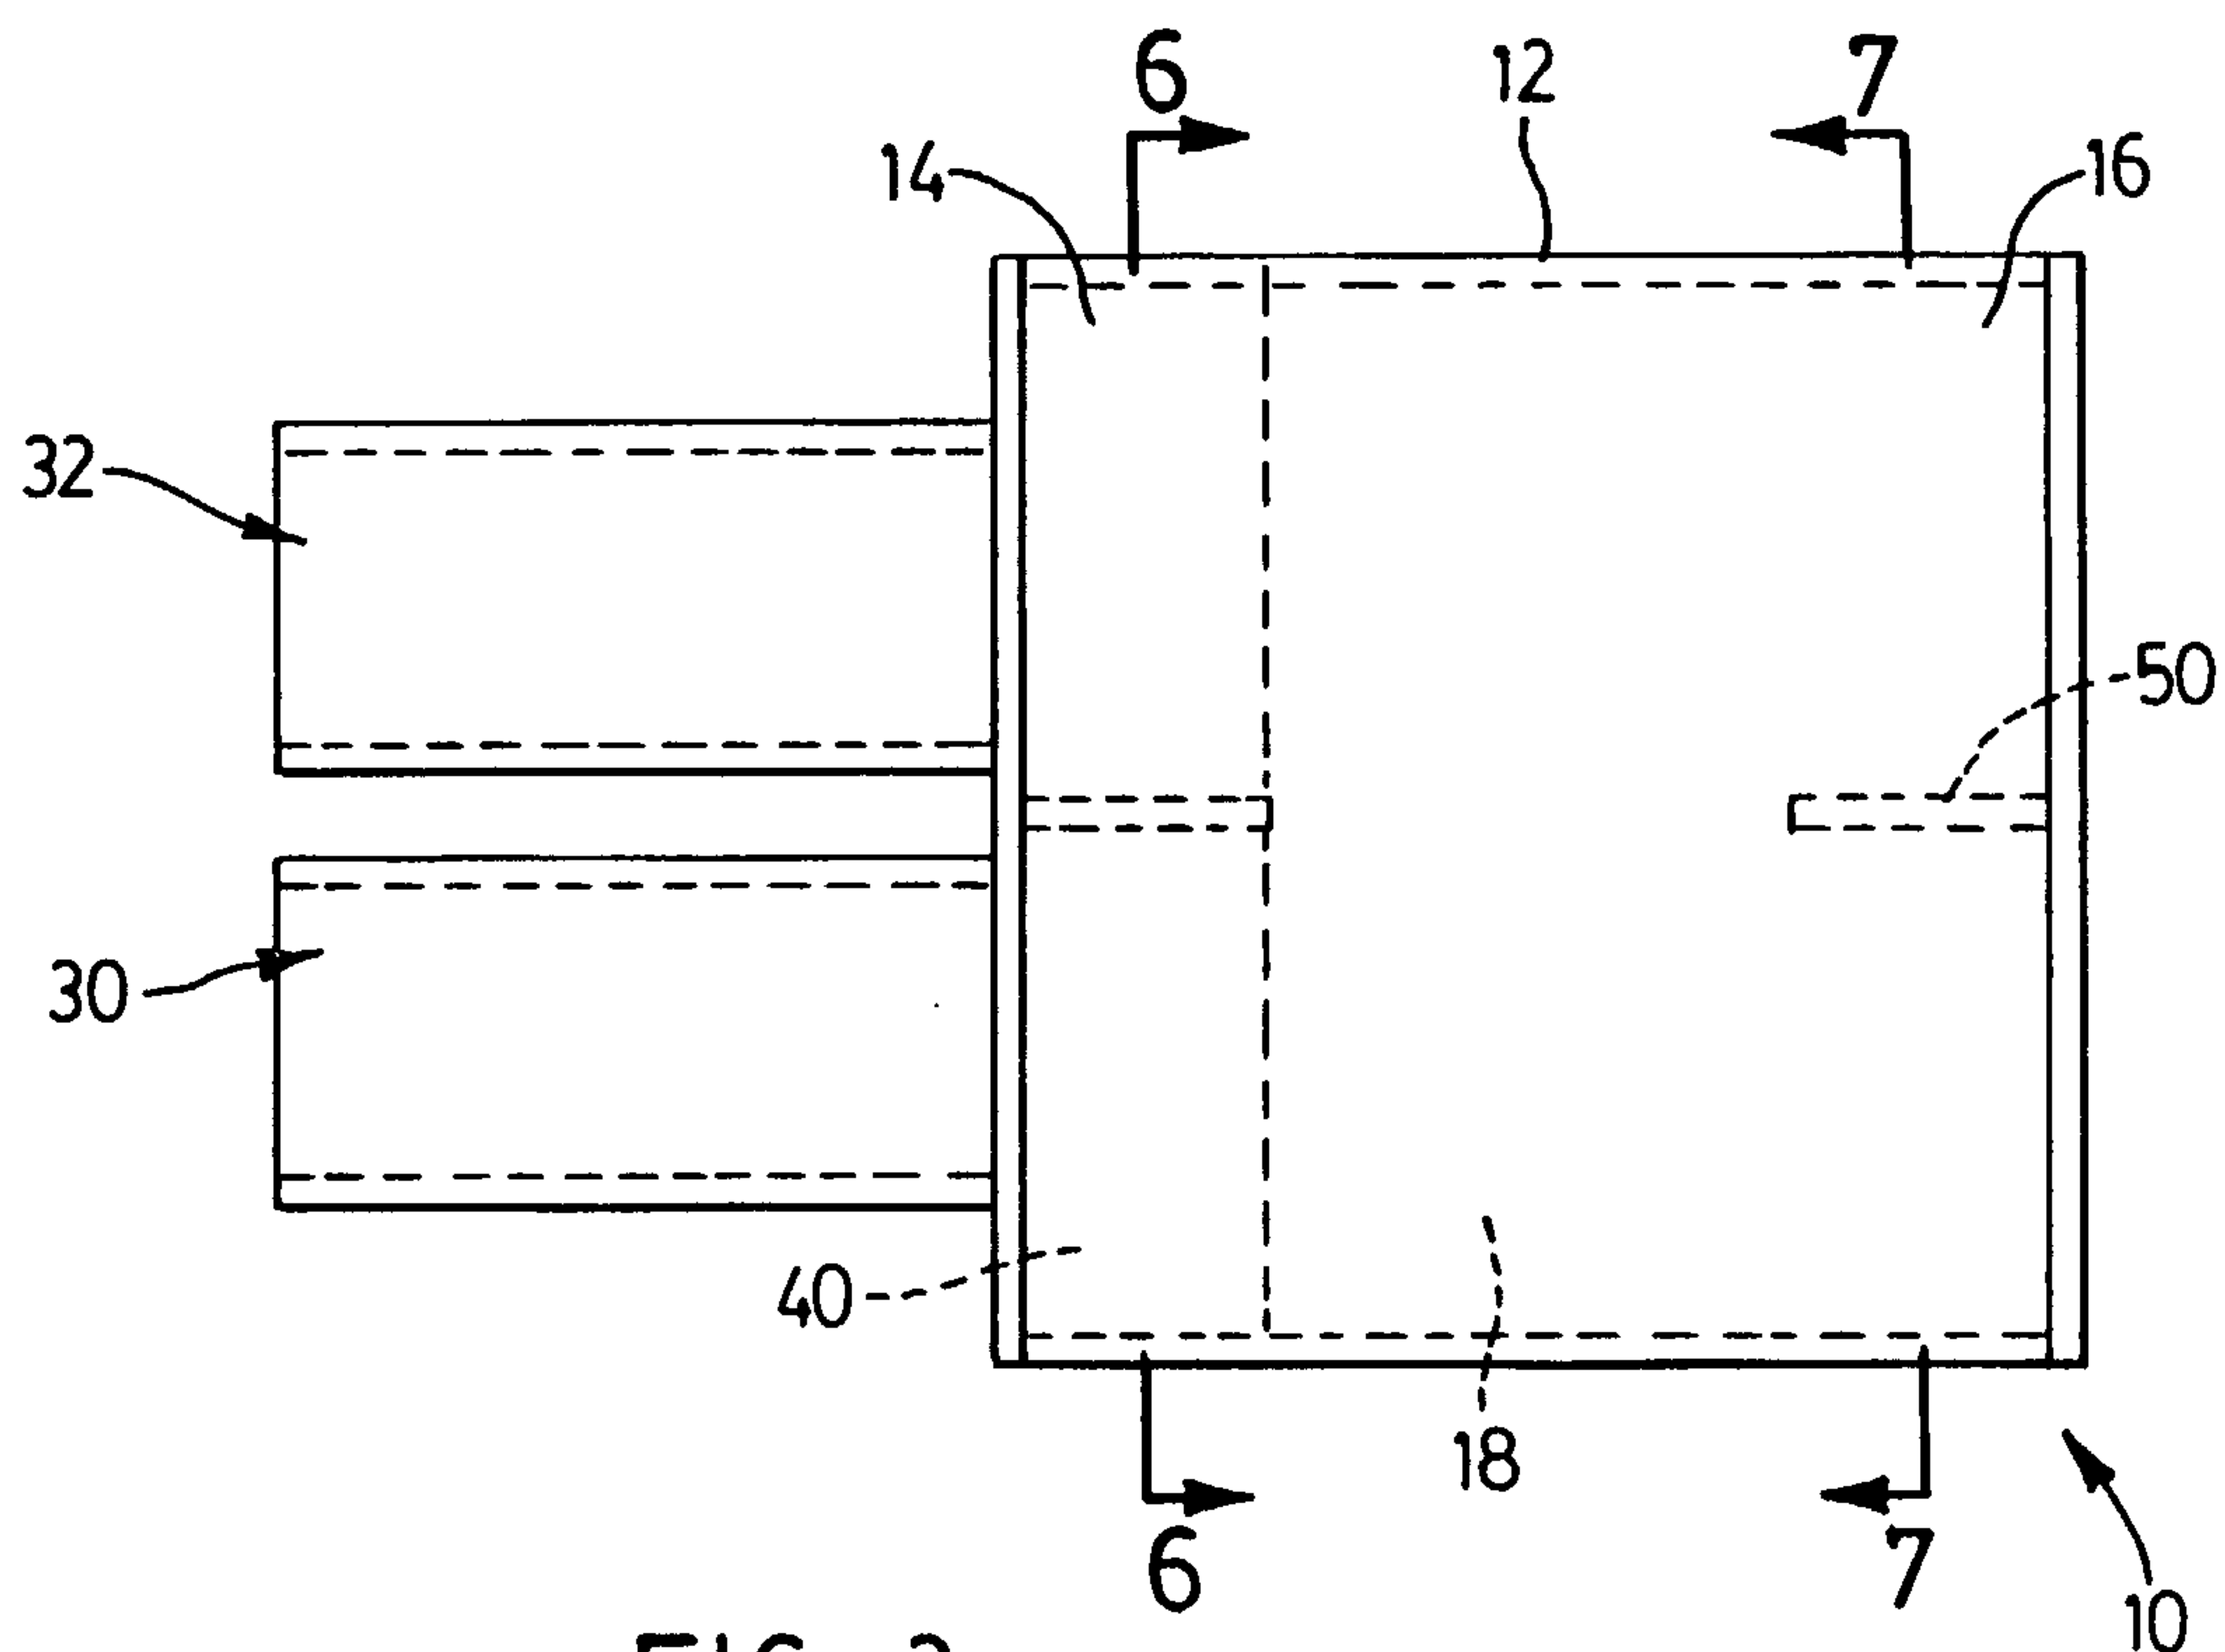
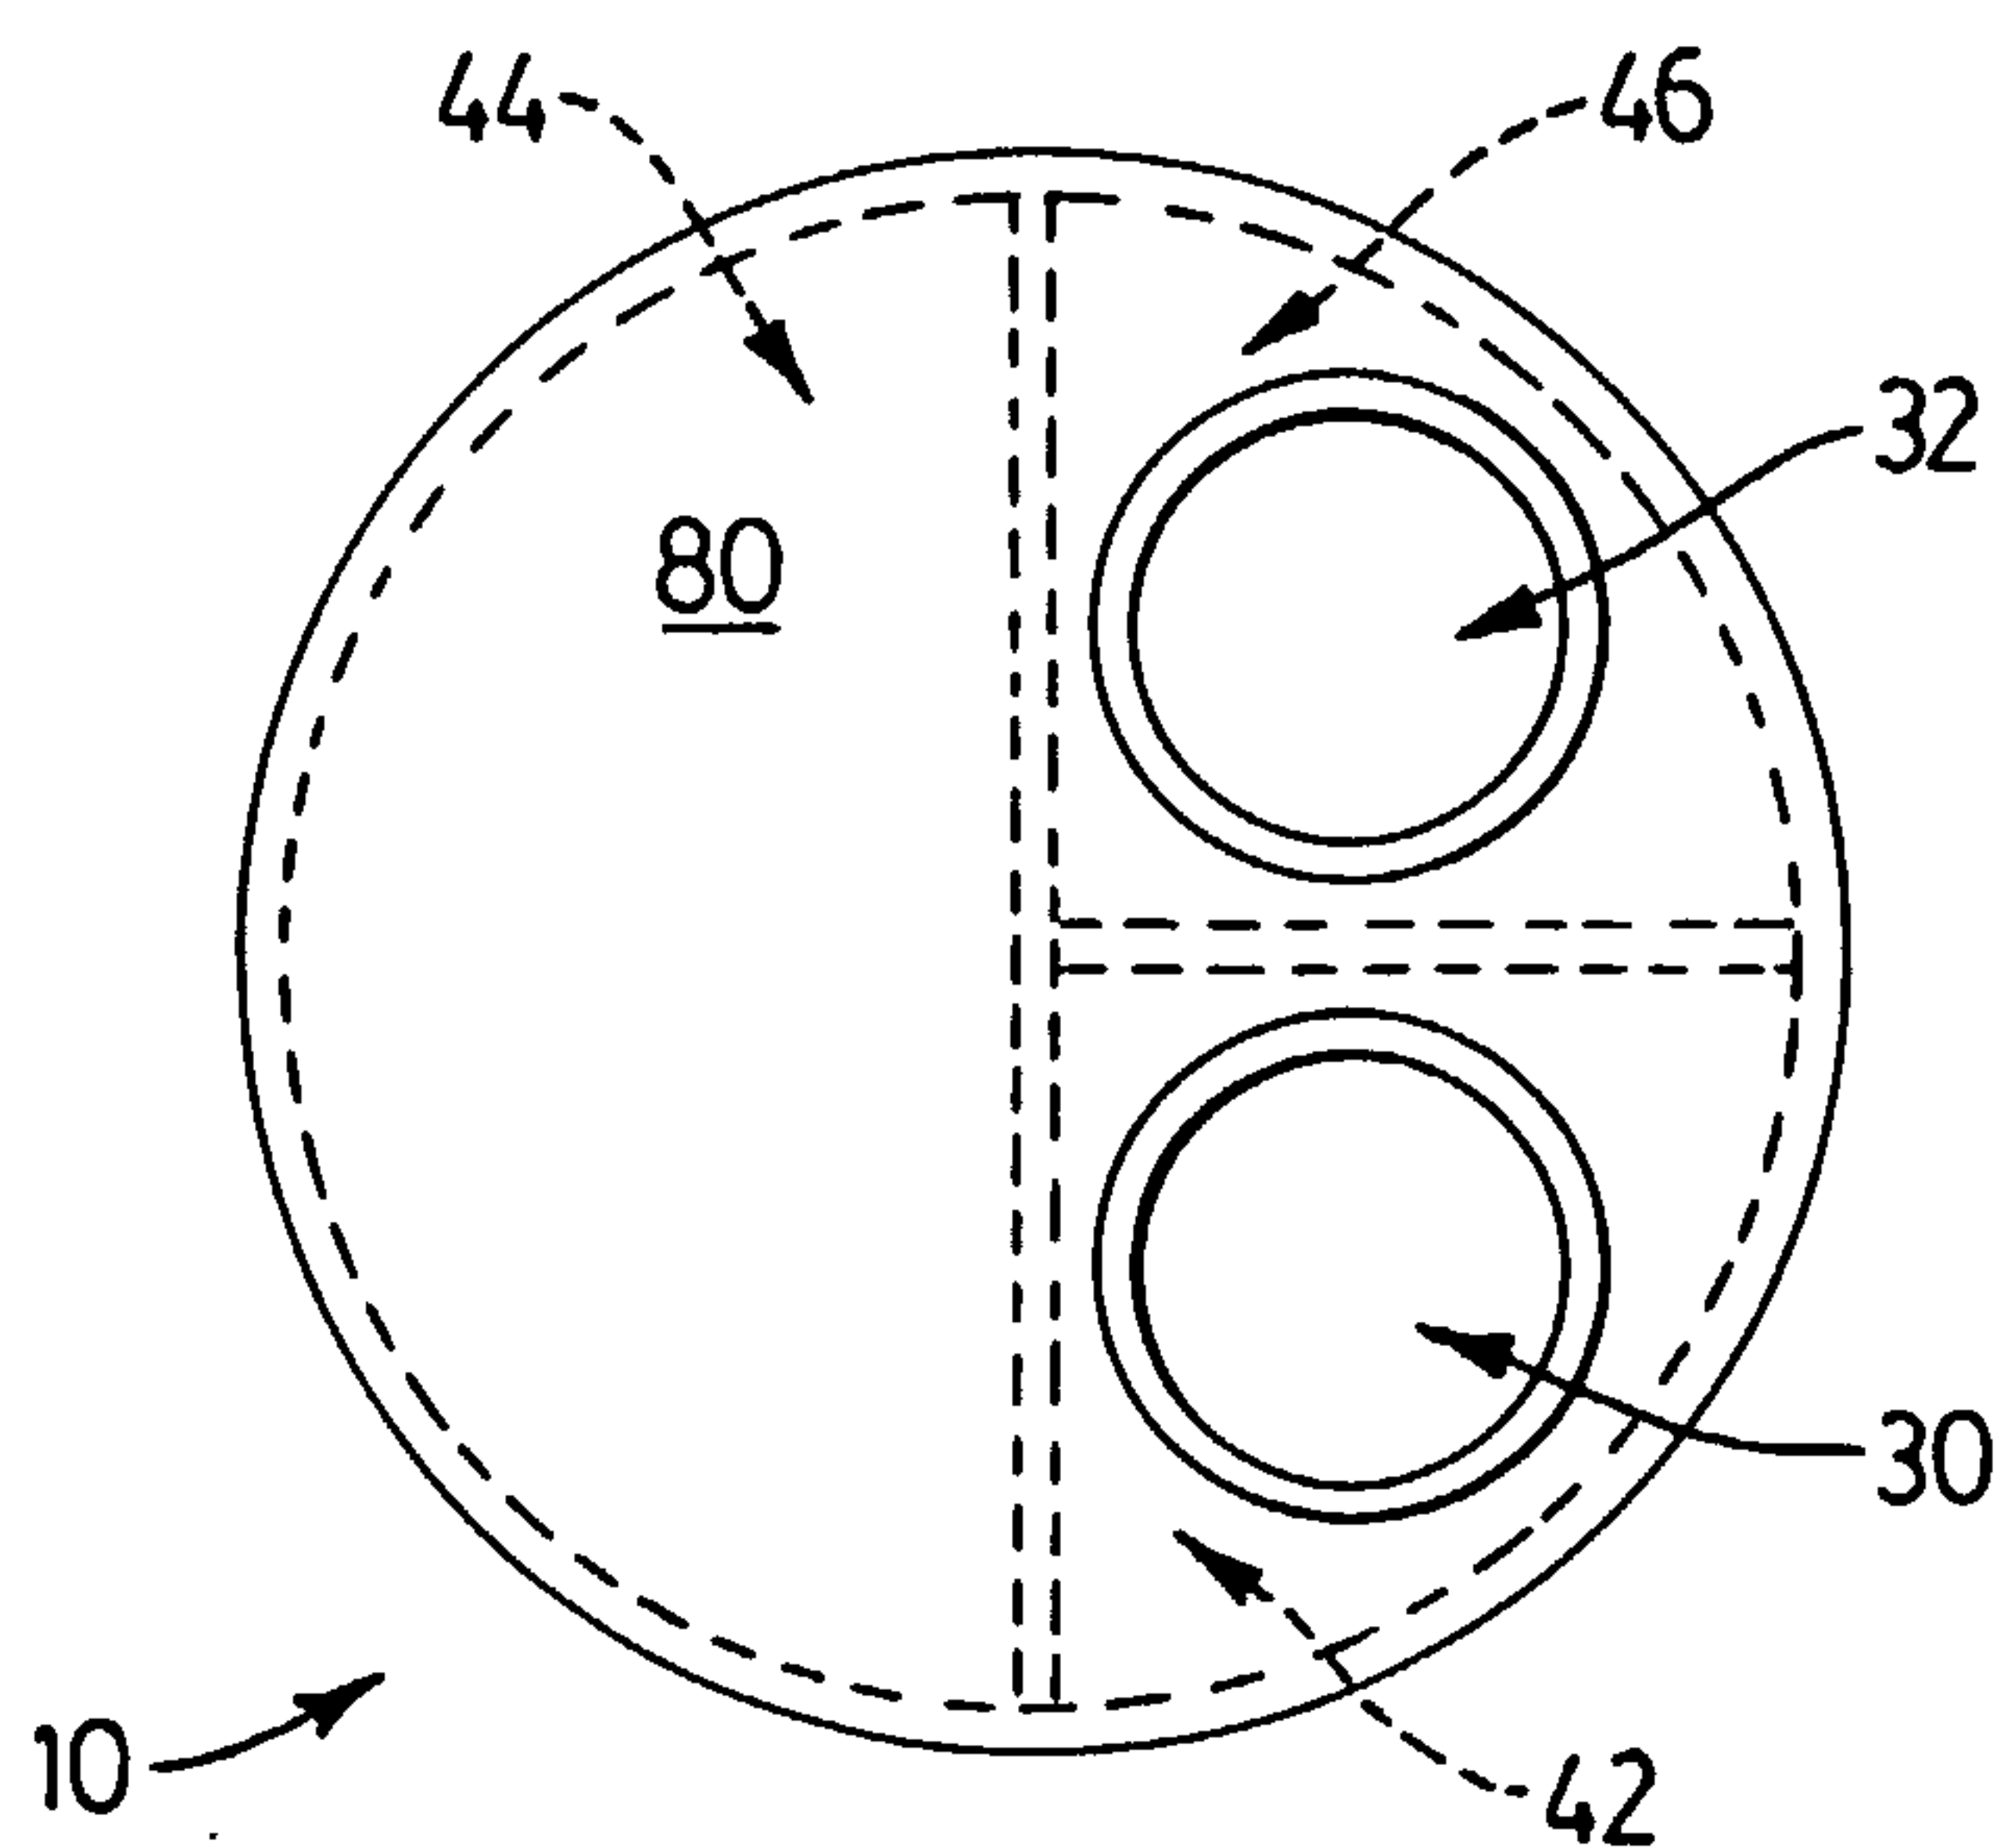


2/6

FIG. 2

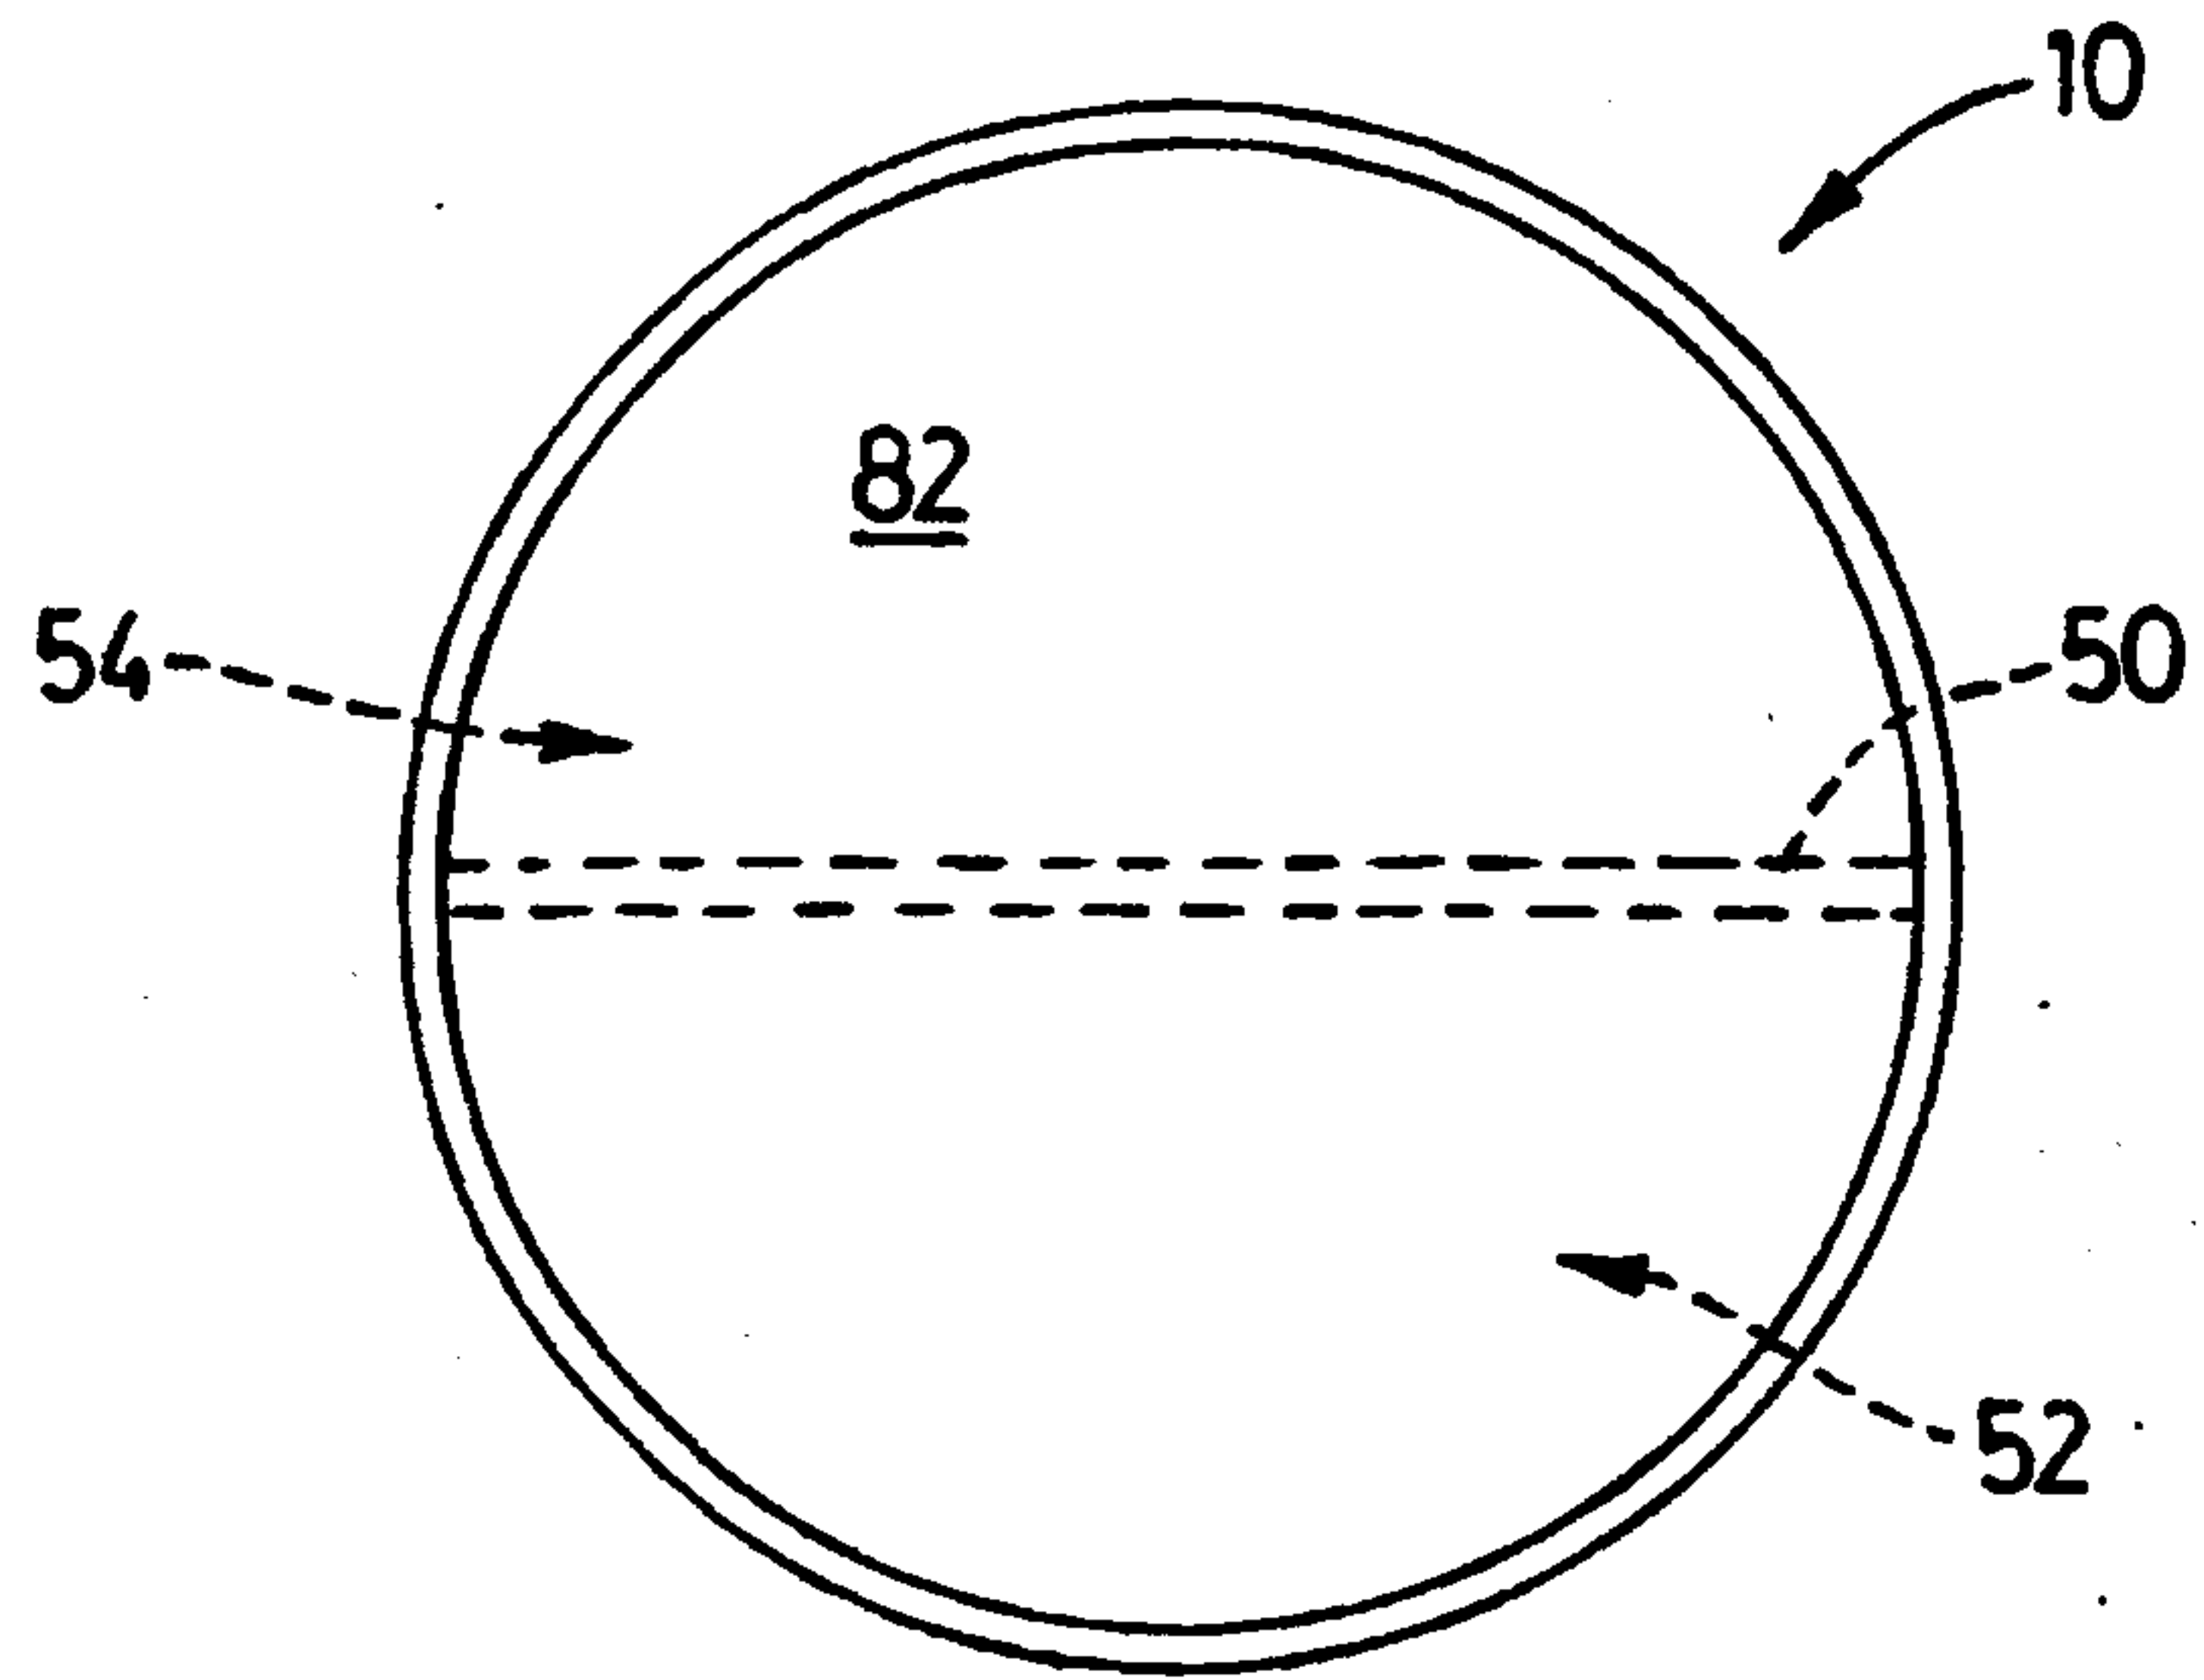
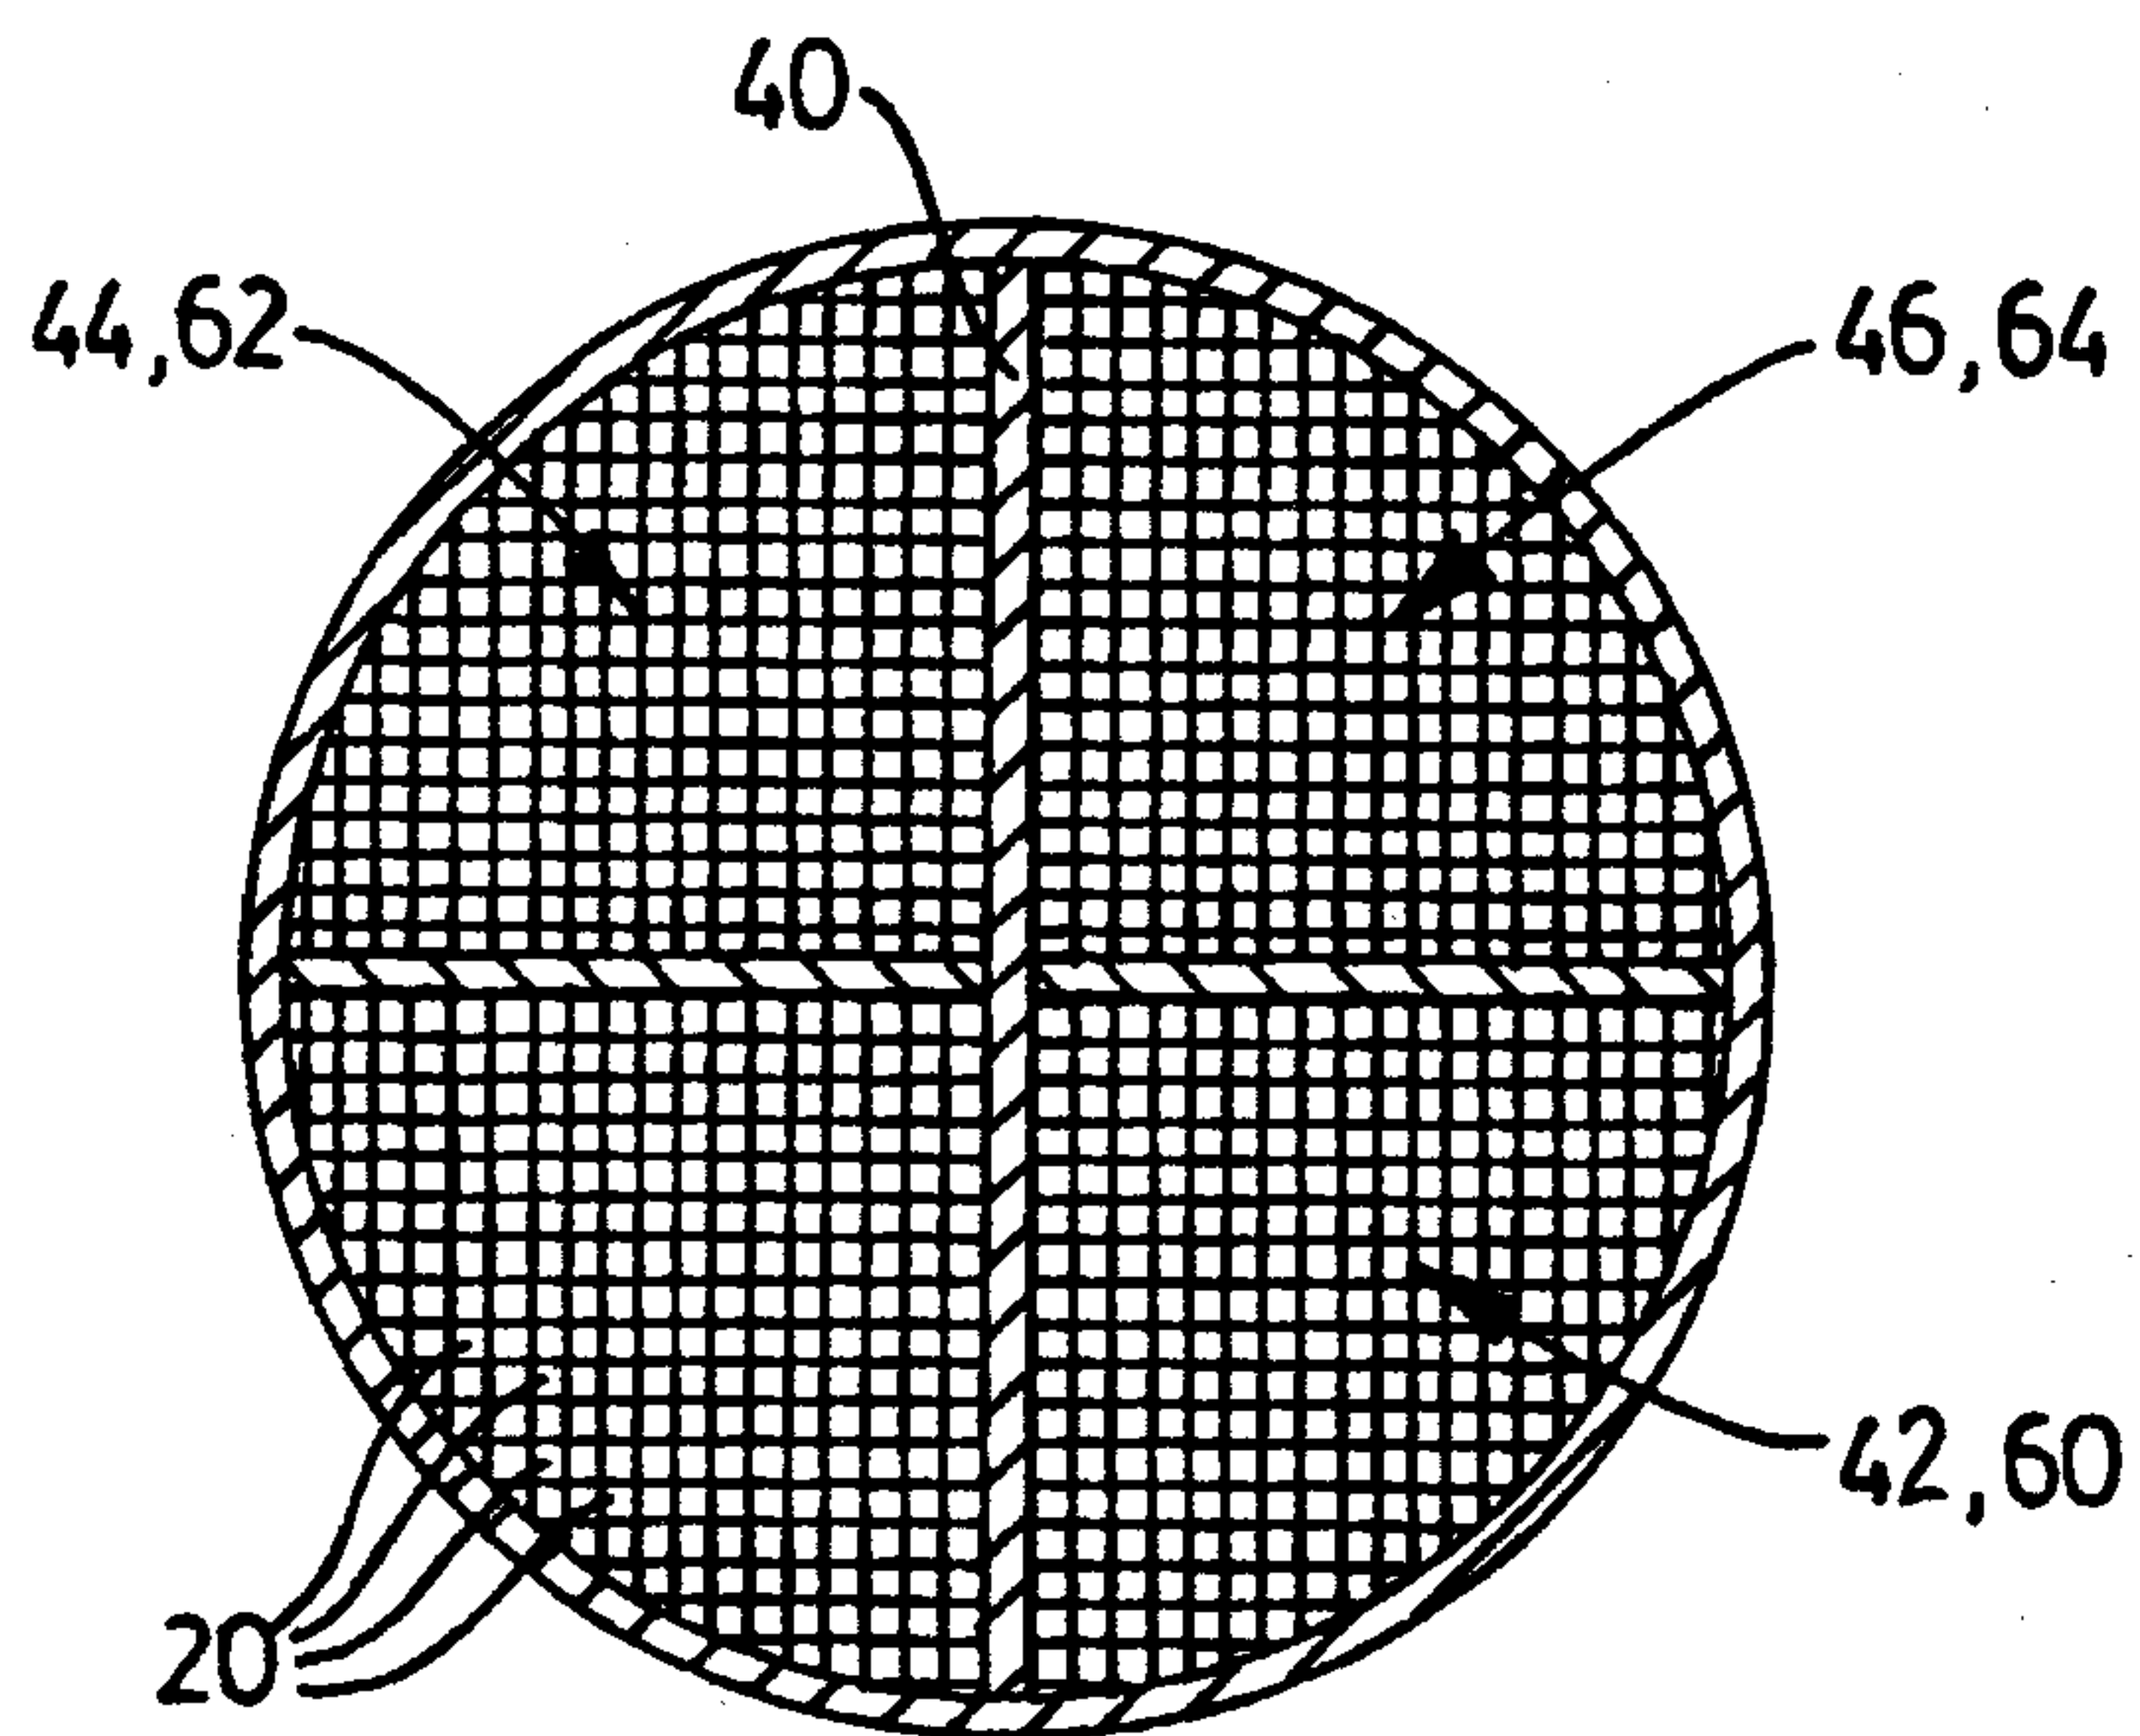


3/6

FIG. 3FIG. 4

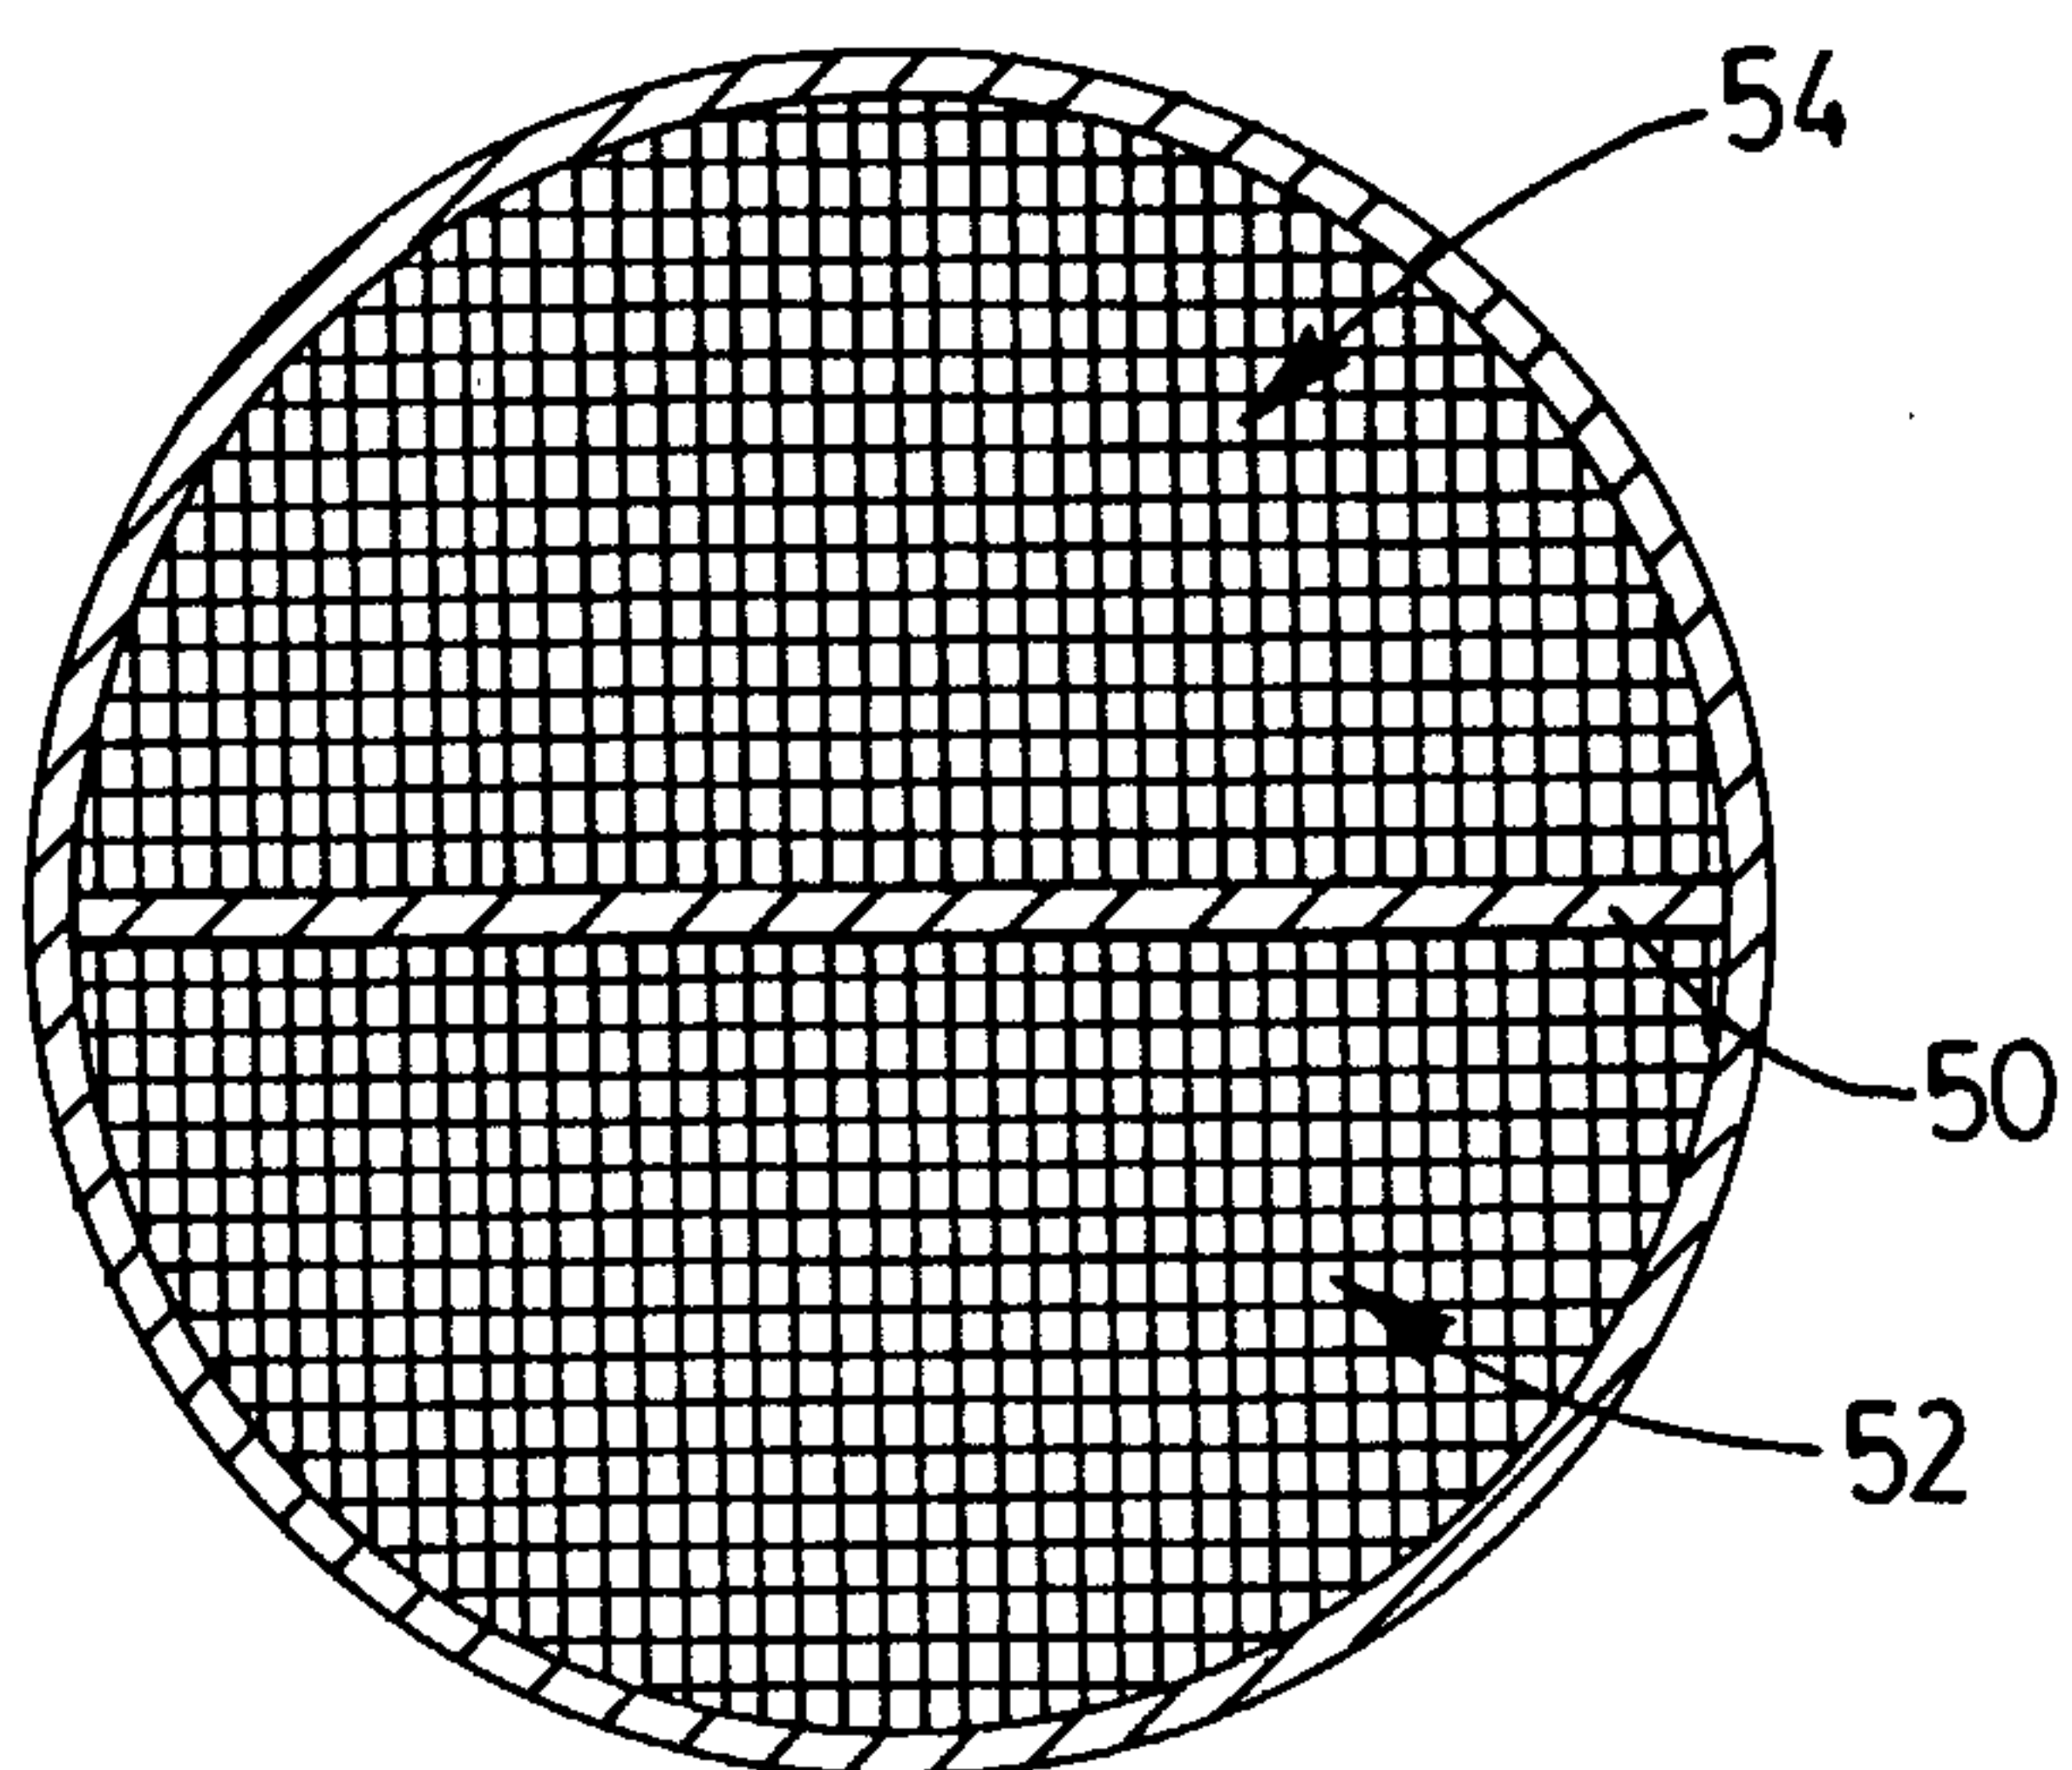
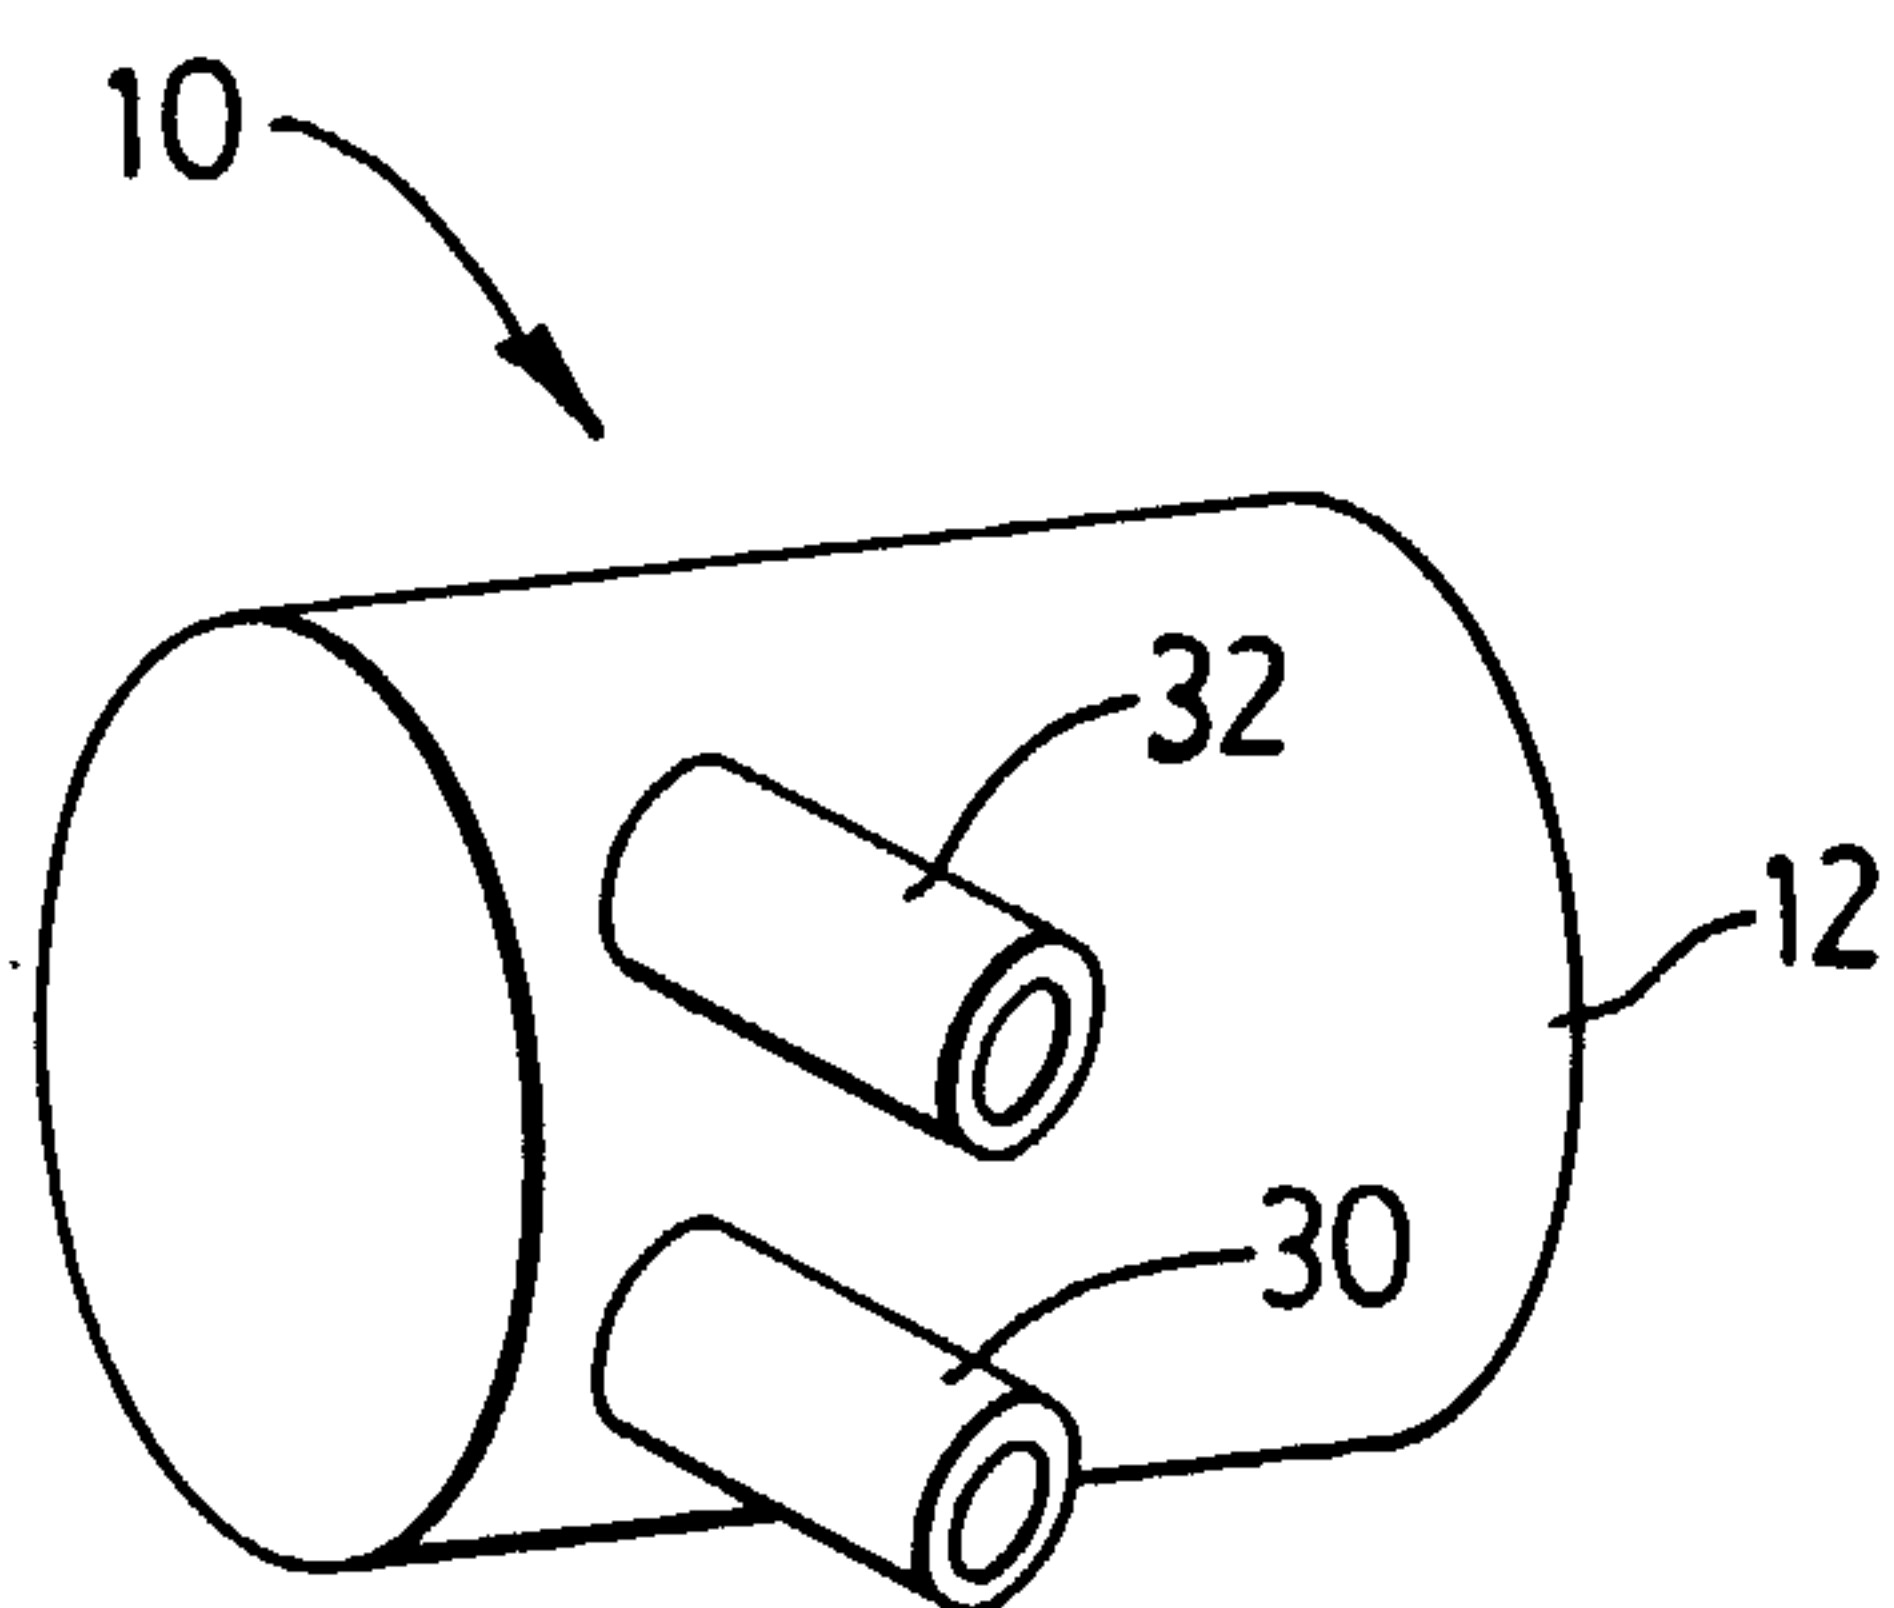
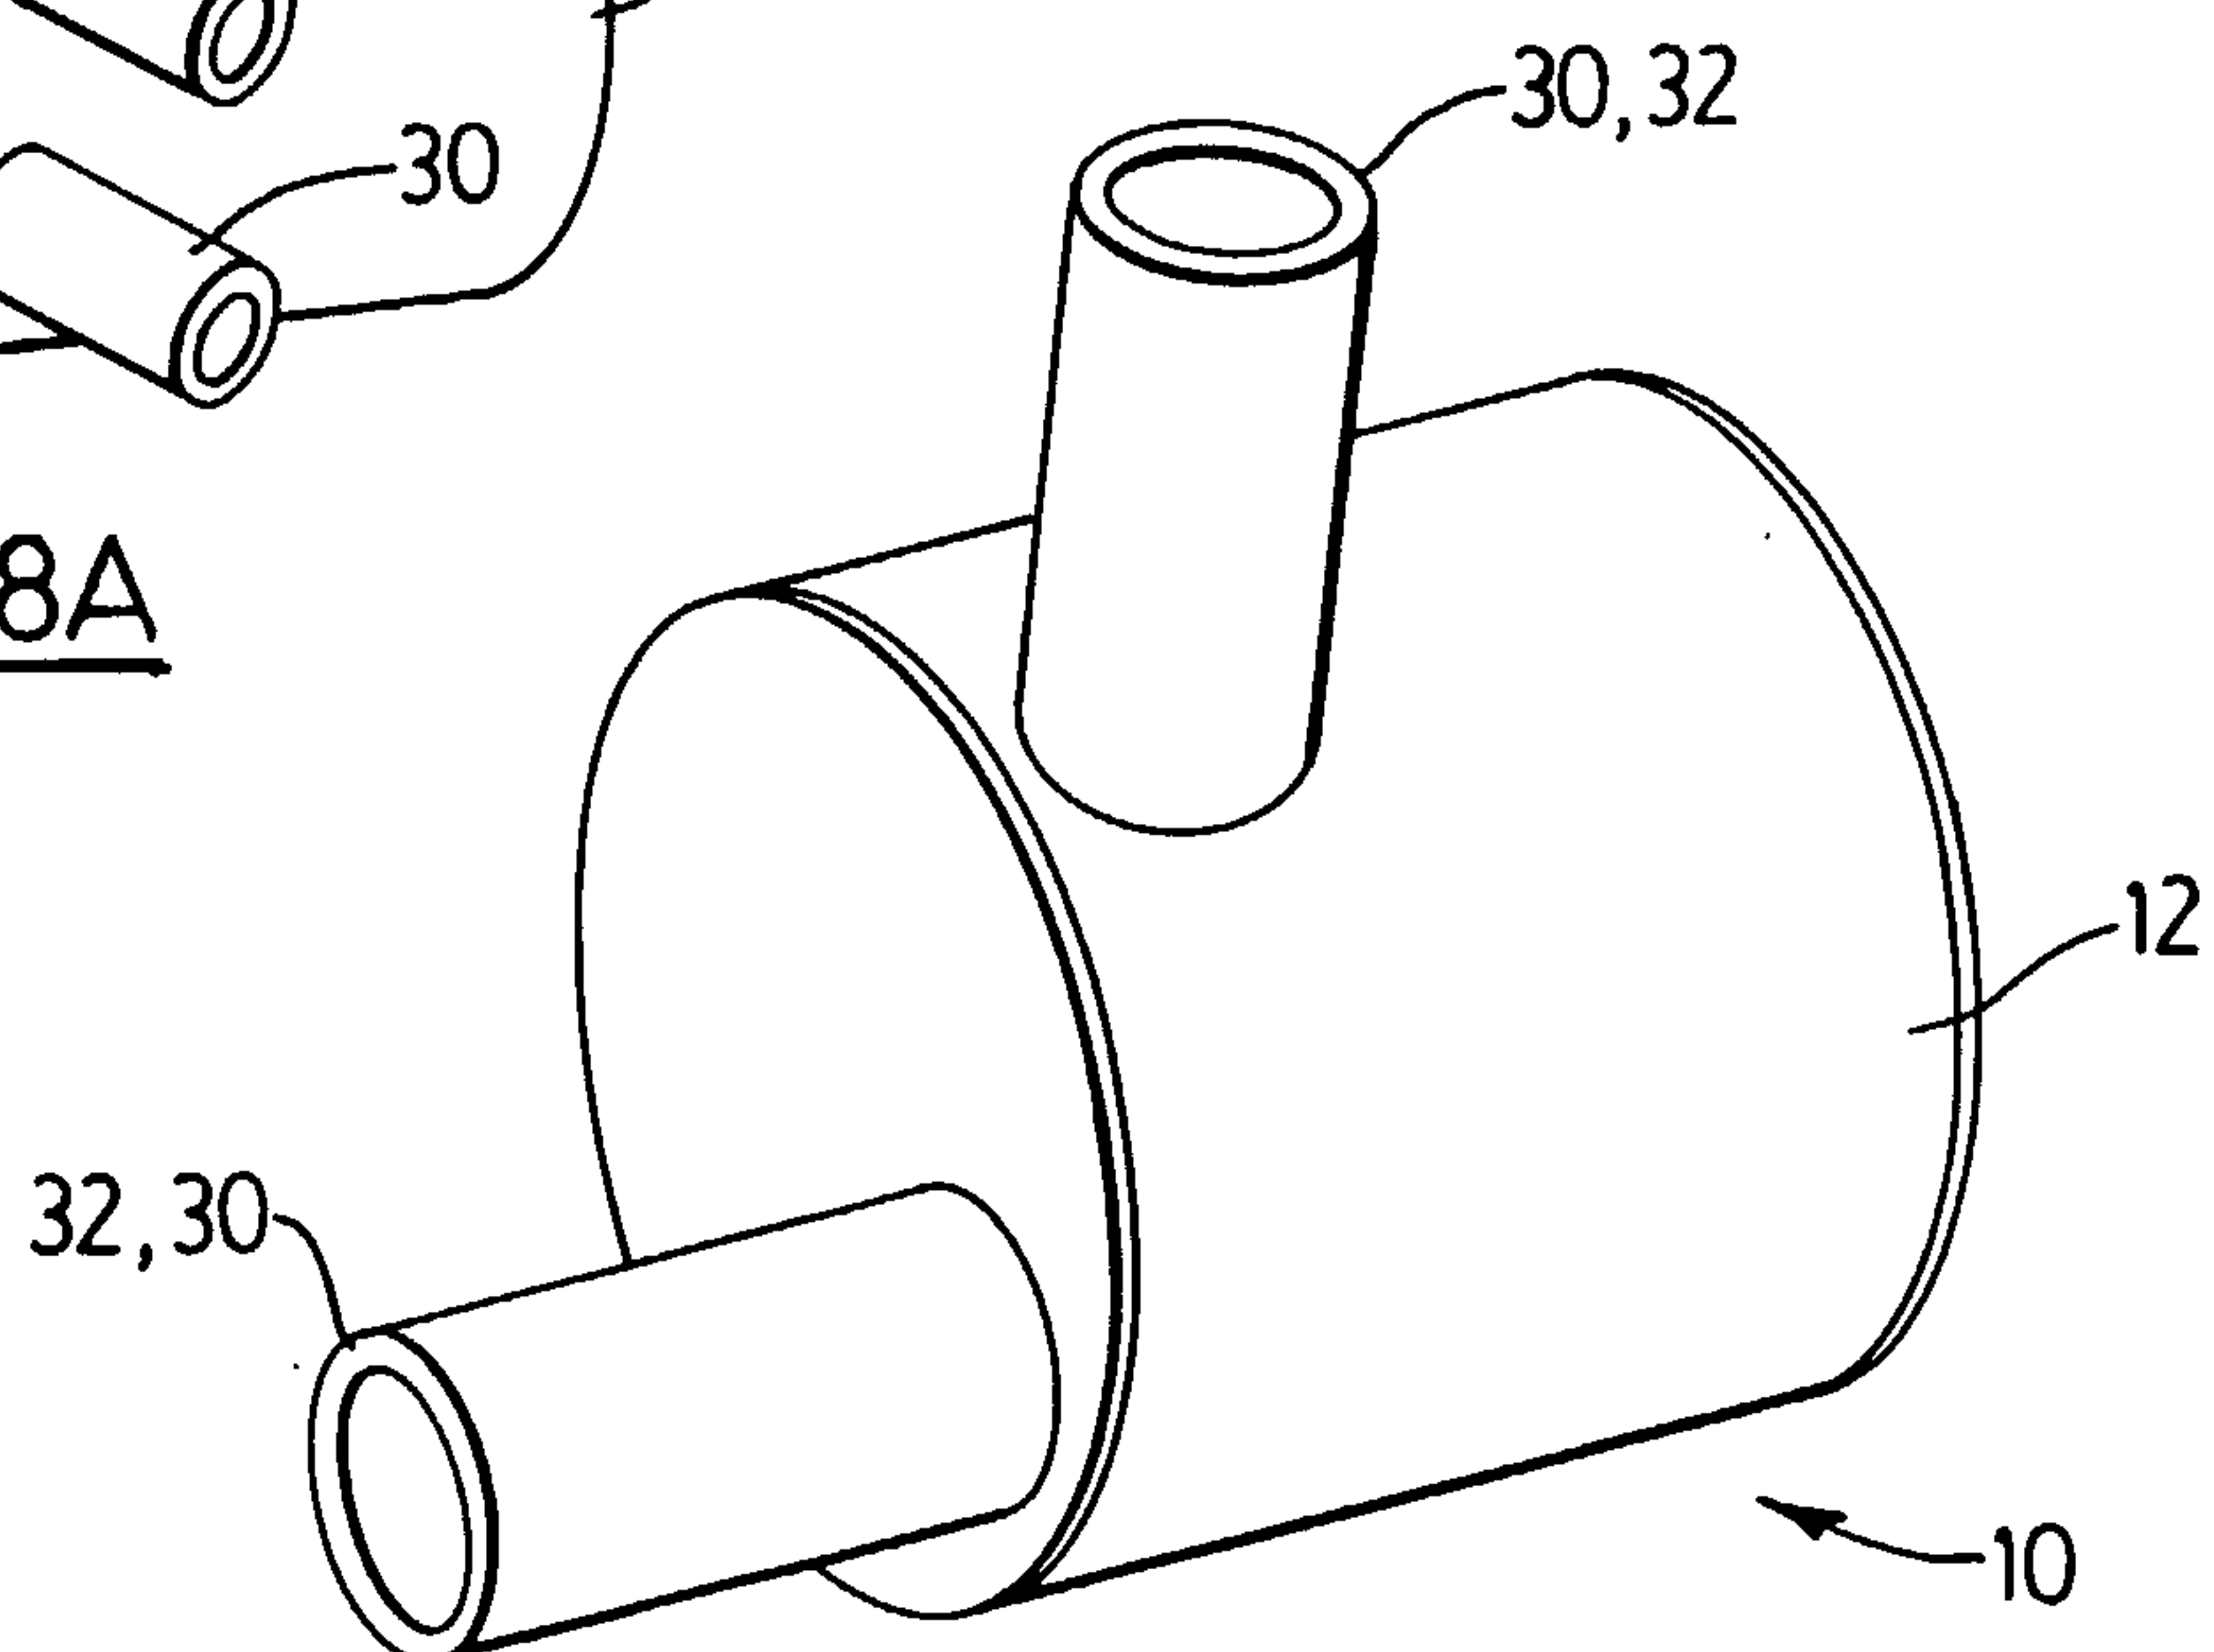


4/6

FIG. 5FIG. 6



5/6

FIG. 7FIG. 8AFIG. 8



6/6

