

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 460 701 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

04.03.1998 Bulletin 1998/10

(51) Int Cl.⁶: **C25D 11/18, C23C 8/10**

(21) Application number: **91109363.1**

(22) Date of filing: **07.06.1991**

(54) **A method of forming a corrosion-resistant protective coating on aluminum substrate**

Verfahren zur Herstellung eines korrosionsbeständigen Schutzüberzugs auf Aluminiumsubstrat

Procédé de formation d'un revêtement protecteur résistant à la corrosion sur un substrat d'aluminium

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **07.06.1990 US 534807**
07.06.1990 US 534796

(43) Date of publication of application:
11.12.1991 Bulletin 1991/50

(73) Proprietor: **APPLIED MATERIALS, INC.**
Santa Clara, California 95054-3299 (US)

(72) Inventors:
• **Lorimer, D'Arcy H.**
San Luis Obispo, CA 93401 (US)

• **Bercaw, Craig A.**
Hayward, CA 94541 (US)

(74) Representative: **Diehl, Hermann O. Th., Dr. et al**
Diehl, Glaeser, Hiltl & Partner
Patentanwälte
Postfach 19 03 65
80603 München (DE)

(56) References cited:
US-A- 4 111 762

EP 0 460 701 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

This invention relates to a method for forming a corrosion-resistant protective coating formed on an aluminum substrate.

The chamber walls of processing apparatus used in the production of integrated circuit structures on semiconductor wafers such as, for example, chemical vapor deposition (CVD) chambers and/or etching chambers, e.g. reactive ion etching chambers, are subject to attack by the chemicals used in such deposition and etching processes.

In the past, the use of aluminum chambers in semiconductor wafer processing apparatus with anodized aluminum substrates on the inner walls of the chambers provided sufficient protection against such chemical attack, while permitting the utilization of a relatively inexpensive metal to construct the chamber or chambers of the processing apparatus.

However, more recently, the integrated circuit chip industry has recognized the need for yet higher standards of purity in the processing equipment used to fabricate the integrated circuit structures. It has, therefore, been proposed, by Ohmi, in "Fluorine Passivation Technology of Metal Surface", 8th Symposium on ULSI Ultra-clean Technology", The Proceedings, January 26-28, 1989, to replace the anodized aluminum chambers with highly polished stainless steel pretreated in HF to remove oxides, passivated with a high purity F_2 gas to form a non-stoichiometric iron fluoride, and then thermally treated to form an FeF_2 coating. While the resulting film withstands gaseous halogen-containing environments, it will corrode if exposed to an aqueous environment.

It has also been proposed by Ohmi, in "Outgas-Free Corrosion-Resistant Surface Passivation of Stainless Steel for Advanced ULSI Process Equipment", ECS Fall Meeting, Chicago, October, 1988 Symposium of Automated IC Manufacturing, to oxidize passivated highly polished stainless steel materials in O_2 to form a protective oxide surface thereon. Such surfaces are said to be capable of withstanding visible attack by concentrated aqueous hydrochloric acid, i.e., without any visible evidence of evolution of gas, for as long as 30 to 40 minutes.

While a coating with a resistance to corrosion for 30-40 minutes would not normally be considered sufficient for industrial use, it must be pointed out that exposure to aqueous concentrated mineral acids such as hydrochloric acid is considered to be a worst case test, indicative of much longer resistance to corrosion by gaseous halogens.

Therefore, the use of such highly polished stainless steel materials would apparently satisfy the corrosion resistance requirements of the integrated circuit chip industry. However, the cost of the use of such materials in the construction of processing equipment, such as deposition and etching chambers, is prohibitive.

For example, the substitution of an ordinary stainless steel material for aluminum in the construction of an etching or deposition chamber may result in a cost increase of about four times the cost of aluminum, while the use of a highly polished and air oxidized stainless steel may be as much as four times the cost of ordinary stainless steel; i.e., the substitution of such highly polished and specially processed stainless steels for conventional anodized aluminum can result in an increase of costs of over fifteen times what the cost would be to use aluminum.

Document US-A-4 111 762 teaches a method for producing an anodized aluminum body having a roughened surface which exhibits certain optical qualities. The document teaches the use of vacuum drying and hydrogen fluoride to dry and waterproof the surface of the body, but does not teach a method for coating an aluminum body in such a way as to resist the corrosion effect of process halogen gases and plasmas found in a processing apparatus such as is used to process semiconductor materials.

It would, therefore, be desirable to provide an aluminum material having a corrosion-resistant protective coating on its surface which is capable of resisting the corrosive attack of process halogen gases and plasma (as measured by accelerated corrosion resistance tests using concentrated aqueous halogen acids). It would be even more desirable to provide a high purity corrosion-resistant protective coating which may be utilized on the surface of aluminum parts used in vacuum process chambers so that aluminum may continue to be utilized in the construction of semiconductor wafer processing equipment for the integrated circuit chip industry without sacrificing purity standards.

It is, therefore, an object of this invention to provide, on an aluminum substrate, a corrosion-resistant protective coating capable of withstanding corrosion attack by process halogen gases and plasmas. This object is solved by the method of independent claim 1. Further advantageous features and details of the invention are evident from the dependent claims, the description and the drawings. The claims are intended to be understood as a first non-limiting approach of defining the invention in general terms.

In a particularly preferred embodiment, the invention provides a high purity protective coating formed on an aluminum substrate by contacting a high purity aluminum oxide coating with one or more fluorine-containing gases to form a coated aluminum substrate capable for use in processing apparatus used to form integrated circuit structures on semiconductor wafers.

It is another aspect of this invention to provide, on an aluminum substrate, a corrosion-resistant protective coating comprising an aluminum oxide coating which has been contacted with one or more fluorine-containing gases to form a protective coating on the aluminum substrate capable of withstanding corrosion attack by process halogen gases and plasmas.

It is yet another aspect of this invention to provide an aluminum substrate having a high purity corrosion-resistant protective coating thereon capable of withstanding corrosion attack by process halogen gases and plasmas.

It is still another aspect of this invention to provide an aluminum substrate having a high purity aluminum oxide coating thereon which has been contacted with one or more fluorine-containing gases to form a high purity protective coating thereon capable of withstanding corrosion attack by process halogen gases and plasmas.

It is a further aspect of this invention to provide an aluminum vacuum chamber for semiconductor wafer processing equipment having the inner aluminum surfaces of the chamber walls protected by a high purity aluminum oxide coating thereon which has been reacted with one or more fluorine-containing gases to form a high purity protective coating thereon capable of withstanding corrosion attack by process halogen gases and plasmas.

It is yet a further aspect of the invention to provide a method for forming on an aluminum substrate a corrosion-resistant protective coating of a fluorinated aluminum oxide capable of withstanding corrosion attack by process halogen gases and plasmas.

It is still a further aspect of the invention to provide a method for forming on an aluminum substrate a corrosion-resistant protective coating of a fluorinated aluminum oxide capable of withstanding corrosion attack by process halogen gases and plasmas which comprises forming an aluminum oxide coating on the aluminum substrate and then treating the aluminum oxide coating with one or more fluorine-containing gases to form the corrosion-resistant protective coating.

It is another aspect of the invention to provide a method for forming on an aluminum substrate a high purity corrosion-resistant protective coating of a fluorinated aluminum oxide capable of withstanding corrosion attack by process halogen gases and plasmas which comprises the steps of forming a high purity aluminum oxide coating on the aluminum substrate and then treating the aluminum oxide coating with one or more high purity fluorine-containing gases to form the high purity corrosion-resistant protective coating.

These and other details of the invention will be apparent from the following description and accompanying drawings.

Figure 1 is a fragmentary cross-sectional view of an aluminum substrate having a corrosion-resistant protective coating formed on the surface of the substrate.

Figure 2 is a fragmentary vertical cross-sectional view of an aluminum vacuum chamber for processing semiconductor wafers having a high purity protective coating formed on the inner aluminum surfaces of the chamber.

Figure 3 is a flow sheet illustrating the process of the invention.

The invention, in its broadest aspects, comprises an aluminum surface, such as surface 12 on aluminum substrate 10 shown in Figure 1, having formed thereon a corrosion-resistant protective coating 20 capable of withstanding corrosion attack by process halogen gases and plasmas. The protective coating is formed on the aluminum substrate by first forming an aluminum oxide layer on the aluminum substrate and then contacting the aluminum oxide layer with one or more fluorine-containing gases to form the protective coating thereon.

In a particularly preferred embodiment, the invention comprises an aluminum chamber used in the processing of semiconductor wafers, such as aluminum reactor chamber 30 shown in Figure 2, having its inner surfaces 32 protected by a high purity corrosion-resistant protective coating 40 formed thereon capable of withstanding corrosion attack by the aforesaid process halogen gases and plasmas. The high purity protective coating is formed on the aluminum substrate by first forming a high purity aluminum oxide layer on the aluminum substrate and then contacting the high purity aluminum oxide layer with one or more high purity fluorine-containing gases to form the high purity protective coating of the invention thereon.

It should be noted that while the purpose of the invention is to form a protective coating to withstand corrosive attack by process halogen gases and plasmas, reference will be made herein to the corrosion resistance of the coating of the invention when exposed to liquid or aqueous halogen acids because such is considered to be a harsher environment and resistance to such an aqueous halogen environment is, therefore, considered to be a worst case test, as previously alluded to above.

The term "high purity aluminum oxide" as used herein, is meant to define an aluminum oxide having a purity of at least 97 wt.%, preferably greater than 99 wt.%, and in particular having less than 3 wt.%, preferably less than 1 wt.%, of impurities such as, for example, sulfur, boron, and phosphorus and any other elements, including, in general, any other metals and metalloids (including silicon), which could interact with processing materials used in the formation of integrated circuit structures on semiconductor wafers to introduce undesirable impurities.

The aluminum substrate on which such a high purity aluminum oxide is to be formed should have a purity of at least about 99 wt.%, and preferably a purity of about 99.9 wt.%.

The term "aluminum oxide", as used herein, is intended to include both fully dehydrated aluminum oxide, i.e., Al_2O_3 (alpha alumina), as well as hydrated forms of aluminum oxide, e.g., $\text{Al}(\text{OH})_3$ (bayerite) or $\text{AlO}(\text{OH})$ (boehmite).

The term "high purity protective coating" as used herein, is meant to define a high purity aluminum oxide, as defined above, which has been contacted with one or more fluorine-containing gases to form a coating

which contains less than about 3 wt.%, and preferably less than about 1 wt.%, of elements other than aluminum, oxygen, hydrogen, and fluorine.

By use of the term "concentrated halogen acid" with respect to the concentrated aqueous halogen acids used to evaluate the corrosion resistance of the protective coating of the invention is meant a 35 wt.% or higher concentration of HCl or a 48 wt.% or higher concentration of HF.

a. Formation of Corrosion-Resistant Protective Coating

In either embodiment, to form the corrosion-resistant protective coating of the invention, it is necessary to contact an aluminum oxide film previously formed on the aluminum substrate with one or more fluorine-containing gases. The aluminum oxide film to be contacted by the one or more fluorine-containing gases should have a thickness of from at least about 0.1 micrometers (1000 Angstroms) up to about 20 micrometers (microns) prior to the contacting step. Thicker oxide films or layers can be used, but are not necessary to form the corrosion-resistant protective coating of the invention.

Preferably, the one or more fluorine-containing gases which will be used to contact the previously formed aluminum oxide layer on the aluminum substrate will comprise acid vapors or gases such as gaseous HF or F_2 , with or without inert carrier gases such as, for example, argon, or neon; or other carrier gases such as hydrogen, oxygen, air, or water vapor, e.g., steam. Examples of other fluorine-containing gases which may be used in the practice of the invention include NF_3 , CF_4 , CHF_3 , and C_2F_6 .

When a high purity protective coating is to be formed, in accordance with the preferred embodiment of the invention, the reagents used in this step must also be of a sufficient purity so as to not introduce any impurities into the high purity aluminum oxide previously formed on the aluminum substrate. If the fluorine-containing gases, and other gaseous reagents used in this step have a purity of less than about 100 ppm impurities, i.e., have a purity of at least about 99.99 wt.% (usually at least semiconductor grade), the desired high purity of the protective coating, when such high purity is desired, will be preserved.

The contacting step is preferably carried out in an enclosed reaction chamber, particularly when the high purity protective coating is being formed. However, provided the reaction area is well ventilated, it is within the scope of the invention to contact the aluminum oxide-coated aluminum substrate with one or more fluorine-containing gases in an open area, particularly when the purity of the resultant protective coating is not an issue.

When the protective coating is to be a high purity protective coating for the inner walls of reactors used in the processing of semiconductor wafers, the aluminum reactor may already be preassembled in which case the oxidized aluminum substrates to be contacted may

comprise the inner walls of the aluminum reactor. The aluminum reactor will then additionally serve as the containment vessel for the contacting step as well as providing a high purity environment for the contacting step.

When a containment vessel is used for the contacting step, the one or more fluorine-containing gases may be introduced into the vessel and maintained therein at a concentration ranging from 5 to 100 volume %, depending upon the source of fluorine-containing gas, and a pressure ranging from about 1.3 mbar (1 Torr) to atmospheric pressure.

The contacting step may be carried out for a time period within a range of from about 30 minutes to about 120 minutes at a temperature which may range from about 375°C to about 500°C, and preferably from about 450°C to about 475°C. The amount of contact time needed to ensure formation of the protective coating of the invention will vary with the temperature and the concentration of the fluorine-containing gas. Longer periods of time than that specified, however, should not be used if reducing gases (such as H_2) are present in the fluorine-containing gas to avoid damage to the underlying oxide layer.

After the contact step, the coated aluminum substrate may be flushed with water or other non-reactive gases or liquids to remove any traces of the fluorine-containing gases. When the contact step is carried out within a closed vessel, wherein the vessel walls comprise oxidized aluminum which has been contacted with the one or more fluorine-containing gases, for example, when forming the high purity protective coating, the reactor vessel may be flushed with non-reactive gases to remove the fluorine-containing gases from the reactor.

The resulting protective coating on the aluminum substrate may then be examined by a number of analytical techniques such as, for example, Auger analysis, SIMS, ESCA LIMS, and EDX and will be found to have a fluorine concentration ranging from 3 to 18 wt.%, based on total weight of the coating.

b. Formation of High Purity Aluminum Oxide Film

To form the high purity protective coating of the invention on the aluminum substrate, e.g., on the inner surfaces of the walls of a reactor used in the processing of semiconductor wafers, a high purity aluminum oxide film or layer must first be formed on the aluminum substrate. The high purity aluminum oxide layer may be either a thermally formed layer or an anodically formed layer.

However, in either case, to ensure the desired purity, the reagents used in forming the oxide layer should, preferably, be essentially free of impurities which might otherwise be incorporated into the aluminum oxide layer. Therefore, as previously defined with respect to the high purity aluminum oxide coating itself, the reagents used in forming the aluminum oxide coating should preferably have a purity of at least about 97 wt.%, preferably

greater than 99 wt.%. In particular, the reagents should preferably have less than 3 wt.%, and more preferably less than 1 wt.%, of impurities such as, for example, sulfur, boron, and phosphorus and any other elements, including, in general, any other metals and metalloids (including silicon), which may be incorporated into the high purity coating and possibly interact with processing materials used in the formation of integrated circuit structures on semiconductor wafers to introduce undesirable impurities.

It should be noted, however, that the use of reagents which contain impurities that are introduced into the coating may be used in the practice of the invention, even when producing high purity coatings in accordance with the preferred embodiment if the impurity is of a type which may be easily removed from the surface of the coating. For example, if sulfuric acid is used as the electrolyte in forming an anodized aluminum oxide coating, undesirable sulfur in the resultant coating may be removed by thoroughly rinsing the surface with deionized water containing a sufficient amount of nitric acid to adjust the pH to about 5. The nitrate ions apparently exchange with the sulfate ions in the coating and then, due to the solubility of the nitrate ions, are easily removed from the coating as well.

When a high purity thermal oxide layer is to be formed thereon, the aluminum substrate is contacted for a period of from about 10 to about 200 hours with an oxidizing gas at a partial pressure ranging from about 15 wt.% to about 100 wt.% oxygen, with the balance preferably comprising a 99.99 wt.% pure carrier gas. heated to a temperature within a range of from about 350°C to about 500°C to form an aluminum oxide coating having a minimum thickness of at least about 1000 nm (1000 Angstroms), preferably about 300 nm (3000 Angstroms).

To form the high purity aluminum oxide layer anodically, the aluminum substrate is made the anode in an electrolytic cell wherein the electrolyte preferably comprises a compound which will not introduce any other elements into the aluminum oxide coating to be formed anodically on the aluminum substrate, as previously discussed. Preferably, the electrolyte comprises a high purity inorganic acid such as nitric acid or a high purity organic acid such as a monocarboxylic acid, for example, formic acid (HCOOH), acetic acid (CH₃COOH), propionic acid (C₂H₅COOH), butyric acid (C₃H₇COOH), valeric acid (C₄H₉COOH), palmitic acid (CH₃(CH₂)₁₄COOH), and stearic acid (CH₃(CH₂)₁₆COOH); or a dicarboxylic acid, for example, oxalic acid (COOH)₂, malonic acid (CO₂H(CH₂)CO₂H), succinic acid (CO₂H(CH₂)₂CO₂H), glutaric acid (CO₂H(CH₂)₃CO₂H), and adipic acid (CO₂H(CH₂)₄CO₂H).

Other mineral acids such as sulfuric acid, phosphorus-containing acid, and boronic acid usually should be avoided, when forming a high purity aluminum oxide, because of their tendencies to include in the resulting anodically formed aluminum oxide traces of the respec-

tive elements, e.g., sulfur, phosphorus, boron, etc. from the acid electrolyte. However, such mineral acid electrolytes may be used if such impurities can be subsequently removed from the surface of the resulting aluminum oxide coating, as previously discussed.

The anodizing bath may be maintained at a temperature ranging from about 0°C up to about 30°C.

Since the thickness of the anodized film is, at least in part, dependent upon the anodizing voltage, the anodization should be carried out at a voltage within a range of from at least about 15 to about 45 volts D.C. to ensure formation of the desired minimum thickness of anodically formed aluminum oxide, as is well known to those skilled in the art. While conventional DC voltage is preferred, AC voltage may, in some instances, also be utilized.

The anodizing process should be carried out for a time period sufficient to form the desired thickness of aluminum oxide on the aluminum substrate. The progress of the anodic process may be easily monitored by the current flow in the bath. When the current drops below about 111 to 667 A/m² (10-60 amperes/square foot) (indicative of the presence of the insulating aluminum oxide film), the voltage may be shut off and the anodized aluminum may be removed from the bath.

The high purity aluminum oxide coating may also be formed on the aluminum substrate by a combination of thermal and anodic oxide formation, for example, by first anodically forming an oxide coating layer and then thermally oxidizing the anodically formed oxide coating.

After formation of the high purity aluminum oxide film on the aluminum substrate, the aluminum oxide may be contacted, in accordance with the invention, with one or more fluorine-containing gases, as previously described above, to form the high purity corrosion-resistant protective coating of the invention on the aluminum substrate.

The following example will serve to further illustrate the invention:

Example

The inner walls of an aluminum reactor suitable for use in the processing of semiconductor wafers were initially oxidized to form an aluminum oxide layer thereon by anodizing the aluminum reactor surfaces by immersing them in an electrolyte containing 15 wt.% sulfuric acid, with the balance deionized water. The electrolyte was maintained at a temperature of about 13°C while the aluminum was anodized for about 35 minutes to a final voltage of about 24 volts D.C. and a final current density of 244 A/m² (22 amperes/ft.²).

Alternatively, the oxide coating may be formed anodically using a 15 wt.% oxalic acid, balance deionized water electrolyte at 13°C for 35 minutes to a final voltage of 40 volts and a final current density of about 333 A/m² (30 amperes/ft.²); or the oxide coating may be formed thermally in a reactor filled with O₂ at a pres-

sure maintained between 667 mbar (500 Torr) and atmospheric pressure over a contact period of about 40 hours.

To treat the resultant oxide coating with fluorine gas, in accordance with the invention, a gaseous mixture of 50 vol. % C_2F_6 and 50 vol. % O_2 was then introduced into the reactor at a pressure of about 13.3 mbar (10 Torr). The gaseous mixture remained in contact with the reactor walls for about 1 hour while the reactor was maintained at a temperature of about 400°C. The reactor was then flushed with argon gas.

To test the extent of the corrosion resistance of the resulting coating, coated pieces or samples of the coated reactor surfaces were tested with drops of aqueous concentrated (35 wt. %) hydrochloric acid and monitored for the evolution of gas signifying attack or reaction by the acid on the samples. No visible evolution of gas was noted for about 40 minutes.

The reactor was then disassembled and the protective coating which had been formed on the inner walls was examined. No visible signs of corrosion attack on the protective surface were noted. The protective coating on the reactor wall was analyzed for impurities by Auger analysis and found to have less than 3 wt. % of elements other than Al, O, H, and F in the coating layer, indicating the high purity of the protective layer.

Thus, the invention provides a corrosion-resistant protective coating for an aluminum substrate which is capable of protecting the aluminum substrate from corrosive attack by process halogen gases and plasmas. Furthermore, a high purity protective coating may be formed on an aluminum reactor wall suitable for use in the processing of semiconductor wafers in the construction of integrated circuit structures by first forming a high purity aluminum oxide film and then contacting this film with one or more high purity fluorine-containing gases to form a high purity corrosion-resistant protective film which will not introduce impurities into semiconductor wafer processes carried out in a reactor protected by such high purity coatings.

Claims

1. A method of forming a corrosion-resistant protective coating on an aluminum substrate which comprises the steps of

(a) forming on said aluminum substrate an aluminum oxide layer, and

(b) contacting the aluminum oxide layer with at least one gas selected from fluorine and a fluorine compound at an elevated temperature of at least 375°C,

whereby a protective layer having from 3 to 18 wt. % fluorine will be formed on said aluminum surface.

2. The method of forming a corrosion-resistant protective coating on an aluminum substrate of claim 1, wherein the aluminum oxide layer formed in step (a) has a thickness of at least 0.1 μm , and preferably not exceeding about 20 μm .
3. The method of forming a corrosion-resistant, protective coating on an aluminum substrate of claim 1 or 2, wherein step (b) is carried out for a time period within a range of from 30 minutes to 120 minutes and/or at a temperature ranging from 375°C to 500°C, more preferably 450°C to 475°C, said fluorine-containing gases in step (b) being preferably selected from the class consisting of HF, F_2 , NF_3 , CF_4 , CHF_3 , and C_2F_6 .
4. The method of forming a corrosion-resistant protective coating on an aluminum substrate of one of the preceding claims wherein step (b) is effected at a fluorine-containing gas concentration of from 5 to 100 volume %, and/or a pressure of from 1.333 mbar (1 Torr) to atmospheric pressure.
5. The method of forming a corrosion-resistant protective coating on an aluminum substrate of one of the preceding claims, wherein the aluminum substrate has a purity of preferably at least about 99 wt. %, the aluminum oxide layer is formed anodically in an anodizing bath at a temperature in the range of from 0°C to 30°C using an anodizing voltage of from 15 to 45 volts D.C. until the current falls to below from 111 to 667 A/m² (10 to 60 amperes/ft²).
6. The method of forming a corrosion-resistant protective coating on an aluminum substrate according to one of claims 1 to 4, wherein the aluminum substrate has a purity of preferably at least about 99 wt. %, and the aluminum oxide layer is formed by contacting said aluminum substrate for from 10 to 200 hours with an oxidizing gas containing from about 15 to 100 wt. % oxygen and heated within a temperature range of from 350°C to 500°C.
7. The method of forming a corrosion-resistant protective coating on an aluminum substrate according to one of the preceding claims wherein the aluminum oxide layer is a high purity aluminum oxide layer, having a purity of at least 97 wt. %, preferably greater than 99 wt. %, the one or more fluorine-containing gases are high purity fluorine-containing gases containing less than 100 ppm impurities other than carrier gases and the so formed corrosion-resistant protective coating has a high purity, i.e. it contains less than about 3 wt. %, and preferably less than about 1 wt. % of elements other than aluminum, oxygen, hydrogen and fluorine.
8. A method of forming a corrosion-resistant protec-

tive coating on an aluminum substrate according to one of the preceding claims, whereby a protective layer having from 3 to 18 wt.% fluorine will be formed on said aluminum substrate.

Patentansprüche

1. Verfahren zur Bildung einer korrosionsbeständigen Schutzbeschichtung auf einem Aluminiumsubstrat mit folgenden Schritten:

(a) Bildung einer Aluminiumoxidschicht auf dem Aluminiumsubstrat, und

(b) Kontaktieren der Aluminiumoxidschicht mit mindestens einem Gas ausgewählt aus Fluor und einer Fluorverbindung bei einer erhöhten Temperatur von mindestens 375°C, wodurch eine Schutzschicht mit 3 bis 18 Gew.% Fluor auf der Aluminiumoberfläche gebildet wird.

2. Verfahren zur Bildung einer korrosionsbeständigen Schutzbeschichtung auf einem Aluminiumsubstrat gemäß Anspruch 1, bei dem die in Schritt (a) gebildete Aluminiumoxidschicht eine Dicke von mindestens 0,1 µm und vorzugsweise nicht mehr als etwa 20 µm aufweist.

3. Verfahren zur Bildung einer korrosionsbeständigen Schutzbeschichtung auf einem Aluminiumsubstrat gemäß Anspruch 1 oder 2, bei dem Schritt (b) über einen Zeitraum im Bereich von 30 Minuten bis 120 Minuten und/oder bei einer Temperatur im Bereich von 375°C bis 500°C, bevorzugter 450°C bis 475°C, erfolgt, wobei die fluorhaltigen Gase in Schritt (b) vorzugsweise aus der Klasse bestehend aus HF, F₂, NF₃, CF₄, CHF₃ und C₂F₆ ausgewählt sind.

4. Verfahren zur Bildung einer korrosionsbeständigen Schutzbeschichtung auf einem Aluminiumsubstrat gemäß einem der vorhergehenden Ansprüche, bei dem Schritt (b) bei einer Konzentration fluorhaltigen Gases von 5 bis 100 Vol% und/oder einem Druck von 1,333 mbar (1 Torr) bis Atmosphärendruck erfolgt.

5. Verfahren zur Bildung einer korrosionsbeständigen Schutzbeschichtung auf einem Aluminiumsubstrat gemäß einem der vorhergehenden Ansprüche, bei dem das Aluminiumsubstrat eine Reinheit von vorzugsweise mindestens etwa 99 Gew.% aufweist, die Aluminiumoxidschicht anodisch in einem Anodisierungsbad bei einer Temperatur im Bereich von 0°C bis 30°C unter Verwendung einer Anodisierungsspannung von 15 bis 45 Volt Gleichspannung

bis zum Fallen des Stroms unter 111 bis 667 A/m² (10 bis 60 Ampere/Fuß²) gebildet wird.

6. Verfahren zur Bildung einer korrosionsbeständigen Schutzbeschichtung auf einem Aluminiumsubstrat gemäß einem der Ansprüche 1 bis 4, bei dem das Aluminiumsubstrat eine Reinheit von vorzugsweise mindestens etwa 99 Gew.% aufweist und die Aluminiumoxidschicht durch Kontaktieren des Aluminiumsubstrats über 10 bis 200 Stunden mit einem Oxidationsgas gebildet wird, welches etwa 15 bis 100 Gew.% Sauerstoff enthält, und innerhalb eines Temperaturbereichs von 350°C bis 500°C erwärmt wird.

7. Verfahren zur Bildung einer korrosionsbeständigen Schutzbeschichtung auf einem Aluminiumsubstrat gemäß einem der vorhergehenden Ansprüche, bei dem die Aluminiumoxidschicht eine hochreine Aluminiumoxidschicht mit einer Reinheit von mindestens 97 Gew.%, vorzugsweise mehr als 99 Gew.% ist, das eine oder die mehreren fluorhaltigen Gase hochreine fluorhaltige Gase mit weniger als 100 ppm Verunreinigungen außer Trägergasen sind und die so gebildete korrosionsbeständige Schutzbeschichtung hochrein ist, d. h. weniger als etwa 3 Gew.%, und vorzugsweise weniger als etwa 1 Gew.%, an Elementen enthält, bei welchen es sich nicht um Aluminium, Sauerstoff, Wasserstoff und Fluor handelt.

8. Verfahren zur Bildung einer korrosionsbeständigen Schutzbeschichtung auf einem Aluminiumsubstrat gemäß einem der vorhergehenden Ansprüche, wodurch eine Schutzschicht mit 3 bis 18 Gew.% Fluor auf dem Aluminiumsubstrat gebildet wird.

Revendications

1. Procédé de formation d'un revêtement protecteur, résistant à la corrosion, sur un substrat en aluminium, comprenant les étapes consistant :

a) à former sur ledit substrat en aluminium une couche d'oxyde d'aluminium, et
b) à mettre la couche d'oxyde d'aluminium en contact avec au moins un gaz choisi parmi le fluor et un composé fluoré, à une haute température d'au moins 375°C,

grâce à quoi une couche protectrice contenant de 3 à 18% en poids de fluor sera formée sur ladite surface en aluminium.

2. Procédé de formation d'un revêtement protecteur, résistant à la corrosion, sur un substrat en aluminium selon la revendication 1, dans lequel la cou-

che d'oxyde d'aluminium formée dans l'étape (a) a une épaisseur d'au moins 0,1 μm et qui n'excède pas de préférence environ 20 μm .

3. Procédé de formation d'un revêtement protecteur, résistant à la corrosion, sur un substrat en aluminium selon la revendication 1 ou 2, dans lequel l'étape (b) est mise en oeuvre pendant une période de temps comprise entre 30 minutes et 120 minutes et/ou à une température allant de 375°C à 500°C, de préférence de 450°C à 475°C, lesdits gaz contenant du fluor de l'étape (b) étant de préférence choisis dans la classe consistant en HF , F_2 , NF_3 , CF_4 , CHF_3 , et C_2F_6 . 5
4. Procédé de formation d'un revêtement protecteur, résistant à la corrosion, sur un substrat en aluminium selon l'une des revendications précédentes, dans lequel l'étape (b) est effectuée à une concentration de gaz contenant du fluor comprise entre 5 et 100% en volume et/ou à une pression comprise entre 1,333 mbar (1 Torr) et la pression atmosphérique. 10
5. Procédé de formation d'un revêtement protecteur, résistant à la corrosion, sur un substrat en aluminium selon l'une des revendications précédentes, dans lequel le substrat en aluminium a une pureté qui est de préférence d'au moins environ 99% en poids, et la couche d'oxyde d'aluminium est formée de façon anodique, dans un bain d'anodisation, à une température comprise entre 0°C et 30°C, en utilisant une tension d'anodisation comprise entre 15 et 45 volts en courant continu, jusqu'à ce que le courant chute à une valeur inférieure à 111-667 A/ m^2 (10 à 60 ampères/pied²). 15
6. Procédé de formation d'un revêtement protecteur, résistant à la corrosion, sur un substrat en aluminium selon l'une des revendications 1 à 4, dans lequel le substrat en aluminium a une pureté qui est de préférence d'au moins environ 99% en poids, et la couche d'oxyde d'aluminium est formée en mettant ledit substrat en aluminium en contact avec un gaz oxydant, contenant d'environ 15 à 100% en poids d'oxygène, pendant 10 à 200 heures, puis chauffée dans une gamme de températures qui va de 350°C à 500°C. 20
7. Procédé de formation d'un revêtement protecteur, résistant à la corrosion, sur un substrat en aluminium selon l'une des revendications précédentes, dans lequel la couche d'oxyde d'aluminium est une couche d'oxyde d'aluminium de haute pureté, ayant une pureté d'au moins 97% en poids, de préférence supérieure à 99% en poids, le ou les gaz contenant du fluor sont des gaz contenant du fluor de haute pureté qui contiennent moins de 100 ppm d'impu- 25

retés autres que des gaz porteurs, et le revêtement protecteur résistant à la corrosion ainsi formé a une haute pureté, c'est-à-dire qu'il contient moins d'environ 3% en poids, et de préférence moins d'environ 1% en poids, d'éléments autres que de l'aluminium, de l'oxygène, de l'hydrogène, et du fluor.

8. Procédé de formation d'un revêtement protecteur, résistant à la corrosion, sur un substrat en aluminium selon l'une des revendications précédentes, grâce auquel une couche protectrice contenant de 3 à 18% en poids de fluor sera formée sur ledit substrat en aluminium. 30

Figure 1

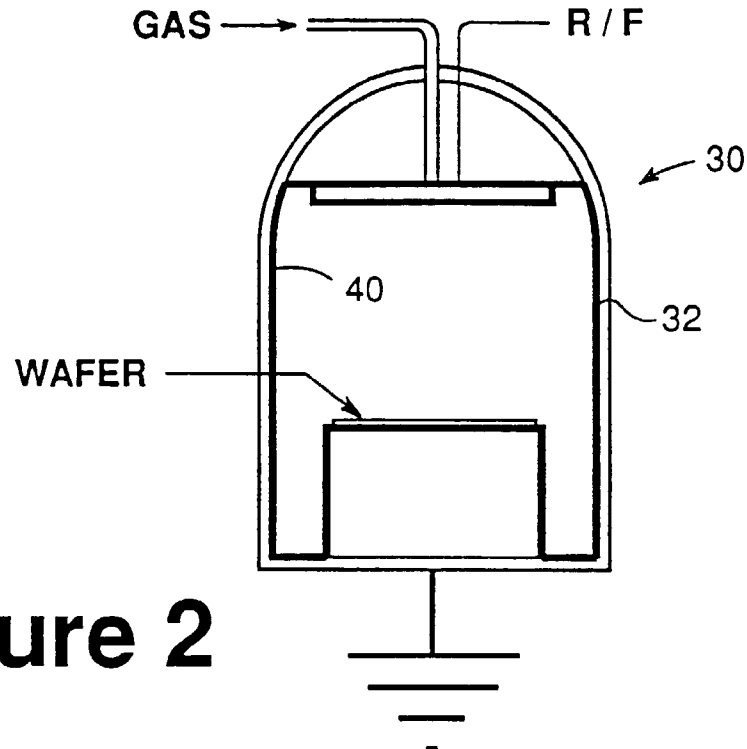
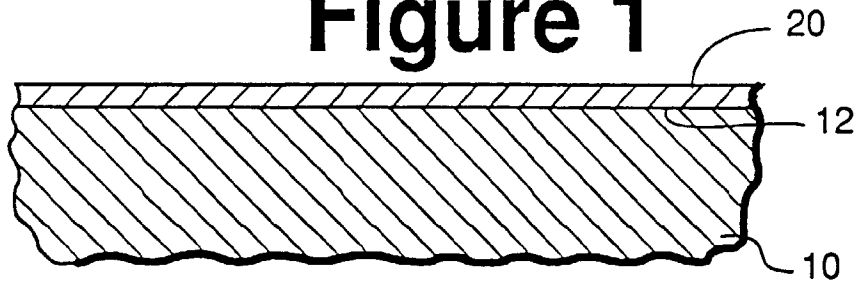


Figure 2

FORMING A HIGH PURITY ALUMINUM OXIDE FILM ON
AN ALUMINUM SUBSTRATE SUCH AS THE INNER SURFACE
OF AN ALUMINUM REACTOR USED FOR PROCESSING
SEMICONDUCTOR WAFERS

CONTACTING THE HIGH PURITY ALUMINUM OXIDE FILM
WITH ONE OR MORE FLORINE-CONTAINING GASES AT AN
ELEVATED TEMPERATURE TO FORM A HIGH PURITY
PROTECTIVE COATING ON THE ALUMINUM SUBSTRATE

Figure 3