

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 486 018 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.02.1997 Bulletin 1997/07

(51) Int Cl.⁶: **G08B 13/16**, G08B 13/04,
G08B 19/00

(21) Application number: **91119446.2**

(22) Date of filing: **14.11.1991**

(54) **Intruder detector**

Einbruch-Detektor

Détecteur d'intrus

(84) Designated Contracting States:
BE DE ES FR GB IT LU NL

(30) Priority: **16.11.1990 DE 4036617**

(43) Date of publication of application:
20.05.1992 Bulletin 1992/21

(73) Proprietor: **BURLE TECHNOLOGIES, INC.**
Wilmington, DE 19899 (US)

(72) Inventor: **BURLE TECHNOLOGIES, INC.**
Wilmington, DE 19899 (US)

(74) Representative: **Schouten, Marcus Maria et al**
INTERNATIONAAL OCTROOIBUREAU B.V.,
Prof. Holstlaan 6
5656 AA Eindhoven (NL)

(56) References cited:
GB-A- 2 171 518 **US-A- 4 853 677**
US-A- 4 928 085

EP 0 486 018 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

The invention relates to an intruder detector according to the preamble of Patent Claim 1 and in particular to an acoustic pressure wave glass monitor.

German Offenlegungsschrift 2,656,318, which is the starting point of the preamble of Patent Claim 1, discloses a device for detecting the movement of bodies emitting heat, in which two different detectors are connected such that an alarm is triggered only given the response of both detectors. In this case, one detector is embodied as an ultrasonic detector and one detector is embodied as an infrared detector.

A problem with an intruder detector of this type consists in that an infrared detector can detect only movements perpendicular to the principal axis of its security zone and an ultrasonic detector can detect only movements in the direction of the principal axis of its security zone. An intruder who moves only on the principal axis of the security zone or only at a right angle to the principal axis of the security zone of the detector can, by adopting this method of locomotion, avoid triggering the alarm since in so doing he always triggers only one of the two detectors.

From US 4 853 677 is known a portable intrusion alarm system, for an enclosed space responsive to frequency in the 1 to 2 Hz range detecting openings of doors or windows and responsive to frequencies in the 3 to 4 kHz range detecting breaking glass. A detected frequency in the 1 to 2 Hz increases the sensitivity required for detecting breaking glass.

It is the object of the invention to develop an intruder detector according to the preamble of Patent Claim 1 in such a way that intrusions are reliably detected and false alarms are avoided with the aid of simple means.

This object is achieved by means of the measures specified in Patent Claim 1.

It is therefore provided according to the invention to combine a pressure fluctuation detecting device with a glass breakage detecting device in such a way that an alarm is triggered only if both detecting devices are addressed with frequencies which are situated in a frequency range that is characteristic of the respective detection criterion. A high security against intrusions and false alarms is guaranteed by the selection of the glass breakage criterion and of the pressure fluctuation criterion, since on the one hand both criteria are always fulfilled given the destruction of a pane in the security zone, while on the other hand both criteria are virtually incapable of being fulfilled by a person legitimately staying in the room to be secured.

Moreover, the security against false alarms is further enhanced owing to the fact that triggering of the detecting devices is restricted to frequencies the combination of which arises exclusively given the destruction of the pane in a room.

Since the sound waves of the noise of glass breakage generally reach the detecting devices before the

pressure waves, by using the time-delay circuit according to Patent Claim 1 it is achieved that the two detecting devices pass on an intrusion at the same time.

Moreover, by using the trigger according to Patent Claim 1 it is achieved that too slight pressure fluctuations, such as can arise upon movement of a door, for example, cannot trigger the pressure fluctuation detecting device, so that security against false alarms is further improved by these measures.

Further advantageous embodiments of the invention are specified in the remaining subclaims.

The invention is explained in more detail below using the description of exemplary embodiments with reference to the drawing, wherein:

Figure 1 shows a block diagram of a first exemplary embodiment of the intruder detector according to the invention in the form of an acoustic pressure wave glass monitor, and
 Figure 2 shows a block diagram of a second exemplary embodiment of the intruder detector according to the invention with a joint detector for both detecting devices.

A pressure detector 10 according to Figure 1 has a structure known per se and is designed such that it can effectively sense fluctuations in room pressure down to 0.3 mbar. It is arranged in the room to be secured in such a way that it senses pressure fluctuations in the entire security zone.

The output signal of the pressure detector 10 is fed to a first bandpass filter 15 which suppresses interfering signals not situated in the pressure fluctuation frequency range characteristic of a breaking pane. As could be established by trials, the frequencies of the pressure fluctuations arising given the destruction of a pane are situated between 5 Hz and 10 Hz.

Since the amplitudes of the pressure fluctuations are relatively low, the output signal of the bandpass filter 15 is fed to an amplifier 20 which has a gain of 300 at a frequency of 7.5 Hz.

The filtered and amplified signal of the pressure detector 10 is fed to a trigger 25 or to a Schmitt trigger circuit. This trigger is the junction between the analog pressure-sensing circuit and the downstream digital circuit. The output of the trigger is a high signal when the output signal of the amplifier 20 overshoots an adjustable threshold value, or a low signal when a smaller signal than the threshold value is present at the input of the trigger 25. The threshold value of the trigger is selected such that fluctuations in room pressure of less than 0.3 mbar or in a range from -0.3 mbar to +0.3 mbar correspond to a low signal at the output of the trigger 25. The output signal of the trigger 25 is fed to an AND element 60 and a light-emitting diode 50 which displays the undershooting or overshooting of the threshold value pressure of +0.3 mbar.

A glass breakage detector 30 is either mounted di-

rectly on a pane or arranged such that it can sense any noises from the breakage of a plurality of panes, which need not be situated in a plane window front. In the first case, the glass breakage detector 30 has a conventional structure, and in the second case the glass breakage detector 30 is a microphone having a frequency response and a pickup pattern by means of which a glass breakage in the entire security zone of the glass breakage detector can be effectively sensed.

The output signal of the glass breakage detector 30 is fed to a second bandpass filter 35 which suppresses interfering signals which are not situated in the frequency range of the noises of glass breakage. In order for the glass breakage frequencies of panes such as bullet-proof glass, plastics-containing panes or pure glass panes to be covered, the lower limiting frequency is selected at 4 kHz and the upper limiting frequency at 12 kHz.

The output signal of the second bandpass filter is fed to a rectifier 40, since the downstream digital circuit operates with positive levels. Furthermore, the signal is smoothed or lengthened by the rectifier, so that it can be more effectively detected by the downstream circuit.

The glass breakage signal is delayed by a time $T_1 = 0.1$ s in a time-delay circuit 45. Given glass breakage, there is a high signal at the output of the time-delay circuit 45, and in the absence of glass breakage there is a low signal. This signal is fed to the AND element 60 and a light-emitting diode 55, which displays a noise of glass breakage.

If a high signal is fed simultaneously to the AND element 60 from the trigger 25 and the time-delay circuit 45, a high signal likewise arises at the output of the AND element 60.

A downstream storage device 65 passes the high signal on to a downstream relay 70 and a light-emitting diode 75, which displays the case of an alarm. In this regard, the storage device 65 stores the high signal of the AND element 60 until a reset signal is applied to the storage device 65 via the reset input 80, or until the operating voltage of the storage device 65 is switched off. The storage device 65 is designed such that it stores a low signal given application of the operating voltage.

Finally, the alarm report is transmitted, for example, to an alarm indicator or a report control centre by means of a contact assembly (not shown) of the relay 70.

The detector 85 according to Figure 2 is arranged in the room to be secured in such a way that it can effectively sense pressure fluctuations and noises of glass breakage in the entire security zone.

The detector 85 can detect vibrations in a range from 5 Hz to 12 kHz, and can be formed, for example, by a microphone which can sense this range.

The output signal of the detector 85 is fed to the bandpass filters 15 and 35, which transmit the corresponding frequency components thereof, as already in the case of the first exemplary embodiment. The circuit downstream of the glass breakage detector 30 and the

pressure detector 10 or the detector 85 is identical.

The mode of functioning of the acoustic pressure wave glass monitor, which is the same in both exemplary embodiments, is explained in more detail below. In this connection, the sequence in the case of an actual intrusion is first described.

When a glass pane is pushed in or smashed in, or when a hole is cut out of it, in the security zone a noise of glass breakage arises, on the one hand, and pressure fluctuations are triggered in the room to be secured, on the other hand. The noise of glass breakage is recorded by the glass breakage detector 30 or the detector 85, and the pressure fluctuations are recorded by the pressure detector 10 or likewise by the detector 85, the pressure fluctuations generally being recorded with a delay of approximately 0.1 s, since pressure waves have a lower rate of propagation than sound waves.

The sound waves of the noise of glass breakage are detected by the glass breakage detector 30 or the detector 85, conducted via the second bandpass filter 35 to the rectifier 40, where they are rectified and smoothed or maintained for a specific time T_2 and transmitted with a 0.1 s delay time T_1 via the time-delay circuit 45 as a high signal to the AND element 60, a light-emitting diode 55 simultaneously lighting up. The time T_2 can be selected in the range from 0.1 s to 1 s. In the meantime, the pressure fluctuation has also reached the AND element 60 via the pressure detector 10 or the detector 85, the first bandpass filter 15, the amplifier 20 and the trigger 25 as a high signal, the light-emitting diode 55 lighting up and there arising at the output of the AND element 60 a high signal which is maintained via the storage device 65 and actuates the relay 70 as well as switching on a light-emitting diode 75. Finally, an alarm report is transmitted to an alarm indicator or a report control centre via a contact assembly of the relay 70.

A high security against false alarms is achieved by means of the acoustic pressure wave glass monitor according to the invention. If the glass breakage detector is constructed as a microphone and mounted in a room in such a way that it monitors a plurality of windows or glass doors, the noises that are not situated in the frequency range of the noises of glass breakage are suppressed via the second bandpass filter 35.

Moreover, by using the first bandpass filter 15 it is achieved that only the fluctuations typical of a glass breakage are transmitted.

In addition, it is ensured by means of the delay time T_1 of the time-delay circuit 45 that a pressure change and a noise of glass breakage trigger an alarm only in a sequence characteristic of a glass breakage.

Finally, by means of the AND element 60 the breaking of a glass or, for example, the crack of a supersonic aircraft breaking the sound barrier is reliably detected as a false alarm and an alarm report is prevented.

Pressure fluctuations in the room owing to wind conditions around the building in which the zone to be

secured is situated, or pressure fluctuations owing to the opening of a door or a window have fluctuation frequencies which are situated below the lower limiting frequency of the first bandpass filter 15. Moreover, pressure fluctuations owing to the impact of a bird on a pane are generally of so low an amplitude that the signals generated by the pressure detector 10 or the detector 85 are situated below the threshold voltage of the trigger 25.

The pressure detector and the glass breakage detector or the entire acoustic pressure wave glass monitor can be accommodated in a single housing.

The acoustic pressure wave glass monitor according to the invention can be used in rooms of up to 50 m². Its mode of functioning is ensured even if individual windows or doors of the house to be secured are open.

A description is given of an intruder detector having two different detecting devices for the same security zone, which triggers an alarm only if both detecting devices respond in a specific way, one detecting device being a glass breakage detecting device which comprises a glass breakage detector and a bandpass filter and the other detecting device being a pressure fluctuation detecting device which comprises a pressure detector and a second bandpass filter, it being possible for the pressure detector and the glass breakage detector to be formed by a single sensing element. An alarm is triggered only if both detecting devices are addressed in specific frequency bands.

Claims

1. Intruder detector having two different detecting devices for the same security zone, which triggers an alarm only if both detecting devices respond in a specific way, characterised

a) in that one detecting device is a glass breakage detecting device (30,35,40,45; 85,35,40,45) which comprises a glass breakage detector (30; 85) and a bandpass filter (35),

b) in that the other detecting device is a pressure fluctuation detecting device (10,15,20,25; 85,15,20,25) which comprises a pressure detector (10; 85) and a further bandpass filter (15),

c) in that an alarm is triggered only if both detecting devices are addressed in specific frequency bands,

d) in that the glass breakage detecting device comprises a time-delay circuit (45) which delays the triggering of the glass breakage detecting device by a predetermined time T1,

e) in that the glass breakage detecting device comprises a rectifier circuit (40) which rectifies and smooths a signal of the glass breakage detecting device, and

f) in that the rectifier circuit maintains a report

signal of the glass breakage detecting device for a predetermined time T2 after the noise of glass breakage has died away.

2. Intruder detector according to Claim 1, characterised by a detector (85) which serves as a glass breakage detector and pressure detector.
3. Intruder detector according to Claim 1 or 2, characterised in that the pressure fluctuation detecting device comprises a trigger (25) which prevents pressure fluctuations of too small an amplitude from triggering the pressure fluctuation detecting device.
4. Intruder detector according to one of the preceding claims, characterised in that the pressure fluctuation detecting device comprises an amplifier (20).
5. Intruder detector according to one of the preceding claims, characterised in that given the triggering of both detecting devices an AND element (60) emits a signal by means of which an alarm is triggered.
6. Intruder detector according to Claim 5, characterised in that the alarm signal emitted by the AND element is retained by means of a storage device (65).
7. Intruder detector according to Claim 6, characterised in that the storage device is reset by switching off the operating voltage.
8. Intruder detector according to one of the preceding claims, characterised in that the bandpass filter of the pressure fluctuation detecting device has an upper and lower limiting frequency of 10 Hz and 5 Hz, respectively.
9. Intruder detector according to one of the preceding claims, characterised in that the bandpass filter of the glass breakage detecting device has an upper and lower limiting frequency of 12 kHz and 4 kHz, respectively.
10. Intruder detector according to one of Claims 3 to 9, characterised in that the threshold value of the trigger is selected in such a way that fluctuations in room pressure which are smaller than ± 0.3 mbar do not trigger the pressure fluctuation detecting device.
11. Intruder detector according to one of Claims 4 to 10, characterised in that the predetermined time T1 is selected at 0.1 s.
12. Intruder detector according to one of Claims 1 to 11, characterised in that the amplifier has a gain of 300.

13. Intruder detector according to one of the preceding claims, characterised in that the pressure detector and the glass breakage detector are accommodated in a joint housing.
14. Intruder detector according to one of the preceding claims, characterised in that the entire intruder detector is accommodated in a single housing.

Patentansprüche

1. Einbruchdetektor mit zwei verschiedenen Detektorvorrichtungen für die gleiche Sicherheitszone, der einen Alarm nur dann auslöst, wenn beide Detektorvorrichtungen einer bestimmten Weise entsprechen, dadurch gekennzeichnet, daß

- a) eine Detektorvorrichtung eine Glasbruchdetektor-Vorrichtung (30,35,40,45; 85,35,40,45) ist, die einen Glasbruchdetektor (30; 85) und ein Bandpaßfilter (35) umfaßt,
- b) die andere Detektorvorrichtung eine Druckschwankungsdetektor-Vorrichtung (10,15,20,25; 85,15,20,25) ist, die einen Druckdetektor und ein zweites Bandpaßfilter (15) umfaßt,
- c) ein Alarm nur ausgelöst wird, wenn beide Detektorvorrichtungen innerhalb bestimmter Frequenzbänder angesprochen werden,
- d) die Glasbruchdetektor-Vorrichtung eine Zeitverzögerungsschaltung (45) umfaßt, die das Auslösen der Glasbruchdetektor-Vorrichtung um eine vorbestimmte Zeitspanne T1 verzögert,
- e) die Glasbruchdetektor-Vorrichtung eine Berichtigungsschaltung (40) umfaßt, die das Signal der Glasbruchdetektor-Vorrichtung berichtigt und glättet, und
- f) die Berichtigungsschaltung ein Meldesignal der Glasbruchdetektor-Vorrichtung für eine vorbestimmte Zeitspanne T2 aufrechterhält, nachdem das Glasbruchgeräusch verklungen ist.

2. Einbruchdetektor nach Anspruch 1, dadurch gekennzeichnet, daß ein Detektor (85) vorhanden ist, der als Glasbruchdetektor und Druckdetektor dient.
3. Einbruchdetektor nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Druckschwankungsdetektor-Vorrichtung einen Trigger (25) umfaßt, der verhindert, daß Druckschwankungen mit zu kleiner Amplitude die Druckschwankungsdetektor-Vorrichtung auslösen.
4. Einbruchdetektor nach einem der vorgenannten Ansprüche, dadurch gekennzeichnet, daß die

Druckschwankungsdetektor-Vorrichtung einen Verstärker (20) umfaßt.

5. Einbruchdetektor nach einem der vorgenannten Ansprüche, dadurch gekennzeichnet, daß beim Auslösen beider Detektorvorrichtungen ein AND-Baustein (60) ein Signal abgibt, mit Hilfe dessen ein Alarm ausgelöst wird.
6. Einbruchdetektor nach Anspruch 5, dadurch gekennzeichnet, daß das vom AND-Baustein abgegebene Alarmsignal mit Hilfe einer Speichervorrichtung (65) erhalten wird.
7. Einbruchdetektor nach Anspruch 6, dadurch gekennzeichnet, daß die Speichervorrichtung zurückgestellt wird, indem die Betriebsspannung abgeschaltet wird.
8. Einbruchdetektor nach einem der vorgenannten Ansprüche, dadurch gekennzeichnet, daß das Bandpaßfilter der Druckschwankungsdetektor-Vorrichtung eine obere und untere Grenzfrequenz von 10 Hz beziehungsweise 5 Hz hat.
9. Einbruchdetektor nach einem der vorgenannten Ansprüche, dadurch gekennzeichnet, daß das Bandpaßfilter der Glasbruchdetektor-Vorrichtung eine obere und untere Grenzfrequenz von 12 KHz beziehungsweise 4 KHz hat.
10. Einbruchdetektor nach einem der Ansprüche 3 bis 9, dadurch gekennzeichnet, daß der Schwellenwert des Triggers so gewählt wird, daß Schwankungen des Raumdrucks, die geringer sind als $\pm 0,3$ mbar, die Druckschwankungsdetektor-Vorrichtung nicht auslösen.
11. Einbruchdetektor nach einem der Ansprüche 4 bis 10, dadurch gekennzeichnet, daß für die vorbestimmte Zeitspanne T1 0,1 s gewählt wird.
12. Einbruchdetektor nach einem der Ansprüche 1 bis 11, dadurch gekennzeichnet, daß der Verstärker einen Verstärkungsfaktor von 300 hat.
13. Einbruchdetektor nach einem der vorgenannten Ansprüche, dadurch gekennzeichnet, daß der Druckdetektor und der Glasbruchdetektor in einem gemeinsamen Gehäuse untergebracht sind.
14. Einbruchdetektor nach einem der vorgenannten Ansprüche, dadurch gekennzeichnet, daß der gesamte Einbruchdetektor in einem einzigen Gehäuse untergebracht ist.

Revendications

1. Détecteur d'intrus comportant deux dispositifs de détection différents pour la même zone de sécurité, qui ne déclenche une alarme que si les deux dispositifs de détection réagissent de manière spécifique, caractérisé en ce que :
 - a) un dispositif de détection est un dispositif de détection de bris de verre (30, 35, 40, 45; 85, 35, 40, 45) qui comprend un détecteur de bris de verre (30; 85) et un filtre passe-bande (35),
 - b) l'autre dispositif de détection est un dispositif de détection de fluctuations de pression (10, 15, 20, 25; 85, 15, 20, 25) qui comprend un détecteur de pression (10; 85) et un autre filtre passe-bande (15),
 - c) une alarme n'est déclenchée que si les deux dispositifs de détection sont adressés dans des bandes de fréquences spécifiques,
 - d) le dispositif de détection de bris de verre comprend un circuit de temporisation (45) qui retarde le déclenchement du dispositif de détection de bris de verre d'un temps prédéterminé T1,
 - e) le dispositif de détection de bris de verre comprend un circuit redresseur (40) qui redresse et lisse un signal du dispositif de détection de bris de verre et,
 - f) le circuit redresseur maintient un signal de rapport du dispositif de détection de bris de verre pendant un temps prédéterminé T2 après que le bruit de bris de verre s'est évanoui.
2. Détecteur d'intrus selon la revendication 1, caractérisé par un détecteur (85) qui sert de détecteur de bris de verre et de détecteur de pression.
3. Détecteur d'intrus selon la revendication 1 ou 2, caractérisé en ce que le dispositif de détection de fluctuations de pression comprend un trigger (25) qui empêche les fluctuations de pression de trop faible amplitude de déclencher le dispositif de détection de fluctuations de pression.
4. Détecteur d'intrus selon l'une quelconque des revendications précédentes, caractérisé en ce que le dispositif de détection de fluctuations de pression comprend un amplificateur (20).
5. Détecteur d'intrus selon l'une quelconque des revendications précédentes, caractérisé en ce que, suite au déclenchement des deux dispositifs de détection, un élément ET (60) émet un signal par lequel une alarme est déclenchée.
6. Détecteur d'intrus selon la revendication 5, caractérisé en ce que le signal d'alarme émis par l'élément ET est retenu à l'aide d'un dispositif de stockage (65).
7. Détecteur d'intrus selon la revendication 6, caractérisé en ce que le dispositif de stockage est remis à zéro en coupant la tension d'exploitation.
8. Détecteur d'intrus selon l'une quelconque des revendications précédentes, caractérisé en ce que le filtre passe-bande du dispositif de détection de fluctuations de pression a une fréquence limite supérieure et une fréquence limite inférieure de 10 Hz et 5 Hz, respectivement.
9. Détecteur d'intrus selon l'une quelconque des revendications précédentes, caractérisé en ce que le filtre passe-bande du dispositif de détection de bris de verre a une fréquence limite supérieure et une fréquence limite inférieure de 12 kHz et 4 kHz, respectivement.
10. Détecteur d'intrus selon l'une quelconque des revendications 3 à 9, caractérisé en ce que la valeur de seuil du trigger est sélectionnée de telle manière que les fluctuations de la pression ambiante qui sont plus petites que $\pm 0,3$ mbar ne déclenchent pas le dispositif de détection de fluctuations de pression.
11. Détecteur d'intrus selon l'une quelconque des revendications 4 à 10, caractérisé en ce que le temps prédéterminé T1 est sélectionné à 0,1 s.
12. Détecteur d'intrus selon l'une quelconque des revendications 1 à 11, caractérisé en ce que l'amplificateur a un gain de 300.
13. Détecteur d'intrus selon l'une quelconque des revendications précédentes, caractérisé en ce que le détecteur de pression et le détecteur de bris de verre sont logés dans un boîtier combiné.
14. Détecteur d'intrus selon l'une quelconque des revendications précédentes, caractérisé en ce que le détecteur d'intrus est reçu dans sa totalité dans un seul boîtier.

Fig.1

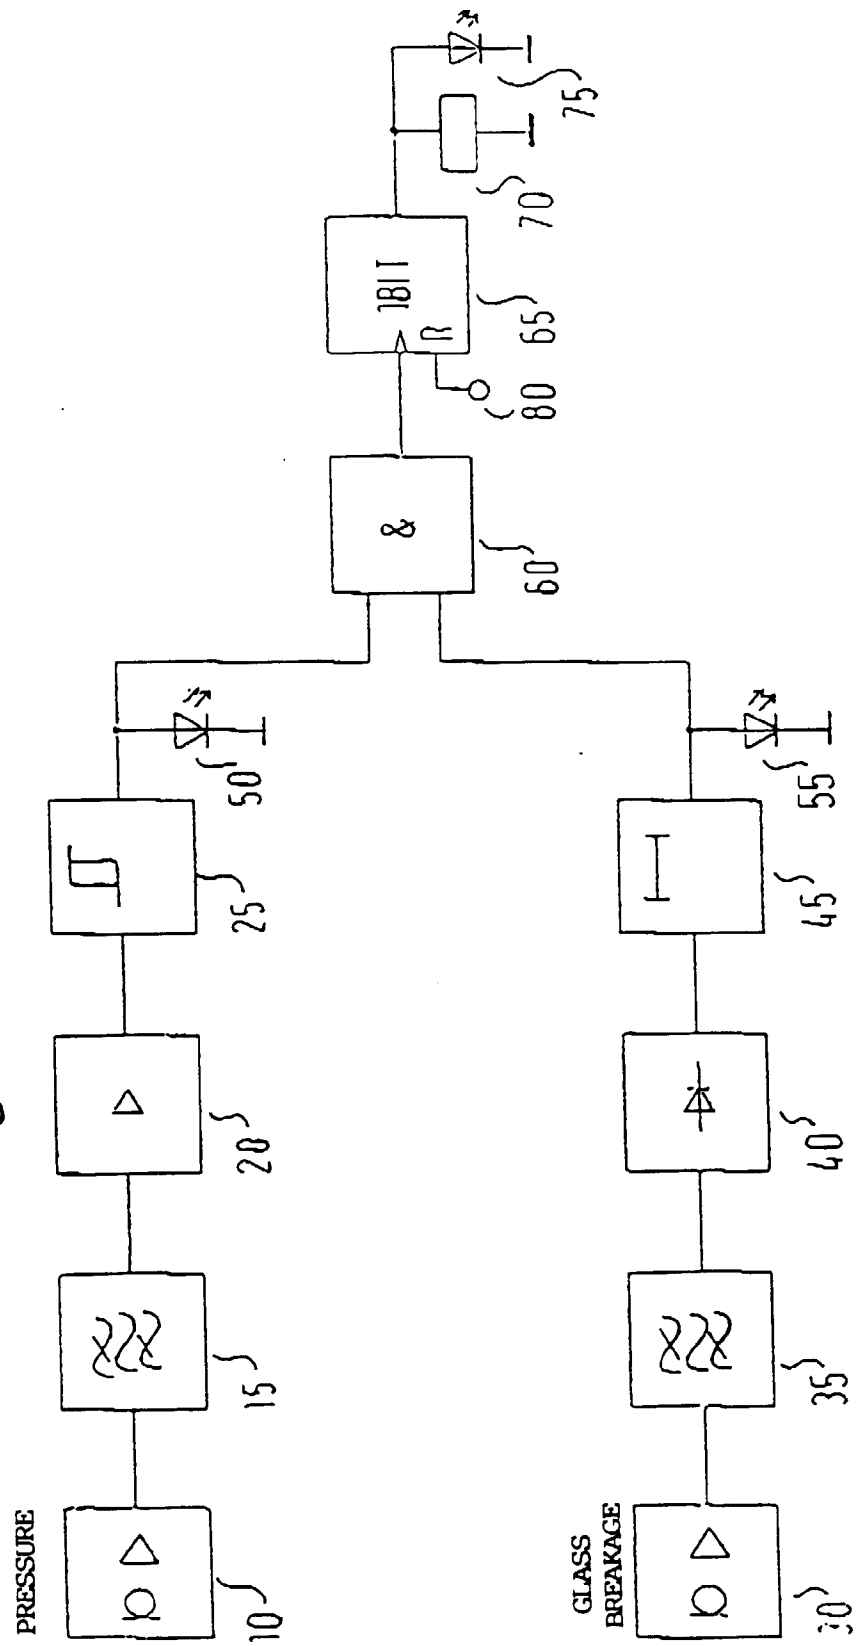


Fig.2

