


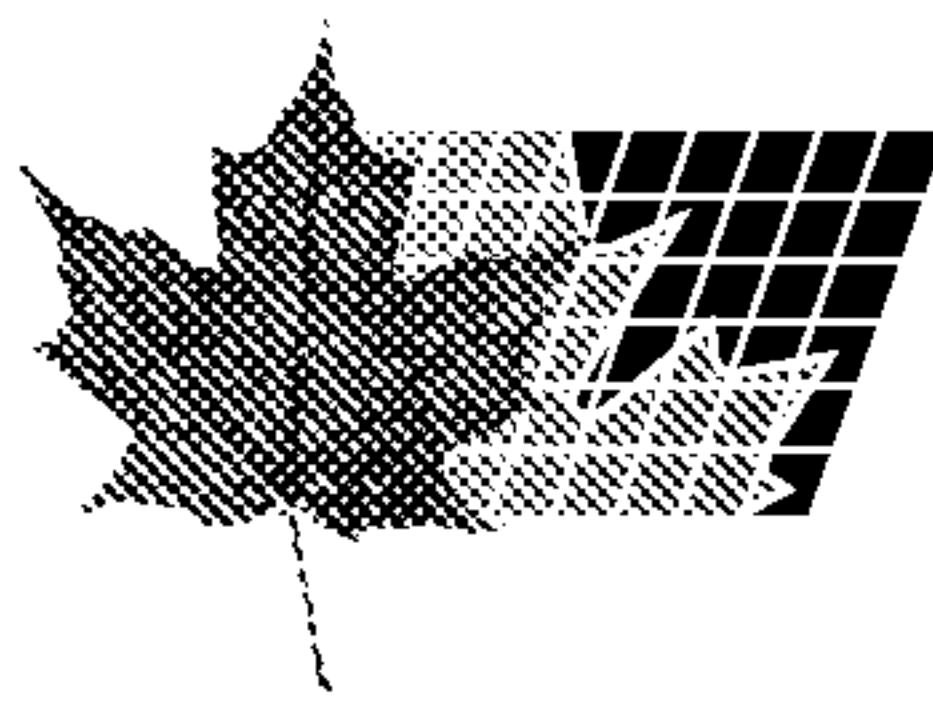

(11) (21) (C) **2,096,589**
(22) 1993/05/19
(43) 1993/11/26
(45) 2000/12/26

(72) Shibano, Yoshihide, JP

(73) S & C CO., LTD., JP


(51) Int.Cl.⁵ B08B 3/12

(30) 1992/05/25 (41510/4) JP

(30) 1992/09/08 (239384/4) JP

(54) **METHODE DE NETTOYAGE PAR ULTRASONS D'UNE PIECE
A USINER**

(54) **METHOD OF ULTRASONICALLY CLEANING WORKPIECE**

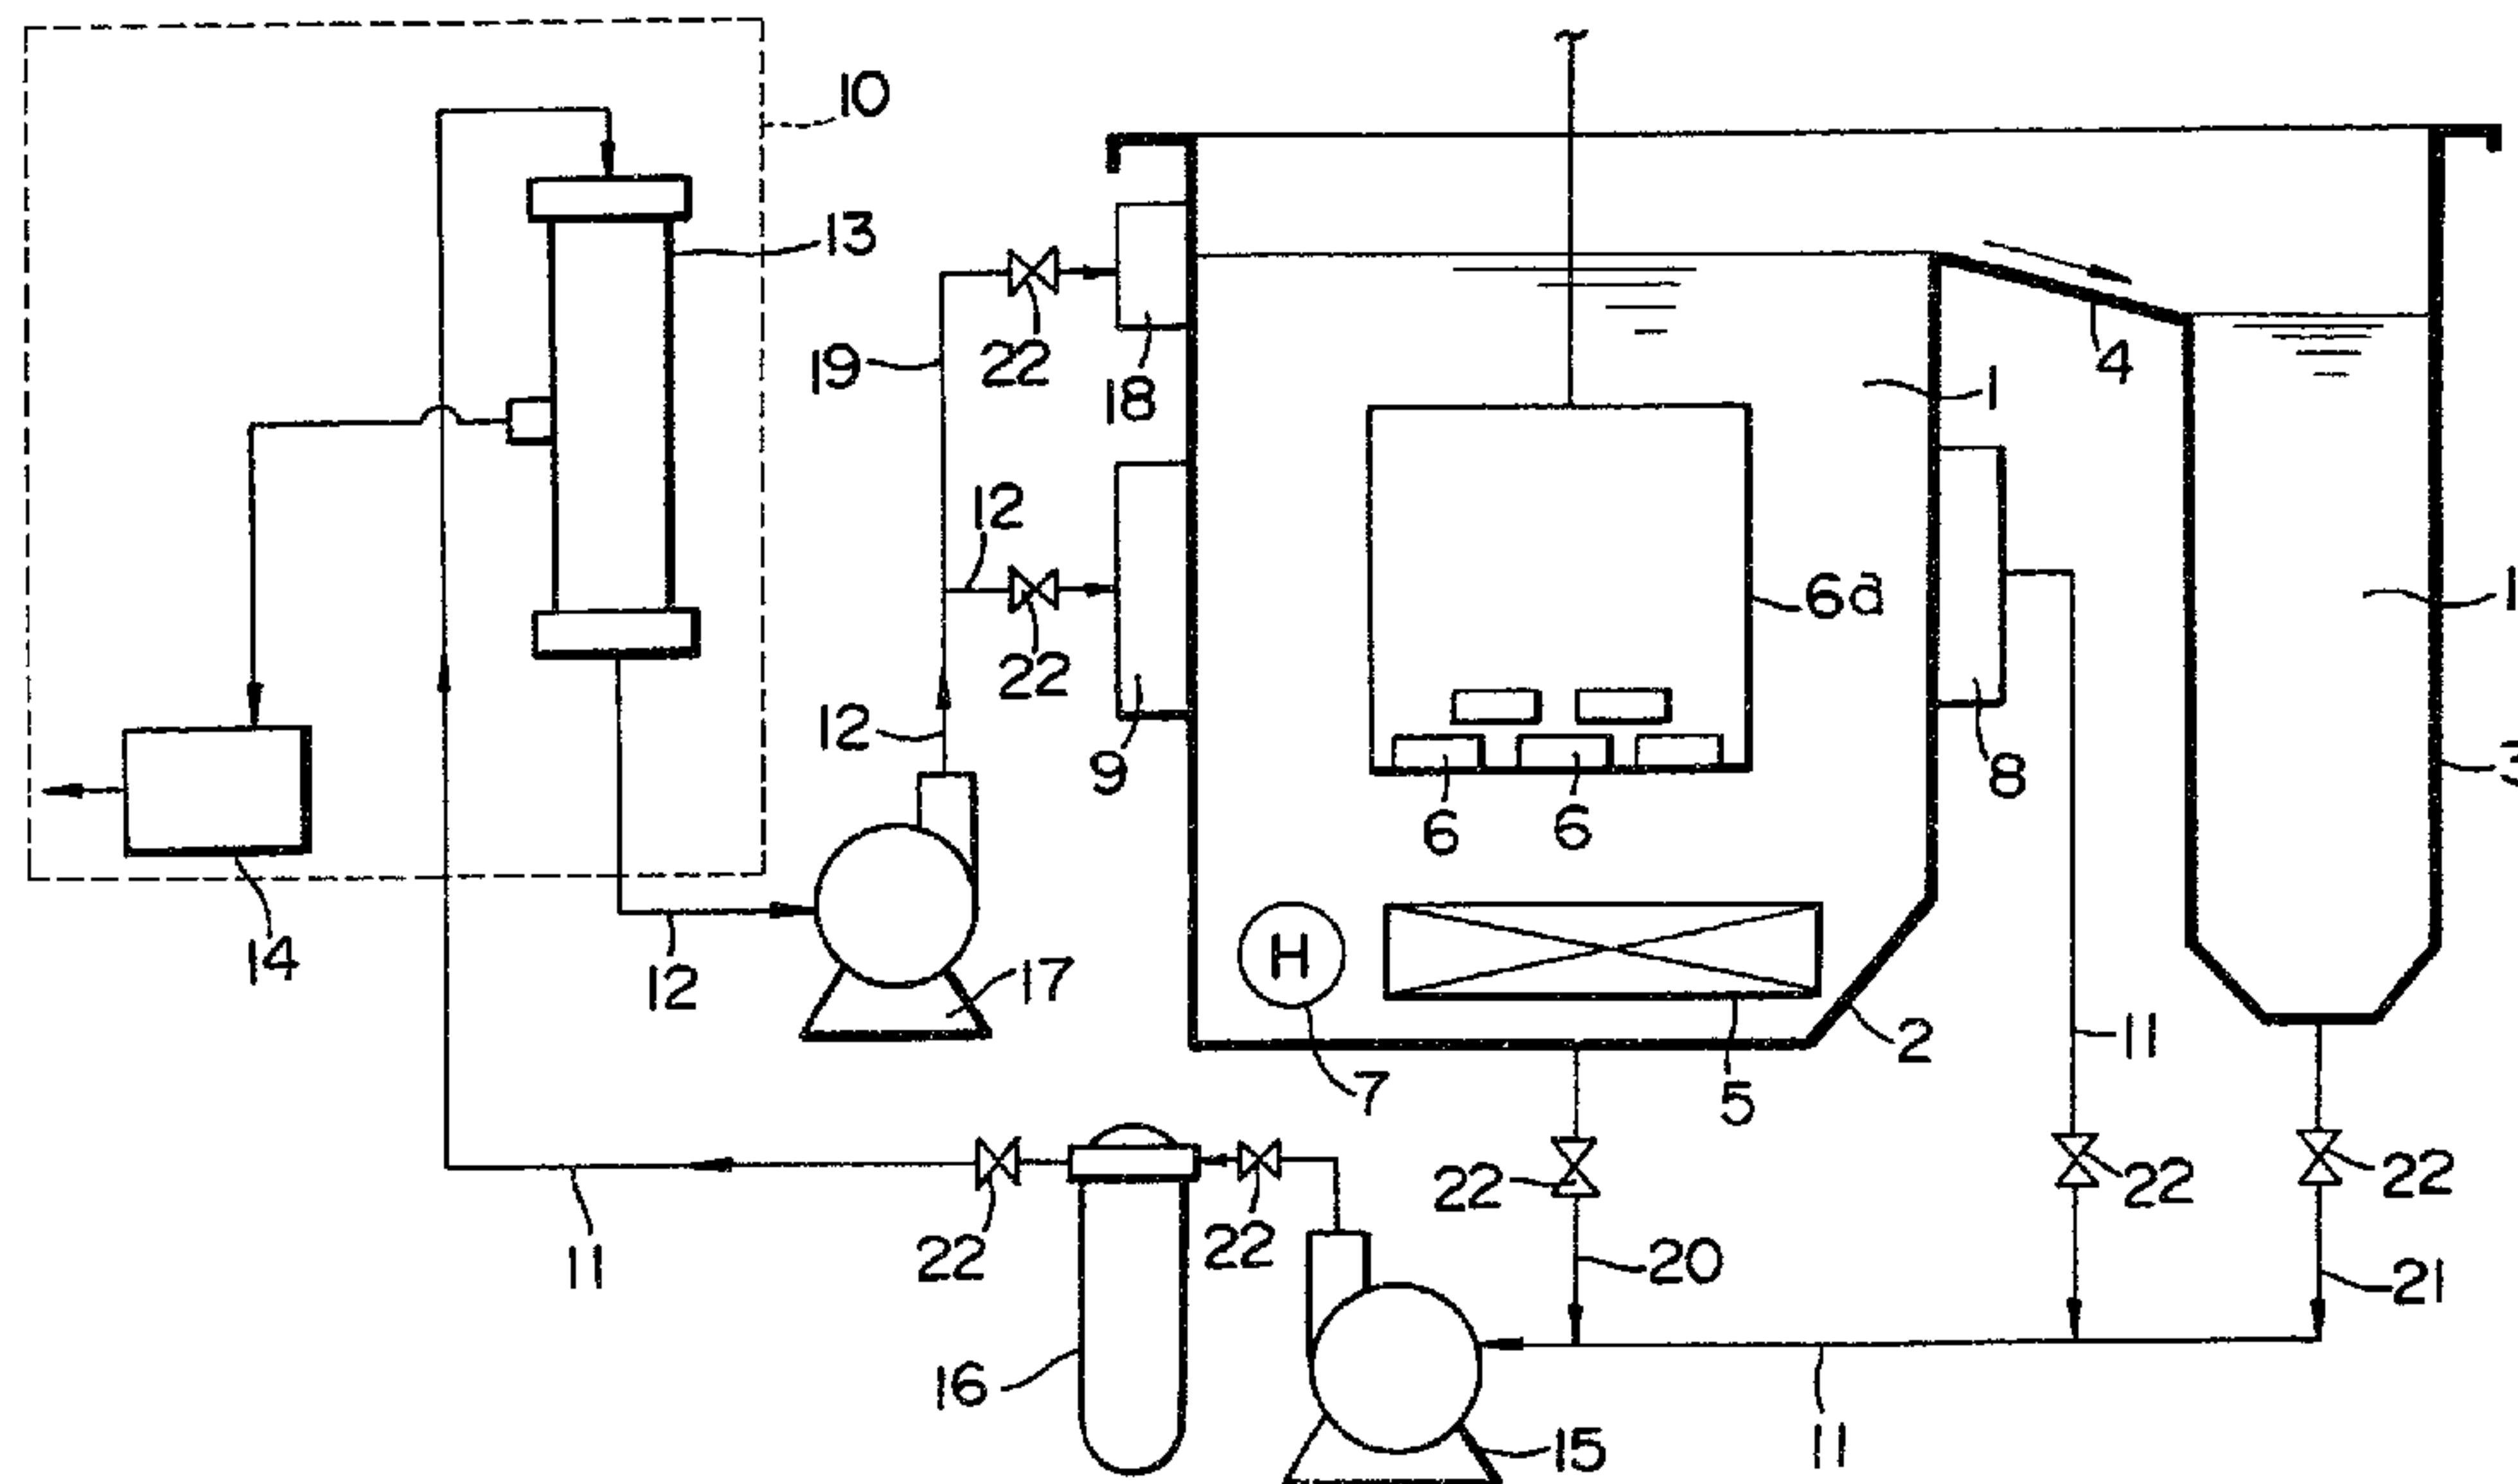

(57) An ultrasonic cleaning tank with an ultrasonic vibrator mounted on its bottom is supplied with an aqueous cleaning solution which has been deaerated to a predetermined dissolved oxygen content ranging from 0.01 to 5 ppm. A workpiece to be ultrasonically cleaned is then immersed in the cleaning solution. Thereafter, the ultrasonic vibrator radiates ultrasonic energy into the cleaning solution to remove foreign matter and burrs off the workpiece.

- 27 -

METHOD OF ULTRASONICALLY CLEANING WORKPIECEABSTRACT OF THE DISCLOSURE

5

An ultrasonic cleaning tank with an ultrasonic vibrator mounted on its bottom is supplied with an aqueous cleaning solution which has been deaerated to a predetermined dissolved oxygen content ranging from 0.01 to 5 ppm. A workpiece to be ultrasonically cleaned is then immersed in the cleaning solution. Thereafter, the ultrasonic vibrator radiates ultrasonic energy into the cleaning solution to remove foreign matter and burrs off the workpiece.

15

20

25

30

163617

METHOD OF ULTRASONICALLY CLEANING WORKPIECEFIELD OF THE INVENTION

5 The present invention relates to a method of
ultrasonically cleaning a workpiece, and more particularly
to a method of ultrasonically cleaning a workpiece by
supplying a deaerated cleaning solution to a cleaning tank
with an ultrasonic vibrator mounted on its bottom, and
10 transferring ultrasonic energy from the ultrasonic
vibrator into the cleaning solution to clean a molded or
cast or machined workpiece immersed in the cleaning
solution.

15 BACKGROUND OF THE INVENTION

Workpieces such as ground, bored, or abraded
metallic workpieces, grounded glass or ceramic workpieces,
or injection- or extrusion-molded plastic workpieces are
20 often burred immediately after they are formed. Surfaces
of such workpieces are smeared by solid foreign matter
such as chips, small broken pieces resulting from burrs
and dust particles. To finish these workpieces, it is
necessary to remove the burrs and solid foreign matter
25 from their surfaces and to clean the surfaces.

Heretofore, it has been customary to clean
machined workpieces with a cleaning solution such as an
organic solvent of carbon chloride, e.g.,
30 perchloroethylene, 1,1,1-trichloroethylene, or the like,
or an organic solvent of chlorofluorocarbon. Though
another separate process is necessary to remove burrs
which have not completely separated from the workpiece,
the above cleaning process is effective in removing
35 foreign matter deposited on the workpiece because the
foreign matter can be cleaned off simply by immersing the

workpiece in a cleaning tank filled with the organic solvent.

5 However, the organic solvents of carbon chloride
are difficult to handle because most of them have an
anaesthetic effect and tend to cause problems if inhaled
over a long period of time. It is also known that the
chlorine contained in molecules of the organic solvents of
10 chlorofluorocarbon are responsible for destroying the
ozone layer around the earth. An international agreement
has been reached to abolish the use of all organic
solvents of chlorofluorocarbon by 1995.

 In view of the drawbacks of the conventional
15 cleaning solutions, research efforts have been directed to
the use of an aqueous cleaning solution. It has been
found that a cleaning solution used in an ultrasonic
cleaning process has an increased cleaning effect if it
is deaerated to reduce the content of a dissolved gas.
20 The principles behind the increased cleaning effect of a
deaerated cleaning solution are believed to be as follows:

 In the ultrasonic cleaning process, partial
vacuums are formed in the cleaning solution due to
25 cavitation when ultrasonic energy is radiated into the
cleaning solution. Since the cavities which temporarily
form in the cleaning solution contain only a slight amount
of vapor of the cleaning solution and are mostly vacuum,
they immediately collapse under the pressure of the
30 surrounding cleaning solution. When the cavities
collapse, microjets develop in the cleaning solution. The
microjets act on the surface of a workpiece which is
immersed in the cleaning solution to remove solid foreign
matter deposited on the workpiece, thus cleaning the
35 workpiece.

If the cleaning solution is not deaerated and contains a high concentration of dissolved gas, then the gas is evaporated in the cavities, resulting in the creation of gas bubbles in the cleaning solution. Since
5 the pressure of the gas in the gas bubbles acts against the pressure of the surrounding cleaning solution, the cavities are less liable to collapse, thus counteracting the production of microjets. Even if microjets are produced, they are dampened by the gas bubbles, and fewer
10 act on the surface of the workpiece. Once the gas bubbles are produced, the ultrasonic energy radiated by the ultrasonic vibrator is absorbed by the gas bubbles, making it difficult to cause cavitation. Consequently, an ultrasonic cleaning process which employs a cleaning
15 solution that is not deaerated is unable to produce a cleaning effect more than the very weak cleaning effect provided by the gas bubbles.

On the other hand, if a deaerated cleaning
20 solution is employed in an ultrasonic cleaning process, stronger microjets are developed because a smaller amount of gas is evaporated in the cavities and exerts a lower pressure against the pressure of the surrounding cleaning solution.

25 The inventor has found, as a result of research activities with respect to the ultrasonic cleaning process based on the above knowledge, that since powerful microjets for acting on the surface of a workpiece to be
30 cleaned are produced upon the collapse of cavities in a deaerated cleaning solution, an ultrasonic cleaning process employing an aqueous cleaning solution is effective in removing solid foreign matter off the surface of the workpiece, and much stronger microjets generated in
35 the aqueous cleaning solution are capable of removing

- 4 -

burrs that have not fully been separated from the workpiece.

5 Even when the amount of dissolved gas in an aqueous cleaning solution is greatly reduced, however, the aqueous cleaning solution may fail to provide a sufficient cleaning effect depending on the type of a workpiece to be cleaned.

10 SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a method of ultrasonically cleaning a workpiece with a high cleaning effect regardless of the type of the workpiece to be cleaned.

15 The inventor has conducted a study to investigate the reasons for the inability to obtain a desired cleaning effect simply by reducing the amount of a gas dissolved in an aqueous cleaning solution and has found that the gas dissolved in the aqueous cleaning solution is involved in the process of ultrasonic cleaning and has a desirable content range depending on the workpiece to be cleaned.

25 According to the invention there is provided a method of ultrasonically cleaning a workpiece in an ultrasonic cleaning tank containing aqueous cleaning solution, wherein the aqueous cleaning solution has been deaerated to a predetermined dissolved oxygen content ranging from 2 to 5 ppm, the aqueous cleaning solution has been heated to a temperature ranging from 30 to 55°C, a surface active agent has been added to the aqueous cleaning solution, and foreign matter, which is attached to the workpiece by oil, is removed during this cleaning stage. Since the ultrasonic

cleaning process is carried out in air, the gas dissolved in the cleaning solution is air. As the air contains oxygen and nitrogen at a ratio of about 1:4 by volume, the amount of oxygen dissolved in the cleaning solution is used to indicate the amount of gas dissolved in the cleaning solution throughout the specification.

The aqueous cleaning solution may comprise water or pure water or superpure water with ions removed therefrom, depending on the type of a workpiece to be cleaned, and may contain a detergent comprising a surface active agent. With the aqueous cleaning solution containing a surface active agent detergent, the surface tension thereof is reduced, and the aqueous cleaning solution easily finds its way into fine cracks and can easily emulsify oil. Therefore, the aqueous cleaning solution is suitable for use in removing small foreign matter such as dust particles and oil. The surface active agent detergent may comprise a cationic surface active agent, an anionic surface active agent, or a nonionic surface active agent, but should preferably comprise a nonionic surface active agent.

The saturated amount of oxygen dissolved in water at normal temperature is about 8 ppm. Since the aqueous cleaning solution is deaerated to the above dissolved oxygen content in the ultrasonic cleaning method according to the present invention, cavities that are created in the aqueous cleaning solution by cavitation when the ultrasonic energy is radiated into the cleaning solution are easily collapsed to produce strong microjets.

It would be practically difficult to reduce the amount of oxygen dissolved in the cleaning solution below 0.01 ppm because air is dissolved into the cleaning solution from its surface in the ultrasonic cleaning tank.

- 6 -

If the amount of oxygen dissolved in the cleaning solution exceeded 5 ppm, then when the ultrasonic energy is radiated from the ultrasonic vibrator into the cleaning solution, cavities produced by cavitation would not easily be collapsed, and no strong microjets would be applied to the workpiece, thus failing to provide a sufficient cleaning effect.

According to the present invention, the amount of oxygen dissolved in the cleaning solution is adjusted in the above range depending on the type of the workpiece. The workpiece can therefore be ultrasonically cleaned under conditions suitable for the type of the workpiece with a sufficient cleaning effect.

If solid foreign matter, such as material residues or dust particles held in direct contact with the workpiece under physical forces such as electrostatic forces, is to be removed, then it is preferable that the aqueous cleaning solution be deaerated to a dissolved oxygen content ranging from 0.01 to 3 ppm to remove the solid foreign matter against the physical forces.

If burrs which are not completely separated from the workpiece but remain partly connected thereto are to be removed, then it is preferable that the aqueous cleaning solution be deaerated to a dissolved oxygen content ranging from 0.01 to 0.5 ppm to apply sufficiently strong microjets for separating and removing the burrs from the workpiece.

If solid foreign matter attached to the workpiece by oil is to be removed, then it is preferable that the aqueous cleaning solution contain a surface active agent, and be deaerated to a dissolved oxygen

content ranging from 2 to 5 ppm, preferably from 3 to 4 ppm.

5 The solid foreign matter attached to the workpiece oil cannot easily be removed simply by strong microjets as the solid foreign matter sticks to the workpiece through the oil. For removing such solid foreign matter, it is necessary to remove the oil.

10 Findings by the inventor show that when the dissolved oxygen content is less than 2 ppm, the oil can temporarily be removed by strong microjets, but tend to form relatively large oil droplets. Inasmuch as such oil droplets are not easily emulsified and dispersed into the
15 cleaning solution, they are attached again to the workpiece. As a consequence, the solid foreign matter cannot easily be removed from the workpiece.

20 Since it is considered that the oil can easily be emulsified by the gas dissolved in the cleaning solution, the dissolved oxygen content should preferably be 2 ppm or higher for oil removal. If the dissolved oxygen content exceeded 5 ppm, most of the oil on the workpiece would be removed, but the oil which has soaked
25 into the workpiece would not be sufficiently removed but tend to remain. At this time, relatively large particles of solid foreign matter would be removed together with most of the oil. However, smaller particles of solid foreign matter would remain attached by the remaining oil
30 because no strong microjets would be applied.

35 When the cleaning solution is deaerated to adjust the dissolved oxygen content to the range of from 2 to 5 ppm, sufficient microjets are applied to remove the oil and the solid foreign matter that remains attached by the oil. The oil removed by the microjets is emulsified

and dispersed in the cleaning solution and will not be attached to the workpiece again. Thus, both the oil and the solid foreign matter are removed from the workpiece.

5 The method may further comprise the step of deaerating the cleaning solution by introducing the cleaning solution into a sealed tank and evacuating the sealed tank to discharge a gas dissolved in the cleaning solution into a space in the sealed tank.

10

 According to the present invention, the aqueous cleaning solution may be deaerated to a dissolved oxygen content ranging from 0.01 to 5 ppm and is not required to be deaerated to a dissolved oxygen content lower than 0.01
15 ppm. Therefore, the cleaning solution may efficiently be deaerated by the above deaerating step. It is not necessary to employ a highly expensive deaerator composed of a plurality of gas separating membrane modules.

20 The aqueous cleaning solution may be supplied to the ultrasonic cleaning tank after it has been deaerated to the above dissolved oxygen content by a deaerator separate from the ultrasonic cleaning tank and having the above sealed tank and an evacuating device for evacuating
25 the sealed tank.

 The method may further comprise the step of heating the cleaning solution to a temperature ranging from 30 to 55°C. When the cleaning solution is heated to
30 the above temperature range, cavities can easily develop in the cleaning solution by cavitation, and oil can easily be emulsified in the cleaning solution. The cleaning solution may be heated by a heater in the ultrasonic cleaning tank.

35

The above and other objects, features and advantages of the present invention will become apparent from the following description when taken in conjunction with the accompanying drawings which illustrate preferred
5 embodiments of the present invention by way of example.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a flow diagram of an ultrasonic
10 cleaning apparatus for carrying out a method of ultrasonically cleaning a workpiece according to one embodiment of the present invention;

FIG. 2 is a flow diagram of an ultrasonic
15 cleaning apparatus for carrying out the method of ultrasonically cleaning a workpiece according to another embodiment of the present invention; and

FIG. 3 is a graph showing the relationship
20 between the amount of oxygen dissolved in a cleaning solution, the intensity of microjets produced when cavities are collapsed in the cleaning solution, and the amount of removed oil.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in FIG. 1, an ultrasonic cleaning apparatus for ultrasonically cleaning a workpiece according to the present invention has an ultrasonic
30 cleaning tank 2 for a cleaning solution 1 and an overflow tank 3 adjacent the ultrasonic cleaning tank 2. The ultrasonic cleaning tank 2 and the overflow tank 3 are interconnected by means of an inclined discharge passage 4. An ultrasonic vibrator 5 is mounted on the bottom of
35 the ultrasonic cleaning tank 2 for generating ultrasonic energy in the cleaning solution 1 to clean workpieces 6

immersed therein. A heater 7 for heating the cleaning solution 1 is also mounted on the bottom of the ultrasonic cleaning tank 2.

5 The ultrasonic cleaning tank 2 has a cleaning solution outlet 8 and a cleaning solution inlet 9 which are located on opposed side walls of the tank 2. The cleaning solution outlet 8 and the cleaning solution inlet 9 both have a flow rectifying device (not shown) for
10 smoothing the flow of cleaning solution therethrough. A deaerator 10 for deaerating the cleaning solution is disposed outside of the ultrasonic cleaning tank 2. The deaerator 10 comprises a sealed tank 13 for the cleaning solution 1 and a vacuum pump 14 for evacuating the sealed
15 tank 13 so that dissolved gas in the cleaning solution 1 is discharged into the vacuum inside the sealed tank 13 to thereby deaerate the cleaning solution 1. The deaerator 10 is connected to the cleaning solution outlet 8 by a discharge conduit 11 and to the cleaning solution inlet 9
20 by a supply conduit 12.

A discharge pump 15 for introducing the cleaning solution 1 discharged from the cleaning solution outlet 8 into the deaerator 10 is connected to the discharge
25 conduit 11 upstream of the deaerator 10. A filter 16 is connected between the deaerator 10 and the discharge pump 15. A supply pump 17 for supplying the deaerated cleaning solution 1 from the deaerator 10 to the ultrasonic cleaning tank 2 is connected to the supply conduit 12
30 between the deaerator 10 and the cleaning solution inlet 9.

An upper cleaning solution inlet 18 is mounted on an upper wall portion of the ultrasonic cleaning tank
35 2, and connected to an upper supply conduit 19 which is branched from the supply conduit 12 downstream of the

supply pump 17. A cleaning solution discharge conduit 20 and an overflow solution discharge conduit 21 are connected to the respective bottoms of the ultrasonic cleaning tank 2 and the overflow tank 3. The cleaning solution discharge conduit 20 and the overflow solution discharge conduit 21 are connected to the discharge conduit 11. The conduits 11, 12, 19, 20, 21 have flow control valves 22.

10 The cleaning solution 1 in the ultrasonic cleaning tank 2 is a mixture of tap water and 5% of a detergent. The detergent comprises an aqueous solution containing 6.0% of a nonionic surfactant, 7% of an inorganic builder, 10.0% of a solubilization agent, and
15 1.0% of residual material.

 The cleaning solution 1 in the ultrasonic cleaning tank 2 is drawn therefrom through the cleaning solution outlet 8 by the discharge pump 15, and introduced
20 into the deaerator 10 through the discharge conduit 11 via the filter 16. Since the sealed tank 13 of the deaerator 10 is deaerated by the vacuum pump 14, when the cleaning solution 1 is introduced into the sealed tank 13 through the discharge conduit 11, gas dissolved in the cleaning
25 solution 1 is discharged into the evacuated space in the sealed tank 13. At this time, the cleaning solution 1 is deaerated to such an extent that the amount of dissolved oxygen ranges from 0.01 to 5 ppm depending on the type of workpieces 6 to be cleaned. The amount of dissolved
30 oxygen may readily be regulated depending on the type of workpieces 6 to be cleaned by varying the degree to which the sealed tank 13 is evacuated by the vacuum pump 14.

 The deaerated cleaning solution 1 is drawn from
35 the deaerator 10 by the supply pump 17 and supplied through the supply conduit 12 and the cleaning solution

inlet 9 into the ultrasonic cleaning tank 2. Since the cleaning solution 1 circulates through the ultrasonic cleaning apparatus as described above, the amount of oxygen dissolved in the cleaning solution 1 can be maintained in the above range at all times.

Since the cleaning solution outlet 8 and the cleaning solution inlet 9 have respective flow rectifying devices, a laminar flow directed from the cleaning solution inlet 9 toward the cleaning solution outlet 8 parallel to the ultrasonic vibrator 5 is developed in the cleaning solution 1 in the ultrasonic cleaning tank 2. Such a laminar flow allows cavities or partial vacuums to be easily produced in the cleaning solution 1 due to cavitation.

The ultrasonic vibrator 5 is actuated to generate ultrasonic energy in the cleaning solution 1 in the ultrasonic cleaning tank 2 for cleaning the workpieces 6 that are immersed in the cleaning solution 1. If the workpieces 6 are relatively small in size, then a number of workpieces 6 are placed in a container 6a of stainless steel, and the container 6a is immersed in the cleaning solution 1.

When the workpieces 6 are immersed in the cleaning solution 1 in the ultrasonic cleaning tank 2, a portion of the cleaning solution 1 overflows from ultrasonic cleaning tank 2 down the discharge passage 4 and into the overflow tank 3. The cleaning solution 1 that has overflowed into the overflow tank 3 is then discharged from the overflow tank 3 through the overflow discharge conduit 21 into the discharge conduit 11. The cleaning solution 1 is supplied to and deaerated by the deaerator 10, and the deaerated cleaning solution 1 is supplied to the ultrasonic cleaning tank 2. Therefore,

the surface level, the amount of dissolved oxygen and temperature of the cleaning solution 1 in the ultrasonic cleaning tank 2 remain unchanged.

5 The cleaning solution 1 at the bottom of the ultrasonic cleaning tank 2 is drawn through the cleaning solution discharge conduit 20 into the discharge conduit 11, from which the cleaning solution 1 is introduced into the deaerator 10. A portion of the deaerated cleaning
10 solution 1 is supplied from the upper cleaning solution inlet 18 to the ultrasonic cleaning tank 2. The deaerated cleaning solution 1 is supplied from the upper cleaning solution inlet 18 is effective to agitate the cleaning solution 1 in the ultrasonic cleaning tank 2 for rendering
15 the temperature of the cleaning solution 1 that is heated by the heater 7, uniform.

 The cleaning solution 1 drawn from the ultrasonic cleaning tank 2 through the conduits 11, 20, 21
20 contains burrs and solid foreign matter removed from the workpieces 6. These burrs and solid foreign matter are collected by the filter 16 which is positioned in the discharge conduit 11 between the discharge pump 15 and the deaerator 10.

25 The ultrasonic cleaning apparatus according to this embodiment is not required to deaerate the cleaning solution 1 to such a high extent that the amount of oxygen contained in the cleaning solution 1 is equal to or lower
30 than 0.01 ppm. The deaerator 10 is capable of deaerating the cleaning solution 1 to such an extent that the amount of oxygen dissolved in the cleaning solution 1 ranges from 0.01 to 5 ppm. The ultrasonic cleaning apparatus does not need a highly expensive deaerator composed of a plurality
35 of gas separating membrane modules and hence is relatively simple in overall structure.

- 14 -

Examples of the above ultrasonic process will be described below.

5 In an example, a cleaning solution 1 which had
been deaerated to a dissolved oxygen range from 0.01 to
0.5 ppm was supplied to the ultrasonic cleaning tank 2,
and razor blades of stainless steel with small burrs
having dimensions of about 100 μ m were immersed as
10 workpieces 6 in the cleaning solution 1. The burrs which
were not completely separated from the razor blades would
not have been removed in a normal cleaning process using
an organic solvent. In this example, the razor blades
were ultrasonically cleaned using the cleaning solution 1
15 deaerated to the above dissolved oxygen range, and the
burrs as well as other foreign matter such as dust
particles and material residues were removed almost
completely. When the amount of dissolved oxygen was in
excess of 0.5 ppm, the burrs were not completely removed
20 from the razor blades.

 In another example, a cleaning solution 1 which
had been deaerated to a dissolved oxygen content ranging
from 0.01 to 3 ppm was supplied to the ultrasonic cleaning
25 tank 2, and sintered parts with solid foreign matter such
as material residues and dust particles being
electrostatically attracted thereto were immersed as
workpieces 6 in the cleaning solution 1. When the
sintered parts were ultrasonically cleaned in the cleaning
30 solution 1 with the above dissolved oxygen content, the
solid foreign matter, such as material residues and dust
particles, was removed substantially completely. As the
solid foreign matter, such as material residues and dust
particles, is not joined to the sintered parts, it may be
35 sufficiently removed even when subjected to microjets that
are not so powerful as those used to remove the burrs in

the above example. However, the solid foreign matter, such as material residues and dust particles, was not fully removed when the dissolved oxygen content exceeded 3 ppm. Workpieces 6 that can effectively be cleaned by the cleaning solution 1 with a dissolved oxygen content ranging from 0.01 to 3 ppm include magnets, acupuncture needles, and piston rods as well as sintered parts. Dust particles and abrasive grain are electrostatically held in direct contact with acupuncture needles. Abrasive grain, a grinding material, and other foreign matter are held in direct contact with piston rods.

In still another example, a cleaning solution 1 which had been deaerated to a dissolved oxygen content ranging from 2 to 5 ppm was supplied to the ultrasonic cleaning tank 2, and metallic connector pins were immersed as workpieces 6 in the cleaning solution 1. Solid foreign matter such as material residues including chips produced when the metallic connector pins were machined and small particles produced when burrs were broken was attached to the metallic connector pins by oil such as cutting oil used when the metallic connector pins were machined. The cleaning solution 1 was heated to a temperature range of from 30 to 40°C by the heater 7. When the metallic connector pins were ultrasonically cleaned in the cleaning solution 1 with the above dissolved oxygen content, the oil and the solid foreign were removed substantially completely.

When the dissolved oxygen content was lower than 2 ppm, the oil removed by microjets was not emulsified and dispersed in the cleaning solution 1 and attached again to the workpieces 6. Therefore, the foreign matter attached to the workpieces 6 by the oil was not fully removed. When the dissolved oxygen content was in excess of 5 ppm, most of the oil and relatively large particles of foreign

matter were removed, but smaller particles of foreign matter attached to the workpieces 6 by oil which has soaked into the workpieces 6 was not removed.

5 Workpieces 6 that can effectively be cleaned by the cleaning solution 1 with a dissolved oxygen content ranging from 2 to 5 ppm include metallic parts for use in watches and clocks, pressed metallic workpieces, injection- and extrusion-molded plastic workpieces,
10 aluminum hoops, and mechanical seals as well as connector pins.

 In the above examples, the cleaning solution 1 deaerated to the above dissolved oxygen content depending
15 on the type of workpieces 6 to be cleaned is supplied to the single ultrasonic cleaning tank 2 for ultrasonically cleaning the workpieces 6. However, a plurality of ultrasonic cleaning tanks 2 may be employed, and a cleaning solution 1 deaerated to a dissolved oxygen
20 content ranging from 2 to 5 ppm may be supplied to the first ultrasonic cleaning tank 2, and a cleaning solution 1 deaerated to a dissolved oxygen content ranging from 0.01 to 0.5 ppm may be supplied to the second ultrasonic cleaning tank 2. According to this modification,
25 workpieces 6 of one type can be ultrasonically cleaned through a plurality of steps. For example, razor blades may be ultrasonically cleaned in the first ultrasonic cleaning tank 2 to remove solid foreign matter attached to the razor blades by oil and then ultrasonically cleaned in
30 the second ultrasonic cleaning tank 2 to remove burrs from the razor blades.

 Experiments were conducted to investigate different dissolved oxygen contents suitable for different
35 types of workpieces to be cleaned. First, an ultrasonic cleaning apparatus used for experimentally ultrasonically

cleaning workpieces in the experiments will be described below with reference to FIG. 2. An ultrasonic vibrator 5 is mounted on the bottom of an ultrasonic cleaning tank 2 of acrylic resin which holds a cleaning solution 1. The ultrasonic vibrator 5 generates ultrasonic energy in the cleaning solution 1 to clean workpieces 6 placed in a container 6a and immersed in the cleaning solution 1.

The ultrasonic cleaning tank 2 has a cleaning solution outlet 8 and a cleaning solution inlet 9 which are mounted on opposing sides walls thereof. The cleaning solution outlet 8 and the cleaning solution inlet 9 each has a flow rectifying device (not shown) for smoothing the flow of cleaning solution therethrough. A deaerator 10, identical to the deaerator 10 shown in FIG. 1, for deaerating the cleaning solution is disposed outside of the ultrasonic cleaning tank 2. The deaerator 10 is connected to the cleaning solution outlet 8 by a discharge conduit 11 and to the cleaning solution inlet 9 by a supply conduit 12.

A circulation pump 22 for introducing the cleaning solution 1 discharged from the cleaning solution outlet 8 into the deaerator 10 and supplying the deaerated cleaning solution to the ultrasonic cleaning tank 2 is connected to the discharge conduit 11 upstream of the deaerator 10. Filters 23a, 23b are connected between the deaerator 10 and the circulation pump 22.

A bypass conduit 24 and a flow control valve 25 are connected to the discharge conduit 11, the bypass conduit 24 being connected between upstream and downstream sides of the circulation pump 22. The bypass conduit 24 can be opened and closed by a flow control valve 26 connected thereto.

In the ultrasonic cleaning apparatus shown in FIG. 2, the cleaning solution 1 contained in the ultrasonic cleaning tank 2 is drawn from the cleaning solution outlet 8 into the discharge conduit 11 by the circulation pump 22, and then supplied to the filters 23a, 23b. The cleaning solution 1 contains burrs and foreign matter removed from the workpieces 6 by the ultrasonic cleaning process in the ultrasonic cleaning tank 2. The filter 23a removes relatively large burrs and foreign matter having dimensions of $5\mu\text{m}$ or greater, and the filter 23b removes smaller burrs and foreign matter having dimensions of up to $2\mu\text{m}$. Then the cleaning solution 1 from the filters 23a, 23b is introduced into the deaerator 10, which deaerates the cleaning solution 1 to a desired dissolved oxygen content, and the deaerated cleaning solution 1 is supplied through the supply conduit 12 and the cleaning solution inlet 9 to the ultrasonic cleaning tank 2.

20 Experiment 1:

Tap water was supplied as the cleaning solution 1 to the ultrasonic cleaning tank 2, and instead of the workpieces 6 and the container 6a, a plate of pure aluminum having dimensions of 100 mm x 100 mm x 10 mm was immersed in the cleaning solution 1 perpendicularly to the ultrasonic vibrator 5, the plate of pure aluminum having an upper edge positioned 50 mm below the surface level of the cleaning solution 1. The lower edge of the plate of pure aluminum did not reach the ultrasonic vibrator 5 and was spaced 50 mm or more from the ultrasonic vibrator 5.

Then, ultrasonic energy was radiated from the ultrasonic vibrator 5 into the cleaning solution 1 to produce microjets that eroded the aluminum plate. During the ultrasonic cleaning process, the aluminum plate was

vertically moved a vertical distance of 25 mm for uniform exposure to the microjets.

5 The amount of oxygen dissolved in the cleaning solution 1 was varied stepwise between 0.05 to 9 ppm. The ultrasonic cleaning process was carried out for 60 minutes with respect to each dissolved oxygen test amount. After each ultrasonic cleaning process, the aluminum plate was pulled out, and an erosion-induced reduction in the weight of the aluminum plate was measured as being
10 indicative of the intensity of applied microjets. The greater the eroded amount of aluminum, the greater the reduction in the weight of the aluminum plate, indicating a greater microjet intensity. The weight was measured ten
15 times for each dissolved oxygen test amount, and the average value was used as the eroded amount of aluminum for the particular test amount.

20 The cleaning solution 1 was kept at a normal temperature ranging from 20 to 25°C. In the ultrasonic cleaning tank 2, the cleaning solution 1 was directed as a laminar flow from the cleaning solution inlet 9 to the cleaning solution outlet 8 parallel to the ultrasonic vibrator 5. The ultrasonic vibrator 5 radiated ultrasonic
25 energy having an intensity of 600 W at a single frequency of 28 KHz. The output watt density of the ultrasonic vibrator 5 was 1 W/cm² at maximum.

30 The results of Experiment 1 are shown in Table 1 below and also in the graph of FIG. 3. Table 1 shows the relationship between the amount of oxygen dissolved in the cleaning solution 1 and the eroded amount of aluminum as ultrasonically cleaned.

Table 1

A (ppm)	0.07	0.2	0.4	0.7	1.2	1.9	2.1
B (mg)	492	466	465	455	435	420	370

A (ppm)	3.2	4.4	5.4	5.7	6.2	6.9
B (mg)	250	175	85	42.0	15.8	15.2

A: Amount of oxygen dissolved in the cleaning solution,
and

B: Eroded amount of aluminum.

It can be seen from Table 1 and FIG. 3 that the intensity of microjets is at a maximum below a dissolved oxygen content of about 0.5 ppm, and gradually decreases to a dissolved oxygen content of about 2 ppm, and that the intensity of microjets decreases substantially linearly as the dissolved oxygen content increases until the dissolved oxygen content reaches about 6 ppm, and the eroded amount of aluminum is at a substantially constant level of 15 to 16 mg above a dissolved oxygen content of 7 ppm or higher. A detailed study of the experimental results indicates that the microjets have an intensity sufficient to clean the aluminum plate when the dissolved oxygen content is at about 5 ppm or lower, but do not produce an effective cleaning effect when the dissolved oxygen content is higher than about 5 ppm and produces almost no cleaning effect when the dissolved oxygen content is of 7 ppm or higher.

The difference between eroded amounts of aluminum when the dissolved oxygen content is higher and lower than 0.5 ppm is not clearly seen from Table 1 and FIG. 3. However, the results of the actual cleaning process show that the burrs of workpieces are fully removed when the dissolved oxygen content is 0.5 ppm or

lower, indicating a clear difference with the cleaning process with the dissolved oxygen content being in excess of 0.5 ppm.

5 Experiment 2:

The following experiment was conducted to check the relationship between the amount of oxygen dissolved in the cleaning solution and the amount of oil removed:

10

A specimen was prepared by grinding opposite surfaces of an SUS plate having dimensions of 100 mm x 100 mm x 10 mm with abrasive grain and applying 10 cc of mineral machine oil to the SUS plate. The machine oil applied to the specimen was extracted with carbon tetrachloride, the infrared absorption ratio of the machine oil was measured five times, and the average of the measured values was used as a blank. The blank indicates the amount of machine oil adsorbed on the specimen prior to ultrasonic cleaning, i.e., the initial value of machine oil adsorbed on the specimen, and was 147.6 mg.

20

Then, a cleaning solution 1 comprising tap water and 5% of a detergent composed of a nonionic surface active agent was supplied to the ultrasonic cleaning tank 2 shown in FIG. 2, and instead of the workpieces 6 and the container 6a, the above specimen was immersed in the cleaning solution 1 perpendicularly to the ultrasonic vibrator 5, the specimen having an upper edge positioned 50 mm below the surface level of the cleaning solution 1. The lower edge of the plate of pure aluminum did not reach the ultrasonic vibrator 5 and was spaced 50 mm or more from the ultrasonic vibrator 5.

30

35

Then ultrasonic energy was radiated from the ultrasonic vibrator 5 into the cleaning solution 1 to clean the surfaces of the specimen by removing the machine oil. During the ultrasonic cleaning process, the specimen
5 was vertically moved a vertical distance of 25 mm for uniform exposure to the microjets. The cleaning process was carried out in the same manner as with Experiment 1.

The amount of oxygen dissolved in the cleaning
10 solution 1 was varied stepwise between 0.05 to 9 ppm. The ultrasonic cleaning process was carried out for 60 minutes with respect to each of the dissolved oxygen test amounts. After each ultrasonic cleaning process, the specimen was removed, and hot air was applied directly to the specimen
15 to dry the same at a temperature of 80°C for 60 seconds. After the specimen was dried, the machine oil attached to the specimen was extracted with carbon tetrachloride, the infrared absorption ratio of the machine oil was measured five times for each of the dissolved oxygen test amounts,
20 and the average of the measured values was used as an amount of oil remaining after the ultrasonic cleaning. The differences between the above blanks and the amounts of oil remaining after the ultrasonic cleaning were
25 determined to calculate the amounts of oil removed after the ultrasonic cleaning.

The results of Experiment 2 are shown in Table 2 below, and also in the graph of FIG. 3. Table 2 shows the relationship between the amount of oxygen dissolved in
30 the cleaning solution 1 and the amount of oil removed by the ultrasonic cleaning.

Table 2

A (ppm)	0.2	0.7	1.9	3.2	4.4	5.4	6.2	8.2
B (mg)	15.5	13.3	12.6	9.5	9.1	7.4	5.8	4.6
C (mg)	132.1	134.3	135.0	138.1	138.5	140.2	141.8	143.0

A: Amount of oxygen dissolved in the cleaning solution,

10 B: Amount of oil remaining after the cleaning
operation, and

C: Amount of oil removed after the cleaning operation.

The amount of oil removed after the cleaning operation
equals the blank value (147.6) minus the amount of oil
15 remaining after the cleaning operation.

It can be seen from Table 2 and FIG. 3 that the
amount of oil removed is small when the amount of oxygen
dissolved in the cleaning solution 1 is less than 2 ppm,
20 and increases as the amount of dissolved oxygen increases.

A detailed study of the experimental results
indicates that when the dissolved oxygen content is less
than 2 ppm, the oil adsorbed on the specimen is removed by
25 the microjets and then is adsorbed again, and solid
foreign matter applied to the specimen by the oil which is
adsorbed again cannot easily be removed, even if intensive
microjets are applied. It is also found that in the
dissolved oxygen content range of from 2 to 5 ppm, since
30 relatively strong microjets are applied to the specimen,
the oil and the solid foreign matter applied to the
specimen is easily removed, and since the oil is easily
emulsified and dispersed in the cleaning solution by the
dissolved gas, both the oil and the solid foreign matter
35 can be removed. It is also found that when the dissolved
oxygen content is in excess of 5 ppm, most of the oil is
removed, but oil which has soaked into the specimen
remains, and that as the microjets are very weak at this

time, the solid foreign matter attached to the specimen by the remaining oil cannot easily be removed.

5 The ultrasonic cleaning apparatus shown in FIG. 2 is practical enough to be effective for use as a tabletop ultrasonic cleaning apparatus for cleaning small parts as well as an experimental ultrasonic cleaning apparatus.

10 Although certain preferred embodiments of the present invention have been shown and described in detail, it should be understood that various changes and modifications may be made therein without departing from the scope of the appended claims.

15

20

25

30

35

- 25 -

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS
FOLLOWS:

- 5 1. A method of ultrasonically cleaning a workpiece in
 an ultrasonic cleaning tank containing aqueous
 cleaning solution, wherein the aqueous cleaning
 solution has been deaerated to a predetermined
10 dissolved oxygen content ranging from 2 to 5 ppm,
 the aqueous cleaning solution has been heated to a
 temperature ranging from 30 to 55°C, a surface
 active agent has been added to the aqueous
 cleaning solution, and foreign matter, which is
15 attached to the workpiece by oil, is removed
 during this cleaning stage.
2. A method as claimed in claim 1, wherein the
 aqueous cleaning solution has been deaerated to a
 dissolved oxygen content ranging from 3 to 4 ppm.
20
3. A method as claimed in claim 1 or 2, wherein the
 workpiece is further cleaned in a second
 ultrasonic cleaning tank containing a second
 aqueous cleaning solution which has been deaerated
25 to a predetermined dissolved oxygen content
 different from the first aqueous cleaning solution
 and ranging from 0.01 to 3 ppm, and in that solid
 foreign matter held in direct contact with the
 workpiece is removed during this second cleaning
30 stage.
4. A method as claimed in claim 1 or 2, wherein the
 workpiece is further cleaned in a second
 ultrasonic cleaning tank containing a second
35 aqueous cleaning solution which has been deaerated
 to a predetermined dissolved oxygen content

- 26 -

ranging from 0.01 to 0.5 ppm, and in that burrs, which are not completely separated from the workpiece, are removed during this second cleaning stage.

5

5. A method as claimed in claim 3 or 4, wherein the second aqueous cleaning solution is heated to a temperature ranging from 30 to 55°C.

10

6. A method as claimed in claim 1 or 2, further comprising the step of deaerating the cleaning solution by introducing the cleaning solution into a sealed tank and evacuating the sealed tank to discharge a gas dissolved in the cleaning solution into a space in the sealed tank.

15

FIG. 1

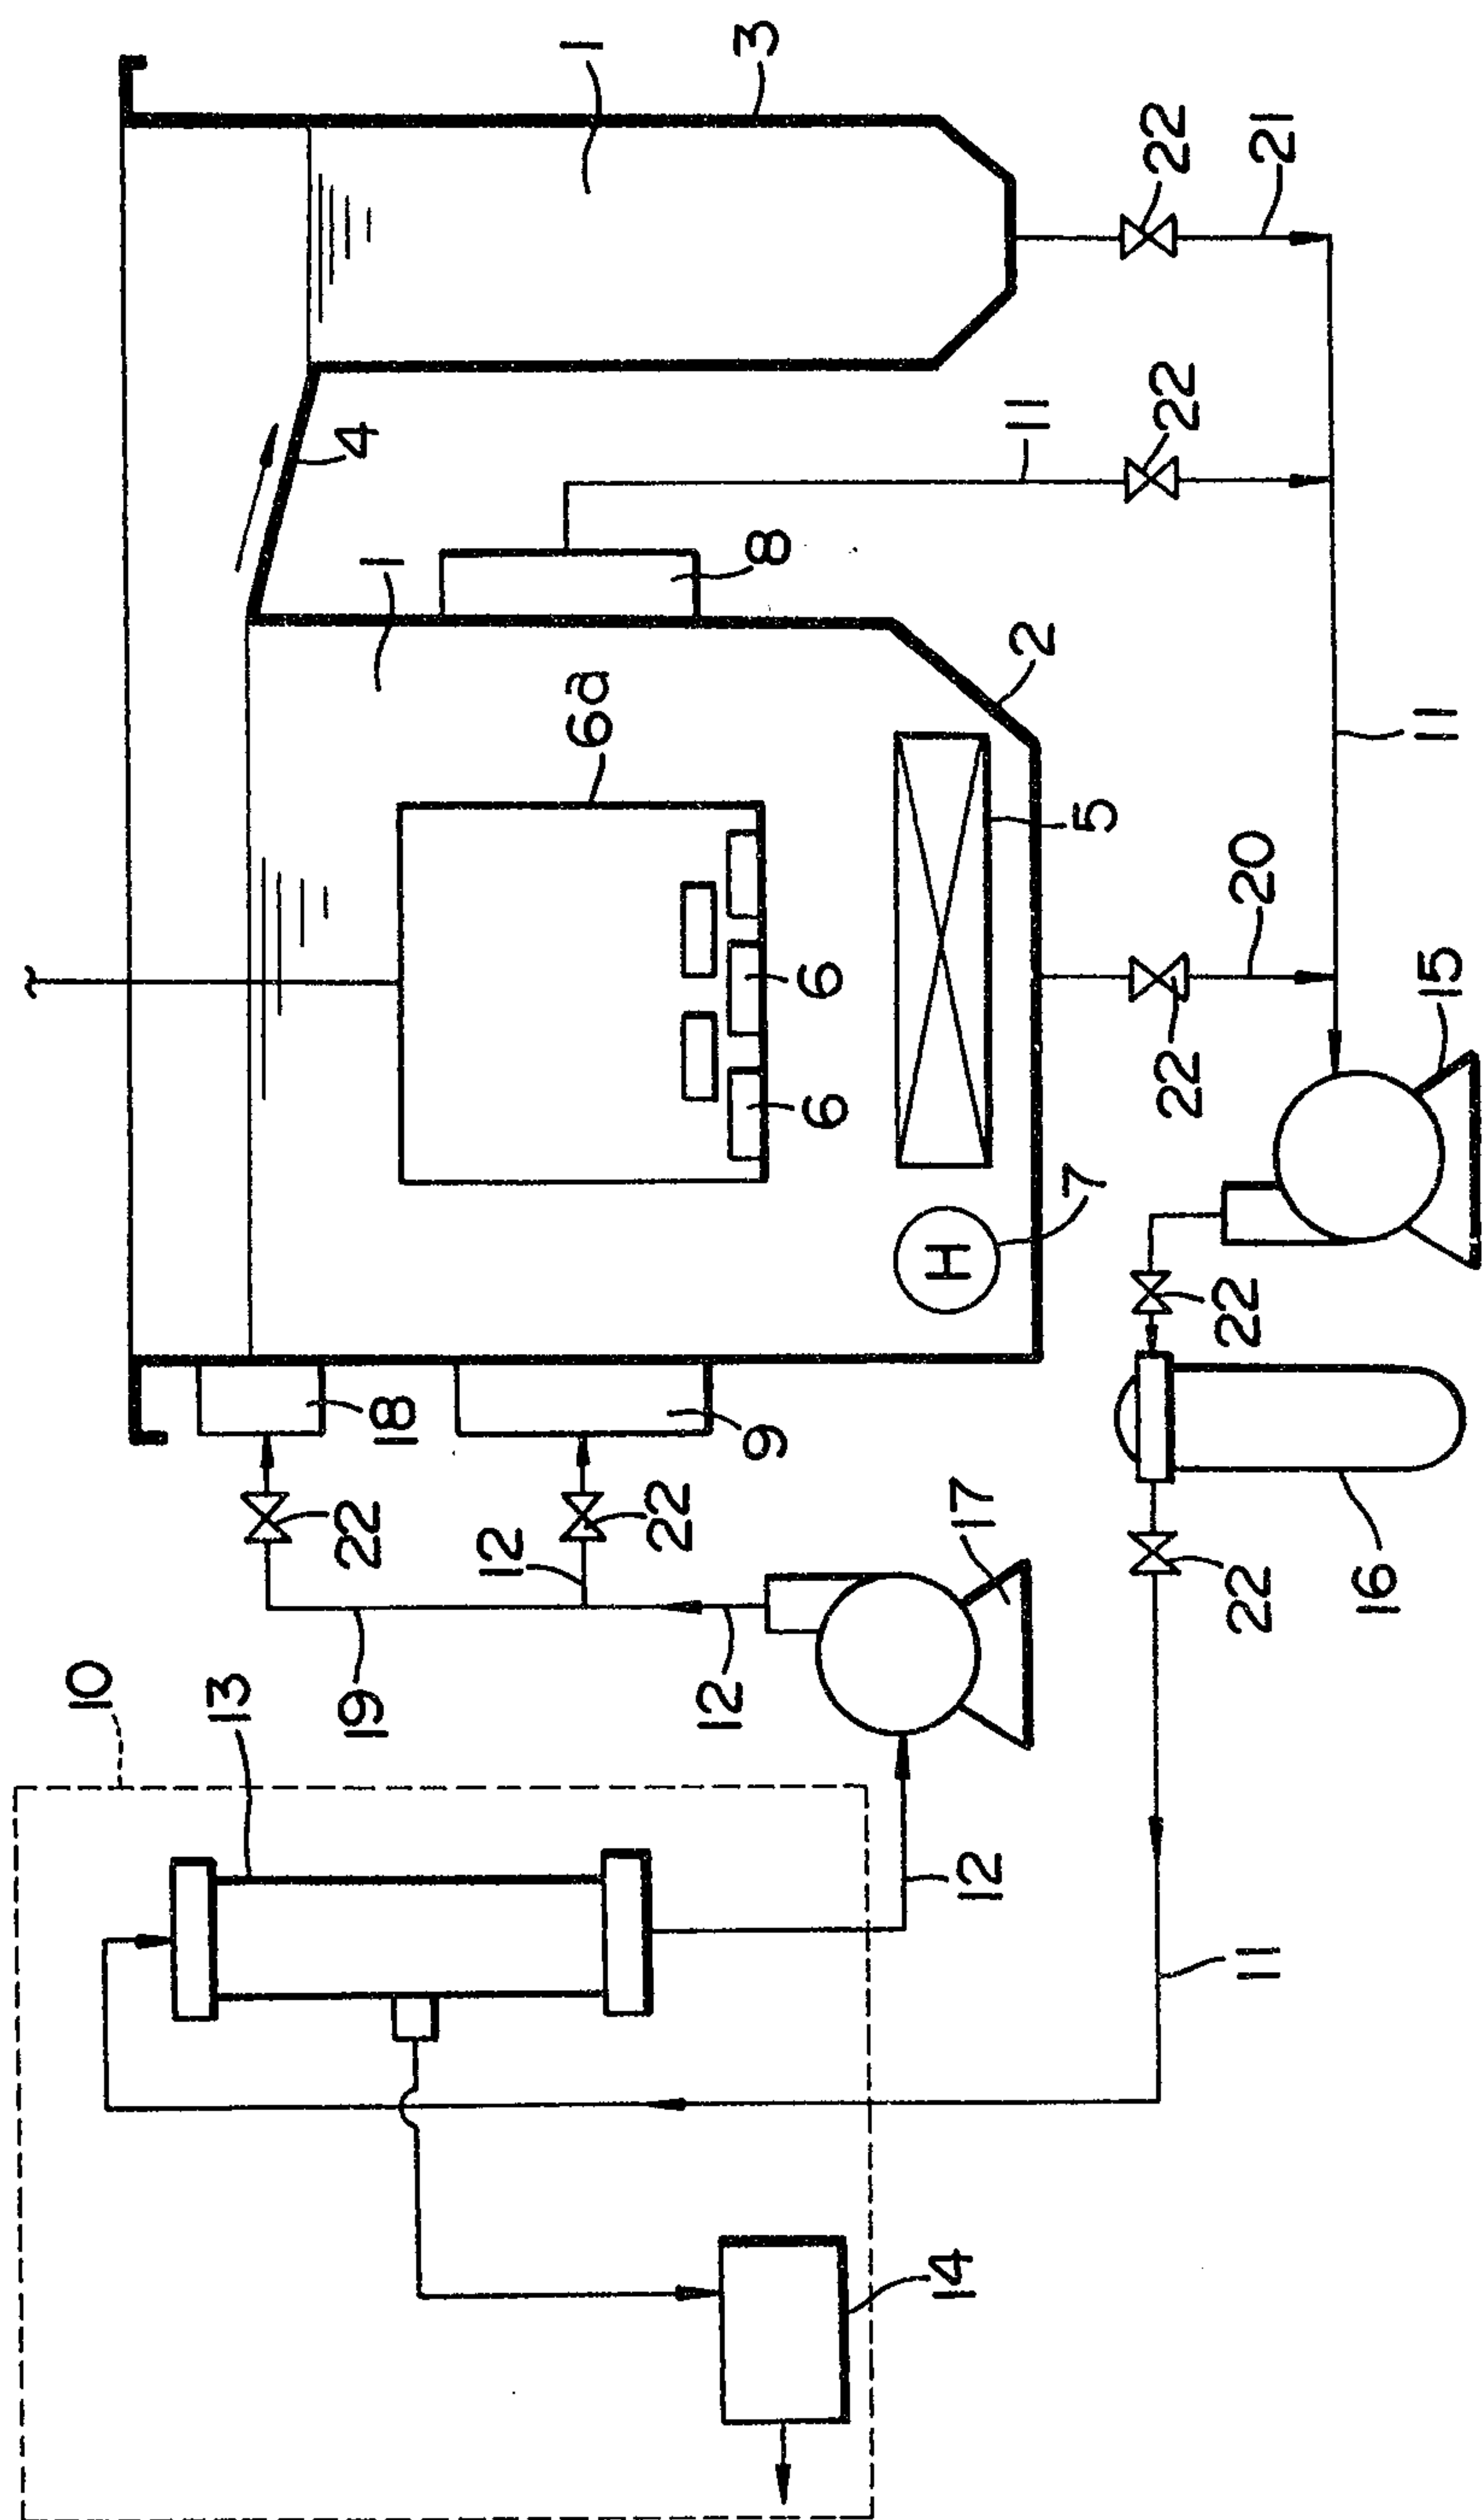


FIG. 2

