

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
14 June 2001 (14.06.2001)

PCT

(10) International Publication Number
WO 01/42007 A1

- (51) International Patent Classification⁷: **B32B 25/10**, (74) Agents: AGOSTINI, Agostino et al.; Dragotti & Associati S.r.l., Via Paris Bordone, 9, I-31100 Treviso (IT).
B29C 67/24
- (21) International Application Number: PCT/EP00/11883 (81) Designated States (*national*): CA, ES, IL, US.
- (22) International Filing Date: 28 November 2000 (28.11.2000) — *Published:*
— *With international search report.*
— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: TV99U000055 6 December 1999 (06.12.1999) IT
For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.
- (71) Applicant and
(72) Inventor: TONCELLI, Luca [IT/IT]; Viale Asiago, 34, I-36061 Bassano del Grappa (IT).

(54) Title: FABRIC REINFORCED RUBBER FOR SHEET FOR THE PRODUCTION OF SLABS OF RESIN HARDEND FINELY DIVIDED STONE MATERIAL

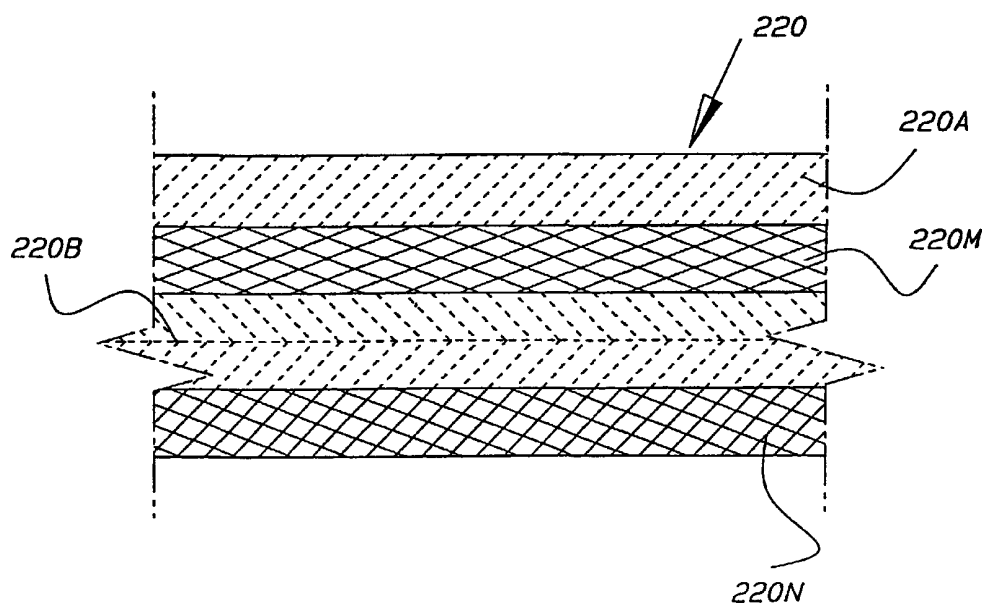

(57) Abstract: Two rubber sheets are used in the production of slabs of granulate or fine particles of stone material bonded with hardening resin, one of said sheets, the lower one, being provided with a border delimiting the cavity for deposition of a metered quantity of mixture. At least the lower sheet and preferably both sheets have a structure consisting of two layers of EPM or VKF or PU rubber between which a layer of fabric or cloth of non-deformable material, such as polyamide or polyester, is interposed or inset and the outwardly directed surface of the sheet is composed of a similar layer of fabric or cloth. The composite sheet can be stabilised dimensionally by means of heat treatment at a temperature higher than the operating temperature.

WO 01/42007 A1

FABRIC REINFORCED RUBBER FOR SHEET FOR THE PRODUCTION OF SLABS OF RESIN HARDEND
FINELY DIVIDED STONE MATERIAL

5 The present invention relates to the production of manufactured slabs composed of a granulate or fine particles of stone material bonded with a hardening resin and, more specifically, to an improvement to the production process therefor.

10 These slabs are produced using a method in which a mixture composed of granulate material of selected particle size and synthetic resin is deposited in metered quantities on a conveyor belt which is advanced to a forming station (in which it is subjected to a vacuum compaction operation with simultaneous application of a vibratory movement of predetermined frequency) and subsequently to a station for hardening of the resin (preferably by means of the action of a catalyst and/or heat).

15 Upstream of the forming station, the upper surface of the mixture deposited on the conveyor belt is covered with a sheet or layer of protective material, which prevents the pressing ram from being soiled by the mixture.

In the past, this sheet of protective material was made of paper, the use of which, however, was accompanied by certain secondary problems subsequent to the actual production process, but nonetheless of considerable importance.

20 An improvement was subsequently introduced (described and claimed in Italian patent application No. TV96A000007 filed on 29 January 1996), according to which the paper layer or sheet is replaced by a sheet of resilient material, preferably rubber.

In this way, upon completion of the resinous binder hardening step, the rubber sheet can be removed, by means of tearing, from the surface of the finished slab and subsequently reused.

25 In the preferred embodiment, the support on which the mixture is deposited before being transferred to the vacuum and vibration compacting station is also protected by a similar sheet of resilient material, in particular rubber.

After the forming step, the mixture deposited on the support and enclosed between the two rubber sheets is in the form of a slab, at the edges of which the two protective rubber sheets are joined together by overlapping their respective edges, substantially completely so as to enclose

the raw slab which has been formed but not yet subjected to the resinous binder hardening step. Since during compaction a portion of the mixture, albeit minimal, inevitably forms a burr interposed between the two edges, after the resinous binder hardening step this burr forms incrustations on the rubber sheets, which are difficult to remove.

5 Again in the previously know method, a separating liquid is applied to the two edges which are intended to mate, immediately before use on the production line, with the purpose of preventing this problem and also of reducing the chemical ageing of the rubber.

In spite of these measures, however, operations to clean the two rubber sheets, and in particular the two mating edges, are still necessary.

10 Italian patent application No. TV97A000146 in the name of the same Applicant describes further improvements aimed at preventing the formation of incrustations on the rubber sheets, which require laborious cleaning operations, and involving modifications both to the shaping of the protective rubber sheets and to the operating process.

In the first place, the flat configuration of the lower sheet is replaced by a shaped configuration, 15 comprising a flat base and a peripheral border projecting from said flat base over a predetermined height which is smaller by a predetermined amount than the height of the final slab to be produced, so that, after the compaction step, a gap of a predetermined thickness remains between the peripheral edge of the upper sheet and the top of the aforementioned border.

20 The excess mixture material penetrates into this gap of predetermined thickness during the vacuum vibration compacting step and this material then remains attached to the edge of the slab during the hardening step.

When, after the resinous binder hardening step, the final slab is released by tearing off the two rubber sheets, a hardened raw slab is obtained, said slab having peripherally a border of 25 hardened material which can easily be removed during the normal finishing operations for a slab of stone material.

Patent application No. TV97A000146 also describes and claims a specific structure of the rubber sheet, in particular the lower sheet, to which the peripheral border is attached, said border defining the cavity for initial deposition of the metered quantity of mixture.

The said structure consists of two or more layers, usually four layers, such as:

a first layer of rubber (VRF, EPM, PU)

a first cloth or fabric of non-deformable material (Kevlar, polyester, nylon, aramide)

a second layer of rubber (EPM, NBR)

5 a second cloth or fabric of non-deformable material.

Preferably this cloth or fabric is subjected to preliminary treatments, such as a pretensioning treatment, to avoid subsequent hysteresis phenomena, a thermal stabilization, etc.

However, certain requirements remain in connection with the rubber sheets and must be satisfied in order to obtain optimum results.

10 In short, these requirements correspond to the following characteristics which the rubber sheet must have:

a resistance to heat and chemical agents so as to withstand operating temperatures which during the resin hardening step are in the region of 150°C;

a good resistance to abrasion and tearing;

15 (c) retain substantially unaltered properties over time;

(d) possess optimal mechanical properties so as to contain the mixture without undergoing excessive deformations;

undergo minimal shrinkage after forming so as to prevent the formation of surface irregularities in the final product;

20 a good heat conductivity in order to favour the hardening of the slab.

As regards the nature of the rubber, the most suitable are of a polymeric type resistant to temperature and to chemical agents, usually not for sulphur vulcanization, in particular synthetic rubbers known as EPM (ethylene and propylene copolymers), VKF (fluorocarbon rubbers) and PU (polyurethane rubbers).

25 Even the use of the previously mentioned composite structure, consisting of a layer of cloth or fabric interposed in the rubber sheet and then embedded or inset therein, does not completely solve the problem.

In fact, even if the rubber sheet is in this way able to contain the mixture during the forming step without undergoing excessive deformation, the final product has surface corrugations, as a

result of the shrinkage of the material during the cooling phase and the - albeit minimal - residual elasticity of the rubber.

It has now been discovered that all these problems can be completely and satisfactorily solved with a rubber sheet structure of the type comprising four layers of rubber between which a layer
5 of non-deformable cloth or fabric is interposed, said structure being characterized in that the base of the composite sheet is completed with a second layer of cloth or fabric consisting of non-deformable material, which thereby constitutes the outwardly directed surface. The second layer of cloth or fabric also constitutes an outwardly directed surface which is suitable for being in contact with the oven surface.

10 The specific aspects and advantages of the composite structure in accordance with the present invention will appear more clearly from the following description, with reference to the drawings in which:

Figure 1 coincides with Fig. 3 of Italian application No. TV97A000148, illustrating therefore the structure of the rubber sheets which was used in the previously mentioned method;

15 Figure 2 is a view, similar to that of Figure 1, of the composite structure in accordance with the present invention; and

Figure 3 is an enlarged cross-sectional view of the composite structure of the present invention corresponding to position A in Fig. 2.

It can be seen that Figure 1 corresponds to Figure 3 of Italian patent application No.
20 TV97A000148, which should be referred to for a detailed description.

It can be seen from this figure that the starting mixture 130 is deposited in a cavity defined by a lower sheet 120 and by an upper or covering sheet 132.

A perimetral border 120A, the inner surface of which has a predetermined inclination, is attached to the lower sheet 120.

25 In Figure 1, the sheet 120 has a composite structure consisting of a lower sheet of rubber 120 having a flat basis 120B and an inclined peripheral border 120A, a layer 120M of substantially inextensible cloth or fabric (such as Kevlar, polyester or nylon) is embedded and an upper sheet of rubber 132 which is spaced from the said border 120A through a gap 100 of a predetermined thickness along its peripheral edge 132A. The end portion 120E of the slab, which is enclosed

between the inclined surface 120C and a vertical cross-section defined by the line 120D, is the scrap material to be removed at a subsequent step of the manufacturing process. References X and S designate the thickness of the said peripheral border 120A resp. of the mixture 130.

With reference now to the composite structure of the present invention, shown in Figures 2 and 3, using where possible the same references as in Figure 1 and making particular reference to Figure 3, the sheet 120 comprises two layers of rubber 220A and 220B, between which the layer of inextensible cloth or fabric 220M is interposed.

As previously mentioned, the rubber of the layers 220A and B is an EPM rubber which is vulcanised by means of a peroxide using a known method.

The selected rubber preferably has the following characteristics:

| | |
|---------------------|------------------------|
| Density | 1.05 g/cm ³ |
| Hardness | 64 Shore (A) |
| Abrasion resistance | 86 mm ³ |
| Heat resistance | 170°C |

The rubber is worked in such a way to achieve a maximum controlled planarity of 0.5 mm per linear metre, reaching the overall thickness of 4 mm.

In turn, the cloth or fabric of the layer 220M preferably is of the type comprising a weft of polyamide or nylon and a warp of polyester, and is pretensioned in both directions (both weft and warp).

As can be seen from Figure 3, a second layer of cloth or fabric 220N having the same characteristics as the layer 220M is added underneath the rubber layer 220B.

The composite sheet, thus formed, is preferably subjected to a stabilising treatment prior to use, consisting of heating for a few hours (generally from 1 to 3 hours) to a temperature higher than the maximum operating temperature, so that, in the present method (in which resin hardening takes place at a temperature in the region of 150°C), the stabilising temperature is in the region of 160°C (for approximately 2 hours).

The desired results can be obtained with the sheet structure in accordance with the present invention.

In particular, it is desirable that both the lower sheet 220 and the upper sheet should have the

same structure, so as to guarantee perfect homogeneity of thermal exchange with the mixture contained in the "sheath" defined by the two - upper and lower - rubber sheets.

Moreover, the lower cloth 220N also favours the handling of said sheath containing the mixture through the various stations of the slab production plant.

- 5 In particular, it is worth noting that with the structure according to the present invention the compressive strength or rather the resistance to extreme loads of the moulding sheath is increased, preventing the appearance of wrinkles on the surfaces of the product.

CLAIMS

1. Moulded rubber sheet structure for use in the process for production of slabs as above defined, of the type comprising two layers of rubber between which a layer of non-deformable cloth or fabric is interposed, characterized in that the base of the composite sheet is completed
5 with a second layer of cloth or fabric of non-deformable material, which thereby constitutes the outwardly directed surface of the rubber sheet, said composite structure being moreover dimensionally stabilised by heating to a temperature in the region of 160°C.
2. Rubber sheet structure according to Claim 1, characterized in that said rubber is of the EPM or VKF or PU type.
- 10 3. Rubber sheet structure according to Claim 1, characterized in that the two - lower and upper - moulding sheaths have the same structure, as regards the homogeneity of heat transfer.
4. Rubber sheet structure according to Claim 1, characterized in that said cloths are formed by a polyester warp and a nylon weft.
5. Rubber sheet structure according to Claim 1, characterized in that said heating to a
15 temperature in the region of 160°C is performed for 1-3 hours.

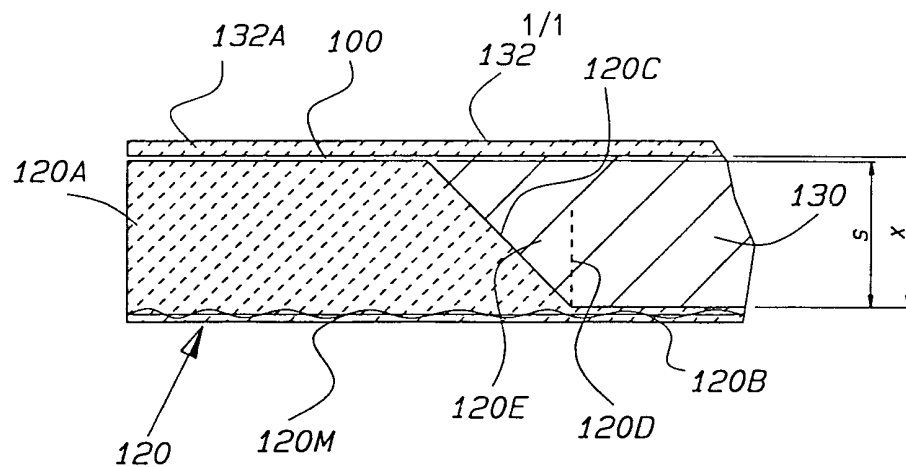


Fig. 1

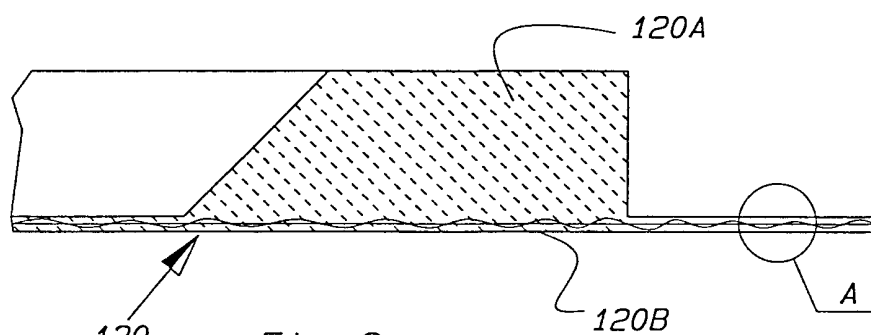


Fig.2

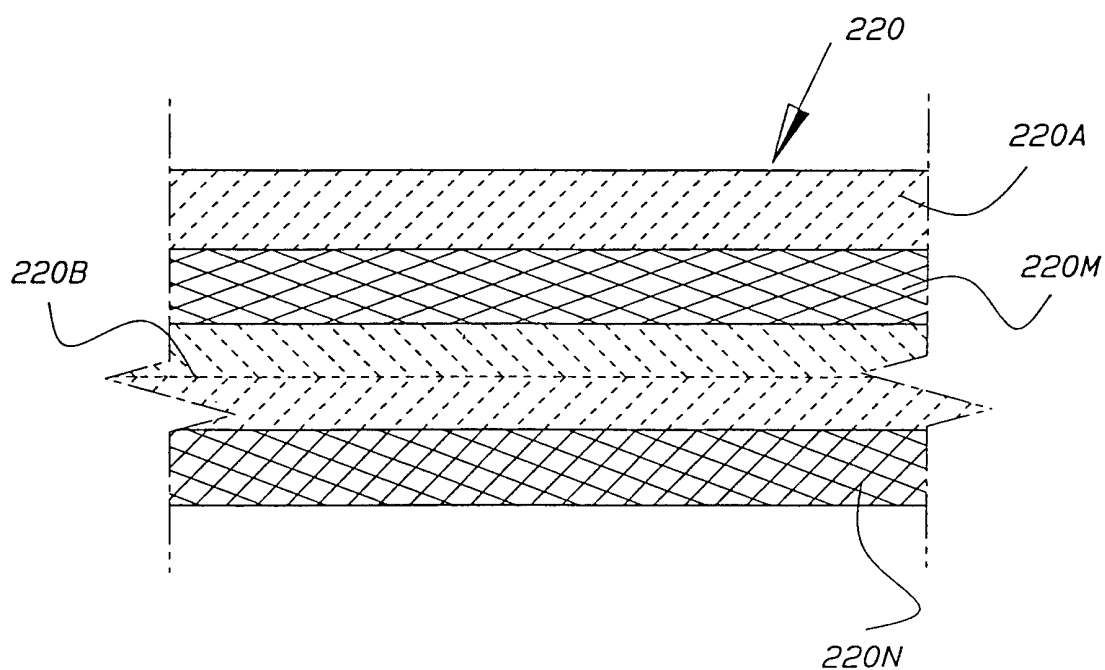


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/11883

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B32B25/10 B29C67/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B32B B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category ° | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| A | WO 99 21695 A (TONCELLI LUCA) 6 May 1999 (1999-05-06) claims 2-17 figures 2,3 --- | 1-5 |
| X | US 4 744 843 A (LEWIS RICHARD K) 17 May 1988 (1988-05-17) the whole document --- | 1,4,5 |
| X | US 5 498 470 A (MCLEAN MICHAEL E ET AL) 12 March 1996 (1996-03-12) column 4, line 34 -column 5, line 7 figure 1 ----- | 1,2,4,5 |



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

2 April 2001

Date of mailing of the international search report

18/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Stabel, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/11883

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|---|--|
| WO 9921695 A | 06-05-1999 | IT TV970148 A EP 1027205 A | 27-04-1999 16-08-2000 |
| US 4744843 A | 17-05-1988 | AU 572574 B AU 3493584 A BR 8405323 A CA 1232729 A JP 1830120 C JP 5034126 B JP 60155412 A MX 168728 B ZA 8408202 A | 12-05-1988 09-05-1985 03-09-1985 16-02-1988 15-03-1994 21-05-1993 15-08-1985 04-06-1993 26-06-1985 |
| US 5498470 A | 12-03-1996 | DE 69325103 D DE 69325103 T EP 0660760 A WO 9402259 A | 01-07-1999 21-06-2000 05-07-1995 03-02-1994 |