

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
23 July 2009 (23.07.2009)

PCT

(10) International Publication Number
WO 2009/090510 A1

(51) International Patent Classification:

B01D 63/12 (2006.01) *C02F 1/44* (2006.01)
B01D 65/00 (2006.01)

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/IB2008/054465

(22) International Filing Date: 29 October 2008 (29.10.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0800774.2 16 January 2008 (16.01.2008) GB

(71) Applicant and

(72) Inventor: GRAHAM, William [ZA/ZA]; 87 Suikerbossie Avenue, 7150 Gordon's Bay (ZA).

(74) Agent: TRUTER, Kenneth Colin; Brian Bacon and Associates, 2nd Floor Mareindahl House Newlands on, Main Newlands, 7700 Cape Town (ZA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: A FLOW DISTRIBUTOR PLATE FOR THE TREATMENT OF WATER BY REVERSE OSMOSIS

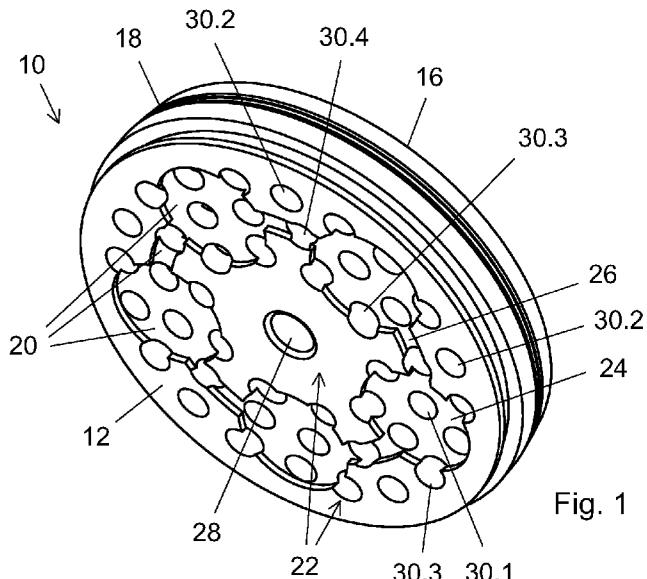


Fig. 1

(57) **Abstract:** In a reverse osmosis desalination plant a number of membranes (34, 36, 38, 40) are arranged end- to-end in a cylindrical outer casing (42). Each membrane comprises a sleeve, a permeate pipe (56) passing centrally through the sleeve, a plurality of leaves of permeable material (54) wound around the pipe and contained within the sleeve and an apertured plate (10, 58) at each end of the sleeve. According to the invention the flow distributor plate (10) at the inlet end of each membrane is a flow distributor and has a plurality of bores (30.1, 30.2 etc) through it from a front face (12) to a rear face (14). The front face (12) has a recessed area (20) which is set back from the remainder (22) of the front face (12). The entrances to at least some of the bores (30.1, 30.2 etc) are within the recessed area (20).

WO 2009/090510 A1

A FLOW DISTRIBUTOR PLATE FOR THE TREATMENT OF WATER BY REVERSE OSMOSIS

FIELD OF THE INVENTION

THIS INVENTION relates to the treatment of water by reverse osmosis.

BACKGROUND TO THE INVENTION

In PCT application PCT/GB96/03060 (published as WO 97/21630) there is disclosed desalination apparatus which includes a series of spirally wound reverse osmosis membranes in a cylindrical outer casing. The casing has a cap at each end. The caps close the ends of the casing. The raw water inlet, the permeate outlet and the brine outlet pass through the caps.

Between the cap through which the raw water inlet passes and the adjacent end of the first of the membranes in the casing there is a flow distributor plate. The plate has a multitude of bores passing through it and streams of raw water flow through these bores. The water streams impinge on the end of the first membrane and the water flows into the salt retention passages.

The flow distributor plate of the desalinator disclosed in WO 97/21630 has a flat front face and the bores in the plate can have their axes skew to the flat front face of the plate.

The present invention provides an improved flow distributor plate for reverse osmosis desalination apparatus.

BRIEF DESCRIPTION OF THE INVENTION

According to one aspect of the present invention there is provided a flow distributor plate for a reverse osmosis desalination apparatus, the plate having a plurality of bores through it from a front face thereof to a rear face thereof, the front face having a recessed area the surface of which is set back from the remainder of the front face of the plate, the entrances to at least some of the bores being within said recessed area.

In one form there is a plurality of recesses together making up the recessed area, there being the entrance to at least one bore within each recessed area. Each of said plurality of recesses can encircle a single bore entrance. In another form there are two or more bore entrances in each recess.

Some of the bores can straddle the bounding edges of the recesses so that a first part of the entrance of each of these bores is within the recessed area and the second part of the entrance of each of these bores is outside said area.

In a specific form there is a circular array of recesses, each recess being circular and adjacent recesses being joined by a recessed channel, the recesses and channels forming the recessed area. The channels can be of the same depth as the recesses.

The width of each channel can be less than the diameter of each bore and there can be at least one bore having its entrance in each channel, a centre part of the entrance to each of these bores being in the channel and two opposed peripheral parts of each of these bores being outside the channel.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, and to show how the same may be carried into effect, reference will now be made, by way of example, to the accompanying drawings in which:

Figures 1 and 2 are respectively pictorial views of the front and rear faces of a flow distributor plate in accordance with the present invention;

Figure 3 is an elevation of the front face of the plate of Figures 1 and 2;

Figure 4 illustrates three membranes in an end-to-end array;

Figure 5 is a section through the membrane array of Figure 4 and also shows a casing;

Figure 6 is an elevation of the casing shown in Figure 5; and

Figure 7 is an elevation of the flow distributor plate through which water emerging from the salt retention passages flows.

DETAILED DESCRIPTION OF THE DRAWINGS

The flow distributor plate shown in Figure 1 to 3 of the drawings is designated 10 and has a front face 12 (Figures 1 and 3) and a rear face 14 (Figure

2).

An encircling spigot 16 protrudes from the rear face 14 and has, on the cylindrical outer face thereof, formations 18 which enable it to be fitted in a leakproof manner into one end of the cylindrical casing (not shown) which receives the spirally wound reverse osmosis membranes.

The front surface of the plate consists of a recessed area 20 which is set back from the remainder of the front surface of the plate. The remainder of the front surface of the plate is designated 22 and comprises the entire area of the plate which is not recessed and setback.

The recessed area 20 is constituted by an array of circular recesses 24 and a series of channels 26. The recesses 24 are arranged in a circular array around the axis of the plate 10, which axis passes through the centre of an opening 28 at the centre of the plate 10. Channels 26 are arcuate in shape and generated about said axis. Each channel 26 joins two circular recesses 24. The permeate outlet pipe (not shown) passes through the opening 28.

Bores 30.1, 30.2, 30.3 and 30.4 pass through the plate 10. Each bore in the plate is skew in that its longitudinal axis is not at right angles to the surfaces of the plate. This means that the entrance to each bore is displaced circumferentially around the plate from its exit.

In the illustrated embodiment the bores can be considered to fall into Four groups. The bores of the first group are designated 30.1 and each bore in this group lies wholly within one of the recesses 24. The second group of bores is designated 30.2 and each bore in this group lies wholly within the area 22. The remaining groups of bores, designated 30.3 and 30.4, straddle the areas 20, 22 and hence each has part of its entrance within the area 20 and part within the area 22. Some bores in this group, those designated 30.3, straddle the edge of a circular recess 24. The remainder, those designated 30.4, are each co-incident with a channel 26. As the diameter of each bore 30.4 is greater than the width of the channel 26, a centre part of each entrance is in the channel and two opposed peripheral parts are outside the channel and in the area 22.

A raised ring 32 is provided on the rear face 14 of the plate 10.

Turning now to Figures 4 and 5, reference numerals 34, 36, 38 and 40 designate four membranes in an end-to-end array. The outer casing in which the membrane array is contained is shown in Figures 5 and 6 and is designated 42. The end caps 44, 46 which close-off both ends of the casing 42 and the pipes 48, 50 and 52 through which raw water, permeate and waste water flows are only illustrated in Figure 5. The water being treated flows through membranes 34, 36, 38 and 40 in sequence.

Each membrane includes semi-permeable leaves 54 which are wrapped around a permeate pipe 56 in conventional manner.

At the inlet end of each membrane there is a flow distributor plate 10 as shown in Figures 1 to 3. At the outlet end of each membrane there is a flow distributor plate 58 (Figure 7). The plates 10 and 58 are at opposite ends of a sleeve which sheaths the array of leaves 54.

The plate 58 has three co-axial rings of bores 60, 62 and 64 in it, the bores 62 in the middle ring being larger than those in the inner and outer rings 60, 64. In addition there is a central opening 66 which matches the opening 28 in the plate 10.

As seen in Figures 4 and 5, there are short pipes 68 which pass through the openings 28 and 66 and connect the permeate pipes 56 in series. The plate 58 at the outlet end of each membrane is spaced from the plate 10 at the inlet end of the next membrane in the array. Water emerging under pressure from each of the membranes 34, 36, 38 through the bores 60, 62 and 64 does so as a series of streams of water which impinge on the plate 10 of the next membrane in the series. The water entering the recessed area 20 in particular has turbulence imparted to it and turbulent streams flow through the bores 30.1, 30.2 etc onto the end of the membrane 36, 38, 40. The angle of the bores 30.1, 30.2 etc imparts a swirling motion to the water which impinges on the end of the membrane. The direction in which the water is caused to swirl is the same as that in which the leaves 54 are wound around the pipe 56.

Experimental work has shown that recessing the front face of the plate 10, and providing the entrances to some of the bores in the plate within the recessed area, enhances the performance of the desalinator. Applicant attributes this enhanced performance to the fact that turbulent water flows into the salt retention passages of each membrane after the first and that the area of the membrane which can be considered as a deadspot is minimised.

CLAIMS:

1. A flow distributor plate for a reverse osmosis desalination apparatus, the plate having a plurality of bores through it from a front face thereof to a rear face thereof, the front face having a recessed area the surface of which is set back from the remainder of the front face of the plate, the entrances to at least some of the bores being within said recessed area.
2. A flow distributor plate as claimed in claim 1, wherein there is a plurality of recesses together making up the recessed area, there being the entrance to at least one bore within each recessed area.
3. A flow distributor plate as claimed in claim 1, wherein each of said plurality of recesses encircles a single bore entrance.
4. A flow distributor plate as claimed in claim 2 or 3, wherein there are two or more bore entrances in each recess.
5. A flow distributor plate as claimed in any preceding claim, wherein some of the bores straddle the bounding edges of the recessed area so that a first part of the entrance of each of these bores is within the recessed area and the second part of the entrance of each of these bores is outside said area.
6. A flow distributor plate as claimed in any preceding claim, and having

an array of recesses arranged in a circle, each recess being circular and adjacent recesses being joined by a recessed channel, the recesses and channels forming the recessed area.

7. A flow distributor plate as claimed in claim 6, wherein the channels are of the same depth as the recesses.

8. A flow distributor plate as claimed in claim 6 or 7, wherein the width of each channel is less than the diameter of each bore and there is at least one bore having its entrance in each channel, a centre part of the entrance to each of these bores being in the channel and two opposed peripheral parts of each of these bores being outside the channel.

9. A desalination installation comprising a plurality of membranes arranged end-to-end in an outer casing, each membrane from the second onwards having at the Inlet end thereof a flow distributor plate as claimed in any one of claims 1 to 8.

10. An installation as claimed in claim 9, wherein each membrane has a flow distributor plate at the outlet end thereof, the flow distributor plate at the outlet end of each membrane having bores in it from which water emerging from the salt retention passages flow and there being a gap between the flow distributor plate at the outlet end of one membrane and the flow distributor plate at the inlet end of the next membrane.

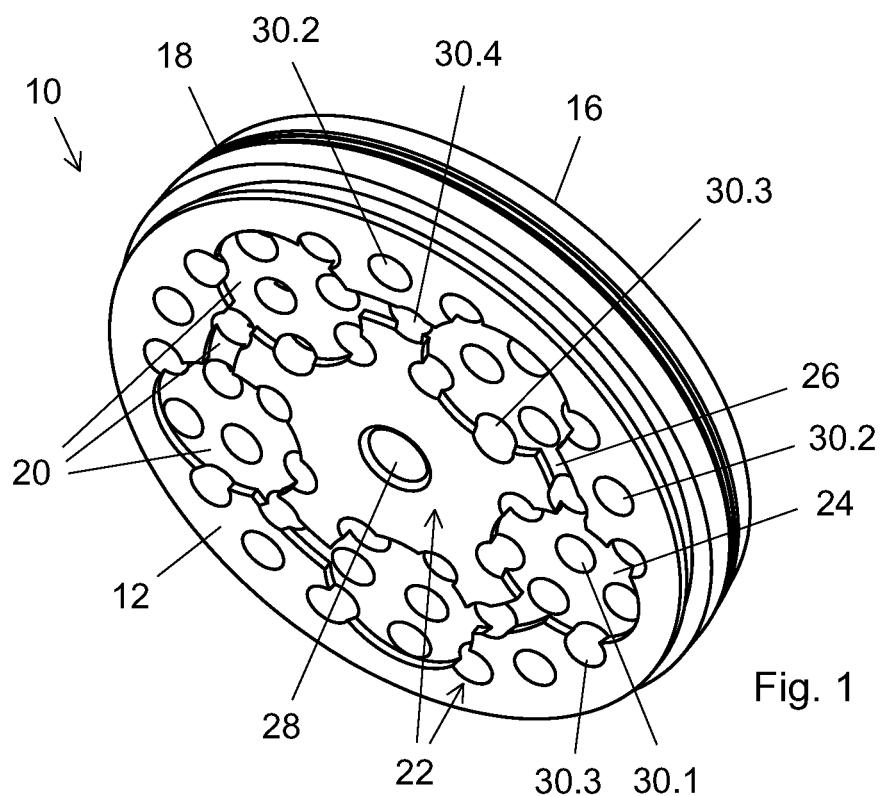


Fig. 1

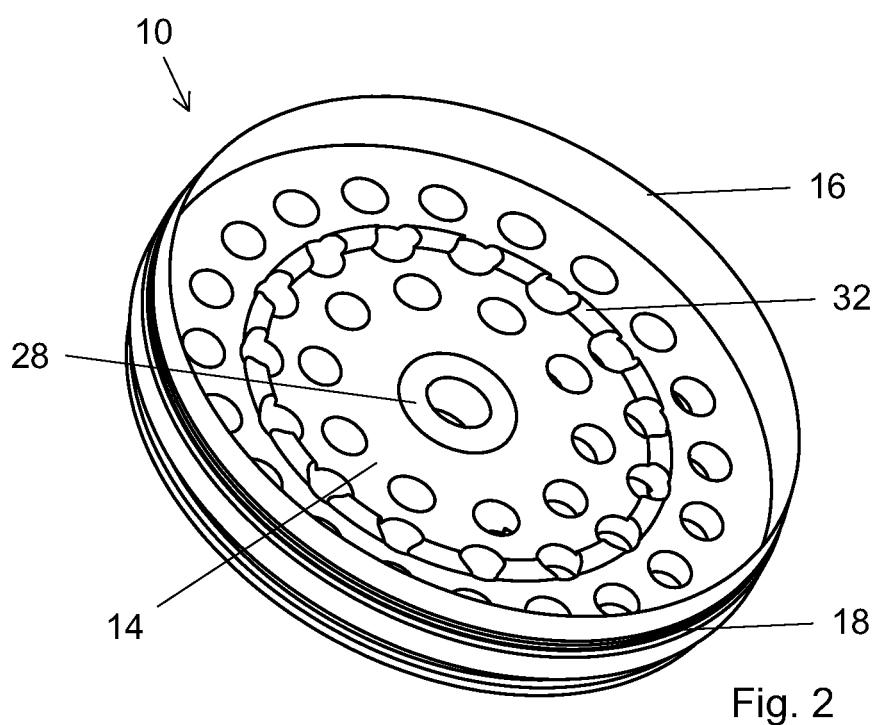


Fig. 2

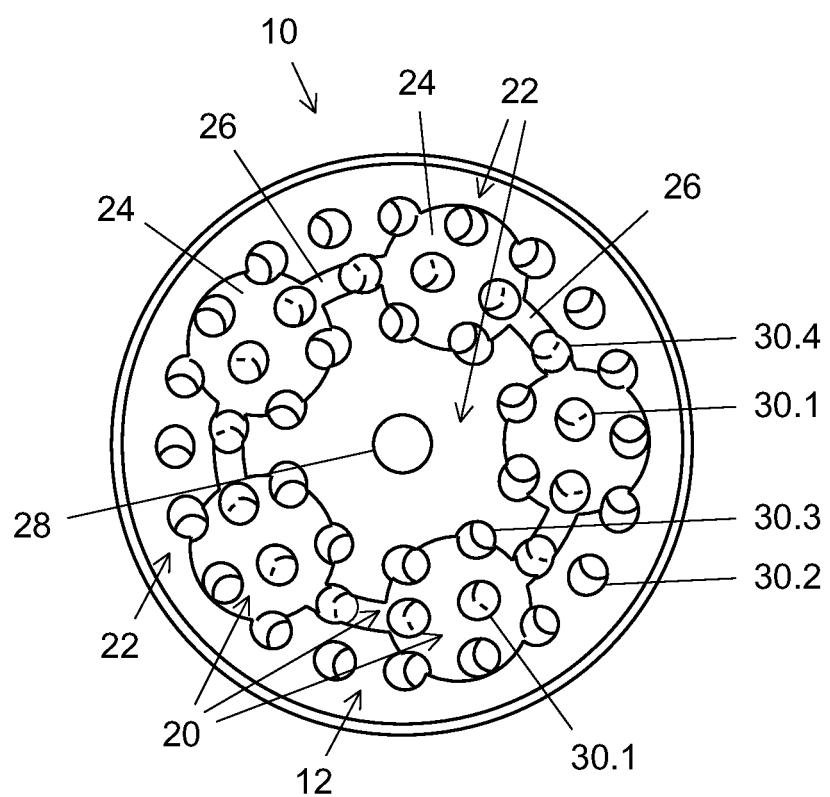


Fig. 3

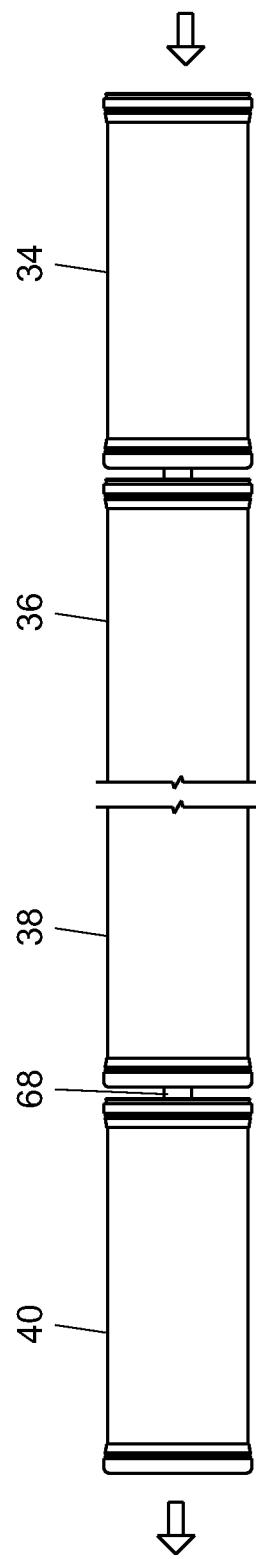


Fig. 4

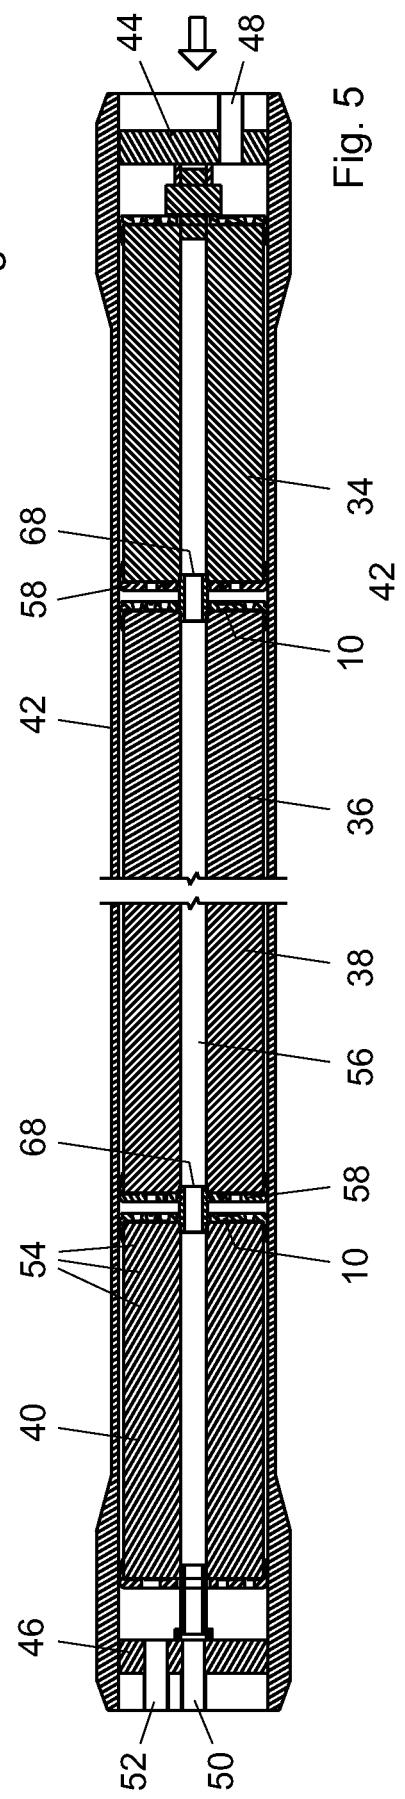


Fig. 5

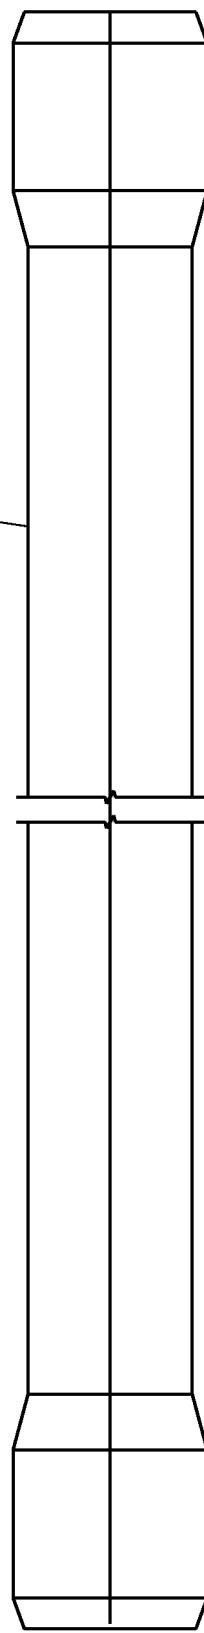


Fig. 6

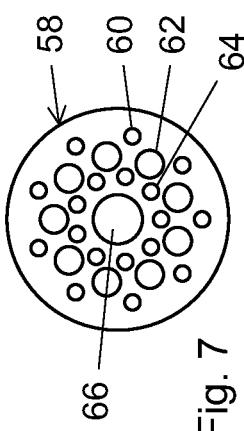


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2008/054465

A. CLASSIFICATION OF SUBJECT MATTER
INV. B01D63/12 B01D65/00 C02F1/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B01D C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/057002 A1 (CHIKURA SHINICHI [JP] ET AL) 17 March 2005 (2005-03-17)	1-8
Y	figure 2 paragraphs [0002], [0051] - [0058] -----	9,10
Y	JP 2001 224931 A (NITTO DENKO CORP) 21 August 2001 (2001-08-21) the whole document -----	9,10
A	WO 00/57994 A (GRAHAM WILLIAM [ZA]) 5 October 2000 (2000-10-05) the whole document -----	1-10

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

28 April 2009

Date of mailing of the international search report

15/05/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Châtellier, Xavier

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2008/054465

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2005057002	A1	17-03-2005	CN JP JP KR KR US	1613547 A 4237818 B2 2008290078 A 20050028212 A 20070102459 A 2007017860 A1		11-05-2005 11-03-2009 04-12-2008 22-03-2005 18-10-2007 25-01-2007
JP 2001224931	A	21-08-2001		NONE		
WO 0057994	A	05-10-2000	AU PA TW	3399900 A 8497701 A1 495378 B		16-10-2000 29-08-2002 21-07-2002