




(86) Date de dépôt PCT/PCT Filing Date: 1994/08/23
(87) Date publication PCT/PCT Publication Date: 1995/04/06
(45) Date de délivrance/Issue Date: 2006/10/31
(85) Entrée phase nationale/National Entry: 1996/03/08
(86) N° demande PCT/PCT Application No.: US 1994/009543
(87) N° publication PCT/PCT Publication No.: 1995/009122
(30) Priorité/Priority: 1993/09/29 (US08/129,422)

(51) Cl.Int./Int.Cl. *B65H 35/07* (2006.01),
B65H 35/00 (2006.01)
(72) Inventeurs/Inventors:
DRETZKA, PHILIP C., US;
BELDEN, TIGHE M., US;
RESHANOV, EUGENE N., US;
SAMUELSON, BRUCE E., US
(73) Propriétaire/Owner:
MINNESOTA MINING AND MANUFACTURING
COMPANY, US
(74) Agent: SMART & BIGGAR

(54) Titre : DISTRIBUTEUR DE BANDE
(54) Title: TAPE DISPENSER

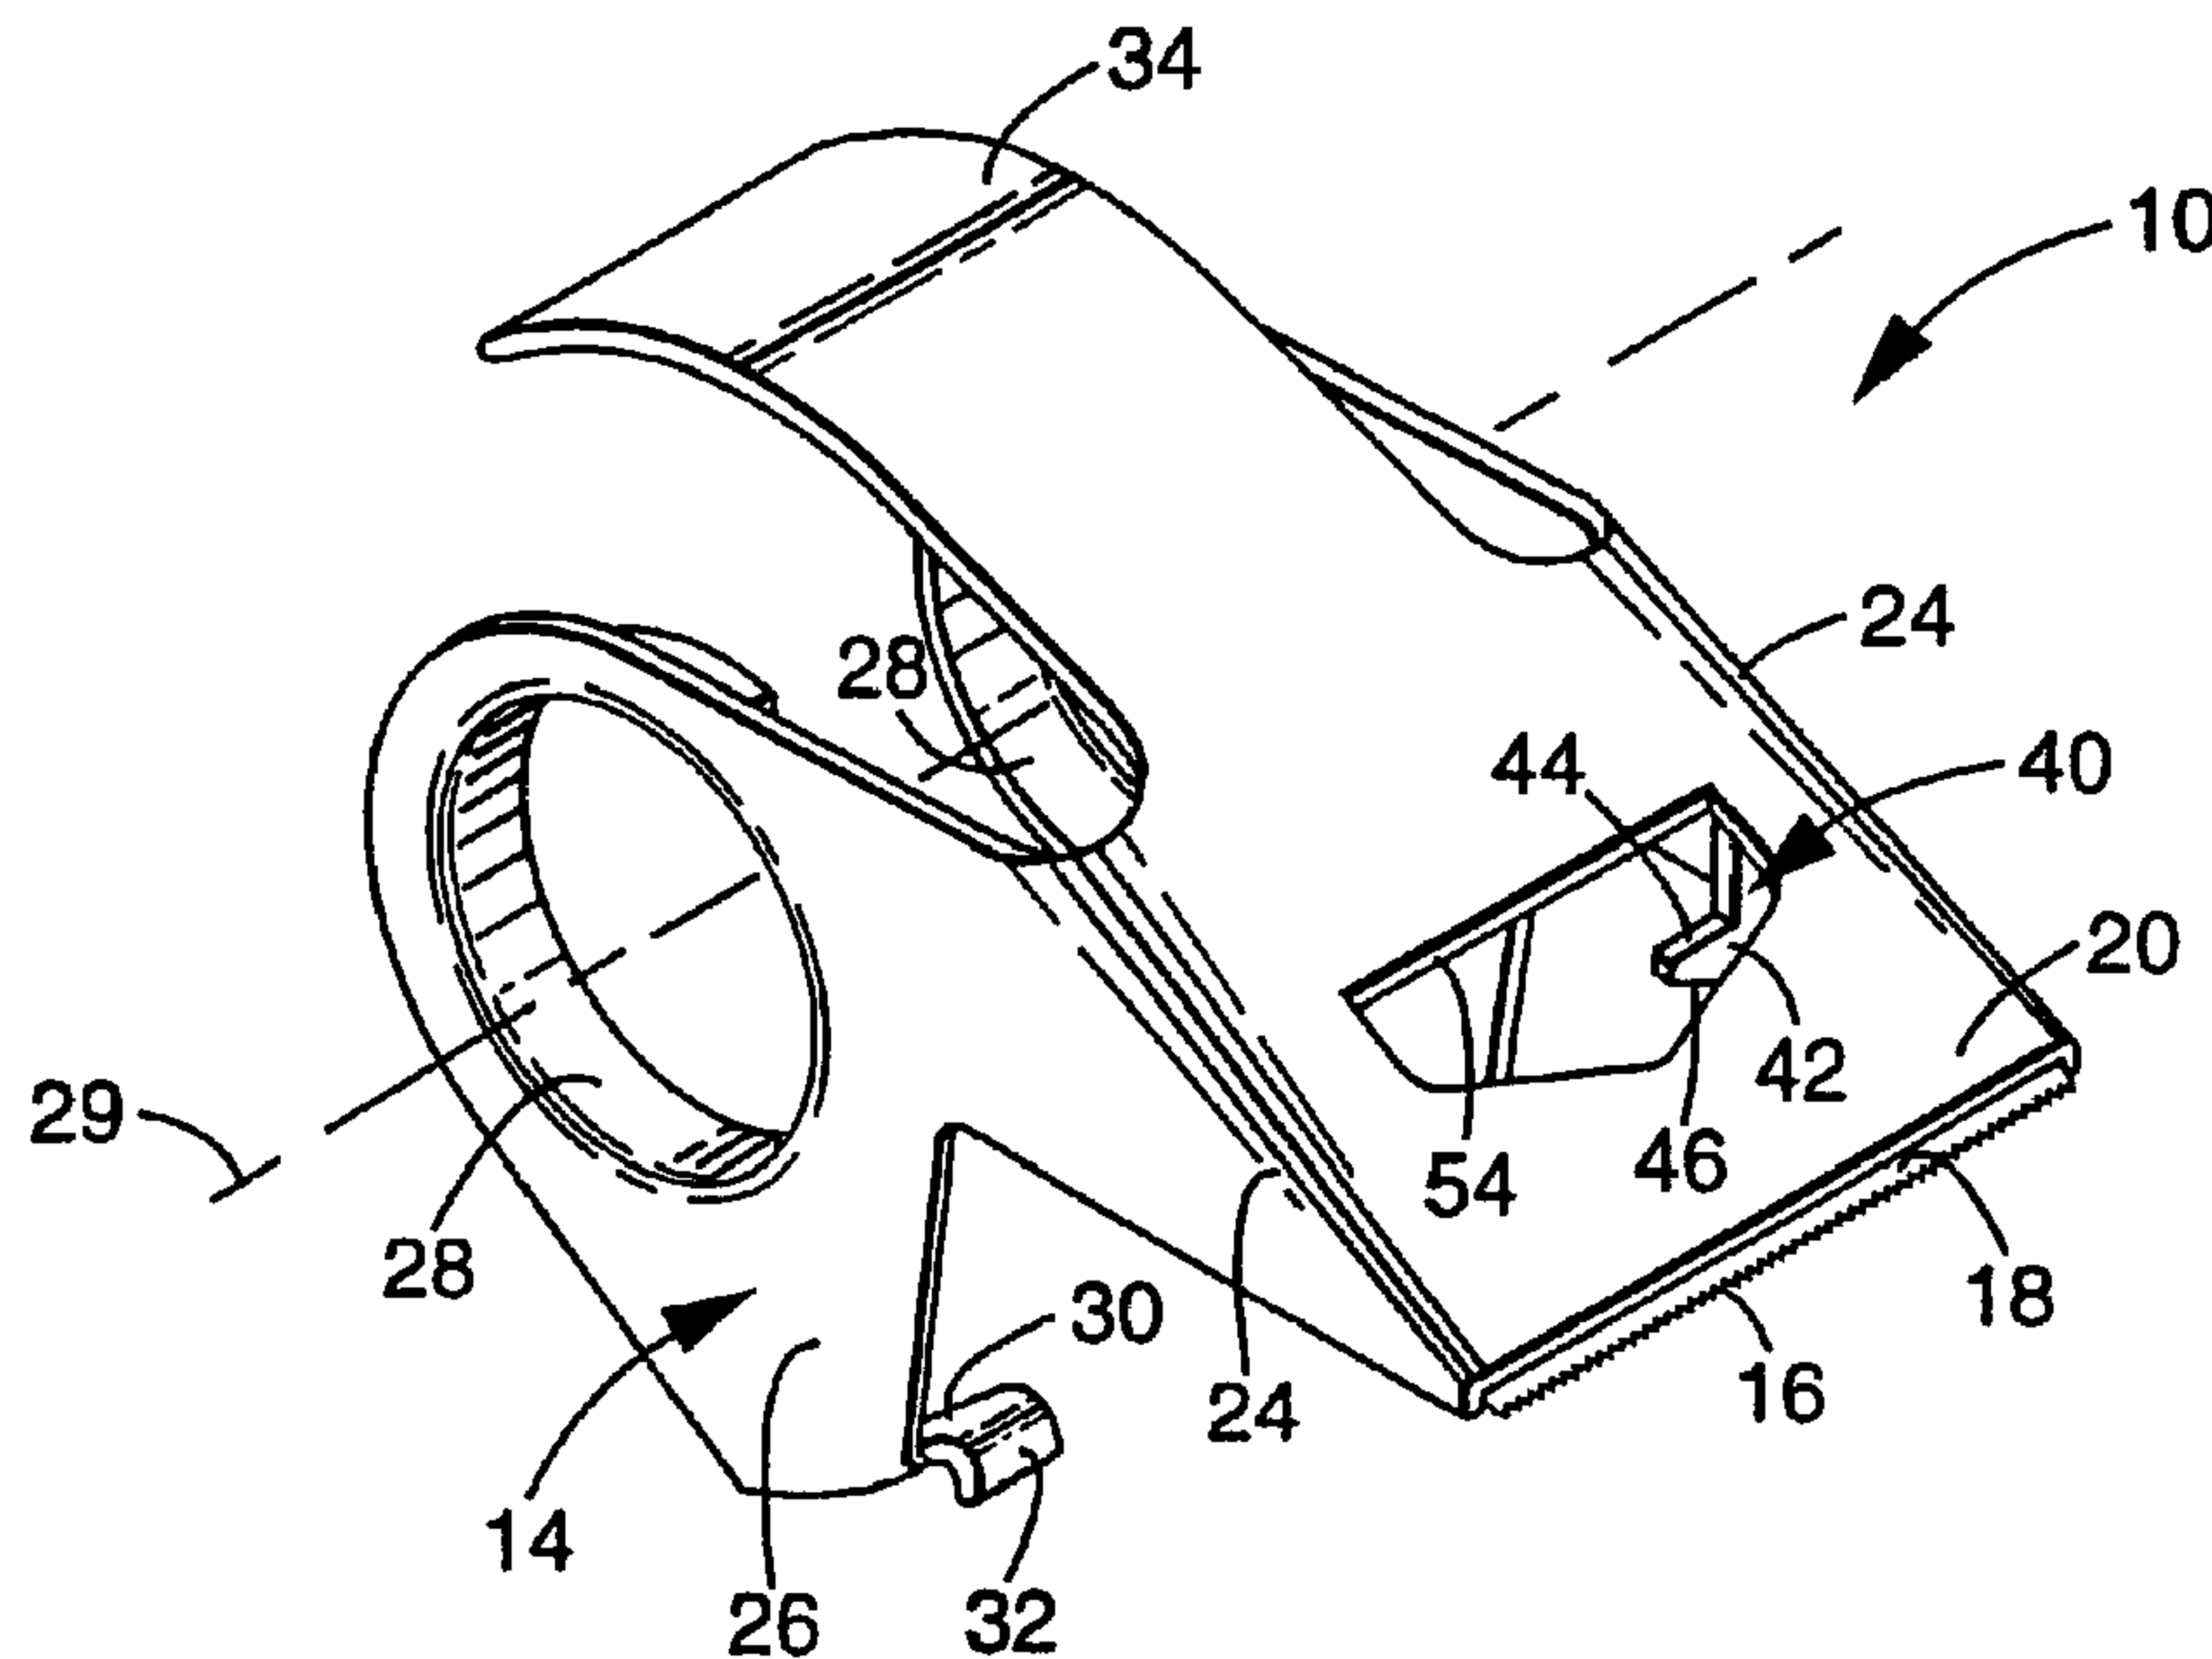

(57) Abrégé/Abstract:

A tape dispenser having a polymeric frame (14) with a cutter support portion (20) having a cutting edge (16) along one end, opposite side wall portions (26) attached along opposite side edges (24) of the cutter support portion (20), opposed hub portions (28) projecting toward each other from the side wall portions (26) that are adapted to project into opposite ends of an opening through a tape core (13) to rotatably support the roll of tape (11), and locating tab portions (30) projecting toward each other from the side wall portions (26). The locating tab portions have arcuate retaining surfaces (32) adjacent and spaced from the support portion, and have opposed cam surfaces (33) extending from the side wall portions to the inner ends of the locating tab portions that consistently cause tape being pulled from the roll of tape (11) on the side of the tab portions (30) opposite the retaining surfaces (32) to be guided around the locating tab portions when the tape is cut, whereupon the newly cut end portion of the tape will releasably adhere to the retaining surfaces (32) to retain those end portions in a position projecting from the roll at which they can easily be manually engaged to afford withdrawing another length of tape from the roll. The frame (14) of the dispenser also includes attachment portions (40) with spaced opposed triangular projecting parts (42) under which can be engaged parts of a paper card (50) that can be used to hang the dispenser on a pin when it is on sale in a store.

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65H 35/00	2171442	A1	(11) International Publication Number: WO 95/09122
			(43) International Publication Date: 6 April 1995 (06.04.95)

(21) International Application Number: PCT/US94/09543

(22) International Filing Date: 23 August 1994 (23.08.94)

(30) Priority Data:
08/129,422 29 September 1993 (29.09.93) US

(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: DRETZKA, Philip, C.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). BELDEN, Tighe, M.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). RESHANOV, Eugene, N.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). SAMUELSON, Bruce, E.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: HUEBSCH, William, L. et al.; Office of Intellectual Property Counsel, Minnesota Mining and Manufacturing Company, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).


(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published*With international search report.***2171442**

(54) Title: TAPE DISPENSER

(57) Abstract

A tape dispenser having a polymeric frame (14) with a cutter support portion (20) having a cutting edge (16) along one end, opposite side wall portions (26) attached along opposite side edges (24) of the cutter support portion (20), opposed hub portions (28) projecting toward each other from the side wall portions (26) that are adapted to project into opposite ends of an opening through a tape core (13) to rotatably support the roll of tape (11), and locating tab portions (30) projecting toward each other from the side wall portions (26). The locating tab portions have arcuate retaining surfaces (32) adjacent and spaced from the support portion, and have opposed cam surfaces (33) extending from the side wall portions to the inner ends of the locating tab portions that consistently cause tape being pulled from the roll of tape (11) on the side of the tab portions (30) opposite the retaining surfaces (32) to be guided around the locating tab portions when the tape is cut, whereupon the newly cut end portion of the tape will releasably adhere to the retaining surfaces (32) to retain those end portions in a position projecting from the roll at which they can easily be manually engaged to afford withdrawing another length of tape from the roll. The frame (14) of the dispenser also includes attachment portions (40) with spaced opposed triangular projecting parts (42) under which can be engaged parts of a paper card (50) that can be used to hang the dispenser on a pin when it is on sale in a store.

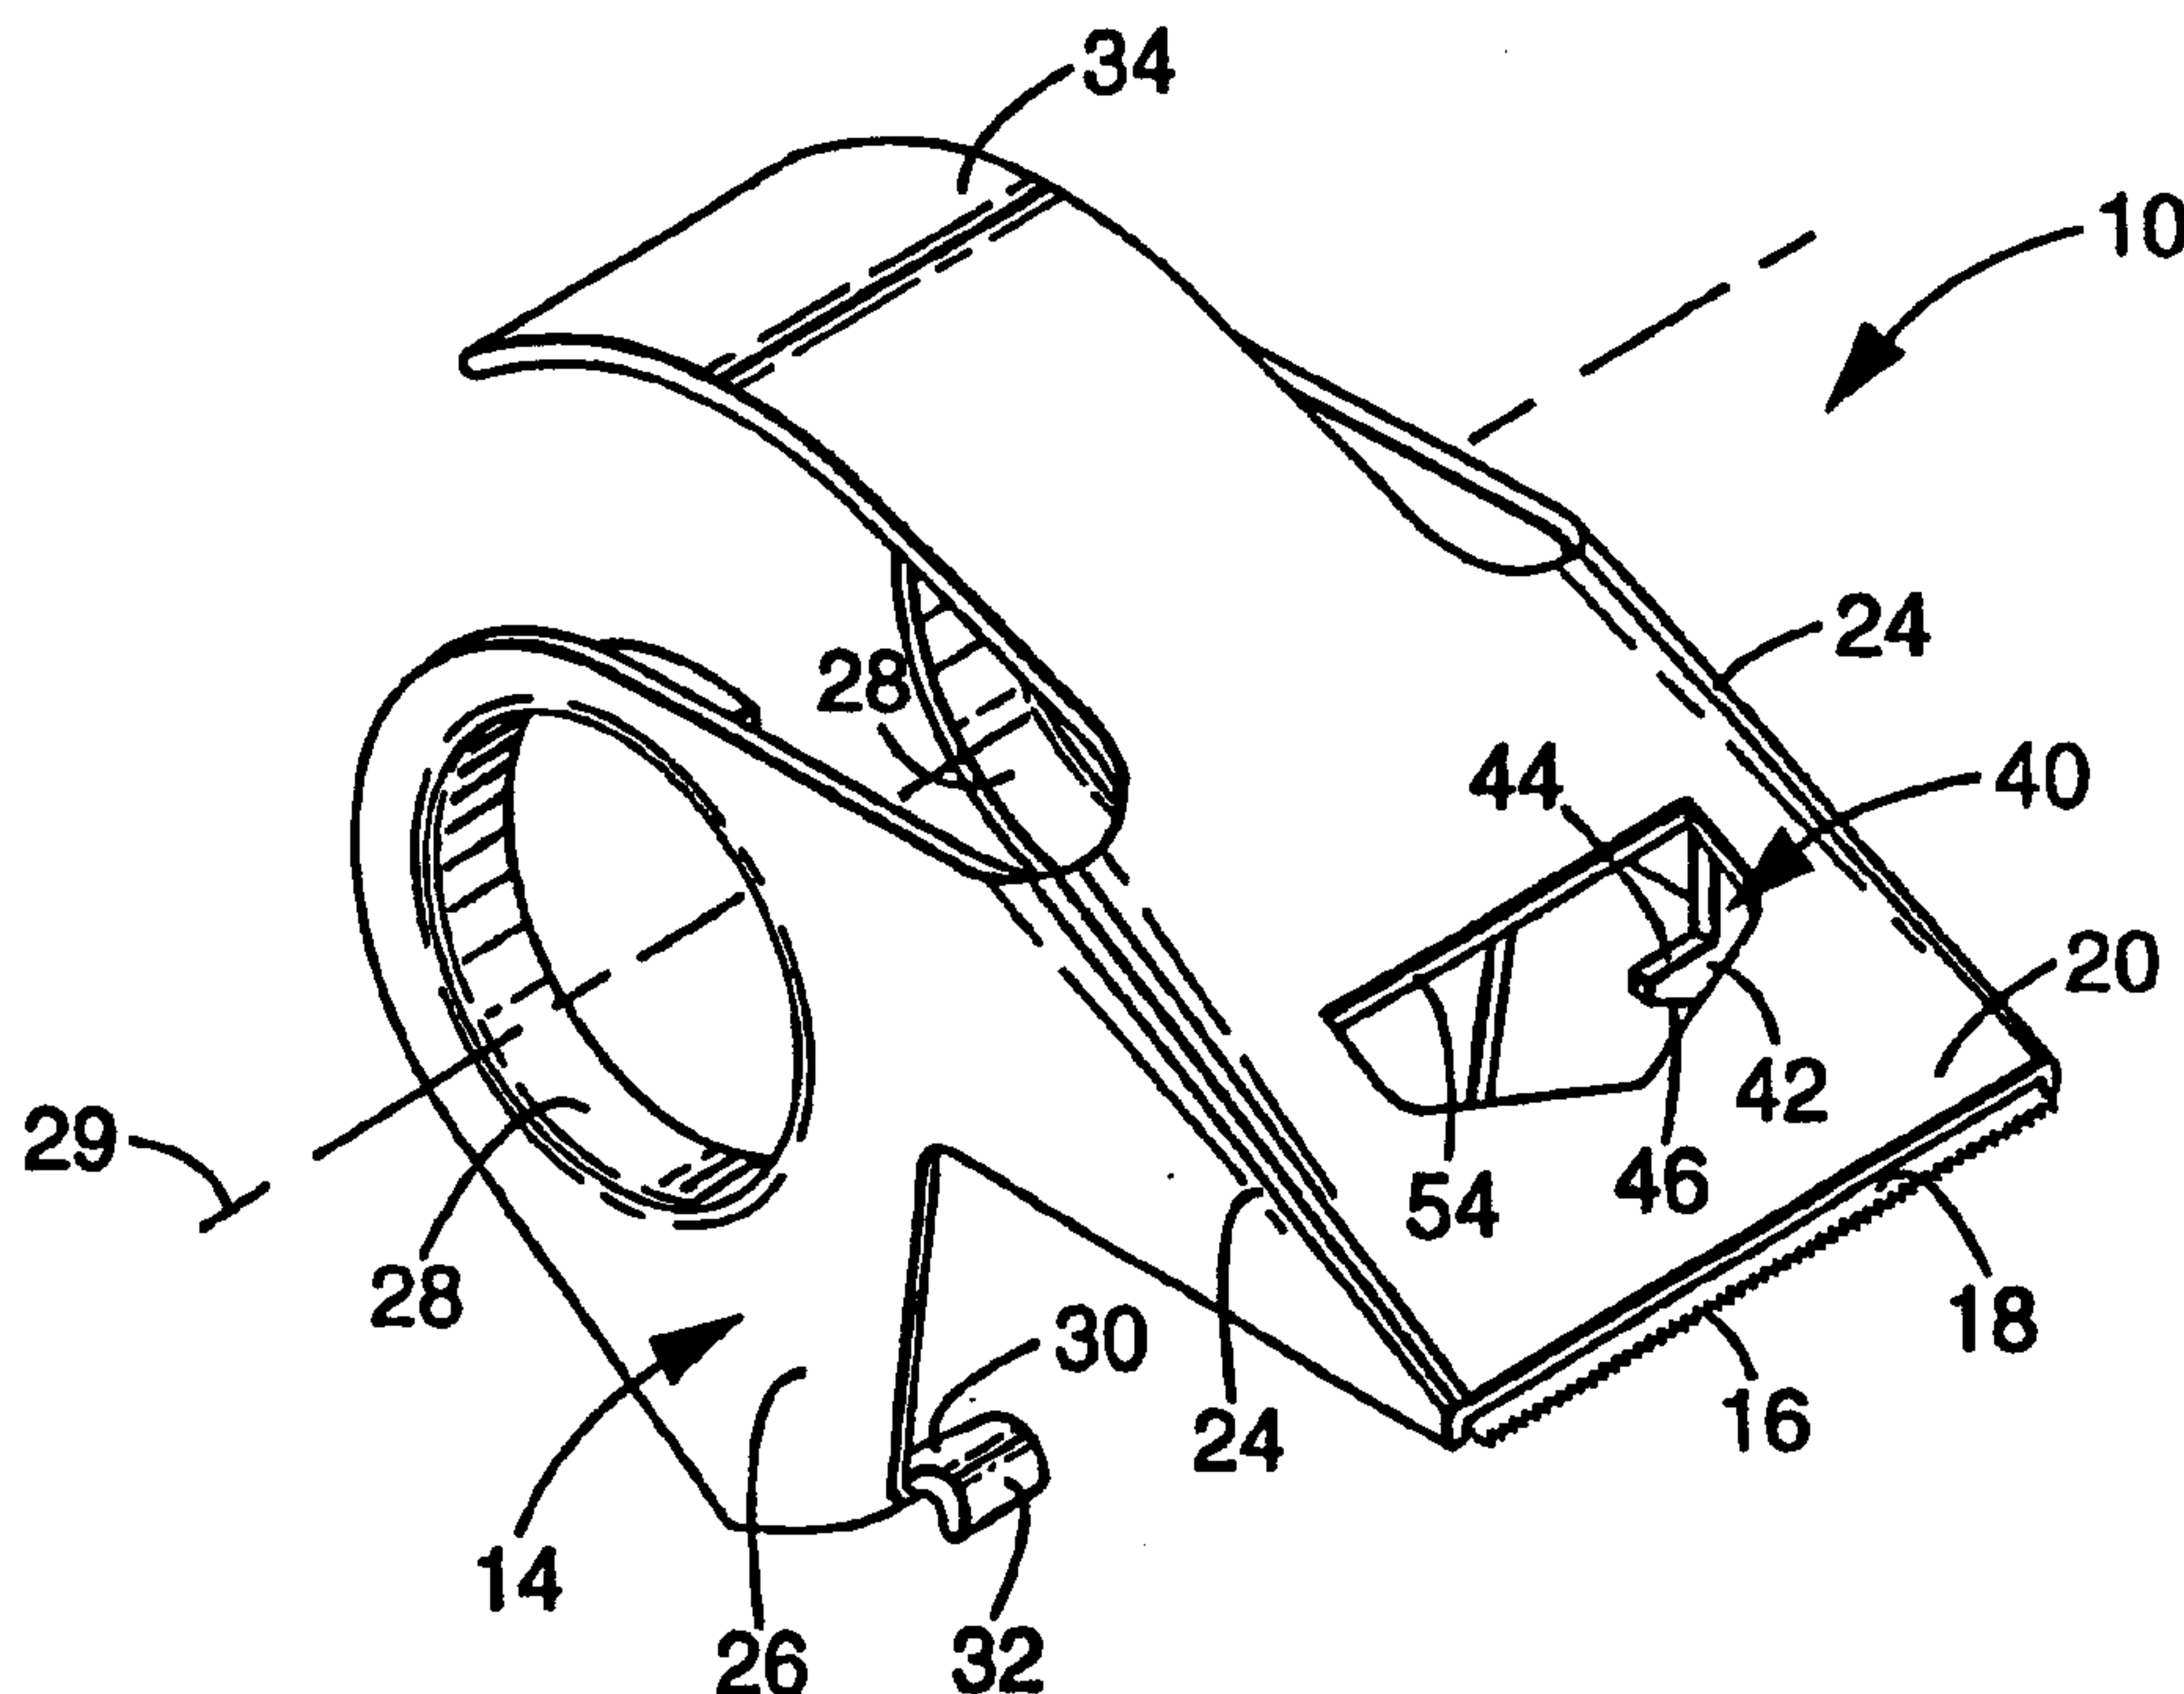

2171442

TAPE DISPENSER

5

Technical Field

The present invention relates to manually operated tape dispensers for rolls of tape of the type from which lengths of the tape may be withdrawn while the
10 tape is being applied to a substrate, and which include cutting means by which tape withdrawn from the dispenser may be cut from tape remaining on the roll of tape in the dispenser.

15 Background Art

For many years Minnesota Mining and Manufacturing Company (3M), St. Paul, Minnesota, has sold a light duty or disposable prior art tape dispenser under the trade designation "Scotch(T.M.) Brand C-147 dispenser
20 which is similar to the tape dispenser described in U.S. Patent No. 4,358,328. That dispenser is a manually operated tape dispenser for a roll of tape from which lengths of the tape may be withdrawn and includes cutting means by which tape withdrawn from the
25 dispenser may be cut from tape remaining on the roll of tape in the dispenser. That tape dispenser comprises a frame integrally molded of a polymeric material that comprises (1) a cutter support portion having means for defining a cutting edge along one end that is adapted
30 to transversely cut the tape, (2) opposite side wall portions attached along opposite side edges of the cutter support portion that are disposed generally at right angles to the cutter support portion and to the cutting edge, (3) opposed hub portions projecting
35 toward each other from the side wall portions, which hub portions are adapted to rotatably support the roll

of tape for rotation about an axis by projecting into opposite ends of an opening through its core; and (4) opposed locating tab portions projecting toward each other from the side wall portions at a distance from the axis that is significantly less than the distance between the cutting edge and the axis, which locating tab portions have retaining surfaces adjacent the cutter support portion to which newly cut end portions of the tape may be releasably adhered to retain those end portions of the tape in a position projecting from the roll at which they may be manually engaged to afford withdrawing another length of tape from the roll. In that prior art tape dispenser, however, the newly cut end portion of the tape can far too easily peel or slip away from the retaining surfaces on the locating tab portions, whereupon the newly cut end portion can again adhere to the underlying wrap of tape on the roll and be difficult to separate from that roll when another length of tape is desired. After that end of the tape is subsequently peeled from the roll it can be moved between and around the tab portions to a position between the locating tab portions and the cutter support portion, however this is not done as easily as may be desired, and even when done, does not often result in subsequent newly cut end portions of the tape remaining between the locating tab portions and the cutter support portion.

For many years Minnesota Mining and Manufacturing Company, St. Paul, Minnesota, has also sold an industrial quality prior art tape dispenser under the trade designation "Scotch(T.M.) Brand H-122 Dispenser, Model 28300". That dispenser is a manually operated tape dispenser for a roll of tape from which lengths of the tape may be withdrawn and includes cutting means by which tape withdrawn from the dispenser may be cut from tape remaining on the roll of tape in the dispenser.

That tape dispenser comprises a frame integrally molded of a polymeric material that comprises (1) a cutter support portion having means for defining a cutting edge along one end that is adapted to transversely cut the tape, (2) opposite side wall portions attached along opposite side edges of the cutter support portion that are disposed generally at right angles to the cutter support portion and to the cutting edge, (3) a hub portion projecting from one of the side wall portions, which hub portion is adapted to project into the opening in a core for the roll of tape to rotatably support the roll of tape for rotation about an axis; and (4) opposed spaced locating tab portions projecting toward each other from the side wall portions at a distance from the axis that is significantly less than the distance between the cutting edge and the axis, which locating tab portions have retaining surfaces adjacent the cutter support portion to which newly cut end portions of the tape may be releasably adhered to retain those end portions of the tape in a position projecting from the roll at which they may be manually engaged to afford withdrawing another length of tape from the roll. Also, the locating tab portions have opposed cam surfaces extending to the inner spaced adjacent ends of the locating tab portions on the sides of the locating tab portions opposite the retaining surfaces, which cam surfaces can be used to cause tape being pulled from the roll of tape on the side of the tab portions opposite the retaining surfaces to be guided between and around the tab portions to a position between the locating tab portions and the cutter support portion. Such guidance of the tape, however, requires purposeful manipulation of the dispenser, and if this is not properly done, the portion of the tape being withdrawn may not become positioned between the locating tab portions and the

cutter support portion when the cutting edge is brought into engagement to transversely cut the tape so that that newly cut end portion can again adhere to the surface of the roll of tape rather than to the
5 retaining surfaces.

Disclosure of the Invention

The present invention provides a dispenser similar to the dispensers described above that more easily and
10 consistently positions the newly cut end portions of the tape on the dispenser between locating tab portions and a cutter support portion of the dispenser and retains it in that location by releasable adhesion to retaining surfaces so that newly cut end portions of
15 the tape will not again adhere to the surface of the roll of tape, but instead will be presented where they can be easily manually engaged to afford dispensing new lengths of tape from the dispenser.

The tape dispenser according to the present
20 invention comprises an integrally molded polymeric frame that comprises (1) a cutter support portion having means along one end providing a cutting edge adapted to transversely cut the tape, (2) opposite side wall portions attached along opposite side edges of the
25 cutter support portion that are disposed generally at right angles to the cutter support portion and to the cutting edge, (3) at least one hub portion projecting from one of the side wall portions, the hub portion having a peripheral surface adapted to support the
30 cylindrical inner surface of the core for rotation about an axis generally parallel to said tape cutting edge, and being adapted to project into the opening in the core from one end of the core to support the roll of tape for rotation about the hub portion; and (4)
35 opposed spaced locating tab portions projecting toward each other from the side wall portions at a distance

from the axis that is significantly less than the distance between the cutting edge and the axis, which locating tab portions have retaining surfaces adjacent the cutter support portion to which newly cut end portions of the tape may be releasably adhered to retain those end portions of the tape in a position projecting from the roll at which they may be manually engaged to afford withdrawing another length of tape from the roll. Also, the locating tab portions have opposed cam surfaces extending from the side wall portions to spaced adjacent ends of the locating tab portions on the sides of the locating tab portions opposite the retaining surfaces, which cam surfaces cause tape being pulled from the roll of tape on the side of the tab portions opposite the retaining surfaces to be guided between and around the tab portions when relative movement is caused between the dispenser and the tape being withdrawn to transversely cut the tape with the cutting edge.

The tape dispenser according to the present invention is significantly improved when compared to the prior art dispenser described above in that it easily and consistently causes tape being pulled from the roll of tape on the side of the locating tab portions opposite the retaining surfaces to be consistently guided between and around the locating tab portions without further relative manipulation of the dispenser and the tape being withdrawn when relative movement is caused between the dispenser and the tape being withdrawn to transversely cut the tape with the cutting edge, and causes the newly cut end portion of the tape to consistently and firmly adhere to the retaining surface to retain that end portion of the tape in a position at which it may easily be manually engaged to afford withdrawing another length of tape from the dispenser.

The combination of structural features of the tape dispenser according to the present invention that provide these features include one or more of the following.

- 5 (1) The space between the adjacent spaced ends of the locating tab portions is at least 60 percent of the width of the tape the dispenser is intended to dispense (e.g., at least 1.2 inch for dispensers for 2 inch wide
- 10 tape);
- (2) The parts of the opposed cam surfaces on the locating tab portions that extend from the side wall portions to the adjacent spaced ends of the locating tab portions on the
- 15 sides of the locating tab portions opposite the retaining surfaces are disposed at angles of greater than about 45 degrees, and preferably greater than about 50 degrees, with respect to the surfaces adjacent the
- 20 cutter support portion of imaginary planes passing through the axis of the hub portions and those parts; the measurements of those angles being taken in planes normal to the surfaces of the imaginary planes. These
- 25 angles of the cam surfaces, in combination with the space between the locating tab portions, facilitates smooth movement of the tape along the cam surfaces and around the locating tab portions (if necessary) when the
- 30 tape and dispenser are moved to a position where the cutting edge will cut the tape being dispensed;
- (3) the retaining surfaces on the opposed locating tab portions that project toward
- 35 each other from the side wall portions are spaced from the cutter support portion so

60557-5194

5 that a first imaginary plane passing through
the axis of the hub portions and the cutting
edge is disposed at an angle of at least 12
degrees and preferably at least 20 degrees
with respect to a second imaginary plane that
passes through the axis of the hub portions
and is tangent to the retaining surfaces of
the locating tab portions. The width of this
10 space (which is unobstructed) between the
cutting edge and the retaining surfaces
together with the ease with which the tape
can be pulled between the locating tab
portions insures that the tape will be
consistently pulled into that space when it
15 is cut by the cutting edge (thereby assuring
that the newly cut end portion of the tape
will contact the retaining surfaces after it
is formed) when the cutting edge is moved
into engagement with the tape after tape has
20 been withdrawn from the side of the locating
tab portions opposite the cutter support
portion; and

(4) The retaining surfaces on the opposed
locating tab portions are convex and arcuate
25 about an axis parallel to the axis of the hub
portions, which provides retaining surfaces
to be adhered to by the newly formed end
portions of the tape that are compatible in
shape with the normally slightly concave
30 inner adhesive coated surface of those end
portions, thereby facilitating adhesion of
the tape to the retaining surfaces.

60557-5194

According to one aspect of the present invention, there is provided a tape dispenser for a roll of tape including a supply length of the tape wound around a core, which core has opposite ends and a through opening defined
5 by a cylindrical inner surface between the ends, said dispenser comprising means for defining a cutting edge adapted to transversely cut the tape, and a frame integrally molded of a polymeric material, said frame comprising: a cutter support portion having said means for defining a
10 cutting edge along one end and having spaced side edges disposed at about right angles with respect to said cutting edge; opposite side wall portions attached along said opposite side edges of the cutter support portion and having opposed adjacent inner surfaces; opposed hub portions
15 projecting toward each other from the side wall portions, said hub portions having peripheral surfaces adapted to support the cylindrical inner surface of the core for rotation about an axis generally parallel to said tape cutting edge, and being adapted to project into the opening
20 in the core from opposite ends of the core to support the roll of tape for rotation about the hub portions; and opposed spaced locating tab portions projecting toward each other from the side wall portions at a distance from said axis that is significantly less than the distance between
25 said cutting edge and said axis, said locating tab portions having retaining surfaces adjacent a guide portion that are convex and arcuate about an axis parallel to the axis of said hub portions and are spaced from the support portion so that a first plane passing through the axis of the hub
30 portions and the cutting edge is disposed at an angle of at least 12 degrees with respect to a second plane that passes through the axis of the hub portions and is tangent to the retaining surfaces of the locating tab portions, said

60557-5194

dispenser having unobstructed space adjacent the retaining surfaces between the first plane and the second plane, said locating tab portions having opposed cam surfaces extending from the side wall portions to the adjacent inner ends of

5 the locating tab portions on the sides of said locating tab portions opposite said retaining surfaces, parts of the cam surfaces along the lengths of the cam surfaces being disposed at cam angles of greater than about 45 degrees with respect to the surfaces adjacent the cutter support portion

10 of imaginary planes passing through said axis of the hub portion and said parts of the cam surfaces when the measurements of said cam angles are taken in planes normal to the surfaces of the imaginary planes; said cam surfaces and the space between said retaining surfaces and said

15 support member causing tape being pulled from the roll of tape on the hub portions on the side of said locating tab portions opposite said retaining surfaces to be consistently guided between and around said tab portions when relative movement is caused between said dispenser and said tape

20 being withdrawn to bring said cutting edge into engagement to transversely cut the tape, and said retaining surfaces affording releasable adhesion thereto by a newly cut end portion of the tape to retain that end portion of the tape in a position projecting from the roll at which it may

25 easily be manually engaged to afford withdrawing another length of tape from the roll.

According to another aspect of the present invention, there is provided a tape dispenser for a roll of tape including a supply length of the tape wound around a

30 core, which core has opposite ends and a through opening defined by a cylindrical inner surface between the ends, said dispenser comprising means for defining a cutting edge adapted to transversely cut the tape, and a frame of a

60557-5194

polymeric material, said frame comprising: a cutter support portion having said means for defining a cutting edge along one end and having spaced side edges disposed at about right angles with respect to said cutting edge; opposite side wall portions attached along said opposite side edges of the cutter support portion and having opposed adjacent inner surfaces; at least one hub portion projecting from one of said side wall portions, said hub portion having a peripheral surface adapted to support the cylindrical inner surface of the core for rotation about an axis generally parallel to said tape cutting edge, and being adapted to project into the opening in the core from one end of the core to support the roll of tape for rotation about the hub portion; and opposed spaced locating tab portions projecting toward each other from the side wall portions at a distance from said axis that is significantly less than the distance between said cutting edge and said axis, said locating tab portions having retaining surfaces adjacent the cutter support portion that are spaced from the support portion so that a first plane passing through the axis of the hub portions and the cutting edge is disposed at an angle of at least 12 degrees with respect to a second plane that passes through the axis of the hub portions and is tangent to the retaining surfaces of the locating tab portions, said locating tab portions having opposed cam surfaces extending from the side wall portions to the adjacent inner ends of the locating tab portions on the sides of said locating tab portions opposite said retaining surfaces, said dispenser having unobstructed space adjacent the retaining surfaces between the first plane and the second plane, parts of the cam surfaces along the lengths of the cam surfaces being disposed at cam angles of greater than about 45 degrees with respect to the surfaces adjacent the cutter support portion

60557-5194

of imaginary planes passing through said axis of the hub portion and said parts of the cam surfaces when the measurements of said cam angles are taken in planes normal to the surfaces of the imaginary planes; said cam surfaces causing tape being pulled from the roll of tape on the hub portions on the side of said locating tab portions opposite said retaining surfaces to be guided between and around said tab portions when relative movement is caused between said dispenser and said tape being withdrawn to bring said cutting edge into engagement to transversely cut the tape, and said retaining surfaces affording releasable adhesion thereto by a newly cut end portion of the tape to retain that end portion of the tape in a position projecting from the roll at which it may easily be manually engaged to afford withdrawing another length of tape from the roll.

According to yet another aspect of the present invention, there is provided a tape dispenser for a roll of tape including a supply length of the tape wound around a core, which core has opposite ends and a through opening defined by a cylindrical inner surface between the ends, said dispenser comprising means for defining a cutting edge adapted to transversely cut the tape, and a frame of a polymeric material, said frame comprising: a cutter support portion having said means for defining a cutting edge along one end and having spaced side edges disposed at about right angles with respect to said cutting edge; opposite side wall portions attached along said opposite side edges of the cutter support portion and having opposed adjacent inner surfaces; at least one hub portion projecting from one of said side wall portions, said hub portion having a peripheral surface adapted to support the cylindrical inner surface of the core for rotation about an axis generally parallel to said tape cutting edge, and being adapted to

60557-5194

project into the opening in the core from one end of the core to support the roll of tape for rotation about the hub portion; and opposed spaced locating tab portions projecting toward each other from the side wall portions at a distance from said axis that is less than the distance between said cutting edge and said axis, said locating tab portions being spaced apart a predetermined distance and having retaining surfaces adjacent the cutter support portion that are spaced from the support portion so that a first plane passing through the axis of the hub portions and the cutting edge is disposed at a first predetermined angle with respect to a second plane that passes through the axis of the hub portions and is tangent to the retaining surfaces of the locating tab portions, said dispenser having unobstructed space adjacent the retaining surfaces between the first plane and the second plane, said locating tab portions having opposed cam surfaces extending from the side wall portions to the adjacent inner ends of the locating tab portions on the sides of said locating tab portions opposite said retaining surfaces, said parts of the cam surfaces along the lengths of the cam surfaces being disposed at predetermined cam angles with respect to the surfaces adjacent the cutter support portion of imaginary planes passing through said axis of the hub portion and said parts of the cam surfaces, which cam angles are measured in planes normal to the surfaces of the imaginary planes; said predetermined distance, said first angle and said predetermined cam angles being adapted to cause tape being pulled from the roll of tape on the hub portions on the side of said locating tab portions opposite said retaining surfaces to be consistently guided between and around said tab portions without further relative manipulation of said dispenser and said tape being withdrawn when relative

60557-5194

movement is caused between said dispenser and said tape being withdrawn to bring said cutting edge into engagement to transversely cut the tape, and said retaining surfaces affording releasable adhesion thereto by a newly cut end
5 portion of the tape to retain that end portion of the tape in a position projecting from the roll at which it may easily be manually engaged to afford withdrawing another length of tape from the roll.

Brief Description of Drawing

10 The present invention will be further described with reference to the accompanying drawing wherein like

reference numerals refer to like parts in the several views, and wherein:

Figure 1 is a perspective view of a first embodiment of a tape dispenser according to the present invention;

Figure 2 is a front view of the tape dispenser shown in Figure 1;

Figure 3 is a cross sectional view of the dispenser of Figure 1 taken approximately along line 3-3 of Figure 2;

Figures 4 and 5 are cross sectional views similar to that of Figure 3 illustrating a roll of tape in the dispenser and various positions of end portions of tape on that roll;

Figure 6 is a top view of the tape dispenser shown in Figure 1 in combination with a card by which the dispenser can be hung on a peg;

Figure 7 is a cross sectional view of the dispenser and a fragment of the card of Figure 6 taken approximately along line 7-7 of Figure 6;

Figure 8 is a side view of a second embodiment of a tape dispenser according to the present invention; and

Figure 9 is a longitudinal cross sectional view of the tape dispenser of Figure 8 which is a mirror image of a longitudinal cross sectional view taken in the opposite direction through the dispenser.

Description of the Preferred Embodiment

Referring now to Figures 1 through 8 of the drawing, there is shown a first embodiment of a tape dispenser 10 according to the present invention for a roll of tape 11 including a supply length of tape 12 wound on a core 13 (e.g., the 2 inch wide tape including a coating of aggressive pressure sensitive adhesive that may have a clear or tan colored

polypropylene backing or a polymeric backing that includes longitudinally extending fiberglass filaments that is sold as packaging or mailing tape by Minnesota Mining and Manufacturing Company, St. Paul, Minnesota).

5 The dispenser 10 comprises a frame 14 integrally molded of a polymeric material (e.g., polystyrene), and a thin metal plate or blade 18 attached to the frame 14. The metal plate or blade 18 provides means for defining a generally straight tape cutting edge 16 comprising a

10 row of generally triangular teeth that are adapted to transversely cut the tape without being excessively sharp so that they do not cause an undue risk of cutting a person using the dispenser 10.

The frame 14 of the dispenser 10 comprises a

15 projecting cutter support portion 20 having a generally planar outer surface, and having spaced, parallel triangular ribs 22 along its inner surface on which the blade 18 is mounted with its cutting edge 16 at an outer end of the support portion 20. Opposite,

20 generally parallel side wall portions 26 of the frame 13 are attached along opposite edges 24 of the support portion and are disposed at about right angles with respect to the cutting edge 16 and with respect to the support portion 20. The side wall portions 26 of the

25 frame support opposed semi-cylindrical hub portions 28 of the frame 14 that project toward each other from the inner surfaces of the side wall portions 26 around parts of the peripheries of circular openings through the side wall portions 26. The hub portions 28 are

30 arcuate about an axis 29 parallel to the tape cutting edge 16, provide peripheral surfaces adapted to rotatably support the cylindrical inner surface of the core 13 for rotation about the axis 29, and are adapted to project into the opposite ends of an opening in the

35 core 13 on the side of the core opposite the blade to

rotatably support the roll of tape 11. The side wall portions 26 are resiliently flexible between the hub portions 28 and the support portion 20 so that they can be resiliently bent apart to afford positioning the
5 roll of tape 11 between the hub portions 28 and removing the empty core 13 from therebetween.

The frame 14 also includes opposed locating tab portions 30 projecting toward each other from the adjacent surfaces of the side wall portions 26 at a
10 distance from the axis 29 of the hub portions 28 (e.g., 1.38 inches) that is significantly less than or about half plus or minus 10 percent the distance between the cutting edge 16 and the axis 29 of the hub portions 28 (e.g., 2.76 inches). The locating tab portions 30 have
15 retaining surfaces 32 adjacent the cutter support portion 20 that are arcuate or cylindrically convex about an axis parallel to the axis 29 of the hub portions 28, and are spaced from the support portion 20 so that a first imaginary plane 35 (Figure 3) through
20 the axis 29 of the hub portions 28 and the cutting edge 16 is disposed at an angle 36 of at least 12 degrees and preferably in the range of 20 to 70 degrees (e.g., about 38 degrees as illustrated) from a second imaginary plane 37 through the axis 29 of the hub
25 portions 28 that is tangent to the retaining surfaces 32 of the locating tab portions 30. The space between the first and second imaginary planes is unobstructed by any portion of the dispenser 10.

The locating tab portions 30 also have cam
30 surfaces 33 extending from adjacent the side wall portions 26 to the adjacent or inner ends of the locating tab portions 30 on the sides of the locating tab portions 30 opposite the retaining surfaces 32, which cam surfaces 33 cause tape 12 being pulled from
35 the roll of tape 11 on the side of the tab portions 30 opposite the retaining surfaces 32 to be guided between

and around the locating tab portions 30 when relative movement is caused between the dispenser and the tape 12 being withdrawn to transversely cut the tape 12 with the cutting edge 16. The parts of the cam surfaces 33
5 along the lengths of the cam surfaces 33 are disposed at angles of greater than about 45 degrees, and preferably greater than about 50 degrees, with respect to the surfaces adjacent the cutter support portion 20 of imaginary planes passing through the axis 29 of the
10 hub portions 28 and those parts; the measurements of those angles being taken in planes normal to the surfaces of the imaginary planes. The cam surfaces 33 can be straight or arcuate, include straight and arcuate parts, or include different parts that are
15 arcuate about different axes or are straight and disposed at different angles with respect to the imaginary planes. Also, the opposite ends of the cam surfaces 33 can be disposed at the same or different distances from the axis 29 of the hub portions 28.

20 The locating tab portions 30 project a small distance into the path of the tape (e.g., 0.33 inch into the path on each side of the path for 2 inch wide tape that the dispenser 10 is adapted to dispense) thereby requiring only a small percentage of the width
25 of the tape 12 (e.g., about 27 percent) to be moved around the locating tab portions 30 by the cam surfaces 33. Thus the space between the adjacent spaced ends of the locating tab portions 30 is at least 60 percent (e.g., 73 percent) of the width of the 2 inch tape the
30 dispenser is intended to dispense.

An arched portion 34 of the frame 13 is joined to and projects from the edge of the support portion 20 opposite the cutting edge 16, and extends partially around the roll of tape 11. The arched portion 34 is
35 resiliently flexible and has a generally cylindrically concave surface adjacent the periphery of the roll of

tape 11 in the dispenser 10. The arched portion 34 is adapted to be received in the palm of a user's hand to normally space the user's hand from the rotating roll of tape 11 as tape 12 is being dispensed from the tape dispenser 10, and can be pressed into engagement with the periphery of the roll of tape 11 to stop tape from being withdrawn from the dispenser when the user wishes to sever the tape with the cutting edge 16. The arched portion 34 also insures that a user of the tape dispenser does not attempt to cut the tape 12 using the wrong side of the tape cutting edge 16.

The frame 14 of the dispenser 10 further includes an opposed pair of spaced and aligned plate-like attachment portions 40 (see Figures 1 and 7) each attached along adjacent edges to one of the side wall portions 26 and the cutter support portion 20. The attachment portions 40 are generally parallel to and spaced from the cutting edge 16 on the blade 18, and include opposed generally triangular projecting parts 42 at their adjacent ends that have inner edges 44 generally parallel to and spaced from the cutter support portion 20, and opposite outer edges 46 that are disposed at an acute angle (e.g., 25 degrees) with respect to their inner edges 44. The attachment portions 40 are adapted to be received in slots 48 formed in a flexible paper card 50 (see Figures 6 and 7) that can bear advertizing and other information about the dispenser 10 with end portions of the projecting parts 42 positioned over parts of the card 50 between the slots 48 and opposite edges 51 of the card 50 at the outer ends of the slots 48 abutting the inner surfaces of the side wall portions 26. Those parts of the card 50 between the slots 48 can be positioned beneath the ends of the projecting parts 42 by positioning the card 50 between the side wall portions 26 on the inclined outer edges 46 of the

projecting parts 42 with the outer ends of the attachment portions 40 in the slots 48 and resiliently bending the card 50 between and transverse to the attachment portions 40 by pressing its center portion toward the cutter support portion 20 until the portion of the card 50 between the slots 48 passes between the adjacent ends of the projecting parts 42, whereupon the card 50 will straighten, leaving those parts of the card 50 beneath the ends of the projecting parts 42.

10 The card 50 can have an opening 52 by which the card 50 and thereby the dispenser 10 can be hung on a pin, such as a pin at a product display area of a store. Aligned triangular openings 54 and 56 in the cutter support portion 20 and in the card 50 respectively can also

15 receive a pin on which the card 50 and/or the dispenser 10 can be hung. A plurality of dispenser 10 and card 50 combinations can be hung on the same pin with one of each pair of successive combinations receiving the pin in the opening 52 and the other receiving the pin in

20 the triangular openings 54 and 56 to cause the successive combinations to nest more closely together on the pin.

To use the dispenser 10, a user typically pulls an end of the length of tape 12 away from the tape on the roll 11, applies the end of the tape to the item to be taped, and pulls the dispenser 10 away from the item to dispense the desired length of tape 12. If the end of the length of tape 12 was initially adhered to the retaining surfaces 32, the tape will be peeled away

25 from those retaining surfaces 32 and will be pulled from the roll in the space between the retaining surfaces 32 and the cutting edge 16 of the blade 18. If the end of the length of tape 12 is initially adhered to the roll 11 (as will be the case when the

35 roll of tape 11 is new), the user pulls that end from the surface of the roll 11 which may most easily be

done between the side wall portions 26 on the side of the locating tab portions 30 opposite the cutting edge 16 and the distal end of the arcuate portion 24. The user may continue to pull tape from the roll 11 in that area (see tape portion 12a in Figure 4), however, when a sufficient length of the tape has been withdrawn, the user will orient the dispenser 10 to press the cutting edge 16 of the blade 18 against the tape 12 so that the edge 18 transversely severs the tape 12. Tension in the tape 12 during such orientation of the dispenser 10 will cause the cam surfaces 33 to guide the opposite edges of the tape 12 between and around the locating tab portions 30 (see dotted tape portion 12b in Figure 4) and will position the tape 12 in the space between the retaining surfaces 32 and the cutting edge 16 (see dotted tape portion 12c in Figure 4) before the cutting edge 16 can sever the tape 12. After the tape 12 is severed, the newly formed end portion of the tape 12 will contact and releasably adhere to the retaining surfaces 32 (see Figure 5), which is facilitated because of the convex curvature of the retaining surfaces 32 and complimentary concave curvature of the newly formed end portion of the tape 12 that is caused by stresses formed in the backing of the tape 12 when it was wound on the roll 11. The adhesion of the newly formed end portion of the tape 12 to the retaining surfaces 32 will thus normally be retained until the end portion of the tape 12 is peeled away by a user when another length of the tape 12 is desired.

Referring now to Figures 8 and 9 of the drawing, there is shown a second embodiment of a tape dispenser 60 according to the present invention for a roll of tape including a supply length of tape wound on a core. The dispenser 60 comprises a frame 64 integrally molded of a polymeric material, and a thin metal plate or blade 68 attached to the frame 64 that is essentially

the same as the blade 18 described above and provides means for defining a generally straight tape cutting edge 66. The frame 64 of the dispenser 60 comprises a projecting cutter support portion 70 including

5 triangular ribs 72 on which the blade 68 is mounted, an arched portion 84, and an opposed pair of spaced and aligned plate-like attachment portions 90 by which the dispenser 60 can be hung using the card 50 described above, which portions 70, 84 and 90 are essentially the

10 same as the corresponding portions 20, 34 and 40 of the dispenser 10 described above. The frame 63 also includes opposite side wall portions 76 attached along opposite edges 74 of the support portion 70 disposed at about right angles with respect to the cutting edge 66

15 and with respect to the support portion 70, which side wall portions 76 and two opposed hub portions 78 of the frame 13 that project toward each other from their inner surfaces differ in shape from but provide the same function as, the corresponding portions 26 and 28

20 of the dispenser 10. The hub portions 78 have peripheral surfaces adapted to rotatably support the cylindrical inner surface of the core of a roll of tape for rotation about an axis 79 parallel to the tape cutting edge 66, and are adapted to project into the

25 opposite ends of an opening in that core to rotatably support the roll of tape. The parts of the side wall portions 76 supporting the hub portions 78 are generally C-shaped, and the side wall portions 76 are resiliently flexible between the hub portions 78 and

30 the support portion 70 so that they can be resiliently bent apart to afford positioning the roll of tape 11 between the hub portions 78 and removing the empty core 13 from therebetween. Alternatively, adjacent ends of the hub portions 78 could be joined by sonic welding or

35 a suitable adhesive after the roll of tape 11 is positioned about them which adds stability to the frame

64 but makes the dispenser 60 disposable, or adjacent ends of the hub portions 78 could be releasably attached to each other by means such as those described in U.S. Patent No. 4,627,560, the content whereof is
5 incorporated herein by reference.

The frame 64 also includes opposed locating tab portions 80 that have essentially the same shape as the locating tab portions 30 on the dispenser 10 and project toward each other from the adjacent surfaces of
10 the side wall portions 76 at a distance from the axis 79 of the hub portions 78 (e.g., about 1.38 inches) that is significantly less than or about one half (plus or minus 10 percent) of the distance between the cutting edge 66 and the axis 79 of the hub portions 78
15 (e.g., 2.76 inches). The locating tab portions 80 have retaining surfaces 82 adjacent the cutter support portion 70 that are arcuate or cylindrically convex about an axis parallel to the axis 79 of the hub portions 78, and are spaced from the support portion 70
20 so that a first imaginary plane through the axis 79 of the hub portions 78 and the cutting edge 66 is disposed at an angle of at least 20 degrees and in the range of 20 to 70 degrees (about 20 degrees as illustrated) from a second imaginary plane through the axis 79 of the hub
25 portions 78 that is tangent to the retaining surfaces 82 of the locating tab portions 80. The locating tab portions 80 also have cam surfaces 83 extending from the side wall portions 76 to the adjacent or inner ends of the locating tab portions 80, which cam surfaces 83
30 cause tape 12 being pulled from the roll of tape 11 on the side of the tab portions 80 opposite the retaining surfaces 82 to be guided between and around the tab portions 80 when relative movement is caused between the dispenser and the tape 12 being withdrawn to
35 transversely cut the tape 12 with the cutting edge 66. The parts of the cam surfaces 83 along the lengths of

the cam surfaces 83 are disposed at angles of greater than about 45 degrees, and preferably greater than about 50 degrees, with respect to the surfaces adjacent the cutter support portion 70 of imaginary planes
5 passing through the axis 79 of the hub portions 78 and those parts of the cam surfaces 83; the measurements of those angles being taken in planes normal to the surfaces of the imaginary planes.

The present invention has now been described with
10 reference to two embodiments thereof. It will be apparent to those skilled in the art that many changes can be made in the embodiments described without departing from the scope of the present invention. Thus the scope of the present invention should not be
15 limited to the structure described in this application, but only by structures described by the language of the claims and the equivalents of those structures.

60557-5194

CLAIMS:

1. A tape dispenser for a roll of tape including
a supply length of the tape wound around a core, which
5 core has opposite ends and a through opening defined by
a cylindrical inner surface between the ends, said
dispenser comprising means for defining a cutting edge
adapted to transversely cut the tape, and a frame
integrally molded of a polymeric material, said frame
10 comprising:

a cutter support portion having said means
for defining a cutting edge along one end and
having spaced side edges disposed at about right
angles with respect to said cutting edge;

15 opposite side wall portions attached along
said opposite side edges of the cutter support
portion and having opposed adjacent inner
surfaces;

20 opposed hub portions projecting toward each
other from the side wall portions, said hub
portions having peripheral surfaces adapted to
support the cylindrical inner surface of the core
for rotation about an axis generally parallel to
said tape cutting edge, and being adapted to
25 project into the opening in the core from opposite
ends of the core to support the roll of tape for
rotation about the hub portions; and

30 opposed spaced locating tab portions
projecting toward each other from the side wall
portions at a distance from said axis that is
significantly less than the distance between said
cutting edge and said axis, said locating tab
portions having retaining surfaces adjacent a
guide portion that are convex and arcuate about an
35 axis parallel to the axis of said hub portions and
are spaced from the support portion so that a

60557-5194

first plane passing through the axis of the hub portions and the cutting edge is disposed at an angle of at least 12 degrees with respect to a second plane that passes through the axis of the hub portions and is tangent to the retaining surfaces of the locating tab portions, said dispenser having unobstructed space adjacent the retaining surfaces between the first plane and the second plane, said locating tab portions having opposed cam surfaces extending from the side wall portions to the adjacent inner ends of the locating tab portions on the sides of said locating tab portions opposite said retaining surfaces, parts of the cam surfaces along the lengths of the cam surfaces being disposed at cam angles of greater than about 45 degrees with respect to the surfaces adjacent the cutter support portion of imaginary planes passing through said axis of the hub portion and said parts of the cam surfaces when the measurements of said cam angles are taken in planes normal to the surfaces of the imaginary planes;

said cam surfaces and the space between said retaining surfaces and said support member causing tape being pulled from the roll of tape on the hub portions on the side of said locating tab portions opposite said retaining surfaces to be consistently guided between and around said tab portions when relative movement is caused between said dispenser and said tape being withdrawn to bring said cutting edge into engagement to transversely cut the tape, and said retaining surfaces affording releasable adhesion thereto by a newly cut end portion of the tape to retain that end portion of the tape in a position projecting from the roll at which it may easily be manually engaged to afford withdrawing another length of tape from the roll.

2. A tape dispenser according to claim 1 wherein the space between the adjacent spaced ends of the locating tab portions is at least 60 percent of the width of the tape the dispenser is intended to
5 dispense.

3. A tape dispenser according to claim 1 wherein said side wall portions are resiliently flexible between the hub portions and the support portion so
10 that the side wall portions can be resiliently bent apart to afford positioning the tape roll between the hub portions and removing the empty core from therebetween.

15 4. A tape dispenser according to claim 1 wherein said frame further comprises a resiliently flexible arched portion attached to the edge of the support portion opposite said cutting edge and adapted to extend partially around the roll of tape, said arched
20 portion having a generally cylindrically concave surface adjacent said hub portion.

5. A tape dispenser according to claim 1 wherein said first plane passing through the axis of the hub
25 portions and the cutting edge is disposed at an angle in the range of about 20 to 70 degrees with respect to said second plane that passes through the axis of the hub portions and is tangent to the retaining surfaces of the locating tab portions; and said cam surfaces are
30 disposed at an angle of less than about 30 degrees with respect to the inner surfaces of the side wall portions.

6. A tape dispenser according to claim 1 wherein
35 said first plane passing through the axis of the hub portions and the cutting edge is disposed at an angle

of about 38 degrees with respect to said second plane that passes through the axis of the hub portions and is tangent to the retaining surfaces of the locating tab portions; and said parts of the cam surfaces along the
5 lengths of the cam surfaces are disposed at cam angles of greater than about 70 degrees with respect to the surfaces adjacent the cutter support portion of said imaginary planes passing through said axis of the hub portion and said parts of the cam surfaces when the
10 measurements of said cam angles are taken in planes normal to the surfaces of the imaginary planes.

7. A tape dispenser according to claim 1 wherein
15 said hub portions are semi-cylindrical and are disposed on the side of the axis of the hub portions opposite said cutting edge.

8. A tape dispenser for a roll of tape including
20 a supply length of the tape wound around a core, which core has opposite ends and a through opening defined by a cylindrical inner surface between the ends, said dispenser comprising means for defining a cutting edge adapted to transversely cut the tape, and a frame of a
25 polymeric material, said frame comprising:

a cutter support portion having said means for defining a cutting edge along one end and having spaced side edges disposed at about right angles with respect to said cutting edge;

30 opposite side wall portions attached along said opposite side edges of the cutter support portion and having opposed adjacent inner surfaces;

at least one hub portion projecting from one
35 of said side wall portions, said hub portion having a peripheral surface adapted to support the

60557-5194

5 cylindrical inner surface of the core for rotation about an axis generally parallel to said tape cutting edge, and being adapted to project into the opening in the core from one end of the core to support the roll of tape for rotation about the hub portion; and

10 opposed spaced locating tab portions projecting toward each other from the side wall portions at a distance from said axis that is significantly less than the distance between said cutting edge and said axis, said locating tab portions having retaining surfaces adjacent the cutter support portion that are spaced from the support portion so that a first plane passing
15 through the axis of the hub portions and the cutting edge is disposed at an angle of at least 12 degrees with respect to a second plane that passes through the axis of the hub portions and is tangent to the retaining surfaces of the locating
20 tab portions, said locating tab portions having opposed cam surfaces extending from the side wall portions to the adjacent inner ends of the locating tab portions on the sides of said locating tab portions opposite said retaining
25 surfaces, said dispenser having unobstructed space adjacent the retaining surfaces between the first plane and the second plane, parts of the cam surfaces along the lengths of the cam surfaces being disposed at cam angles of greater than about 45 degrees with respect to the surfaces adjacent
30 the cutter support portion of imaginary planes passing through said axis of the hub portion and said parts of the cam surfaces when the measurements of said cam angles are taken in planes normal to the surfaces of the imaginary
35 planes;

said cam surfaces causing tape being pulled from the roll of tape on the hub portions on the side of said locating tab portions opposite said retaining surfaces to be guided between and around said tab portions when relative movement is caused between said dispenser and said tape being withdrawn to bring said cutting edge into engagement to transversely cut the tape, and said retaining surfaces affording releasable adhesion thereto by a newly cut end portion of the tape to retain that end portion of the tape in a position projecting from the roll at which it may easily be manually engaged to afford withdrawing another length of tape from the roll.

9. A tape dispenser according to claim 8 wherein the space between the adjacent spaced ends of the locating tab portions is at least 60 percent of the width of the tape the dispenser is intended to dispense.

20

10. A tape dispenser according to claim 8 wherein said retaining surfaces are convex and arcuate about an axis parallel to the axis of said hub portion.

11. A tape dispenser according to claim 8 wherein said first plane passing through the axis of the hub portions and the cutting edge is disposed at an angle in the range of about 20 to 70 degrees with respect to said second plane that passes through the axis of the hub portions and is tangent to the retaining surfaces of the locating tab portions; and said parts of the cam surfaces along the lengths of the cam surfaces are disposed at cam angles of greater than about 60 degrees with respect to the surfaces adjacent the cutter support portion of said imaginary planes passing through said axis of the hub portion and said parts of

the cam surfaces when the measurements of said cam angles are taken in planes normal to the surfaces of the imaginary planes.

5 12. A tape dispenser according to claim 8 wherein
said first plane passing through the axis of the hub
portions and the cutting edge is disposed at an angle
of about 38 degrees with respect to said second plane
that passes through the axis of the hub portions and is
10 tangent to the retaining surfaces of the locating tab
portions; and said parts of the cam surfaces along the
lengths of the cam surfaces are disposed at cam angles
of greater than about 70 degrees with respect to the
surfaces adjacent the cutter support portion of said
15 imaginary planes passing through said axis of the hub
portion and said parts of the cam surfaces when the
measurements of said cam angles are taken in planes
normal to the surfaces of the imaginary planes.

20 13. A tape dispenser for a roll of tape including
a supply length of the tape wound around a core, which
core has opposite ends and a through opening defined by
a cylindrical inner surface between the ends, said
dispenser comprising means for defining a cutting edge
25 adapted to transversely cut the tape, and a frame of a
polymeric material, said frame comprising:

 a cutter support portion having said means
for defining a cutting edge along one end and
having spaced side edges disposed at about right
30 angles with respect to said cutting edge;

 opposite side wall portions attached along
said opposite side edges of the cutter support
portion and having opposed adjacent inner
surfaces;

35 at least one hub portion projecting from one
of said side wall portions, said hub portion

60557-5194

having a peripheral surface adapted to support the cylindrical inner surface of the core for rotation about an axis generally parallel to said tape cutting edge, and being adapted to project into
5 the opening in the core from one end of the core to support the roll of tape for rotation about the hub portion; and

opposed spaced locating tab portions projecting toward each other from the side wall portions at a distance from said axis that is less than the distance between said cutting edge and said axis, said locating tab portions being spaced apart a predetermined distance and having retaining surfaces adjacent the cutter support
15 portion that are spaced from the support portion so that a first plane passing through the axis of the hub portions and the cutting edge is disposed at a first predetermined angle with respect to a second plane that passes through the axis of the
20 hub portions and is tangent to the retaining surfaces of the locating tab portions, said dispenser having unobstructed space adjacent the retaining surfaces between the first plane and the second plane, said locating tab portions having opposed cam surfaces extending from the
25 side wall portions to the adjacent inner ends of the locating tab portions on the sides of said locating tab portions opposite said retaining surfaces, said parts of the cam surfaces along the lengths of the cam surfaces being disposed at
30 predetermined cam angles with respect to the surfaces adjacent the cutter support portion of imaginary planes passing through said axis of the hub portion and said parts of the cam surfaces, which cam angles are measured in planes normal to
35 the surfaces of the imaginary planes;

said predetermined distance, said first angle and said predetermined cam angles being adapted to cause tape being pulled from the roll of tape on the hub portions on the side of said locating tab portions
5 opposite said retaining surfaces to be consistently guided between and around said tab portions without further relative manipulation of said dispenser and said tape being withdrawn when relative movement is caused between said dispenser and said tape being
10 withdrawn to bring said cutting edge into engagement to transversely cut the tape, and said retaining surfaces affording releasable adhesion thereto by a newly cut end portion of the tape to retain that end portion of the tape in a position projecting from the roll at
15 which it may easily be manually engaged to afford withdrawing another length of tape from the roll.

14. A tape dispenser according to claim 13 wherein said predetermined distance between the
20 adjacent spaced ends of the locating tab portions is at least 60 percent of the width of the tape the dispenser is intended to dispense.

15. A tape dispenser according to claim 13
25 wherein said retaining surfaces are convex and arcuate about an axis parallel to the axis of said hub portion.

16. A tape dispenser according to claim 13
30 wherein said first angle is in the range of about 20 to 70 degrees.

17. A tape dispenser according to claim 13 wherein said predetermined cam angles are greater than
35 45 degrees.

18. A tape dispenser according to claim 13 wherein said first angle is about 38 degrees, said predetermined cam angles are greater than 70 degrees, and said predetermined distance between the adjacent
5 spaced ends of the locating tab portions is about 60 percent of the width of the tape the dispenser is intended to dispense.

19. A tape dispenser according to claim 13
10 wherein said frame further includes an opposed pair of spaced and aligned plate-like attachment portions between said side wall portions and along said cutter support portion, said attachment portions being generally parallel to and spaced from said cutting edge
15 and including opposed generally triangular projecting parts at their adjacent ends, said projecting parts having inner edges generally parallel to and spaced from said cutter support portion, and opposite outer edges disposed at an acute angle with respect to said
20 inner edges, said attachment portions being adapted to be received in aligned spaced slots formed in a flexible paper card that can bear advertizing and other information about said dispenser and can have an opening by which the card and thereby the dispenser can
25 be hung on a pin with end portions of the projecting parts positioned over parts of the card between the slots and opposite edges of the card at the outer ends of the slots abutting the inner surfaces of said side wall portions, the parts of the card between the slots
30 being positionable beneath the ends of the projecting parts by positioning the card between the side wall portions on the inclined outer edges of the projecting parts with the outer ends of the attachment portions in the slots and resiliently bending the card between and
35 transverse to the attachment portions by pressing its center portion toward the cutter support portion until

the portion of the card between the slots passes between the adjacent ends of the projecting parts, whereupon the card will straighten, leaving said parts of the card beneath the ends of the projecting parts.

5



20. A tape dispenser according to claim 13 wherein said frame further includes an opposed pair of spaced and aligned plate-like attachment portions between said side wall portions and along said cutter support portion, said attachment portions being generally parallel to and spaced from said cutting edge and including opposed generally triangular projecting parts at their adjacent ends, said projecting parts having inner edges generally parallel to and spaced from said cutter support portion, and opposite outer edges disposed at an acute angle with respect to said inner edges; and wherein said tape dispenser further includes a planar paper card having opposite parallel edges extending between opposite inner and outer ends of said card, and aligned spaced slots extending into said card from said edges adjacent said inner end, said attachment portions being received in said spaced slots with end portions of the projecting parts positioned over parts of the card between the slots and said opposite edges of the card at the outer ends of the slots abutting the inner surfaces of said side wall portions, the parts of the card between the slots having been positioned beneath the ends of the projecting parts by positioning the card between the side wall portions on the inclined outer edges of the projecting parts with the outer ends of the attachment portions in the slots and resiliently bending the card between and transverse to the attachment portions by pressing its center portion toward the cutter support portion until the portion of the card between the slots passed between the adjacent ends of the projecting

60557-5194

parts, whereupon the card straightened, leaving said parts of the card beneath the ends of the projecting parts, said card bearing advertizing and other information about said dispenser, having a major
5 portion of said card adjacent said outer end projecting past said cutting edge, and having a first opening adjacent the outer end of said card by which the card and thereby the dispenser can be hung on a pin.

10 21. A tape dispenser according to claim 20 wherein said card and said cutter support portion have aligned openings that can receive a pin on which the card and dispenser can be hung, said frame being shaped and said first opening in said card and said aligned
15 openings being positioned so that a plurality of dispensers can be hung on the same pin with one of each pair of successive dispensers receiving the pin in the first opening and the other receiving the pin in the aligned openings to cause the successive dispensers to
20 nest more closely together on the pin.

2171442

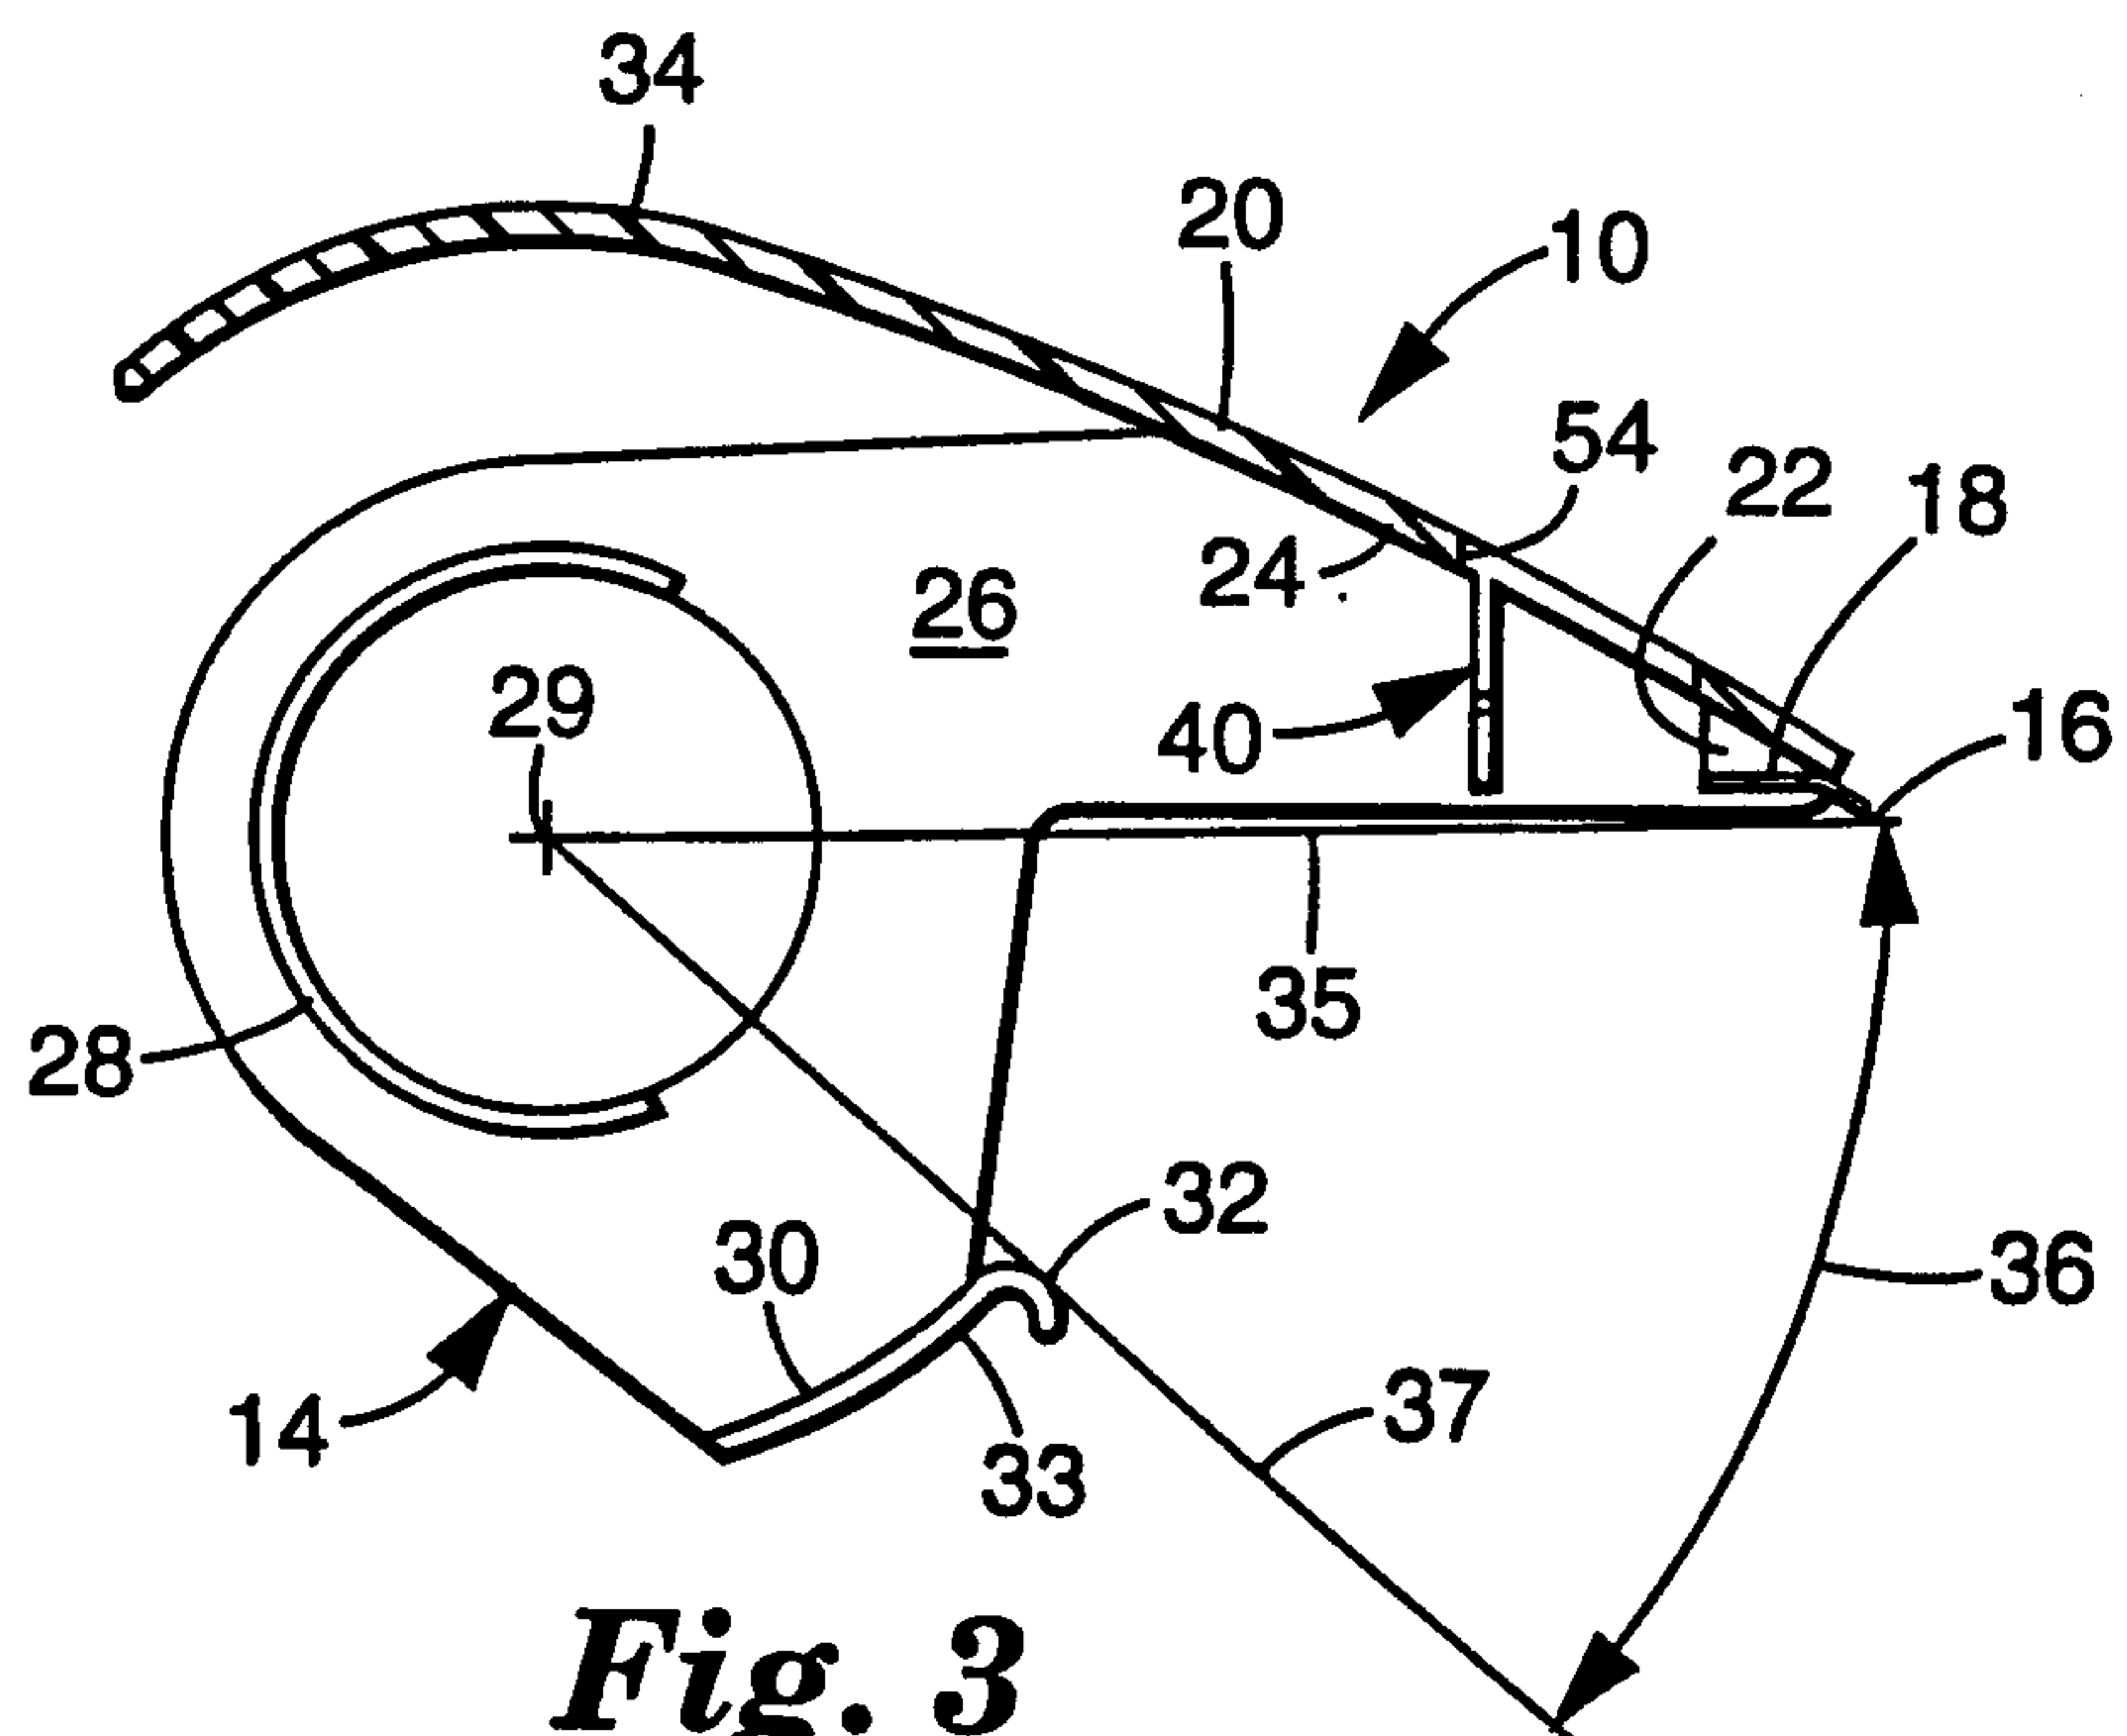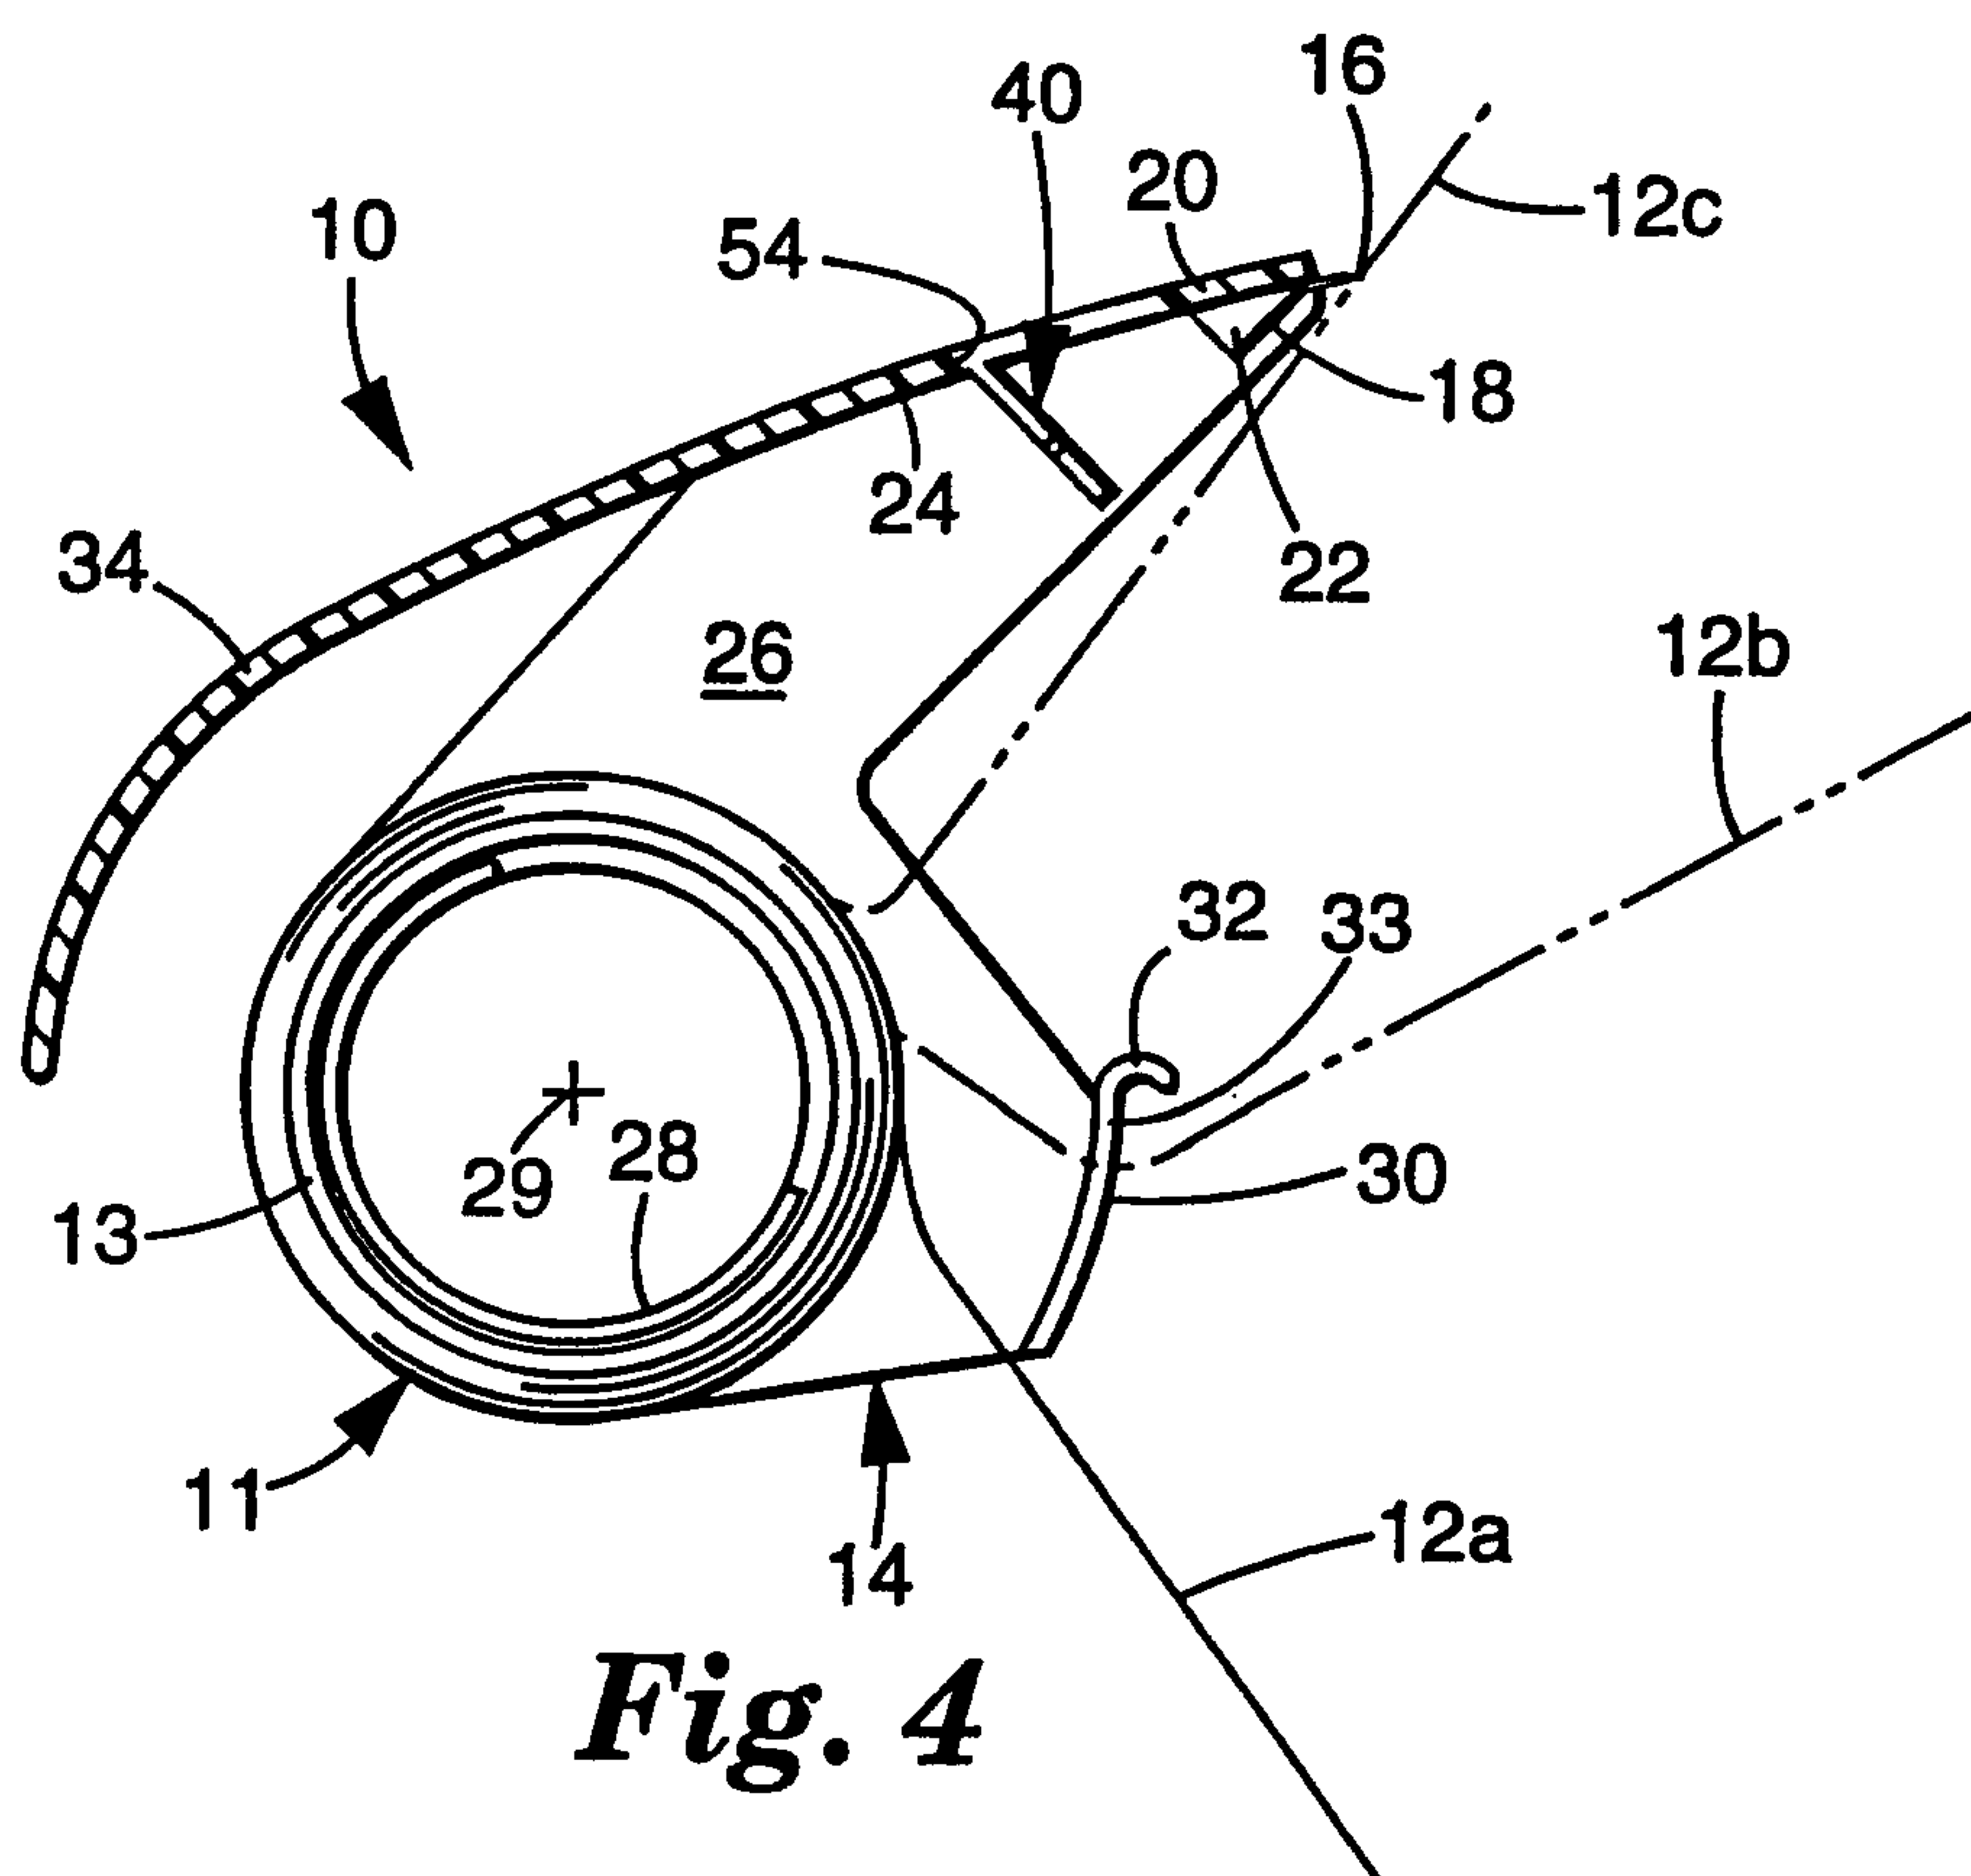**Fig. 3****Fig. 4**

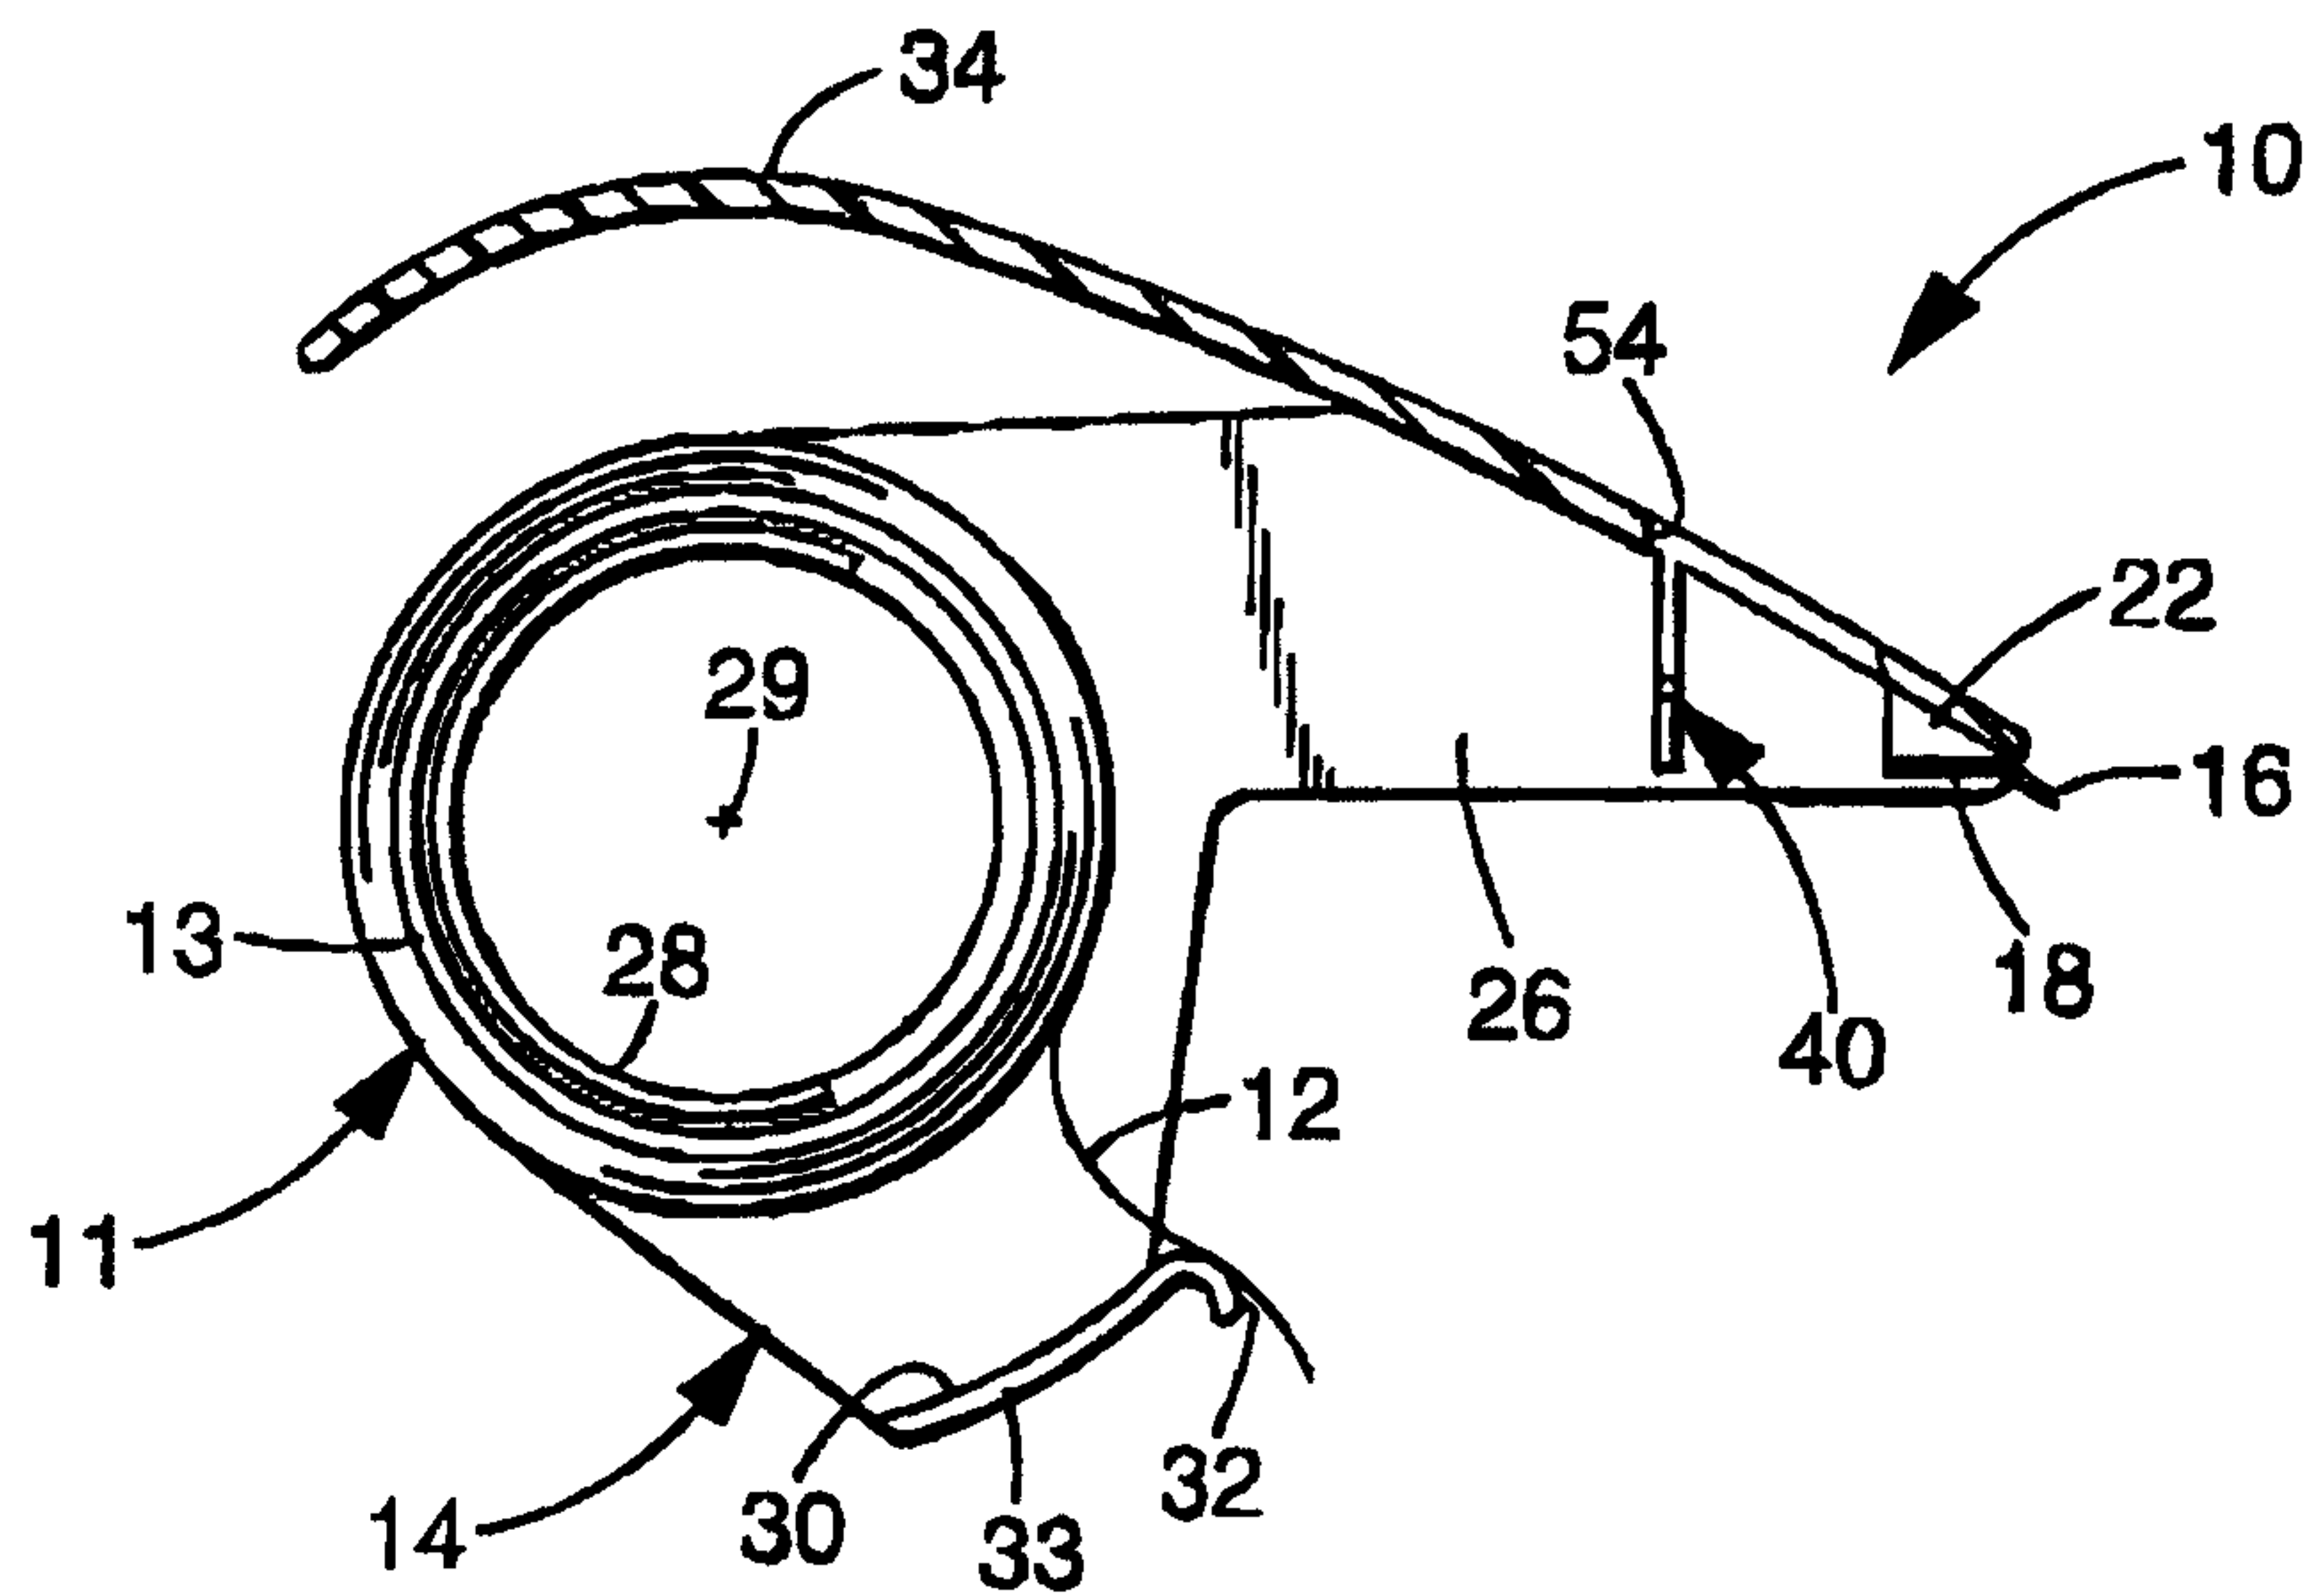


Fig. 5

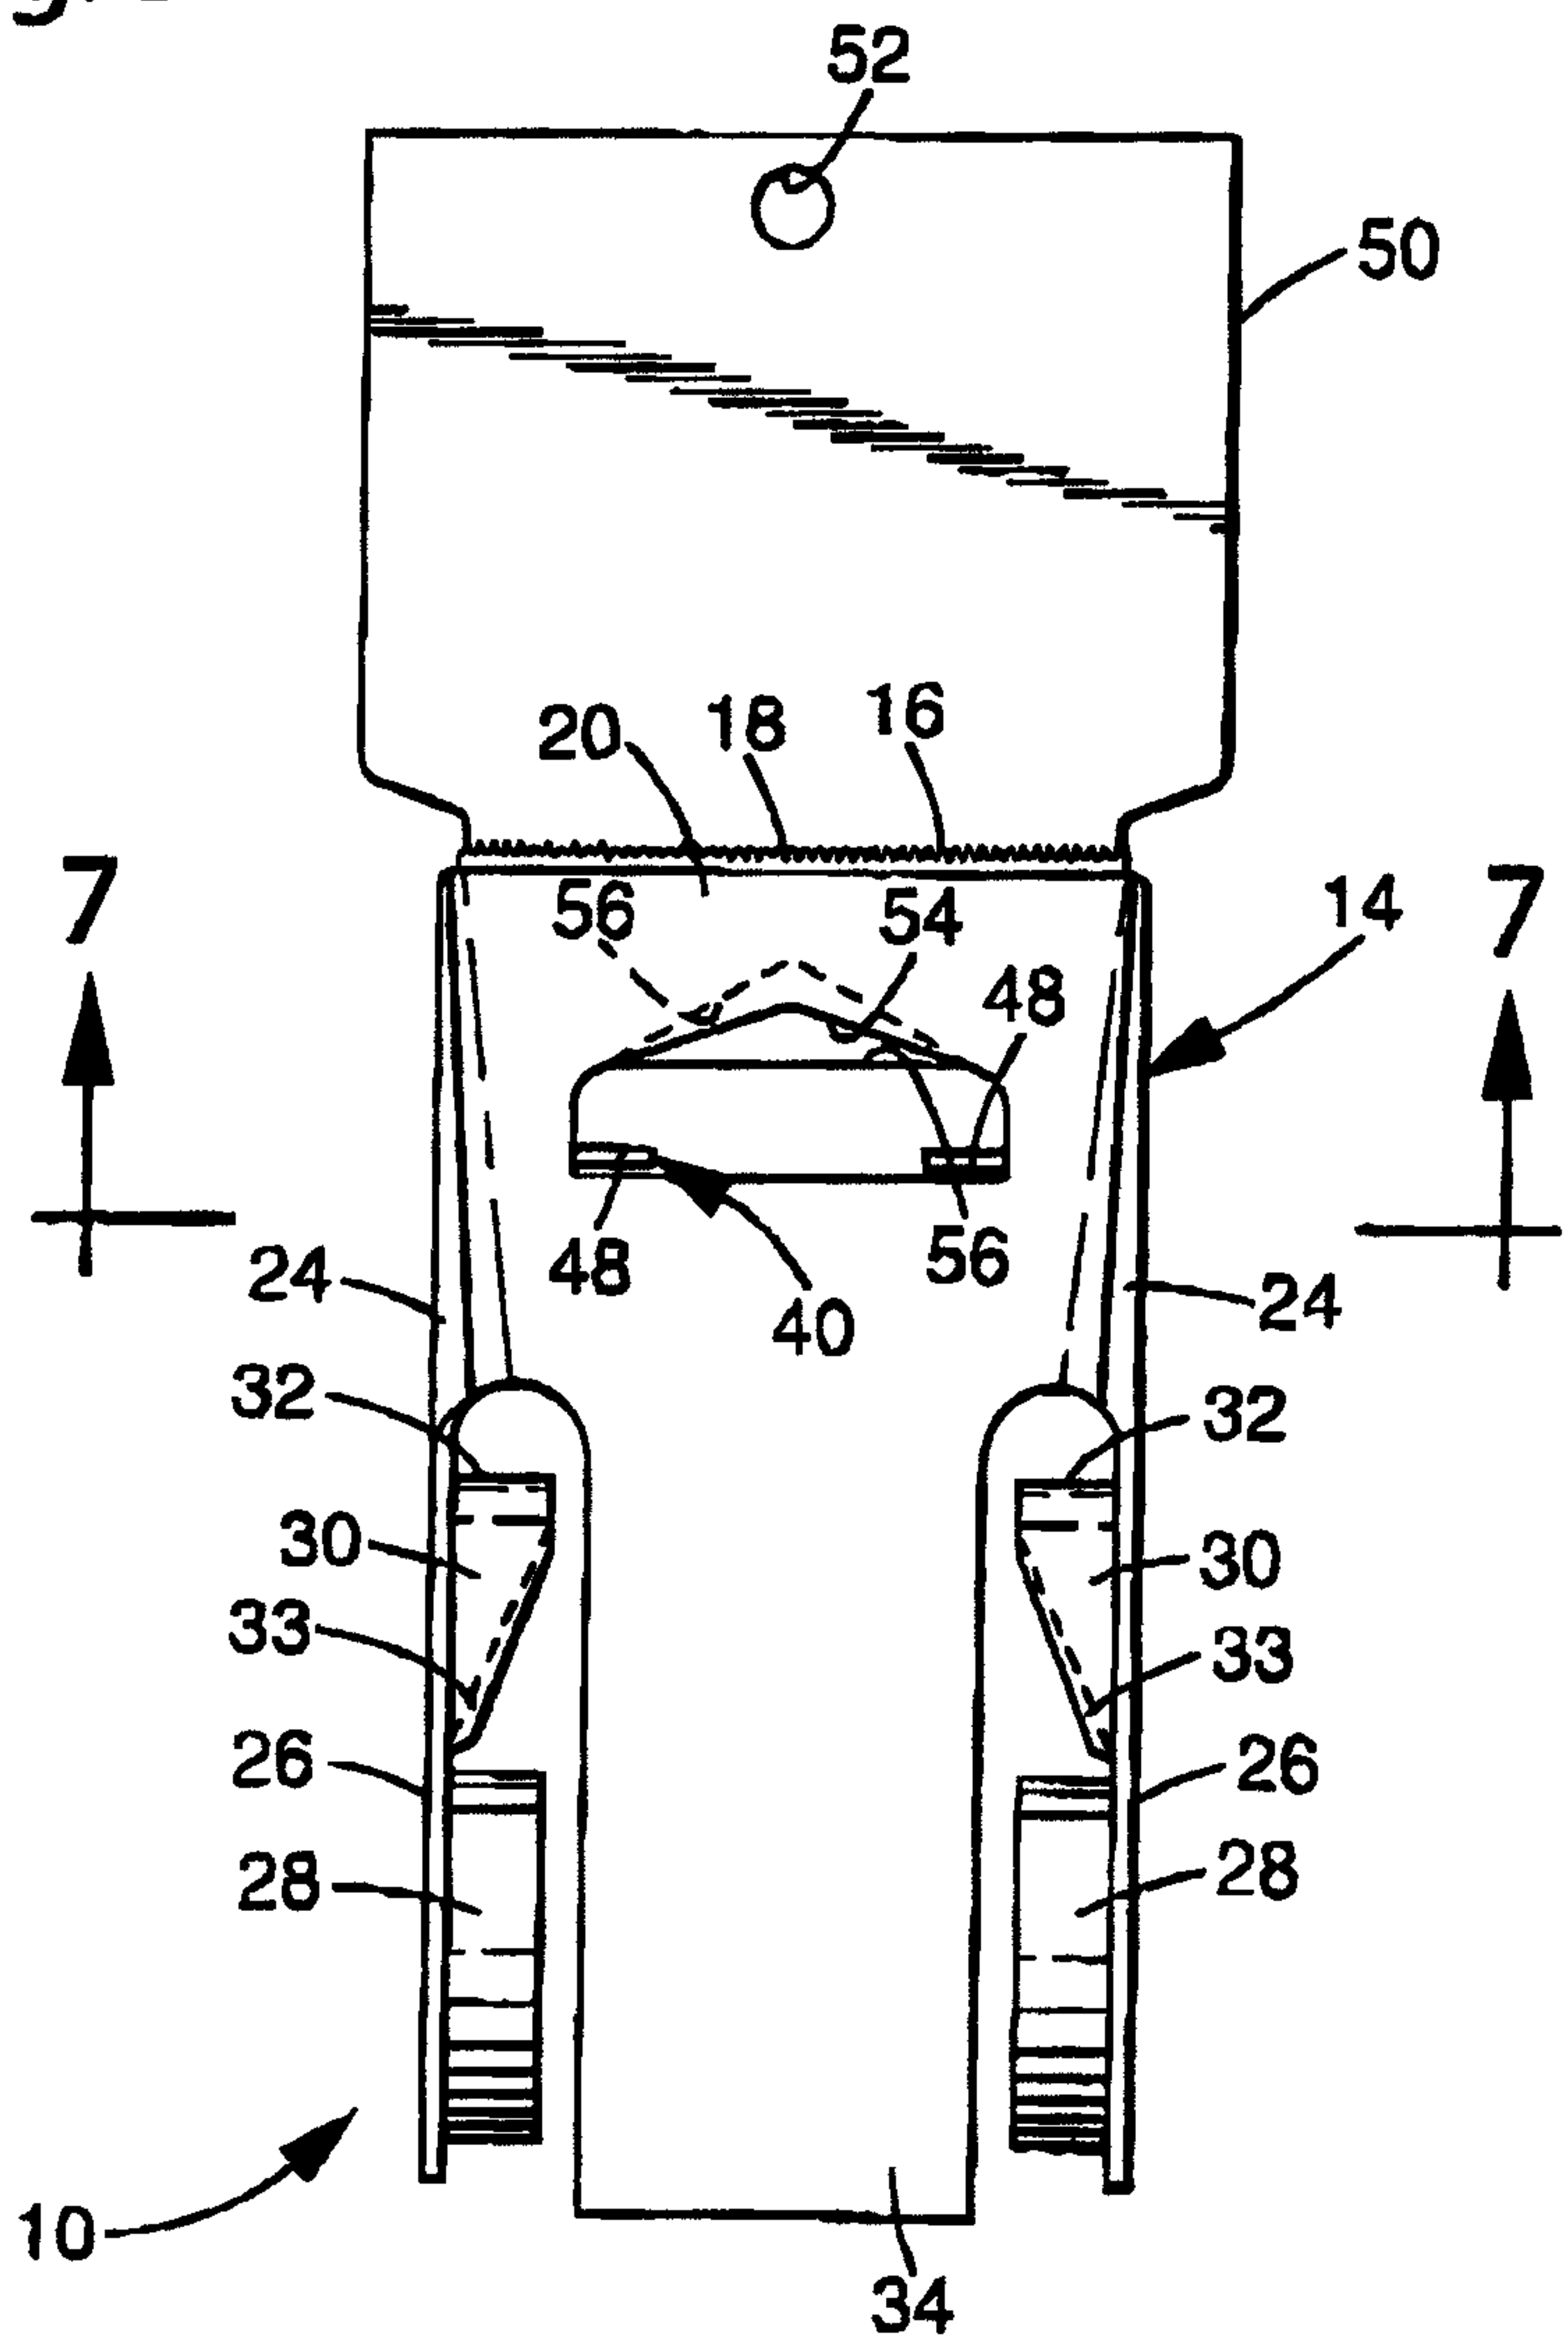


Fig. 6

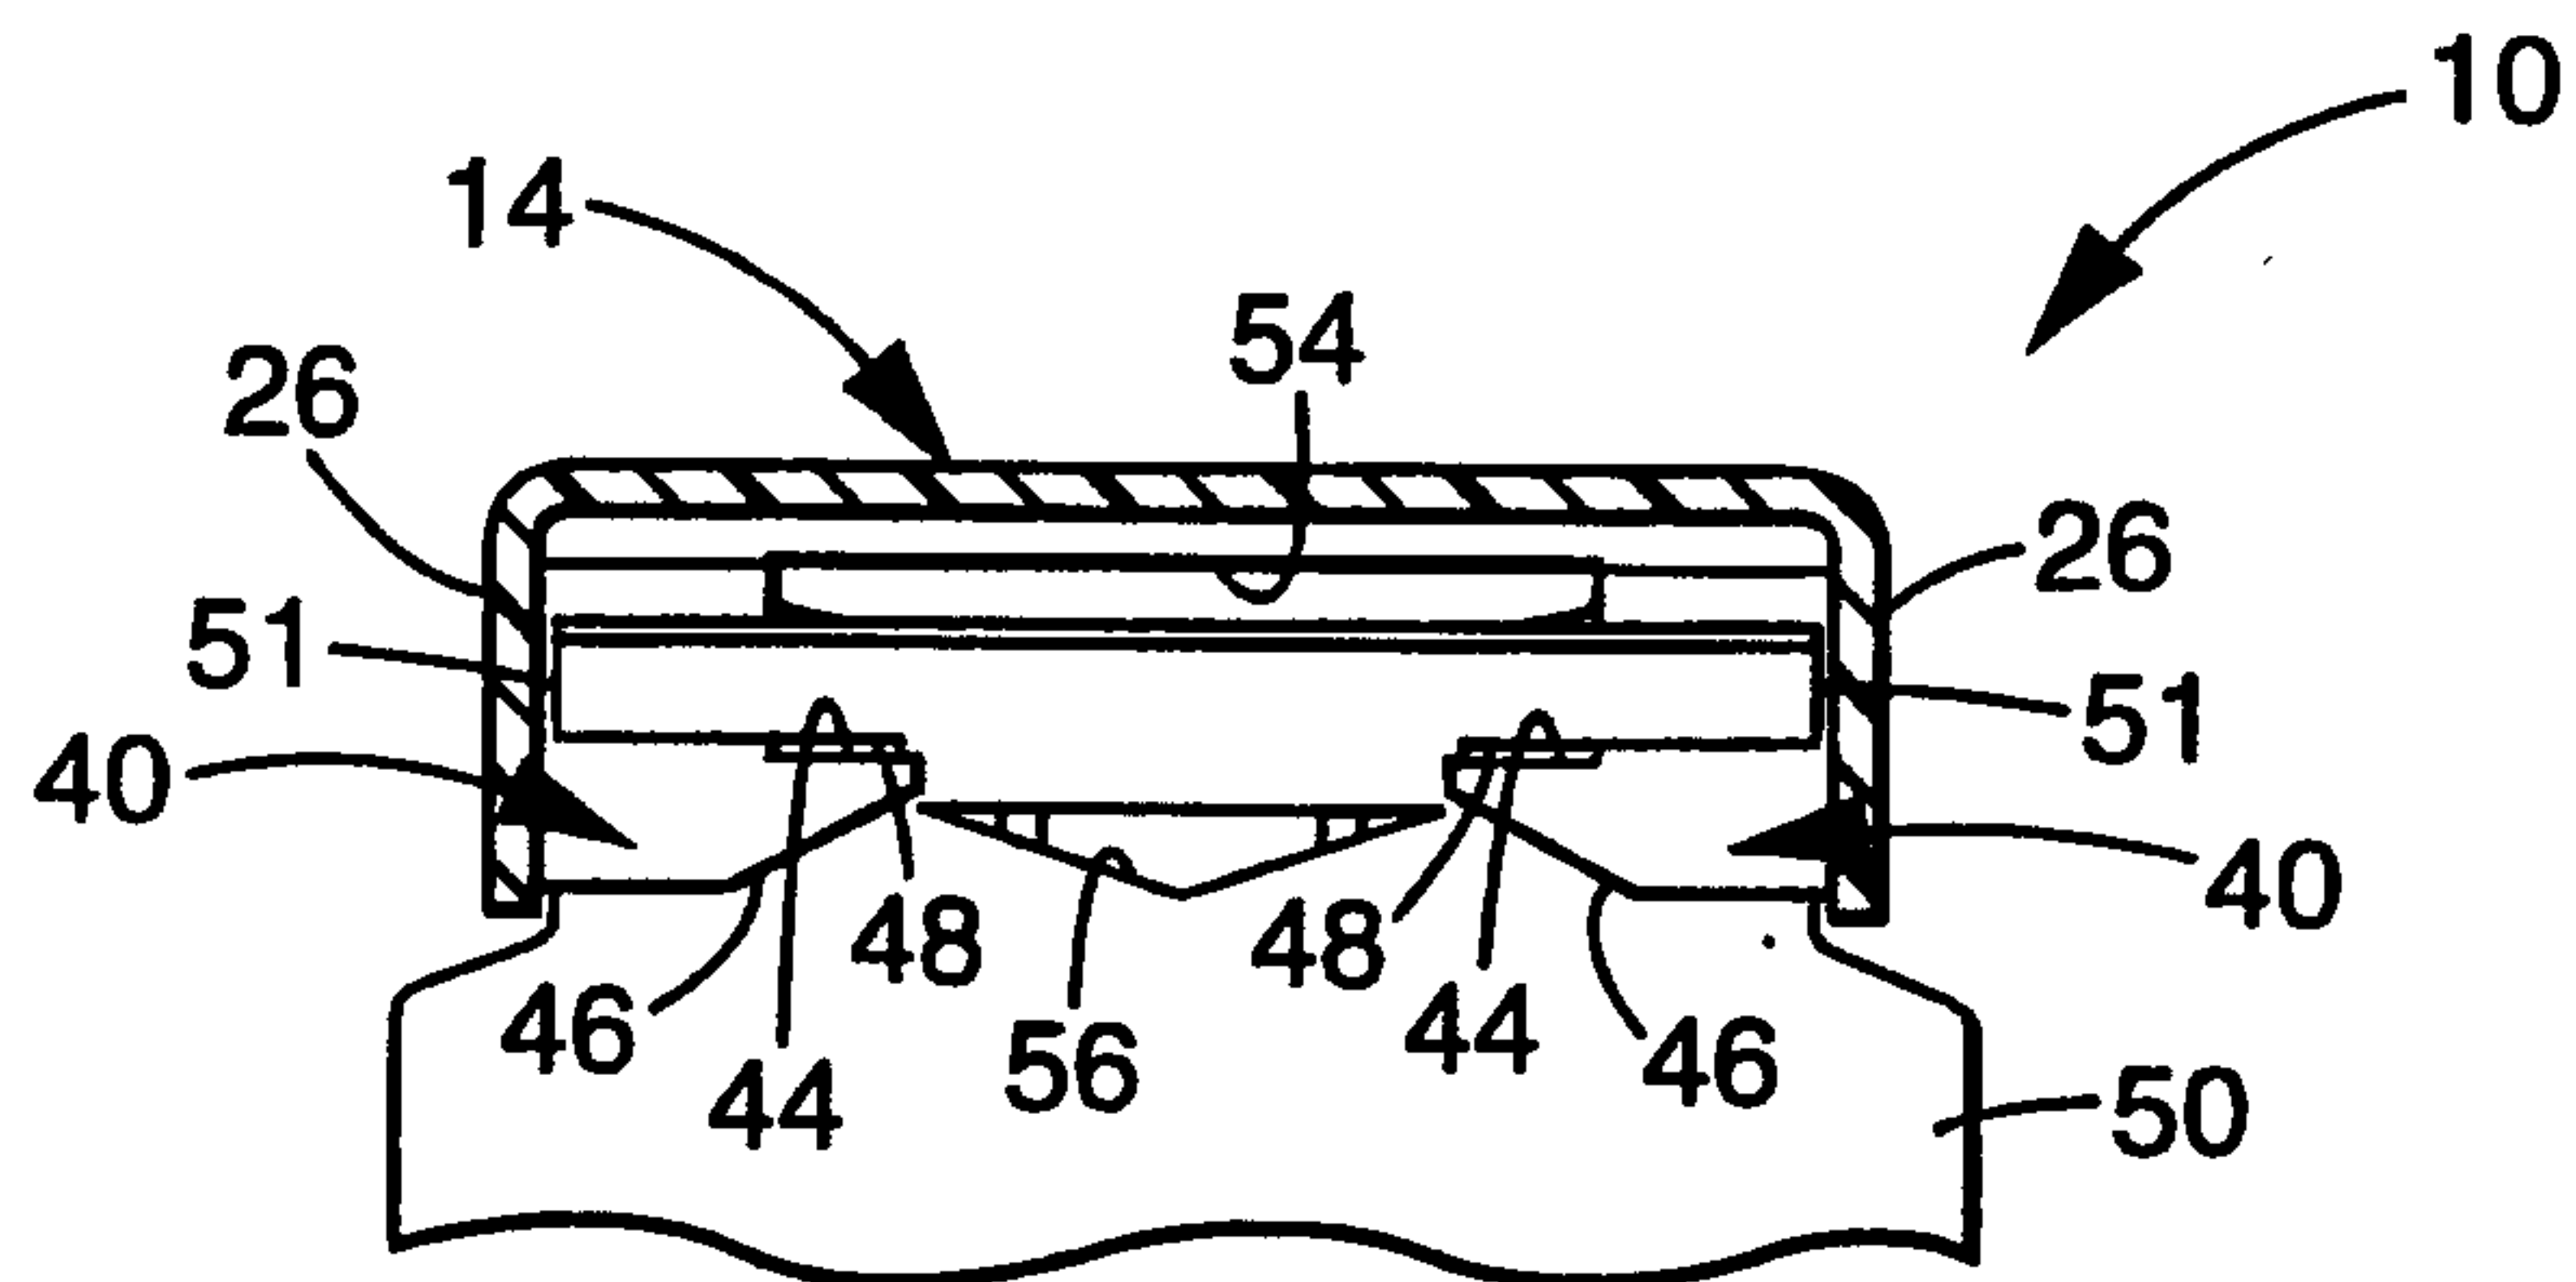


Fig. 7

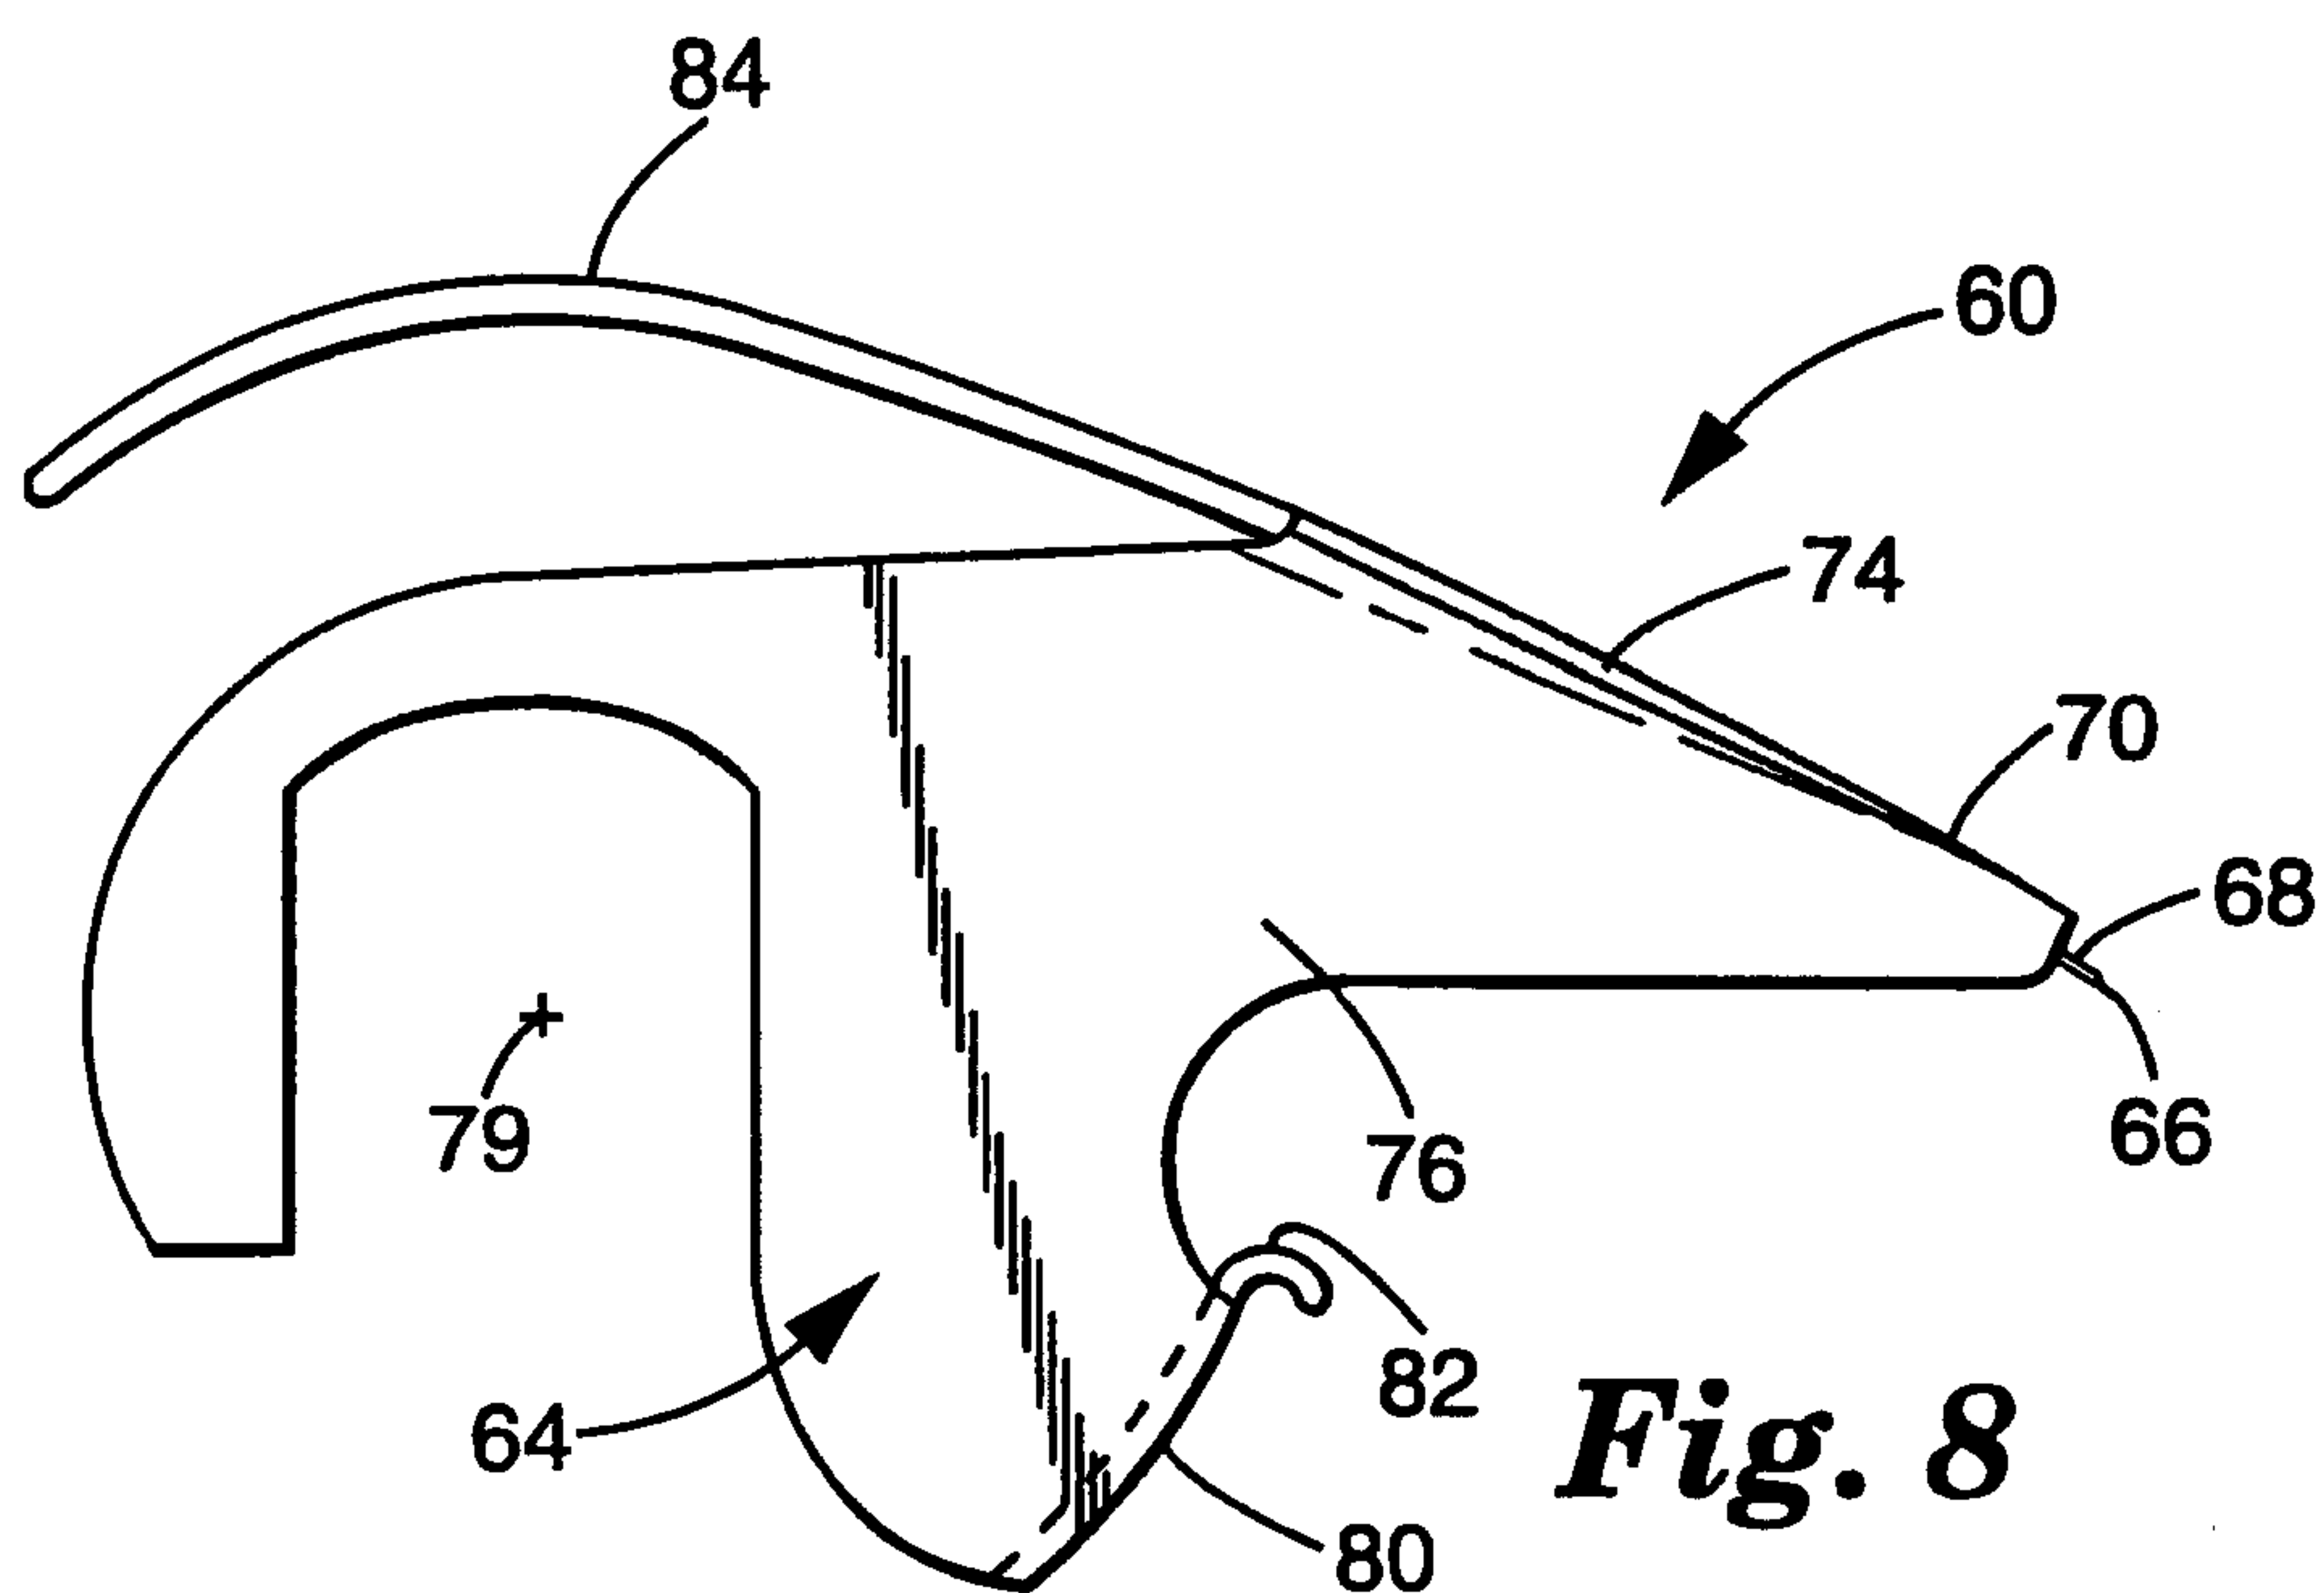


Fig. 8

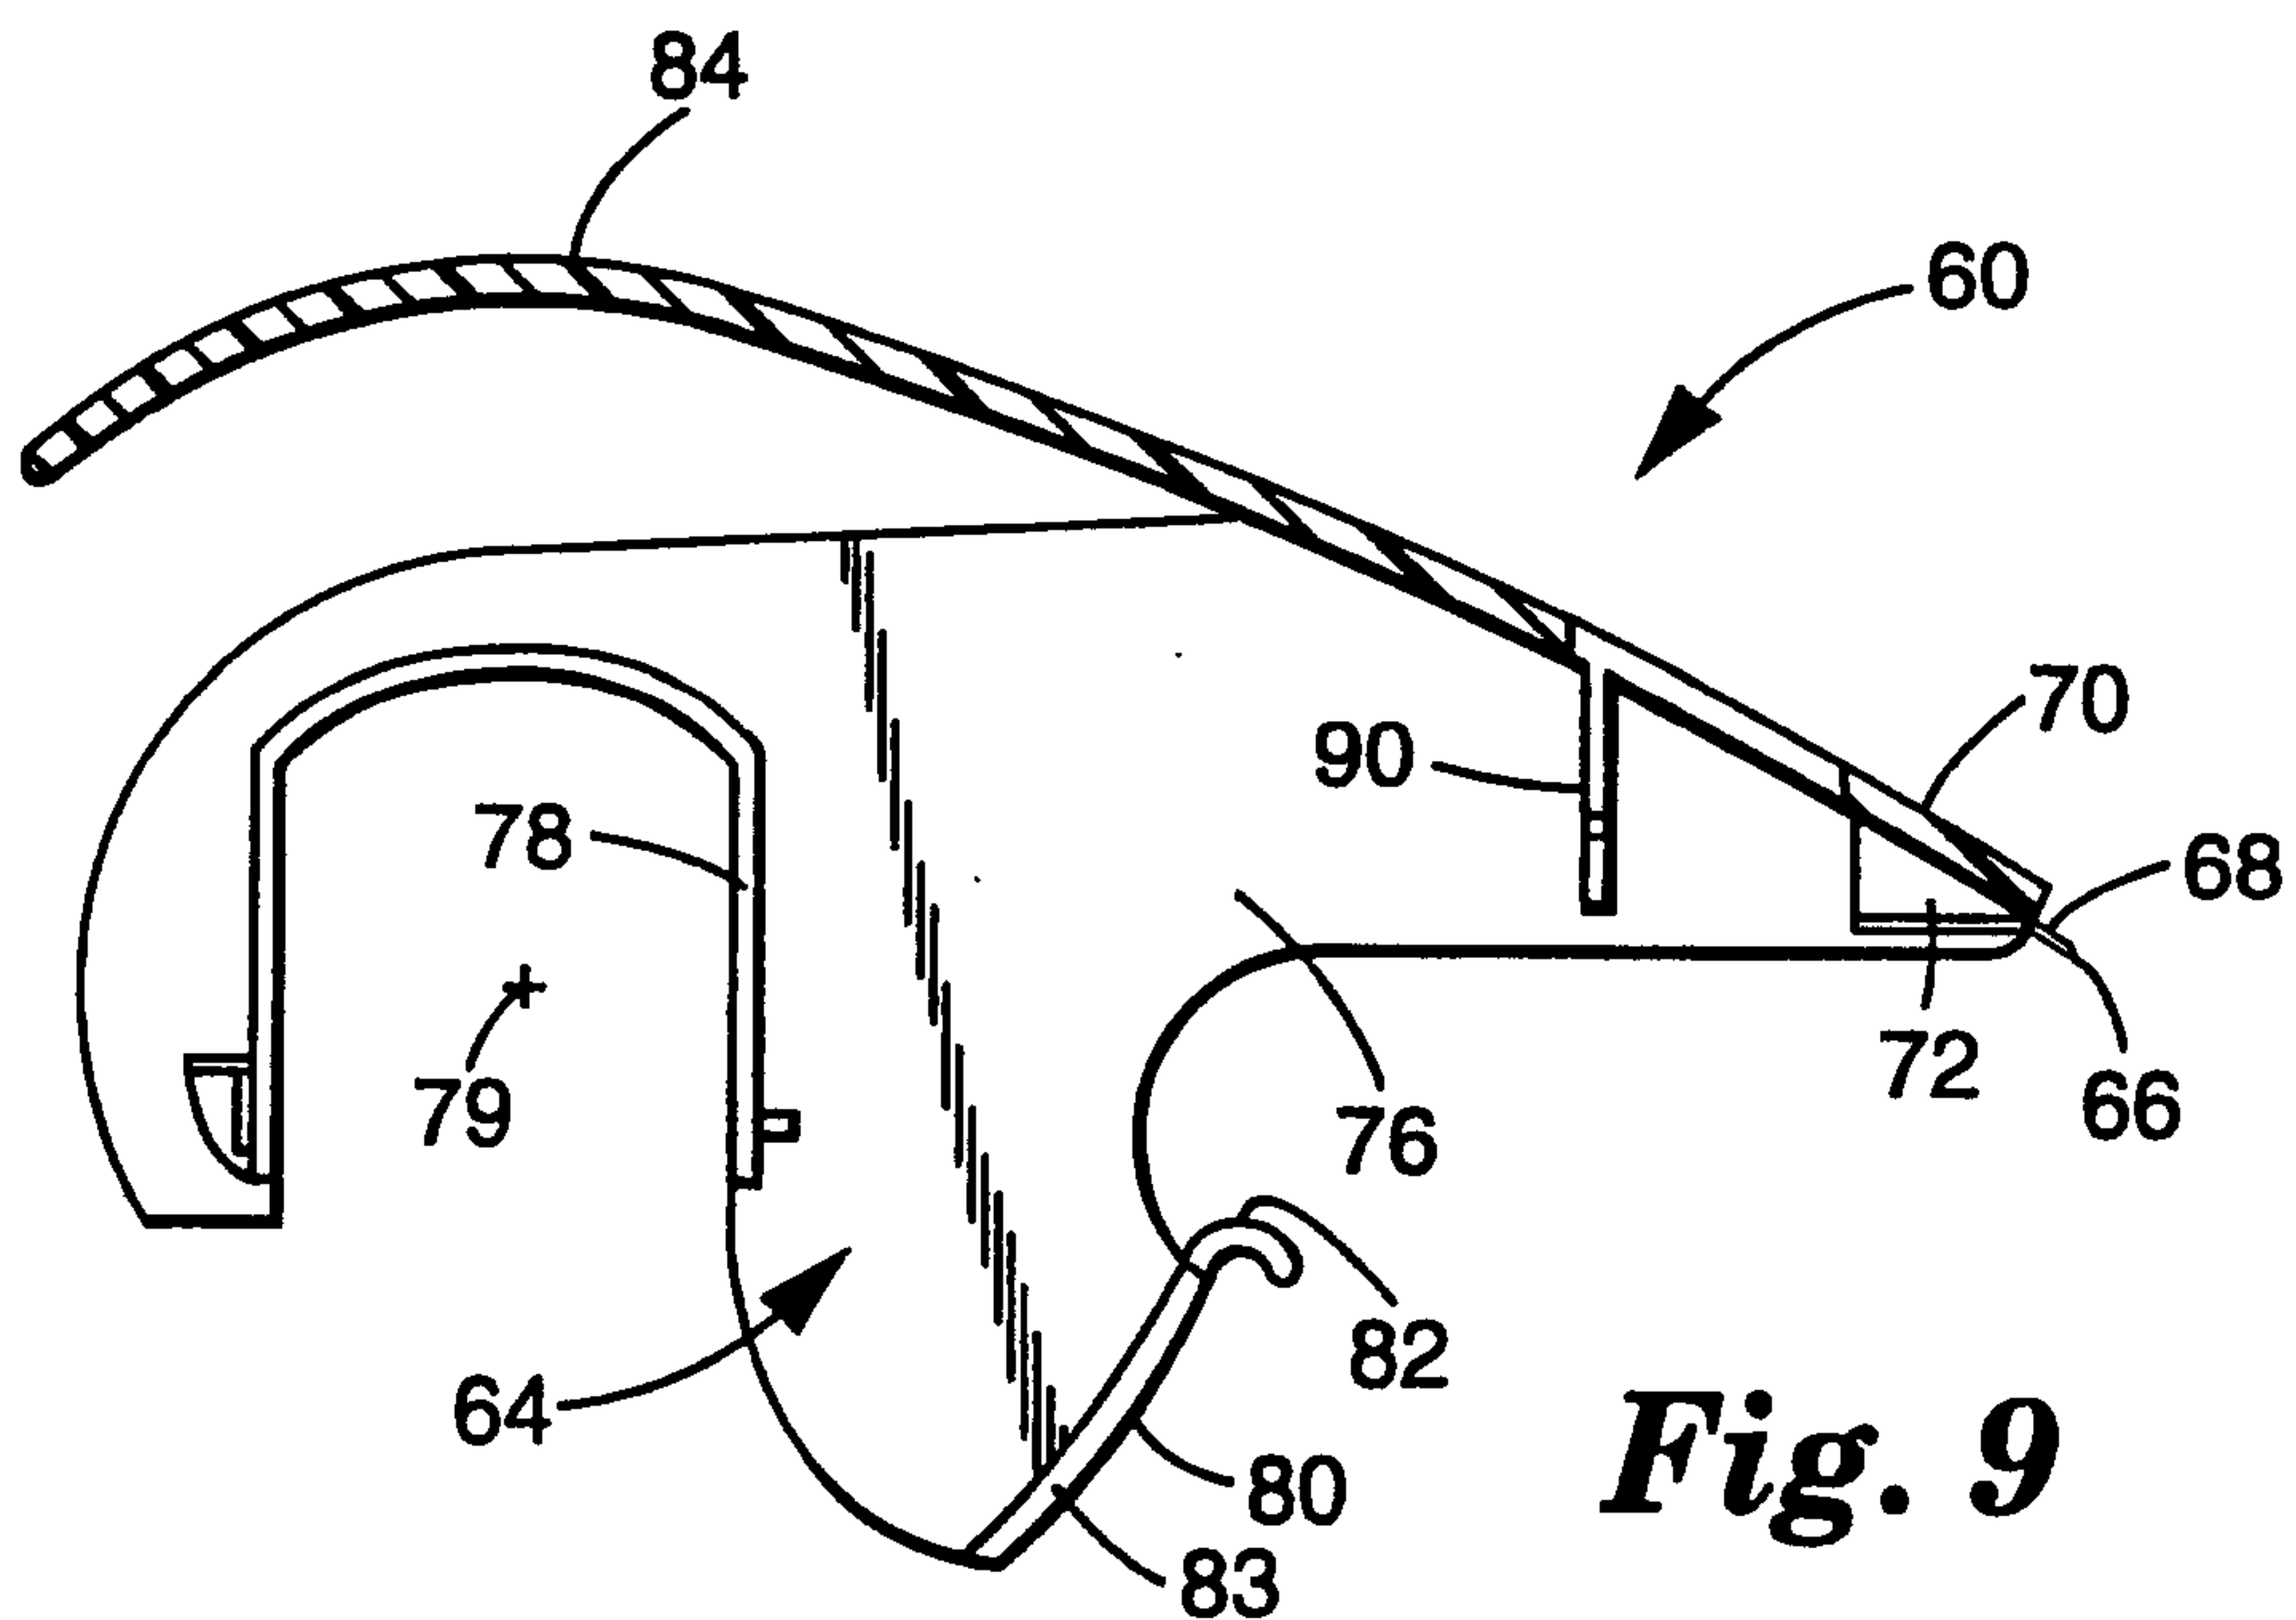


Fig. 9

