

C. F. ALBERT.
Chin-Rest for Violins.

No. 160,136.

Patented Feb. 23, 1875.

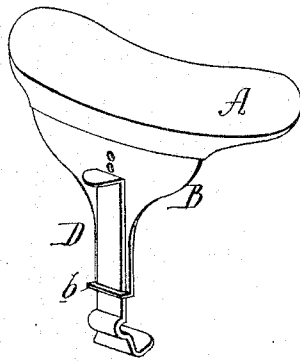


FIG. 1.




FIG. 2.

Witnesses,

Thomas McIlvain
E. H. Eckfeldt

Charles F. Albert
by his Attorneys
Horton and Son

UNITED STATES PATENT OFFICE.

CHARLES F. ALBERT, OF PHILADELPHIA, PENNSYLVANIA.

IMPROVEMENT IN CHIN-RESTS FOR VIOLINS.

Specification forming part of Letters Patent No. **160,136**, dated February 23, 1875; application filed January 13, 1875.

To all whom it may concern:

Be it known that I, CHARLES F. ALBERT, of Philadelphia, Pennsylvania, have invented certain Improvements in Chin-Rests for Violins, of which the following is a specification:

The object of my invention is to so construct a chin-rest for violins that it can be readily adjusted for application to instruments of different sizes; and this object I attain in the manner which I will now proceed to describe, reference being had to the accompanying drawing, in which—

Figure 1 is a perspective view of the chin-rest, and Fig. 2 a sectional view of the same.

A is the rest proper, and is made, by preference, of hard wood or hard rubber, and of such a shape as to afford a convenient and comfortable bearing for the performer's chin. To this rest A is secured a metal plate, B, having a number of holes, into any one of which can be adjusted a pin, *e*, on a bar, D, which is adapted to and arranged to slide in a slot in the projection *b* at the termination of the plate B. The bar D is curved at the point *y*, so as to be rendered somewhat elastic, in order to permit the pin *e* to be so adjusted as to insure a firm gripe on the edge of the violin, and it is also provided at its outer end with a lip, *f*, which bears against one side of the violin, a pad, *x*, of cork or other equivalent material secured to the rest A bearing on the opposite side of the instrument.

It will be seen that the bar D can be readily

adjusted so as to make the distance between the lip *f* and the pad *x* accord with the thickness of the violin to which the device is attached.

It will be observed on reference to Fig. 2 that the perforated plate B has at the upper end a lip, *a*, to which the rest A is attached.

By this method of construction, any desired style of rest can be used with one clamping device, while the projecting lip *a* receives all the strain, and prevents the wrenching off of the said rest—an accident which is very liable to occur when the strain comes directly upon the same.

I claim as my invention—

1. A chin-rest for violins, in which are combined the rest proper A and the perforated plate B, with the bar D and its pin *e*, as set forth.

2. The plate B, provided at the top with a lip, *a*, which extends over the edge of the violin, and to which the rest A is attached, and between which and a lip, *f*, at the lower end of the plate B, the violin is clamped, all as and for the purpose set forth.

In testimony whereof, I have signed my name to this specification in the presence of two subscribing witnesses.

CHARLES F. ALBERT.

Witnesses:

HUBERT HOWSON,
HARRY SMITH.