



- (51) **International Patent Classification:**
B01D 24/22 (2006.01)
- (21) **International Application Number:**
PCT/US2014/048302
- (22) **International Filing Date:**
25 July 2014 (25.07.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/858,546 25 July 2013 (25.07.2013) US
- (71) **Applicant:** **ABT, INC.** [US/US]; 259 Murdock Road, P.O. Box 837, Troutman, NC 28166 (US).
- (72) **Inventors:** **SIMON, Tom**; 105 Crofton Court, Statesville, NC 28677 (US). **SHERRILL, Frank**; 651 East Monbo Road, Statesville, NC 28677 (US). **LOCKE, Blake**; 14907 Oak Bluff Court, Houston, TX 77070 (US).
- (74) **Agent:** **WARD III, Henry, B.**; Moore & Van Allen PLLC, 430 Davis Drive, Suite 500, P.O. Box 13706, Research Tringle Park, NC 27709 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) **Title:** DRAINAGE DEVICE AND METHODS FOR CONSTRUCTING AND USE

(57) **Abstract:** The present invention embodies a drainage device that is used for controlling the flow of rainwater during the first flush of rainfall. The drainage device includes a basin configured to receive rainwater or other liquids from an adjacent driving surface roadway through a drain (e.g., a grate). The interior of the basin encloses a plurality of pollution collection members (e.g., lat-tices) configured to trap pollutants in the rainwater for extraction from the rainwater. The pollution collection members are angled so as to increase the surface area that is exposed to rainwater entering and received within the drainage device (also referred to herein as the "outside surface" of the pollution collection members). The pollution collection members are configured to trap pollutants. The outside surfaces of the pollution collection members may be covered in a fabric that increases efficiency in filtering pollutants from the rainwater.



DRAINAGE DEVICE AND METHODS FOR CONSTRUCTING AND USE

BACKGROUND

[0001] During the “first flush” (i.e., the first fifteen (15) to twenty (20) minutes) of rainfall, a majority of loose sediments, oils and other pollutants are picked up and carried by rainwater off surfaces such as sidewalks, driveways and roadways. While the driving surface of most roadways typically allows for a predetermined spread of standing rainwater, there is a need to efficiently redistribute and control the flow of rainwater around the driving surface to minimize the risk of hydroplaning. Conventionally, rainwater is channeled, plumbed (and may even be pumped) away from the driving surface and into an oil/water separator, a separation tank, a retention pond, or a similar rainwater management or sediment separation device. The purposes of these devices is to control the allowable spread of standing rainwater on the driving surface, which increases the safe speed at which cars may move along the road, as well as to help keep fresh water sources clean and free of pollutants as the rainwater is recycled back into the water source system after it has been processed in some manner to remove pollutants. As used herein, “pollutants” comprise sediments, oils, debris, and other solids and chemicals found in surface water runoff.

BRIEF SUMMARY OF THE INVENTION

[0002] The present invention embodies a drainage device that is used for controlling the flow of rainwater during the first flush of rainfall. The drainage device includes a basin configured to receive rainwater or other liquids from an adjacent driving surface roadway through a drain (e.g., a grate). The interior of the basin encloses a plurality of pollution collection members (e.g., lattices) configured to trap pollutants in the rainwater for extraction from the rainwater. The pollution collection members are angled so as to increase the surface area that is exposed to rainwater entering and received within the drainage device (also referred to herein as the “outside surface” of the pollution collection members). The pollution collection members are configured to trap pollutants. The outside surfaces of the pollution collection members may be covered in a fabric that increases efficiency in filtering pollutants from the rainwater.

[0003] In some embodiments, a liquid drainage apparatus is provided. The apparatus comprises: a basin defining an interior to receive the liquids and an aperture through which the received liquids are channeled; a grate, the grate being supported by the basin, wherein the grate comprises a plurality of openings so as to enable the liquids to flow therethrough and into the interior of the basin; at least one pollutant collection member, the at least one pollutant collection member being porous and being disposed within the basin such that a substantial portion of the liquids received within the interior of the basin will impinge upon the pollutant collection member at an angle.

[0004] In some embodiments, the at least one pollutant collection member comprises a support member and a filtration member secured to the support member.

[0005] In some embodiments, the support member comprises a lattice and at least one angled flange.

[0006] In some embodiments, the filtration member comprises a plurality of layers.

[0007] In some embodiments, at least one of the plurality of layers comprises a polypropylene fabric.

[0008] In some embodiments, at least one of the plurality of layers comprises a geo-textile fabric.

[0009] In some embodiments, the at least one angled flange is hinged to the basin such that the support member and filtration member can be rotated about the hinge to provide access to the aperture of the basin.

[0010] In some embodiments, the grate extends over substantially all of the interior of the basin.

[0011] In some embodiments, the grate is recessed within the interior of the basin such that the grate is flush with the surface of the basin.

[0012] In some embodiments, the at least one pollutant collection member comprises a plurality of pollutant collection members, wherein each pollutant collection member of the plurality of pollutant collection members is spaced from one another so as to define a gap between each of the pollutant collection members through which the liquids received within the interior of the basin are channeled to bypass the plurality of pollutant collection members when the pollutant collection members become obstructed.

[0013] In some embodiments, the grate defines a plane and the at least one pollutant collection member is angled in relation to the plane defined by the grate.

[0014] In some embodiments, the basin defines a plurality of anchors, the plurality of anchors being configured to be secured to the surface.

[0015] In some embodiments, the surface comprises a roadway.

[0016] In some embodiments, a method of installing a drainage apparatus for receiving and channeling liquids from a surface is provided. The method comprises providing a basin defining an interior to receive the liquids and an aperture through which the received liquids are channeled. The method further comprises providing at least one pollutant collection member, the at least one pollutant collection member being porous. The method further comprises positioning the at least one pollutant collection member within the basin such that a substantial portion of the liquids received within the interior of the basin will impinge upon the pollutant collection member at an angle. The method further comprises positioning a grate on the basin, wherein the grate is supported by the basin and comprises a plurality of openings so as to enable the liquids to flow therethrough and into the interior of the basin, the grate defining a plane. The method further comprises the step of positioning the at least one pollutant collection member within the basin comprises positioning the at least one pollutant collection member at an angle in relation to the plane defined by the grate.

BRIEF DESCRIPTION OF DRAWINGS

[0017] Having thus described embodiments of the invention in general terms, reference will now be made to the accompanying drawings, where:

Figure 1 illustrates a perspective view of a drainage device, in accordance with embodiments of the present invention;

Figure 2 illustrates a top view and a side view of a drainage device, in accordance with embodiments of the present invention; and

Figure 3 illustrates an exemplary fabric configuration, in accordance with embodiments of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0018] Embodiments of the present invention now may be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all, embodiments of the invention are shown. Indeed, the invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure may satisfy applicable legal requirements. Like numbers refer to like elements throughout.

[0019] The present invention embodies a drainage device that is used for controlling the flow of rainwater during the “first flush” (i.e. the first fifteen to twenty minutes) of rainfall. Because the first flush of rainfall typically collects and carries loose pollutants from a surface (a driving surface, a road, a highway, or the like), there is a need to efficiently redistribute the flow of rainwater away from the surface.

[0020] The present invention may include a basin 1 as depicted in Figures 1 and 2. The basin 1 may define an interior, a length, a width, or a depth and may resemble a rectangular prism with solid side surfaces, solid end surfaces, a solid bottom surface, and an open top surface. The interior of the basin 1 is configured to receive liquids (e.g., rainwater) from a surface (e.g., a driving surface, a roadway, or the like) that are channeled through the open top surface of the basin 1. The side and end surfaces of the basin 1 are typically perpendicularly coupled to the bottom surface so that the basin 1 forms a bottom portion that resembles an open-topped rectangular prism. The bottom surface of the basin 1 may be substantially flat (e.g., horizontal) or angled. The end surfaces of the basin 1 may be offset or recessed inwardly (e.g., recessed a distance from the edge of the bottom surface of the basin 1 toward the interior of the basin 1). The basin 1 may further include a top portion operatively coupled to the bottom portion that defines a length and width wider than those of the basin 1 and a depth shallower than that of the basin 1. Typically, the top portion of the basin 1 is coupled to the vertical surfaces of the edges of the side and end surfaces of the basin 1. The purpose of the basin 1 may be to receive rainwater as it flows away from the surface and separate pollutants from the rainwater. Pollutants may separate from the rainwater and settle on the bottom surface of or within the basin 1 for later removal or disposal. The basin 1 may be constructed from a solid material such as metal, an alloy, steel, aluminum, fiberglass, or the like. The basin 1 may also include areas for storing separated pollutants so that, after separation from the rainwater, the pollutants may be

removed from the basin 1 and properly disposed. The basin 1 may also include an aperture 5 on its bottom surface through which rainwater or received liquids are channeled so that the liquids may exit after being processed by through the drainage apparatus of the present invention.

Rainwater may flow through the aperture 5 and enter additional piping that is connected to a sewer or to another area for further processing, treatment, storage, or release of the water.

[0021] As illustrated in Figure 1 and 2, the basin defines a plurality of anchors 2. The plurality of anchors 2 are configured to secure the basin 1 to the adjacent surface (e.g., the roadway or sidewalk). These anchors 2 may be manufactured from metal (e.g., steel or aluminum), fiberglass, or the like and may or may not be threaded. In some embodiments, the anchors 2 may be operatively coupled to the basin 1 on an outside surface of the basin 1. In other embodiments, the basin 1 may define a plurality of holes on its side surfaces that are configured to receive the anchors 2. These holes may or may not be threaded. The anchors 2 may be angled in relation to the side surfaces or bottom surface of the basin 1, may be adjustable or tightenable, and in alternative embodiments may be utilized to secure a grate 3 (e.g., a drain) to the open top surface of the basin 1. In one embodiment, concrete or cement or a similar material is used to form the surface area around the basin and the anchors are embedded within such material when it is poured and become embedded within the structured formed by such material when it cures.

[0022] Rainwater flowing away from the surface may enter the basin 1 through the open top surface of the basin 1, or through the grate 3 (e.g., a solid, grated surface). The grate 3 includes a plurality of solid crossbars (e.g., a lattice) purposed to prevent large pollutants carried in the rainwater from entering the basin 1. The grate 3 also includes a plurality of openings or apertures through which rainwater (or other liquids) may flow. Rainwater typically is channeled through the plurality of openings in the grate 3 and then is received within the interior of the basin 1. Additionally, the grate 3 is detachably or removably coupled to the basin 1 and may extend partially over the interior of the basin 1 as seen in Figure 1. Alternatively, the grate 3 may extend over substantially all of the (e.g., the entire) interior of the basin 1 as seen in Figure 2. In this way, the grate 3 either partially or wholly covers the open top surface of the basin 1. In some embodiments, the top portion of the basin 1 may include recessed edges 4 (e.g., edges recessed within the interior of the basin 1 from the top edge of the top portion of the basin 1) on which the grate 3 may rest so that the grate 3 is operatively coupled to the basin 1. In this way,

the grate 3 is supported within the basin 1. The height of the recessed edges 4 may be substantially equal to the height of the grate 3 as displayed in Figure 1 so that the grate 3 is flush with the surface of the basin 1. Additionally, the grate 3 may define a plane.

[0023] After rainwater flows into the basin 1, it may flow or be channeled through one or more pollution collection members 6. Each pollution collection member 6 typically comprises a support member and a filtration member secured to the support member. Each support member of the pollution collection member 6, perhaps resembling a latticed rectangular (or other shaped) plane as shown in Figures 1 and 2, may define a length and a width that is less than the length and the width of the basin 1 so that each pollution collection member 6 may be housed or disposed within the interior of the basin 1. In one embodiment, each pollution collection member 6 (or each support member) is substantially planar in configuration. In another embodiment, each pollution collection member 6 (or each support member) comprises an uneven contour defining ridges and troughs. This uneven contour of each pollution collection member 6 (or each support member) increases surface area for more effectively trapping pollutants in the rainwater. Each pollution collection member 6 (or each support member) is typically constructed from a solid material such as metal, an alloy, steel, aluminum, fiberglass, or the like and may be grated (e.g., include a plurality of holes through which rainwater may flow). Each pollution collection member 6 is porous so as to enable rainwater to flow through the pollution collection member 6. In some embodiments, each pollution collection member 6 comprises a plurality of openings or apertures through which liquids received in the basin 1 (or liquids being received within the basin 1) are channeled. In this way, a substantial portion of the liquids received within the interior of the basin 1 will impinge upon each pollutant collection member 6. The pollution collection members 6 trap and collect pollutants found in the rainwater received within the interior of the basin 1. Trapped pollutants may then be extracted from the pollution collection members 6 (and thus the basin 1) for removal.

[0024] Each support member of each pollution collection member 6 is typically operatively coupled or secured to the basin 1 via a plurality of angled flanges 10. These flanges 10 may be permanently or detachably coupled to the basin 1 and each support member of each pollution collection member 6. In some embodiments and as depicted in Figures 1 and 2, the flanges 10 may be resemble an “inverse-V” shape, wherein one support member is coupled to each sloped side of the flanges 10. In other embodiments, the flanges 10 may be hinged,

allowing for a wide range of adjustability in multiple directions so that the support members (and thus the pollution collection members 6) may be positioned at a sloped angle in relation to the bottom surface of the basin 1, or in relation to another surface. Thus, the support member and filtration member of the pollution collection member 6 can be rotated about the hinge to provide access to the aperture 5 of the basin 1. Further, by angling the support members of the pollution collection members 6, the amount of surface area that is able to trap pollutants from the rainwater may be drastically increased. In this way, a more-angled pollution collection member 6 may trap more pollutants from the rainwater than another pollution collection member 6 that is not angled or less-angled. Therefore, a substantial portion of the liquids received within the interior of the basin 1 will impinge upon the pollutant collection member 6 at an angle. In one embodiment, the pollution collection members 6 are angled in relation to the plane defined by the grate 3.

[0025] In some embodiments, each pollutant collection member 6 is spaced from one another so as to define a gap between each of the pollutant collection members 6 through which rainwater (e.g., liquids) received within the interior of the basin 1 are channeled to bypass the pollutant collection members 6 when the pollutant collection members 6 become obstructed from trapped pollutants, liquids, or other substances. Alternatively, as shown in Figures 1 and 2, at the peak of the sloped pollutant collection members 6 (e.g., the point of the “inverse-V”), a similar bypass gap may exist between the pollutant collection members 6 and may enable rainwater to flow straight through the basin 1 of the present invention without passing through the pollutant collection members 6. For example, at a period in time after the first flush when the basin 1 is already full of water and separated pollutants, any newly received rainwater may flow straight through the bypass gap and channel into the aperture 5 at the bottom of the basin 1 for further processing or release. The aperture 5 may include a substantially vertical cylindrical extrusion or flume extending downwardly from the bottom surface of the basin 1 and configured to transport the rainwater received by the aperture 5 to a sewer, a water treatment facility plant, a reservoir or other body of water, or the like. The aperture 5 may be coupled to the basin 1 on any surface of the basin 1. In some embodiments, the flume may be operatively coupled to a pre-lain pipe or other liquid transportation device positioned underneath or adjacent to the drainage device of the present invention so that water received by the aperture 5 may exit the drainage device of the present invention and be transported to another location.

[0026] Furthermore, one or more filtration members 7, such as the one in Figure 3, may be adhered, secured, or coupled to each support member of each pollution collection member 6. Typically, the fabric 7 may be formed from a bonded sheet assembly that includes a top layer 8 and a bottom layer 9. The top layer 8 may be manufactured from a formed polypropylene core fabric. The bottom layer 9 may be manufactured from a geo-textile fabric. Utilization of the fabric 7 on the each pollution collection member 6 may increase efficiency in filtering se pollutants from the flowing rainwater.

[0027] Each element of the present invention may be operatively coupled to each other as described herein, or in another configuration. Welds, pins, bolts, adhesives, screws, or other couplings may be used to either permanently or removably couple each element to one another as described herein. The present invention may further include a liner to protect any potential runoff liquid from escaping the basin 1 and entering any surrounding environment.

[0028] In some embodiments, a method of installing a drainage apparatus for receiving and channeling liquids from a surface is provided. The method comprises providing a basin defining an interior to receive the liquids and an aperture through which the received liquids are channeled. The method further comprises providing at least one pollutant collection member, the at least one pollutant collection member being porous. The method further comprises positioning the at least one pollutant collection member within the basin such that a substantial portion of the liquids received within the interior of the basin will impinge upon the pollutant collection member at an angle. The method further comprises positioning a grate on the basin, wherein the grate is supported by the basis and comprises a plurality of openings so as to enable the liquids to flow therethrough and into the interior of the basin, the grate defining a plane. The method further comprises the step of positioning the at least one pollutant collection member within the basin comprises positioning the at least one pollutant collection member at an angle in relation to the plane defined by the grate.

[0029] While certain exemplary embodiments have been described and shown in the accompanying drawings, it is to be understood that such embodiments are merely illustrative of and not restrictive on the broad invention, and that this invention not be limited to the specific constructions and arrangements shown and described, since various other changes, combinations, omissions, modifications and substitutions, in addition to those set forth in the above paragraphs, are possible. Those skilled in the art will appreciate that various adaptations, modifications, and

combinations of the just described embodiments can be configured without departing from the scope and spirit of the invention. Therefore, it is to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described herein.


[0030] Also, it will be understood that, where possible, any of the advantages, features, functions, devices, and/or operational aspects of any of the embodiments of the present invention described and/or contemplated herein may be included in any of the other embodiments of the present invention described and/or contemplated herein, and/or vice versa. In addition, where possible, any terms expressed in the singular form herein are meant to also include the plural form and/or vice versa, unless explicitly stated otherwise. Accordingly, the terms “a” and/or “an” shall mean “one or more.”

WHAT IS CLAIMED IS

1. A drainage apparatus for receiving and channeling liquids from a surface, the apparatus comprising:
 - a basin defining an interior to receive the liquids and an aperture through which the received liquids are channeled;
 - a grate, the grate being supported by the basin, wherein the grate comprises a plurality of openings so as to enable the liquids to flow therethrough and into the interior of the basin;
 - at least one pollutant collection member, the at least one pollutant collection member being porous and being disposed within the basin such that a substantial portion of the liquids received within the interior of the basin will impinge upon the pollutant collection member at an angle.
2. A drainage apparatus according to Claim 1, wherein the at least one pollutant collection member comprises a support member and a filtration member secured to the support member.
3. A drainage apparatus according to Claim 2, wherein the support member comprises a lattice and at least one angled flange.
4. A drainage apparatus according to Claim 2, wherein the filtration member comprises a plurality of layers.
5. A drainage apparatus according to Claim 4, wherein at least one of the plurality of layers comprises a polypropylene fabric.
6. A drainage apparatus according to Claim 4, wherein at least one of the plurality of layers comprises a geo-textile fabric.
7. A drainage apparatus according to Claim 3, wherein the at least one angled flange is hinged to the basin such that the support member and filtration member can be rotated about the hinge to provide access to the aperture of the basin.

8. A drainage apparatus according to Claim 1, wherein the grate extends over substantially all of the interior of the basin.
9. A drainage apparatus according to Claim 1, wherein the grate is recessed within the interior of the basin such that the grate is flush with the surface of the basin.
10. A drainage apparatus according to Claim 1, wherein the at least one pollutant collection member comprises a plurality of pollutant collection members, wherein each pollutant collection member of the plurality of pollutant collection members is spaced from one another so as to define a gap between each of the pollutant collection members through which the liquids received within the interior of the basin are channeled to bypass the plurality of pollutant collection members when the pollutant collection members become obstructed.
11. A drainage apparatus according to Claim 1, wherein the grate defines a plane and the at least one pollutant collection member is angled in relation to the plane defined by the grate.
12. A drainage apparatus according to Claim 1, wherein the basin defines a plurality of anchors, the plurality of anchors being configured to be secured to the surface.
13. A drainage apparatus according to Claim 12, wherein the surface comprises a roadway.
14. A method of installing a drainage apparatus for receiving and channeling liquids from a surface, the method comprising:
 - providing a basin defining an interior to receive the liquids and an aperture through which the received liquids are channeled;
 - providing at least one pollutant collection member, the at least one pollutant collection member being porous; and
 - positioning the at least one pollutant collection member within the basin such that a substantial portion of the liquids received within the interior of the basin will impinge upon the pollutant collection member at an angle.

15. A method according to Claim 12, further comprising:
- positioning a grate on the basin, wherein the grate is supported by the basis and comprises a plurality of openings so as to enable the liquids to flow therethrough and into the interior of the basin, the grate defining a plane; and
 - wherein the step of positioning the at least one pollutant collection member within the basin comprises positioning the at least one pollutant collection member at an angle in relation to the plane defined by the grate.

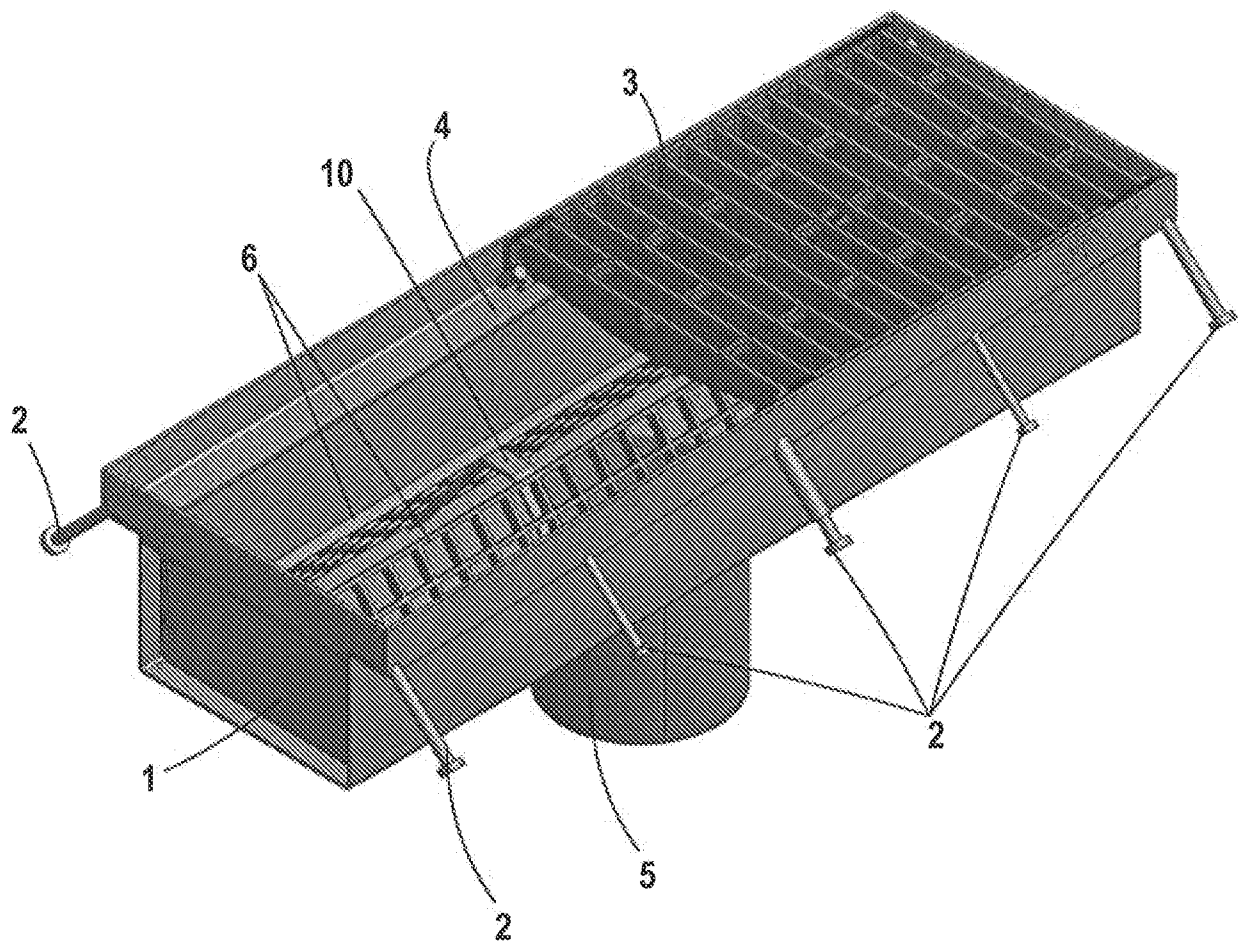**FIGURE 1**

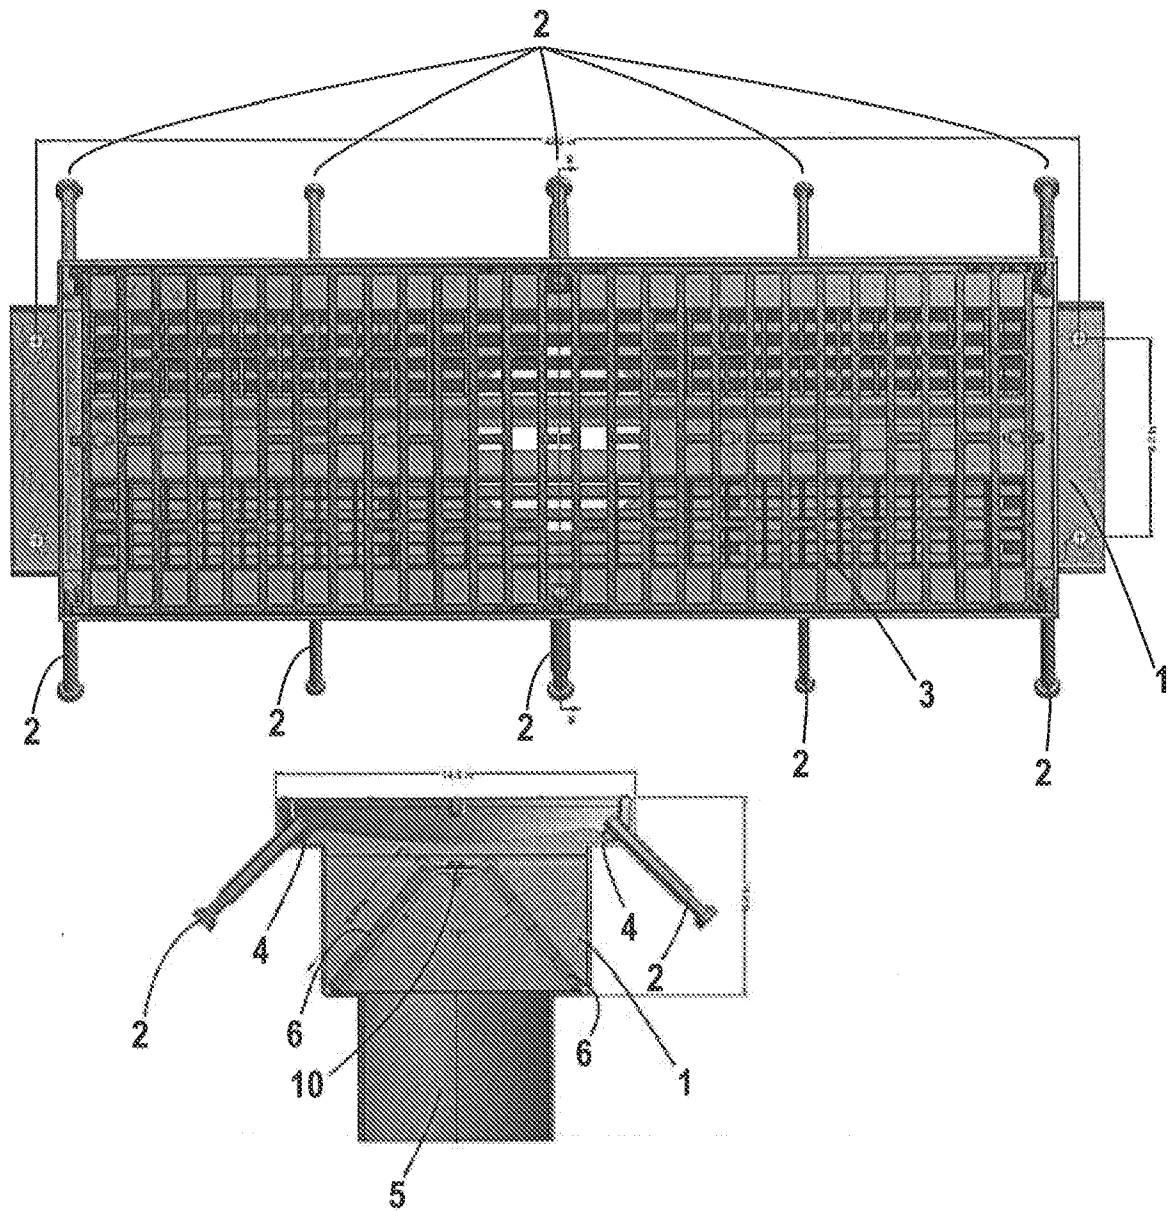


FIGURE 2

