




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ : F01B 9/06, F02B 41/04	A1	(11) International Publication Number: WO 98/59155 (43) International Publication Date: 30 December 1998 (30.12.98)
(21) International Application Number: PCT/GB98/01820 (22) International Filing Date: 22 June 1998 (22.06.98) (30) Priority Data: 9712925.8 20 June 1997 (20.06.97) GB (71)(72) Applicant and Inventor: NORTON, Cyril, Andrew [GB/GB]; The Old Meeting House, Abbey Wall Road, Pittenweem, Fife KY10 2NE (GB). (74) Agents: McCALLUM, William, Potter et al.; Cruikshank & Fairweather, 19 Royal Exchange Square, Glasgow G1 3AE (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: ENGINE (57) Abstract <p>A method of operating an internal combustion reciprocating piston engine comprises the steps of: moving a piston (12) within a cylinder (10) to compress a charge in the cylinder (10) and igniting the compressed charge while the piston is being moved in the chamber at substantially constant or increasing velocity. The length, duration and pattern of at least one piston stroke may differ from the length, duration and pattern of another stroke.</p>		

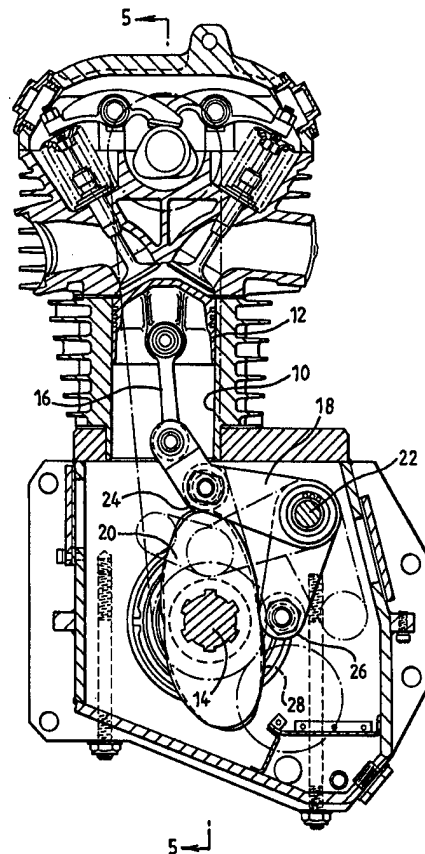

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ENGINE

This invention relates to an engine and a method of operating an engine, and in particular to a method of operating an internal combustion reciprocating piston engine. The invention also relates to a method of operating a reciprocating piston machine, which may take the form of an engine or a compressor.

Since its conception the design and operation of the internal combustion engine has been subject to continuous development and improvement, with the result that the performance and emissions from such engines have improved dramatically. In recent years, efforts have focused on the aim of reducing undesirable engine emissions, such as the products of incomplete combustion (carbon monoxide (CO) and unburnt hydrocarbons (HC)), and oxides of nitrogen (NO_x), which are recognised as having a significant impact on the environment and human health.

Recent developments have included improving combustion from inducing higher turbulence in the fuel\air charge, direct injection to improve fuel dispersion, and experiments with ignition energy and disposition of the point or points of ignition in the combustion chamber. Piston and combustion chamber design have also received attention to produce swirl and squish effects. However, it has been shown that turbulence and swirl change the pattern and length of the flame front from the point of ignition and may result in uneven burning of the charge in the

combustion chamber, and an even slower overall rate of combustion. Experiments have been carried out using earlier ignition of the charge to counter the slower overall burn resulting from the swirl effects, however this has been found in some cases to exacerbate the NO_x output, although it may lower CO and HC levels.

One of the most significant recent developments was the "lean burn" engine, with a view to reducing fuel consumption and reducing emissions of CO and HC. However, lean burn engines tend to produce relatively large amounts of NO_x, due to the excess oxygen present at the high temperatures and pressures reached, particularly if the duration of combustion is extended due to early ignition of the charge.

It is among the objectives of embodiments of the present invention to obviate or mitigate one or more of these disadvantages. In particular, it is an object of embodiments of the present invention to obviate or mitigate one or more of the disadvantages inherent in conventional engine design and thereby allow improvements in the combustion process, and further to facilitate adaptation of the performance characteristics of an engine to suit a particular application.

According to one aspect of the present invention there is provided a method of operating an internal combustion reciprocating piston engine, the method comprising the steps of:

moving a piston within a chamber to compress a charge

contained therein; and

igniting the compressed charge while the piston is being moved in the chamber at substantially constant or increasing velocity.

5 According to another aspect of the present invention there is provided an internal combustion engine in which a piston is reciprocally movable in a piston chamber to compress a charge which is ignited during a latter portion of a compression stroke, the engine comprising:

10 a rotating power output member; and
a connection between a piston and said power output member, characterised in that said connection includes means for moving the piston at a substantially constant or increasing velocity at the point of ignition.

15 The various aspects of the present invention will be primarily described herein with reference to four stroke spark ignited petrol engines comprising one or more cylinders, however aspects of the invention may also be applicable to engines utilising other fuels, such as
20 natural gas, diesel oil and kerosene and engines operating on other cycles, such as the two stroke cycle, and compression ignition engines and engines utilising different ignition methods.

25 In conventional piston engines, each piston is directly connected to a rotating crankshaft by a piston rod. As a result, each piston moves harmonically and is travelling at maximum speed in mid-stroke. Thus, during the compression stroke, the piston accelerates from bottom

dead centre (BDC), reaching maximum speed at mid stroke and thereafter decelerates at an increasing rate towards top dead centre (TDC). Ignition of the fuel\gas charge typically occurs between 25° and 45° before TDC, while the piston is decelerating from maximum speed, as dictated by the crankshaft\piston connecting rod relationship. The relatively slow speed of the piston following ignition, up to and after TDC, results in the burning charge being maintained at high temperature and pressure for a relatively long period, thereby increasing the likelihood of the creation of undesirable combustion products, particularly NO_x. In contrast, in the present invention, the piston is moving at a substantially constant or increasing velocity at the point of ignition. Although not wishing to be bound by theory, it is believed that the substantially constant or increasing velocity of the piston creates a positive and stable pressure gradient or pressure wave in front of the piston. The pressure wave will interact with the advancing flame front, increasing the flame speed and reflecting the flame back towards the roof of the combustion chamber, resulting in a faster overall combustion process, such that combustion of the charge occurs evenly and in a relatively short time interval. The ability to attain complete combustion in a shorter time interval allows the expansion or working stroke to commence earlier than has so far been practical, without the penalty of incomplete combustion. Thus, the combustion process is completed in conditions of lower turbulence and, therefore,

more evenly and in minimum time, resulting in the production of minimum CO and HC components, and as the burning charge is maintained at high temperature and pressure for a shorter time the production of nitrous oxides is also minimised.

The mechanical configuration of the engine and in particular the configuration of the connecting means may take any suitable form, and may include an arrangement of cams and cranks, gears, cranks, eccentric drives and the like as will be apparent to those of skill in the art.

Preferably, the connection between the piston and the output member is arranged such that maximum torsional effect can be applied to the output member during an initial or earlier portion of the power or working stroke, when the pressure of the burning charge is at or near a maximum, and thus the output torque will be superior to a conventional engine. This may be enhanced by providing a relatively low piston descent rate following TDC, thereby allowing a more efficient utilisation of maximum heat release and, as a result, high cylinder pressure providing high torsional effort at the power output member.

Preferably, the piston speed is substantially constant or increasing at ignition of the charge.

Preferably also, the piston is moving at or around its maximum velocity when ignition is triggered.

According to another aspect of the present invention there is provided a reciprocating piston machine in which at least one of the length, duration and pattern of at

least one piston stroke differs from the length, duration and pattern of another stroke.

In the case of a four stroke cycle all four strokes may differ in one or both of length and duration.

5 According to a further aspect of the present invention there is provided a four stroke reciprocating piston machine having a piston coupled to a rotating power output member, the four strokes corresponding to a 360° rotation of the output member.

10 In accordance with embodiments of these aspects of the invention, the piston stroke lengths and velocities within the four cycles may be adjusted individually to satisfy differing heat release rates for various types of fuels, improve exhausting, and give better pumping efficiencies
15 and thus higher volumetric efficiency. For example, by reducing the time span of the compression stroke it is possible to increase the rate of compression, which together with the higher piston speed at ignition, will assist in speeding up flame front movement, thereby
20 reducing the overall time span of the complete combustion phase, where time, temperature and pressure have a significant influence on the production of oxides within the burning charge.

25 Preferably, at least one of the length and duration of the stroke of the expansion or power cycle is shorter than another stroke, and may be up to 50% shorter than another stroke. The duration of the expansion or power stroke may be reduced in proportion to the degree of rotation of the

output member that the shortened stroke represents, and may represent a 50° or more rotation of the output member, although the movement pattern may be adjusted to satisfy other requirements by means of changes in the coupling between the piston and the power output member and for example by cam profile changes. The relative reduction of stroke would typically be evident at the tail of the piston movement where cylinder pressure is low and torsional effort minimal. With relative reduction of the expansion stroke length, a similar relative reduction would also therefore apply to the stroke of the exhausting cycle. The duration of this stroke may remain at 90° rotation of the output member. Alternatively, a reduced period may be required to match or comply with the combined dynamics of the exhaust and induction systems.

The relative reduction in rotation of the output member during the expansion and exhaust strokes permit a relative extension of the duration of the induction stroke, to enable a longer "breathing period" on the induction stroke.

The induction stroke may correspond to rotation of between 80° and 150° of the output member to facilitate induction of the charge, air, or fuel and air mixtures and to match the flow dynamics of inlet tract and valve flow characteristics, and hence provide better volumetric efficiency, while also avoiding the problems associated with valve overlap. The compression stroke length will be the same as the induction stroke length, but the output

member rotation to execute the compression stroke is preferably less than 90° , and may be as little as 40° rotation to provide a greater duration for the induction stroke, thereby enabling the combined kinematics of both strokes to be set for best pumping efficiency. The stroke length may also be shortened to permit changes of compression ratio.

Preferably, the piston speed will be held substantially constant or increasing during the last 25% - 1% of the compression stroke, the specific piston kinematics being selected to suit particular fuels and operating cycles,. Ignition preferably takes place within the remaining 5% to 10% of the stroke before TDC. However, different fuels and operating conditions may require adjustment to the ignition setting to obtain ideal performance.

According to a further aspect of the present invention there is provided a method of operating a reciprocating piston machine in which a piston is connected to a rotating member and moves in one direction during a first induction stroke and in the opposite direction during a second compression stroke, and the degree of rotation of the rotating member is greater over said first stroke.

In use, the machine provides a longer duration on the induction phase and thereby improves the pumping efficiency of the machine.

According to a still further aspect of the present invention there is provided a method of operating a four-

stroke reciprocating piston machine in which a piston is connected to a rotating member and moves in one direction during the first and third strokes and in the opposite direction during the second and fourth strokes, whereby the stroke length of the first induction stroke and the second compression stroke is greater than the stroke length of the third expansion stroke and the fourth exhaust stroke.

These aspects of the present invention may be used to advantage in the operation of compressors, pumps, and other machines, in addition to engines.

These and other aspects of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figures 1a, 1b, 1c and 1d are sectional schematic illustrations of a piston arrangement in accordance with an embodiment of the present invention;

Figure 2 is a graph illustrating the typical velocity and acceleration of the piston of Figures 1a to d;

Figure 3 is a graph illustrating the velocity and acceleration of the piston of Figures 1a to d;

Figure 4 is a sectional side view (on line 4 - 4 of Figure 5) of an engine in accordance with an embodiment of the present invention; and

Figure 5 is a part sectional view on line 5 - 5 of Figure 4.

Reference is first made to Figures 1a to d of the drawings, which illustrate part of a cylinder 10 and a piston 12 of an engine in accordance with an embodiment of

the present invention. The piston 12 is utilised to drive a rotating power shaft 14 in direction A via a piston rod 16, a bell crank 18 and a power cam 20. The bell crank 18 is pivotally mounted to the engine block, at 22, and includes a roller 24 for engaging the surface of the power cam 20. In addition, the crank 18 carries a further roller 26 for engaging a follower cam 28 mounted on the power shaft 14 adjacent the power cam 20. The configuration of the crank 18 and the cams 20, 28 translate the reciprocal movement of the piston 12 in the cylinder 10 to rotational movement of the power shaft 14. However, the movement of the piston 12 is not harmonic, as is the case in conventional reciprocating piston engines, as described below with reference to Figures 2 and 3 of the drawings.

Reference is first made to Figure 2, which illustrates the different relative stroke lengths between cycles 36 and 38 and cycles 32 and 34 of the four strokes of an engine cycle. It will be noted that the four strokes translate to a 360° rotation of the power shaft 14, rather than the 720° rotation which would be the case in a conventional four stroke engine. This offers a number of advantages, one being the lower rotational speed of the power shaft 14, and the gears and the like connected thereto.

The cams 20, 28 and crank 18 are configured such that only the induction stroke 32 and the compression stroke 34 are likely to employ the maximum stroke length (L_m) or near the maximum stroke length that is available, while the power or working stroke 36 and the exhaust stroke 38

utilise a reduced proportion (typically 50 - 100%) of the maximum available stroke length L_m , depending on the performance characteristics required. This feature may be utilised to avoid the additional piston travel that is present at "end" of the working stroke and "beginning" of the exhaust stroke in a conventional engine, but which adds little if anything to the efficiency and output of the engine. Further, the reduction in the length of the working stroke 36 and the exhaust stroke 38 facilitates a reduction in the degree of rotation of the power shaft 14 (R_w , R_e) and corresponding reduction in the time necessary to complete both these strokes. These savings can be transferred to induction stroke 32 (R_i) thereby giving the in-going charge more time to fill the cylinder 10 and hence leading to better air flow dynamics and thereby achieving greater volumetric efficiency. In some cases, this may reduce or obviate the need to provide turbo-chargers or super-chargers, as the longer induction stroke will allow a greater mass of air to be drawn into the cylinder.

Reference is now made to Figure 3, which illustrates typical velocity\time ($v\backslash t$) and acceleration\time ($a\backslash t$) graphs for the piston 12 over the four strokes as illustrated in Figures 1a to d.

During the compression stroke 34 (R_c), the configuration of the cams 20, 28 is such that the piston 12 initially accelerates and then travels at constant velocity (V_o), ignition of the charge commencing at a latter stage of the constant velocity period. The increasing and then

constant velocity of the piston 12 creates a positive and stable pressure gradient or pressure wave in front of the piston 12 and, with appropriate combustion chamber form, will assist in minimising turbulence in the cylinder 10, whereby the pressure wave having moved into the combustion space will interact with the advancing flame front from the point of ignition thereby increasing the flame speed and hence shorten the overall combustion process, such that combustion of the charge occurs evenly and in a relatively short time interval. The greater stability within the combustion chamber prior to the point of ignition facilitates more complete combustion, reducing output of CO and HC, and also reduces production of NO_x.

The piston 12 decelerates sharply following ignition, minimising the length of time where the mixture is maintained at high pressure and temperature. This contrasts with conventional engines, in which the relatively slow speed of the piston following ignition, up to and after TDC, results in the burning charge being maintained at high temperature and pressure for a relatively long period, increasing the likelihood of the creation of undesirable combustion products, particularly NO_x.

The piston movement over the remaining working, exhaust and induction strokes 36, 38, 32 follows a more regular pattern, but may be readily altered by changing the cam profiles to suit required engine or fuel characteristics.

Reference is now made to Figures 4 and 5 of the drawings, which illustrate a single cylinder four stroke engine 50 in accordance with an embodiment of the present invention, and which engine operates as described above with reference to Figures 1, 2 and 3. The upper end of the engine 52 is from a Suzuki (Trade Mark) motorcycle engine and is substantially conventional with the bottom end of the engine including an arrangement of cams and cranks in accordance with a preferred embodiment of the present invention. For ease of reference, the components of the engine bottom end 52 have been identified with same reference numerals as used in relation to Figure 1.

From the above description it will be clear to those of skill in the art that the engine configuration and operation as described above offers numerous significant advantages over conventional piston engines. Further, it will be clear to those of skill in the art that the desired pattern of piston movement, to achieve better overall combustion performance at the commencement of combustion and during the combustion process, may be achieved using many other mechanical arrangements in addition to the illustrated arrangement. For example, by provision of suitably profiled cams it will be possible to operate a two stroke engine, and of course engines in accordance with the present invention may have more than one cylinder; a horizontally opposed or broad V cylinder configuration is particularly suited to the cam and bell crank arrangement as described above.

CLAIMS

1. A method of operating an internal combustion reciprocating piston engine, the method comprising the steps of:

5 moving a piston within a chamber to compress a charge contained therein; and

igniting the compressed charge while the piston is being moved in the chamber at substantially constant or increasing velocity.

10 2. The method of claim 1, wherein the piston velocity is substantially constant or increasing during the last 25% - 1% of the compression stroke.

3. The method of claim 1 or 2, wherein ignition of the charge takes place within the remaining 5% of the
15 compression stroke before TDC.

4. The method of claim 1, 2 or 3, wherein the piston is moving at or around its maximum velocity at ignition.

5. The method of any of the preceding claims wherein at least one of the length, duration and pattern of at least
20 one piston stroke differs from the length, duration and pattern of another stroke.

6. The method of claim 5, wherein the engine operates on a four stroke cycle.

7. The method of claim 6, wherein movement of the piston produces rotation of a power output member, the four
5 strokes corresponding to a 360° rotation of the output member.

8. The method of any of the preceding claims wherein the engine operates on a four stroke cycle and the piston is coupled to a rotating power output member, the four strokes
10 corresponding to a 360° rotation of the output member.

9. The method of claim 6, 7 or 8, wherein at least one of the length and duration of the stroke of the expansion or power cycle is shorter than another stroke.

10. The method of claim 9, wherein the duration of the
15 expansion or power stroke is in proportion to the corresponding degree of rotation of the output member.

11. The method of claim 9 or 10, wherein one of the length or duration of the stroke of the exhausting cycle corresponds to the expansion stroke length.

20 12. The method of claim 11, wherein the duration of the exhausting stroke corresponds to a 90° rotation of the output member.

13. The method of claim 11, wherein the duration of the exhausting stroke corresponds to less than a 90° rotation of the output member.

5 14. The method of any of claims 6 to 13 wherein at least one of the length and duration of the stroke of the induction cycle is longer than another stroke.

15. The method of any of claims 6 to 13, wherein the induction stroke corresponds to a rotation of between 80° and 150° of the output member.

10 16. The method of any of claims 6 to 15, wherein compression stroke length corresponds to the induction stroke length.

15 17. The method of any of claims 6 to 16, wherein the compression stroke corresponds to a rotation of less than 90° of the output member.

18. The method of any of the preceding claims, wherein maximum torsional effect is applied to an output member coupled to the piston during an initial portion of the power stroke of the piston.

20 19. A method of operating an internal combustion reciprocating piston engine wherein maximum torsional effect is applied to an output member coupled to the piston

during an initial portion of the power stroke of the piston.

20. An internal combustion engine in which a piston is reciprocally movable in a piston chamber to compress a charge which is ignited during a latter portion of a compression stroke, the engine comprising:

a rotating power output member; and

a connection between a piston and said power output member, characterised in that said connection includes means for moving the piston at a substantially constant or increasing velocity at the point of ignition.

21. The engine of claim 20 wherein the connection between the piston and the power output member includes one or more cams.

22. The engine of claim 21, further comprising an engine block and wherein the connection between the piston and the engine includes a power cam and a follower cam both coupled to the power output member and a bell crank pivotally mounted to the engine block and pivotally coupled to the piston and having rollers for engaging the power cam and the follower cam.

23. The engine of claim 20, 21 or 22, wherein the connection between the piston and the output member is arranged such that maximum torsional effect is applied to

the output member during an initial or earlier portion of the power or working stroke.

24. A method of operating a reciprocating piston machine wherein at least one of the length, duration and pattern of
5 at least one piston stroke differs from the length, duration and pattern of another stroke.

25. The method of claim 24, wherein the machine is an engine operating on a four stroke cycle.

26. The method of claim 25, wherein movement of the piston
10 produces rotation of a power output member, the four strokes corresponding to a 360° rotation of the output member.

27. A method of operating a four stroke cycle reciprocating piston engine having a piston coupled to a
15 rotating power output member, wherein the four strokes correspond to a 360° rotation of the output member.

28. The method of claim 25, 26 or 27, wherein at least one of the length and duration of the stroke of the expansion or power cycle is shorter than another stroke.

29. The method of claim 28, wherein the duration of the expansion or power stroke is in proportion to the
20 corresponding degree of rotation of the output member.

30. The method of claim 28 or 29, wherein one of the length or duration of the stroke of the exhausting cycle corresponds to the expansion stroke length.

5 31. The method of claim 30, wherein the duration of the exhausting stroke corresponds to a 90° rotation of the output member.

32. The method of claim 30, wherein the duration of the exhausting stroke corresponds to less than a 90° rotation of the output member.

10 33. The method of any of claims 25 to 32 wherein at least one of the length and duration of the stroke of the induction cycle is longer than another stroke.

34. The method of any of claims 25 to 32, wherein the induction stroke corresponds to a rotation of between 80°
15 and 150° of the output member.

35. The method of any of claims 25 to 34, wherein compression stroke length corresponds to the induction stroke length.

20 36. The method of any of claims 25 to 35, wherein the compression stroke corresponds to a rotation of less than 90° of the output member.

37. A method of operating a two stroke reciprocating piston engine having a piston coupled to a rotating power output member, wherein the two strokes correspond to a 180° rotation of the output member.

5 38. A reciprocating piston machine in which at least one of the length, duration and pattern of at least one piston stroke differs from the length, duration and pattern of another stroke.

10 39. The machine of claim 38 in which the piston is coupled to a rotating power output member.

40. A four stroke reciprocating piston machine having a piston coupled to a rotating power output member, the four strokes corresponding to a 360° rotation of the output member.

15 41. A two stroke reciprocating piston machine having a piston coupled to a rotating power output member, the two strokes corresponding to a 180° rotation of the output member.

20 42. The engine of claim 39, 40 or 41, wherein the connection between the piston and the power output member includes one or more cams.

43. The engine of claim 42, further comprising an engine

block and wherein the connection between the piston and the engine includes a power cam and a follower cam both coupled to the power output member and a bell crank pivotally mounted to the engine block and pivotally coupled to the piston and having rollers for engaging the power cam and the follower cam.

44. A method of operating a reciprocating piston machine in which a piston is connected to a rotating member and moves in one direction during an induction stroke and in the opposite direction during a compression stroke, and the degree of rotation of the rotating member is greater over said induction stroke.

45. A method of operating a four-stroke reciprocating piston machine in which a piston is connected to a rotating member and moves in one direction during the first and third strokes, providing induction and expansion, and in the opposite direction during the second and fourth strokes, providing compression and exhaust, whereby the stroke length of the induction stroke and the compression stroke is greater than the stroke length of the expansion stroke and the exhaust stroke.

1 / 4

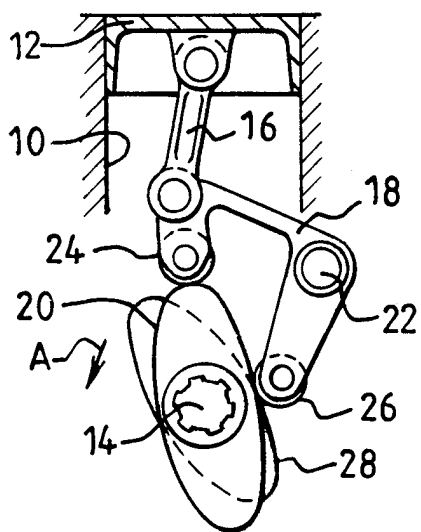


FIG. 1a

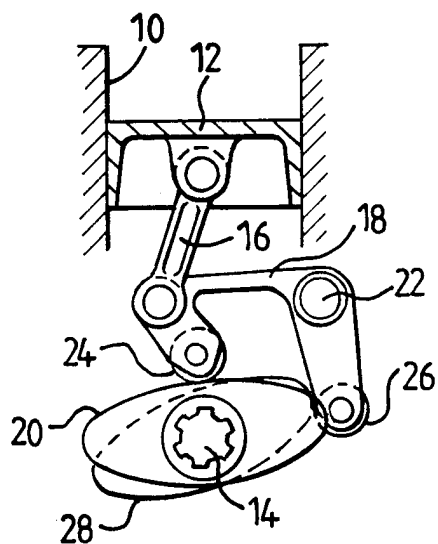


FIG. 1b

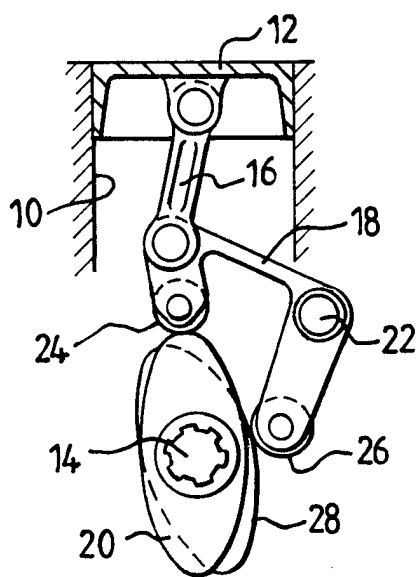


FIG. 1c

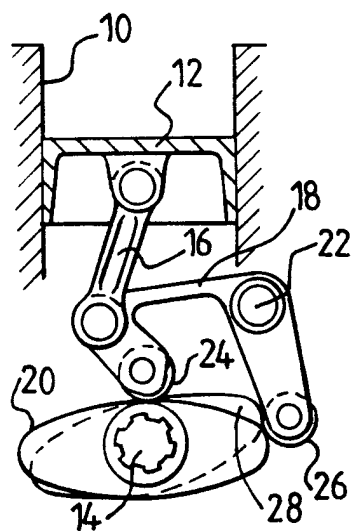


FIG. 1d

2/4

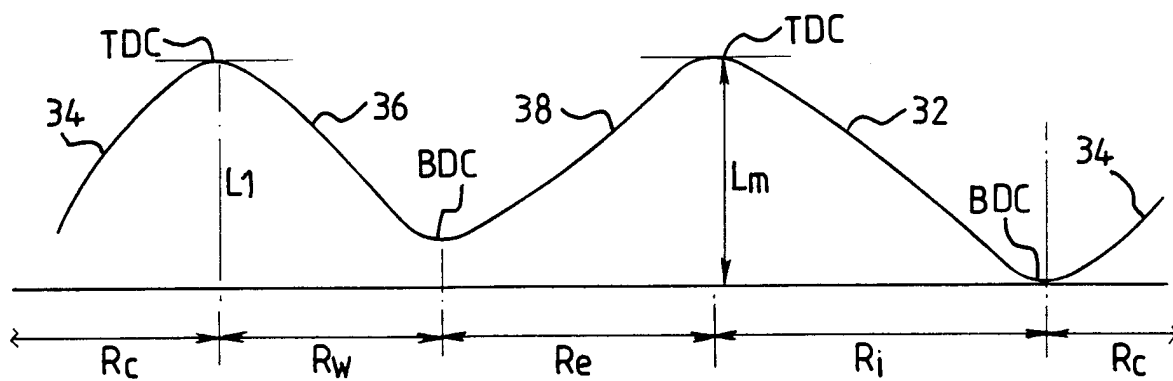


FIG. 2

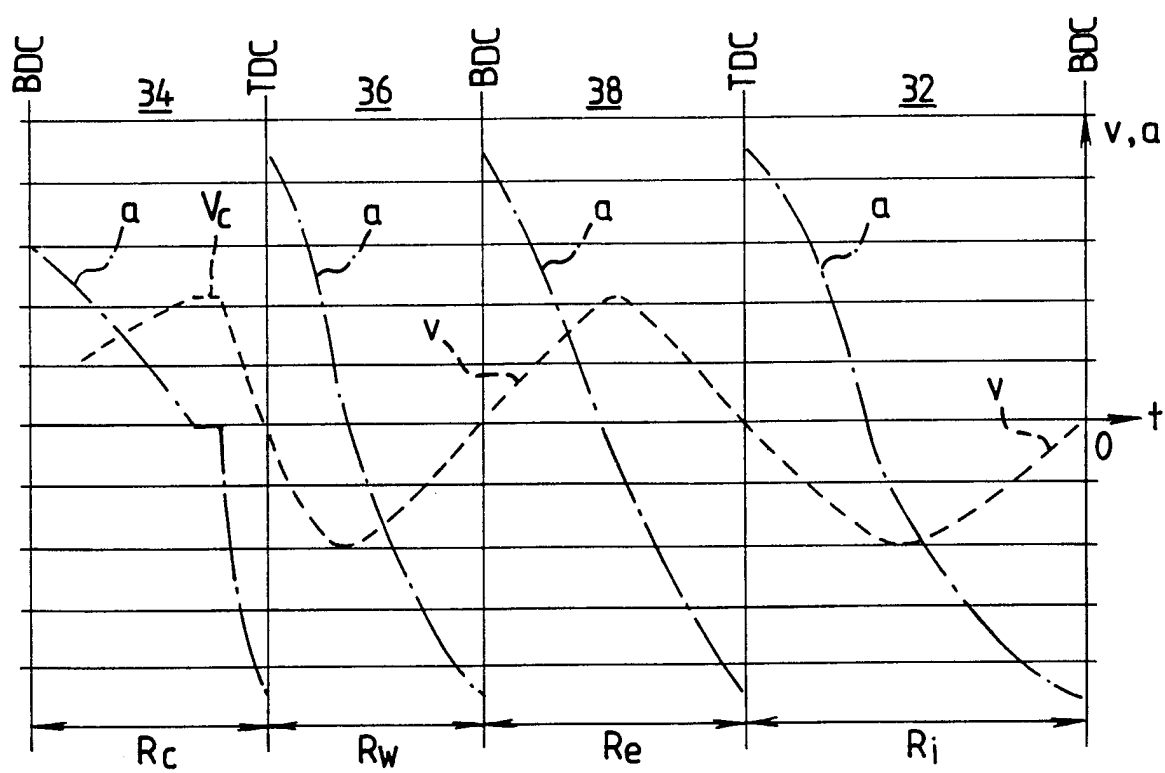


FIG. 3

3/4


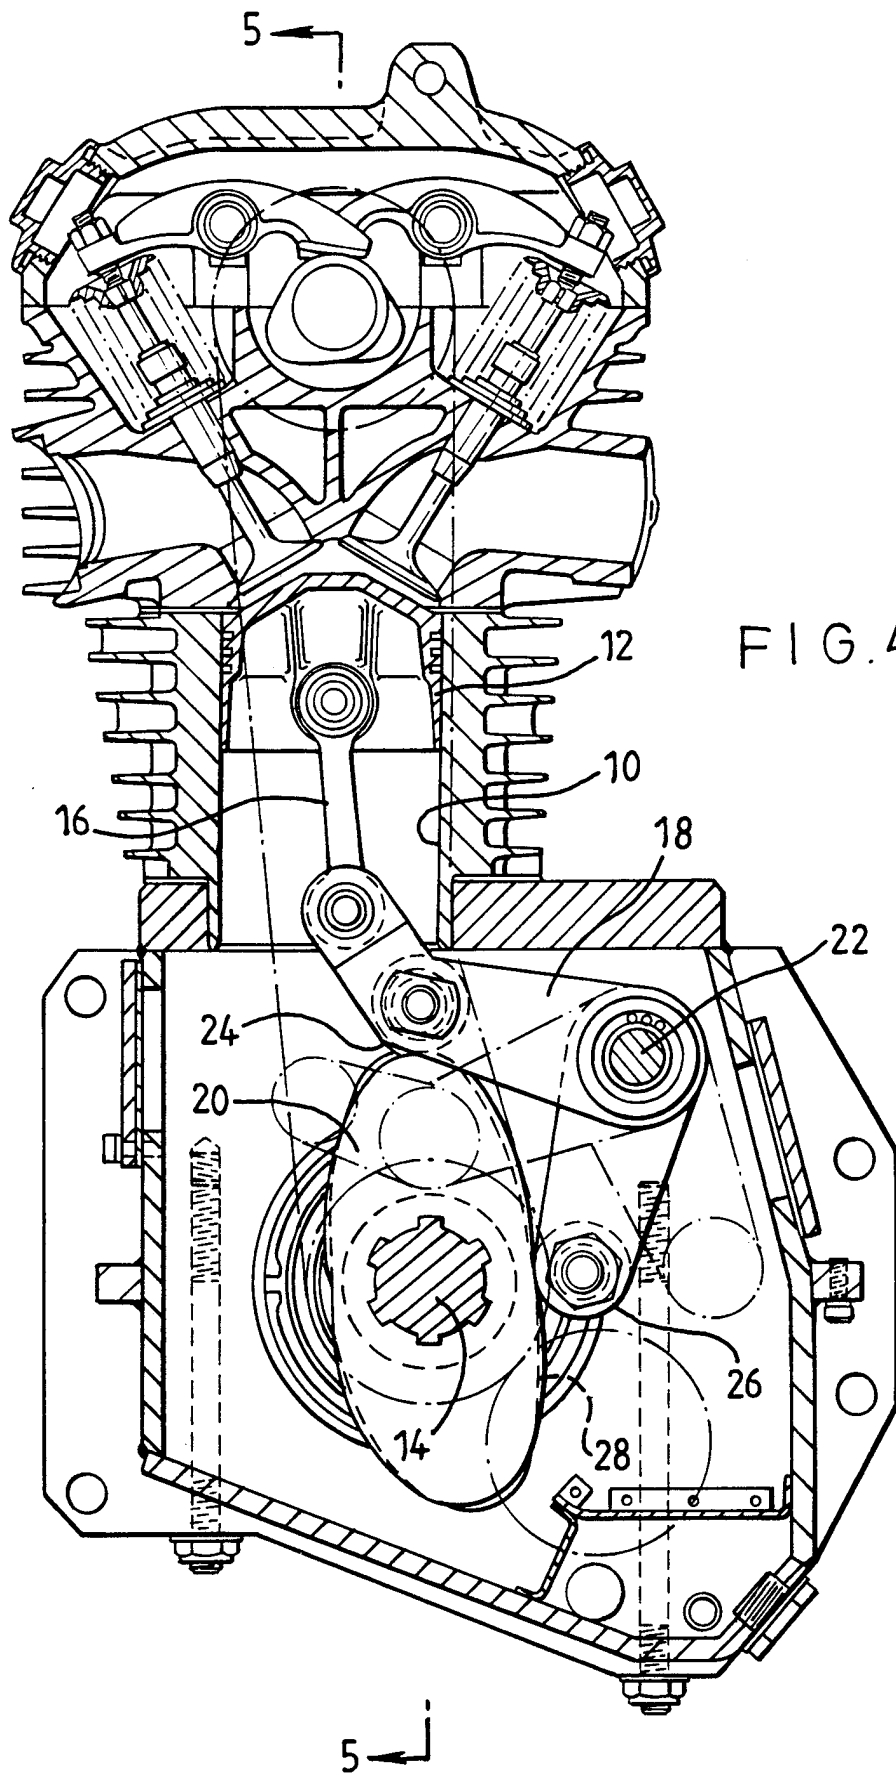


FIG. 5

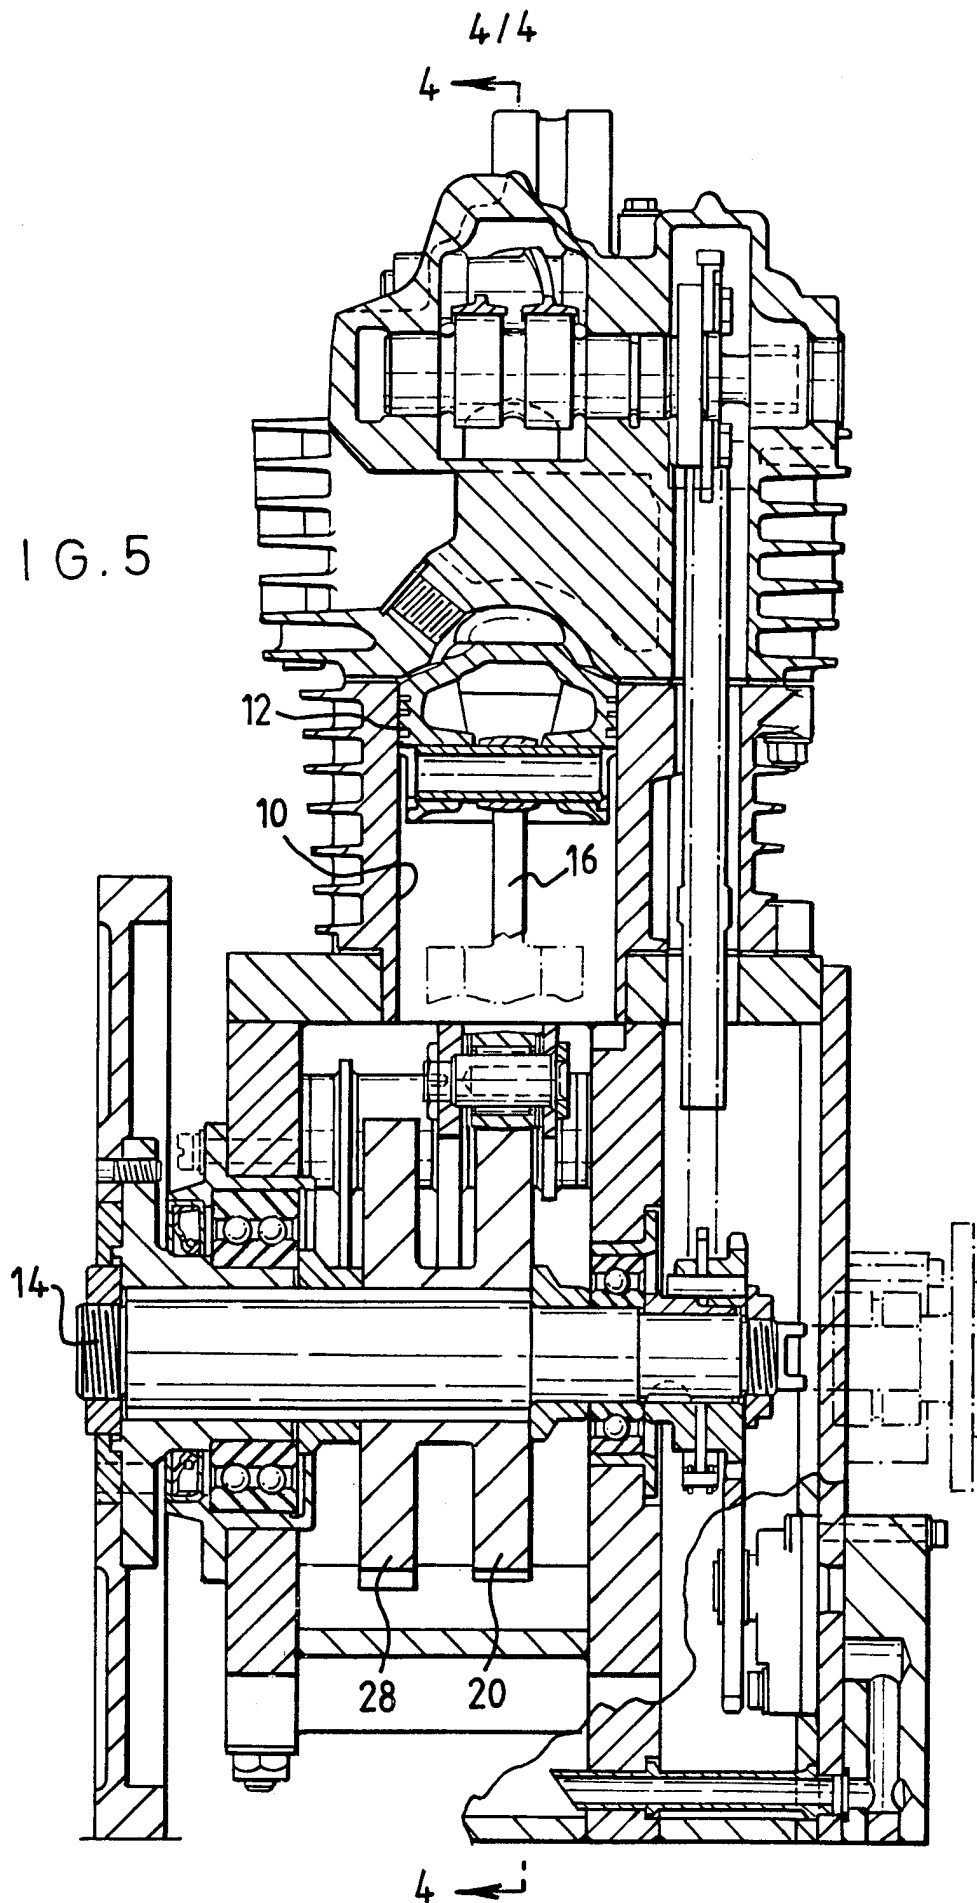

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/01820

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F01B9/06 F02B41/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 F01B F02B F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 93 13336 A (ENVIRONMENTAL ENGINES LTD) 8 July 1993 see figure 1 see page 1, line 1 - page 7, line 23 see claims 1-10 ---	1-19, 24-36, 38, 39, 42-45
A	US 4 934 344 A (PERR JULIUS P) 19 June 1990 see figure 1 see abstract	1-19
X	see claims 1-19 ---	20-36, 40, 42-45
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

2 October 1998

Date of mailing of the international search report

09/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Wassenaar, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/01820

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 310 632 A (MARCHETTI) 2 May 1929 see figure 1 see claims 1-4 ---	1-18, 43-45
A	DE 24 13 947 A (CONSTANT GUY) 17 October 1974 see figures 2,5,6 see claims 1-10 ---	1-18,37, 41,42
A	FR 961 284 A (ARDAENS) 9 May 1950 see figure 2 see abstract -----	1-18, 40-42, 44,45

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/01820

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9313336 A	08-07-1993	AU 3167593 A	28-07-1993
US 4934344 A	19-06-1990	NONE	
GB 310632 A		NONE	
DE 2413947 A	17-10-1974	FR 2273453 A	26-12-1975
		FR 2264186 A	10-10-1975
		JP 50025910 A	18-03-1975
FR 961284 A	09-05-1950	NONE	