

599467

FORM 1

SPRUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

APPLICATION FOR A STANDARD PATENT

LODGED AT SUB-OFFICE
14 MAR 1988
Sydney

Shell Internationale Research Maatschappij B.V., a Netherlands Company, of Carel van Bylandtlaan 30, 2596 HR, The Hague, THE NETHERLANDS, hereby apply for the grant of a standard patent for an invention entitled:

Method for Starting up a Partial Combustion Process

which is described in the accompanying complete specification.

Details of basic application(s):-

Basic Appl. No: Country:

8706135 UNITED KINGDOM

Application Date:

16 March 1987



The address for service is:-

Spruson & Ferguson
Patent Attorneys
Level 33 St Martins Tower
31 Market Street
Sydney New South Wales Australia

DATED this ELEVENTH day of MARCH 1988

Shell Internationale Research Maatschappij B.V.

By:

M. J. Anderson

Registered Patent Attorney

TO: THE COMMISSIONER OF PATENTS

OUR REF: 51524

S&F CODE: 61750


APPLICATION ACCEPTED AND AMENDMENTS

5845/2

ALLOWED

3 - 5 - 90

FEES STAMP TO VALUE
\$1.30 ATLAS
MAIL OFFICER 10

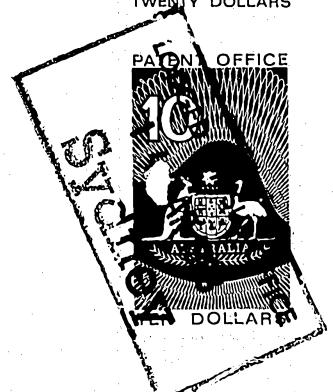

SPRUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952

DECLARATION IN SUPPORT OF A
CONVENTION APPLICATION FOR A PATENT

In support of the Convention Application made for a patent for an invention entitled:

Method for starting up a partial combustion process.

I, Onno Aalbers, of Carel van Bylandtlaan 30, 2596 HR The Hague, the Netherlands, do solemnly and sincerely declare as follows:-

1. I am authorised by SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V., the applicant for the patent to make this declaration on its behalf.
2. The basic application(s) as defined by Section 141 of the Act was/were made in Great Britain on 16th March, 1987 by Shell Internationale Research Maatschappij B.V.
3. Maarten Johannes VAN DER BURGT, a Netherlands citizen of Carel van Bylandtlaan 30, 2596 HR The Hague, the Netherlands.

(respectively), is/are the actual inventor(s) of the invention and the facts upon which the applicant is entitled to make the application are as follows:

The Applicant is the assignee of the actual inventor(s).

4. The basic application(s) referred to in paragraph 2 of this Declaration was/were the first application(s) made in a Convention country in respect of the invention the subject of the application.

DECLARED at The Hague this

22nd

day of

February 19 87

.....
Onno Aalbers

TO: THE COMMISSIONER OF PATENTS
AUSTRALIA

(12) PATENT ABRIDGMENT (11) Document No. AU-B-13068/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 599467

(54) Title

METHOD FOR STARTING UP A PARTIAL COMBUSTION PROCESS

International Patent Classification(s)

(51)⁴ **C10J 003/00**

(21) Application No. : **13068/88**

(22) Application Date : **14.03.88**

(30) Priority Data

(31) Number **8706135** (32) Date **16.03.87** (33) Country **GB UNITED KINGDOM**

(43) Publication Date : **15.09.88**

(44) Publication Date of Accepted Application : **19.07.90**

(71) Applicant(s)

SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.

(72) Inventor(s)

MAARTEN JOHANNES VAN DER BURGT

(74) Attorney or Agent

SPRUSON & FERGUSON

(57) Claim

1. A method for starting up a partial combustion process, using a burner, wherein finely divided carbon-containing fuel is supplied to a reactor or gasifier and an oxygen-containing gas is supplied separately from the said fuel to the reactor or gasifier and is mixed with the said fuel adjacent the outlet of the burner in the reactor or gasifier, comprising the step of supplying under appropriate process conditions during a predetermined period a low rank or impregnated particulate carbon-containing fuel to the reactor prior to the start of the partial combustion process, said low rank or impregnated fuel spontaneously reacting with oxygen when brought into contact with the said oxygen-containing gas and subsequently switching the burner to a less reactive feed.

599467

S & F Ref: 51524

FORM 10

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE:

Class Int Class

Complete Specification Lodged:

Accepted:

Published:

Priority:

Related Art:

This document contains the
amendments made under
Section 49 and is correct for
printing.

Name and Address
of Applicant:

Shell Internationale Research Maatschappij B.V.
Carel van Bylandtlaan 30
2596 HR
The Hague
THE NETHERLANDS

Address for Service: Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Complete Specification for the invention entitled:

Method for Starting up a Partial Combustion Process

The following statement is a full description of this invention, including the
best method of performing it known to me/us

A B S T R A C T

METHOD FOR STARTING UP A PARTIAL
COMBUSTION PROCESS

A method for starting up a partial combustion process, using a burner, wherein finely divided carbon-containing fuel is supplied to a reactor or gasifier and an oxygen-containing gas is supplied separately from the said fuel to the reactor or gasifier and is mixed with the said fuel adjacent the outlet of the burner in the reactor or gasifier. During a predetermined period a low rank particulate carbon-containing fuel is supplied to the reactor prior to the start of the partial combustion process, said low rank fuel spontaneously reacting with oxygen when brought into contact with the said oxygen-containing gas and subsequently switching the burner to a less reactive feed.

METHOD FOR STARTING UP A PARTIAL
COMBUSTION PROCESS

The invention relates to a method for starting up a partial combustion or gasification process using a burner wherein finely divided carbon-containing fuel is supplied to a reactor or gasifier and an oxygen-containing gas is supplied separately from the said fuel to the reactor or gasifier and is mixed with the said fuel adjacent the outlet of the burner in the reactor or gasifier. In particular, such gasification processes are used for preparing synthesis gas.

Synthesis gas, consisting mainly of carbon monoxide and hydrogen, is produced by partial combustion of finely divided fuel with a substoichiometric amount of a combustion medium like pure oxygen or an oxygen-containing gas such as air. Depending on the composition of the combustion medium the synthesis gas may also contain other substances, which may be useful or may be considered pollutants.

In gasification processes, usually fuel in a finely divided state is passed with a carrier gas to a reactor zone via a burner, while the combustion medium is either added to the fuel flow inside the burner or separately introduced into said reactor zone. Great care must be taken that the reactants are effectively mixed with each other. If the reactants are not brought into intimate contact with each other, the oxygen and fuel flow will follow at least partially independent paths inside the reactor. Since the reactor zone is filled with mainly hot carbon monoxide and hydrogen, the oxygen will rapidly react with these gases instead of with the fuel. The so formed very hot combustion products carbon dioxide and steam will also follow independent paths having poor contact with the relatively cold fuel flow. This behaviour of the oxygen will result in local hot spots in the reactor, thereby possibly causing

damage to the reactor refractory lining and increased heat fluxes to the burner(s) applied.

Sufficient mixing of the fuel and the oxygen can be achieved by adding the oxygen to the fuel flow in the burner itself. A 5 disadvantage of this method is that, in particular at high pressure gasification, the design and operation of the burner are highly critical. The reason for this is that the time elapsing between the moment of mixing and the moment the fuel/oxygen mixture enters 10 into the reactor should be invariably shorter than the combustion induction time of the mixture, to prevent premature combustion inside the burner.

Moreover, the velocity of the mixture inside the burner should be higher than the flame propagation velocity in order to prevent flashback. However, the combustion induction time shortens and the 15 flame propagation velocity increases at a rise in gasification pressure. Further, if the burner is operated at a low fuel load, the combustion induction time or flashback condition might easily be reached in the burner itself, resulting in overheating and possibly damage to the burner.

The problems of premature combustion in the burner itself or 20 flashback will not occur if the fuel and the oxygen are mixed outside the burner in the reactor space itself.

In order to start the gasification process, a separate 25 start-up (ignition) burner is used to ignite the gasification process. Usually, oil- or gasfired start-up burners are applied.

However, the handling of such separate start-up burners is complicated. It is therefore an object of the invention to provide a method for starting up a gasification process which makes the use 30 of separate start-up burners (ignition burners) superfluous.

It is another object of the invention to provide a simpler, faster and safer operation of gasification processes than can be obtained by means of conventional separate start-up burners.

The invention therefore provides a method for starting up a 35 partial combustion process, using a burner, wherein finely divided carbon-containing fuel is supplied to a reactor or gasifier and an oxygen-containing gas is supplied separately from the said fuel to

the reactor or gasifier and is mixed with the said fuel adjacent the outlet of the burner in the reactor or gasifier, comprising the step of supplying under appropriate process conditions during a predetermined period a low rank or impregnated-particulate carbon-containing fuel to the reactor prior to the start of the partial combustion process, said low rank fuel spontaneously reacting with oxygen when brought into contact with the said oxygen-containing gas and subsequently switching the burner to a less reactive feed.

5 The present invention makes a favourable use of the spontaneous combustion of low rank particulate carbon containing fuel in oxygen and in particular the high reactivity of particulate low rank coal/oxygen mixtures. Suitable fuels are wood or dry peat.

10 Further, particulate low rank coal such as dried brown coal, brown coal having a relatively low moisture content or lignite react spontaneously with oxygen when brought into contact therewith.

15 An example of impregnated particulate carbon-containing fuel is coal treated with a colloidal iron solution, hydrazine phosphoreous solution and the like.

20 After the start-up of the gasification process by means of such a spontaneous ignition of the reactants supplied to the reactor or gasifier the burner can be switched to a less reactive feed such as hard coal, coke, char and the like.

25 The invention will now be described in more detail by way of example by reference to the following Examples.

Example I

30 A quantity of 0.12 kg/s dried particulate brown coal (18% water), 90% of which had a particle size less than 100 μm , was supplied during a period of 1 second to 10 minutes to the reactor with a velocity of 15 m/s at a temperature of 90 °C..

The pressure in the reactor was about 10 bar and the oxygen content in the oxygen containing gas supplied to the reactor was above 90%. The quantity of the oxygen containing gas was 0.06 kg/s supplied at a temperature of 200 °C with a velocity of 110 m/s.

Example II

5 A quantity of a self-igniting low rank coal such as brown coal having a moisture content of less than 20% was supplied to the reactor during a period of 1 second to 10 minutes with a velocity of 12 m/s and a temperature of 90 °C.

10 The pressure in the reactor was about 25 bar and the oxygen content in the oxygen containing gas supplied at a temperature of 160 °C with a velocity of 80 m/s to the reactor was above 90%. The quantities of coal and oxygen were the same as in Example I.

Example III

15 A quantity of 0.12 kg/s of self-igniting low rank coal such as lignite wherein at least 90% thereof has a particle size less than 80 μm was supplied to the reactor during a period of 1 second to 10 minutes at a temperature of 90 °C with a velocity of 12 m/s.

20 The pressure in the reactor was about 10 bar and the oxygen content in the oxygen-containing gas was above 90%. The quantity (0.06 kg/s) of oxygen-containing gas was supplied at a temperature of 150 °C with a velocity of 80 m/s.

The following table represents advantageous ranges of the appropriate process conditions and relevant parameters:

TABLE A

	Oxygen	Low rank carbon-containing fuel
Water content	-	1.5-20%
Temperature	150-250 °C	90 °C
Velocity	80-150 m/s	10-15 m/s
Pressure	10-25 bar	10-25 bar
Particle size	-	90% < 90 μm
Particle size	-	80% < 100 μm
Period	1 second to 3 minutes	1 second to 3 minutes

- 5 -

Various modifications of the present invention will become apparent to those skilled in the art. Such modifications are intended to fall within the scope of the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS

1. A method for starting up a partial combustion process, using a burner, wherein finely divided carbon-containing fuel is supplied to a reactor or gasifier and an oxygen-containing gas is supplied separately from the said fuel to the reactor or gasifier and is
5 mixed with the said fuel adjacent the outlet of the burner in the reactor or gasifier, comprising the step of supplying under appropriate process conditions during a predetermined period a low rank or impregnated particulate carbon-containing fuel to the reactor prior to the start of the partial combustion process, said
10 low rank or impregnated fuel spontaneously reacting with oxygen when brought into contact with the said oxygen-containing gas and subsequently switching the burner to a less reactive feed.
2. The method as claimed in claim 1 wherein the said low rank fuel is supplied to the reactor or gasifier during a period of 1
15 second to 10 minutes.
3. The method as claimed in any one of claims 1 or 2 wherein the said low rank fuel is brown coal.
4. The method as claimed in claim 3 wherein the said brown coal is dried brown coal.
- 20 5. The method as claimed in claim 4 wherein at least 80% of the dried brown coal has a particle size less than 100 μm .
6. The method as claimed in any one of claims 1 or 2 wherein the said low rank fuel is lignite and wherein at least 90% thereof has a particle size less than 80 μm .
- 25 7. The method as claimed in any one of claims 1 or 2 wherein the said low rank fuel is brown coal having a moisture content of less than 20%.

8. A method for starting up a partial combustion process, using a burner, wherein finely divided carbon-containing fuel is supplied to a reactor or gasifier and an oxygen-containing gas is supplied separately from the fuel to the reactor or gasifier and is mixed with the fuel adjacent the outlet of the burner in the reactor or gasifier, substantially as hereinbefore described with reference to any one of Examples I to III.

DATED this NINETEENTH day of APRIL 1990
Shell Internationale Research Maatschappij B.V.

Patent Attorneys for the Applicant
SPRUSON & FERGUSON



KWK:8201U