



(22) Date de dépôt/Filing Date: 2009/10/21

(41) Mise à la disp. pub./Open to Public Insp.: 2010/05/04

(30) Priorité/Priority: 2008/11/04 (ES200803145)

(51) Cl.Int./Int.Cl. *F01D 25/16* (2006.01),
F02C 7/06 (2006.01), *F16C 35/00* (2006.01)


(71) Demandeur/Applicant:
INDUSTRIA DE TURBO PROPULSORES, S.A., ES

(72) Inventeurs/Inventors:
AGIRIANO, JON HERIZ, ES;
DIAZ, RAUL VAZQUEZ, ES;
ROBLES, DAVID CADRECHA, ES;
RODRIGO, SERGIO MONUX, ES;
CAMIO, ERLANTZ CRISTOBAL, ES

(74) Agent: SIM & MCBURNEY

(54) Titre : STRUCTURE DE SURFACE D'APPUI POUR TURBINE

(54) Title: BEARING SUPPORT STRUCTURE FOR TURBINE

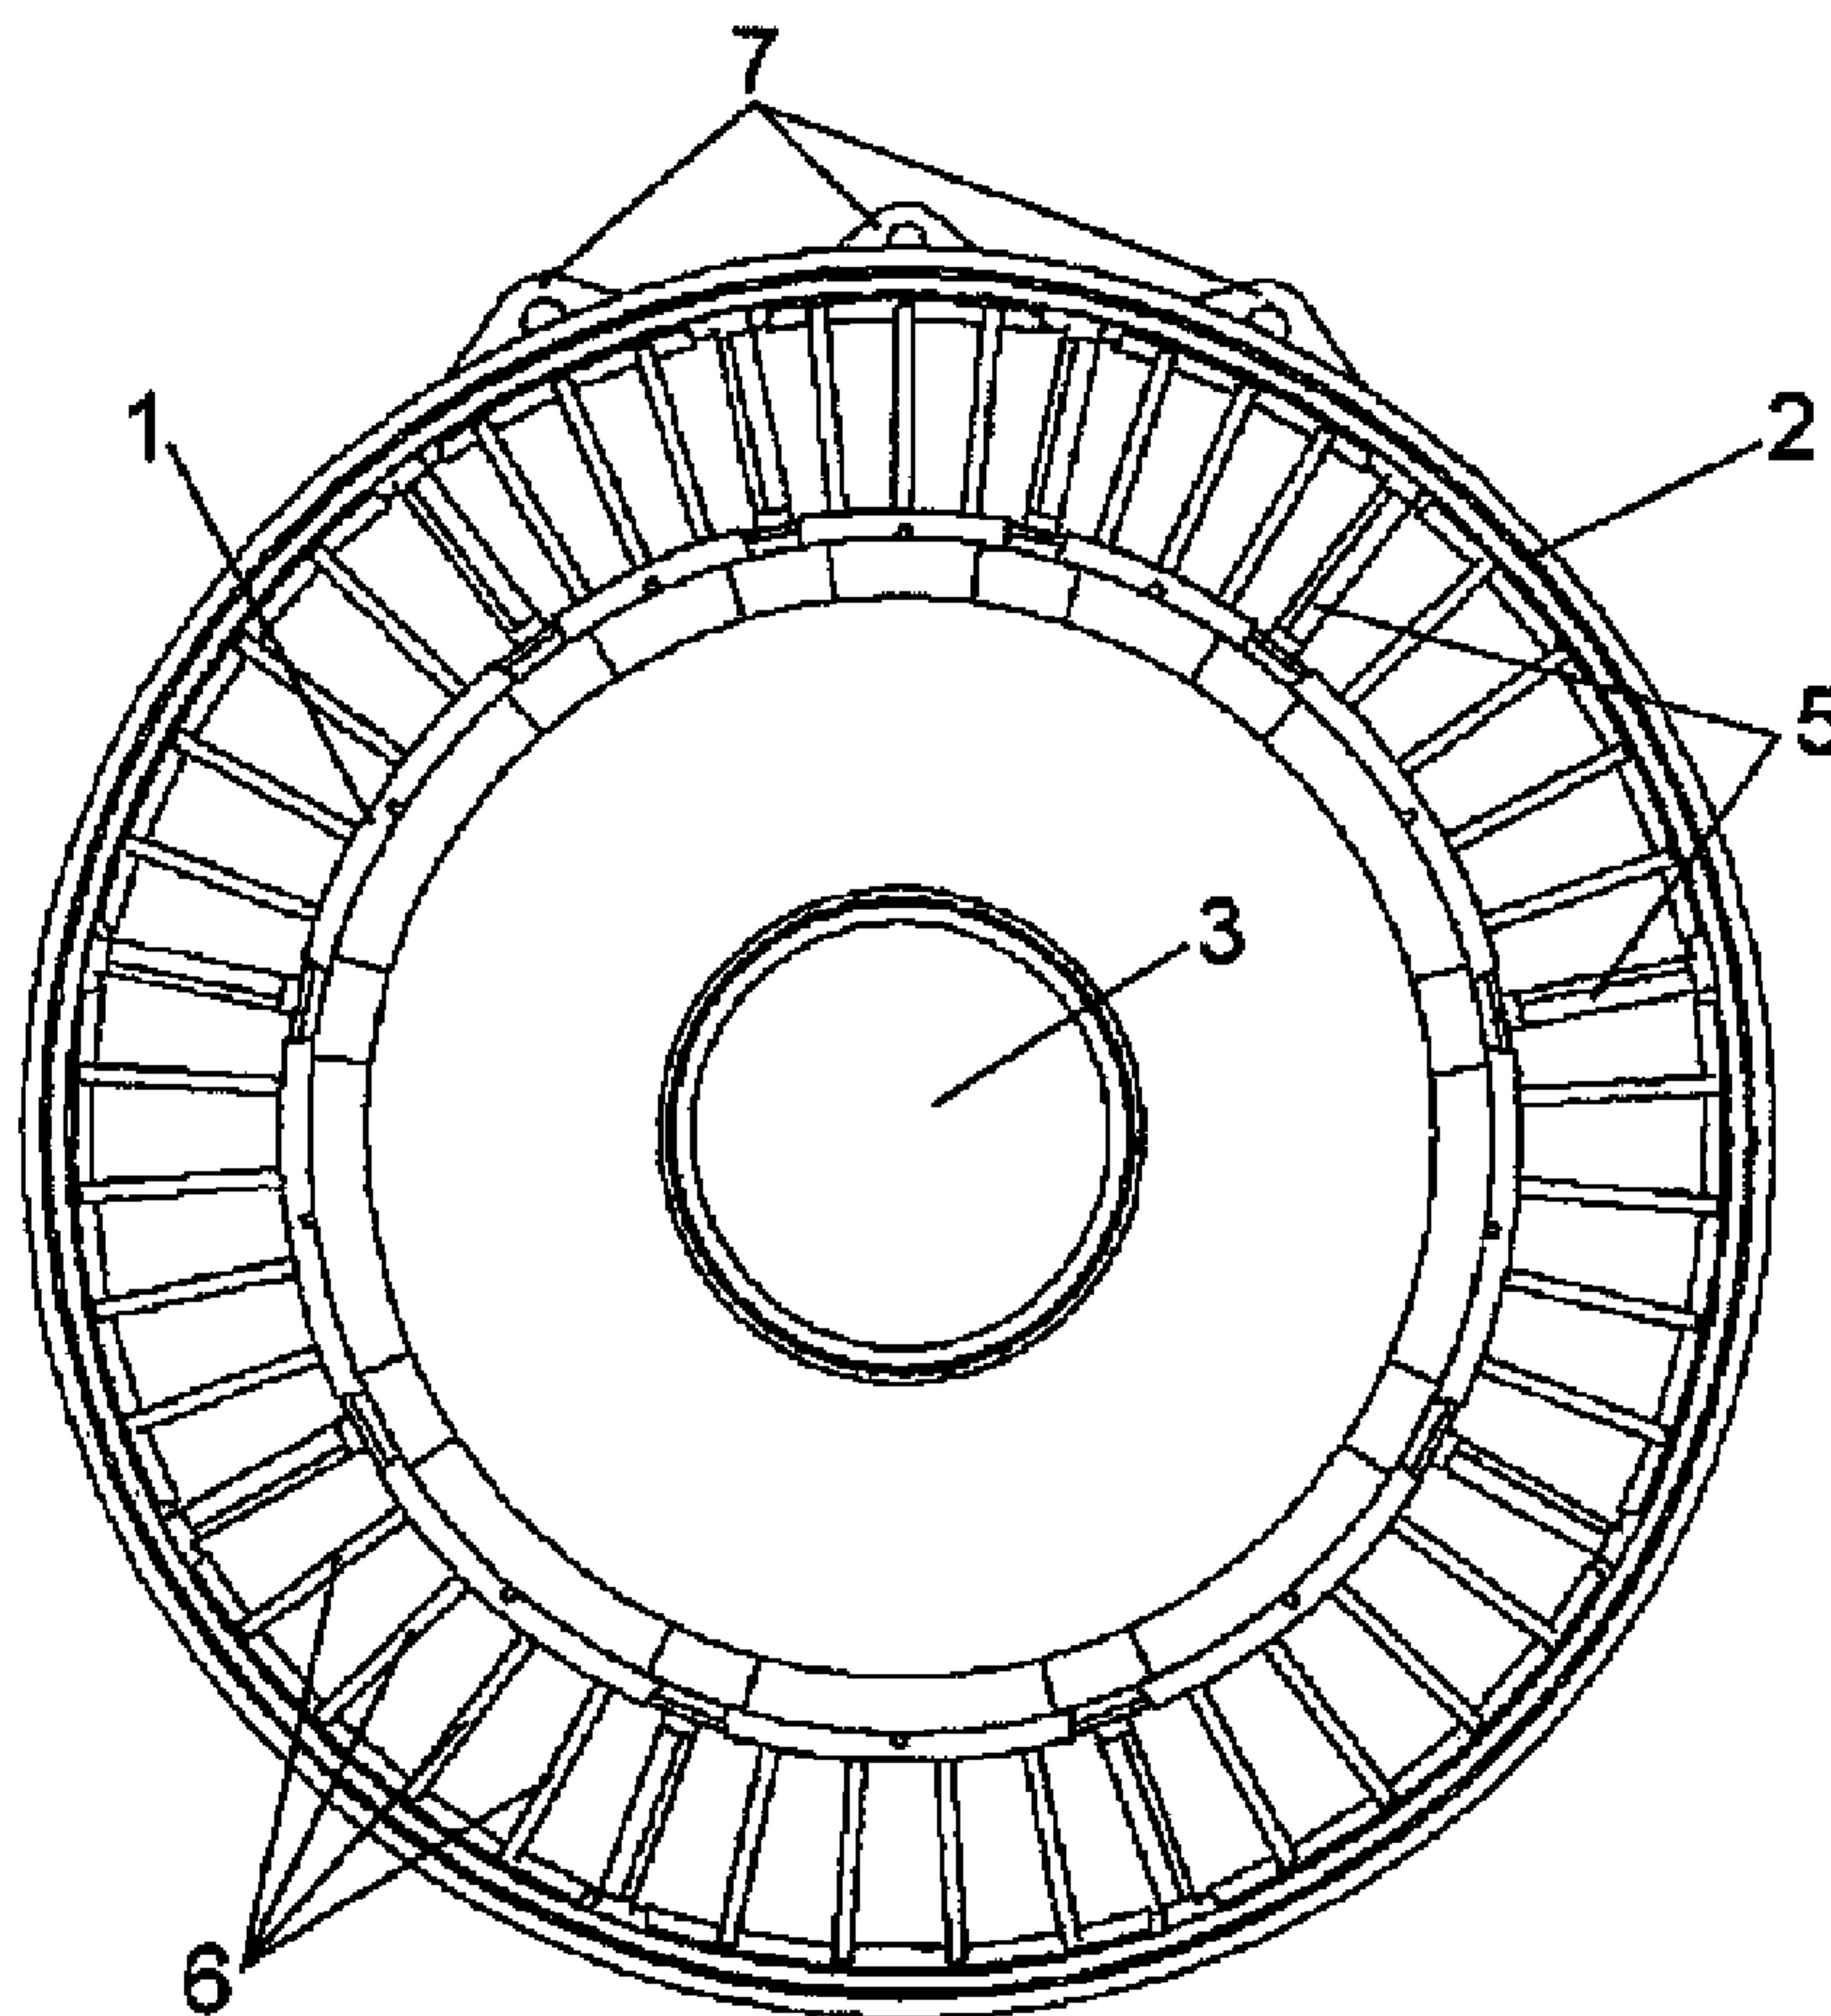

(57) Abrégé/Abstract:

Bearing support structure for turbines comprising an inner ring (1) and an outer ring (2) radially connected by means of structural hollows (5) and aerodynamic vanes (6) in a circumference-like arrangement between both rings (1, 2). The aerodynamic vanes (6)

(57) **Abrégé(suite)/Abstract(continued):**

are thinner and lighter than the structural vanes (5), and the number of structural vanes (5) depends exclusively on the loads of the bearing (3) housed in the structure to be transmitted to the anchoring points (7) of the engine assembly located in the outer ring (2), and on the amount of service fluids which must go through between the inner ring (1) and the outer ring (2), while the number of aerodynamic vanes (6) and their section depends exclusively on the aerodynamic requirements demanded from the support structure for the straightening of the turbine main flow. Thus, the structural vanes (5) fulfill only structural functions and the aerodynamic vanes (6) fulfill only aerodynamic functions.

- 14 -

SUMMARY

Bearing support structure for turbines comprising an inner ring (1) and an outer ring (2) radially connected by means of structural hollows (5) and aerodynamic vanes (6) in a circumference-like arrangement between both rings (1, 2). The aerodynamic vanes (6) are thinner and lighter than the structural vanes (5), and the number of structural vanes (5) depends exclusively on the loads of the bearing (3) housed in the structure to be transmitted to the anchoring points (7) of the engine assembly located in the outer ring (2), and on the amount of service fluids which must go through between the inner ring (1) and the outer ring (2), while the number of aerodynamic vanes (6) and their section depends exclusively on the aerodynamic requirements demanded from the support structure for the straightening of the turbine main flow. Thus, the structural vanes (5) fulfill only structural functions and the aerodynamic vanes (6) fulfill only aerodynamic functions.

15

BEARING SUPPORT STRUCTURE FOR TURBINE**Technical field of the invention**

5 The present invention refers to the technical field of turbines, specifically to the elements and configuration of gas turbines, and more specifically to structural support and rotation elements of turbines, and to the optimization thereof to improve the aerodynamics of the assembly, separating the strictly structural function from the aerodynamic one.

10

Background of the invention

For the housing of bearings in gas turbines, radial structures are used, where said bearings are housed inside them, and the turbine is fixed to its outer part. These
15 structures are formed by an inner ring where the bearing is housed and an outer ring where the turbine anchoring points and the fastening points of the engine assembly, which includes the turbine, are. Nowadays, the inner ring and the outer ring of these radial structures are joined together by a set of blades or vanes, with an aerodynamic function to straighten and direct the incoming flow in the most appropriate form, a
20 structural function to transmit the bearing loads to the anchoring points of the turbine arranged in the outer ring, and also to allow the passage of service fluids such as oil or air between the outside and the inside of the main fluid with a minimum aerodynamic impact, reason why some of the vanes must be hollow, so as to allow the passage of fluids through their interior. Therefore, the number of vanes needed between the inner
25 ring and the outer ring is determined by the level of loads to be transmitted between the bearing and the turbine, the quantity and variety of service fluids needed, and the aerodynamic requirements. This configuration presents a series of disadvantages derived from the fact that since the number of vanes depends on so many and so different factors, it is not possible to optimize the number, form and section of said
30 vanes without sacrificing some of the factors, for example, an improvement in the support function will worsen the aerodynamic properties, and vice versa. That is, if all vanes are the same it will not be possible to optimize all functions at the same time, instead, one of them will always be sacrificed to the others.

- 2 -

Therefore, it was desirable a support structure which attained an efficient turbine operation, and simultaneously improved all functions of said structure, avoiding the existing inconveniences in the previous systems of the state of the art.

5

Description of the invention

The present invention solves the existing problems of the state of the art by means of a bearing support structure for a turbine, specifically for the rear bearing of a gas turbine. This support structure is formed by an inner ring, where the bearing is housed and an
10 outer ring comprising in its outer perimeter some fastening points to the turbine and anchoring points to the engine assembly. In the present invention, the inner ring and the outer ring are radially connected by means of a series of vanes in a circumference-like arrangement between both rings, divided in structural vanes and aerodynamic vanes. The former will be in charge of support and load transmission functions
15 exclusively between the bearing and the anchoring points of the engine assembly, in the outer ring, and the function of service fluid passage, such as oil or air between the outside and the inside of the turbine operation fluid, that is why, they will be hollow. The latter, the aerodynamic ones, however, will be lighter than the structural vanes, and they will be in charge of aerodynamic functions exclusively, such as straightening the
20 main flow of the turbine operation.

Thus, the number of structural vanes in a circumference-like arrangement between the inner ring and the outer ring depends exclusively on the loads to be transmitted from the bearing to the anchoring points of the engine assembly in the outer ring, and on the
25 amount of service fluids which have to travel between the inner ring and the outer ring, and the number of aerodynamic vanes and their section depends exclusively on the aerodynamic requirements demanded from the support structure for the straightening of the turbine main flow.

30 With this separation of mechanical and aerodynamic functions by dividing vanes into structural and aerodynamic ones, it is attained the optimization of the mechanics and aerodynamics simultaneously, acting on the structural and aerodynamic vanes, respectively.

- 3 -

According to different embodiments of the invention, the aerodynamic vanes, which are the ones which will enable the turbine aerodynamic optimization, can be joined to the inner ring, to the outer one, or both, through different joining systems, in order to attain a firm union, which also provides the necessary aerodynamic properties to the structure.

One of these joining systems consists of using at least a two-wing metallic flat bar with an L-section, where one of the wings is joined to the aerodynamic vane and the other wing is joined to the corresponding ring. The aerodynamic vanes are joined to each one of the rings through at least one metallic flat bar. According to different embodiments, a flat bar can be used to join the vane to the inner ring and the other flat bar can be used to join the vane to the outer ring, or more than one flat bar for the union of the vane to each one of the rings. Preferably, two metallic flat bars are used, placing one of them at each side of the aerodynamic vane, creating a steadier and more secure union.

According to a particular embodiment of these unions through metallic flat bars, the aerodynamic vanes are joined through the flat bar to both rings, both the inner and the outer one, being firmly fixed to one of them and simply resting against the flat bar wing in the other. In this way, the fixing to the structure is efficiently attained, and furthermore the vanes will have certain mobility, favoring the effort release and improving aerodynamic properties.

According to an alternative embodiment, the aerodynamic vanes are fixed only to one of the rings, through a couple of metallic flat bars, leaving the other end of the vane free, which further favors its movement, for cases in which it is necessary.

Besides the metallic flat bars, there exist other systems for the union of aerodynamic vanes to the rings, such as grouping the aerodynamic vanes between two structural vanes through a membrane in one of its ends, which is fixed to one of the rings, or through two membranes, being each one of them fixed to one of the vane ends. These membranes can be joined to the rings in a rigid or detachable manner, through flanges, or they can be built-in with the other rings. It is also possible that, instead of the two membranes joining the rings, only one of them joins one of the rings, the other one remaining free, thus being one of the ends free to move.

- 4 -

The aerodynamic vanes can be contiguous or they can be partitioned, or divided into two parts, preferably by its central area, so that one of the parts is joined to the inner ring and the other part is joined to the outer ring.

5

Description of the drawings

For a better understanding of the invention, the following is an illustrative non-limiting description of an embodiment of the invention making reference to a series of drawings.

10

Figure 1 is a front view of the structure object of the present invention, with the circumference-like arrangement between the inner and outer ring of the differentiated structural and aerodynamic vanes.

15

Figure 2 is a front view of the structure object of the present invention, in which the aerodynamic vanes are joined only to the inner ring.

20

Figure 3 is a detailed view of the union of an aerodynamic vane to the inner ring and to the outer ring of the structure according to a particular embodiment, through metallic flat bars.

Figure 4 is a perspective view of the grouping of aerodynamic vanes according to a particular embodiment through two membranes with flanges.

25

Figure 5 is a perspective view of an alternative grouping of aerodynamic vanes through two membranes without flanges.

30

Figure 6 is a longitudinal sectional view according to a particular embodiment of the union of the vanes to the rings, in which the aerodynamic vanes are joined through membranes in a rigid manner to the inner and outer ring.

35

Figure 7 is a longitudinal sectional view according to another particular embodiment of the union of the vanes to the rings, in which the aerodynamic vanes are joined through membranes in a rigid manner to the inner ring and in a detachable manner to the outer ring.

- 5 -

Figure 8 is a front view of a structure, in which according to a particular embodiment the aerodynamic vanes are divided into two parts, being one of the parts joined to the inner ring and the other part, to the outer ring.

5 In these figures, reference is made to the following set of elements:

1. outer ring
2. inner ring
3. bearing
4. turbine fastening points
- 10 5. structural vanes
6. aerodynamic vanes
7. anchoring points of the engine assembly
8. metallic flat bars
9. first wing of the metallic flat bars
- 15 10. second wing of the metallic flat bars
11. aerodynamic vanes packages
12. inner membrane
13. outer membrane
14. flanges

20

Description of preferred embodiments of the invention

As it can be seen in the drawings, particularly in figures 1, 2 and 8, the object of the present invention is a bearing support structure for turbines, specifically gas turbines,
 25 formed by an inner ring 1, where the bearing 3 is housed for the rotation of the turbine, and an outer ring 2, which in its outer perimeter has some fastening points 4 for the turbine and some anchoring points 7 of the engine assembly. The inner 1 and outer ring 2 are connected by a plurality of vanes 5, 6, radially placed in a circumferential arrangement between them.

30

These vanes 5, 6 are divided into structural vanes 5 and aerodynamic vanes 6. The structural vanes 5 are in charge of transmitting the bearing 3 loads to the anchoring points 7 of the engine assembly which are in the outer ring 2, and of being the passage of service fluids, such as air, water or oil between the inner ring 1 and the outer ring 2.
 35 The aerodynamic vanes 6 are in charge of providing the aerodynamic requirements to

- 6 -

the structure, such as for example, straightening the main flow of the turbine operation. Due to the difference between the function of both types of vanes 5, 6, the aerodynamic vanes 6 are lighter than the structural vanes 5.

- 5 In the present bearing support structure for turbines, the mechanical or structural function and the aerodynamic one are totally separate, that is, the structural vanes 5 only fulfill structural functions and the aerodynamic vanes 6 only fulfill aerodynamic functions.
- 10 Therefore, the number of structural vanes 5 placed between the inner ring 1 and the outer ring 2 depends exclusively on the loads to be transmitted between the bearing 3 and the anchoring points 7 of the engine assembly located in the outer ring 2, and on the quantity and type of service fluids which need to go through between the inner ring 1 and the outer ring 2, while the number of aerodynamic vanes 6 and their section
- 15 depend exclusively on the aerodynamic requirements demanded by the support structure for the straightening of the main flow of the turbine operation.

According to different particular embodiments of the invention, the aerodynamic vanes 6 can be joined at one of its ends to the inner ring 1, or at the other end to the outer ring 2, or they can be joined to both rings 1, 2. Figure 2 shows an embodiment where

20 the aerodynamic vanes are only joined to the inner ring 1.

For the union of the aerodynamic vanes 6 to the rings there exist several methods.

- 25 A preferred embodiment of these union means consists of at least a metallic flat bar 8, which is formed by a first wing 9 which is connected to the aerodynamic vane 6, and a second wing 10 rigidly joined to the ring 1, 2. The aerodynamic vanes 6 are joined to the rings 1, 2 through at least one of these metallic flat bars 8, being it possible to use one metallic flat bar 8 for the union of the aerodynamic vane 6 to each one of the ring,
- 30 or more than one metallic bar. Figure 3 shows that preferably a couple of these metallic flat bars 8 are used, placing one at each side of the aerodynamic vanes 6. Figure 3 shows that preferably each one of the aerodynamic vanes 6 is joined at one of its ends to the inner ring 1 through a couple of metallic flat bars 8, and at its other end to the outer ring 2 through another couple of metallic flat bars 8. In this case, the first wings 9
- 35 of the flat bars 8 joining the aerodynamic vanes 6 to the inner ring 1 are rigidly fixed to

- 7 -

the aerodynamic vanes 6, while the first wings 9 of the flat bars 8 joining the aerodynamic vanes 6 to the outer ring 2 only rest against said aerodynamic vanes 6, offering certain degree of mobility which will favor tension release and a better position of the vane 6 as regards aerodynamic properties. According to an alternative
5 embodiment, the first wings 9 of the flat bars 8 joining the aerodynamic vanes 6 to the outer ring 2 are the ones rigidly fixed to the aerodynamic vanes 6, while the first wings 9 of the flat bars 8 joining the aerodynamic vanes 6 to the inner ring 1 are the ones that only rest against said aerodynamic vanes 6. This embodiment is similar to the previous one, except in that the mobility is produced in the proximity of the inner ring 1 and not
10 of the outer ring 2.

According to another embodiment of the invention, the aerodynamic vanes 6 are joined only to one of the rings 1, 2 through two metallic flat bars 8 arranged one at each side of the aerodynamic vane 6.

15

Alternatively to the metallic flat bars 8, the present invention has other means for joining the aerodynamic vanes 6 to the rings 1, 2. Figures 4 and 5 show the package grouping 11, of different aerodynamic vanes 6, preferably all those that are arranged between structural vanes by means of an inner membrane 12 which is fixed to one of
20 their ends, and to the inner ring 1, and an outer membrane 13, which is fixed at the other end thereof and to the outer ring 2. As shown in figures 4 and 6, according to a particular embodiment of the invention, the inner 12 and outer membranes 13 are rigidly fixed to the inner 1 and outer 2 rings, respectively through flanges 14 arranged at the edge of the membranes 12, 13. Alternatively, the packages 11 of aerodynamic
25 vanes 6 are rigidly fixed to one of the two rings 1, 2 while they are joined to the other in a detachable way, through the introduction of a flange 14 in a groove to that purpose, and which enables the packages 11 of aerodynamic vanes 6 to move in a radial direction, favoring the aerodynamic properties of the support structure. Figure 7 shows this embodiment, in which the packages 11 are rigidly fixed to the inner ring 1 and
30 joined to the outer ring 2 in a detachable way. Furthermore, according to a different embodiment, one of the membranes 12, 13 is fixed to one of the rings 1, 2 while the other membrane 13, 12 is free from the other ring 2, 1, thus offering mobility to that end of the aerodynamic vanes.

- 8 -

According to different embodiments, the flanges 14 are eliminated to the membranes 12, 13, being said membranes 12, 13 integral to the rings 1, 2 when the packages 11 are fixed to them, or remain free.

5 Figure 8 shows a particular embodiment of the invention in which the aerodynamic vanes 6 are divided into two parts, preferably at its central area, so that one of the parts is joined by any of the means described to the inner ring 1, and the other part is joined by any of the means described to the outer ring 2.

10 Once the invention has been clearly described, it is worth stating that the previously described embodiments can be subject to detail modifications as long as the main principle and essence of the invention are not modified.

- 9 -

CLAIMS

1. Bearing support structure for turbines comprising
 - an inner ring (1) where the bearing (3) is housed, and
 - 5 - an outer ring (2) comprising fastening points (4) of the turbine and anchoring points (7) of the engine assembly containing the turbine, said support structure being characterized in that
 - the inner ring (1) and the outer ring (2) are radially connected by means of
 - a plurality of structural vanes (5) in a circumference-like arrangement between
 10 both rings (1, 2), which
 - transmit the bearing (3) loads to the anchoring points (7) of the engine assembly in the outer ring (2),
 - and through which service fluids go through between the inner ring (1) and the outer ring (2), and
 - 15 - a plurality of aerodynamic vanes (6) in a circumference-like arrangement between both rings (1, 2), which straighten the main flow of the turbine,
 - in that the aerodynamic vanes (6) are lighter than the structural vanes (5),
 - and also characterized in that
 - the number of structural vanes (5) depends exclusively on
 20
 - the bearing (3) loads to be transmitted to the anchoring points (7) of the engine assembly in the outer ring (2),
 - the amount and kind of service fluids which must go through between the inner ring (1) and the outer ring (2),
 - and the number of aerodynamic vanes (6) which are arranged and their section
 25 depend exclusively on the aerodynamic requirements demanded from the support structure for the straightening of the turbine main flow,
 - and in that the structural vanes (5) fulfill only structural functions and the aerodynamic vanes (6) fulfill only aerodynamic functions.
- 30 2. Bearing support structure for turbines, according to claim 1, characterized in that the aerodynamic vanes (6) are joined to at least one of the two rings (1, 2) through at least one L-section metallic flat bar (7), comprising
 - a first wing (9) connected to the aerodynamic vane (6),
 - a second wing (10) rigidly joined to the ring (1, 2).

- 10 -

3. Bearing support structure for turbines, according to the preceding claim, characterized in that

- each one of the aerodynamic vanes (6) is joined to the inner ring (1) by two metallic flat bars (8), arranged one at each side of the aerodynamic vane (6),

5 - and in that each one of the aerodynamic vanes (6) is joined to the outer ring (2) by other two metallic flat bars (8), arranged one at each side of the aerodynamic vane (6).

4. Bearing support structure for turbines, according to the preceding claim, characterized in that

10 - the first wings (9) of the metallic flat bars (8) joining the aerodynamic vanes (6) to the inner ring (1) are rigidly fixed to aerodynamic vanes (6), while

- the first wings (9) of the metallic flat bars (8) joining the aerodynamic vanes (6) to the outer ring (2) rest against said aerodynamic vanes (6).

15 5. Bearing support structure for turbines, according to claim 3, characterized in that

- the first wings (9) of the metallic flat bars (8) joining the aerodynamic vanes (6) to the outer ring (2) are rigidly fixed to said aerodynamic vanes (6), while

- the first wings (9) of the metallic flat bars (8) joining the aerodynamic vanes (6) to the inner ring (1) rest against said aerodynamic vanes (6).

20

6. Bearing support structure for turbines, according to claim 2, characterized in that each one of the aerodynamic vanes (6) is joined only to the inner ring (1) by two metallic flat bars (8), arranged one at each side of the aerodynamic vane (6).

25 7. Bearing support structure for turbines, according to claim 2, characterized in that each one of the aerodynamic vanes (6) is joined only to the outer ring (2) by two metallic flat bars (8), arranged one at each side of the aerodynamic vane (6).

8. Bearing support structure for turbines, according to claim 1, characterized in that the
30 aerodynamic vanes (6) arranged between two structural vanes (5) are grouped in packages (11) by means of

- an inner membrane (12) corresponding to the inner ring (1), to which said aerodynamic vanes (6) are fixed at one of their ends, and

35 - an outer membrane (13), corresponding to the outer ring (2), to which the aerodynamic vanes (6) are fixed at their other end,

- 11 -

being each one of the aerodynamic vane (6) packages (11) joined to at least one of the rings (1, 2).

9. Bearing support structure for turbines, according to claim 8, characterized in that
5 each one of the aerodynamic vane (6) packages (11) is rigidly fixed to
- the inner ring (1) by means of a flange (14) arranged on an edge of the inner membrane (12),
- and the outer ring (2) by means of a flange (14) arranged on an edge of the outer membrane (13).

10

10. Bearing support structure for turbines, according to claim 8, characterized in that
each one of the aerodynamic vane (6) packages (11)
- is rigidly fixed to the inner ring (1) by a flange (14) arranged on an edge of the inner membrane (12), and
15 - is joined in a detachable manner to the outer ring (2) by a flange (14) arranged on an edge of the outer membrane (13), which is introduced in a groove of said outer ring (2), enabling the aerodynamic vane (6) packages (11) to move in a radial direction.

11. Bearing support structure for turbines, according to claim 8, characterized in that
20 each one of the aerodynamic vane (6) packages (11) is fixed to the inner ring (1) by a flange (14) arranged on an edge of the inner membrane (12), and being the outer membrane (13) free from the outer ring (2).

12. Bearing support structure for turbines, according to claim 8, characterized in that
25 each one of the aerodynamic vane (6) packages (11) is fixed to the outer ring (2) by a flange (14) arranged on an edge of the outer membrane (13), and being the inner membrane (12) free from the inner ring (1).

13. Bearing support structure for turbines, according to claim 8, characterized in that
30 each one of the aerodynamic vane (6) packages (11) is fixed to the inner ring (1), being the inner membrane (12) integral to said inner ring (1), and being the outer membrane (13) free from the outer ring (2).

14. Bearing support structure for turbines, according to claim 8, characterized in that
35 each one of the aerodynamic vane (6) packages (11) is fixed to the outer ring (2),

- 12 -

being the outer membrane (13) integral to said outer ring (2), and being the inner membrane (12) free from the inner ring (1).

15. Bearing support structure for turbines, according to claim 8, characterized in that
5 each one of the aerodynamic vane (6) packages (11) is fixed to the inner ring (1) and the outer ring (2), being the inner membrane (12) integral to said inner ring (1), and being the outer membrane (13) integral to said outer ring (2).

16. Bearing support structure for turbines, according to claim 1, characterized in that
10 the aerodynamic vanes (6) arranged between two structural vanes (5) are grouped in packages (11) through only an inner membrane (12) corresponding to the inner ring (1), to which said aerodynamic vanes (6) are fixed at one of their ends.

17. Bearing support structure for turbines, according to claim 16, characterized in that
15 each one of the aerodynamic vane (6) packages (11) is fixed to the inner ring (1) by means of a flange (14) arranged on an edge of the inner membrane (12), and being the other end of the aerodynamic vane (6) free from the outer ring (2).

18. Bearing support structure for turbines, according to claim 16, characterized in that
20 each one of the aerodynamic vane (6) packages (11) is fixed to the inner ring (1), being the inner membrane (12) integral to said inner ring (1), and being the other end of the aerodynamic vanes (6) free from the outer ring (2).

19. Bearing support structure for turbines, according to claim 1, characterized in that
25 the aerodynamic vane (6) arranged between two structural vanes (5) are grouped in packages (11) by means of only an outer membrane (13) corresponding to the outer ring (2), to which said aerodynamic vanes (6) are fixed at one of their ends.

20. Bearing support structure for turbines, according to claim 19, characterized in that
30 each one of the aerodynamic vane (6) packages (11) is joined to the outer ring (2) by means of a flange (14) placed on the edge of the outer membrane (13), and being the other end of the aerodynamic vanes (6) free from the inner ring (1).

21. Bearing support structure for turbines, according to claim 19, characterized in that
35 each one of the aerodynamic vane (6) packages (11) is fixed to the outer ring (2), being

- 13 -

the outer membrane (13) integral to said outer ring (2), and being the other end of the aerodynamic vanes (6) free from the inner ring (1).

22. Bearing support structure for turbines, according to any of the claims 1 to 3, 9, 15,
5 characterized in that the aerodynamic vanes (6) are divided into two parts, substantially
at their central area, being one of the parts joined to the inner ring (1) and the other
part joined to the outer ring (2).

10

15

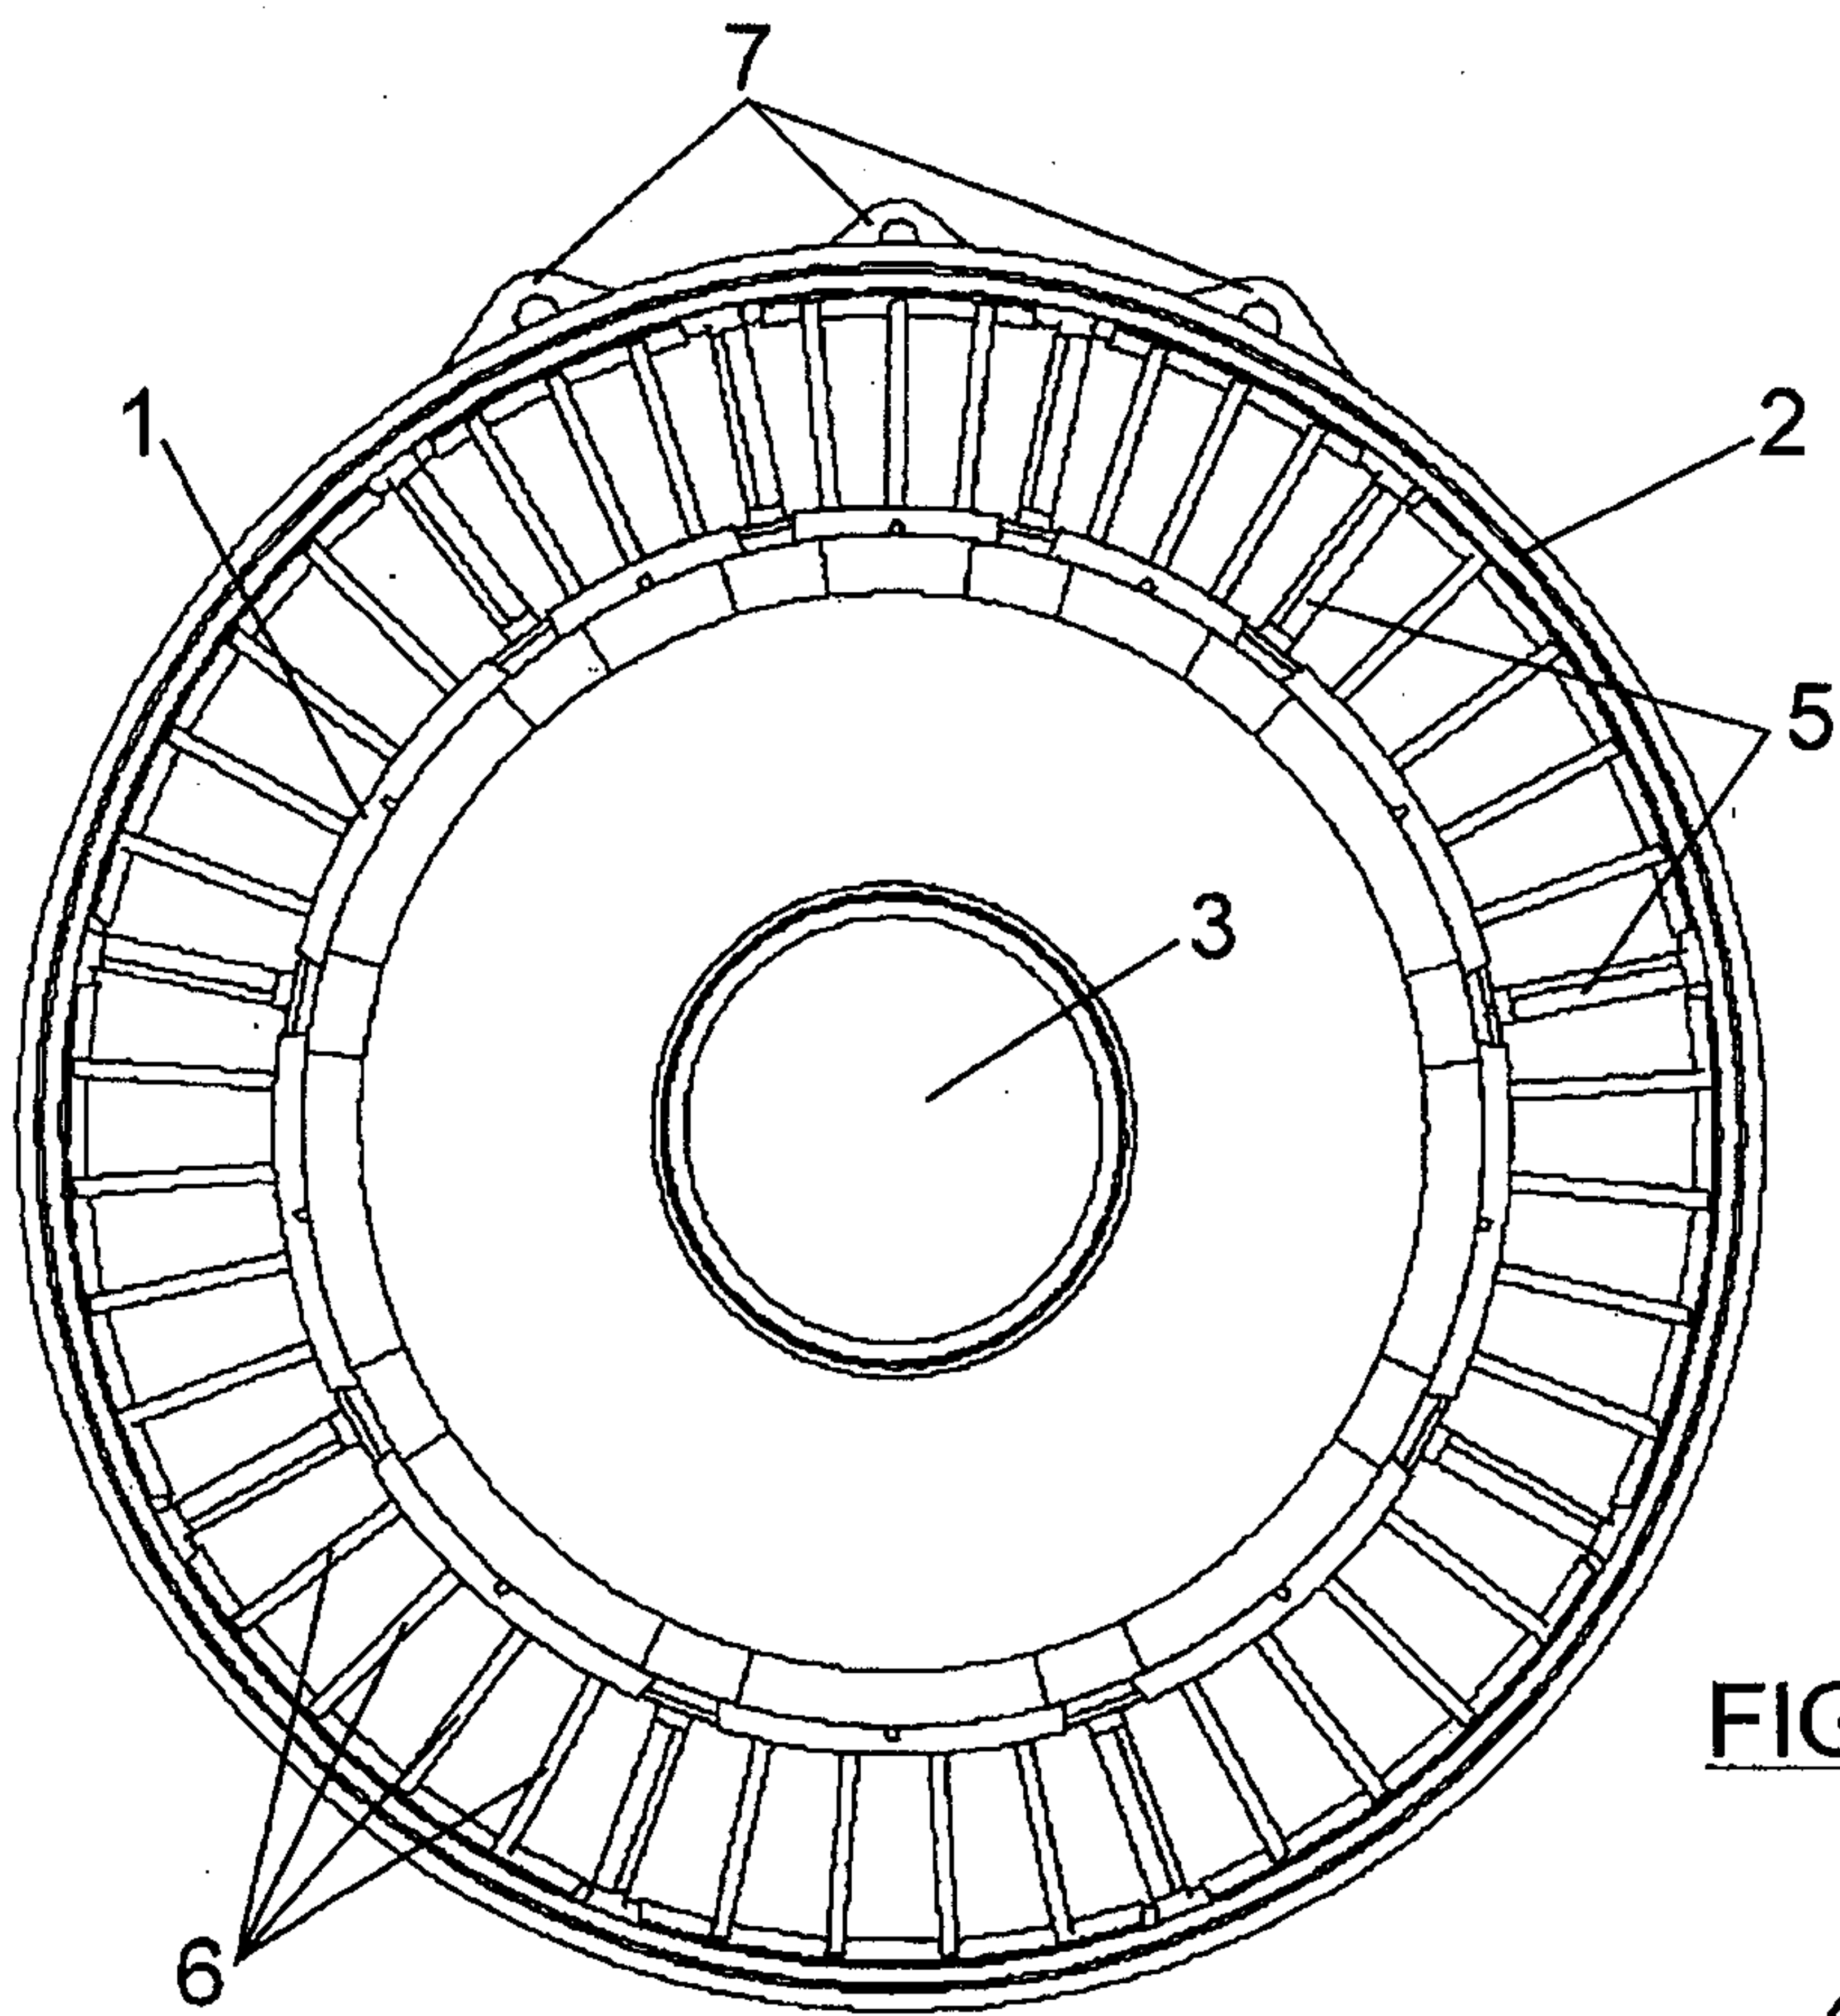


FIG. 1

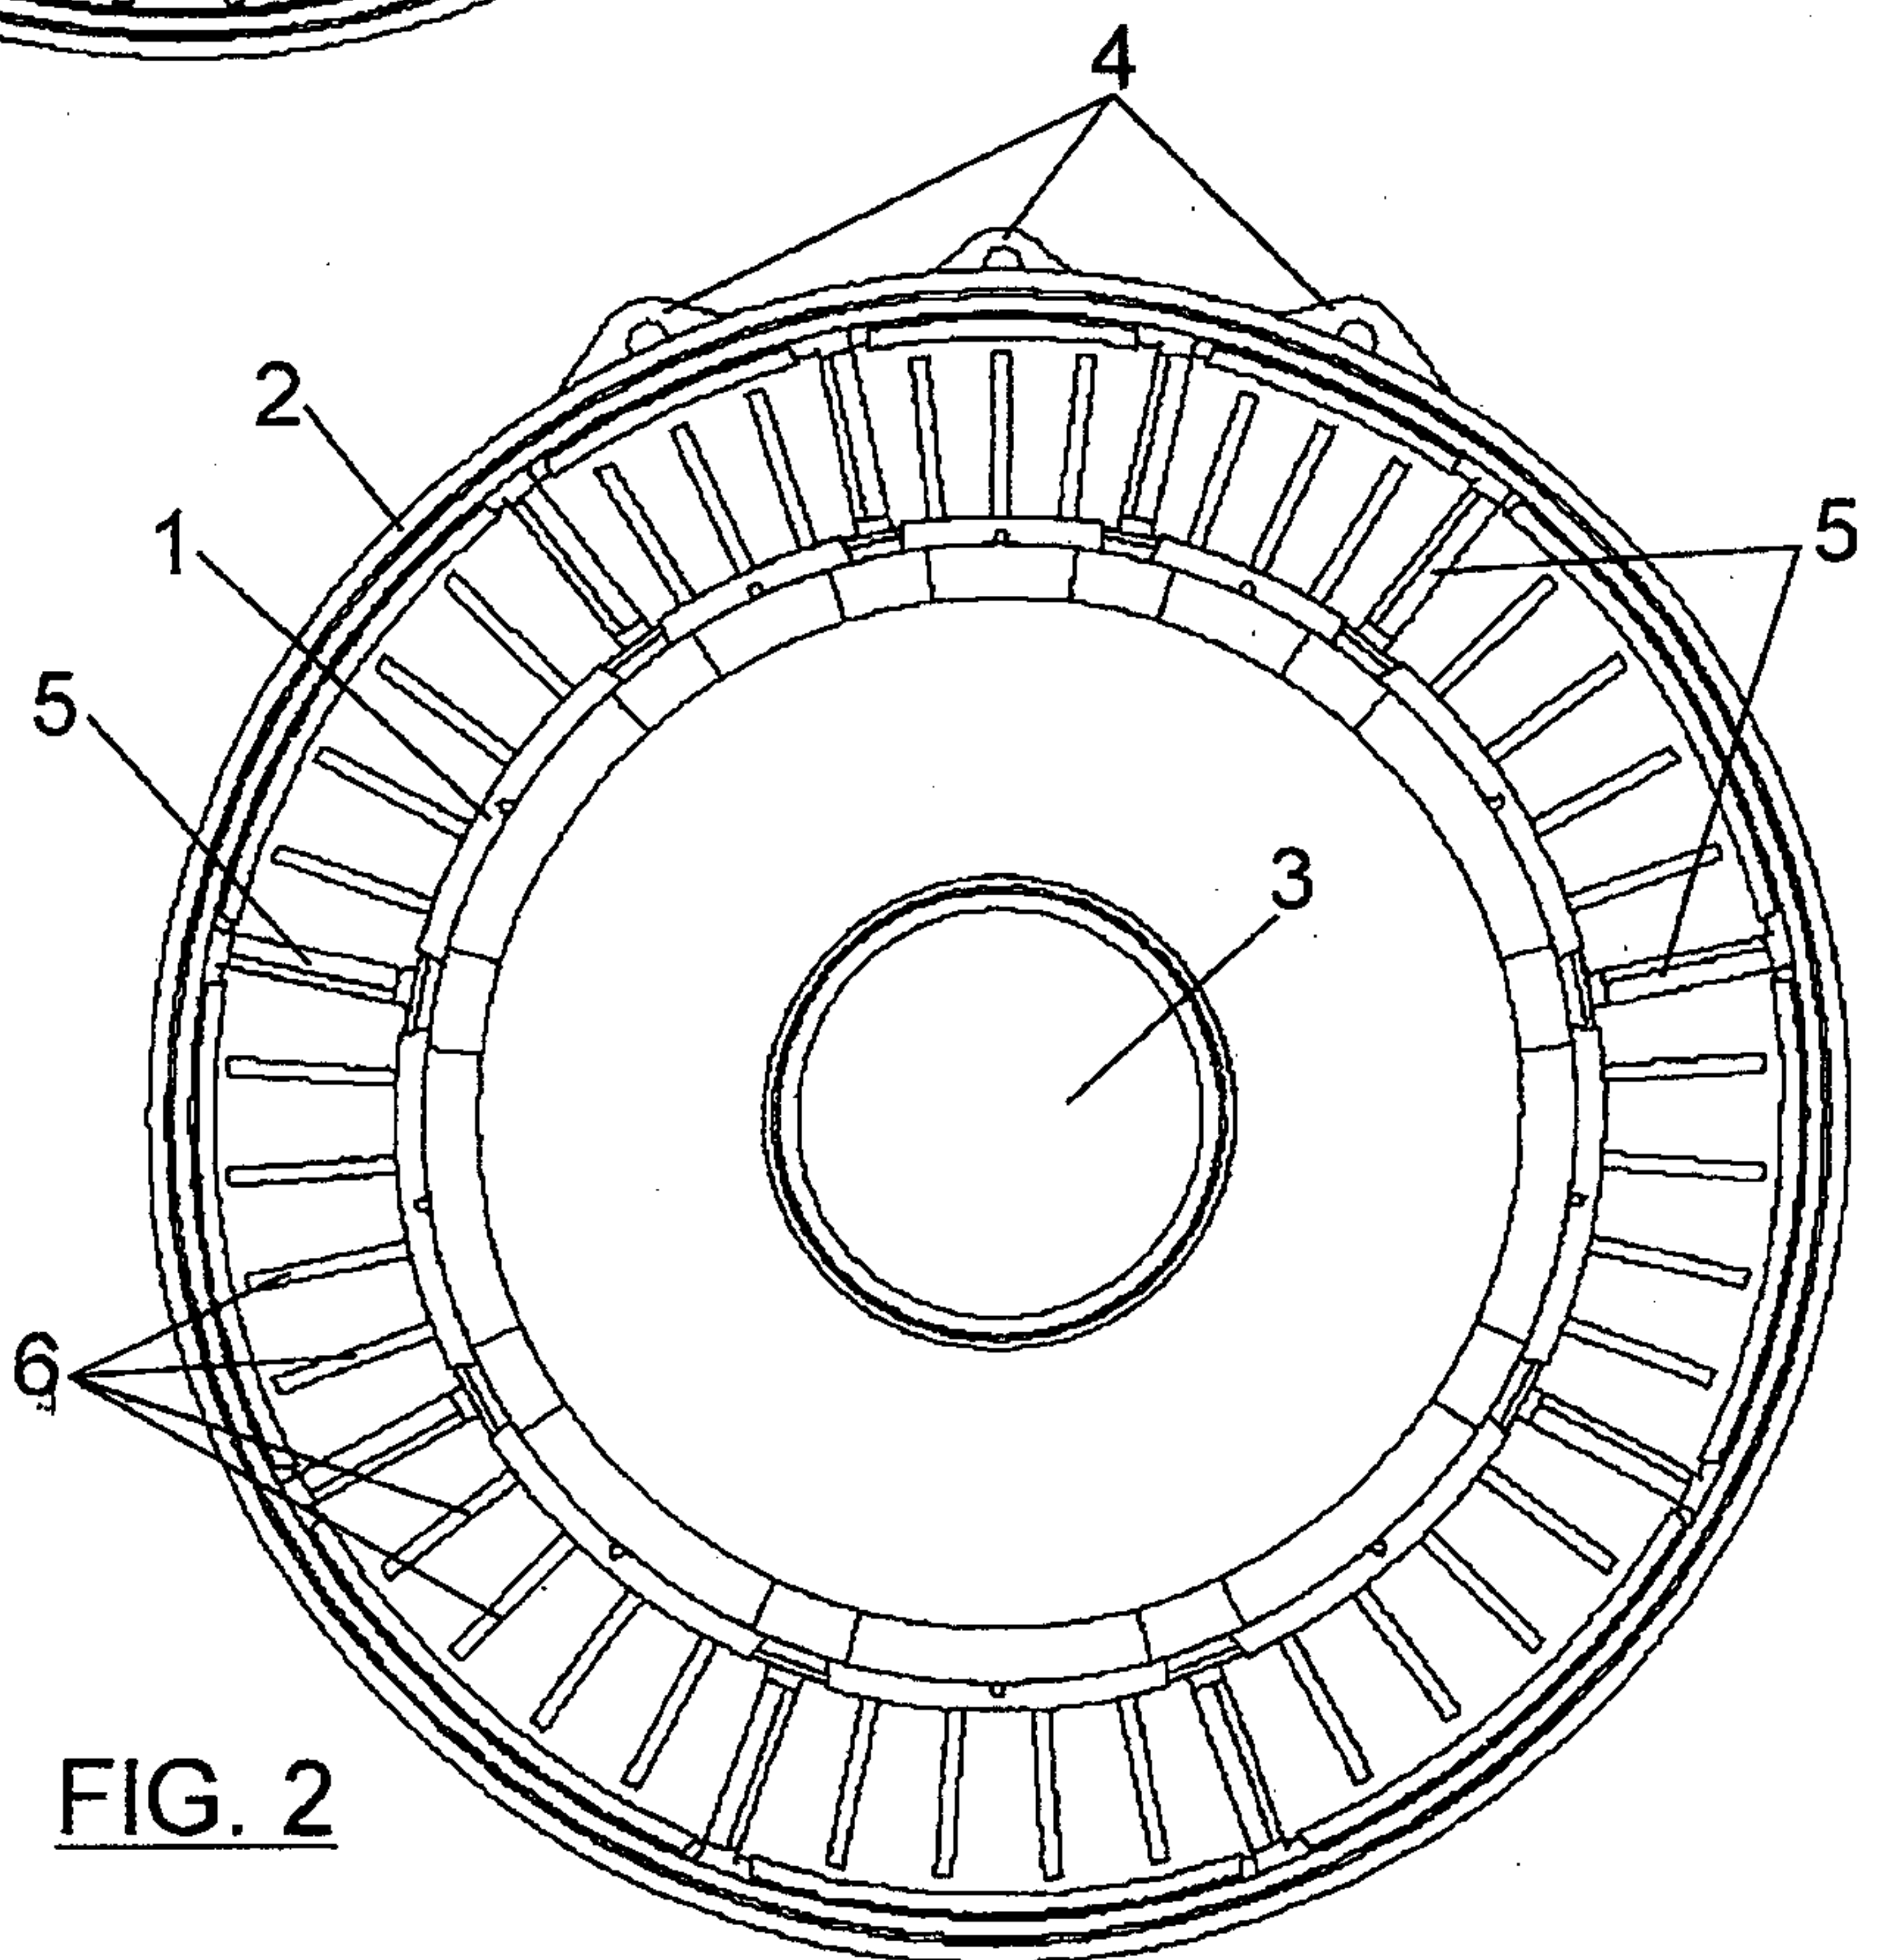


FIG. 2

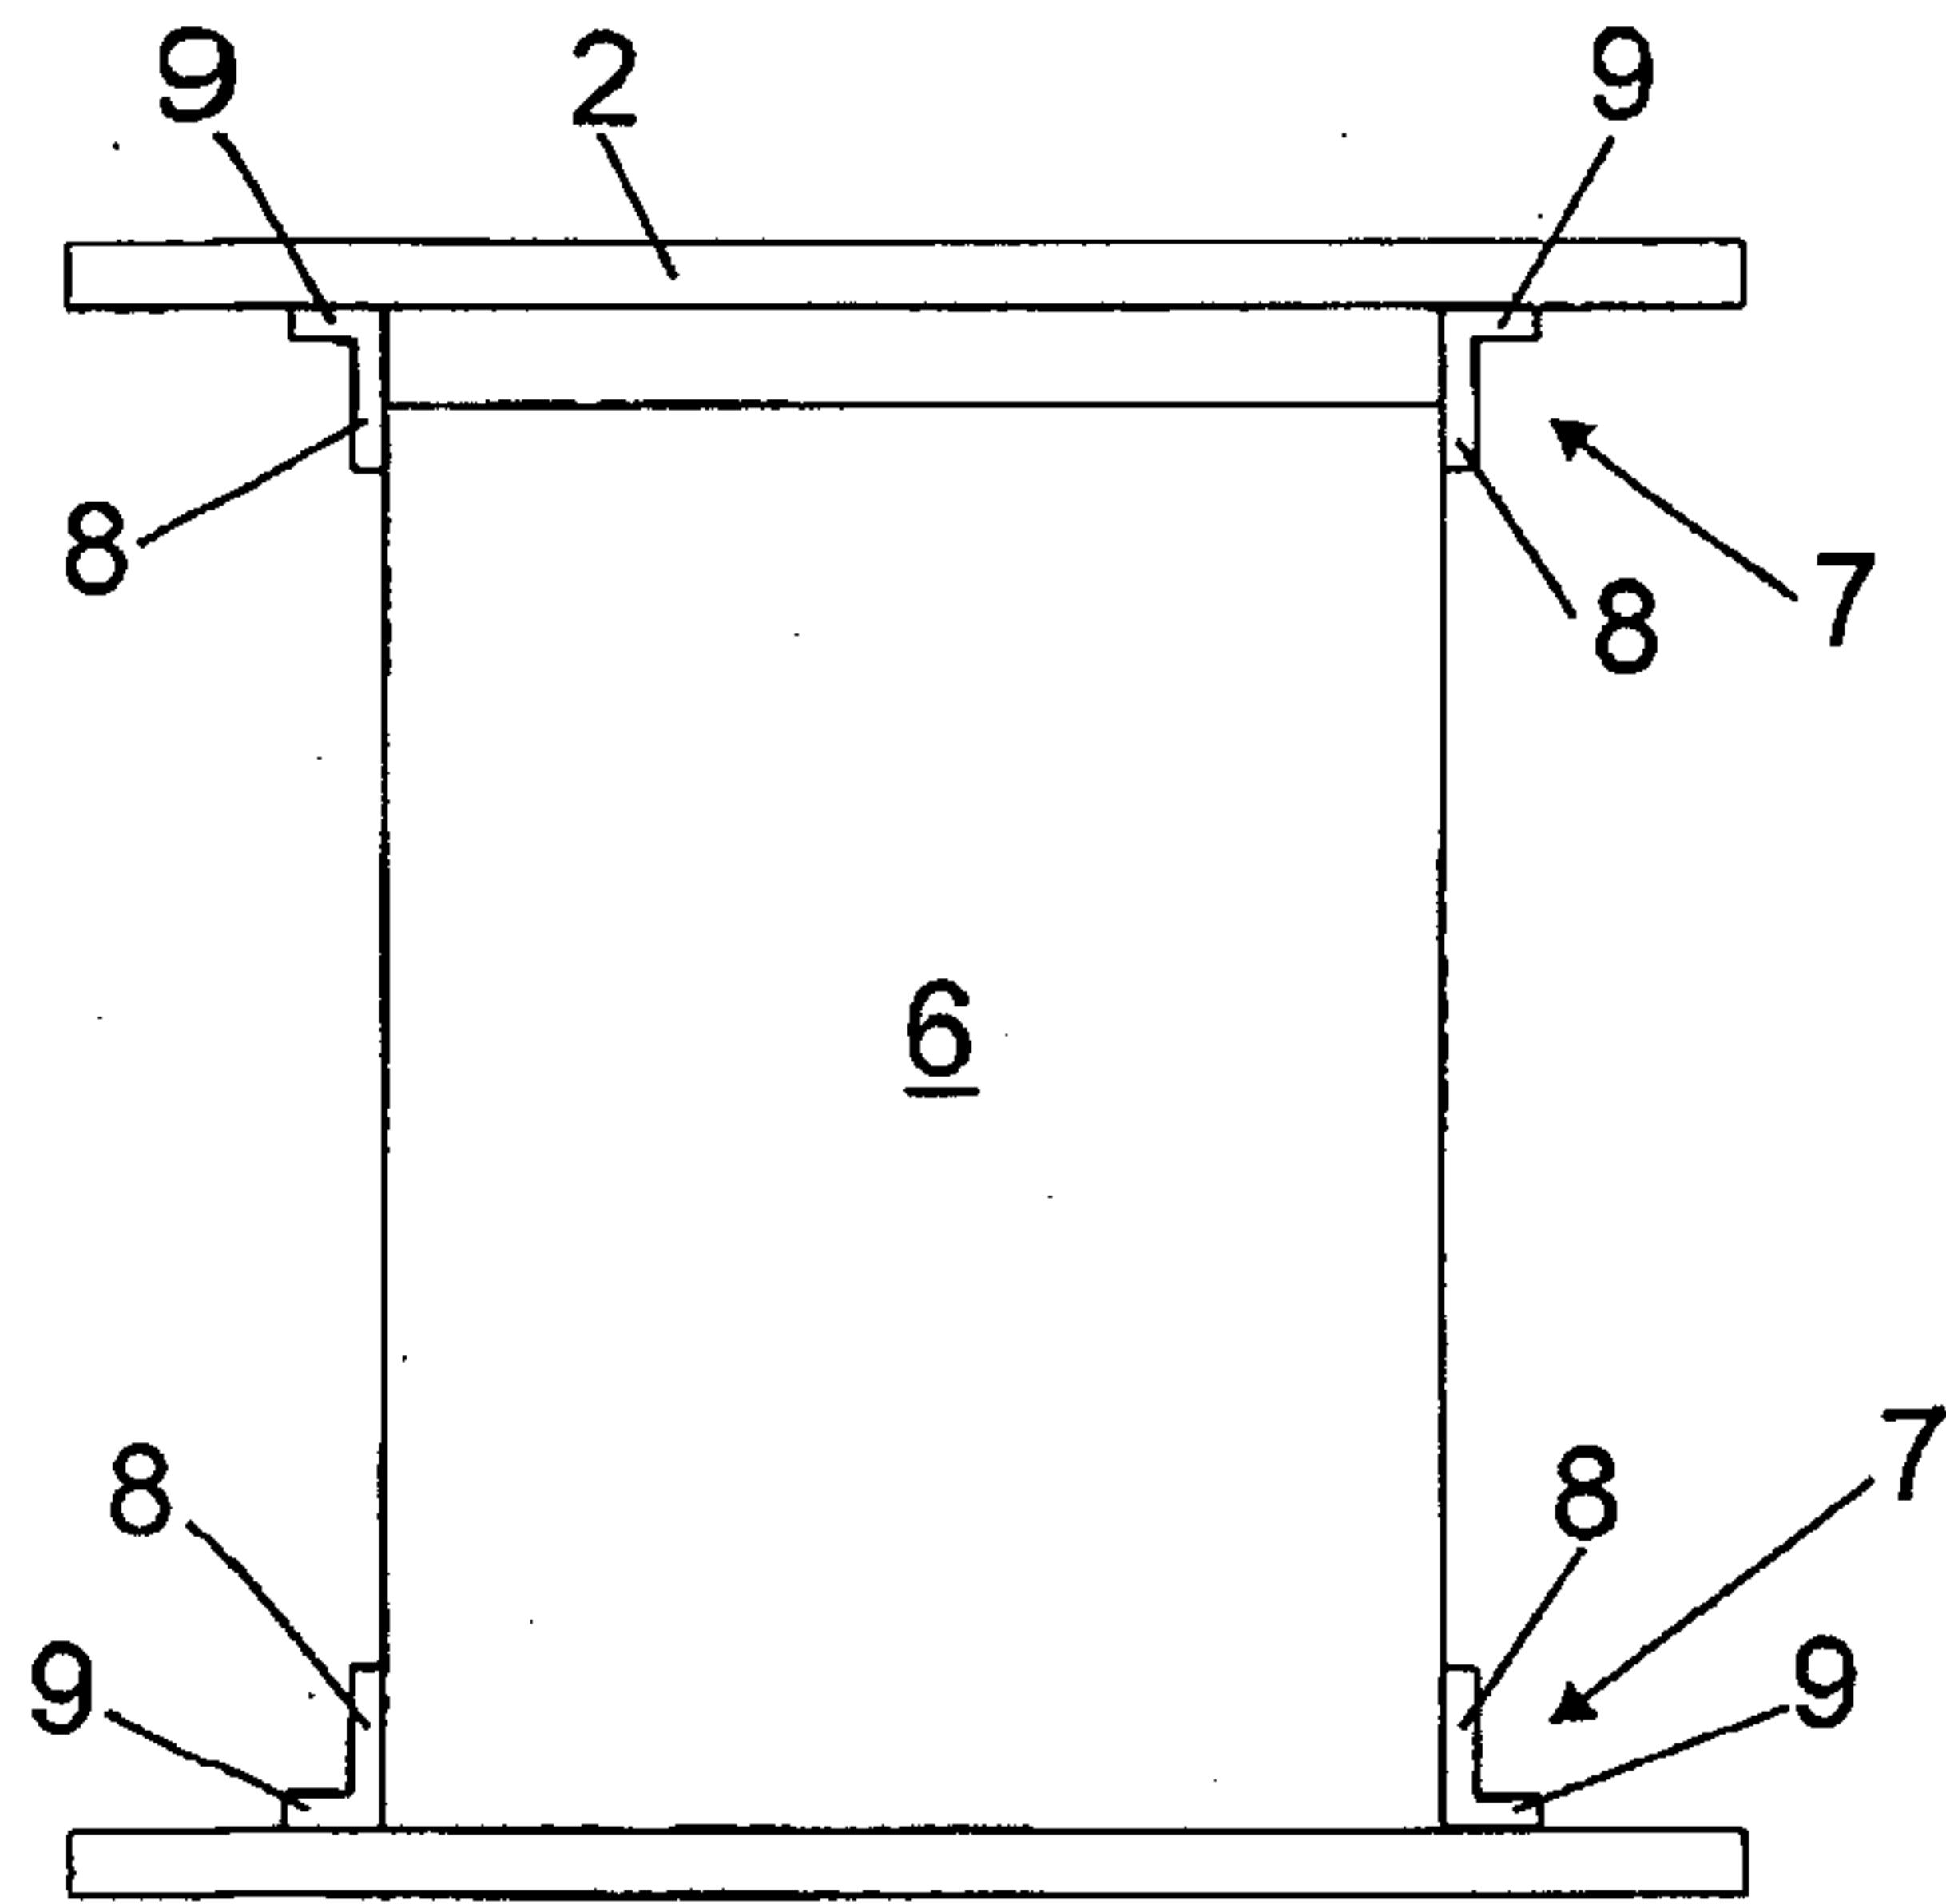


FIG. 3

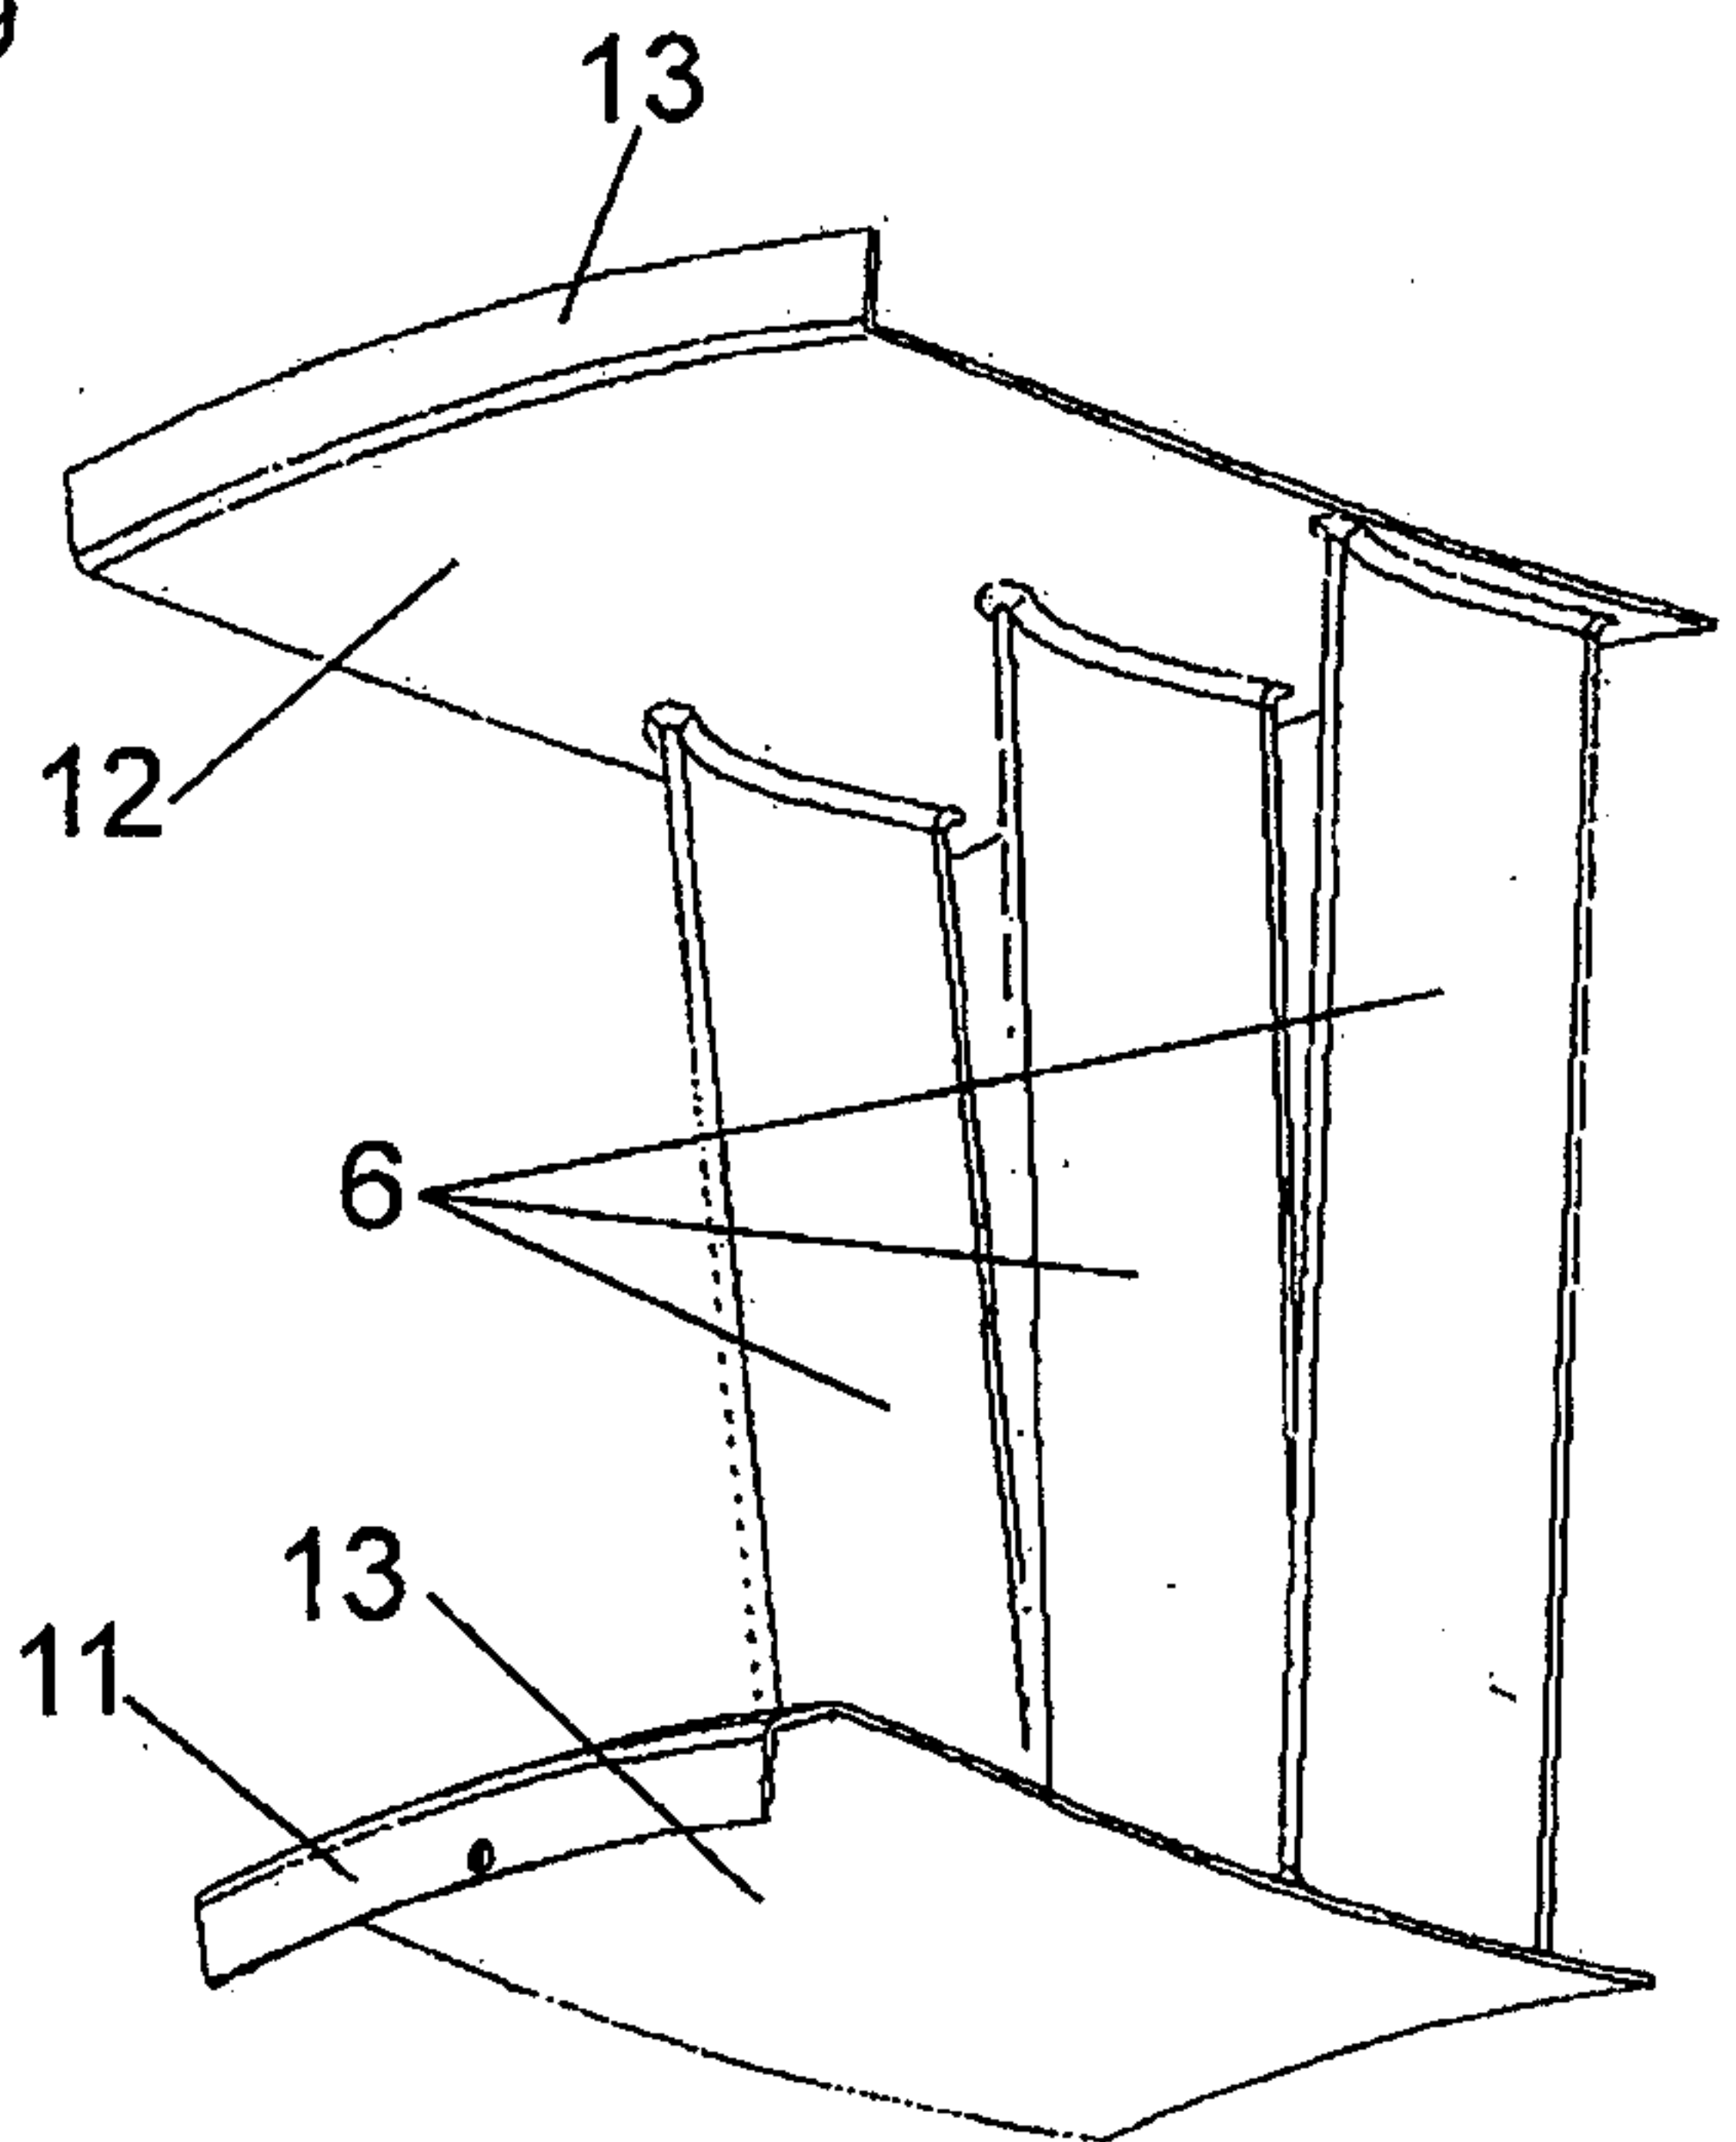


FIG. 4

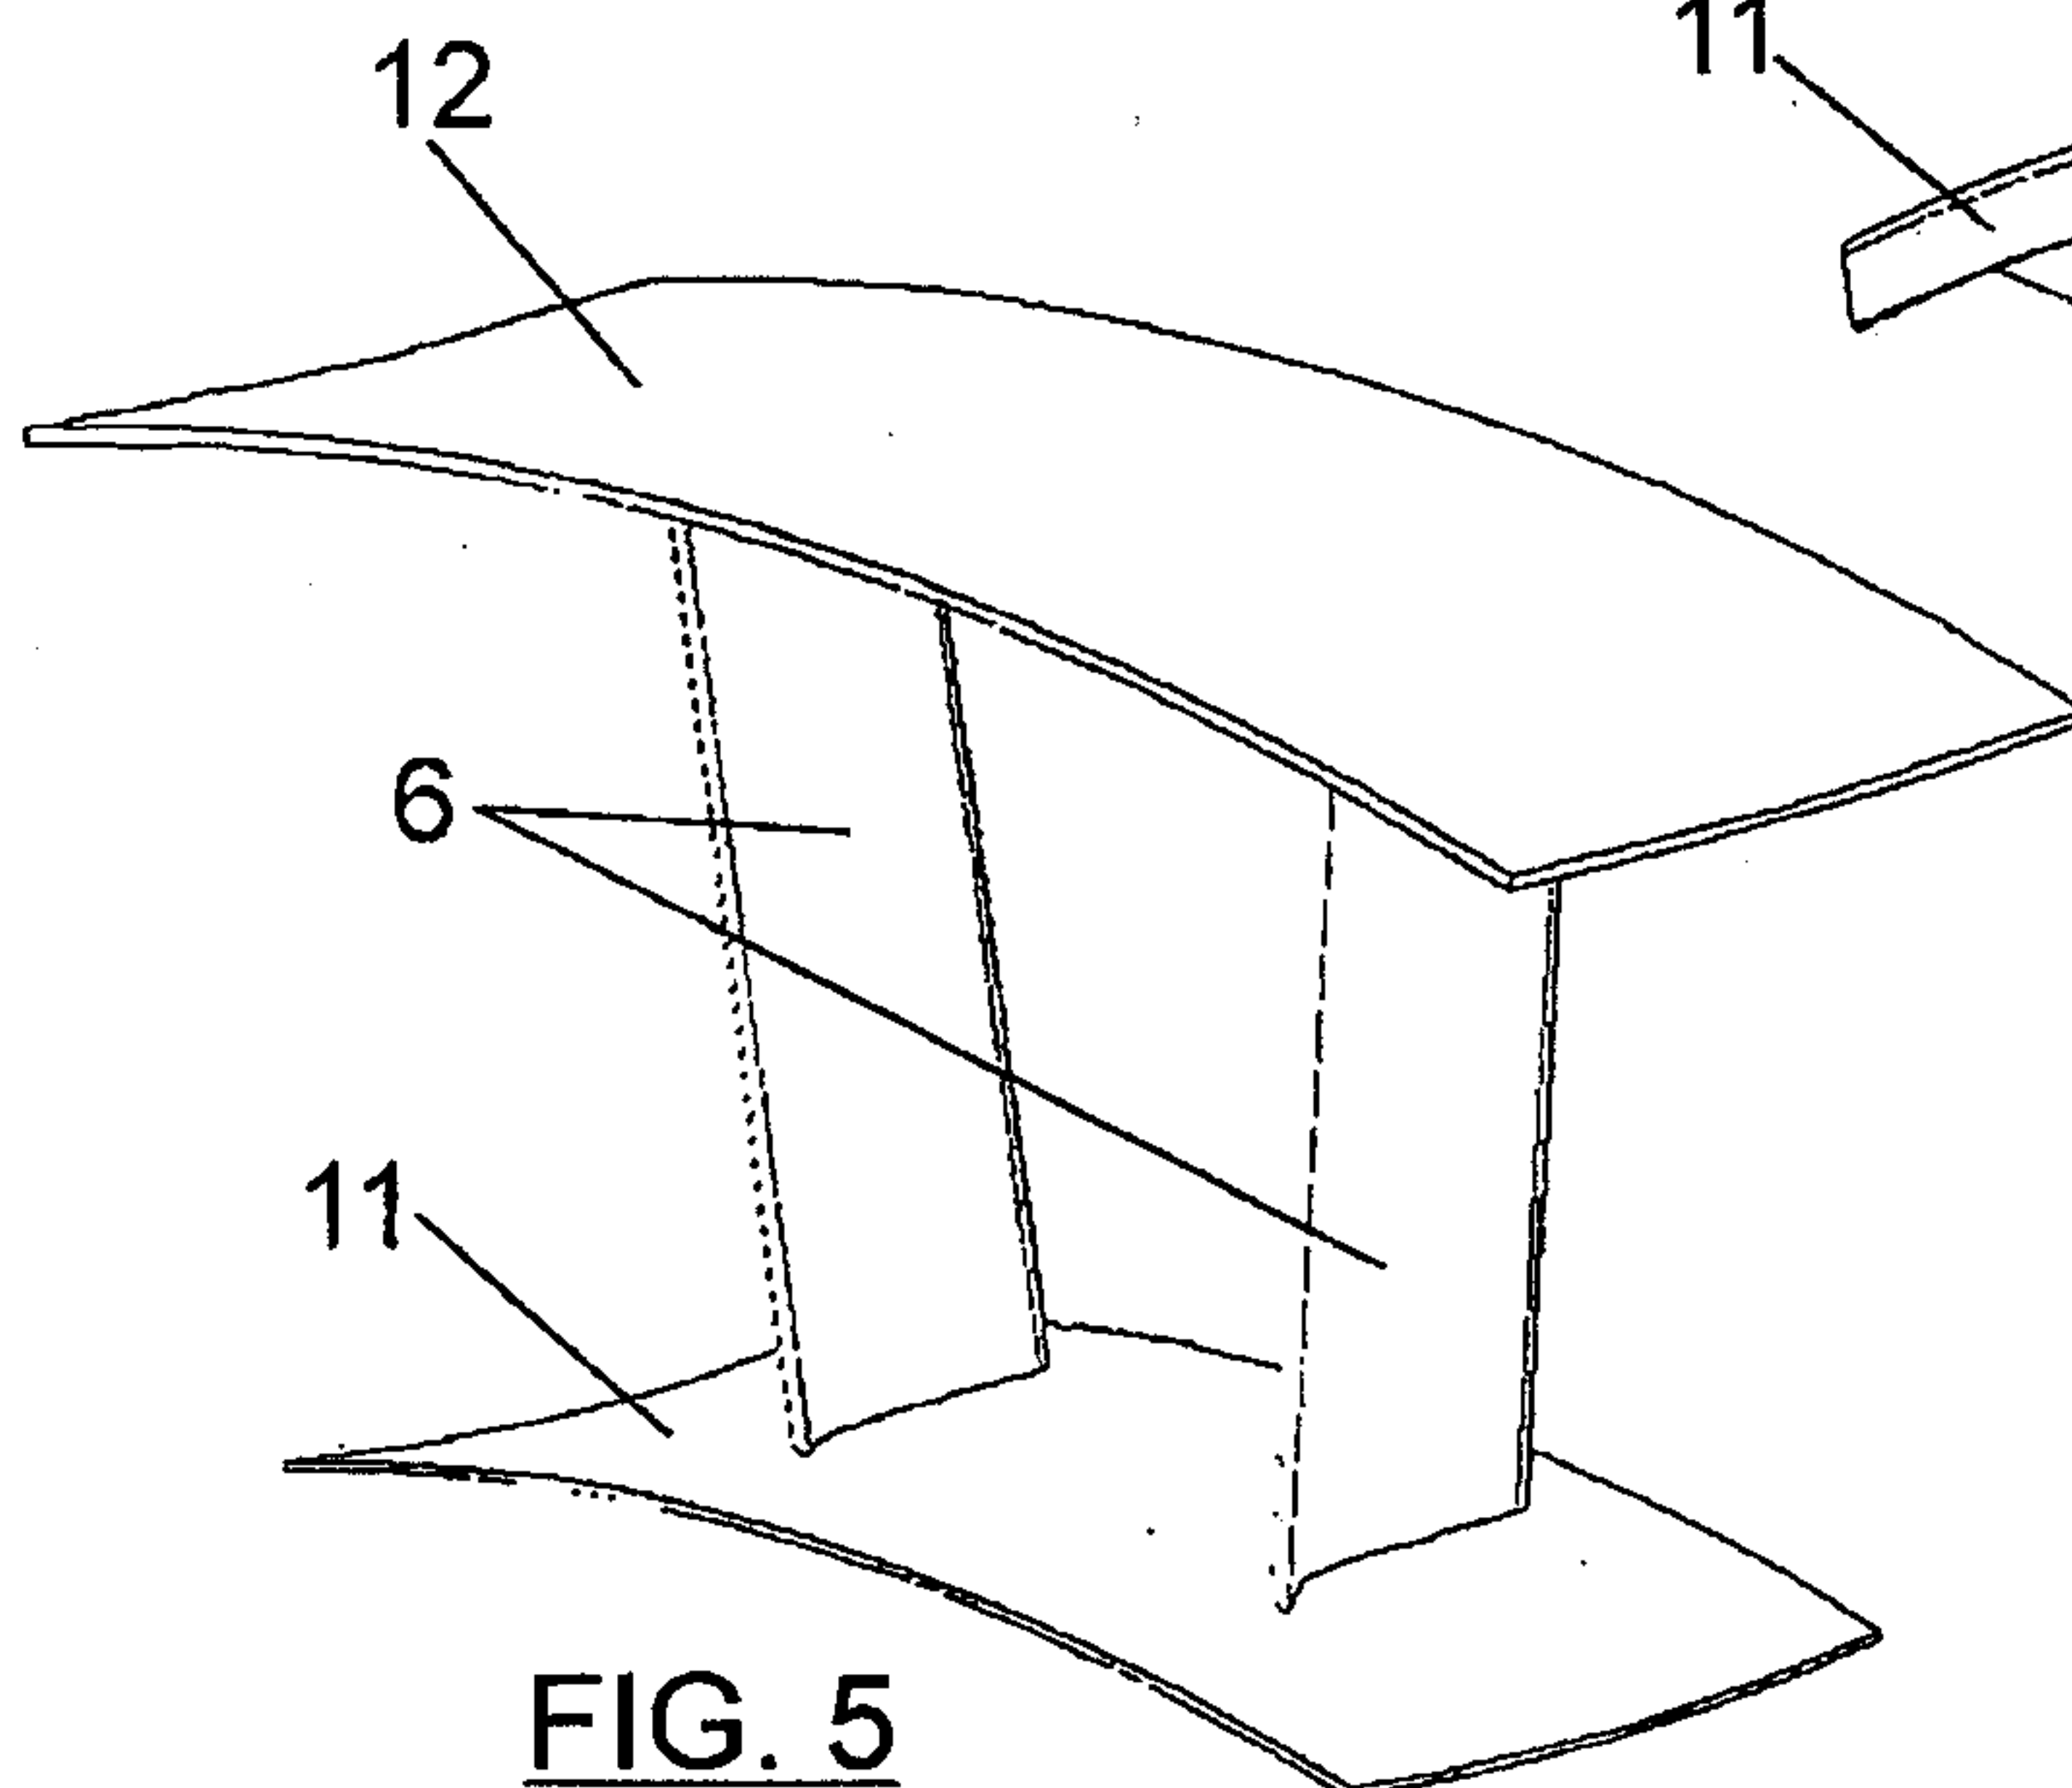


FIG. 5

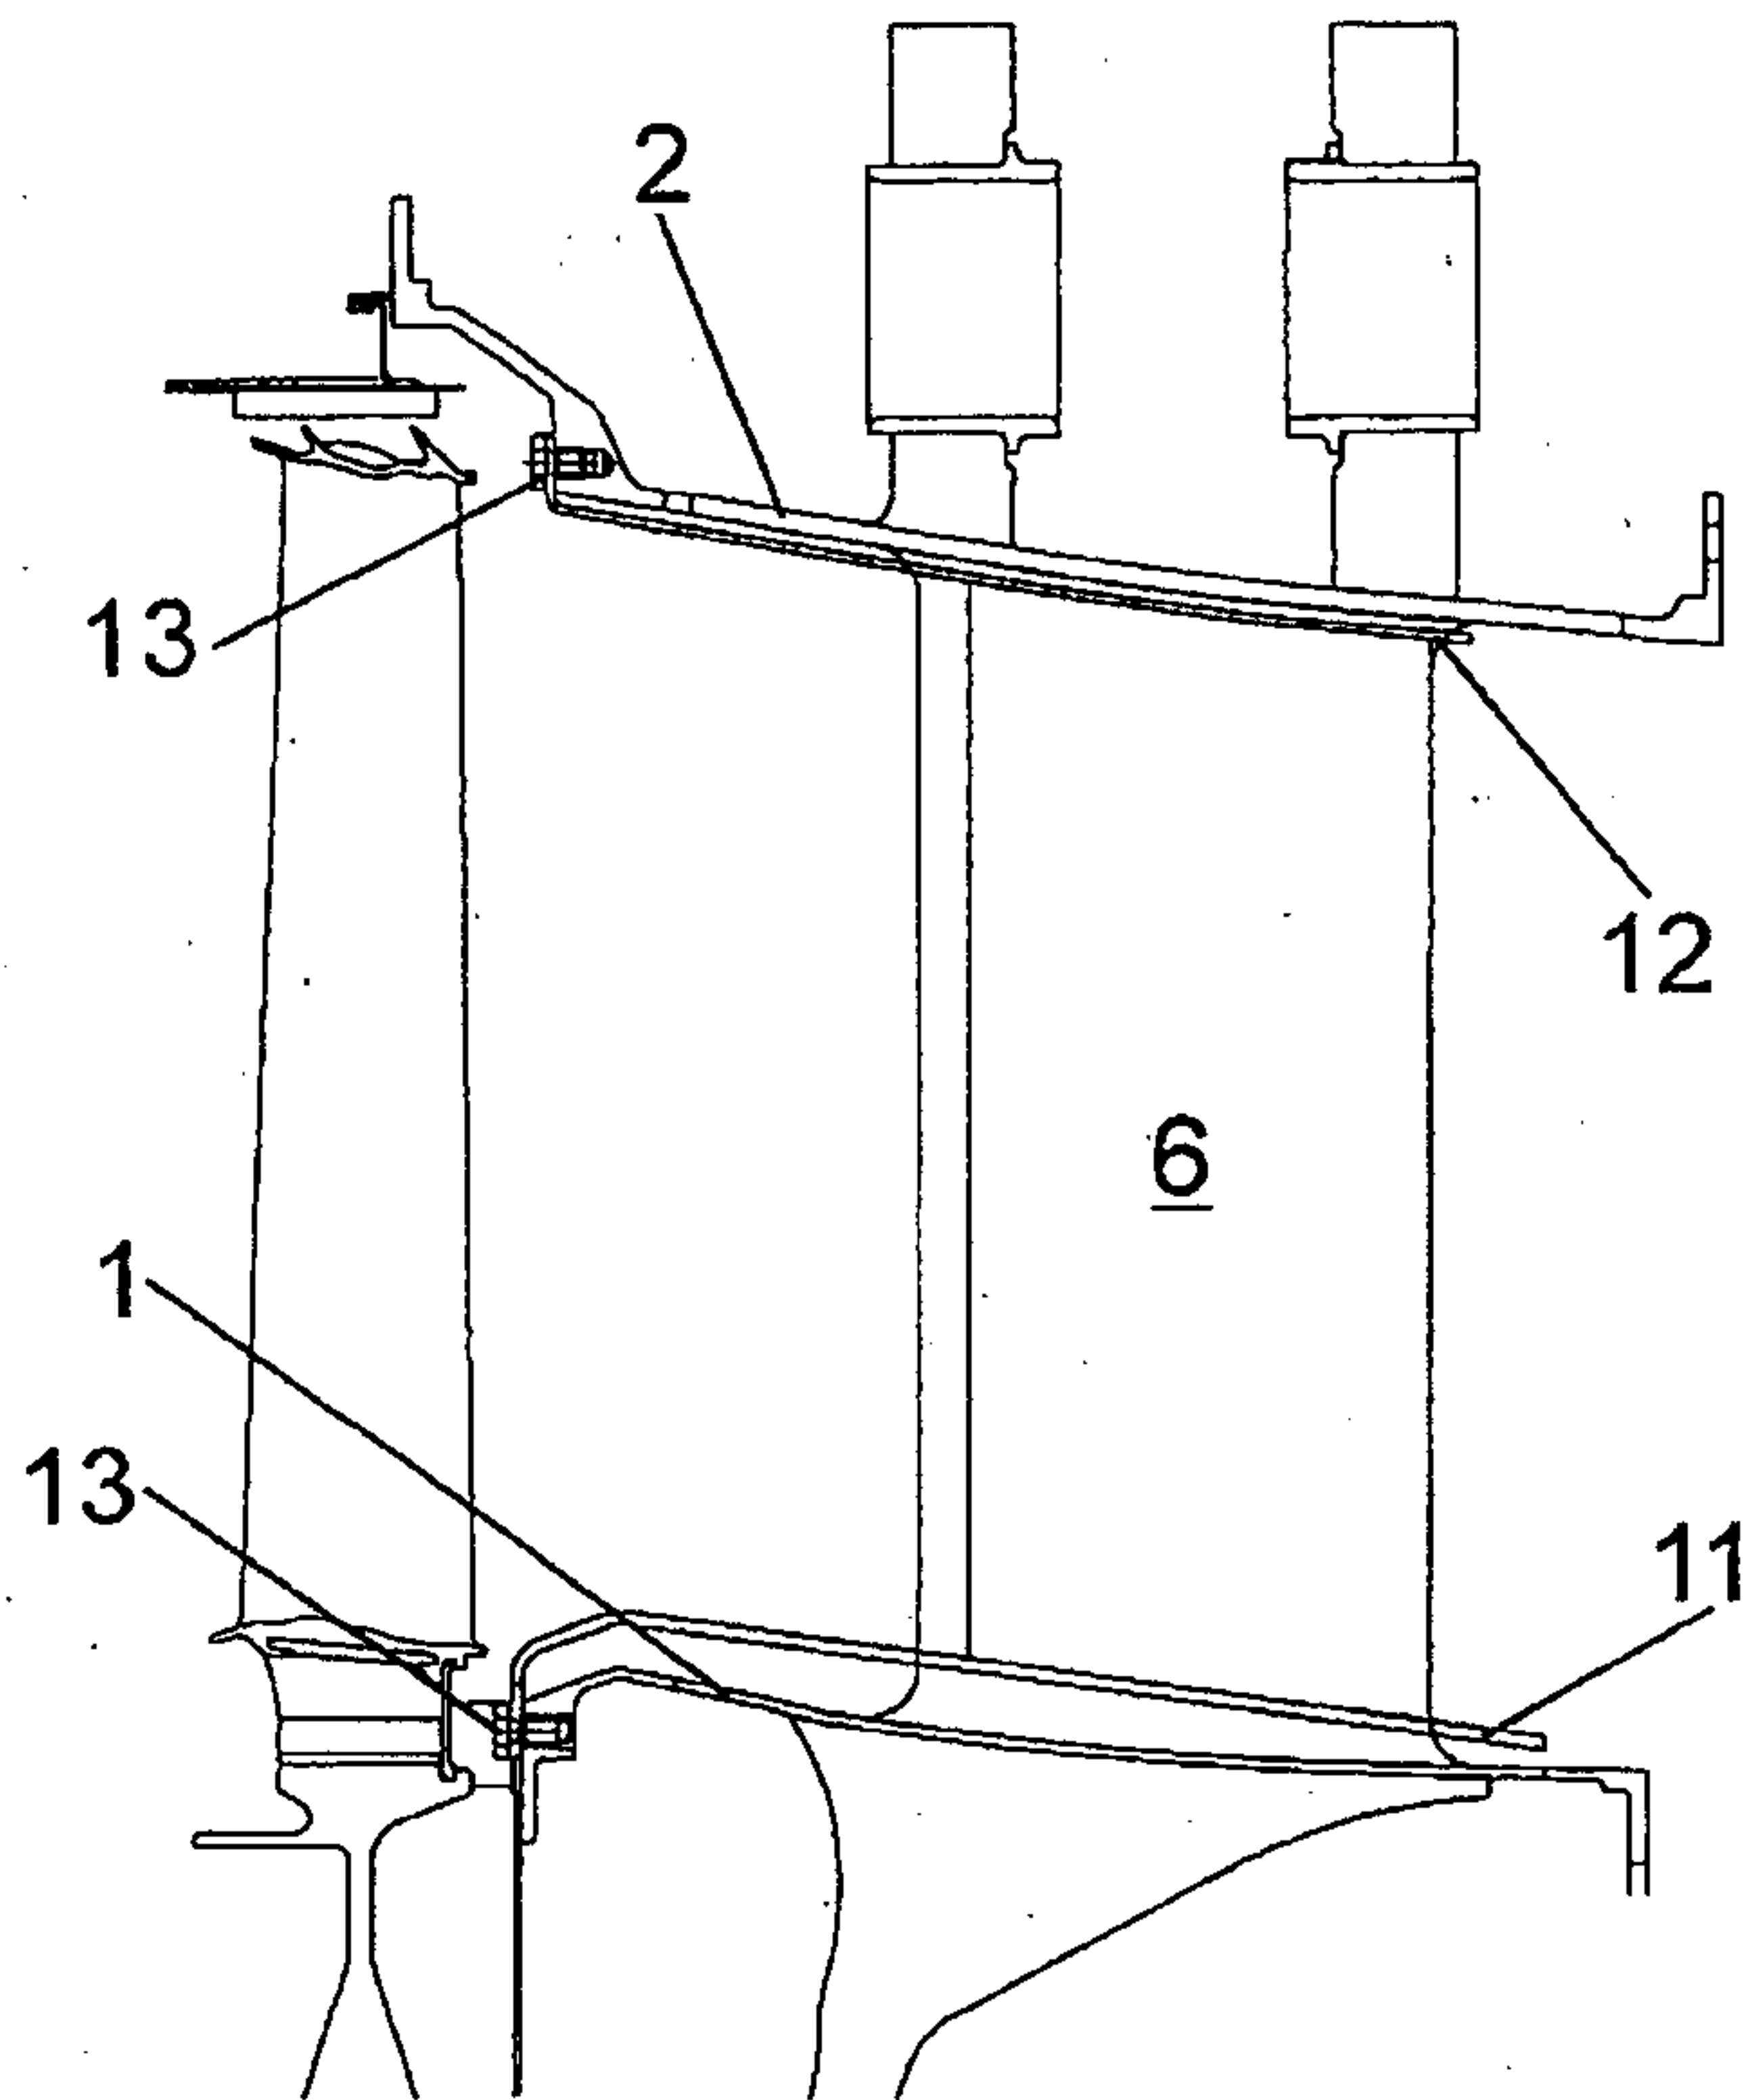


FIG. 6

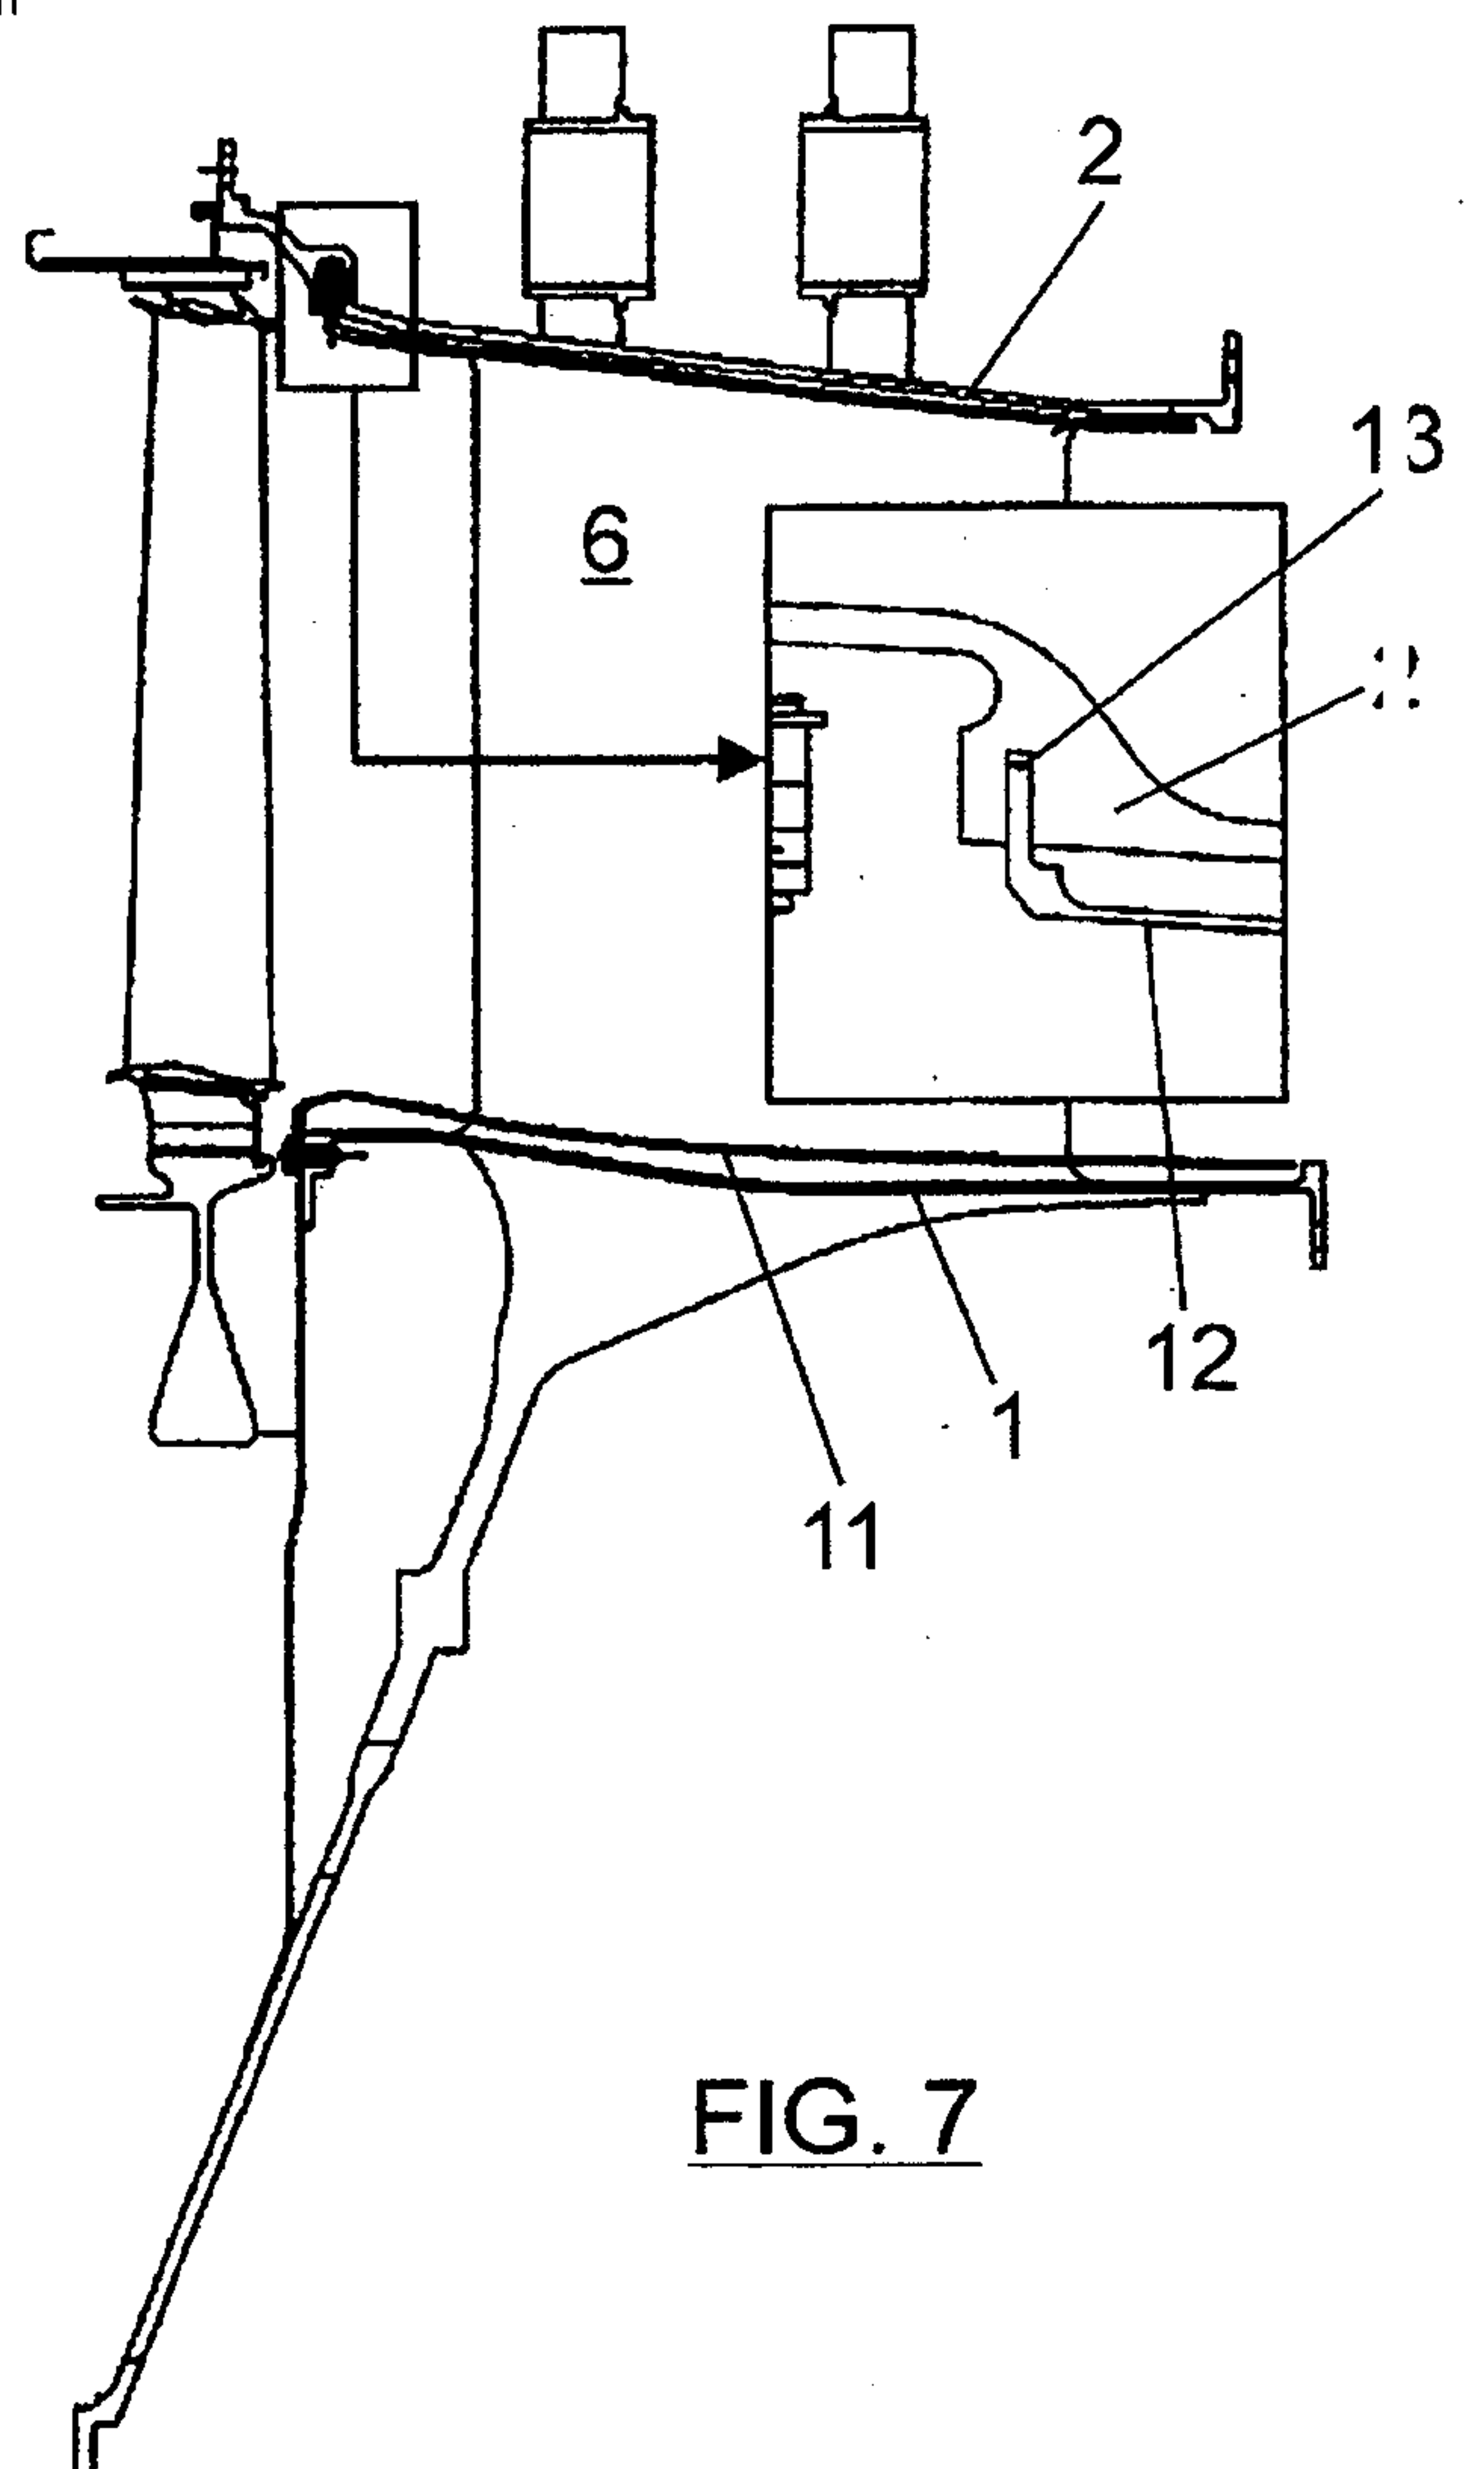


FIG. 7

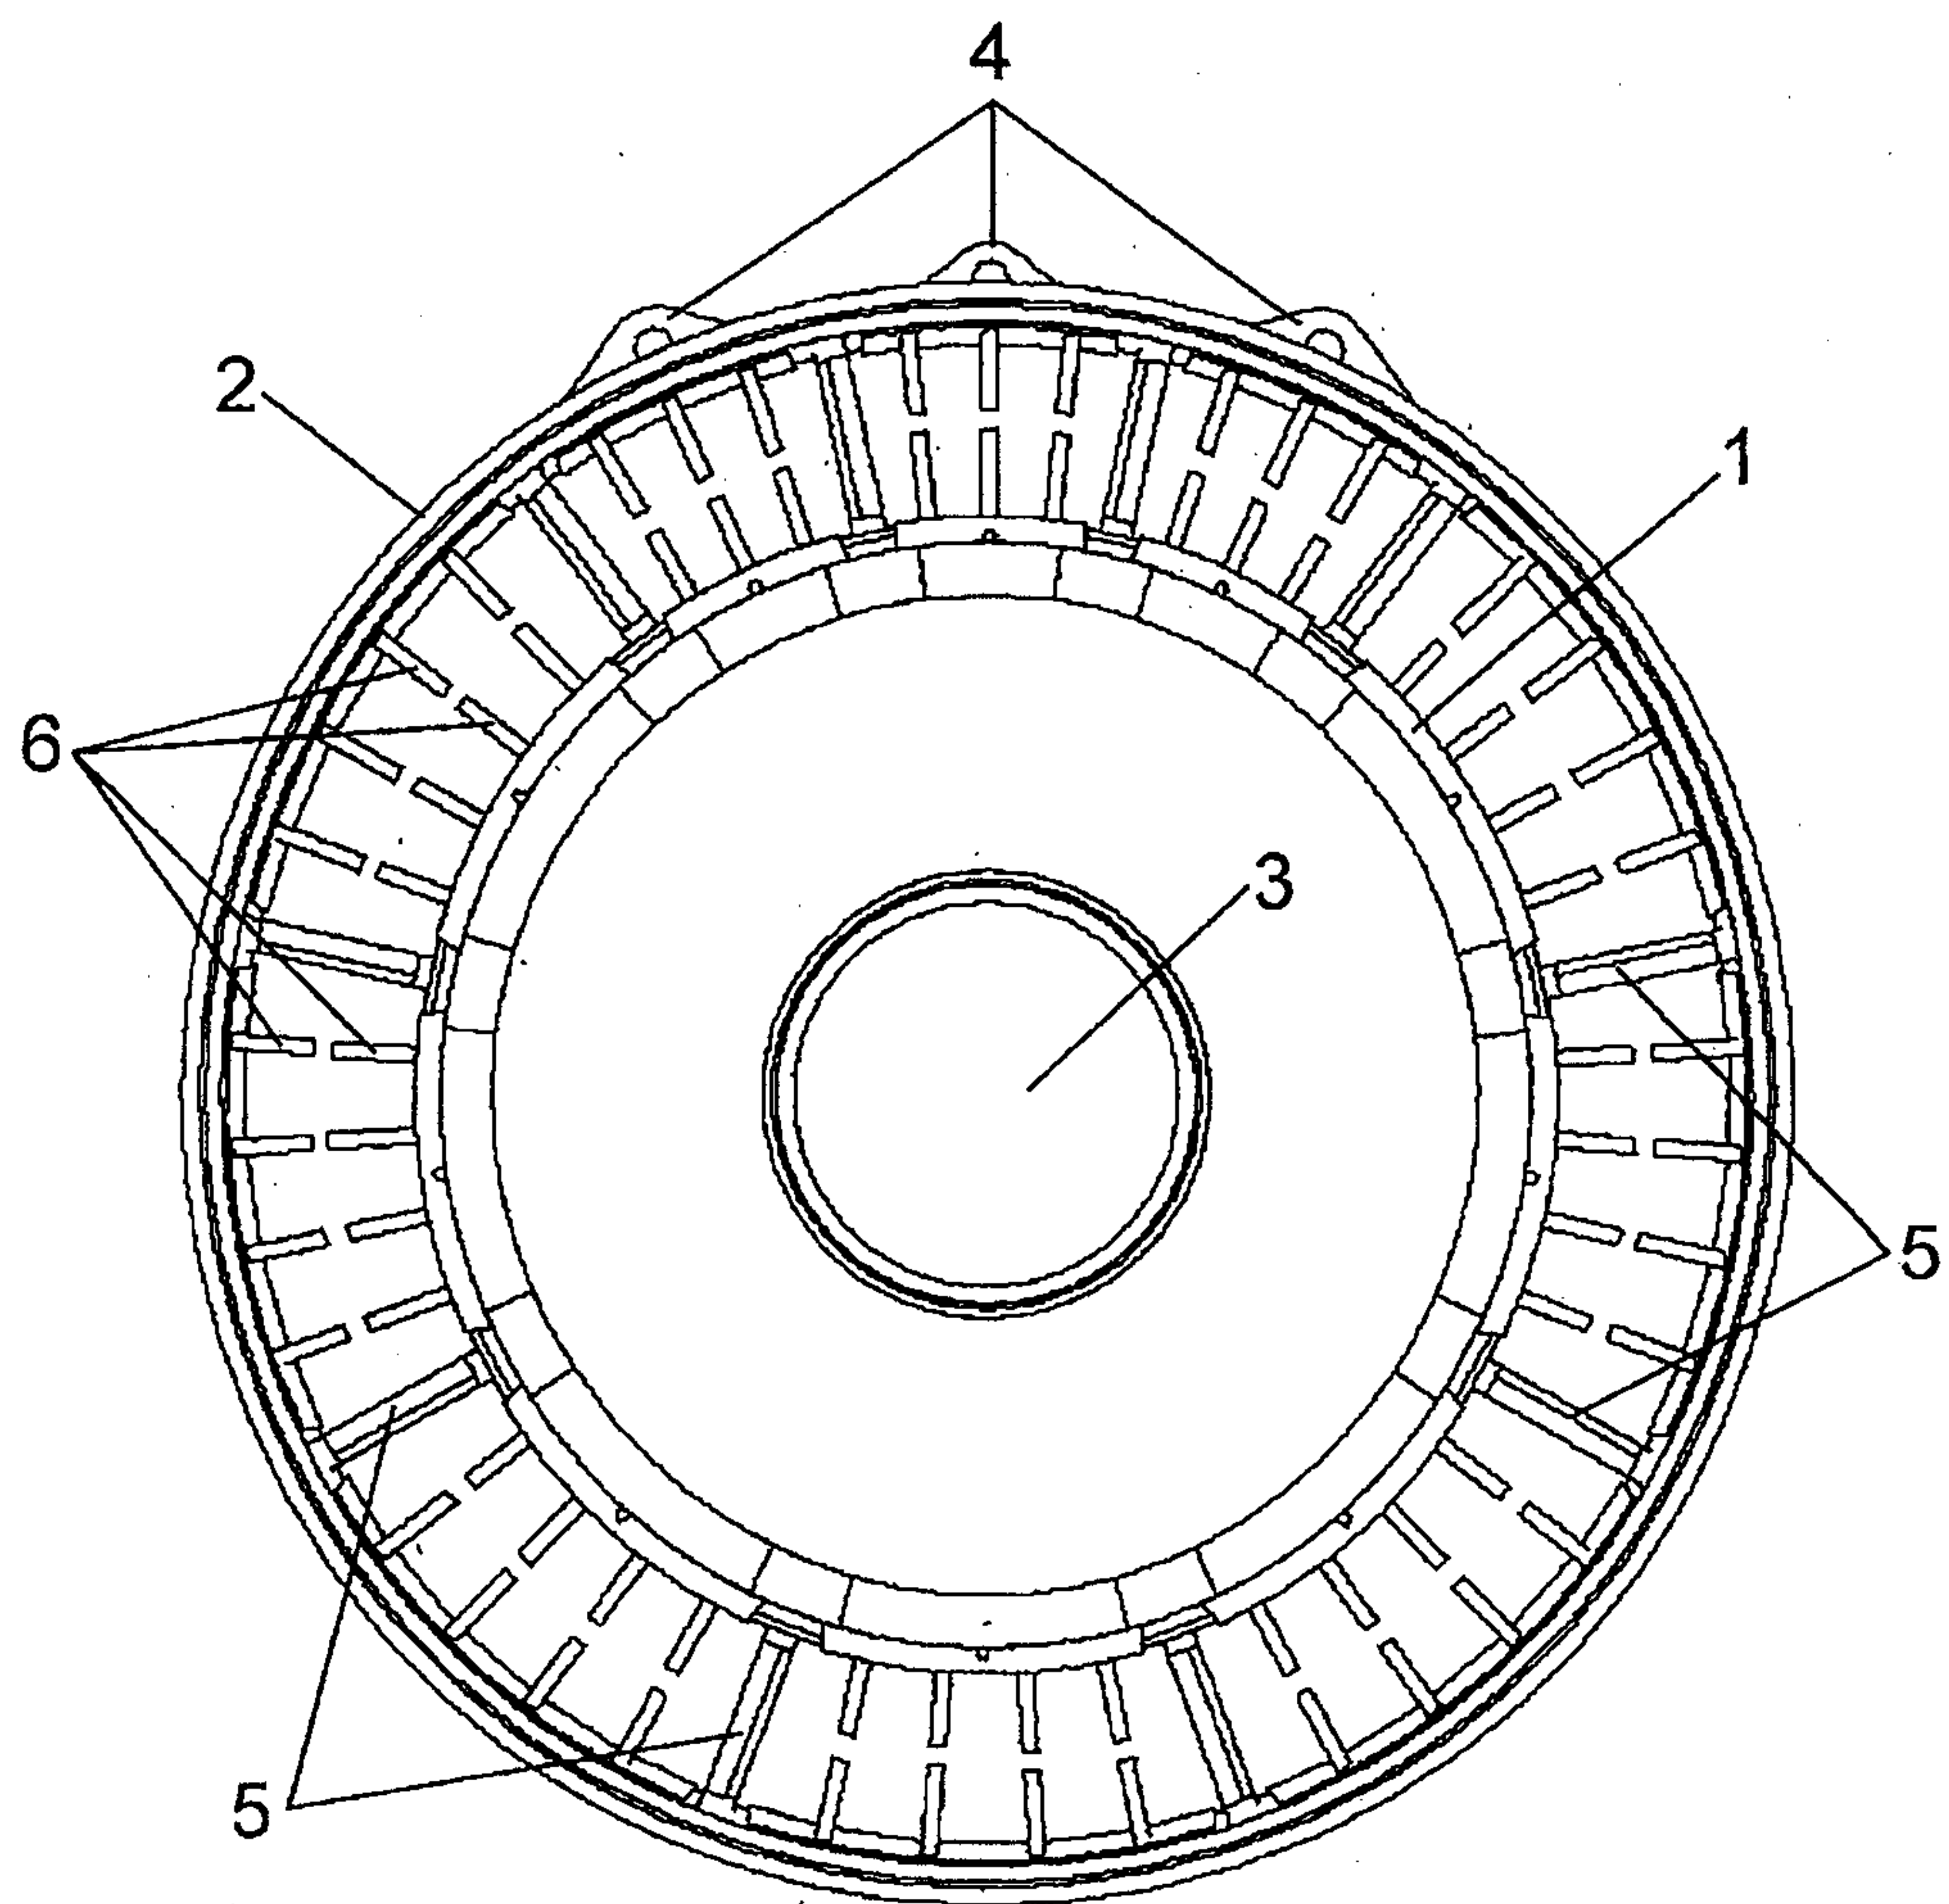


FIG. 8

