

(57) Abrégé(suite)/Abstract(continued):

adapted to be in sealing contact one with the other, at least two helical fuel channels (56) defined in at least one of the inner and outer surfaces (40, 54) and being in fluid communication with a fuel inlet (62), and a channel exit port (58) for each helical fuel channel (56). The present invention also includes a method of distributing fuel in a fuel nozzle (30) comprising the steps of providing at least two helical channels (56) in the fuel nozzle (30), each having a channel exit port (58), providing a fuel inlet cavity (60) in fluid communication with the helical channels (56), and flowing fuel in the fuel inlet cavity (60), the helical channels (56) and the channel exit ports (58).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/061964 A1

(51) International Patent Classification⁷: **F23R 3/28**,
3/14, B23P 15/00, 15/16, B21D 53/00

(74) Agent: **OGILVY RENAULT**; Suite 1600, 1981 McGill
College Avenue, Montreal, 10 H3A 2Y3 (CA).

(21) International Application Number:
PCT/CA2004/002181

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
22 December 2004 (22.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/743,712 24 December 2003 (24.12.2003) US

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **PRATT & WHITNEY CANADA CORP.** [CA/CA]; 1000 Marie Victorin, (01BE5), Longueuil, Québec J4G 1A1 (CA).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **PROCIW, Lev Alexander** [CA/CA]; 26 Meadowlark Road, Elmira, Ontario N3B 1V1 (CA).

Published:

— with international search report

[Continued on next page]

(54) Title: HELICAL CHANNEL FUEL DISTRIBUTOR AND METHOD

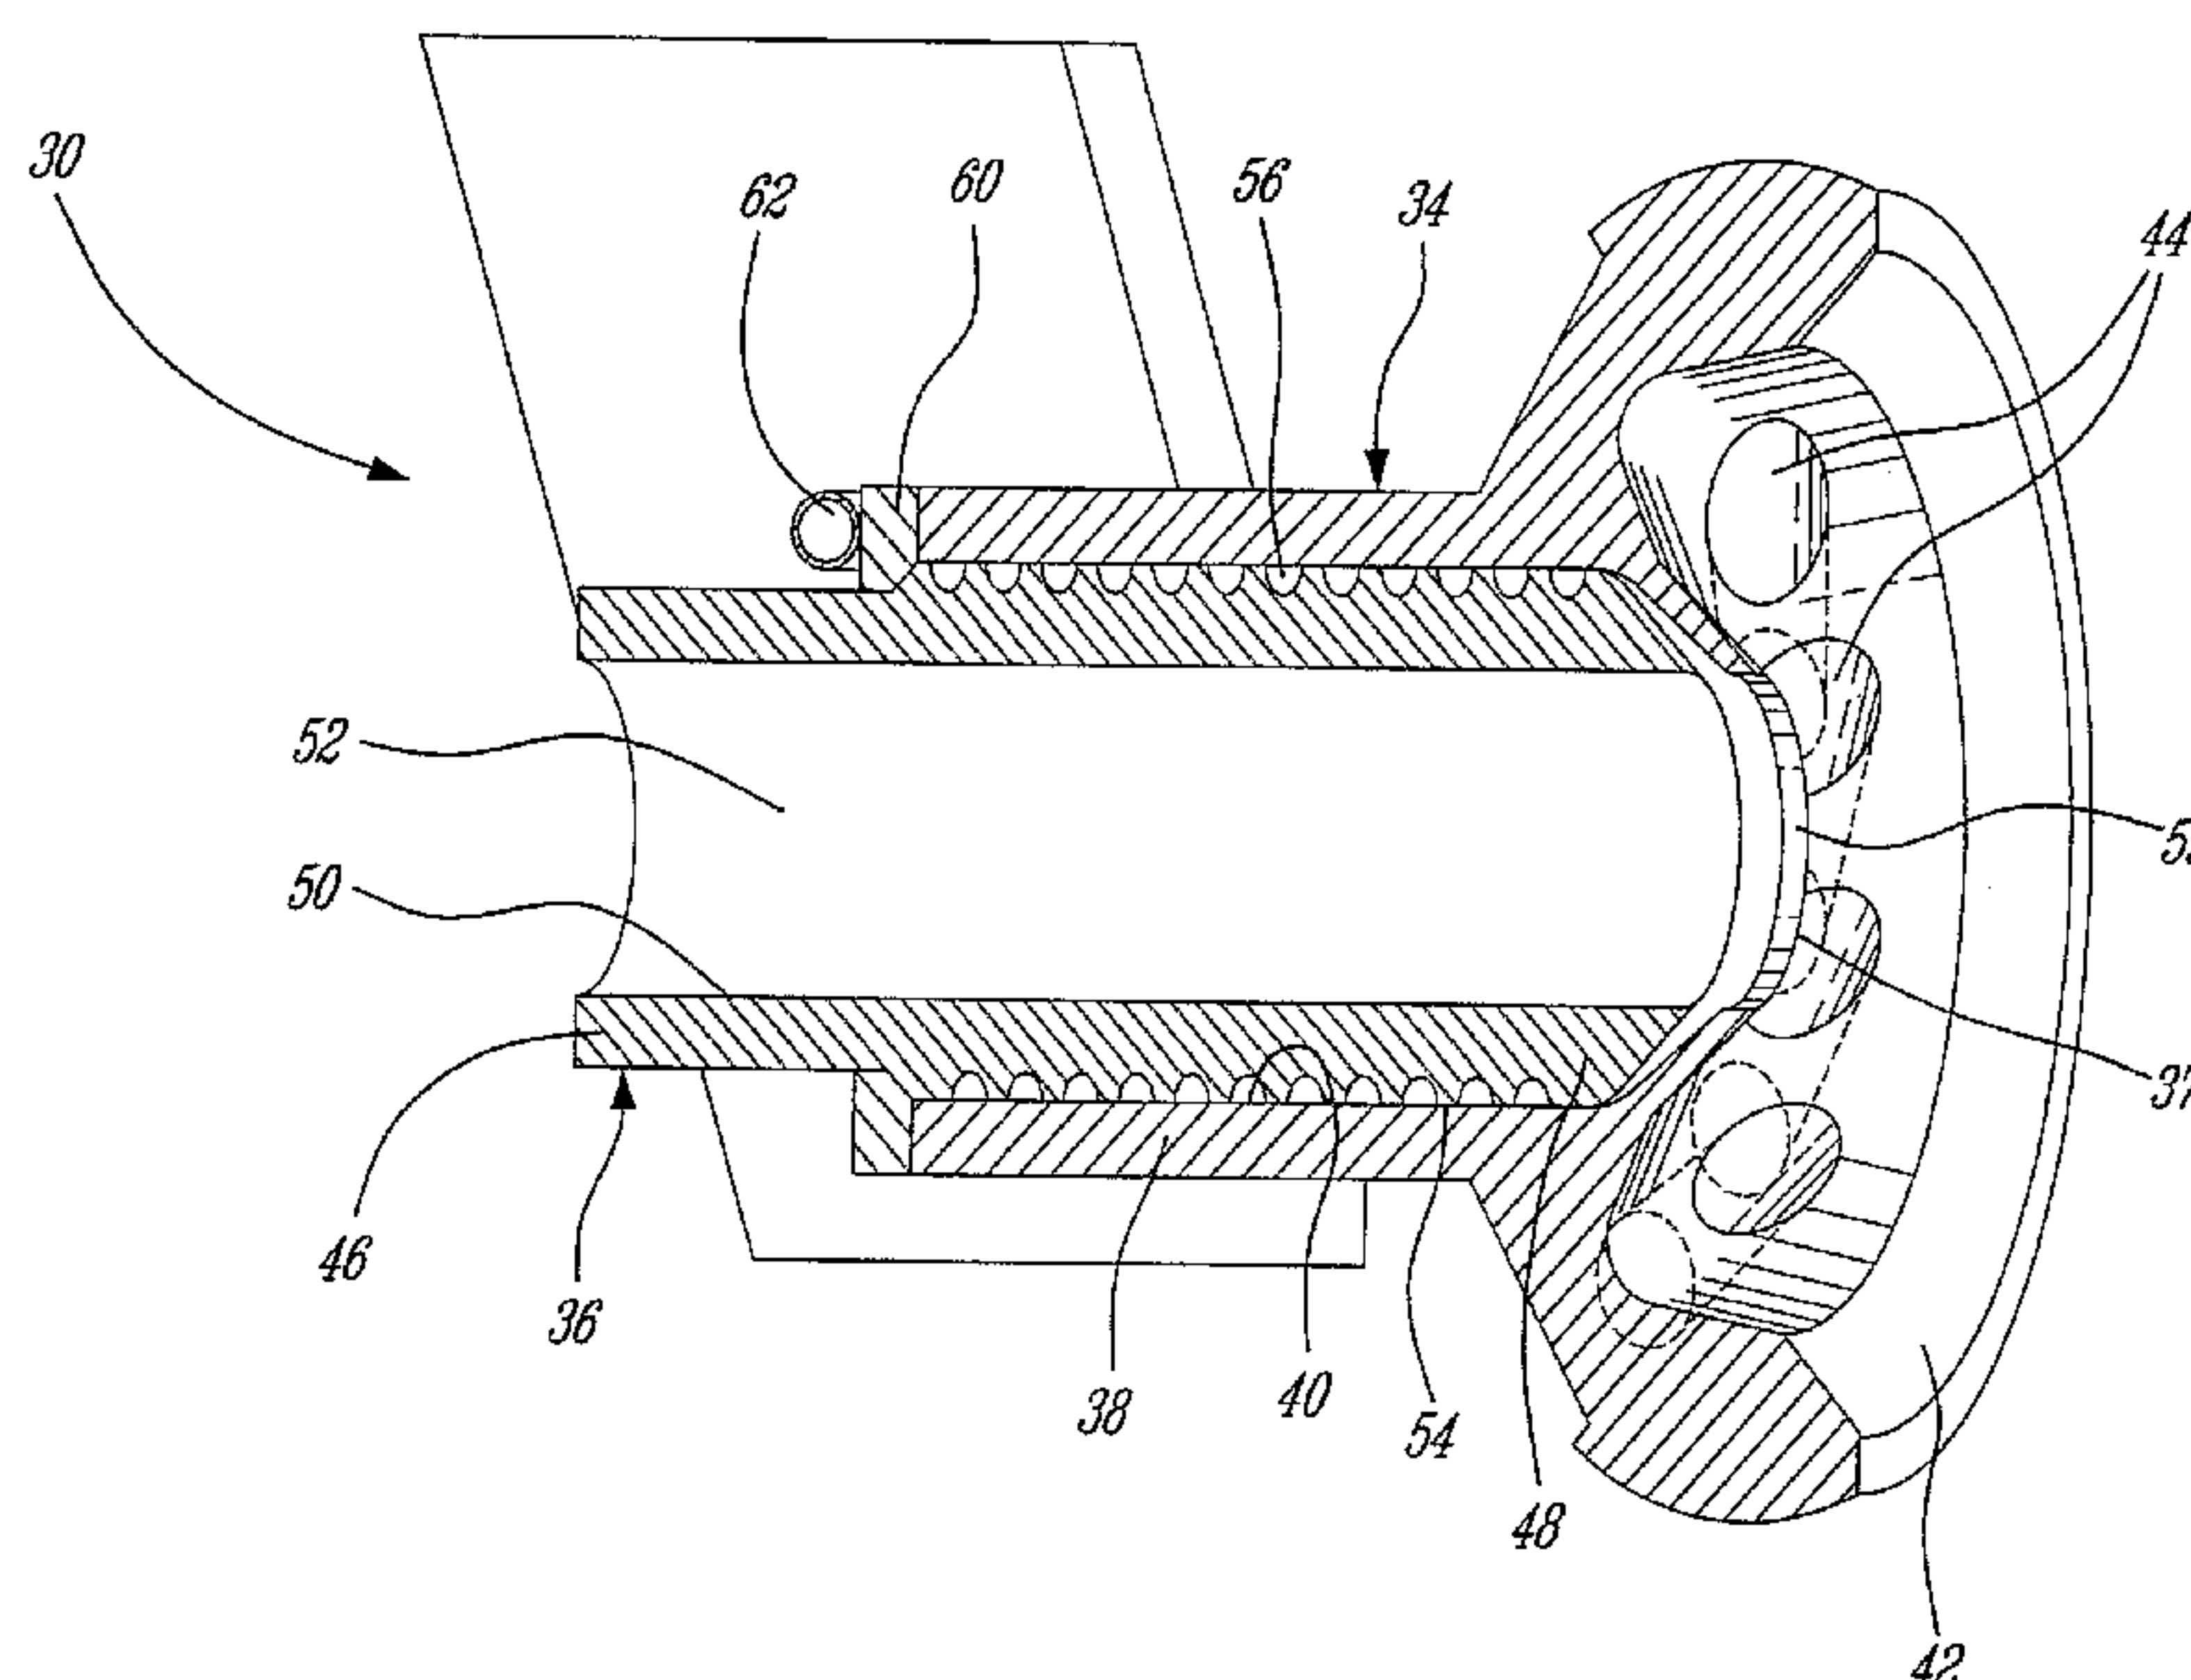

(57) Abstract: The present invention includes a fuel distributor (36) for a fuel nozzle (30) in a gas turbine engine (10) comprising an inner tubular body (46) and an outer tubular body (38) respectively having an outer body inner surface (40) and an inner body outer surface (54) adapted to be in sealing contact one with the other, at least two helical fuel channels (56) defined in at least one of the inner and outer surfaces (40, 54) and being in fluid communication with a fuel inlet (62), and a channel exit port (58) for each helical fuel channel (56). The present invention also includes a method of distributing fuel in a fuel nozzle (30) comprising the steps of providing at least two helical channels (56) in the fuel nozzle (30), each having a channel exit port (58), providing a fuel inlet cavity (60) in fluid communication with the helical channels (56), and flowing fuel in the fuel inlet cavity (60), the helical channels (56) and the channel exit ports (58).

WO 2005/061964 A1

WO 2005/061964 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

HELICAL CHANNEL FUEL DISTRIBUTOR AND METHOD

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to gas turbine engines, and more particularly to a fuel nozzle for such gas turbine engines.

2. Background Art

10 Fuel nozzles of gas turbine engines usually comprise a fuel distributor for dividing the fuel in several equal streams in order to develop a uniform fuel film. The fuel distributor is often also responsible for swirling the fuel streams to obtain a good fuel spray distribution.

15 Fuel distributors usually comprise a sealed disk element having a plurality of circumferentially spaced apart small metering holes or slots. The disk is usually mounted on a cylindrical channel adapted to deliver the fuel. The small metering holes are drilled with an axial as well as a circumferential orientation in order to provide a swirl to the fuel passing therethrough.

20 This configuration poses several problems, one of which is the fact that drilling identical holes of such a small size can be very difficult. If sufficient similarity between metering hole sizes is not achieved, the fuel film is not uniform, causing a poor spray quality. In addition, holes of such a small size are very susceptible to contamination or plugging.

Another problem with the prior art is that the channels upstream of the metering holes are exposed to a high amount of heat input through adjacent walls due to external heat transfer from hot air to the cool walls. This can lead to coke formation and hole plugging.

25 Also, the resistance of the metering holes is often insufficient to reach the desired nozzle resistance value, and a tuning orifice is often required at the inlet of the nozzle to compensate.

30 Finally, the disk is usually sealed with braze to prevent unmetered fuel from escaping around the metering holes. This presents a risk in manufacturing since braze can run into the metering holes, blocking them after the braze sets.

Accordingly, there is a need for an improved fuel distributor that overcomes the above-mentioned problems of the prior art.

SUMMARY OF INVENTION

It is therefore an aim of the present invention to provide an improved fuel distributor.

In accordance with the present invention, there is provided a fuel distributor for a fuel
5 nozzle in a gas turbine engine, the fuel distributor comprising a pair of concentric tubular bodies, each having an inlet end and a outlet end, the pair of concentric tubular bodies including an inner body and an outer body having respectively an outer body inner surface and an inner body outer surface adapted to be in sealing contact one with the other, at least two helical fuel channels adapted to deliver fuel
10 and defined in at least one of the inner and outer surfaces, each helical fuel channel being in fluid communication with a fuel inlet located at the inlet end; and a channel exit port for each helical fuel channel, the channel exit ports being located at the outlet end.

Also in accordance with the present invention, there is provided a fuel
15 distributor for providing a fuel film within a combustion chamber of a combustor in a gas turbine engine, the fuel distributor comprising fuel inlet means for receiving the fuel, fuel outlet means including a fuel filming means, and at least two spiral conduit means for delivering the fuel, the spiral conduit means being in fluid communication with the fuel inlet means and the fuel outlet means.

Further in accordance with the present invention, there is provided a
20 method of distributing fuel in a fuel nozzle of a combustor assembly of a gas turbine engine, the method comprising the steps of providing at least two helical channels in the fuel nozzle with a channel exit port in fluid communication with each helical channel, providing a fuel inlet cavity in fluid communication with the helical
25 channels, flowing fuel in the fuel inlet cavity, flowing fuel through the helical channels, and flowing fuel through the channel exit ports.

Also in accordance with the present invention, there is provided a method of fabricating a fuel distributor adapted to swirl fuel in a combustor assembly of a gas turbine engine, the method comprising the steps of providing an elongated
30 cylindrical member, forming at least two helical grooves along an outer surface of the elongated cylindrical member, forming one end of the elongated cylindrical member so as to produce a frustro-conical surface at the end, such that channel exit ports are created where the helical grooves intersect the frustro-conical surface, and fitting the elongated cylindrical member into a tubular member such that the cooperation of a
35 continuous inner surface of the tubular member with the outer surface having helical grooves forms independent helical channels adapted to communicate fuel.

BRIEF DESCRIPTION OF THE DRAWINGS

Having thus generally described the nature of the invention, reference will now be made to the accompanying drawings, showing by way of illustration a preferred embodiment thereof and in which:

5 Fig.1 is a side view of a gas turbine engine, in partial cross-section, exemplary of an embodiment of the present invention;

Fig.2 is a simplified side view of a combustor of a gas turbine engine, in cross-section, exemplary of an embodiment of the present invention;

10 Fig.3 is side view, in cross-section, of a fuel nozzle according to a preferred embodiment of the present invention;

Fig.4 is a side view, in partial cross-section, of the fuel nozzle of Fig.3; and

Fig.5 is a front view of a fuel distributor of the fuel nozzle of Fig.3.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 Fig.1 illustrates a gas turbine engine 10 of a type preferably provided for use in subsonic flight, generally comprising in serial flow communication a fan 12 through which ambient air is propelled, a multistage compressor 14 for pressurizing the air, a combustor 16 in which the compressed air is mixed with fuel and ignited for generating an annular stream of hot combustion gases, and a turbine
20 18 for extracting energy from the combustion gases.

Referring to Fig.2, the combustor section 16 is shown. The combustor section 16 includes an annular casing 20 and an annular combustor tube 22 concentric with the turbine section 18 and defining a combustor chamber 23. The turbine section 18 is shown with a typical rotor 24 having blades 26 and a stator vane
25 28 upstream from the blades 26.

A fuel nozzle 30 is shown as being located at the end of the annular combustor tube 22 and directly axially thereof. The fuel nozzle 30 includes a fitting 32 to be connected to a typical fuel line. There may be several fuel nozzles 30 located on the wall of the combustion chamber, and they may be circumferentially spaced
30 apart. For the purpose of the present description, only one fuel nozzle 30 will be described.

Referring to Fig.3 and 4, a fuel nozzle 30 according to a preferred embodiment of the invention is shown. The fuel nozzle 30 comprises an air swirler 34 and a fuel distributor 36. The fuel nozzle also comprises a fuel filmer lip 37 having the function
35 of generating a fuel film from the swirled fuel received from the fuel distributor 36.

PCT/CA 2004/002181
21 OCTOBER 2005 21-10.05

The air swirler 34 comprises a tubular body 38 including an inner surface 40 defining a central bore adapted to receive the fuel distributor 36. The air swirler 34 also comprises outer air swirling means of a type similar to outer air swirling means of fuel injectors known in the art, such as is described in US Patent
5 No. 6,082,113, issued July 4, 2000 to the applicant. Preferably, the outer air swirling means include an air swirler frusto-conical ring 42 having a plurality of circumferentially spaced apart bores 44. The axis of each bore 44 has an axial as well as a circumferential component so as to be able to swirl the air passing therethrough.

The fuel filmer lip 37 is located at the junction of the inner surface 40
10 and frusto-conical ring 42 of the air swirler.

The fuel distributor 36 comprises a tubular body 46 having a frusto-conical end 48. The tubular body 46 includes an inner surface 50 defining a cylindrical core air passage 52. The tubular body 46 also includes an outer surface 54 having a plurality of helical grooves 56. In a preferred embodiment, three helical
15 grooves 56 are defined in the outer surface 54 and are helically parallel to one another, i.e. the grooves are interlaced so that three successive grooves along an axial line will belong respectively to the first, second and third helical groove. Once the fuel distributor 36 is fitted into the air swirler 34, the inner surface 40 of the air swirler 34 cooperates with the outer surface 54 of the fuel distributor 36 so that each
20 helical groove 56 defines a closed helical channel. Each helical channel is in fluid communication with an inlet fuel cavity 60 receiving fuel from a fuel inlet 62. The intersection of a surface of the frusto-conical end 48 with an end of each helical groove 56 creates channel exit ports 58, as can best be seen in Fig.5. The shape of the channel exit ports 58 contributes to the swirl of the fuel in a fuel swirling chamber 59
25 defined between the frusto-conical end 48 of the fuel distributor 36 and the fuel filmer lip 37.

The helical grooves 56 and frusto-conical end 48 are preferably formed by standard turning operations. The fuel distributor 36 is preferably shrink-fit into the air swirler 34. The shrink-fit allows the inner surface 40 of the air swirler 34
30 and the outer surface 54 of the fuel distributor 36 to cooperate so that the helical grooves 56 can define sealed fuel channels without the need for braze.

It is considered to provide helical grooves 56 with a depth progressively shallower toward the frusto-conical end 48 in order to decrease the pressure drop in the beginning of each channel (i.e. near the fuel inlet 60) and
35 increase it toward the end thereof (i.e. near the frusto-conical end 48). The channel

exit ports 58 can be designed so as to have an exit flow area similar to that provided by the metering holes of the prior art in order to obtain similar filming of fuel.

It is also contemplated to define the helical grooves into the inner surface 40 of the air swirler 34 to obtain the closed helical channels in cooperation with the outer surface 54 of the fuel distributor 36, the outer surface 54 being continuous. Alternatively, both the air swirler inner surface 40 and fuel distributor outer surface 54 can have helical grooves defined therein to form the helical channels.

During operation, the pressurized fuel enters the fuel inlet 60 and fills the fuel inlet cavity 62. The fuel pressure then forces the fuel in the helical channels defined by the helical grooves 56. The fuel in each helical channel exits through the corresponding channel exit port 58. The helical motion of the fuel through the helical channels and the shape of the channel exit ports 58 both contribute to producing a swirl in the fuel exiting the fuel distributor 36 and entering the fuel swirling chamber 59. The swirling fuel is then transformed into a fuel film in a manner similar to standard fuel nozzles, by the interaction of the fuel swirling out of the swirling chamber 59 through an opening defined by the fuel filmer lip 37 with air exiting the core air passage 52. The fuel film is then atomized by contact with swirling air coming from the bores 44 of the frusto conical ring 42 of the air swirler 34. It is also possible to omit the fuel filmer lip 37 so that the fuel exiting from the exit ports 58 is directly atomized by the swirling air without being transformed into a fuel film.

The present invention presents several improvements over the prior art. Since the flow resistance of the nozzle is distributed over the length of the channels rather than across metering holes, a better uniformity of resistance can be achieved which results in a more accurate fuel division. Also, since the helical grooves 56 are formed by standard turning operations, the dimensions of the helical channels can be highly accurate and the operation is less expensive than drilling small metering holes. Forming the channels through standard turning operations allows for easy selection of the length of the channels, which is a function of the pitch of the helical grooves, and of the depth of the channels, whether constant or variable along the channel length. The depth and length of the channels can therefore be chosen so as to tune the pressure drop of the fuel flowing therethrough, and this pressure drop distribution will have several effects on the fuel flow. Tuning the overall pressure drop of a nozzle provides tuning of its resistance with respect to the other nozzles of the combustor. This allows for balancing the flow among various nozzles without the need for a traditional tuning orifice, which reduces fabrication costs. The pressure drop of an individual channel can also be set so as to balance the

PCT/CA 2004/002181

21 OCTOBER 2005 21-10.05

resistance, thus the fuel flow, among the channels of a same nozzle. The channel length also as a great influence on the rate of heat transfer of the fuel flowing therethrough. Helical channels have the advantage of being much longer than straight channels, which provides for greater heat transfer along the channel. This contributes to reducing fabrication costs since heat transfer in the nozzle tip is reduced, eliminating requirement for additional heat shields. Finally, the depth of each channel can be selected in order to obtain a desired fuel velocity. Since smaller channels will induce a higher fuel velocity, the helical fuel channels, which are smaller than conventional channels, will provide a higher fuel velocity, thus less coke deposition on the channel walls.

The embodiments of the invention described above are intended to be exemplary. Those skilled in the art will therefore appreciate that the forgoing description is illustrative only, and that various alternatives and modifications can be devised. For example, any desired depth profile and groove cross-section may be used, and not all grooves need to be the same. Any number of grooves may be provided, and they may be provided by any suitable manufacturing method. Other apparatus may be provided having the described groove-like effect. The present distributor may be used alone, or in conjunction with prior art or other distribution and/or swirler apparatus. Accordingly, the present is intended to embrace all such alternatives, modifications and variances which fall within the scope of the appended claims.

CLAIMS:

1. A fuel distributor for a fuel nozzle in a gas turbine engine, the fuel distributor comprising:

a pair of concentric tubular bodies defining a longitudinal axis, each having an inlet end and a outlet end, the pair of concentric tubular bodies including an inner body and an outer body having respectively an outer body inner surface and an inner body outer surface adapted to be in sealing contact one with the other;

at least two helical fuel channels adapted to deliver fuel and defined in at least one of the inner and outer surfaces, each helical fuel channel defining several turns around the longitudinal axis, each helical fuel channel being in fluid communication solely with a fuel inlet located at the inlet end such that only fuel is caused to flow through the at least two helical fuel channels; and

a channel exit port for each helical fuel channel, the channel exit ports being located at the outlet end, the channel exit port being tangential to said at least one of the inner and outer surfaces of the tubular bodies, the helical fuel channels and the channel exit ports both contributing to producing a swirl in the fuel exiting the fuel distributor.

2. The fuel distributor according to claim 1, wherein the fuel nozzle provides a swirl to the fuel delivered through the helical fuel channels and exiting through the channel exit ports.

3. The fuel distributor according to claim 1, wherein the helical fuel channels are defined in the outer surface and the inner surface is an uninterrupted wall.

4. The fuel distributor according to claim 3, wherein the outlet end of at least the outer surface is frusto-conical and the channel exit ports are defined by the intersection of the helical fuel channels with the outer surface at the outlet end.

5. The fuel distributor according to claim 1, wherein the outer body and the inner body are press fit together.

6. The fuel distributor according to claim 4, wherein the inner and outer bodies define an annular swirl chamber at the outlet end with the frusto-conical surface forming one wall of the swirl chamber, and an annular filming lip is provided on the inner surface at the outlet end to define an annular exit slot for forming the fuel into a conical film.
7. The fuel distributor according to claim 1, wherein the inner tubular body is shrink-fit into the outer body.
8. The fuel distributor according to claim 1, wherein the inner tubular body further comprises an inner cylindrical passage adapted to deliver air from the inlet end to the outlet end.
9. The fuel distributor according to claim 1, wherein the outer body includes an annular disc having air swirl apertures.
10. The fuel distributor according to claim 1, wherein at least one channel has a depth varying along the length of the channel.
11. The fuel distributor according to claim 10, wherein the depth is varied in a continuous manner.
12. The fuel distributor according to claim 10, wherein the varying depth provides flow-balancing for the fuel nozzle in order to tune a flow resistance thereof.
13. The fuel distributor according to claim 1, wherein at least three helical fuel channels are provided.
14. The fuel distributor according to claim 13, wherein the helical fuel channels are helically parallel to one another.

15. A method of distributing fuel in a fuel nozzle of a combustor assembly of a gas turbine engine, the method comprising the steps of:

a) providing at least two helical channels in the fuel nozzle with a channel exit port in fluid communication with each helical channel, each helical channel defining a number of complete turns along a length of the fuel nozzle, each of the helical channels having a helix axis and a channel exit port axially aligned with the helix axis;

b) providing a fuel inlet cavity in fluid communication with the helical channels;

c) flowing fuel in the fuel inlet cavity;

d) flowing fuel through the helical channels wherein only fuel is circulated through the helical channels; and

e) flowing fuel through the channel exit ports.

16. The method according to claim 15, wherein in step e), the fuel flowing out of the channel exit ports has acquired a swirling motion.

17. The method according to claim 15, wherein in step a), the helical channels of the fuel distributor are provided by the cooperation of a first cylindrical surface with a second cylindrical surface, the first cylindrical surface including helical grooves and the second cylindrical surface being continuous.

18. The method according to claim 17, wherein the first cylindrical surface is an outer surface of a first body, the second surface is an inner surface of a second body, and in step a) the cooperation of the first and second surfaces is obtained by concentrically fitting the first body into the second body.


19. The method according to claim 18, wherein the first body is shrink-fit into the second body.

20. The method according to claim 18, wherein the second body includes an annular disc having air swirl apertures.


21. The method according to claim 15, wherein step a) further comprises sizing at least one helical fuel channel to obtain a desired fuel distribution among the helical fuel channels.
22. The method according to claim 15, wherein step a) further comprises sizing at least one helical fuel channel to obtain a desired nozzle flow resistance.
23. The method according to claim 15, wherein step a) further comprises selecting a length of the helical fuel channels in order to obtain a desired heat transfer during step d).
24. The method according to claim 15, wherein step a) further comprises sizing the helical fuel channels to provide a desired fuel pressure drop during step d).
25. The method according to claim 15, wherein step a) further comprises sizing the helical fuel channels to obtain a desired fuel velocity during step d).
26. A method of fabricating a fuel distributor adapted to swirl fuel in a combustor assembly of a gas turbine engine, the method comprising the steps of:
- a) providing an elongated cylindrical member;
 - b) forming at least two helical grooves along an outer surface of the elongated cylindrical member;
 - c) forming one end of the elongated cylindrical member so as to produce a frusto-conical surface at the end, such that channel exit ports are created where the helical grooves intersect the frusto-conical surface; and
 - d) fitting the elongated cylindrical member into a tubular member such that the cooperation of a continuous inner surface of the tubular member with the outer surface having helical grooves forms independent helical channels adapted to communicate fuel.
27. The method according to claim 26, wherein in step a) the cylindrical member includes a cylindrical bore concentric therewith.

28. The method according to claim 26, wherein in step d) the elongated cylindrical member is shrink-fit into the tubular member.

1 / 5

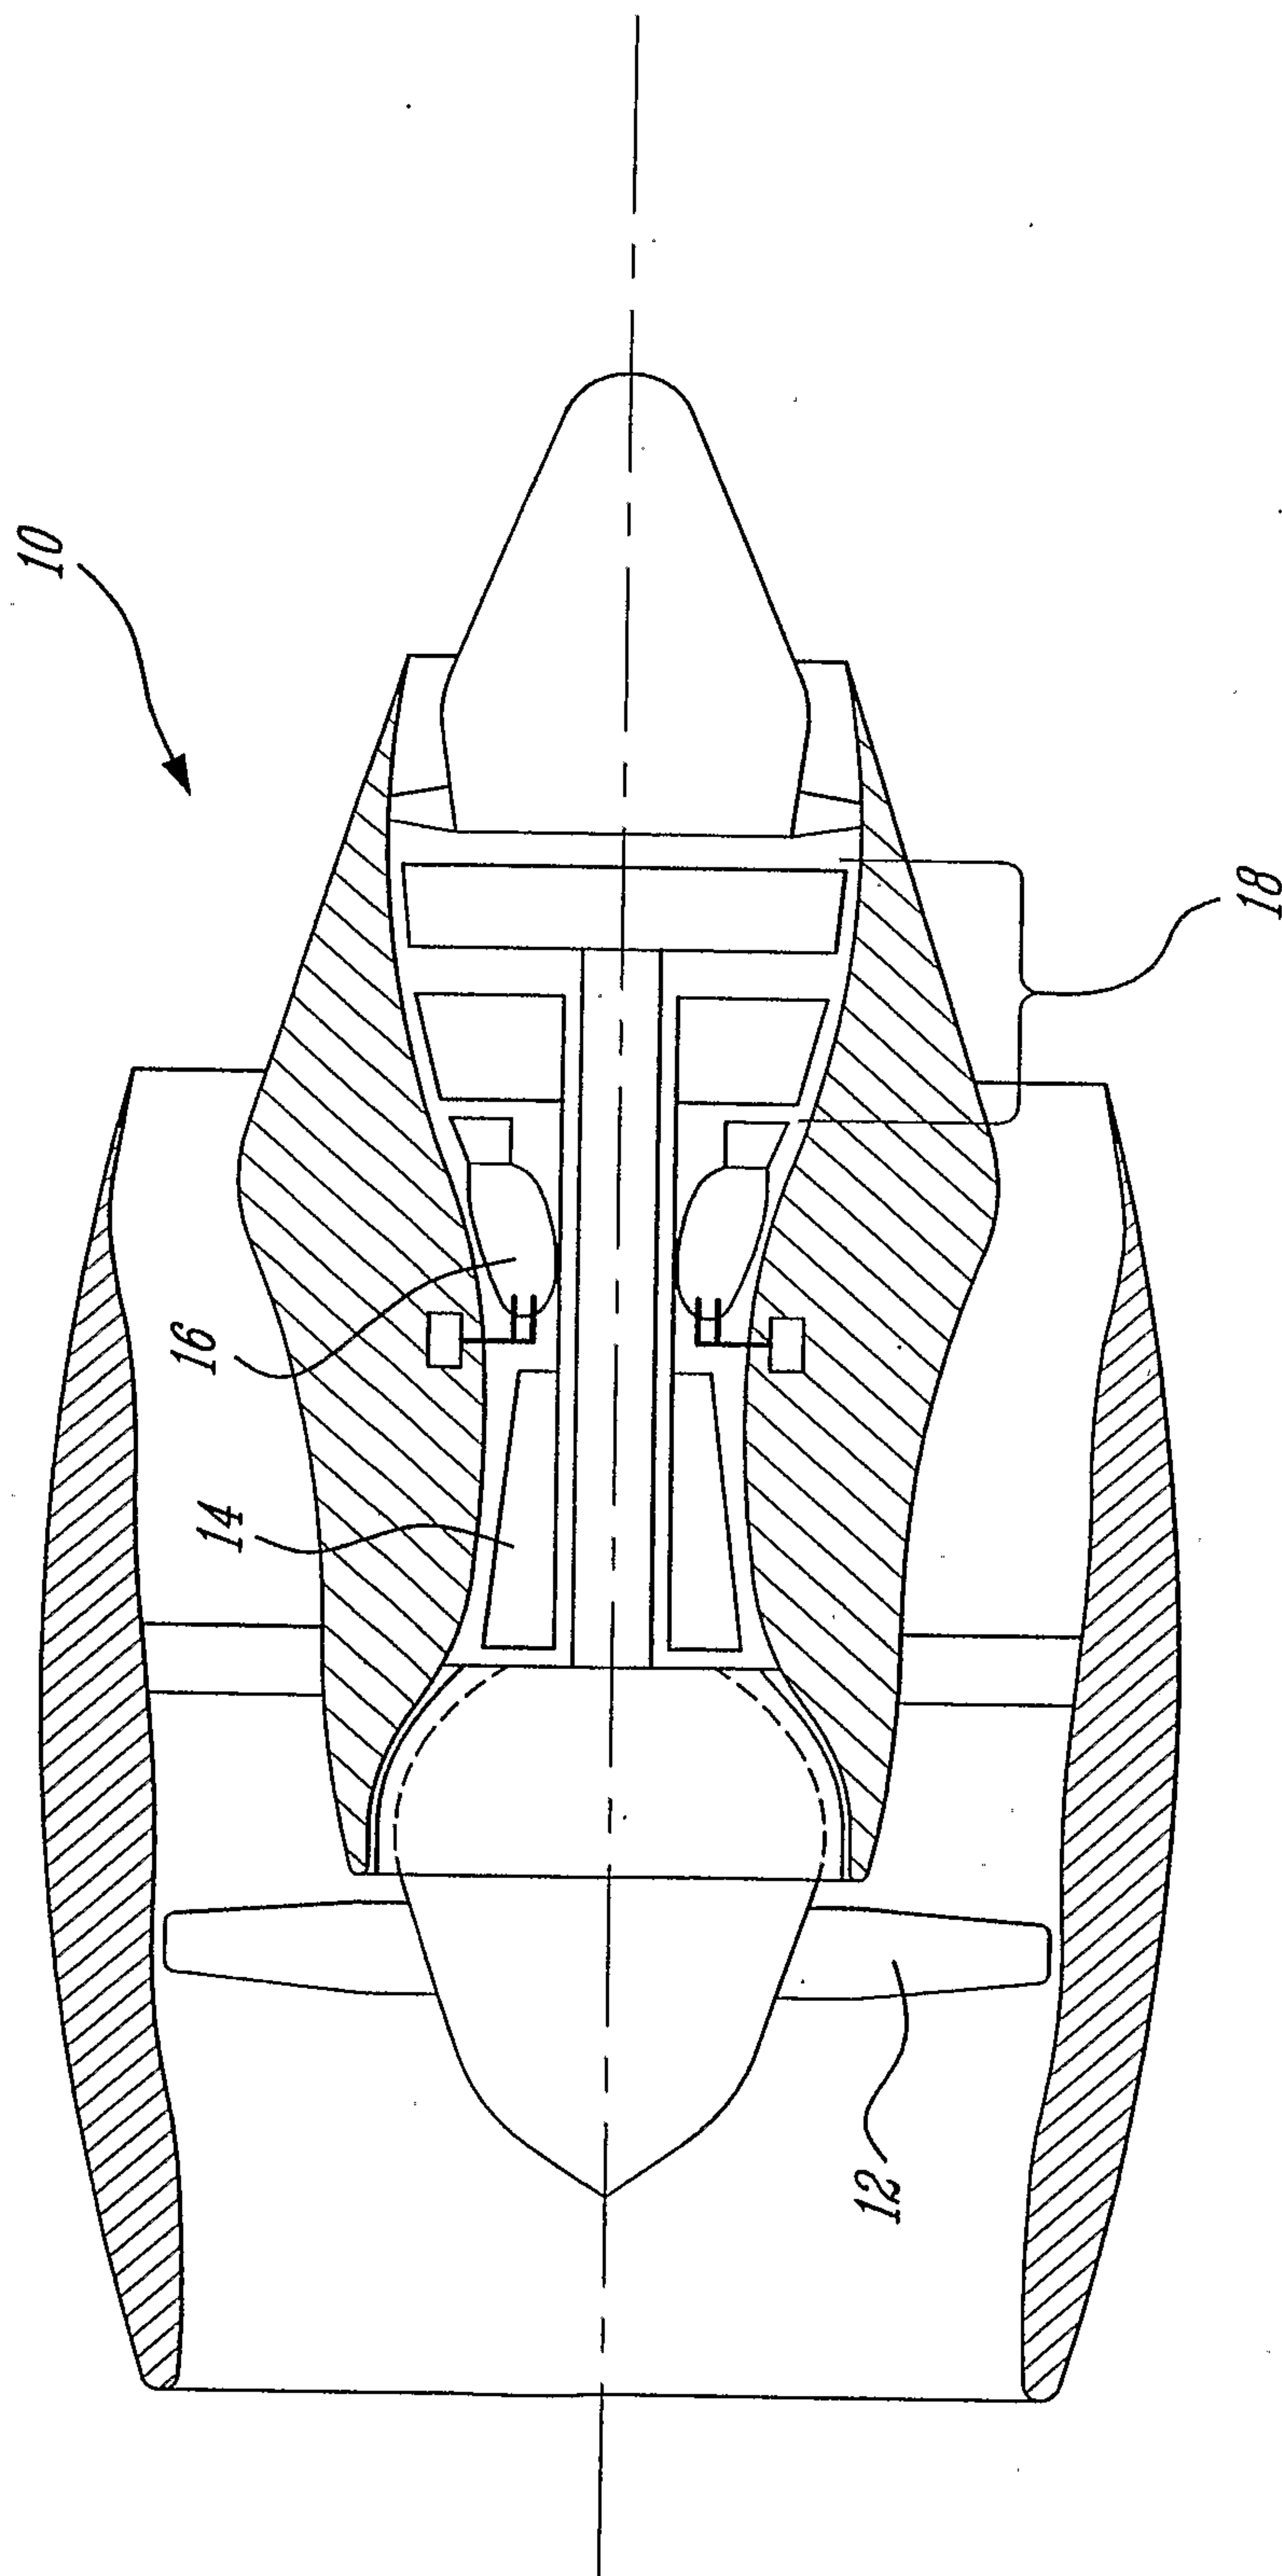*Fig. 1*

4 / 5

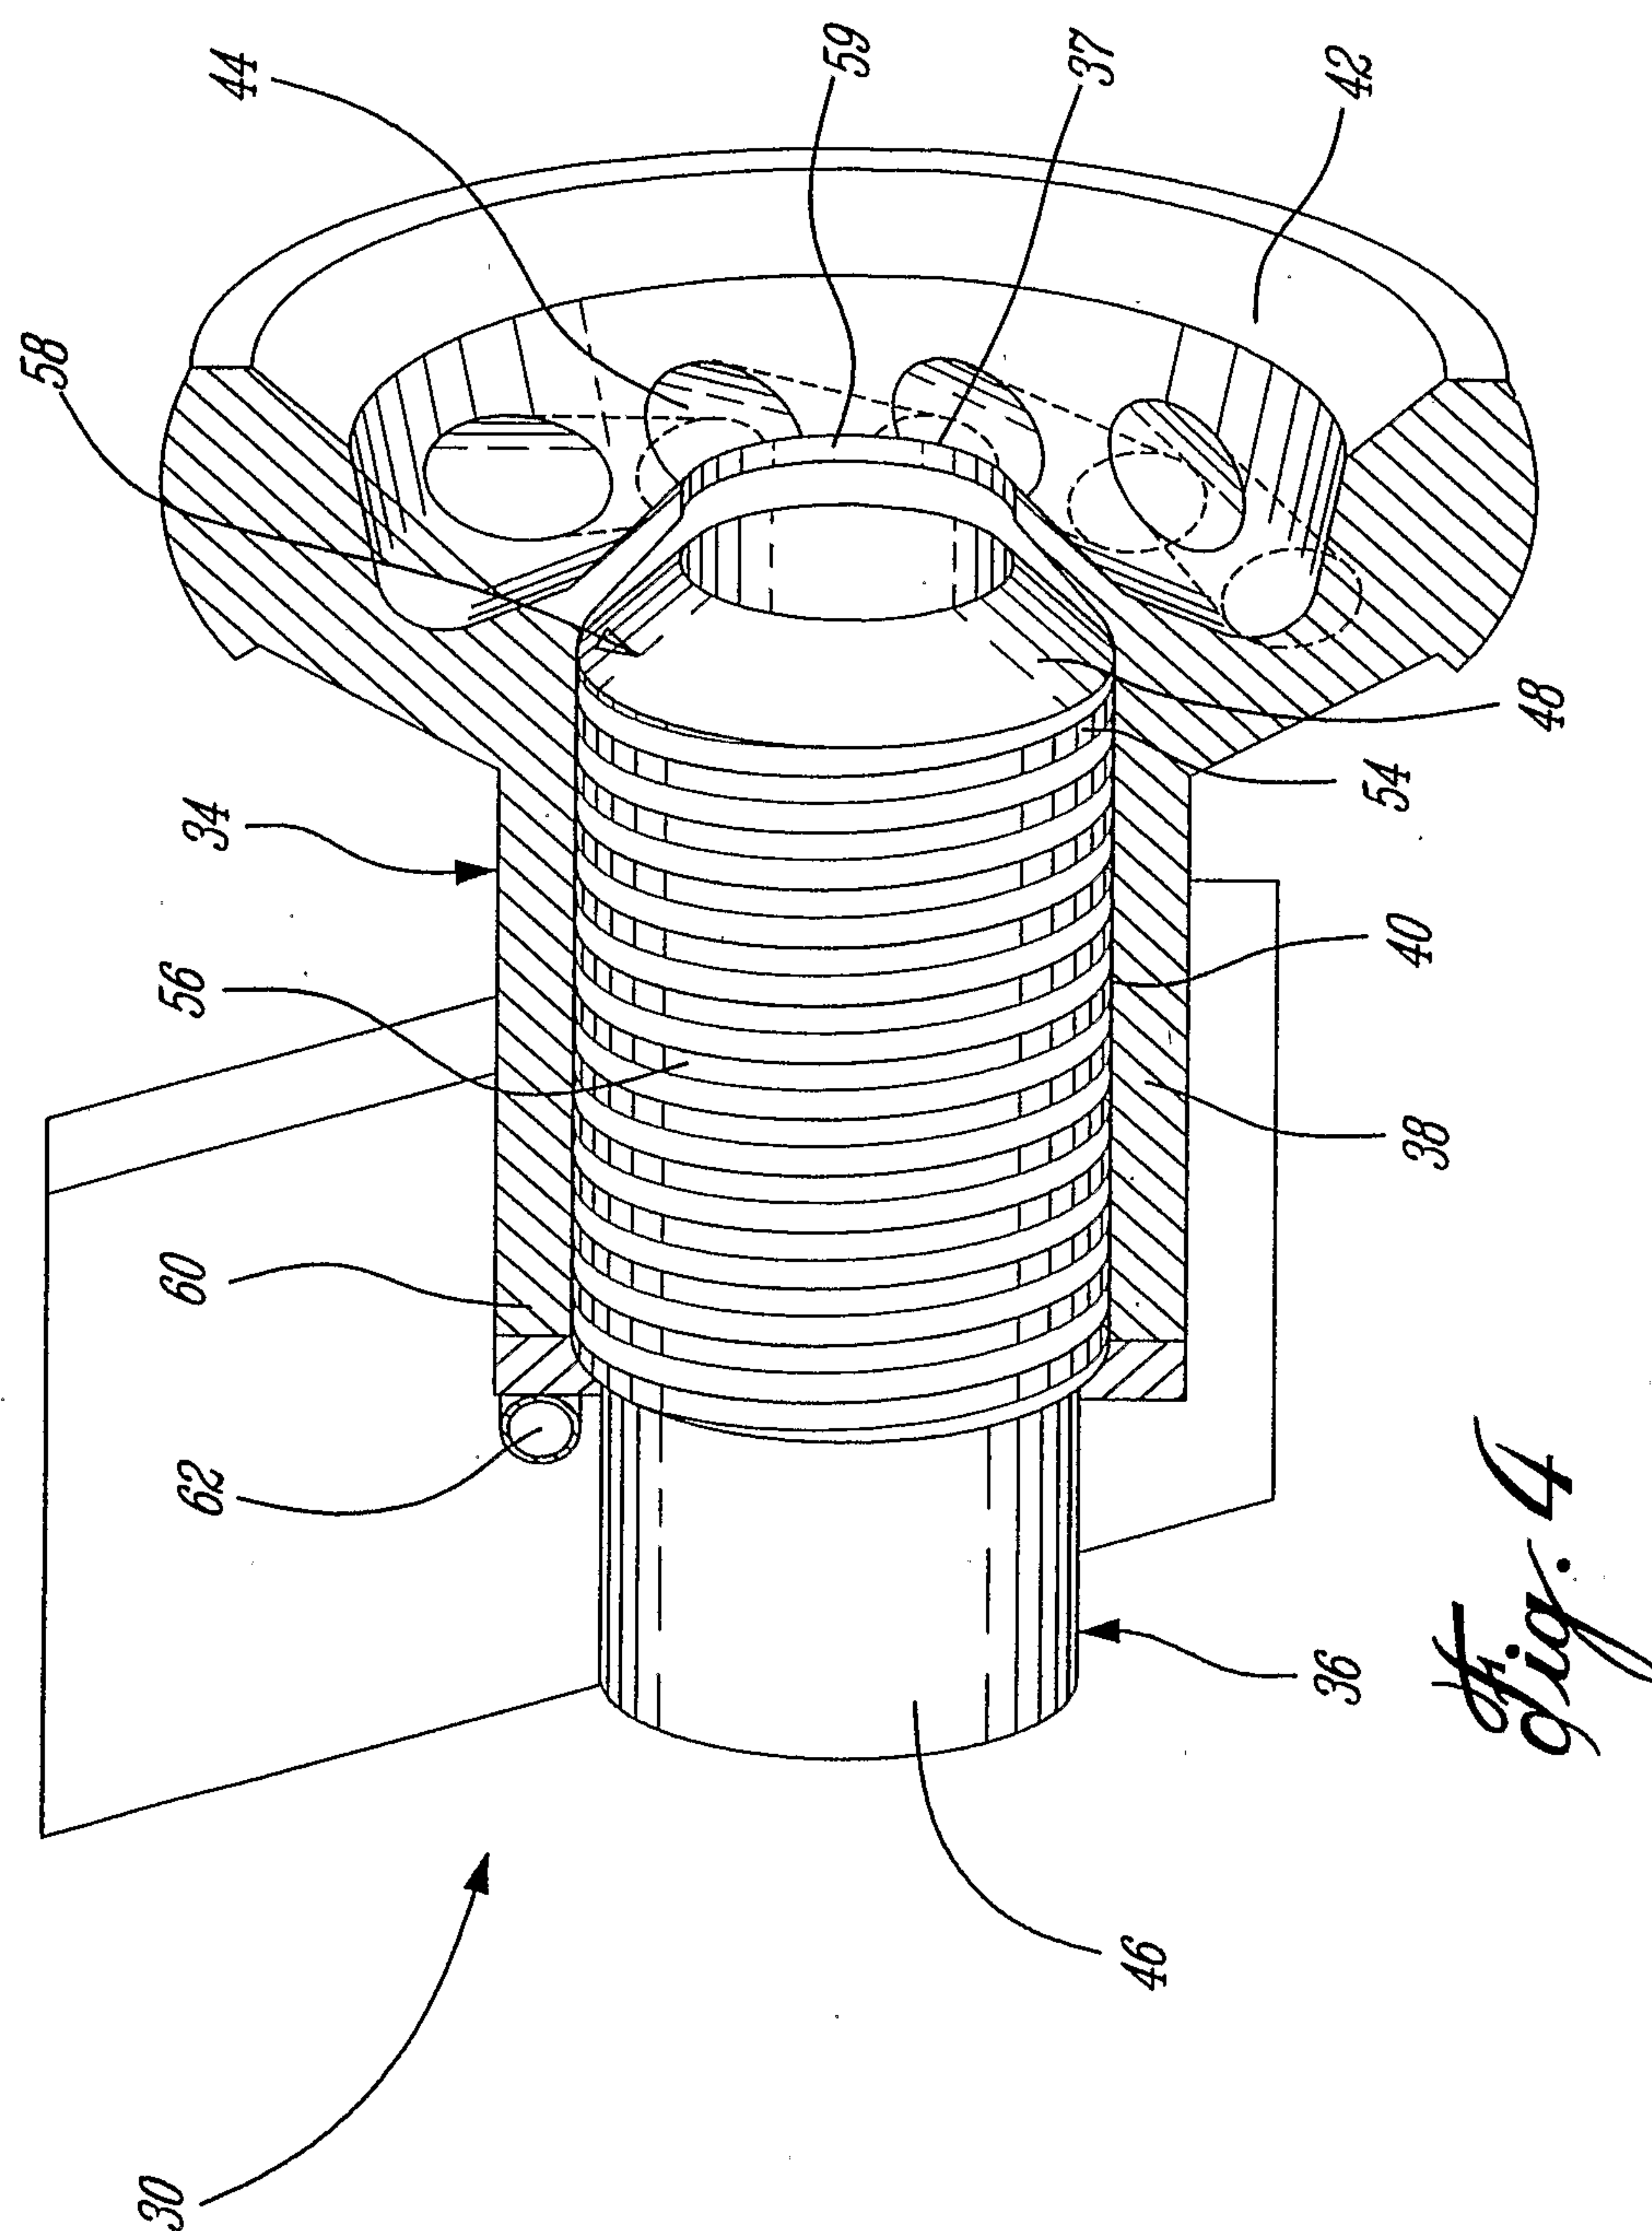

5 / 5

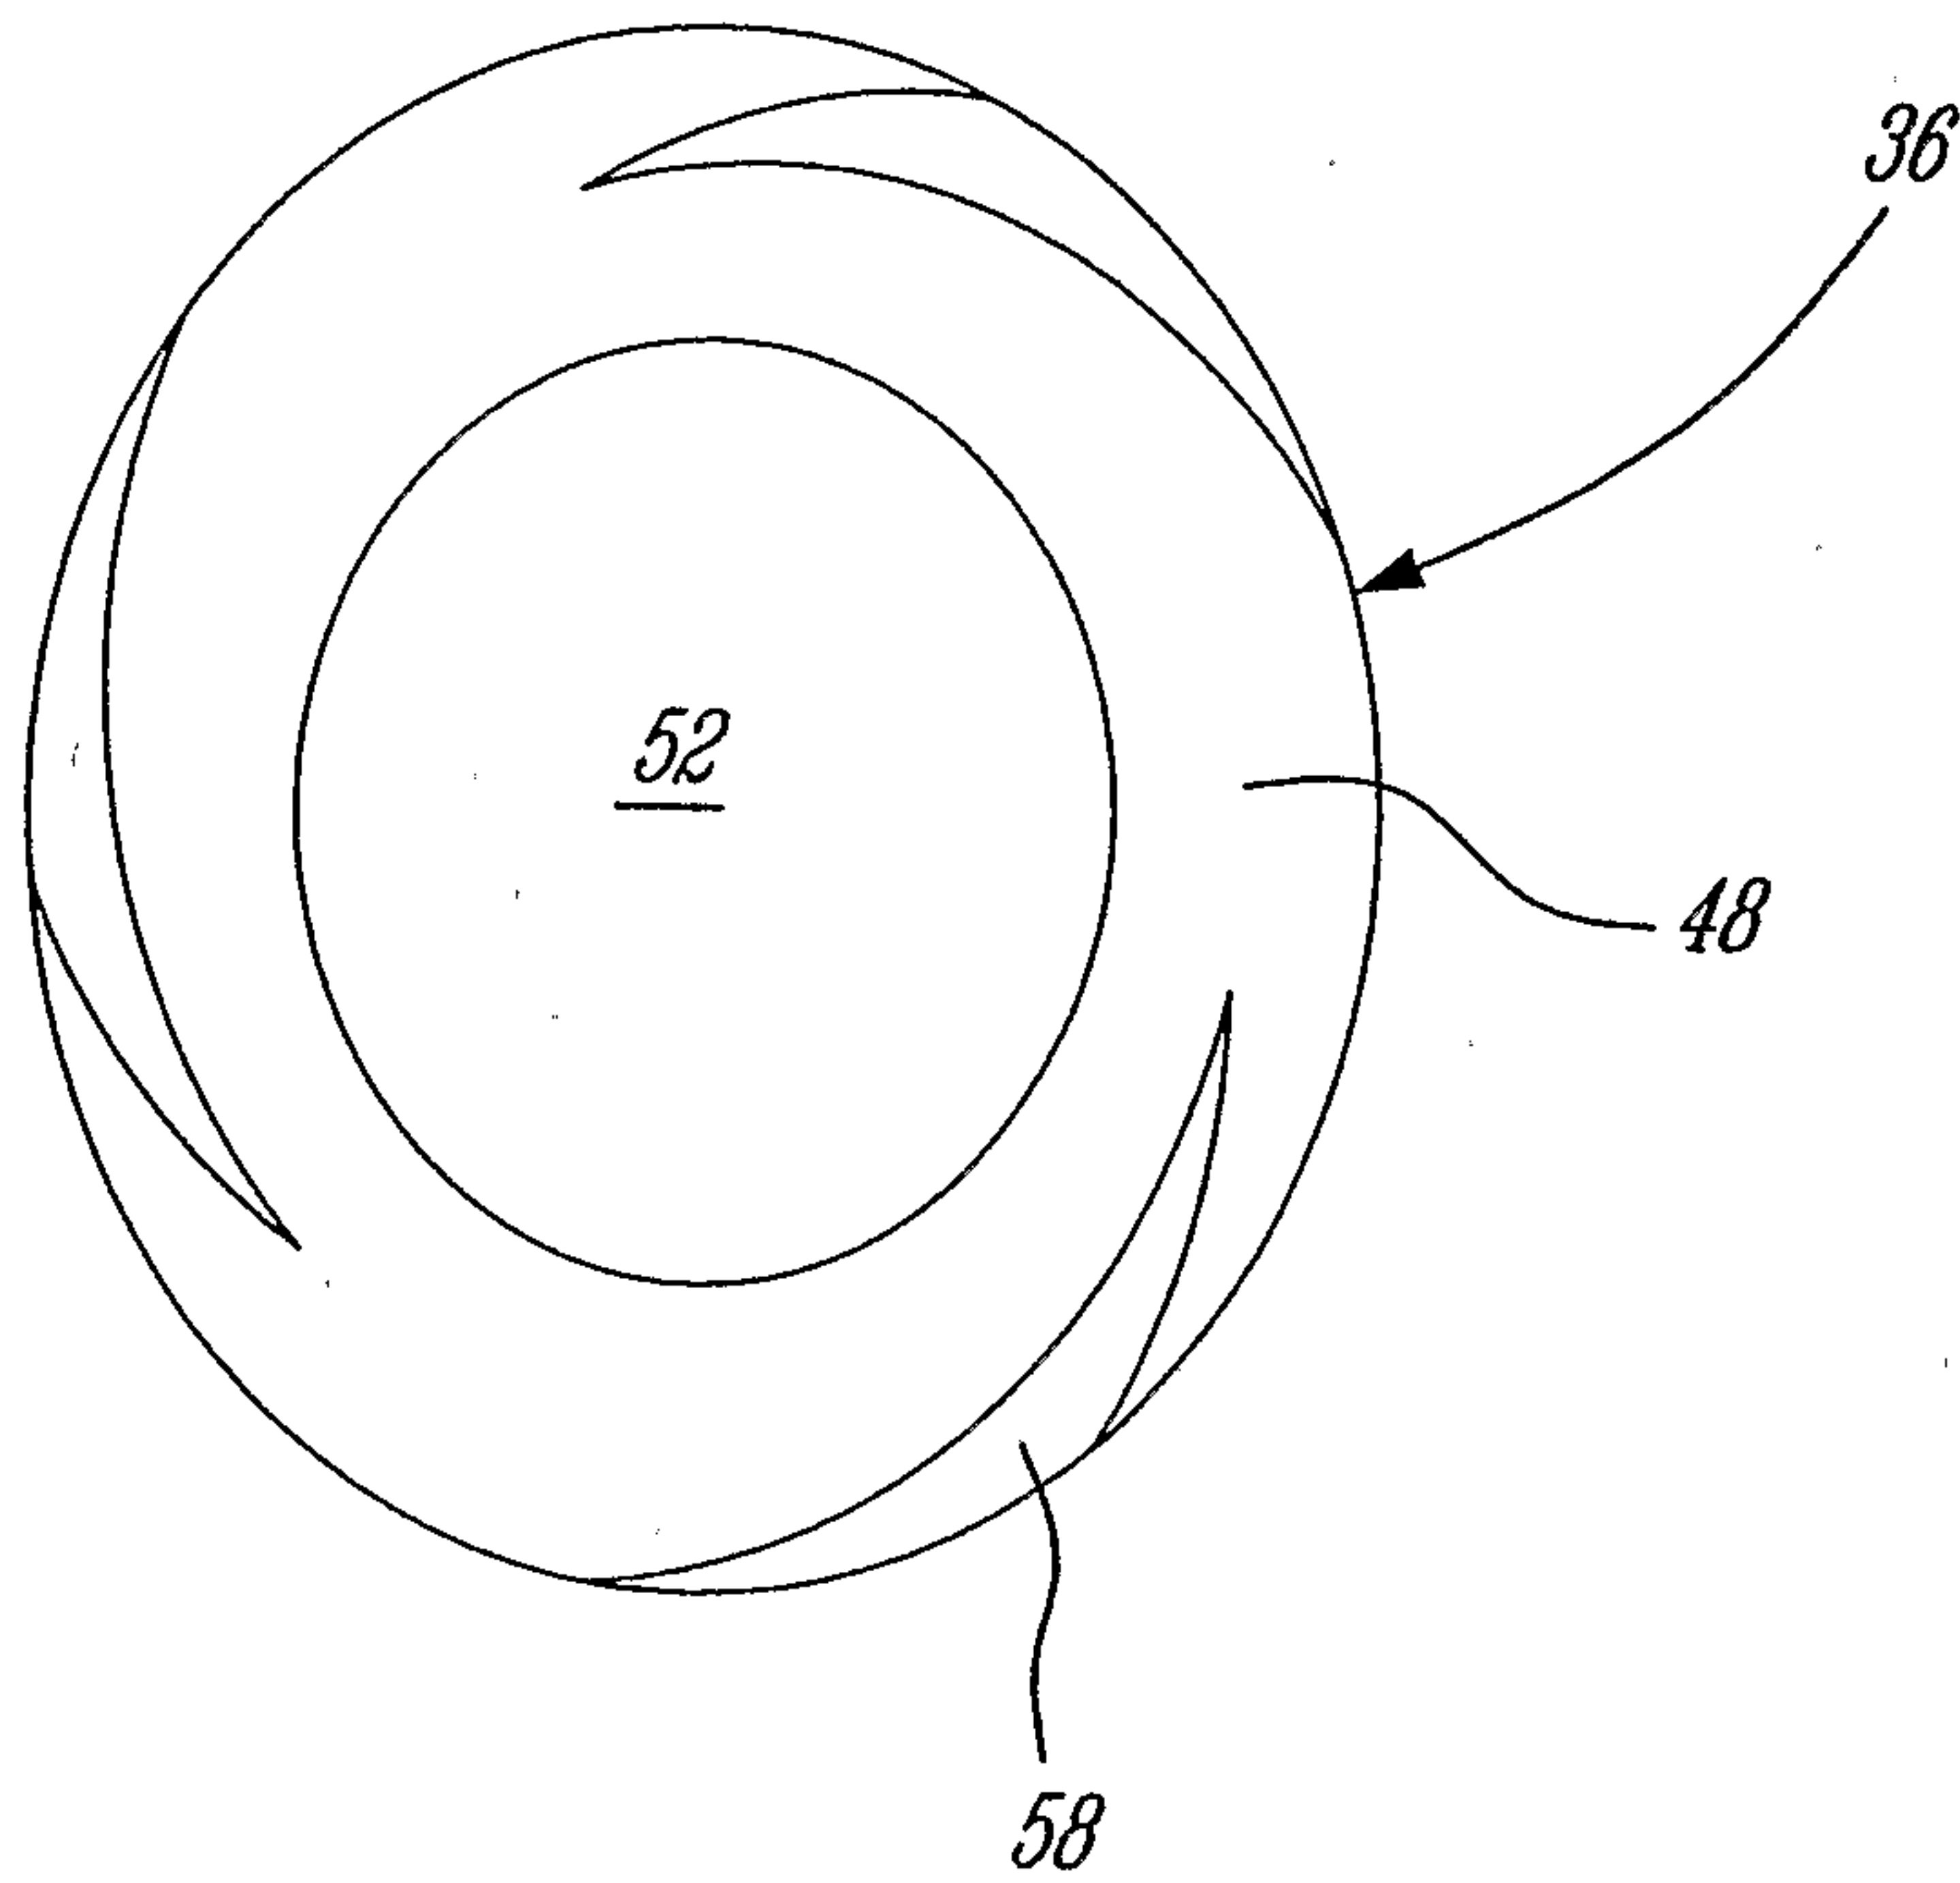


Fig. 5

