



HU000027172T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 027 172**(13) **T2**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

- (21) Magyar ügyszám: **E 09 708679**
- (22) A bejelentés napja: **2009. 02. 05.**
- (96) Az európai bejelentés bejelentési száma:
EP 20090708679
- (97) Az európai bejelentés közzétételi adatai:
EP 2250141 A1 **2009. 08. 13.**
- (97) Az európai szabadalom megadásának meghirdetési adatai:
EP 2250141 B1 **2016. 01. 06.**
- (51) Int. Cl.: **C04B 355/65** (2006.01)
C04B 356/26 (2006.01)
C04B 38/00 (2006.01)
C25C 3/08 (2006.01)
F27B 3/08 (2006.01)
F27B 3/20 (2006.01)
F27D 1/00 (2006.01)
- (86) A nemzetközi (PCT) bejelentési szám:
PCT/IB 09/050480
- (87) A nemzetközi közzétételi szám:
WO 09098657

(30) Elsőbbségi adatok: 28202 2008. 02. 08. US	(73) Jogosult(ak): Saint-Gobain Centre de Recherches et d'Etudes Européen, 92400 Courbevoie (FR)
(72) Feltaláló(k): JORGE, Eric, F-84210 Les Valayans (FR) MARGUIN, Olivier, F-84510 Caumont Sur Durance (FR) MOITRIER, Olivier, F-13370 Mallemort (FR) CITTI, Olivier, WellesleyMassachusetts 02482 (US)	(74) Képviselő: Danubia Szabadalmi és Jogi Iroda Kft., Budapest

- (54) **Szilícium-nitrid kötőanyagot tartalmazó szilícium-karbid alapú szinterelt tűzálló anyag alkalmazása**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 250 141 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
06.01.2016 Bulletin 2016/01

(21) Application number: **09708679.7**

(22) Date of filing: **05.02.2009**

(51) Int Cl.:
C04B 35/565 ^(2006.01) **C04B 35/626** ^(2006.01)
C04B 38/00 ^(2006.01) **F27B 3/08** ^(2006.01)
F27B 3/20 ^(2006.01) **F27D 1/00** ^(2006.01)
C25C 3/08 ^(2006.01)

(86) International application number:
PCT/IB2009/050480

(87) International publication number:
WO 2009/098657 (13.08.2009 Gazette 2009/33)

(54) **USE OF A SINTERED REFRACTORY MATERIAL BASED ON SILICON CARBIDE WITH A SILICON NITRIDE BINDER**

VERWENDUNG VON GESINTERTEN FEUERFESTEN MATERIALIEN AUF BASIS VON
SILICIUMCARBID MIT SILICIUMNITRID-BINDEMITEMEL

UTILISATION D'UN MATÉRIAU RÉFRACTAIRE FRITTÉ À BASE DE CARBURE DE SILICIUM
COMPORTANT UN LIANT DE TYPE NITRURE DE SILICIUM

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **08.02.2008 US 28202**

(43) Date of publication of application:
17.11.2010 Bulletin 2010/46

(73) Proprietor: **Saint-Gobain Centre de Recherches et
d'Etudes
Européen
92400 Courbevoie (FR)**

(72) Inventors:
• **JORGE, Eric
F-84210 Les Valayans (FR)**
• **MARGUIN, Olivier
F-84510 Caumont Sur Durance (FR)**
• **MOITRIER, Olivier
F-13370 Mallemort (FR)**
• **CITTI, Olivier
Wellesley
Massachusetts 02482 (US)**

(74) Representative: **Sartorius, Jérôme
Cabinet Nony
3, rue de Penthièvre
75008 Paris (FR)**

(56) References cited:
EP-B- 0 417 292 WO-A-2006/056698
GB-A- 728 306 JP-A- 3 223 166
JP-A- 2000 302 554 US-A- 3 968 194
US-A- 6 143 239 US-A1- 2005 008 878

- **REDDY N K: "Influence of infiltrants on the electrical resistivity of silicon nitride bonded silicon carbide refractories", JOURNAL OF MATERIALS SCIENCE LETTERS, CHAPMAN AND HALL LTD. LONDON, GB, vol. 18, no. 11, 1 June 1999 (1999-06-01), pages 869-871, XP002337424, ISSN: 0261-8028, DOI: 10.1023/A:1006648310731**

Remarks:

The file contains technical information submitted after the application was filed and not included in this specification

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to the use of sintered refractory blocks.

[0002] As can be seen in Figure 1, aluminum metal 2 may be produced on an industrial scale by electrolyzing alumina in solution in a bath 10 based on molten cryolite. The electrolyte bath 10 is conventionally contained in an electrolysis cell 12. The cell 12 comprises a side wall 14 and a bottom 16. The bottom 16 is composed of refractory bottom blocks 17 and cathode blocks 24 and insulating blocks in the lower portion. The side wall 14 is formed from refractory side blocks 18 surrounded by a metal casing 20.

[0003] The dimensions of a refractory side block 18 can vary. They are conventionally more than 30 x 100 x 100 mm [millimeter] and may attain 120 x 300 x 300 mm.

[0004] The composition of the blocks 18 may be based on carbon (graphite and/or anthracite). Typically, the mortar for the blocks 18 is a refractory cement 21 disposed between them and against the metal envelope 20. The cell 12 comprises at least one anode 22 and at least one cathode 24. The anodes 22 and cathodes 24 are disposed so as to be in contact with the molten metal bath, the cathode 24 conventionally being disposed close to the bottom 16.

[0005] When the electrodes 22 and 24 are placed under voltage, an electrolysis reaction occurs in the bath 10, resulting in the formation of a bath of aluminum in the cell, which bath is deposited on the cathode.

[0006] Passing high electric current through the bath 10 also causes heat to be released under the Joule effect. Evacuating that heat through the wall 14 of the cell 12 causes a layer 26 of solidified cryolite to be deposited on the inner surface 27 of the blocks 18. That layer is termed a "self-lining" layer.

[0007] The blocks 18 must protect the metal envelope 20 and allow sufficient heat to be evacuated to ensure temperature stabilization of the molten bath 10. In particular, it is vital to avoid reaching temperatures beyond which the self-lining layer 26 of solidified cryolite liquefies again and could contribute to very rapid corrosion of the sides of the cell. Further, the blocks 18 are often exposed to corrosive environments (very hot liquid metal, molten cryolite in the lower portion, corrosive gas in the upper portion), and they are subjected to high temperatures and large thermal and mechanical stresses.

[0008] To meet those challenges, blocks are known that are based on silicon carbide granulates which have generally satisfactory resistance to attack. Conventionally, silicon carbide granulates are sintered at a temperature in the range 1600°C to about 2000°C. Sintering fine grained silicon carbide granulates at very high temperatures (2150°C) is also known, enabling boron and carbon to be added. However, silicon carbide is very difficult to sinter and/or its cost is prohibitive. Further, the format of the sintered silicon carbide blocks is limited, especially due to a great deal of shrinkage on firing.

[0009] Blocks based on dense sintered silicon carbide granulates are also known, with less than 1% of B_4C and C, for example Hexolloy SiC®. However, they are currently extremely expensive.

[0010] Finally, blocks based on silicon carbide (SiC) are known, bound by a matrix of silicon nitride (Si_3N_4). The materials for such blocks were developed at the end of the 1970s and are described, for example, in United States Patent No. US-A-2 752 258. They improve the compromise between oxidation resistance, mechanical strength (erosion), and thermal conductivity compared with carbon blocks. The improvement in abrasion resistance is particularly advantageous at the bottom of the cell where the bath, which moves under the effect of magnetic fields, may cause a great deal of abrasion.

[0011] Blocks are known which are obtained by reactive sintering of a mixture of silicon carbide and silicon, with nitrogen deriving from firing in a nitrogen atmosphere.

[0012] By "reactively sintered product" is meant a ceramic product having a nitrogenous matrix, whether crystallized or not, obtained during the thermal treatment (known also as sintering) from precursors introduced within the starting charge. These precursors are preferably in the form of powders having a median diameter of less than 200 microns, and preferably contain silicon. By definition, a matrix ensures an essentially continuous structure between the silicon carbide grains.

[0013] To gain useful volume and facilitate heat evacuation, research has been concentrated on reducing the thickness of such blocks. However, the thickness cannot be reduced without affecting the service life of the cells. Thus, it must be accompanied by an improvement in the oxidation resistance and resistance to attack by the cryolite bath. That need is greater if the stresses on the refractory blocks are higher. In particular, electrolysis cells are now used with a current of more than 200,000 amps and from which, as a result, a great deal of heat must be evacuated, large quantities of oxidizing gas are generated, and the self-lining layer may become unstable.

[0014] A sintered refractory block is known from WO 2006/056698. It is based on silicon carbide (SiC) with a silicon nitride (Si_3N_4) binder, in particular intended for fabricating an aluminum electrolysis cell, which block is remarkable in that it includes, as a percentage by weight, a total calcium and boron content in the range 0.05% to 1.5%, preferably 1.2%. Preferably, it includes at least 0.05%, preferably at least 0.3%, and more preferably at least 0.5% of boron, and/or in the range 0.05% to 1.2% of calcium.

[0015] It is known from WO 2006/056698 that the presence of boron and/or calcium provides a substantial improvement

in properties as regards aluminum electrolysis cell applications, in particular resistance to oxidation and to attack by the cryolite bath, and dimensional stability under oxidation conditions.

[0016] The refractory block of WO 2006/056698 also exhibits one or more of the following preferred characteristics:

- the refractory block includes less than 3% of boron, as a percentage by weight;
- silicon nitride (Si_3N_4) in the beta form represents, as a percentage by weight, at least 40%, preferably at least 60%, and more preferably at least 80%, of all of the silicon nitride (Si_3N_4) in the beta form and in the alpha form;
- the Si_2ON_2 content, as a percentage by weight, is less than 5%, preferably less than 2%;
- the porosity of the sintered block is preferably 10% or more; and
- the boron is not in the TiB_2 form, as that form of titanium is not stable in contact with molten cryolite, in an oxidizing atmosphere. Further, TiB_2 is also unstable towards aluminum.

[0017] Preferably again, the $\text{Si}_3\text{N}_4/\text{SiC}$ weight ratio is in the range 5% to 45%, preferably in the range 10% to 20%, i.e. in the range 0.05 to 0.45, preferably in the range 0.1 to 0.2.

[0018] Preferably, the $\text{Si}_3\text{N}_4/\text{SiC}$ ratio is less than 0.3 and/or more than 0.05. Further, the Si_3N_4 content is preferably 11% or more, as a percentage by weight.

[0019] WO 2006/056698 also describes an electrolysis cell including a side wall comprising a plurality of refractory blocks, at least one of said blocks being in accordance with the invention of WO 2006/056698. Preferably, all of the blocks forming the side wall of the cell of WO 2006/056698 are in accordance with the invention of WO 2006/056698.

[0020] In particular for this application, a block in accordance with WO 2006/056698 does not, preferably, contain any alumina.

[0021] In the other applications of the invention, and in particular for kiln furniture and particularly supports to sinter porcelain pieces, a block, and more generally a refractory product in accordance with WO 2006/056698, may contain at least 0.8%, at least 1% of alumina. It may also contain more than 0.1%, or more than 0.2% of Fe_2O_3 .

[0022] Preferably, a powder of calcined alumina is added in the starting charge. Preferably, the mean size of added alumina powder ranges between 0.4 and 10 microns

[0023] Finally, WO 2006/056698 describes a method of fabricating a refractory block, comprising the following steps in succession:

- a) preparing a charge comprising a particulate mixture comprising a silicon carbide granulate and at least one boron and/or calcium compound, a binder optionally being added to said particulate mixture;
- b) forming said charge in a mold;
- c) compacting said charge in the mold to form a preform;
- d) unmolding said preform;
- e) drying said preform, preferably in air or a moisture-controlled atmosphere; and
- f) firing said preform in a reducing atmosphere of nitrogen at a temperature in the range 1100°C to 1700°C.

[0024] It is known from WO 2006/056698 that adding boron and/or calcium to the formulations improves the properties of sintered silicon carbide (SiC) based refractory blocks with a silicon nitride binder (Si_3N_4) which are obtained. In particular, the resistance to corrosion by fluorine-containing products and molten cryolite is improved.

[0025] The method of WO 2006/056698 also has one or more of the following preferred characteristics:

- said boron and/or calcium compound contains boron;
- said boron and/or calcium compound is added in a predetermined quantity so that the refractory block obtained at the end of step f) is in accordance with the invention of WO 2006/056698, in particular so that it comprises, as a percentage by weight, at least 0.05%, preferably at least 0.3%, more preferably at least 0.5% of boron, and/or less than 3% of boron;
- said boron and/or calcium compound is free of oxygen, i.e. added in a "non-oxide form";
- said boron compound is selected from the group formed by oxides, carbides, nitrides, fluorides and metal alloys containing boron, in particular B_4C , CaB_6 , H_3BO_3 , and BN, preferably from the group formed by B_4C and CaB_6 . More preferably, said boron compound is CaB_6 ;
- said calcium compound is selected from the group formed by oxides, carbides, nitrides, fluorides and metal alloys containing calcium, preferably selected from CaB_6 , CaSi, CaSiO_3 , and CaCO_3 ;
- said calcium compound is added in a predetermined quantity such that the calcium content of the refractory block obtained at the end of step f) is in the range 0.05% to 1.2%, as a percentage by weight.

[0026] Other characteristics and advantages of the invention of WO 2006/056698 become apparent from the following description, made with reference to the accompanying drawings in which:

- Figure 1 is a diagrammatic representation of an electrolysis cell in cross section along a substantially medial plane;
- Figure 2 represents in the form of graphs, the percentage variation in the increase in volume due to oxidation as a function of time for different blocks tested in accordance with American Standard ASTM C863 at 900°C;
- Figure 3 represents schematically the device used for the test 8.

[0027] Unless otherwise indicated, all of the percentages in the present description are percentages by weight.

[0028] When a granulate is said to be "based on" a constituent, this means that said granulate comprises more than 50% by weight of that constituent.

[0029] Known methods of fabricating refractory blocks may be employed to fabricate a block in accordance with the invention of WO 2006/056698, provided that at least one oxygen-free boron compound is added to the starting charge.

[0030] Preferably, the method of WO 2006/056698 employed comprises the following steps:

- a) preparing a charge comprising a particulate mixture comprising a silicon carbide granulate and at least one boron and/or calcium compound, a binder being added to said particulate mixture;
- b) forming said charge in a mold;
- c) compacting said charge in the mold to form a preform;
- d) unmolding said preform;
- e) drying said preform, preferably in air or a moisture-controlled atmosphere, using conventional preform fabrication procedures; and
- f) firing said preform in a reducing atmosphere of nitrogen at a temperature of 1100°C to 1700°C, and drying.

[0031] In step a), the particulate mixture preferably comprises, as a percentage by weight, 30% to 90% of refractory grains wherein at least 90% have a size in the range 50 μm [micrometer] to 5 mm [millimeter], and 10% to 60% of at least one refractory powder wherein at least 90% of the particles have a diameter of less than 200 μm . Advantageously, said granulometric distribution can endow the fabricated block with optimum cohesion.

[0032] The boron may be supplied in a particulate form or in any other form provided that the maximum moisture content of the mixture remains below 7%, preferably below 5%.

[0033] The function of the binder is to form with the particulate mixture a mass that is sufficiently rigid to preserve its shape until step e). The choice of binder depends on the desired shape. Because of the binder, the mass may advantageously take the form of a layer of varying thickness, which can follow the wall of the mold, to form blocks.

[0034] Any known binder or mixture of known binders may be used. The binders are preferably "temporary", i.e. they are completely or partially eliminated during the block drying and firing steps. More preferably, at least one of the temporary binders is a solution of modified starch derivatives, an aqueous solution of dextrin or of lignone derivatives, a solution of a processing agent such as polyvinyl alcohol, a phenol resin or another epoxy type resin, a furfuryl alcohol, or a mixture thereof. More preferably, the quantity of temporary binder is in the range 0.5% to 7% by weight relative to the particulate mixture of the charge.

[0035] Pressing additives as are conventionally used in fabricating sintered blocks may be added to the particulate mixture and the binder. Said additives comprise plasticizers, for example modified starches or polyethylene glycols and lubricants, for example soluble oils or stearate derivatives. The quantities of such additives are those conventionally used when fabricating sintered silicon carbide (SiC) based refractory blocks with a silicon nitride binder (Si_3N_4).

[0036] Mixing of the charge is continued until a substantially homogeneous mass is obtained.

[0037] In step b), the charge is shaped and placed in a mold.

[0038] In the next compaction or "pressing" step c), the contents of the mold are compressed by applying a force to the upper surface of the charge which can transform it into a preform that is capable of being sintered. A specific pressure of 300 kg/cm² [kilogram/square centimeter] to 600 kg/cm² is appropriate. Pressing is preferably carried out uniaxially or isostatically, for example using a hydraulic press. It may advantageously be preceded by a manual or pneumatic and/or vibrational ramming operation.

[0039] Next, the preform is unmolded (step d)), then dried (step e)). Drying can be carried out at a moderately high temperature. Preferably, it is carried out at a temperature in the range 110°C to 200°C. It conventionally lasts between 10 hours and one week, depending on the format of the preform, until the residual moisture content of the preform is less than 0.5%.

[0040] The dried preform is then fired (step f)). The firing period, between about 3 and 15 days cold to cold, depends on the materials and also on the size and shape of the block. In accordance with the invention of WO 2006/056698, firing is carried out in nitrogen in order to form the nitride by reactive sintering, which nitride acts as the ceramic binder for the grains. The firing cycle is preferably carried out at a temperature in the range 1100°C to 1700°C. During firing, nitrogen reacts with certain of the constituents of the particulate mixture of the charge to form a matrix of silicon nitride which can bind the grains of said charge, in particular grains of silicon carbide. A monolithic block is produced.

[0041] In the various tests below, provided by way of nonlimiting illustration, the particle size of the powders used as

additives (B_4C , CaB_6 , and $CaSiO_3$) is less than 45 μm . Their respective contents in the starting composition are indicated in Table 1.

[0042] Metallic silicon is also added in the proportion indicated in Table 1.

[0043] "Block" or "refractory" silicon carbide with different granulometric fractions, sold by Saint-Gobain Ceramic Materials, was also used. This material is essentially constituted by alpha SiC and has a mean chemical analysis, by weight, of 98.5% of SiC .

[0044] Table 1 also shows the results of various tests carried out to characterize the products of WO 2006/056698 compared with the reference product (Refrax[®] type product). All of the measurements were carried out on the core of the specimens.

- The nitrogen (N) contents in the products were measured using LECO (LECO TC 436 DR; LECO CS 300) type analyzers. The values given are percentages by weight.

- The boron (B) and calcium (Ca) contents in the products were measured by X-ray fluorescence spectrometry. The values given are percentages by weight.

- The oxidation tests were carried out in accordance with ASTM C863. To reproduce the oxidation conditions experienced by the blocks of an aluminum electrolysis cell, the specimens (typically with a size of 25 x 25 x 120 mm) underwent a test of at least 100 hours at 900°C in an atmosphere saturated with steam. Oxidation generates an increase in mass ("Om" value, given as a percentage) and/or in volume ("Ov", given as a percentage), which results from the transformation of the silicon nitride and carbide into silica. The increases in mass and volume were thus indicators of the degree of oxidation. Two materials were considered to be different when their oxidation indicators differed by at least 1% (mean over 3 test specimens).

- The variation in open porosity due to plugging by the oxidation products of the reaction was also a measure allowing the degree of oxidation to be determined. The open porosity was measured in accordance with International Standard ISO5017 ("PO-Ox" value, given as a percentage).

- The corrosion resistance test allowed the behavior of 25 mm x 25 mm cross section specimens which had already undergone the oxidation test to be determined. These specimens were kept at 1030°C for 22 hours in a bath of molten cryolite. Their corroded length was then measured, i.e. the reduction in their length resulting from corrosion. The value "Ic" provides, as a percentage, the ratio between the corroded length of the test specimen and the corroded length of a reference specimen. The lower the Ic, the better the corrosion resistance.

- The crystalline phases present in the refractory products were determined by X ray diffraction. Principally, it was found that silicon nitride Si_3N_4 as well as an oxynitride phase, Si_2ON_2 , were present. The amounts of these phases, as a percentage by weight, are indicated in Table 1. The complement was SiC .

[0045] The apparent specific gravity of the products of the invention of WO 2006/056698 was in the range 2.4 to 2.7. That of the reference product was 2.6.

[0046] The silicon nitride could be in the alpha or beta form. The alpha phase was present in the form of a tangle of silicon nitride fibrils, while the beta phase was in the form of grains with a variable shape.

[0047] Analyses carried out over several years by the Applicant have shown that silicon nitride in the beta form is less sensitive to rapid combustion because of its lower specific surface area, than is silicon nitride in the alpha form. During rapid combustion, silicon nitride is oxidized and produces silica which is "consumed" by the molten cryolite. Those reactions thus result in an increase in the porosity and connectivity of the pores, facilitating the penetration of corrosive materials. Thus, it is advantageous to encourage the formation of the beta form to improve the resistance to attack by molten cryolite.

[0048] However, it is known that enrichment of the beta silicon nitride phase is generally accompanied by an enrichment in the oxynitride phase Si_2ON_2 .

[0049] However, silicon oxynitride, like residual silicon and Sialon with alumina impurities, conventionally generated during a nitriding process, are unwanted phases which have a lower resistance to cryolite compared with that of silicon nitride, regardless of the form of the silicon nitride. Thus, it is advantageous to limit the quantities thereof.

[0050] It is known from WO 2006/056698 that adding boron and/or calcium, preferably in an oxygen-free form, to the starting charge advantageously stimulates the transformation into beta silicon nitride during the process for nitriding silicon carbides with a nitride binder, without causing deleterious enrichment of the Si_2ON_2 oxynitride phase. Table 1 below illustrates this discovery.

[0051] In WO 2006/056698, a boron compound is thus added, preferably in a non-oxide form. Advantageously, this addition results in almost complete transformation into beta silicon nitride without major enrichment of the oxynitride phase Si_2ON_2 .

TABLE 1

	Composition					Analysis												
N°	Si	B ₄ C	CaB ₆	H ₃ BO ₃	CaCO ₃	PO	N	B	Ca	Si ₃ N ₄ a	Si ₃ N ₄ b	b/a	Si ₂ ON ₂	Om	Ov	PO-Ox	T _c	
R	13.5	0	0	0	0	17.2	5.9	0.0	0.1	12	5	29	3	1.6	1.0	14.0	100	
1	13.5	0.2	0.0	0.0	0.0	16.2	6.4	0.1	0.1	10	9	47	3	2.4	0.0	9.4	45	
2	11.8	0.5	0.0	0.0	0.0	17.1	7.4	0.5	0.1	8	9	53	3	2.7	0.1	9.5	ND	
3	13.5	0.5	0.0	0.0	0.0	15.5	6.1	0.4	0.2	ND	ND	ND	ND	1.3	0.0	8.6	65	
4	10.0	0.8	0.0	0.0	0.0	16.8	5.5	0.6	0.1	7	7	50	ND	2.5	0.0	6.7	61	
5	13.5	0.8	0.0	0.0	0.9	16.3	7.1	0.5	0.4	1	14	93	4	1.5	0.0	10.0	41	
6	13.5	0.8	0.0	0.0	0.0	16.1	7.0	0.5	0.0	2	14	88	4	1.9	0.1	9.4	41	
7	13.5	0.8	0.0	0.0	0.0	16.1	7.1	0.6	0.1	7	10	59	2	2.4	0.1	6.2	45	
8	14.3	0.8	0.0	0.0	0.0	16.1	7.0	0.5	0.0	1	14	93	4	2.0	0.1	9.5	41	
9	13.5	1.0	0.0	0.0	0.0	15.2	6.1	0.6	0.2	ND	ND	ND	ND	1.5	0.1	7.6	72	
10	13.5	1.6	0.0	0.0	0.0	16.1	6.9	ND	0.2	2	17	89	0	2.2	0.2	7.1	70	
11	14.3	1.6	0.0	0.0	0.0	17.0	7.2	1.0	0.1	1	14	93	4	2.3	0.0	7.3	70	
12	13.5	3.0	0.0	0.0	0.0	13.6	4.5	1.9	0.2	ND	ND	ND	ND	1.4	0.0	8.3	60	
13	14.3	5.0	0.0	0.0	0.0	14.1	8.1	2.9	0.1	1	14	93	4	1.7	0.3	5.1	73	
14	13.5	0.0	0.0	3.5	0.0	20.0	7.1	0.4	0.1	2	9	82	7	1.0	0.0	13.5	86	
15	13.5	0.0	0.0	3.5	0.9	20.0	7.8	0.4	0.4	2	13	87	7	1.4	0.3	16.4	88	
16	13.5	0.0	0.0	0.0	2.0	19.1	6.7	ND	1.0	9	9	100	0	1.5	0.9	ND	75	
17	13.5	0.0	0.2	0.0	0.0	16.6	7.3	0.1	0.2	8	10	56	2	1.9	0.2	10.3	45	
18	13.5	0.0	0.5	0.0	0.0	14.3	5.8	0.3	0.5	ND	ND	ND	ND	1.0	0.0	8.3	ND	
19	13.5	0.0	1.0	0.0	0.0	16.4	7.7	0.3	0.4	1	18	95	0	1.6	0.3	11.3	35	
20	13.5	0.0	1.0	0.0	0.0	15.6	7.1	0.6	0.5	3	15	83	3	1.7	0.0	7.7	47	
21	13.5	0.0	3.0	0.0	0.0	14.3	6.0	1.1	1.4	ND	ND	ND	ND	2.0	0.0	7.5	ND	

[0052] Table 1 indicates that adding boron and/or calcium can improve the corrosion resistance of refractories formed from silicon carbide with a Si₃N₄ matrix binder.

[0053] Table 1 indicates that adding boron and/or calcium can advantageously enhance the proportion of beta phase Si₃N₄. However, only adding boron and/or calcium in a non oxide form can limit the amount of silicon oxynitride Si₂ON₂ to values close to or lower than that of the reference product, as can be seen in Examples 14 and 15.

[0054] Table 1 indicates that the open porosity is improved when the amount of boron in the final product is non zero: only examples 14, 15 and 16 have an open porosity that is greater than that of the reference product. For this reason, products containing 0.05% to 3% of boron are preferred.

[0055] Further, Table 1 shows that the presence of boron compounds in the starting charge advantageously catalyzes the nitriding reaction (the amount of nitrogen in the products of WO 2006/056698 is enhanced).

[0056] Without wishing to be bound by a theory, WO 2006/056698 provides a partial explanation for the improvement in corrosion resistance, namely stabilization of oxidation degradation. As indicated in Table 1 and shown in Figure 2, the oxidation resistance of the products of WO 2006/056698 is improved.

[0057] Table 1 shows that the variation in volume due to oxidation is very limited in the products of WO 2006/056698. Further, the increase in mass after oxidation is limited when the calcium that is added is combined with boron. Thus,

adding CaB_6 is advantageous, in particular in amounts between 0.5% and 2%.

[0058] Figure 2 shows the change in the resistance to oxidation when the test is extended to 500 hours. The improvement over the reference is confirmed and accentuated.

[0059] Table 1 shows that adding boron and/or calcium has an influence on corrosion resistance even for small amounts. It also appears that a minimum amount of 0.8% by weight can produce a substantially maximum corrosion resistance.

[0060] Preferably, the percentage by weight of CaB_6 in the starting charge is more than 0.5%.

[0061] It appears that the effect of adding B_4C to the starting charge is substantially the same at B_4C contents as low as 0.2%. A reinforced effect is obtained with a content of 0.6%.

[0062] Clearly, the invention of WO 2006/056698 is not limited to the implementations described and shown by way of non limiting illustrative examples.

[0063] It is known from WO 2006/056698 that adding boron in the non oxide form, and more specifically CaB_6 or B_4C , also contributes to increasing the thermal diffusivity of the products of WO 2006/056698, without a specific effect linked to compactness. This is clearly very important in encouraging heat transfer.

[0064] Further, it has been found that none of the products of WO 2006/056698 contains Si_3N_4 in the acicular form, including on the surface.

[0065] The oxidation performance of the products of WO 2006/056698 indicates that applications other than in electrolysis cells may be envisaged.

[0066] JP H03-223166 teaches a refractory product having good heat resistance, oxidation resistance, ambient and high-temperature strength.

[0067] JP 2000-302554 teaches a refractory brick for protecting a water pipe, which resistance to steam, gas and dust generated in an incineration furnace for waste materials is strengthened and whose long-term durability is realized by using a silicon nitride-combined silicon carbide refractory material.

[0068] The article "Influence of infiltrants on the electrical resistivity of silicon nitride bonded silicon carbide refractories", Reddy N.K., Journal of Materials Science Letters, vol. 18, no. 11, 1st June 1999, pages 869-871 teaches the effect of B_4C and MoSi_2 on the electrical resistivity of a silicon nitride bonded silicon carbide material.

[0069] But, the inventors have discovered that the material of the refractory block of WO 2006/056698 which has been described here above, called "sintered material of WO 2006/056698" may be used, with various forms, in quite different applications than in electrolysis cells and, in particular, in applications where it could not be predicted that this material would be appropriate.

[0070] Therefore, the invention concerns the use according to claims 1 to 18.

[0071] The addition of boron in a refractory product usually lowers the melting temperature of this product. The possibility of using of a product of WO 2006/056698 in applications where it may be submitted to temperatures that may reach 1 500°C, 1 600°C or even 1 700°C was therefore surprising.

[0072] The inventors have also discovered that the resistance to oxidation of the products of WO 2006/056698 is much less variable from one product to the other in comparison with corresponding products which would not contain any boron.

[0073] It is also described a refractory product, in the form of

- a "shaped product", in particular in the form of a block, for instance a brick or a wall block, a plate, a tile, and a tube,

comprising, or made of, a sintered material of WO 2006/056698, said sintered material being manufactured on plant, for instance from a castable or a pumpable composition.

[0074] A shaped product is a product which has been given a specific shape with a mold or through a die. On the contrary, an unshaped product is a product which has been applied on a support without being shaped, for instance through a projection of a castable product. An unshaped product is sintered after being applied on the support.

[0075] The shaped product may be chosen in the group consisting of kiln furniture or of other firing supports, in particular in the form of a plate, a post, a setter, a beam or a roller, said kiln furniture being covered by a protective coating or not; a block, a tile and a tube of a heat exchanger; a block, a tile and a tube of a heat recuperator; a block, a tile and a tube of a heat regenerator; a block, a tile and a tube of a muffle; a block, a tile and a tube of a domestic incineration furnace; a block, a tile and a tube of a furnace of a glass making factory, in particular in a location where the sintered material of WO 2006/056698 is not in direct contact with the molten glass, a block, a tile and a tube of a metallurgical furnace, in particular a block, a tile and a tube of a holding furnace or a block of a smelting furnace for non ferrous metals, like copper shaft furnaces; a block, a tile and a tube of a protection wall, in particular to protect a heat exchanger; a block of a skid rail of a metallurgical furnace, for example a furnace for the heat treatment of iron or steel bars or of other metallurgical products; a block and a tube of an immersion heater; a heater tube, a thermocouple protective tube, and a tube for transporting molten metal.

[0076] The shaped product may have any shape, depending on the intended application.

[0077] In particular, it may be massive.

[0078] The maximal thickness of a product is usually determined so that the level of residual silicon in the core of the product be less than 1% by weight, as measured for example by X Ray diffraction. It depends on the firing technology. Preferably, the maximal thickness is less than 150mm.

[0079] The minimal thickness of a product is mainly depending on the forming technology, the mix formulation and the desired mechanical properties.

[0080] Surprisingly, the shaped product may be thin, for instance substantially flat. Its thickness may be less than 3/10, less than 2/10, less than 1/10, less than 5/100, less than 2/100 or even less than 1/100 or less than 5/1000 of its length and/or of its width.

[0081] It is also described a refractory product, for instance in the form of a plate, the thickness of which is less than 10 mm, less than 8 mm, or less than 5 mm. It may have a length and/or a width of 5 cm or more, 10 cm or more, 20 cm or more, 50 cm or more or even 100 cm or more. Its surface may be 1 m² or more.

[0082] Without being bound by a theory, the inventors consider that boron helps to form a stable nitrogen glassy phase that limits the increase of crystallized silica (SiO₂) and therefore avoids a fall of the mechanical resistance in service. A sintered material of WO 2006/056698 may therefore be used in the form of a thin product.

[0083] The invention also concerns a device chosen in the group constituted of a heat exchanger, an incineration furnace, in particular for domestic waste, a heat recuperative furnace, a heat recuperator, a heat regenerator, a furnace for making heat insulation fibre glass, a firing support, and in particular kiln furniture, a glass making factory, a metallurgical furnace, in particular a holding furnace or a smelting furnace, a skid rail for a metallurgical furnace, an immersion heater, an assembled wall, an assembled lining, an assembled muffle and more generally an assembly of shaped products, a non shaped lining, i.e. which does not result of an assembly of shaped products, said device comprising, and possibly being constituted of, a sintered material of WO 2006/056698.

Kiln furniture

[0084] The inventors have discovered that the sintered material of WO 2006/056698 has a very good mechanical resistance in a large range of temperatures, especially from 800°C up to 1,600°C, or even up to 1,750°C. This was not expected because of the low smelting points of current oxide glassy phases containing boron.

[0085] They also discovered that the sintered material of WO 2006/056698 can very well withstand cyclic variations of temperature. For instance it can very well withstand more than 100 cycles between 20°C and 1500°C under air, each cycle lasting several hours, as it occurs in tunnel furnaces for firing porcelain articles.

[0086] The invention therefore also concerns the use of a refractory product according (comprising, or made of, a sintered material of WO 2006/056698), in particular a shaped product, in an application where said product is submitted to cycling variations of temperature, each cycle lasting less than 24 hours, in particular in applications where in any cycle, the temperature varies of at least 1000°C, of at least 1300°C or even of at least 1500°C and/or in which any cycle lasts at least 1 hour, at least 5 hours, or at least 10 hours.

[0087] They finally discovered that said sintered material presents a very high dimensional stability. In fact, kiln furniture made of the sintered material of WO 2006/056698 has a long service life.

[0088] Besides, as described, for example, in US 6,143,239 or EP 603 851, incorporated by reference, it is known that kiln furniture may be made of a support covered by a protective coating (in particular a sol or a glaze), deposited on the fired support. The coating may comprise or be made of metal hydrate, e.g. alumina hydrate, alumina, aluminosilicate, in particular mullite and its precursors, borosilicate, zircona, and mixture of these constituents.

[0089] The dilatation coefficients of the support and of the coating are determined to be as close as possible, but the difference of these dilatation coefficients usually increases with time. In addition, the support may react with the coating and swell, which may lead to peeling of the coating. The inventors have observed that supports made of a sintered material of WO 2006/056698 and covered with a coating such as those described in US 6,143,239 or EP 603 851 present a very long service life, without peeling. Without being bound by this theory, they consider that this advantageous property is due to the fact that the sintered material of WO 2006/056698 does not react, or very little, with the coating.

[0090] The invention therefore also concerns the use of a refractory shaped product (comprising, or made of, a sintered material of WO 2006/056698), said refractory shaped product being at least partly covered with a coating, to avoid peeling of said coating, in particular when said product is used as a support to sinter porcelain pieces.

[0091] Because of its noteworthy chemical inertness, the sintered material of WO 2006/056698 may be used, very efficiently, without any coating. Advantageously, the manufacturing and maintenance costs of kiln furniture made of a sintered material according to WO 2006/056698, without being coated, would be reduced.

[0092] The invention therefore also concerns a firing method in which an item to be fired is supported by a firing support during firing, said firing support comprising a sintered material of WO 2006/056698 and being free of any coating, at least on the surface in contact with said item.

[0093] Besides, in some applications, the firing support is classically fired under air atmosphere, typically between 800°C and 1,600°C in order to passivate the support. A firing under an oxidizing atmosphere, in particular air, in order

to passivate the support may be performed during the cooling, and/or in the same furnace, after firing of said support in a reducing atmosphere of nitrogen at a temperature of 1100°C to 1700°C.

[0094] The inventors have discovered that the presence of boron in the product improves the efficiency of the passivation. Therefore, it is also described a method comprising steps a) to e), and a passivation step between 800°C and 1,600°C.

[0095] The inventors have discovered that this operation may be omitted with the product.

[0096] Therefore, it is also described a firing method in which an item to be fired is supported by a firing support during firing, said firing support comprising the refractory product according (comprising, or made of, a sintered material of WO 2006/056698) and being free of any coating, at least on the surface in contact with said item, and wherein said firing support has not been passivated.

Heat recuperative furnaces and heat recuperators

[0097] Heat recuperative furnaces are used for making glass, as described in the patent application US 4,497,628, incorporated by reference. The blocks of these furnaces, and in particular the bottom blocks, are exposed to corrosive alkali vapours at about 1000-1100°C and to strong mechanical erosion due to high air velocities and to the presence of particles or dust. Usually, the blocks used in heat recuperative furnaces for making glass are therefore oxide products.

[0098] However, surprisingly, the inventors also discovered that the sintered material of WO 2006/056698 has an excellent thermal stability and a good corrosion resistance in the severe conditions which occur in this application.

[0099] The invention also concerns the use of the sintered product (comprising, or made of, a sintered material of WO 2006/056698) in a bottom part of an heat regenerator of a heat recuperative furnace for making glass.

Muffle

[0100] The muffles covering the forming blocks described, for example, in the patent application US 2005/130830, incorporated by reference, are subjected to a strong oxidizing environment during the manufacture of glass. The inventors have discovered that the sintered material of WO 2006/056698 is very stable in these severe conditions. It is also described a muffle, and more generally, any part of a glass making factory which is not in contact with molten glass, comprising, or made of, a sintered material of WO 2006/056698.

Refractory tubes

[0101] The inventors have found that the performances of refractory tubes like heater tubes or thermocouple protective tubes or tubes for transporting molten metal, as described for example in US 5,135,893, incorporated by reference, may be improved by a sintered material of WO 2006/056698.

Incineration furnace and/or heat exchangers

[0102] Refractory linings for incineration furnaces are for example described in EP 0 107 520, WO 00/26597 or EP 0 635 678, incorporated by reference.

[0103] The inventors have discovered that a sintered material of WO 2006/056698 is also very well suited to make the refractory lining of an incineration furnace, in particular for the incineration of domestic waste. It may be shaped into refractory tiles or walls or tubes or bricks or the like. The sintered material of WO 2006/056698 indeed exhibits few cracks and a good corrosion resistance at temperatures up to 1,300 °C in the environment of such incineration furnaces.

[0104] The invention therefore also concerns the use of the refractory product (comprising, or made of, a sintered material of WO 2006/056698), in a refractory lining of an incineration furnace in which said product has not been submitted to an oxidative post-treatment at a temperature between 1000° C and 1700° C.

[0105] The inventors have also discovered that the thermal conductivity is very little reduced by the corrosion by alkalis vapours. This is very advantageous in applications where the material of WO 2006/056698 is intended to transfer the heat by conduction. The inventors have noticed that an amount of boron of 1.5%, in percentage by weight of the sintered material according to WO 2006/056698, enables a good maintenance of the thermal conductivity.

[0106] The invention therefore also concerns the use of the refractory product of WO 2006/056698 (comprising, or made of, a sintered material of WO 2006/056698) in a refractory lining of an incineration furnace to transfer heat by conduction.

[0107] Moreover, it was also noticed by the inventors that a second firing in an oxidizing atmosphere, for example in air, of a sintered material of WO 2006/056698, after the first firing in a nitrogen atmosphere (corresponding to the previously described step f)), leads to an excellent resistance against corrosion. In particular, the dimensional stability in an oxidizing atmosphere saturated with moisture is very high, Such a property was not predictable.

[0108] The second firing may be done at a temperature between 1,000°C and 1,700°C. It would usually last between 1 and 10 hours, depending on the dimensions of the sintered product.

[0109] The second firing under oxidizing atmosphere, in particular air, will passivate the support. It may be performed during the cooling and/or in the same furnace after firing of said support in a reducing atmosphere of nitrogen at a temperature of 1100°C to 1700°C.

Fabrication method

[0110] It is also described a method of fabricating a sintered material based on silicone carbide (SiC), with a silicon nitride binder (Si₃N₄), said method comprising the following steps in succession:

A) preparing a charge comprising a particulate mixture comprising a silicon carbide granulate and at least one boron and/or calcium compound, a binder optionally being added to said particulate mixture;

B) forming said charge;

C) firing said formed charge in a reducing atmosphere of nitrogen at a temperature in the range 1,100°C to 1,700°C;

said boron and/or calcium compound being added in a quantity which is determined so that the sintered material obtained at the end of step C) includes a total amount of calcium and boron in the range 0.05% to 1.5%.

[0111] The composition of the starting charge may be determined so as to obtain, at the end of step C), a sintered material which has one or several of the optional characteristics of a sintered material according to WO 2006/056698.

[0112] At step B), any technique known to form a charge to fabricate a ceramics may be used. In particular, step B) may comprise the following operations:

i) forming the charge by pressing or by casting or slip casting in a porous or non porous mold, to obtain a preform;

ii) unmolding said preform;

iii) drying.

[0113] The forming operation may comprise, for instance, an additional compacting technique by vibration or tamping

[0114] In an embodiment, the forming operation at step i) may comprise extrusion.

[0115] In an embodiment, the fabrication method according comprises an additional step, following step C), in which the sintered material obtained at the end of step C) is fired in an oxidizing atmosphere, preferably at a temperature between 1,000°C and 1,700°C, and possibly for a time in the range between 1 and 10 hours, depending on the dimensions of the mass of sintered material.

[0116] The second firing step may be done as a post-treatment, after partial or complete cooling of the sintered material obtained at the end of the first firing step.

[0117] It could also be done in the continuity of the first firing step, through the injection of an oxidizing gas, for example air, without any substantial cooling between the two firing steps. The fabrication method according to this embodiment is therefore particularly efficient.

[0118] The oxidizing atmosphere preferably contains at least 20% by weight of oxygen

Examples

[0119] The samples of the following examples A to D were shaped by slip casting in a gypsum mould to form plates.

[0120] The ceramic slip was prepared from the constituents according to Table 2. After removal from the mould, the green plates were dried at up to 100°C and fired at 1,420°C under nitrogen atmosphere. The green plates were thus sintered by reaction with nitrogen to form silicon nitride bond.

[0121] The samples of the examples E to H are plates, tiles or bricks which were prepared by pressing a mix inside a mould at a pressure of about 500 kg/cm² in order to obtain green compacts with the desired dimensions. The ceramic mix was prepared from the constituents according to the Table 2'.

[0122] After removal from the mould, the plates or tiles or bricks of all the examples except G were dried at up to 100°C and fired at 1,420°C under nitrogen atmosphere.

[0123] The product G is a brick made of sintered chromium oxide called Zirchrom 60® delivered by Saint-Gobain SEFPRO

[0124] Bulk density and open porosity were measured in accordance with ISO5017 Standard.

[0125] The modulus of rupture in bending (MOR) was evaluated according to the ISO5014 Standard.

[0126] The steam oxidation test 5 was performed in accordance with ASTM C863 at 1000°C.

[0127] The corrosion test 6 for reproducing the corrosion in heat recuperative furnaces for fibre glass making was obtained in the following manner. Three cylindrical samples of 22 mm diameter and 100 mm length were cut from the

core of each brick, tile or plate to be tested. The samples, placed in a furnace crucible, were immersed in a slag of rasorite (which is a kind of sodium boride) at a temperature of 1000°C for 48 hours under air atmosphere. The samples were rotated at a speed of 6 rpm. The volume was measured before and after corrosion. The corrosion indicator is equal to the reverse of the average volume loss of the three samples of the tested brick, tile or plate. The volume loss results from the corrosive attack by the melt and the vapours. Higher is the corrosion indicator, higher is the corrosion resistance. The Zirchrom 60® is the reference product. Its corrosion indicator is therefore 100.

[0128] The thermal conductivity was measured according to test 7. First, the thermal diffusivity $a(600^{\circ}\text{C})$ was measured by laser flash method at 600°C under argon in accordance with EN821.2 recommendation. The thermal conductivity $\lambda(600^{\circ}\text{C})$ was evaluated according to the relation

$$\lambda(600^{\circ}\text{C}) = \rho * a(600^{\circ}\text{C}) * C_p(600^{\circ}\text{C})$$

where ρ is the bulk density measured in accordance with ISO5017 and C_p is the thermal heat capacity measured by a calorimeter.

[0129] Test 8 is a creep test under flexion at high temperature.

[0130] The piece of material to be tested is cut in order to obtain a sample of dimensions 70*20*4mm³ extracted from pieces of 100mm*100mm*4mm, previously fired or passivated under air at 1400°C, during a soak time of 5 hours after a first firing in a reducing atmosphere of nitrogen.

[0131] After grinding, the sample is placed in a furnace equipped with a 3 point bending system. The sample is placed on two supports spaced by 50 mm, as represented in Figure 3. A force F is applied on a top part of dimensions 1 cm width and 2 cm long (width of the sample to be tested) placed at the middle length of the sample. A load of 2 MPa (F divided by the surface of said top part) is applied at room temperature and the temperature of the furnace is then increased to 1450°C at a rate of 10 K/min. At the temperature of 1450°C, the load is increased to 50 MPa and maintained during 10 hours. A measurement system with a dial gauge allows measuring the deflection (or the vertical deformation) of the sample at the mid length of the sample. This deflection is measured in mm, at 1450°C under the load of 50 MPa. The deflection result is an average of 10 samples i.e. 10 tests.

[0132] The test 9 is similar to the test 5, but is performed on samples which have been fired or passivated under air at 1400°C, during a soak time of 5 hours after a first firing in a reducing atmosphere of nitrogen.

[0133] The test results in the tables 3 and 3' show that the products B and D are much more stable in dimension after an oxidation according a very long duration compared to the reference products A and B, respectively.

[0134] It was also found that the D product exhibits a better abrasion resistance compared to the reference product C.

[0135] The product F exhibits a smaller decrease of its thermal conductivity compared to the reference product E.

[0136] The product H exhibits a really high corrosion resistance in accordance with the test 6 compared to the reference product G.

[0137] The Modulus of Rupture of the products is also noteworthy. Therefore, the invention also concerns the use of the refractory shaped product (comprising, or made of, a sintered material of WO 2006/056698) to increase the modulus of rupture in bending. The standard for measurement is ISO5014.

Table 2

	A According to US4990469	B Product used in the invention	C Reference product	D Product used in the invention
Mix formulation (pourcentages in weight)				
SiC grains and powder 0.2 to 1mm			81	80.2
SiC Grains and powder 20 to 150 μm	40	39.6		
SiC Grains and powder 0. 1 to 10 μm	37.5	37.2		
Silicon metal powder 0.5 to 50 μm	17	16.9	16	16
Calcined Refractory Clay			3	3
Boron carbide powder(B4C >95%) diameter of grains : 95% less than 45 μm		0.8		0.8
Iron oxide powder 1 to 75 μm	0.5	0.5		

EP 2 250 141 B1

(continued)

5		A According to US4990469	B Product used in the invention	C Reference product	D Product used in the invention
	Mix formulation (pourcentages in weight)				
	Calcined alumina powder 0.4 to 10 μ m	5	5		
10	Mineral formulation	100	100	100	100
	Additives (pourcentages in weight relative to total mineral formulation)				
	Fluidizer such as water and sodium hydroxide	0.3	0.3	0.2	0.2
15	Water	12.5	12.5	6	6

Table 2'

20		E Reference product	F Product used in the invention	H Product used in the invention
	Mix formulation (pourcentage in weight)			
	SiC grains and powder 0.2 to 3 mm	65	64.5	72
25	SiC Grains and powder 90% <200 μ m %	21	20.8	14.5
	Silicon metal powder 0.5 to 75 μ m	14	13.9	13
30	Boron carbide powder (B4C >95%) diameter of grains 95% lower than 45 μ m		0.8	0.5
	Iron oxide powder 1 to 75 μ m			
	Calcined alumina powder 0.4 to 10 μ m			
35	Mineral formulation	100	100	100
	Additives (pourcentages in weight relative to total mineral formulation)			
	Calcium lignosulfonate binder	+2.0	+2.0	+2.0
	Cellulose binder	+0.5	+0.5	+0.5
40	water	+3.0	+3.0	+3.0

Table 3

45	examples		A According to US4990469	B Product used in the invention	C Reference product	D Product used in the invention
	Shape of the product		50*50*4mm plates	50*50*4mm plates	50*50*4mm plates	50*50*4mm plates
50	Test 1	Bulk density	2.82	2.83	2.65	2.67
	Test 1	Open porosity %	12.0	12.1	15.0	15.0
55	Test 2	Modulus of rupture MPa at ambient	175	180	40	42

EP 2 250 141 B1

(continued)

examples		A According to US4990469	B Product used in the invention	C Reference product	D Product used in the invention
Shape of the product		50*50*4mm plates	50*50*4mm plates	50*50*4mm plates	50*50*4mm plates
Test 3	Si ₃ N ₄ α	8	5		
	Si ₃ N ₄ β	14	17		
	SiAlON β'				
	Si ₂ ON ₂	3	2		
Test 4	N LECO analysis	8.5	8.7	8	8.2
	SiC LECO analysis	72	71	75	76
	O LECO analysis			1.5	1.6
Test 5	Δ m/m (%) after 500h	+3.0+	+1.9		
	Δ v/v (%) after 500h	+2.5	+0.2	+3.5	+0.5
Test 8	Measurement after firing under air 1400°C / 5h soak : Creep tests under flexion at 1450°C / 50 MPa load ; Deflection after 10 h in mm	0.35 +/-0.1	0.25 +/-0.05		
Test 9	Measurement after firing under air 1400°C / 5h soak : Δ m/m (%) after 800h at 1000°C	+1.5%	+0.7%		

Table 3'

examples		E Reference product	F Product used in the invention	G =Zirchrom 60 Reference product	H Product used in the invention
Shape of the product		Tile Dim 20*100*100mm	Tile Dim 20*100*100mm	bricks 75*230*230mm	bricks 75*230*230 mm
Test 1	Bulk density	2.70	2.70	3.85	2.62
Test 1	Open porosity %	14.0	14.0	14.0	16.5
Test 2	Modulus of rupture MPa at ambient	55	50		
test 3	Si ₃ N ₄ α	8	4		1
	Si ₃ N ₄ β	12	18		15
	SiAlON β'				
	Si ₂ ON ₂	<2	<2		
Test 4	N LECO analysis	7.9	7.7		8
	SiC LECO analysis	79	78.5		78
	CR ₂ O ₃ chemical analysis			62	
	ZrO ₂ chemical analysis			10	
	O LECO analysis	0.5	0.5		0.9

(continued)

	examples	E Reference product	F Product used in the invention	G =Zirchrom 60 Reference product	H Product used in the invention
5	Shape of the product	Tile Dim 20*100*100mm	Tile Dim 20*100*100mm	bricks 75*230*230mm	bricks 75*230*230mm
10	test 5	Δ m/m (%) after 500h	+4.0	+1.8	
		Δ v/v (%) after 500h	+1.6	+0.2	
15	Test 6	corrosion test with rasorite at 1000°C/48h Corrosion index Id		100	400
20	Test 7	Thermal conductivity at 600°C in w/m.K by laser flash method Loss in % after steam oxidation according to test 5 but after 300h	20 8	25 18	

Claims

1. Use of a refractory shaped product based on silicon carbide (SiC) reactively sintered between 1,100°C and 1,700°C to form a silicon nitride binder Si₃N₄, said product including 0.05% to 1.5% of boron, as a percentage by weight, the Si₃N₄/SiC weight ratio being in the range 0.05 to 0.45, as a device chosen in the group consisting of kiln furniture or other firing supports; a block, a tile and a tube of a heat recuperator; a block, a tile and a tube of a heat regenerator; a block and a tube of a muffle; a block, a tile and a tube of a domestic incineration furnace; a block, a tile and a tube of a furnace of a glass making factory in a location where it is not in direct contact with molten glass; a block, a tile and a tube of a metallurgical furnace; a block of a skid rail of a metallurgical furnace; a block and a tube of an immersion heater; a heater tube; a thermocouple protective tube; and a tube for transporting molten metal.
2. Use according to the preceding claim, wherein said shaped product is chosen in the group consisting of a plate; a post; a setter; a beam; a roller; a block, a tile or a tube of a holding furnace; a block, a tile or a tube of a smelting furnace for non ferrous metals; a tile or a tube of a protection wall; a block of a skid rail of a furnace for the heat treatment of iron or steel bars or of other metallurgical products.
3. Use according to any one of the preceding claims, wherein said shaped product presents a thickness less than 1/10 of its length and/or of its width, or presents a thickness less than 2/100 of its length and/or its width, or presents a thickness less than 10mm.
4. Use according to any one of the preceding claims, said product being fabricated according to a method comprising the following steps in succession:
 - A) preparing a charge comprising a particulate mixture comprising a silicon carbide granulate and at least one boron compound, a binder optionally being added to said particulate mixture;
 - B) forming said charge;
 - C) firing said formed charge in a reducing atmosphere of nitrogen at a temperature in the range 1,100°C to 1,700°C; said boron compound being selected from the group formed by oxides, carbides, nitrides, fluorides containing boron, and CaB₆.
5. Use according to any one of the preceding claims, wherein the percentage by weight of boron in said shaped product is 1.2% or less.
6. Use according to any one of the preceding claims, wherein the Si₃N₄/SiC weight ratio in said shaped product is in

the range 0.1 to 0.2.

7. Use according to the preceding claim, wherein the silicon nitride Si_3N_4 in the beta form in said shaped product represents, as a percentage by weight, at least 80% of the whole of the silicon nitride Si_3N_4 in the beta form and in the alpha form.
8. Use according to any one of the preceding claims, wherein the amount of Si_2ON_2 , as a percentage by weight, in said shaped product is less than 5%.
9. Use according to any one of the preceding claims, wherein the percentage by weight of calcium in said shaped product is in the range 0.05% to 1.2%.
10. Use according to any one of the preceding claims, wherein said shaped product includes at least 0.3% by weight of boron, as a percentage by weight.
11. Use according to any one of the preceding claims, in an application where said product is submitted to cycling variations of temperature, each cycle lasting less than 24 hours, and in which in any cycle, the temperature varies of at least 1000°C and/or in which any cycle lasts at least 1 hour.
12. Use according to any one of the preceding claims, in a bottom part of an heat regenerator of a heat recuperative furnace for making glass, or in a refractory lining of an incineration furnace to transfer heat by conduction.
13. Use according to any one of the claims 1 to 12, in a refractory lining of an incineration furnace in which said product has not been submitted to an oxidative post-treatment at a temperature between 1000° C and 1700° C.
14. Use according to any one of claims 1 to 10, wherein said shaped product is kiln furniture or other firing support
 - on which a coating comprising or made of metal hydrate, alumina, alumina silicate borosilicate, zirconia and mixture of these is deposited, or
 - free of any coating.
15. Use according to any one of claims 1 to 10, said refractory shaped product being at least partly covered with a coating, to avoid peeling of said coating when said product is used as a support to sinter porcelain pieces.
16. Use according to any one of the preceding claims to increase the modulus of rupture in bending.
17. Use according to any one of the preceding claims, said product being fabricated according to a method comprising the following steps in succession:
 - a) preparing a charge comprising a particulate mixture comprising a silicon carbide granulate and at least one boron compound, a binder optionally being added to said particulate mixture;
 - b) forming said charge in a mold;
 - c) compacting said charge in the mold to form a preform;
 - d) unmolding said preform;
 - e) drying said preform, preferably in air or a moisture-controlled atmosphere; and
 - f) firing said preform in a reducing atmosphere of nitrogen at a temperature in the range 1100°C to 1700°C.
18. Use according to any one of the preceding claims, said product being used in a firing support supporting an item to be fired, said firing support
 - being free of any coating, at least on the surface in contact with said item, and wherein said firing support has not been passivated, or
 - being free of any coating, wherein said firing support has been passivated between 800°C and 1600°C

Patentansprüche

1. Verwendung eines feuerfesten geformten Produkts auf der Basis von Siliziumcarbid (SiC), welches reaktiv zwischen

1,100°C und 1,700°C gesintert ist, um ein Siliziumnitrid-Bindemittel Si_3N_4 zu formen, wobei das Produkt 0,05% - 1,5% in Gewichtsprozent Bor beinhaltet und das Gewichtsverhältnis $\text{Si}_3\text{N}_4/\text{SiC}$ in dem Bereich zwischen 0,05 und 0,45 liegt, als Vorrichtung, welche ausgewählt ist aus der Gruppe bestehend aus Brennhilfsmittel oder anderen Brennunterlagen; als ein Block, ein Ziegel und ein Rohr eines Wärmerekuperators; als ein Block, ein Ziegel und ein Rohr eines Wärmeregenerators; als ein Block und ein Rohr eines Muffelofens; als ein Block, ein Ziegel und ein Rohr eines Haushalts-Verbrennungsofens; als ein Block, ein Ziegel und ein Rohr eines Ofens eines Glasherstellungswerks in einer örtlichen Anordnung, in der es nicht in direktem Kontakt mit geschmolzenem Glas ist; als ein Block, ein Ziegel und ein Rohr eines metallurgischen Ofens; als ein Block einer Gleitschiene eines metallurgischen Ofens; als ein Block und ein Rohr eines Immersionsheizgeräts; als eine Heizröhre; als eine Wärmekopplungsschutzröhre; und ein Rohr zum Transport geschmolzenen Metalls.

2. Verwendung nach dem vorhergehenden Anspruch, bei der das geformte Produkt aus einer Gruppe ausgewählt ist, die aus einer Platte; einer Stange; einer Kassette; einem Balken; einer Walze; einem Block, einem Ziegel oder einem Rohr eines Warmhalteofens besteht, einem Block, einem Ziegel oder einem Rohr eines Schmelzofens für nicht Eisenmetalle; einem Ziegel oder einem Rohr einer Schutzwand; einem Block einer Gleitschiene eines Ofens für die Wärmebehandlung von Eisen oder Stahlblöcken oder anderer metallurgischer Produkte.

3. Verwendung nach einem der vorhergehenden Ansprüche, wobei das geformte Produkt eine Dicke kleiner als 1/10 seiner Länge und/oder seiner Breite aufweist oder eine Dicke kleiner als 2/100 seiner Länge und /oder seiner Breite oder eine Dicke kleiner 10 mm aufweist.

4. Verwendung nach einem der vorhergehenden Ansprüche, wobei das Produkt nach einem Verfahren mit den folgenden aufeinanderfolgenden Schritten hergestellt wird:

A) Zubereitung einer Charge, welche eine Teilchen-Mischung aufweist, die aus einem Silikoncarbidgranulat und mindestens einem Bor-Compound besteht, wobei optional ein Bindemittel zu dieser Teilchen- Mischung hinzugefügt wird;

B) Formen dieser Charge;

C) Brennen der geformten Charge in einer reduzierenden Atmosphäre von Stickstoff bei einer Temperatur im Bereich zwischen 1,100°C und 1.700°C, wobei das Bor-Compound ausgewählt ist aus der Gruppe, die aus Oxiden, Carbiden, Nitriden, boraufweisenden Fluoriden und CaB_6 besteht.

5. Verwendung nach einem der vorhergehenden Ansprüche, bei der das Bor in dem geformten Produkt in Gewichtsprozent 1,2% oder weniger beträgt.

6. Verwendung nach einem der vorhergehenden Ansprüche, in der das Gewichtsverhältnis $\text{Si}_3\text{N}_4/\text{SiC}$ in dem geformten Produkt im Bereich zwischen 0.1 und 0,2 liegt.

7. Verwendung nach dem vorhergehenden Anspruch, bei der das Siliziumnitrid Si_3N_4 in der Betaform in dem geformten Produkt in Gewichtsprozent mindestens 80% des gesamten Siliziumnitrids Si_3N_4 in der Betaform und in der Alphaform darstellt.

8. Verwendung nach einem der vorhergehenden Ansprüche, bei der die Menge von Si_2ON_2 in Gewichtsprozent in dem geformten Produkt kleiner als 5% ist.

9. Verwendung nach einem der vorhergehenden Ansprüche, bei der das Kalzium des geformten Produkts in Gewichtsprozent im Bereich zwischen 0,05% und 1,2% liegt.

10. Verwendung nach einem der vorhergehenden Ansprüche, bei der das geformte Produkt in Gewichtsprozent mindestens 0,3% Bor aufweist.

11. Verwendung nach einem der vorhergehenden Ansprüche in einer Anwendung, bei der das Produkt zyklischen Temperaturveränderungen ausgesetzt wird, wobei jeder Zyklus weniger als 24 Stunden andauert und in der in jedem Zyklus die Temperatur um mindestens 1000°C variiert und/oder in welcher jeder Zyklus mindestens 1 Stunde dauert.

12. Verwendung nach einem der vorhergehenden Ansprüche im Bodenteil eines Wärmeregenerators eines Wärmerekuperativofens zur Glasherstellung oder in einer Feuerfestauskleidung eines Verbrennungsofens, um Wärme durch

Konduktion zu übertragen.

13. Verwendung nach einem der Ansprüche 1 bis 12 in einer Feuerfestauskleidung eines Verbrennungsofens, in dem das Produkt keiner oxidativen Nachbehandlung bei einer Temperatur zwischen 1000°C und 1700°C unterworfen wurde.

14. Verwendung nach einem der Ansprüche 1 bis 10, bei der das geformte Produkt ein Brennhilfsmittel oder eine andere Brennunterlage ist.

- auf der eine Beschichtung aufgebracht ist, die besteht oder gemacht ist aus Metallhydrat, Aluminiumoxid, Aluminosilicat, Borosilicat, Zirkoniumoxid und Mischungen dieser oder
- frei von jeglicher Beschichtung ist.

15. Verwendung nach einem der Ansprüche 1 bis 10, bei der das feuerfeste geformte Produkt zumindest teilweise mit einer Beschichtung abgedeckt ist, um Peeling dieser Beschichtung zu vermeiden, wenn das Produkt als Träger zur Sinterung von Porzellanteilen gebraucht wird.

16. Verwendung nach einem der vorhergehenden Ansprüche, um den Brechmodul beim Biegen zu vergrößern.

17. Verwendung nach einem der vorhergehenden Ansprüche, bei der das Produkt nach einem Verfahren hergestellt wird, welches die folgenden aufeinander folgenden Schritte aufweist:

- a) Zubereitung einer Charge, welche eine Teilchen-Mischung aufweist, die aus einem Silikoncarbidgranulat und mindestens einem Bor-Compound besteht, wobei optional ein Bindemittel zu dieser Teilchen-Mischung hinzugefügt wird;
- b) Formen dieser Charge in einer Form;
- c) Verdichten dieser Charge in der Form, um eine Vorform zu bilden;
- d) Entformen dieser Vorform;
- e) Trocknen der Vorform, bevorzugter Weise in Luft oder einer feuchtigkeitsgeregelten Atmosphäre; und
- f) Brennen der Vorform in einer reduzierenden Atmosphäre von Stickstoff bei einer Temperatur im Bereich 1100°C bis 1700°C.

18. Verwendung nach einem der vorhergehenden Ansprüche, bei der das Produkt in einer Brennunterlage benutzt wird, welche einen zu brennenden Gegenstand trägt, wobei die Brennunterlage

- frei von jeglicher Beschichtung ist, zumindest auf der Oberfläche im Kontaktbereich mit dem Gegenstand und wobei die Brennunterlage nicht passiviert ist, oder
- frei von jeglicher Beschichtung ist, wobei die Brennunterlage zwischen 800°C und 1600°C passiviert worden ist.

Revendications

1. Utilisation d'un produit réfractaire façonné à base de carbure de silicium (SiC) soumis à un frittage réactif entre 100 °C et 1 700 °C pour former un liant nitrure de silicium Si_3N_4 , ledit produit incluant 0,05 % à 1,5 % de bore, en pourcentage en masse, le rapport massique $\text{Si}_3\text{N}_4/\text{SiC}$ étant dans la plage 0,05 à 0,45, en tant que dispositif choisi dans le groupe constitué par un accessoire de four ou d'autres supports de cuisson ; un bloc, une brique et un tube d'un récupérateur de chaleur ; un bloc, une brique et un tube d'un régénérateur thermique ; un bloc et un tube d'un four à moufle ; un bloc, une brique et un tube d'un four d'incinération domestique ; un bloc, une brique et un tube d'un four d'une usine de fabrication de verre à un endroit où il n'est pas en contact direct avec le verre en fusion ; un bloc, une brique et un tube d'un four métallurgique ; un bloc d'un rail de glissière d'un four métallurgique ; un bloc et un tube un thermo-plongeur ; un tube d'élément chauffant ; un tube protecteur de thermocouple ; et un tube de transport de métal en fusion.

2. Utilisation selon la revendication précédente, dans laquelle ledit produit façonné est choisi dans le groupe constitué par une plaque ; un poteau ; un support d'enfournement ; une poutre ; un rouleau ; un bloc, une brique ou un tube d'un four de maintien ; un bloc, une brique ou un tube d'un four de fusion pour métaux non ferreux ; une brique ou un tube d'un mur de protection ; un bloc d'un rail de glissière d'un four pour le traitement thermique des barres de fer ou d'acier ou d'autres produits

métallurgiques.

3. Utilisation selon l'une quelconque des revendications précédentes, dans laquelle ledit produit façonné présente une épaisseur inférieure à 1/10 de sa longueur et/ou de sa largeur, ou présente une épaisseur inférieure à 2/100 de sa longueur et/ou de sa largeur, ou présente une épaisseur inférieure à 10 mm.
4. Utilisation selon l'une quelconque des revendications précédentes, ledit produit étant fabriqué selon un procédé comprenant les étapes successives suivantes :
 - A) préparer une charge comprenant un mélange particulaire comprenant un granulé de carbure de silicium et au moins un composé de bore, un liant étant facultativement ajouté audit mélange particulaire ;
 - B) former ladite charge ;
 - C) cuire ladite charge formée dans une atmosphère réductrice d'azote à une température située dans la plage de 1 100 °C à 1 700 °C ; ledit composé contenant du bore étant choisi dans le groupe formé par les oxydes, les carbures, les nitrures, les fluorures contenant du bore, et CaB_6 .
5. Utilisation selon l'une quelconque des revendications précédentes, dans laquelle le pourcentage en masse de bore dans ledit produit façonné est de 1,2 % ou moins.
6. Utilisation selon l'une quelconque des revendications précédentes, dans laquelle le rapport massique $\text{Si}_3\text{N}_4/\text{SiC}$ dudit produit façonné se situe dans la plage de 0,1 à 0,2.
7. Utilisation selon la revendication précédente, dans laquelle le nitrure de silicium Si_3N_4 sous forme bêta dans ledit produit façonné représente, en pourcentage en masse, au moins 80 % de l'intégralité du nitrure de silicium Si_3N_4 sous forme bêta et sous forme alpha.
8. Utilisation selon l'une quelconque des revendications précédentes, dans laquelle la quantité de Si_2ON_2 , en pourcentage en masse, dans ledit produit façonné est inférieure à 5 %.
9. Utilisation selon l'une quelconque des revendications précédentes, dans laquelle le pourcentage en masse de calcium dudit produit façonné se situe dans la plage de 0,05 % à 1, 2 %.
10. Utilisation selon l'une quelconque des revendications précédentes, dans laquelle ledit produit façonné inclut au moins 0,3 % en masse de bore, en pourcentage en masse.
11. Utilisation selon l'une quelconque des revendications précédentes, dans une application dans laquelle ledit produit est soumis à des variations cycliques de température, chaque cycle durant moins de 24 heures, et dans laquelle dans chaque cycle, la température varie d'au moins 1 000 °C et/ou dans laquelle chaque cycle dure au moins 1 heure.
12. Utilisation selon l'une quelconque des revendications précédentes, dans une partie inférieure d'un régénérateur thermique d'un four à récupération de chaleur pour la fabrication du verre, ou dans un revêtement réfractaire d'un four d'incinération pour transférer la chaleur par conduction.
13. Utilisation selon l'une quelconque des revendications 1 à 12, dans un revêtement réfractaire d'un four d'incinération dans lequel ledit produit n'a pas été soumis à un post-traitement oxydatif à une température située entre 1 000 °C et 1 700 °C.
14. Utilisation selon l'une quelconque des revendications 1 à 10, dans laquelle ledit produit façonné est un accessoire de four ou un autre support de cuisson
 - sur lequel un revêtement comprenant ou consistant en un hydrate de métal, de l'alumine, un aluminosilicate borosilicate, de la zircone et un mélange de ceux-ci, est déposé, ou
 - sans revêtement.
15. Utilisation selon l'une quelconque des revendications 1 à 10, ledit produit réfractaire façonné étant au moins partiellement recouvert d'un revêtement, pour éviter le détachement dudit revêtement lorsque ledit produit est utilisé en tant que support pour fritter des pièces de porcelaine.

16. Utilisation selon l'une quelconque des revendications précédentes permettant d'augmenter le module de rupture en flexion.

17. Utilisation selon l'une quelconque des revendications précédentes, ledit produit étant fabriqué selon un procédé comprenant les étapes suivantes successives :

- a) préparer une charge comprenant un mélange particulaire comprenant un granulé de carbure de silicium et au moins un composé contenant du bore, un liant étant facultativement ajouté audit mélange particulaire ;
- b) former de ladite charge dans un moule ;
- c) compacter ladite charge dans le moule pour former une ébauche ;
- d) démouler ladite ébauche ;
- e) sécher de ladite ébauche, de préférence à l'air ou dans une atmosphère à humidité contrôlée ; et
- f) cuire ladite ébauche dans une atmosphère réductrice d'azote à une température située dans la plage de 1 100 °C à 1 700 °C.

18. Utilisation selon l'une quelconque des revendications précédentes, ledit produit étant utilisé dans un support de cuisson supportant un élément à cuire, ledit support de cuisson

- étant sans revêtement, au moins sur la surface en contact avec ledit élément, et dans laquelle ledit support de cuisson n'a pas été passivé, ou
- étant sans revêtement, dans laquelle ledit support de cuisson a été soumis à une passivation entre 800 °C et 1 600 °C.

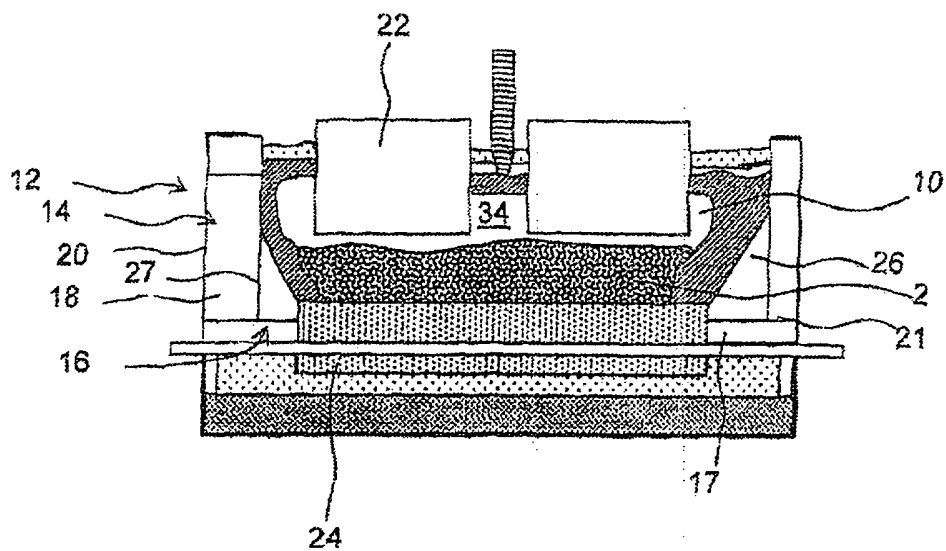


Fig. 1

volume increase in % as a function of oxidation time using the ASTM C 863 test at 900°C with steam

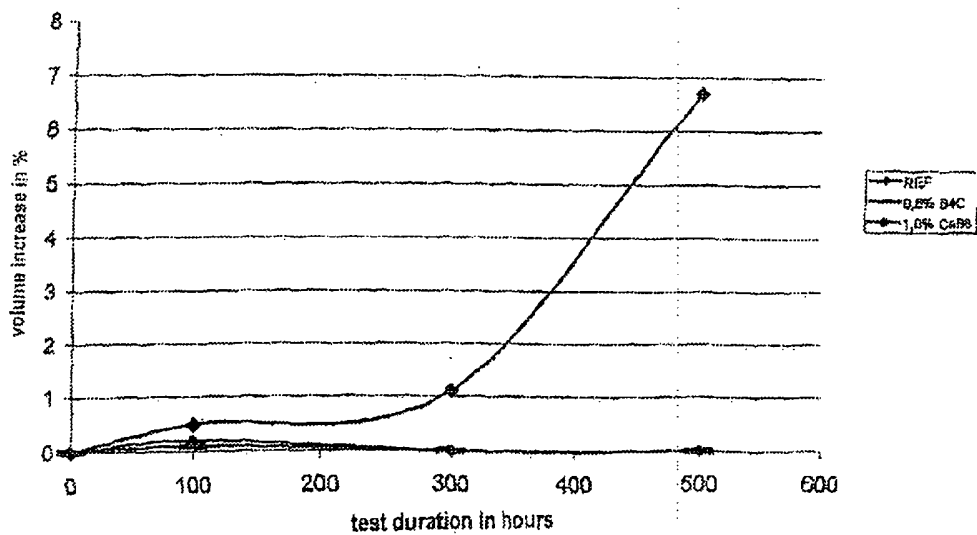


Fig. 2

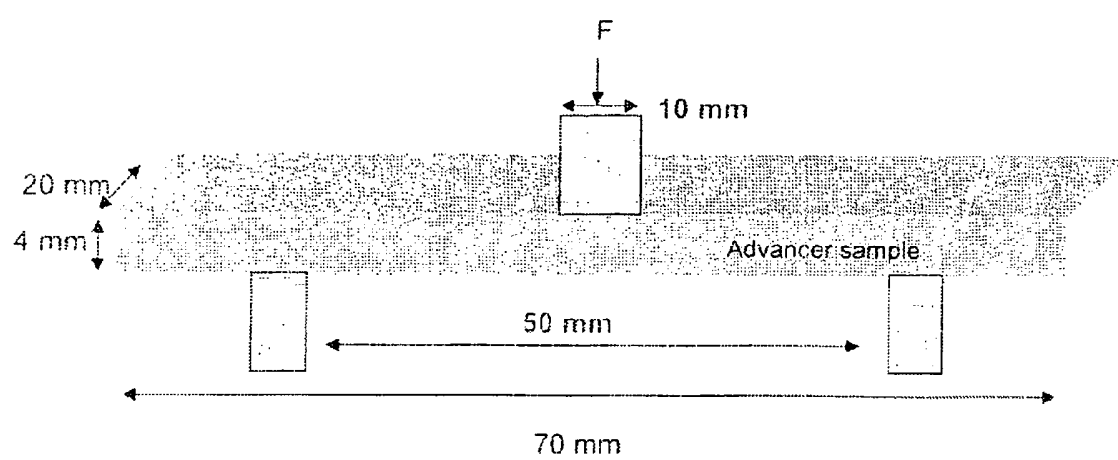


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2752258 A [0010]
- WO 2006056698 A [0014] [0015] [0016] [0019] [0020] [0021] [0023] [0024] [0025] [0026] [0029] [0030] [0040] [0044] [0045] [0050] [0051] [0055] [0056] [0057] [0062] [0063] [0064] [0065] [0069] [0071] [0072] [0073] [0075] [0082] [0083] [0084] [0085] [0086] [0087] [0089] [0090] [0091] [0092] [0096] [0098] [0099] [0100] [0101] [0103] [0104] [0105] [0106] [0107] [0111] [0137]
- JP H03223166 B [0066]
- JP 2000302554 A [0067]
- US 6143239 A [0088] [0089]
- EP 603851 A [0088] [0089]
- WO 2006C56698 A [0091]
- US 4497628 A [0097]
- US 2005130830 A [0100]
- US 5135893 A [0101]
- EP 0107520 A [0102]
- WO 0026597 A [0102]
- EP 0635678 A [0102]
- US 4990469 A [0137]

Non-patent literature cited in the description

- **REDDY N.K.** Influence of infiltrants on the electrical resistivity of silicon nitride bonded silicon carbide refractories. *Journal of Materials Science Letters*, 01 June 1999, vol. 18 (11), 869-871 [0068]

**SZILÍCIUM-NITRID KÖTŐANYAGOT TARTALMAZÓ SZILÍCIUM-KARBID ALAPÚ SZINTERELT TŰZÁLLÓ ANYAG
ALKALMAZÁSA**

Szabadalmi igénypontok

- 5 1. Tűzálló alakozott termék alkalmazása az égetési segédeszközök vagy egyéb égetési állványok; hővisszanyerő berendezés falazóeleme, burkolóeleme és csőve; regenerátor falazóeleme, burkolóeleme és csőve; tokos kemence falazóeleme és csőve; háztartási égetőkemence falazóeleme, burkolóeleme és csőve; üveggyártó üzem kemencéjének falazóeleme, burkolóeleme és csőve olvadt üveggel közvetlenül nem érintkező helyen; kohászati kemence falazóeleme, burkolóeleme és csőve; kohászati kemence csúsztatósínjének falazóeleme; merülőforraló blokkja és csőve; fűtőcső; termoelem védőcsőve; és olvadt fém szállításra szolgáló cső alkotta csoportból választott eszközként; a terméket szilícium-nitrid kötőanyag Si_3N_4 képzéséhez 1100°C és 1700°C között reaktív módon szinterelt szilícium-karbid (SiC) alapú termék képezi, amely termék 0,05-1,5 tömeg% bört tartalmaz, továbbá amely terméknél a $\text{Si}_3\text{N}_4/\text{SiC}$ tömegarány a 0,05-0,45 tartományban van.
- 10 2. Az előző igénypont szerinti alkalmazás, ahol az alakozott termék a lap; oszlop; égetőtök; gerenda; görögő; pihentetőkemence falazóeleme, burkolóeleme vagy csőve; nemvas-fémek olvasztására szolgáló olvasztókemence falazóeleme, burkolóeleme vagy csőve; védőfal burkolóeleme vagy csőve; vas- vagy acélrudak vagy egyéb kohászati termékek hőkezelésére szolgáló kemence csúsztatósínjének falazóeleme alkotta csoportból van választva.
- 15 3. Az előző igénypontok bármelyike szerinti alkalmazás, ahol az alakozott termék vastagsága a termék hossza és/vagy szélessége 1/10 részénél kisebb, vagy vastagsága a hossza és/vagy szélessége 2/100 részénél kisebb, vagy a vastagsága 10 mm-nél kisebb.
- 20 4. Az előző igénypontok bármelyike szerinti alkalmazás, ahol a terméket az alábbi egymást követő lépéseket tartalmazó eljárással állítjuk elő:
 - A) szilícium-karbid granulátumot és legalább egy bórvegyületet tartalmazó szemcsés keveréket tartalmazó elegyadagot készítünk, a szemcsés keverékhez adott esetben kötőanyagot adunk hozzá;
 - 25 B) az elegyadagot formázzuk;
 - C) a formázott elegyadagot redukzív nitrogénatmoszférában 1100°C és 1700°C közötti tartományba eső hőmérsékleten kiégetjük; a bórvegyületet a börtartalmú oxidok, karbidok, nitridek, fluoridok, továbbá a CaB_6 alkotta csoportból választjuk.
- 30 5. Az előző igénypontok bármelyike szerinti alkalmazás, ahol az alakozott termékben legfeljebb 1,2 tömeg% bór van.
6. Az előző igénypontok bármelyike szerinti alkalmazás, ahol az alakozott termékben a $\text{Si}_3\text{N}_4/\text{SiC}$ tömegarány a 0,1-0,2 tartományban van.
7. Az előző igénypont szerinti alkalmazás, ahol az alakozott termékben lévő összes -- alfa és béta szerkezetű -- szilícium-nitrid Si_3N_4 legalább 80 tömeg%-át a szilícium-nitrid Si_3N_4 béta módosulata teszi ki.
- 35 8. Az előző igénypontok bármelyike szerinti alkalmazás, ahol az alakozott termékben 5 tömeg%-nál kevesebb Si_2ON_2 van.

9. Az előző igénypontok bármelyike szerinti alkalmazás, ahol az alakozott termékben 0,05-1,2 tömeg% tartományban lévő mennyiségű kalcium van.
10. Az előző igénypontok bármelyike szerinti alkalmazás, ahol az alakozott termék legalább 0,3 tömeg% bört tartalmaz.
- 5 11. Az előző igénypontok bármelyike szerinti alkalmazás egy olyan felhasználási területen, ahol a termék ciklus hőmérsékletváltozásnak van kitéve, az egyes ciklusok 24 óránál rövidebb ideig tartanak, továbbá ahol a hőmérséklet bármely ciklusban legalább 1000°C-kal változik és/vagy ahol bármelyik ciklus legalább 1 óráig tart.
12. Az előző igénypontok bármelyike szerinti alkalmazás üveggyártásra szolgáló hővisszanyerő kemence regenerátorának fenékrészében vagy égetőkemence tűzálló bélésében megvalósuló konduktív hőszállításhoz.
- 10 13. Az 1-12. igénypontok bármelyike szerinti alkalmazás égetőkemence tűzálló bélésében, ahol a terméket 1000°C és 1700°C közé eső hőmérsékleten zajló oxidatív utókezelésnek nem vetettük alá.
14. Az 1-10. igénypontok bármelyike szerinti alkalmazás, ahol az alakozott termék égetési segédeszköz vagy égetési állvány,
- 15 - melyre fémhidrát, alumínium-oxid, alumínium-szilikát, bórszilikát, cirkónium-dioxid vagy ezek keverékeit tartalmazó vagy ezekből álló bevonat van leválasztva, vagy
- amely mentes bármilyen bevonattól.
15. Az 1-10. igénypontok bármelyike szerinti alkalmazás, ahol a tűzálló alakozott terméket legalább részben bevonat borítja a termék porcelán munkadarabok szinterelésére történő állványként való felhasználásakor a tekintett bevonat leválásának megakadályozásához.
- 20 16. Az előző igénypontok bármelyike szerinti alkalmazás a hajlítószilárdság fokozására.
17. Az előző igénypontok bármelyike szerinti alkalmazás, ahol a terméket az alábbi egymást követő lépéseket tartalmazó eljárással állítjuk elő:
- a) szilícium-karbid granulátumot és legalább egy bórvegyületet tartalmazó szemcsés keveréket tartalmazó elegyadagot készítünk, a szemcsés keverékhez adott esetben kötőanyagot adunk hozzá;
- 25 b) az elegyadagot szerszámban formázzuk;
- c) előforma kialakításához az elegyadagot a szerszámban tömörítjük;
- d) az előformát a szerszámból eltávolítjuk;
- e) az előformát előnyösen levegőben vagy páraszabályozott atmoszférában kiszárítjuk; és
- f) az előformát redukív nitrogénatmoszférában 1100°C és 1700°C közötti tartományba eső hőmérsékleten kiégetjük.
- 30 18. Az előző igénypontok bármelyike szerinti alkalmazás, ahol a terméket kiégetni szándékozott tárgyat alátámasztó égetési állványban használjuk fel, ahol az égetési állványzat
- legalább a tárggyal érintkező felületén bármilyen bevonattól mentes, továbbá ahol az égetési állványzatot nem passziváltuk, vagy
- 35 - bármilyen bevonattól mentes, ahol az égetési állványzatot 800°C és 1600°C közötti passziváljuk.