




(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**
(13) **A1**

(22) Date de dépôt/Filing Date: 2017/12/13 (41) Mise à la disp. pub./Open to Public Insp.: 2018/06/14 (30) Priorité/Priority: 2016/12/14 (EP16382600.1)	(51) Cl.Int./Int.Cl. <i>F01D 25/10</i> (2006.01), <i>B64D 33/08</i> (2006.01), <i>B64D 37/34</i> (2006.01), <i>F01D 25/18</i> (2006.01), <i>F01M 5/02</i> (2006.01), <i>F02C 7/06</i> (2006.01), <i>F02C 7/26</i> (2006.01), <i>F28F 27/00</i> (2006.01) (71) Demandeur/Applicant: AIRBUS OPERATIONS, S.L., ES (72) Inventeurs/Inventors: SEGURA MARTINEZ DE ILARDUYA, LEIRE, ES; JUAREZ BECERRIL, ALBERTO, ES; DEMELAS, SALVATORE, ES (74) Agent: PERRY + CURRIER
--	--

(54) Titre : SYSTEME DE CHAUFFAGE D'HUILE ADAPTE POUR UN MOTEUR DE TURBINE AFIN DE REDUIRE LE COUPLE DE DEMARRAGE

(54) Title: OIL HEATING SYSTEM ADAPTED FOR TURBINE ENGINE TO REDUCE STARTING TORQUE

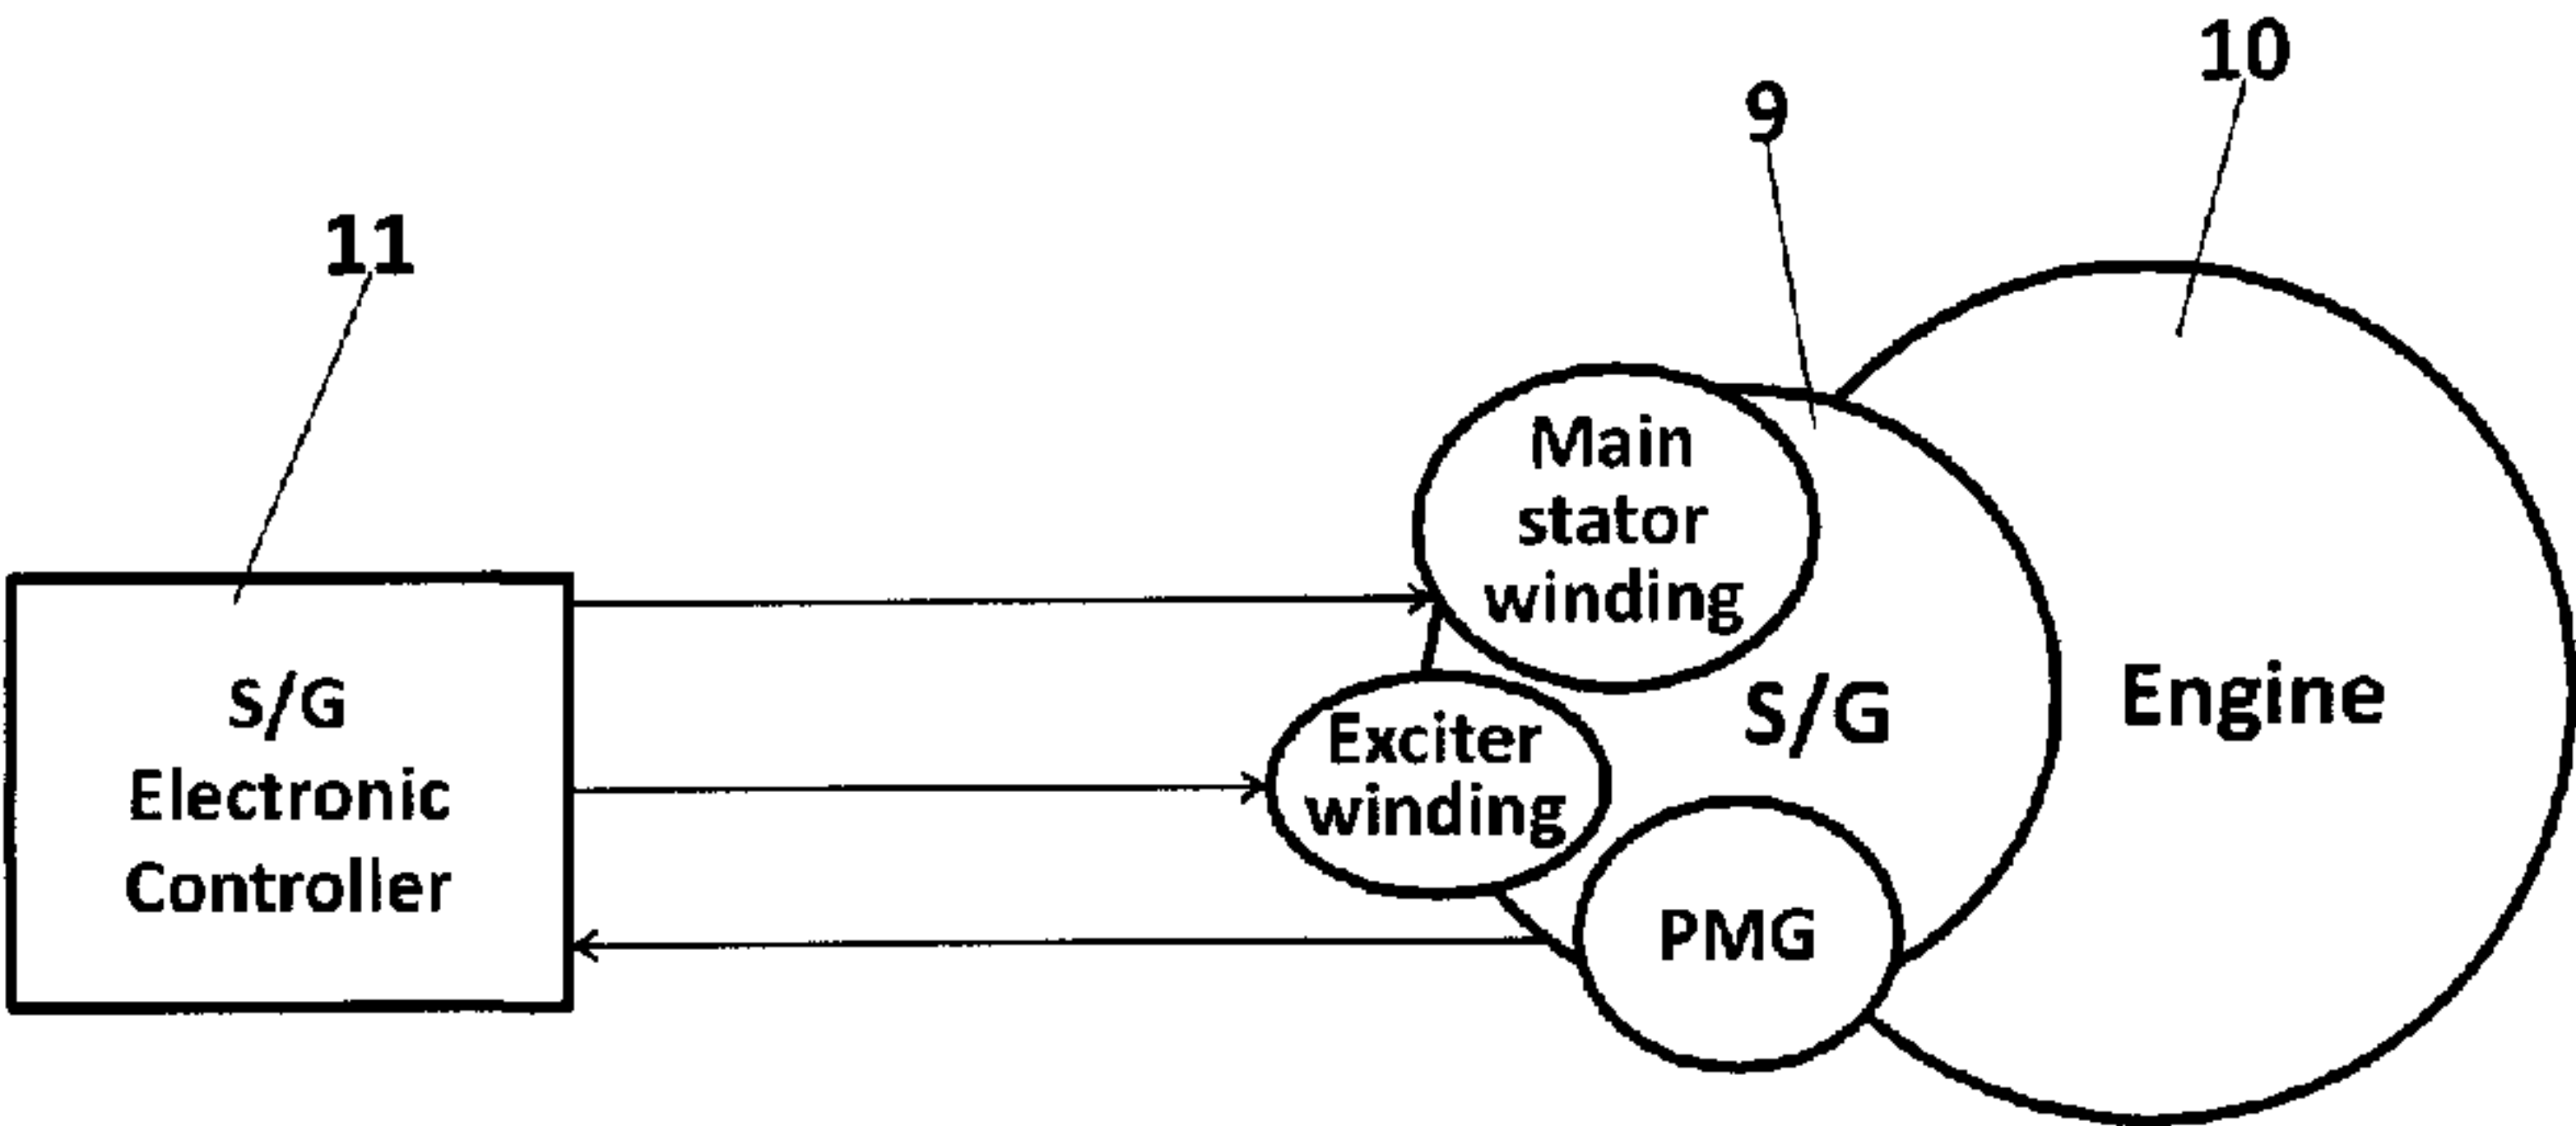

(57) **Abrégé/Abstract:**
The present invention refers to an oil heating system in a turbine engine such as an aircraft turbojet or turboprop main engines, or in an aircraft Auxiliary Power Unit (APU). The turbine oil heating system comprises: a turbine engine oil circuit for conducting lubricating oil to the turbine engine, an electric Starter Generator oil circuit for conducting cooling oil from the electric Starter Generator, an oil-to-oil heat exchanger connected with the engine oil circuit and connectable with the electric Starter Generator oil circuit, for transferring heat from the Starter Generator oil to the engine oil as to warm-up the engine oil during turbine engine motoring prior to actual starting sequence. An object of the invention is to provide a low cost and highly integrated system for reducing drag torque of a turbine engine prior to the starting phase.

ABSTRACT

5 The present invention refers to an oil heating system in a turbine engine such as an aircraft turbojet or turboprop main engines, or in an aircraft Auxiliary Power Unit (APU). The turbine oil heating system comprises: a turbine engine oil circuit for conducting lubricating oil to the turbine engine, an electric Starter Generator oil circuit for conducting cooling oil from the electric Starter Generator, an oil-to-oil heat exchanger connected with the engine oil circuit and connectable with the electric Starter Generator oil circuit, for transferring heat from the Starter Generator oil to the engine oil as to warm-up the engine oil during turbine engine motoring prior to actual starting sequence. An object of the invention is to provide a low cost and highly integrated system for reducing drag torque of a turbine engine prior to the starting phase.

10

**OIL HEATING SYSTEM ADAPTED FOR TURBINE ENGINE TO REDUCE
STARTING TORQUE**

D E S C R I P T I O N

5

Object of the invention

The present invention generally refers to an oil heating system in a turbine engine such as an aircraft turbojet or turboprop main engines, or in an aircraft Auxiliary Power Unit (APU).

10

More in particular, an object of the invention is to provide a low cost and highly integrated system for reducing drag torque of a turbine engine prior to the starting phase.

15

Another object of the invention is to downsize the Starter Generator System (SGS) associated to a turbine engine, to the maximum power required during the generation phase.

20

Background of the invention

Turbine engine starting systems are currently designed for worst scenario, that is, extreme cold conditions down to -40°C, when the effects of the oil viscosity and aerodynamics are very significant. During such cold weather conditions, the total engine starting drag torque is enlarged due to the following phenomena:

25

- Oil viscosity: low ambient temperature significantly increases oil viscosity from engine turbomachinery and accessories within the gearbox and the bearings.

- Aerodynamic drags: high ambient air densities tend to increase aerodynamic drags through the turbomachinery.

30

In order to overcome the effects of low temperature and minimize the additional drag caused by higher oil viscosity, turbomachines starting systems could eventually incorporate an oil heater, usually a thermostatically controlled electric

resistor inserted at the gearbox oil reservoir and powered by the aircraft electrical system. The oil heater is used to increase oil temperature during cold conditions, and therefore to reduce oil viscosity and to reduce total engine starting drag torque.

5 Typically, the power range of an APU oil heater for a commercial aircraft may vary between 500W and 1kW so that, one of the drawback of oil heaters, is that they increase the weight and complexity of the engines while they are not used during the majority of the aircraft operating conditions.

10 Most of aircraft main engines rely on turbine starters to initiate engine rotation. More recently, electrical starting technologies have been introduced; like Starter Generator Systems. A Starter Generator System typically includes a synchronous electrical machine used as a motor to provide mechanical power (torque) for starting the turbine engine, and as a generator to generate electric power for supplying the
15 aircraft electrical systems, once the turbine engine has been started. The engine starting drag torque becomes a critical issue in order not to oversize the electrical machine due to starting requirements,

20 Most of the duty cycle of the Starter Generator corresponds to the generation mode, whereas extremely low part of the duty cycle corresponds to the starting mode. Ideally, the electrical engine should be sized to its nominal operating point and not for one particular point. If the power level requirements for the starting mode are higher than the power requirements for generation, the Starter Generator Systems would end up being oversized for most of its duty cycle. This situation is not desirable,
25 because Starter Generator oversize leads to a weight and volume increase of the electric machine and power converters.

30 On one hand, it is a known practice to connect oil and fuel circuits via heat exchangers to cool down oil used in turbine engines for lubricating components like rolling bearings, during the normal use of the turbine engine. The oil is cooled down by exchanging heat with the fuel flow (cooler than the oil) that is later on fed to injectors of the combustion chamber of a turbine engine.

For that purpose, a main oil-to-fuel heat exchanger is traditionally connected with the oil and fuel circuits downstream or upstream relative to an oil-to-air heat exchanger, mounted at the oil circuit for cooling the oil output from the turbine engine.

5 On the other hand, it has been detected the need in this technical field to optimize the sizing of the Starter Generator System (SGS), in order to reduce its weight and volume. Therefore, an oil heating system is proposed to reduce turbomachinery drag torque prior to the actual starting sequence, and consequently to reduce the electrical power required by the Starter Generator. The starting power
10 requirements are then minimized, which will lead to a further optimization of both the electrical machine and power converters sizing.

For this other purpose, a heat transfer method is comprised to transfer the rejected heat from the Starter Generator oil circuit to the turbomachinery oil circuit.

15 **Summary of the invention**

The present invention is defined in the attached independent claim.

20 The invention is based on a technique or method for heating the lubricating oil of a turbine engine prior to the starting sequence, but instead of relying on resistive elements (heaters) installed at the oil reservoir, using the electric Starter Generator capability to generate/reject heat to increase the temperature of the turbine engine oil prior to engine starting.

25 Therefore, one aspect of the invention refers to a turbine engine comprising a turbine engine oil circuit for conducting lubricating oil to the turbine engine, and a Starter Generator oil circuit for conducting cooling oil from the Starter Generator. The system is characterized in that it further comprises an oil-to-oil heat exchanger connected with the engine oil circuit and connectable with the Starter Generator oil
30 circuit. Here, the meaning of "heat exchanger" must be understood as to encompass any device capable of transferring heat between two fluids, independently of the technology.

By adding a secondary oil-to-oil heat exchanger in series with the main oil-to-fuel heat exchanger, the heat produced by Starter Generator can be transferred to the main engine oil during a motoring operation in order to warm up the engine oil prior to the actual starting sequence. Once the target temperature is reached during the engine motoring through the said heat transfer from the starter generator oil to the main engine oil, the starting sequence can be commanded.

Warming the oil up prior to the engine starting sequence reduces the turbine engine oil viscosity prior to the starting phase according to the invention, which in turn implies that the power demand of the Starter Generator is also reduced. In this way, an optimized Starter Generator in terms of weight and volume can be used, and the electrical starting system can be downsized to the minimum power levels required during generation phase.

The invention can be implemented in aircraft main engines, and/or in an aircraft APU.

An additional advantage of the invention, is that no specific maintenance procedure and external equipment would be required for starting aircraft turbine engines when ambient temperature is below -40°C .

If an aircraft stays under extreme cold conditions and the engine oil temperature drops below -40°C , specific procedures using equipment are nowadays applied. However, with the system of the invention, the engine oil temperature can be easily increased to the minimum required starting temperature.

Brief description of the drawings

Preferred embodiments of the invention are henceforth described with reference to the accompanying drawings, wherein:

Figure 1.- shows a schematic diagram of a Starter Generator System for a turbine engine.

Figure 2.- shows a schematic diagram of a classical architecture of both turbine engine and Starter Generator cooling circuits.

5 Figure 3.- shows a schematic diagram of an exemplary embodiment of an oil heating system adapted for turbomachinery according to the invention, during oil warm up operation when engine motoring is activated. The flows of turbine engine oil and SG oil are identified.

10 Figure 4.- shows the schematic diagram of figure 3 during normal operation when the turbine engine is running. The flows of fuel, turbine engine oil, and Starter Generator oil are identified.

15 Figure 5.- shows a graph corresponding to the fast control mode for the oil heating operation.

Figure 6.- shows a graph corresponding to the slow control mode for the oil heating operation.

20 **Preferred embodiment of the invention**

25 Figure 1 shows a general diagram of a Starter Generator System formed by a Starter/Generator (9) usually a synchronous electric machine, mechanically coupled with a turbine engine (10) for example a turbofan or turboprop engine. The Starter/Generator (9) is used as a motor for starting the turbine engine (10), and once this has been started, during the normal operation of the turbine engine (10), the Starter/ Generator (9) is used as a generator of electric power. An electronic controller (11) is in charge of controlling the operation of the Starter/Generator (9) stator and exciter windings.

30

The classical architecture of a turbine engine cooling circuit, is represented in Figure 2, wherein it can be observed that the Starter/Generator (9) is provided with its own cooling oil circuit including a oil-to-fuel heat exchanger (7), which is completely segregated from the turbine engine oil cooling circuit to avoid any potential engine oil

contamination in case of generator failure. In current implementations, both, the engine and the Starter/Generator (9) cooling systems are typically implemented by oil-to-fuel heat exchangers, eventually aided by additional oil-to-air heat exchangers that use external air to cool down the oil.

5

Figure 4 shows a main oil-to-fuel heat exchanger (1) connected with an engine oil circuit (2) and with a fuel circuit (3). The turbine engine oil circuit (2) conducts lubricating oil towards an oil reservoir (4) of a turbine engine. In turn, the fuel circuit (3) extends from a fuel tank (5) to the combustion chamber (6) for conducting fuel from a fuel tank (5) to a turbine engine combustion chamber (6).

10

At the oil-to-fuel heat exchanger (1), the lubricating oil for the turbine engine is cooled down by transferring heat from the engine oil, to the much cooler fuel pumped from the fuel tank (5). The fuel is therefore heated at the oil-to-fuel heat exchanger (1), and from there it is injected to a combustion chamber (6) of the turbine engine.

15

The system further comprises a Starter-Generator (S/G) oil-to-fuel heat exchanger (7), connected with a (S/G) oil circuit (8) and with the fuel circuit (3) for cooling the (S/G) oil.

20

According to the invention, an oil-to-oil heat exchanger (12) is connected with both the engine oil circuit (2) and with the Starter Generator oil circuit (8). During the turbine engine motoring, prior to the actual starting sequence, the heat rejected by the Starter Generator to the oil can be transferred to the engine oil as to warm-up the engine oil to reduce the subsequent starting drag torque.

25

The oil-to-oil heat exchanger (12) and the main oil-to-fuel heat exchanger (1) are connected in series, and in the embodiment of Figures 3 and 4, the oil-to-oil heat exchanger (12) is arranged upstream the oil-to-fuel heat exchanger (1).

30

The oil-to-oil heat exchanger (12), the main oil-to-fuel heat exchanger (1) and the Starter Generator oil-to-fuel heat exchanger (7), have respectively a primary circuit and a secondary circuit thermally coupled with each other.

5 The primary circuits of the oil-to-oil and the main oil-to-fuel heat exchangers (12,1) are connected in series at the engine oil circuit (2). The secondary circuits of the oil-to-oil and the Starter Generator heat exchangers (12,7) are connected in series at the Starter Generator oil circuit (8), and the secondary circuit of the main oil-to-fuel heat exchanger (1) and the main circuit of the Starter Generator oil heat exchanger (7) are connected with the fuel circuit (3).

10 A first bypass line (15) is connected in parallel with the primary circuit of the main oil-to-fuel heat exchanger (1), and a second bypass line (16) is connected in parallel with the primary circuit of the Starter Generator oil heat exchanger (7). In addition, another bypass line (13) is connected in parallel with the secondary circuit of the Starter Generator oil-to-fuel heat exchanger (7).

15 During the motoring operational mode shown in Figure 3, fuel does not flow through the oil-to-fuel heat exchanger since a dry cranking of the engine is performed (1).

20 After the motoring phase, when required engine oil temperature is reached, that is, during the normal operation of the turbine engine, the oil-to-oil heat exchanger (12) is bypassed and the system operates as shown in Figure 4. For that, a bypass conduit (13) is connectable with the oil-to-oil heat exchanger (12) and with the Starter Generator oil circuit (8), for bypassing the Starter Generator oil circuit (8) out of the oil-to-oil heat exchanger (12). A bypass valve (14) is connected at the bypass conduit (13), so that this valve would open and close depending on the engine oil temperature, which is monitored by the engine electronic controller.

30 Alternatively, the engine electronic controller (not shown) is operatively associated with the bypass valve (14) for opening and closing the same, such as the electronic controller is adapted to close the bypass valve during an engine motoring mode, and to open the bypass valve while the turbine engine is running normally, as to prevent turbine engine overheating. That is, the valve will be closed during the motoring operational mode in order to put in contact the oil circuits from the Starter

Generator and the engine. On the contrary, the valve will be opened when engine has been successfully started and the engine is running..

5 Preferably, the Starter Generator electronic controller (11) is programmed to increase the excitation current of the Starter/Generator (9) during the motoring phase in order to maximize the heat rejected to the oil and increase the oil temperature as much as possible, or reduce motoring time.

10 Additionally, both the engine electronic controller and the Starter Generator controller are adapted to operate the system in a motoring mode and in a normal operation mode. In turn, during the motoring mode, the electronic controller is adapted to operate in two alternatives modes, namely:

15 - Fast mode represented in Figure 5: motoring time is minimized. Engine Motoring speed is rapidly increased up to the maximum allowable, and later on maintained until the correct temperature allowing the actual starting sequence is reached

20 - Slow mode represented in Figure 6: motoring time is not a critical parameter, but operational impact on ground due to eventual engine fan turning is mitigated, or even fully avoided. Therefore, motoring speed is always below maximum allowable during the whole motoring phase. Engine warm-up speed could be reduced to the minimum allowable to perform aircraft ground operation during the motoring. This option allows reducing the criticality of the motoring time as it will not affect aircraft
25 operations and servicing.

The invention also refers to an aircraft comprising: a fuel tank, at least one turbine engine having a combustion chamber and a lubricating oil reservoir, an electric Starter Generator for starting the turbine engine and for generating electric power.
30 The turbine engine may consist of a main engine of the aircraft (mainly used for propulsion), and/or the turbine engine of the aircraft APU.

An additional advantage of the invention, is that it can be easily retrofitted in existing aircrafts that have an electrical Starter Generator machine mechanically

associated with the turbo-machine (either the main engines and/or APU); that is, the main components of the invention are already installed in the aircraft, except for the oil-to-oil heat exchanger (12) and bypass circuit (13, 14) with engine oil heating purpose.

5

Other preferred embodiments of the present invention are described in the appended dependent claims and the multiple combinations of those claims.

C L A I M S

1.- A turbine oil heating system comprising:
a turbine engine oil circuit for conducting lubricating oil to the turbine engine,
5 an electric Starter Generator oil circuit for conducting cooling oil from the electric Starter Generator,
characterized in that it further comprises,
an oil-to-oil heat exchanger connected with the engine oil circuit and
connectable with the electric Starter Generator oil circuit, for transferring heat from
10 the Starter Generator oil to the engine oil as to warm-up the engine oil during turbine engine motoring prior to actual starting sequence.

2. An oil to oil heat transfer system according to claim 1, which encompasses
any device and or technology capable of transferring heat between the two oil
15 circuits.

3.- A turbine oil heating system according to claim 1 further comprising:
a fuel circuit for conducting fuel to a turbine engine combustion chamber, and
an electric Starter Generator oil-to-fuel heat exchanger connected with the
20 Starter Generator oil circuit and with the fuel circuit for cooling the Starter Generator oil.

4.- A turbine oil heating system according to claim 1 or 2, further comprising a
main oil-to-fuel heat exchanger connected with the engine oil circuit and with the fuel
25 circuit for cooling the engine oil.

5.- A turbine oil heating system according to any of the preceding claims further
comprising a bypass conduit connectable with the oil-to-oil heat exchanger, and with
the Starter Generator oil circuit for bypassing the Starter Generator oil circuit out of
30 the oil-to-oil heat exchanger.

6.- A turbine oil heating system according to claim 4 further comprising a bypass
valve connected at the bypass conduit, wherein the valve is adapted as to open and
close depending on the engine oil temperature.

7.- A turbine oil heating system according to claim 4 further comprising a bypass valve connected at the bypass conduit, and further comprising an electronic controller operatively associated with the bypass valve for opening and closing the same, and wherein the electronic controller is adapted to close the bypass valve during an engine motoring mode, and to open the bypass valve while the turbine engine is running normally.

8.- A turbine oil heating system according to any of the claims 2 to 5, wherein the oil-to-oil heat exchanger and the main oil-to-fuel heat exchanger are connected in series.

9.- A turbine oil heating system according to any of the claims 2 to 6, wherein the oil-to-oil heat exchanger, the main oil-to-fuel heat exchanger and the Starter Generator oil-to-fuel heat exchanger, have respectively a primary circuit and a secondary circuit thermally coupled with each other, and wherein the primary circuits of the oil-to-oil and the main oil-to-fuel heat exchangers are connected in series at the engine oil circuit, and wherein the secondary circuits of the oil-to-oil and the starter heat exchangers are connected in series at the starter oil circuit, and wherein the secondary circuit of the main oil-to-fuel heat exchanger and the secondary circuit of the starter oil heat exchanger are connected with the fuel circuit.

10.- A turbine oil heating system according to any of the preceding claims, wherein the electronic controller is adapted to operate the system in a motoring mode and in a normal operation mode, and wherein in the motoring mode the fuel circuit bypasses the main oil-to-fuel heat exchanger and the starter oil-to-fuel heat exchanger.

11.- A turbine oil heating system according to claim 7, wherein the electronic controller is adapted to operate the system during the motoring phase either in a fast mode or in a slow mode, wherein in the fast mode the engine oil temperature target is reached faster than in the slow mode.

12.- A turbine oil heating system according to claim 11, wherein in the fast mode the engine motoring speed is first increased up to a maximum allowable, and after the

maximum speed has been reached it is maintained at a constant speed until the target temperature is reached.


5 13.- A turbine oil heating system according to claim 11, wherein in the slow mode the motoring speed is always below the maximum allowable.

10 14.- An aircraft comprising:
a fuel tank,
a turbine engine having a combustion chamber and an a lubricating oil reservoir,
an electric starter/generator for starting the turbine engine and for generating electric power, and
a turbine engine cooling system according to any of the preceding claims,
wherein the engine oil circuit is connected with the oil reservoir, and wherein the fuel circuit extends from the fuel tank to the combustion chamber.

15

15.- An aircraft according to claim 14 wherein the turbine engine is a main engine of the aircraft.

20 16.- An aircraft according to claim 14 further comprising an Auxiliary Power Unit, and wherein the turbine engine is the APU engine.

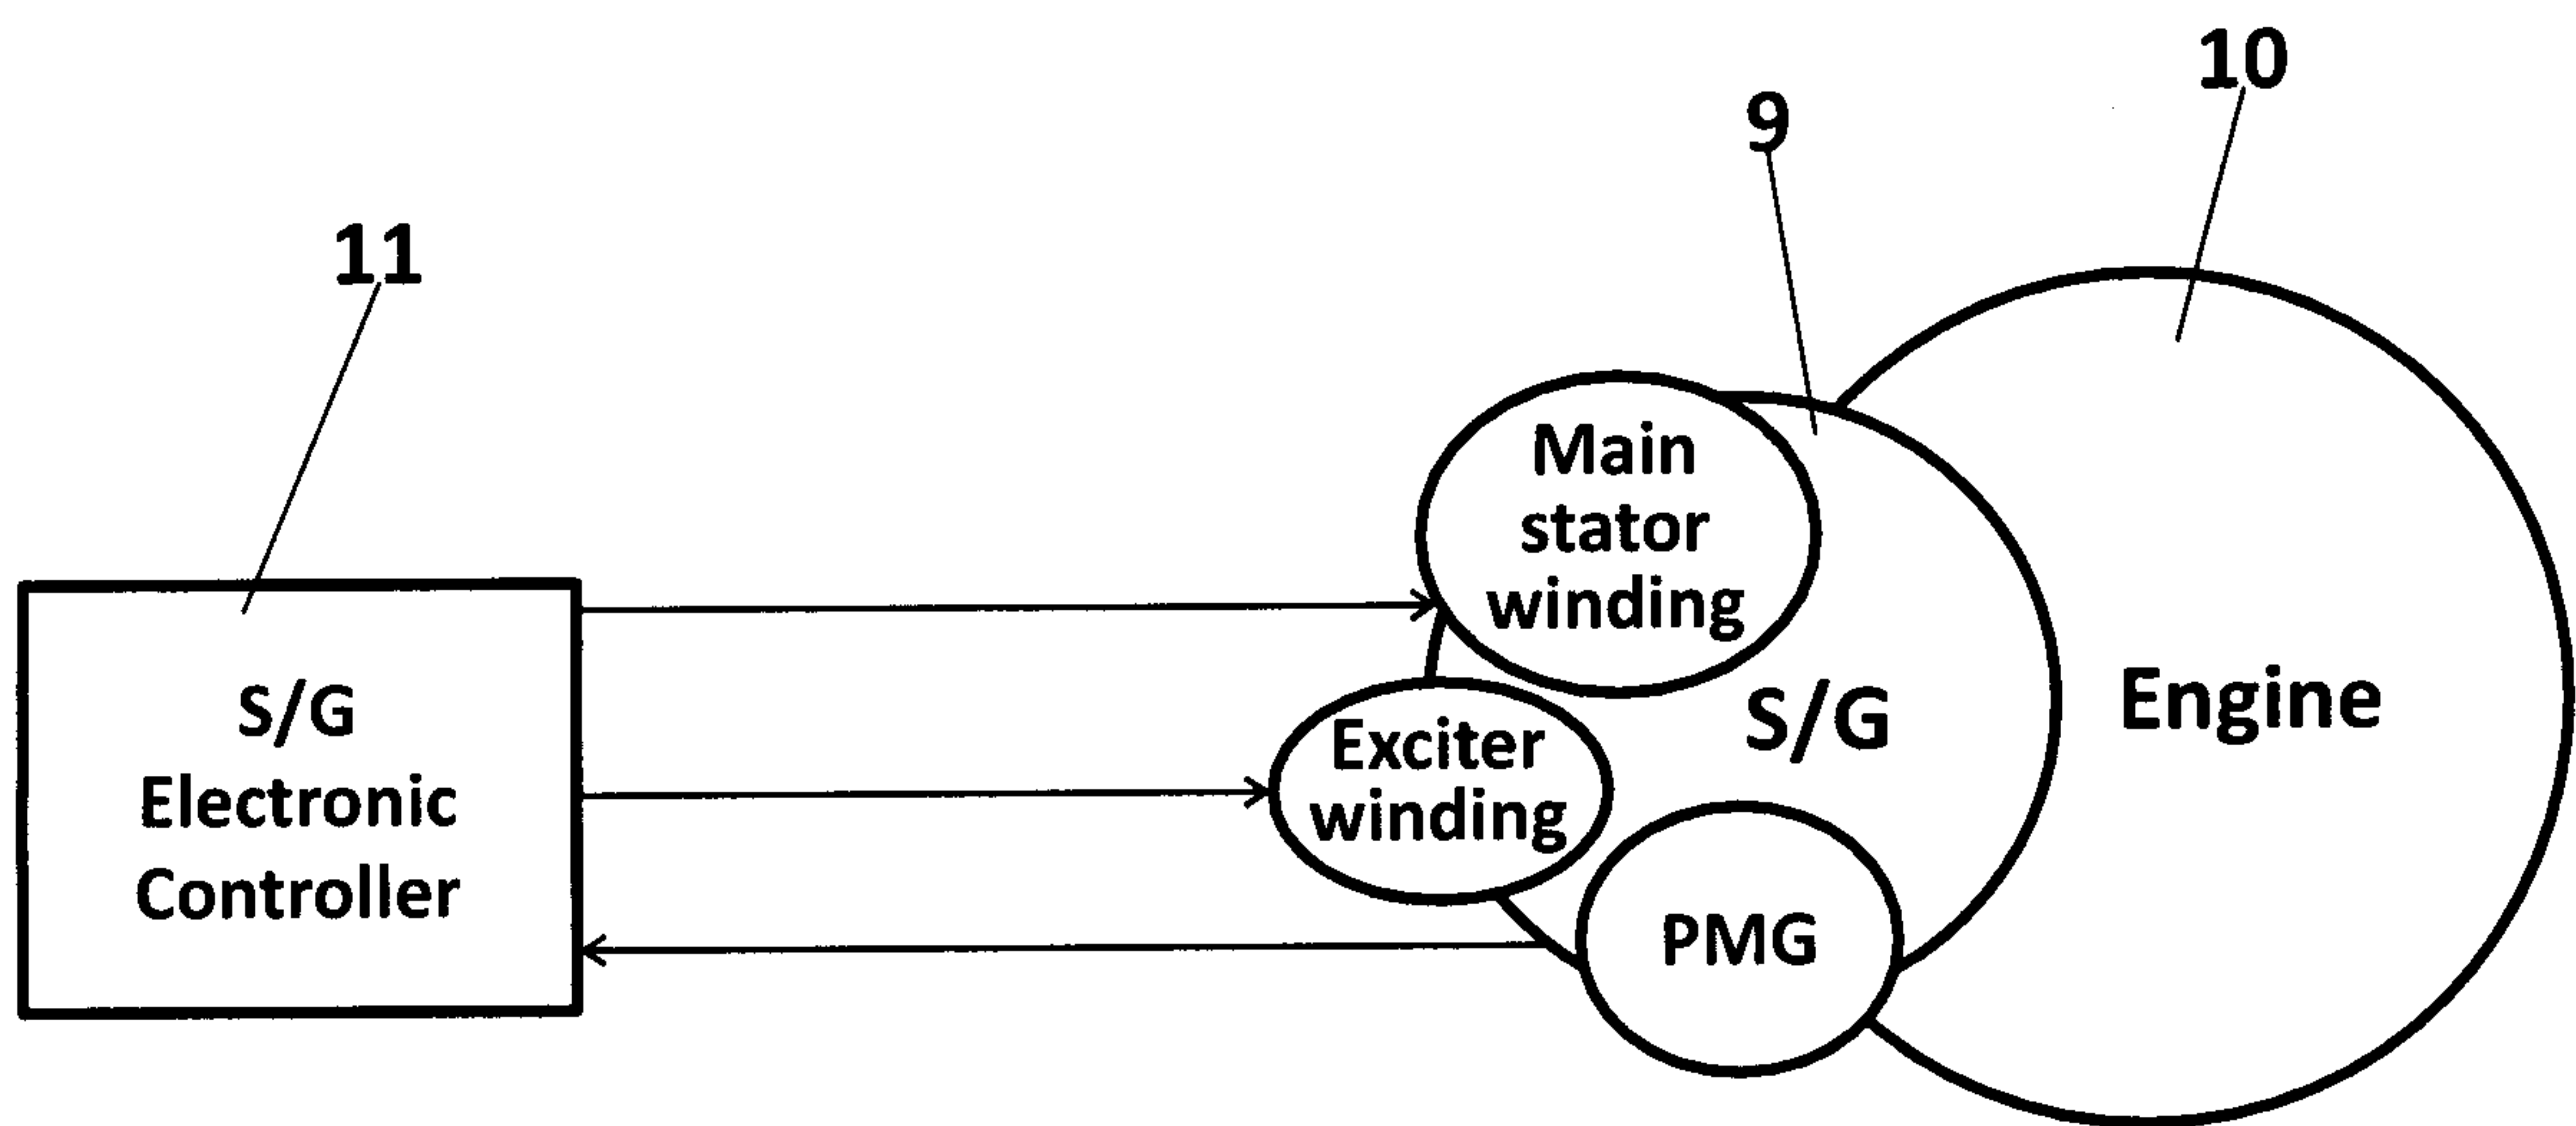**FIG. 1**

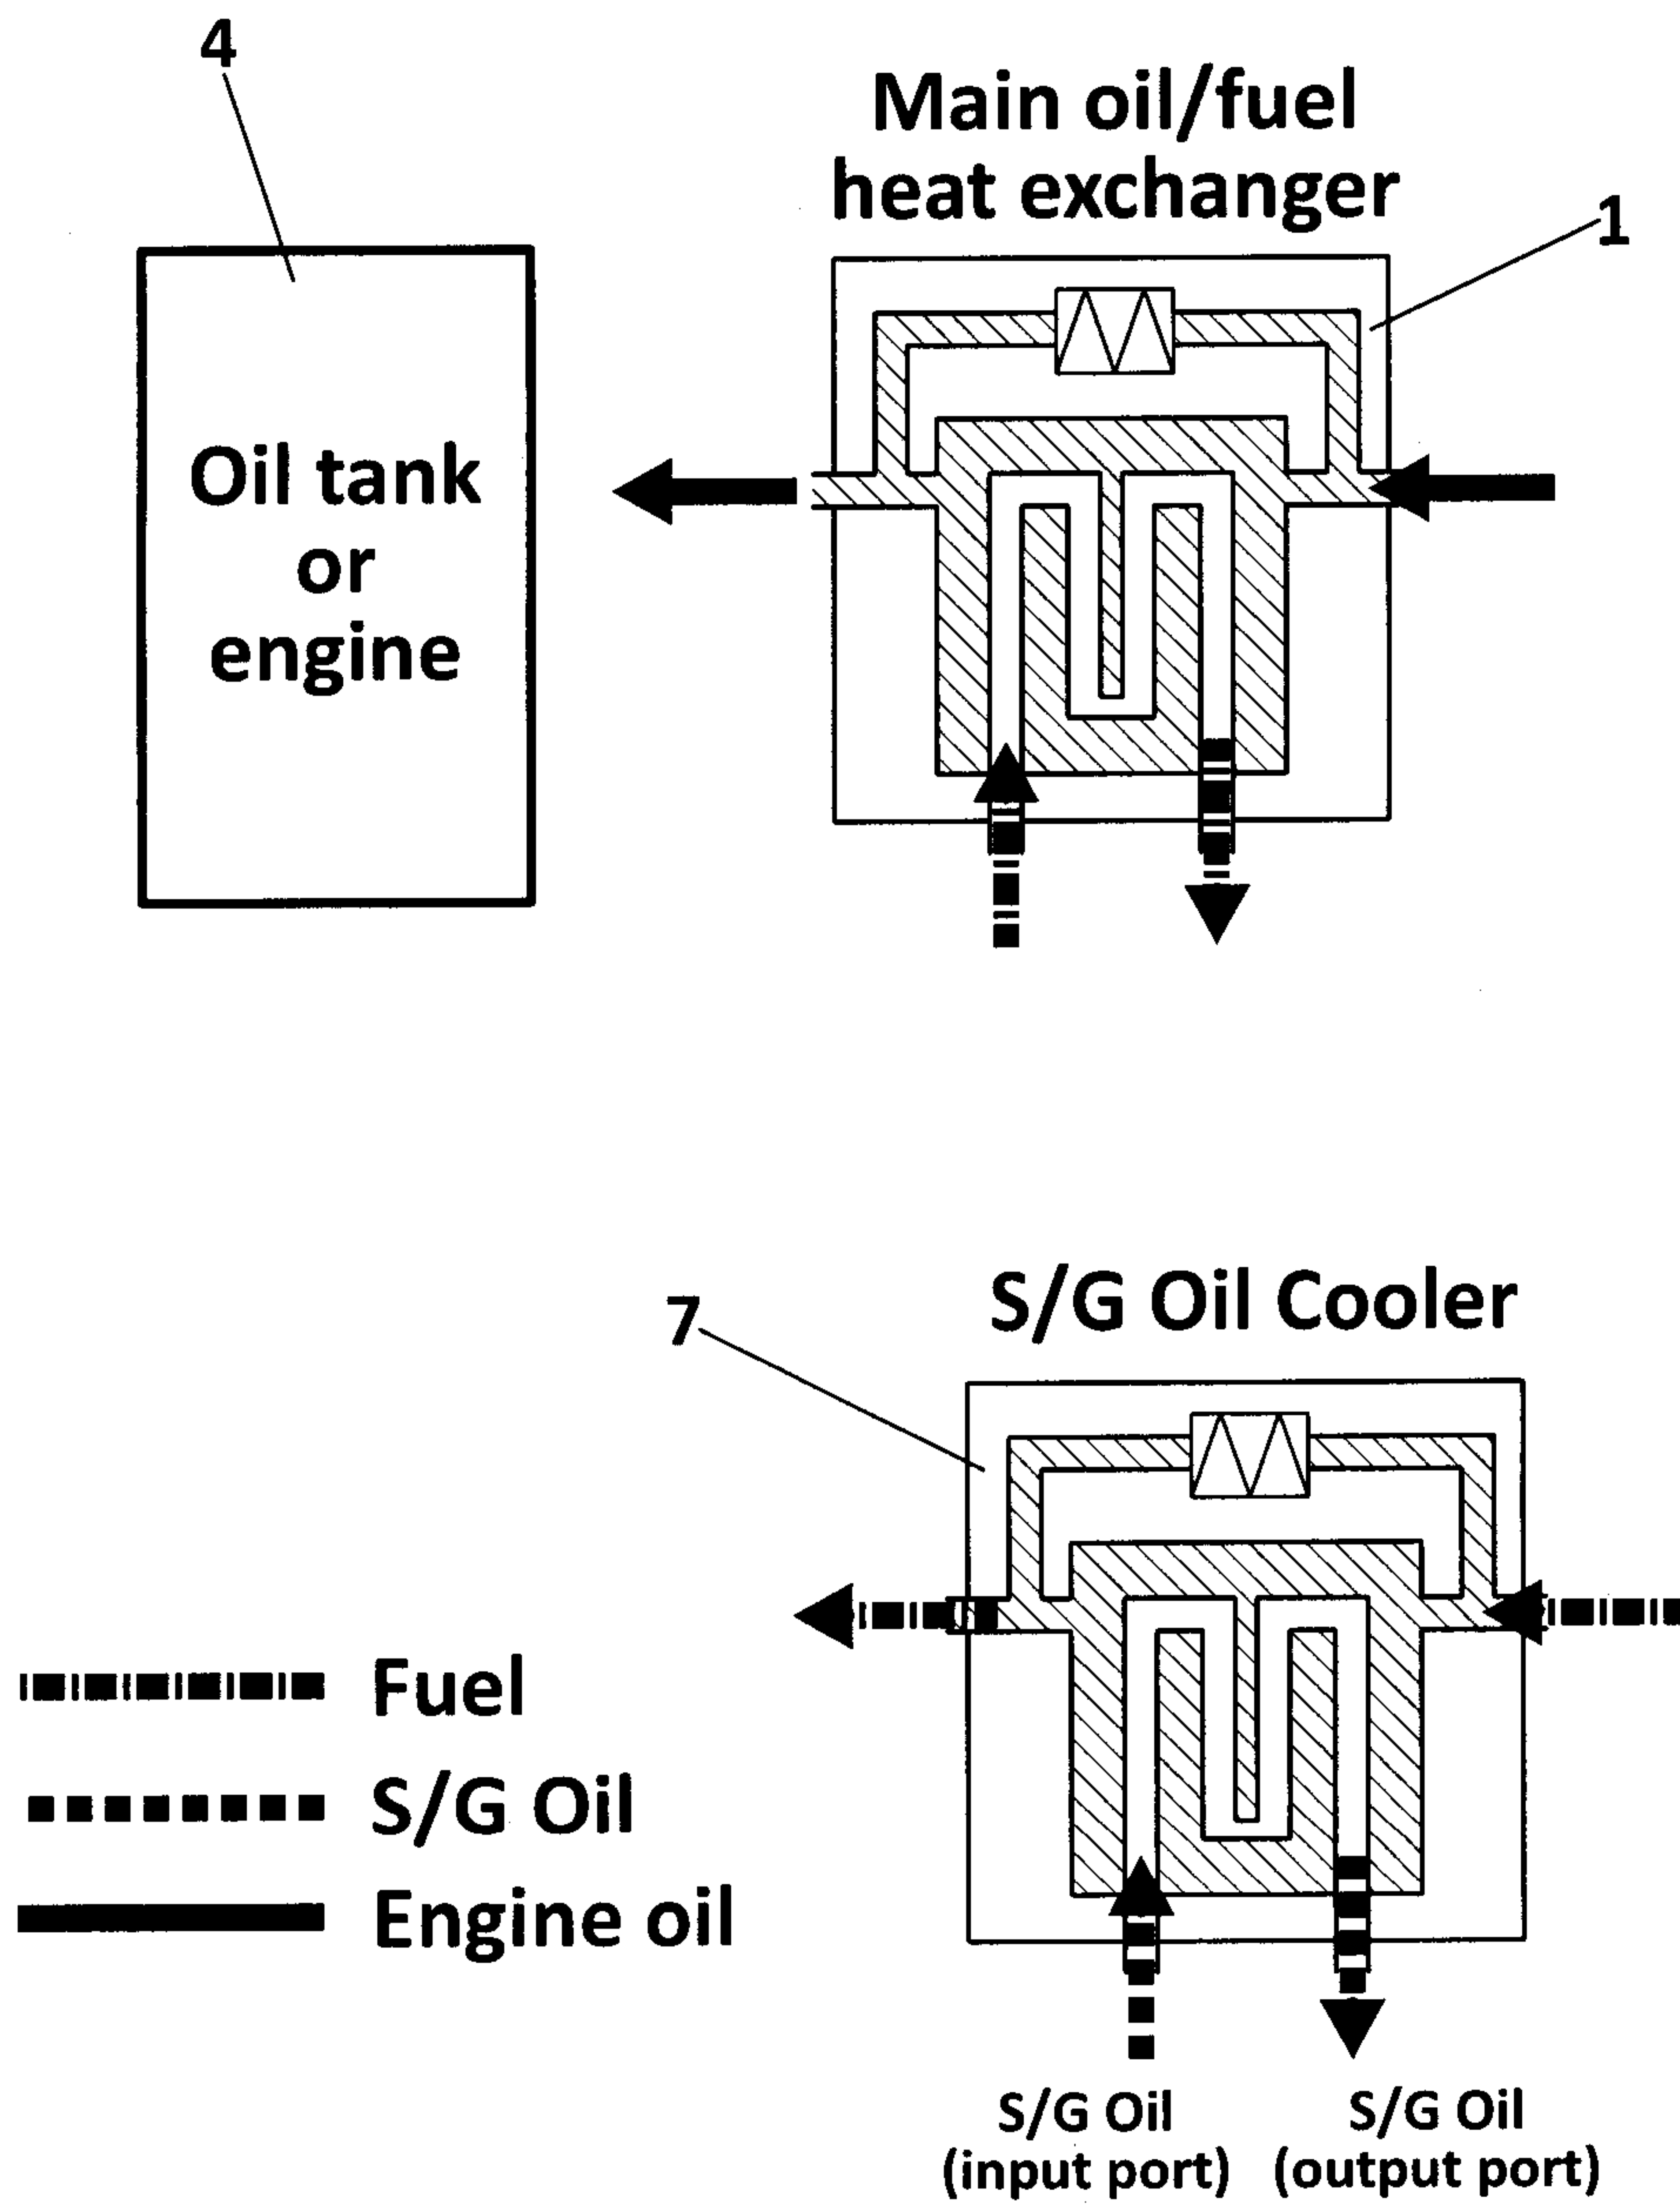


FIG. 2

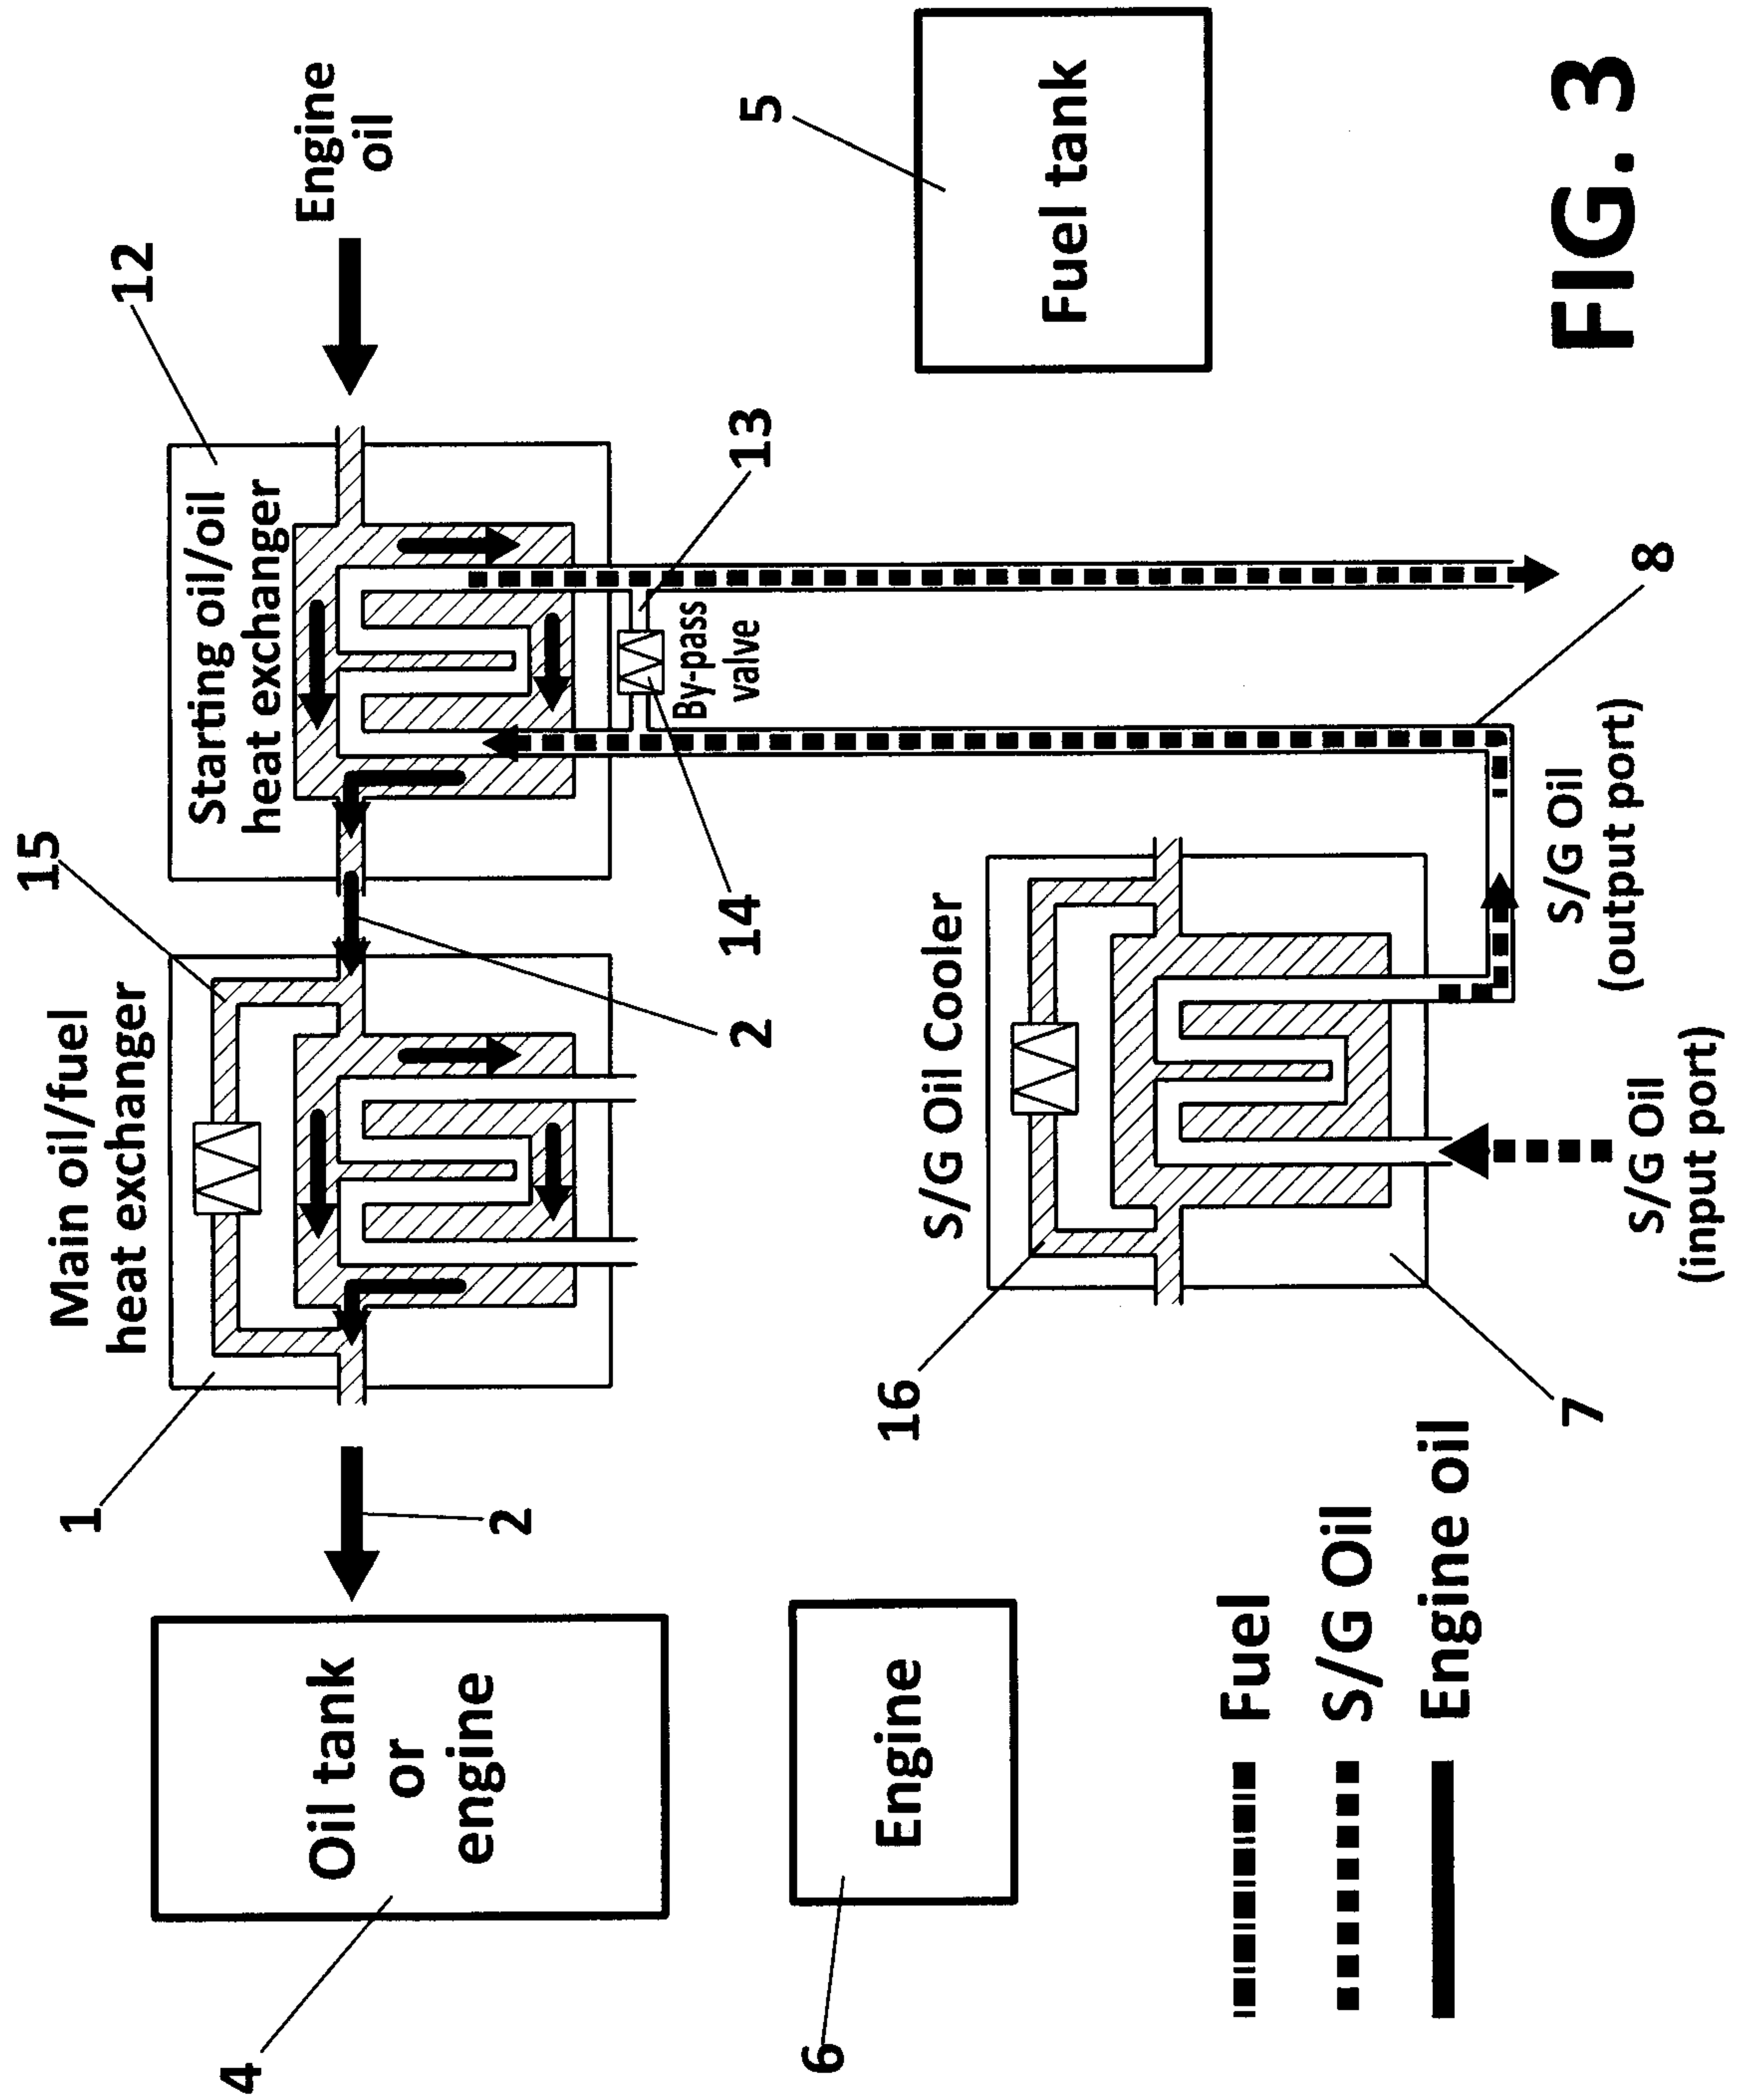


FIG. 3

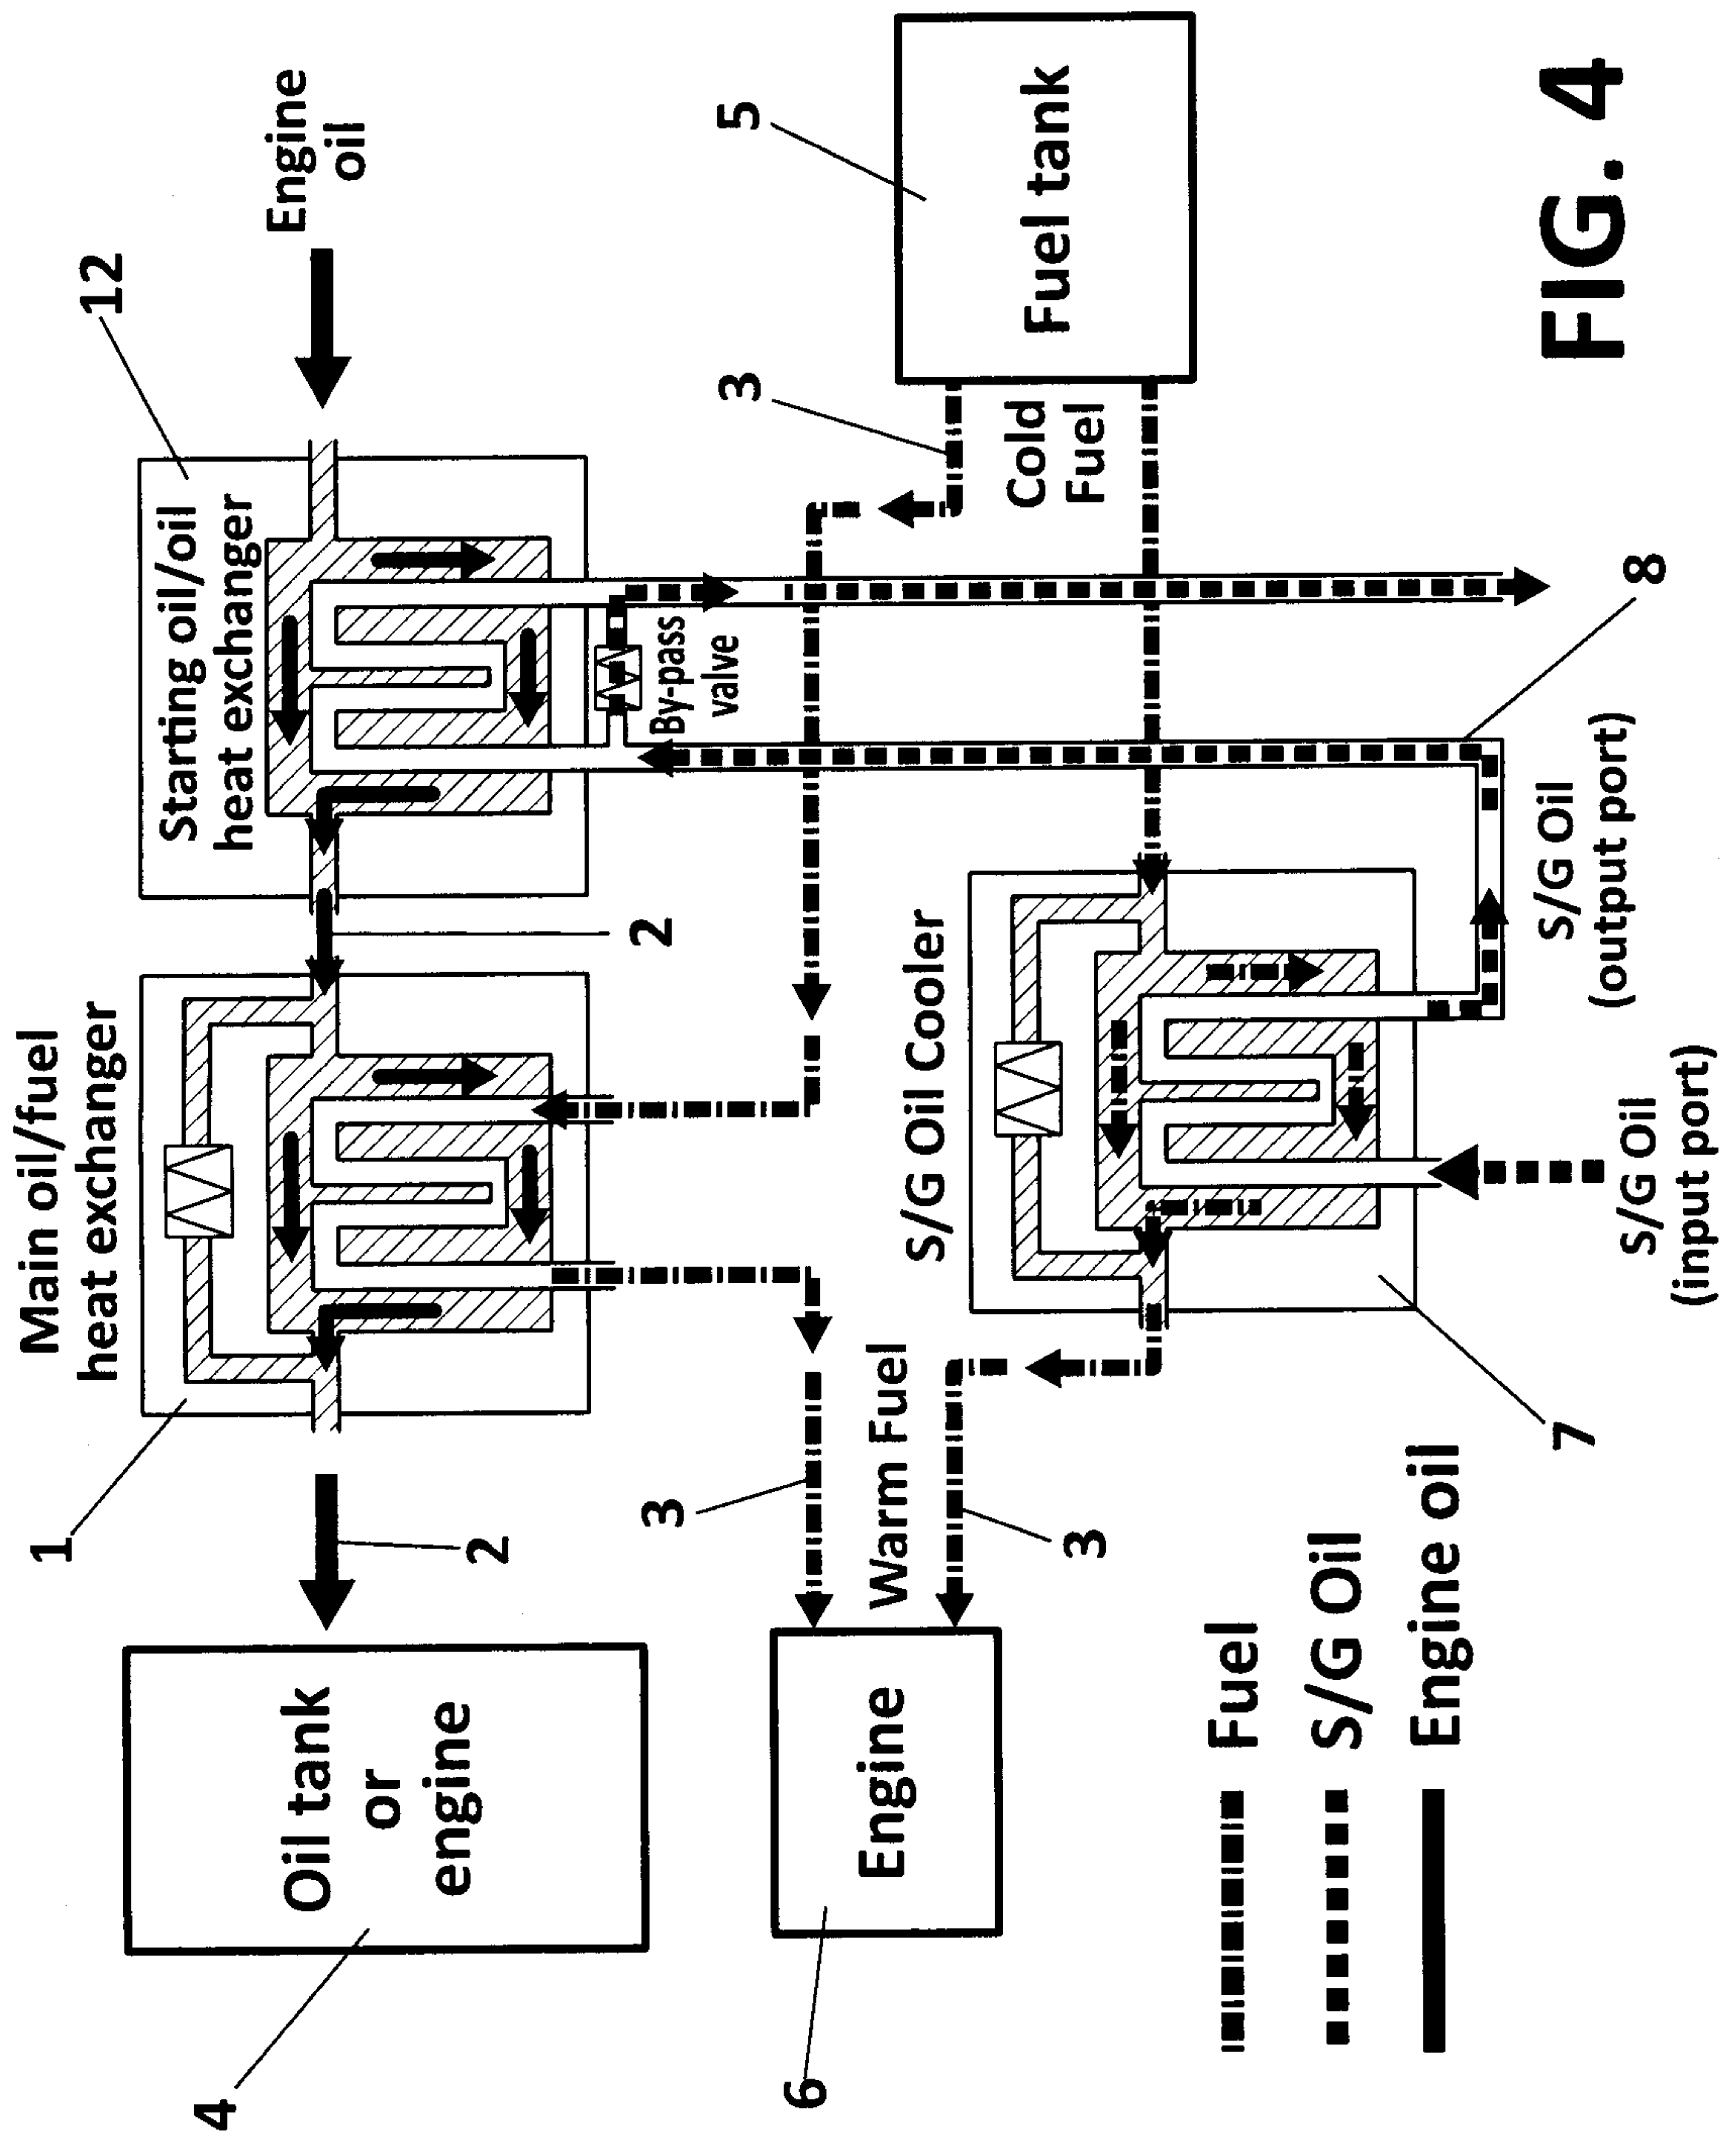


FIG. 4

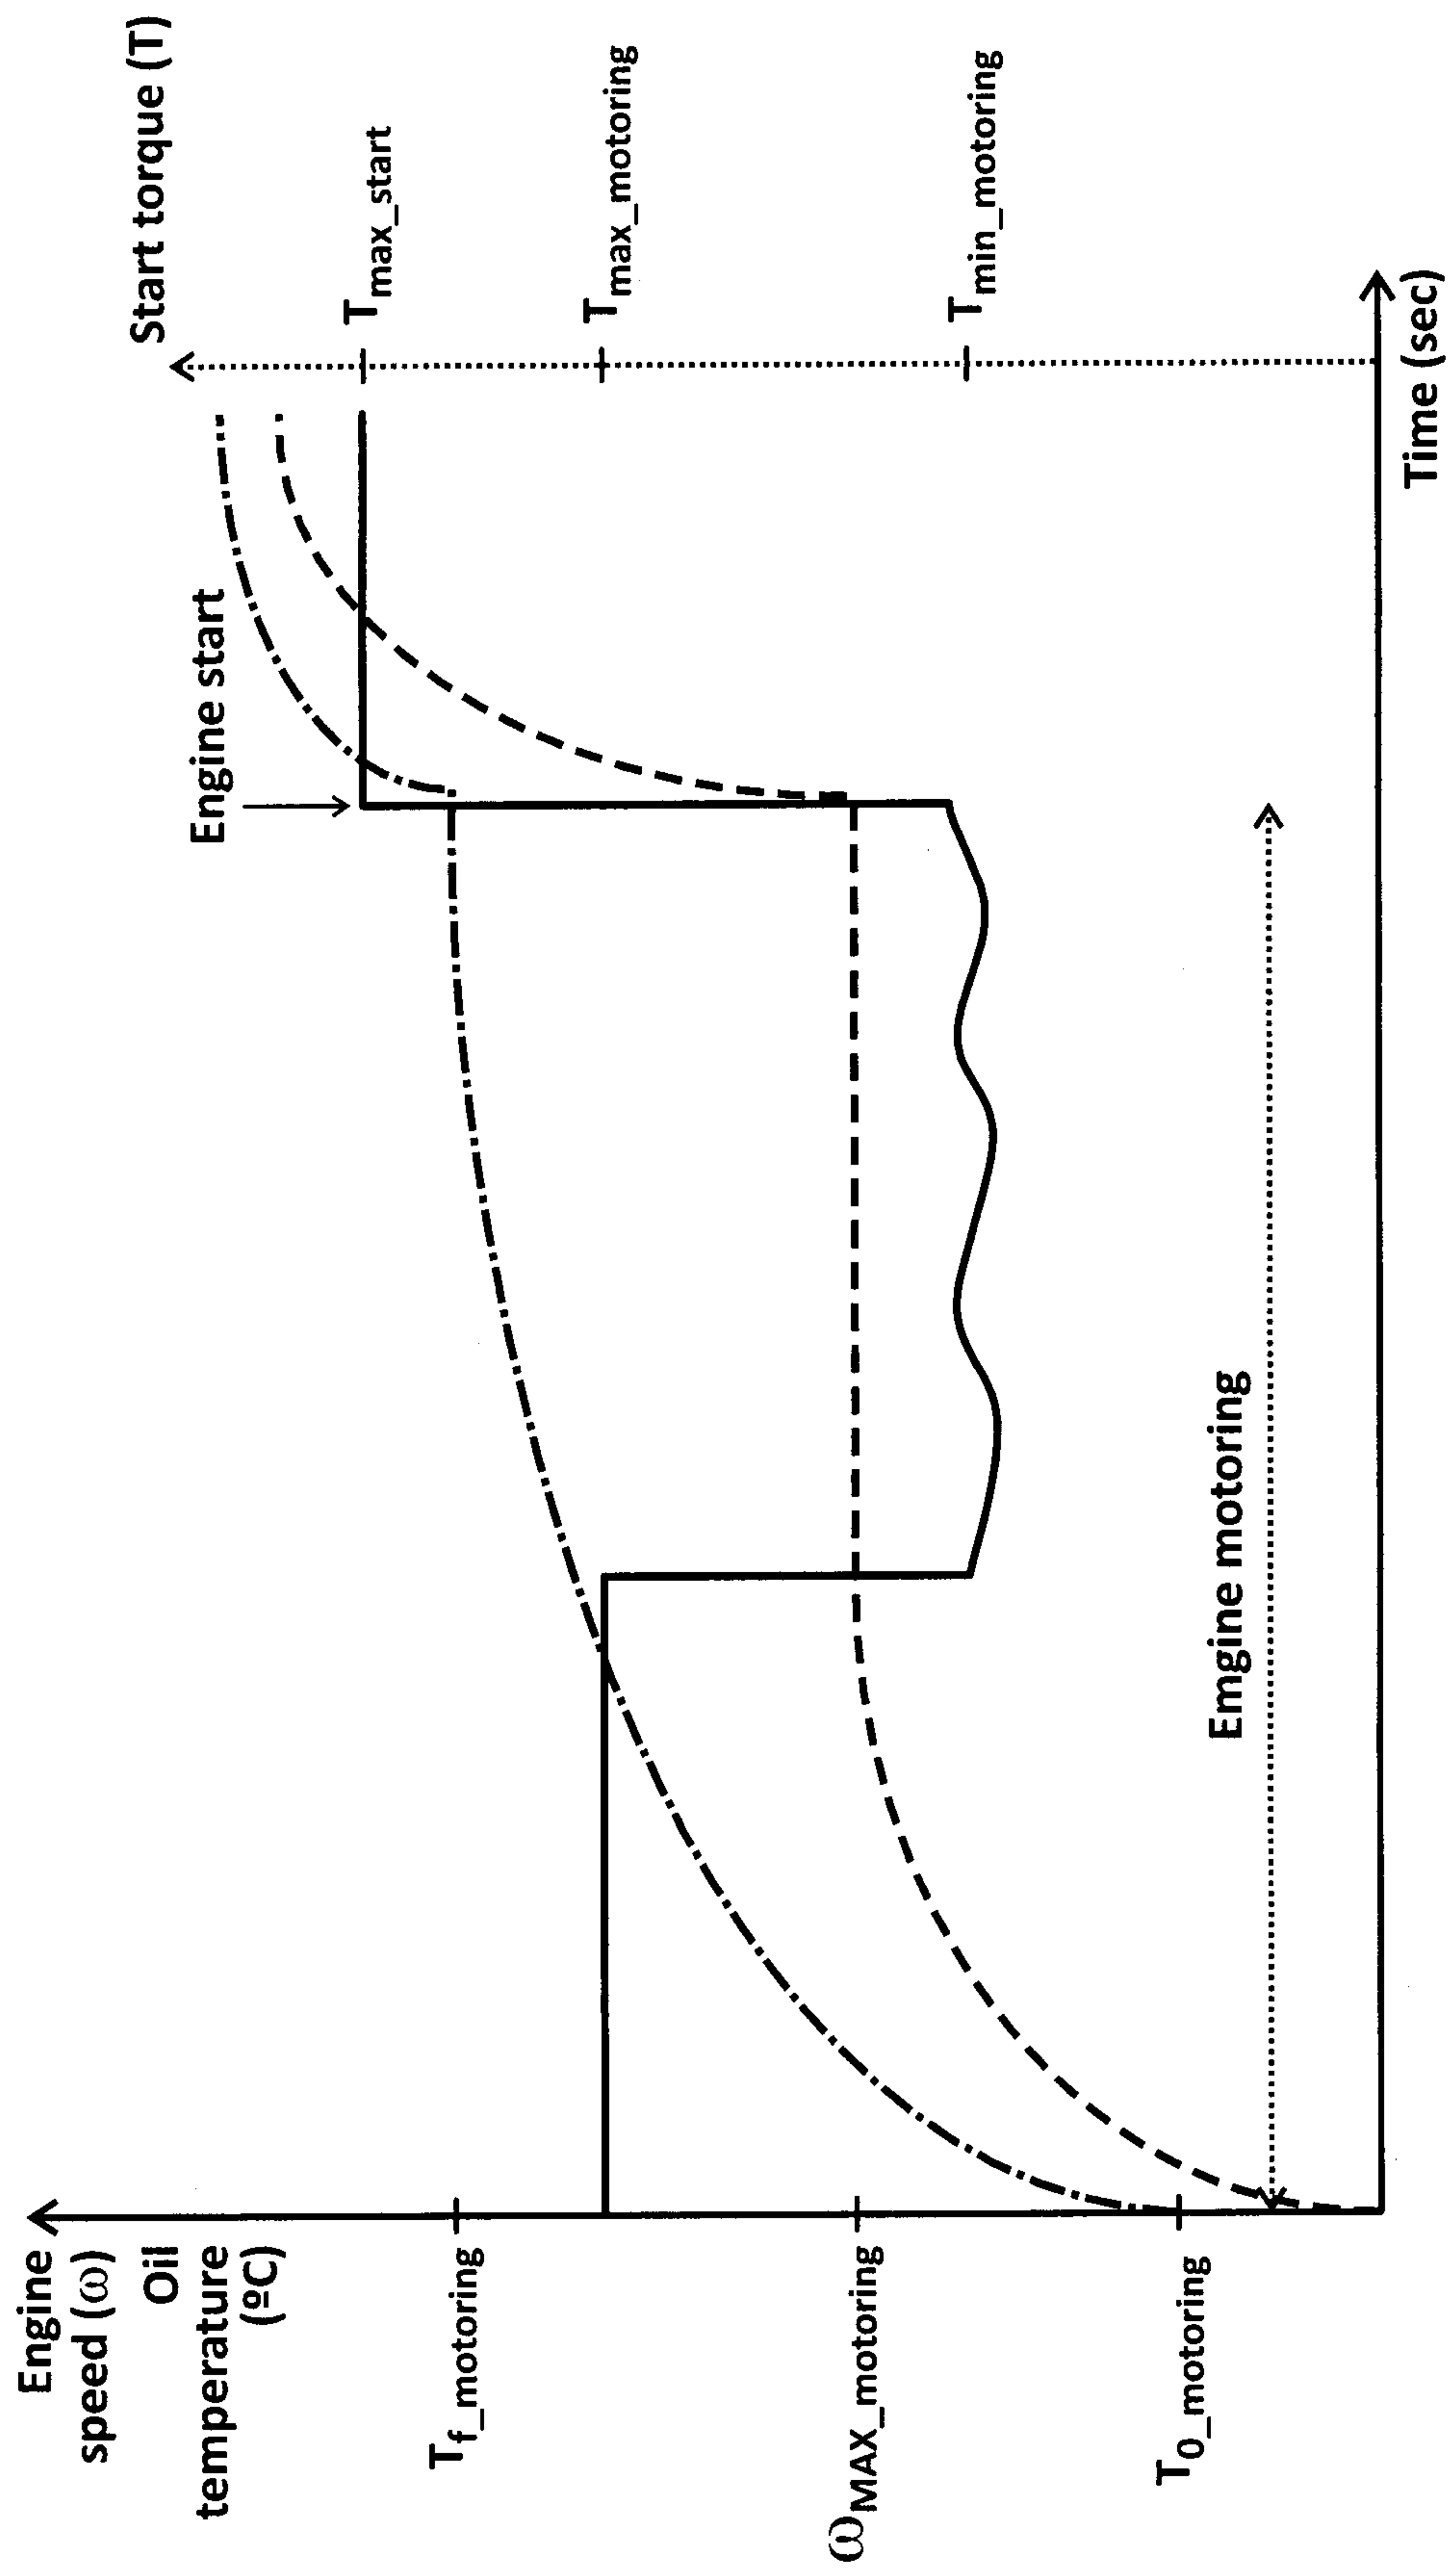


FIG. 5

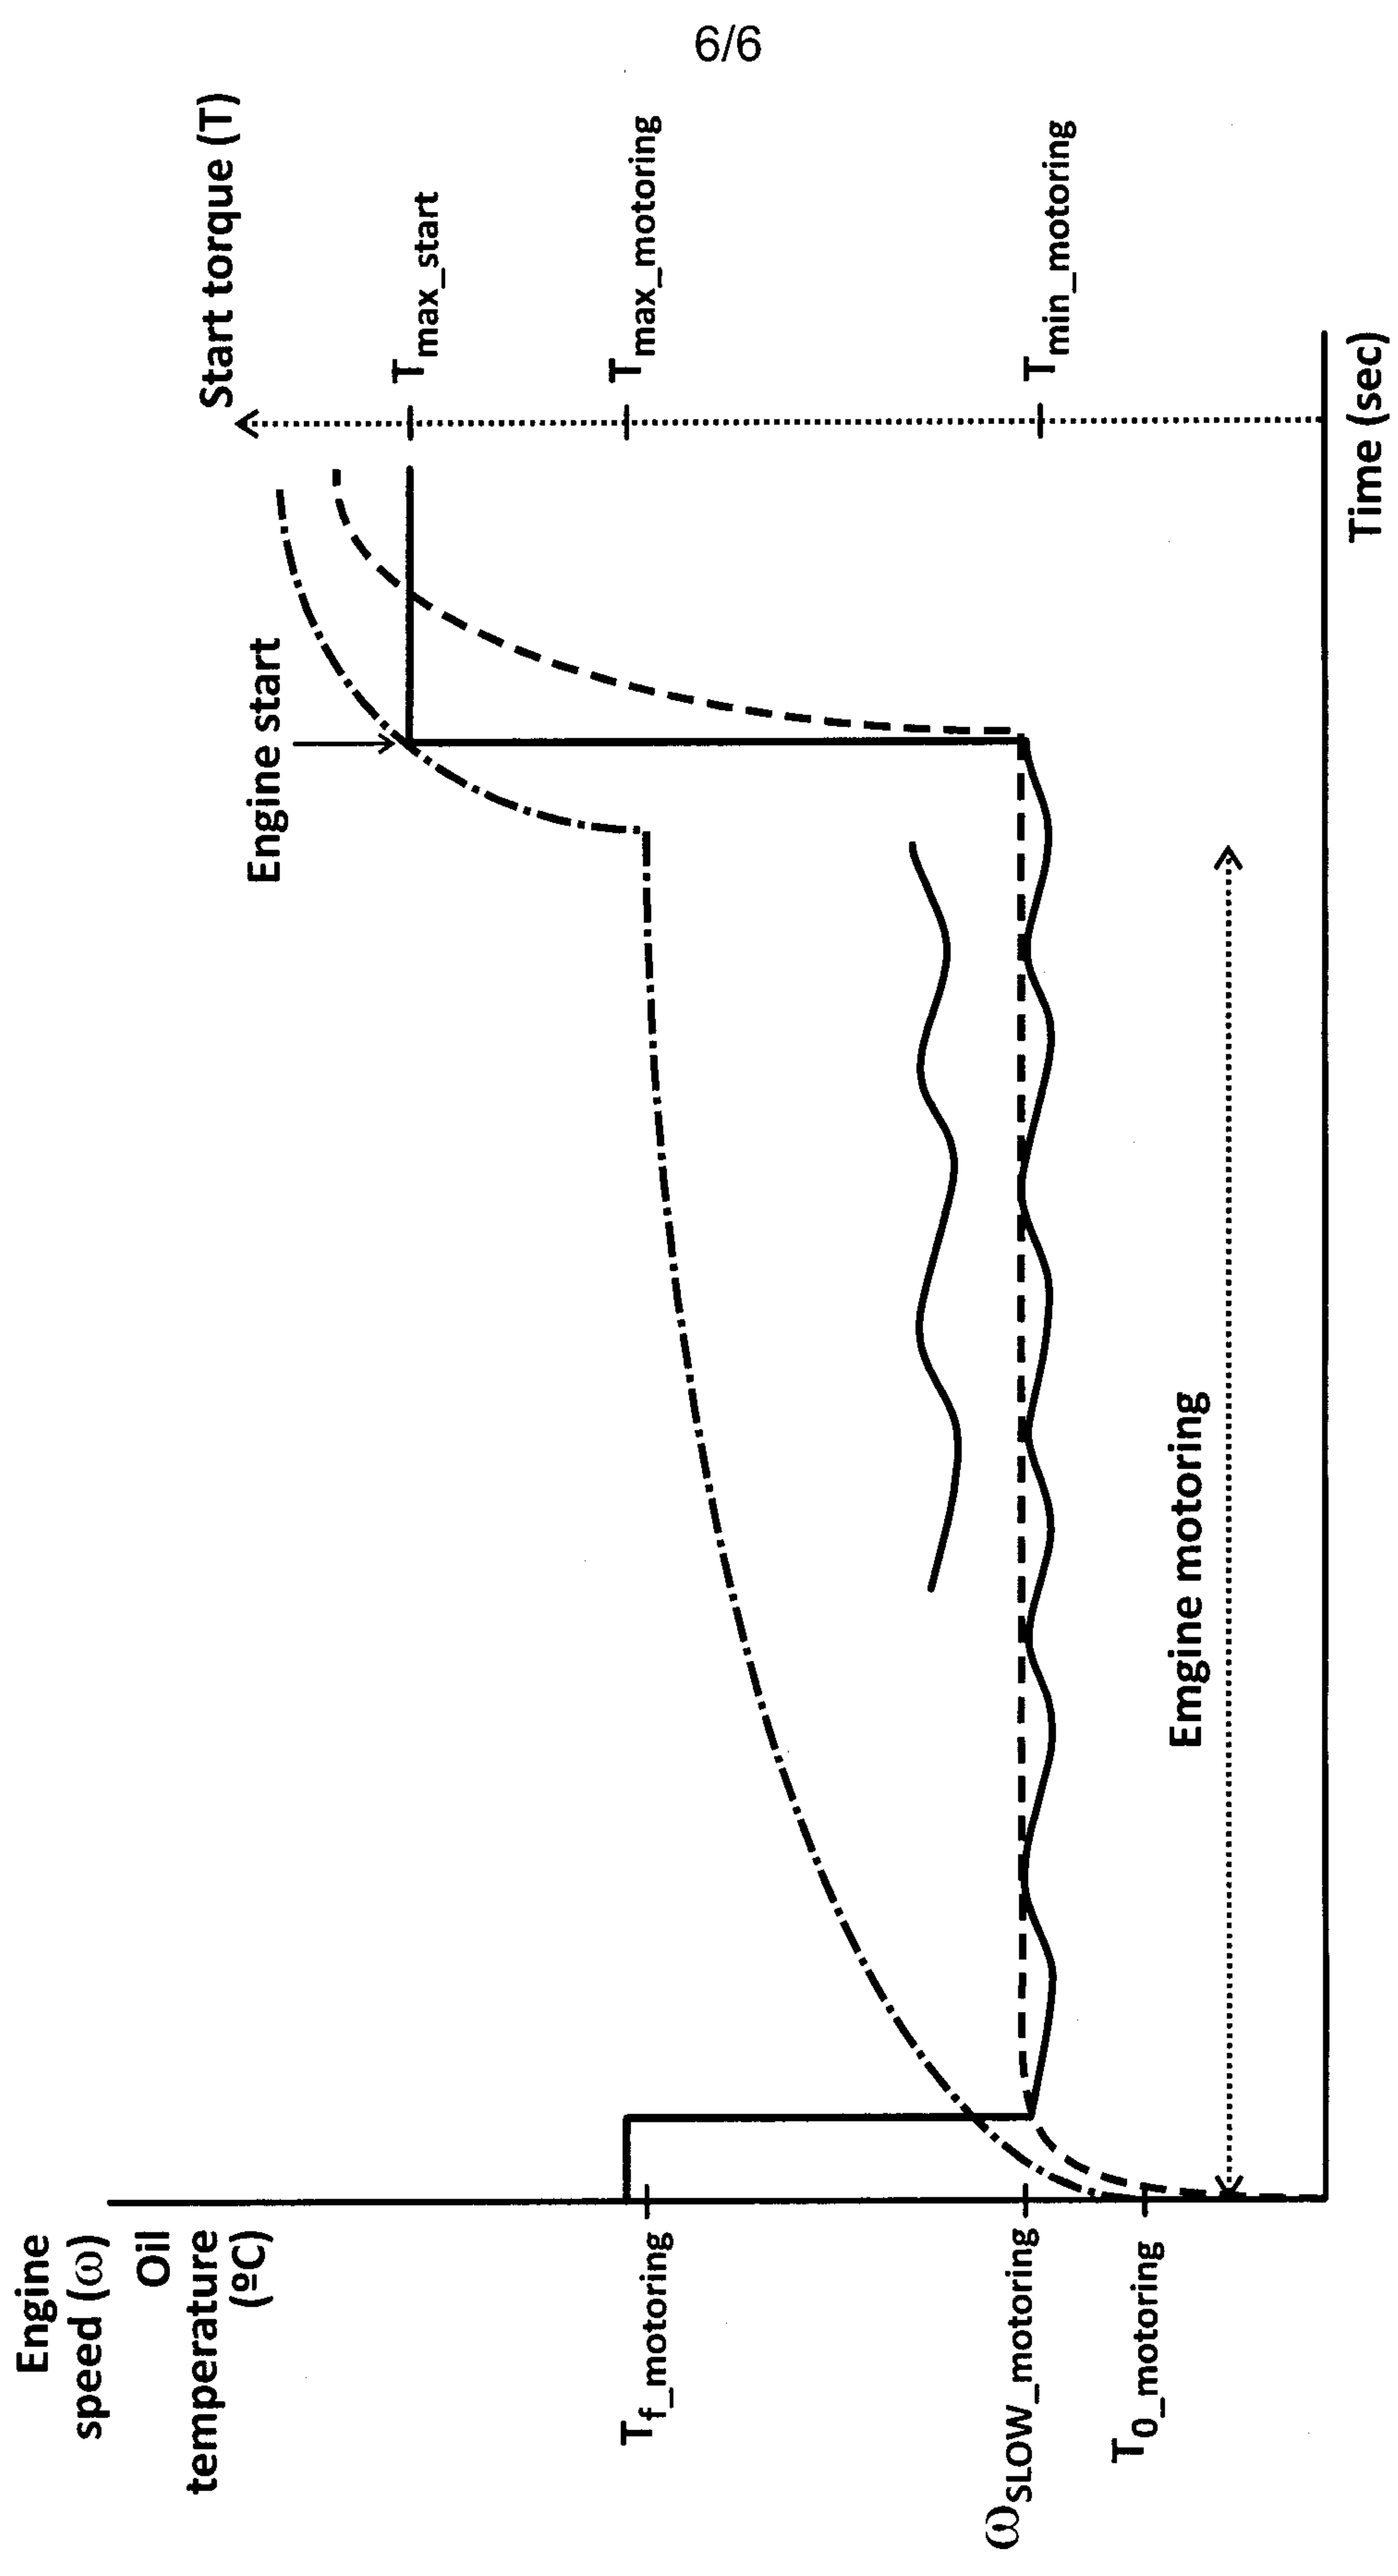


FIG. 6

