



(22) Date de dépôt/Filing Date: 2008/05/16  
(41) Mise à la disp. pub./Open to Public Insp.: 2008/11/27  
(45) Date de délivrance/Issue Date: 2014/09/23  
(62) Demande originale/Original Application: 2 684 130  
(30) Priorités/Priorities: 2007/05/18 (GB0709588.8);  
2007/05/25 (US60/940,118)


(51) Cl.Int./Int.Cl. *A47J 31/44* (2006.01),  
*A47J 31/24* (2006.01), *A47J 31/56* (2006.01)

(72) Inventeurs/Inventors:  
BURTON-WILCOCK, GARY VINCENT, GB;  
SHORT, DAVID PAUL, GB;  
NEWCOMBE, PAUL JOHN, GB

(73) Propriétaire/Owner:  
KRAFT FOODS R & D, INC., US

(74) Agent: OSLER, HOSKIN & HARCOURT LLP

(54) Titre : APPAREILS DE PREPARATION DES BOISSONS ET METHODES D'EXPLOITATION DESDITS APPAREILS  
(54) Title: BEVERAGE PREPARATION MACHINES AND METHODS FOR OPERATING BEVERAGE PREPARATION  
MACHINES

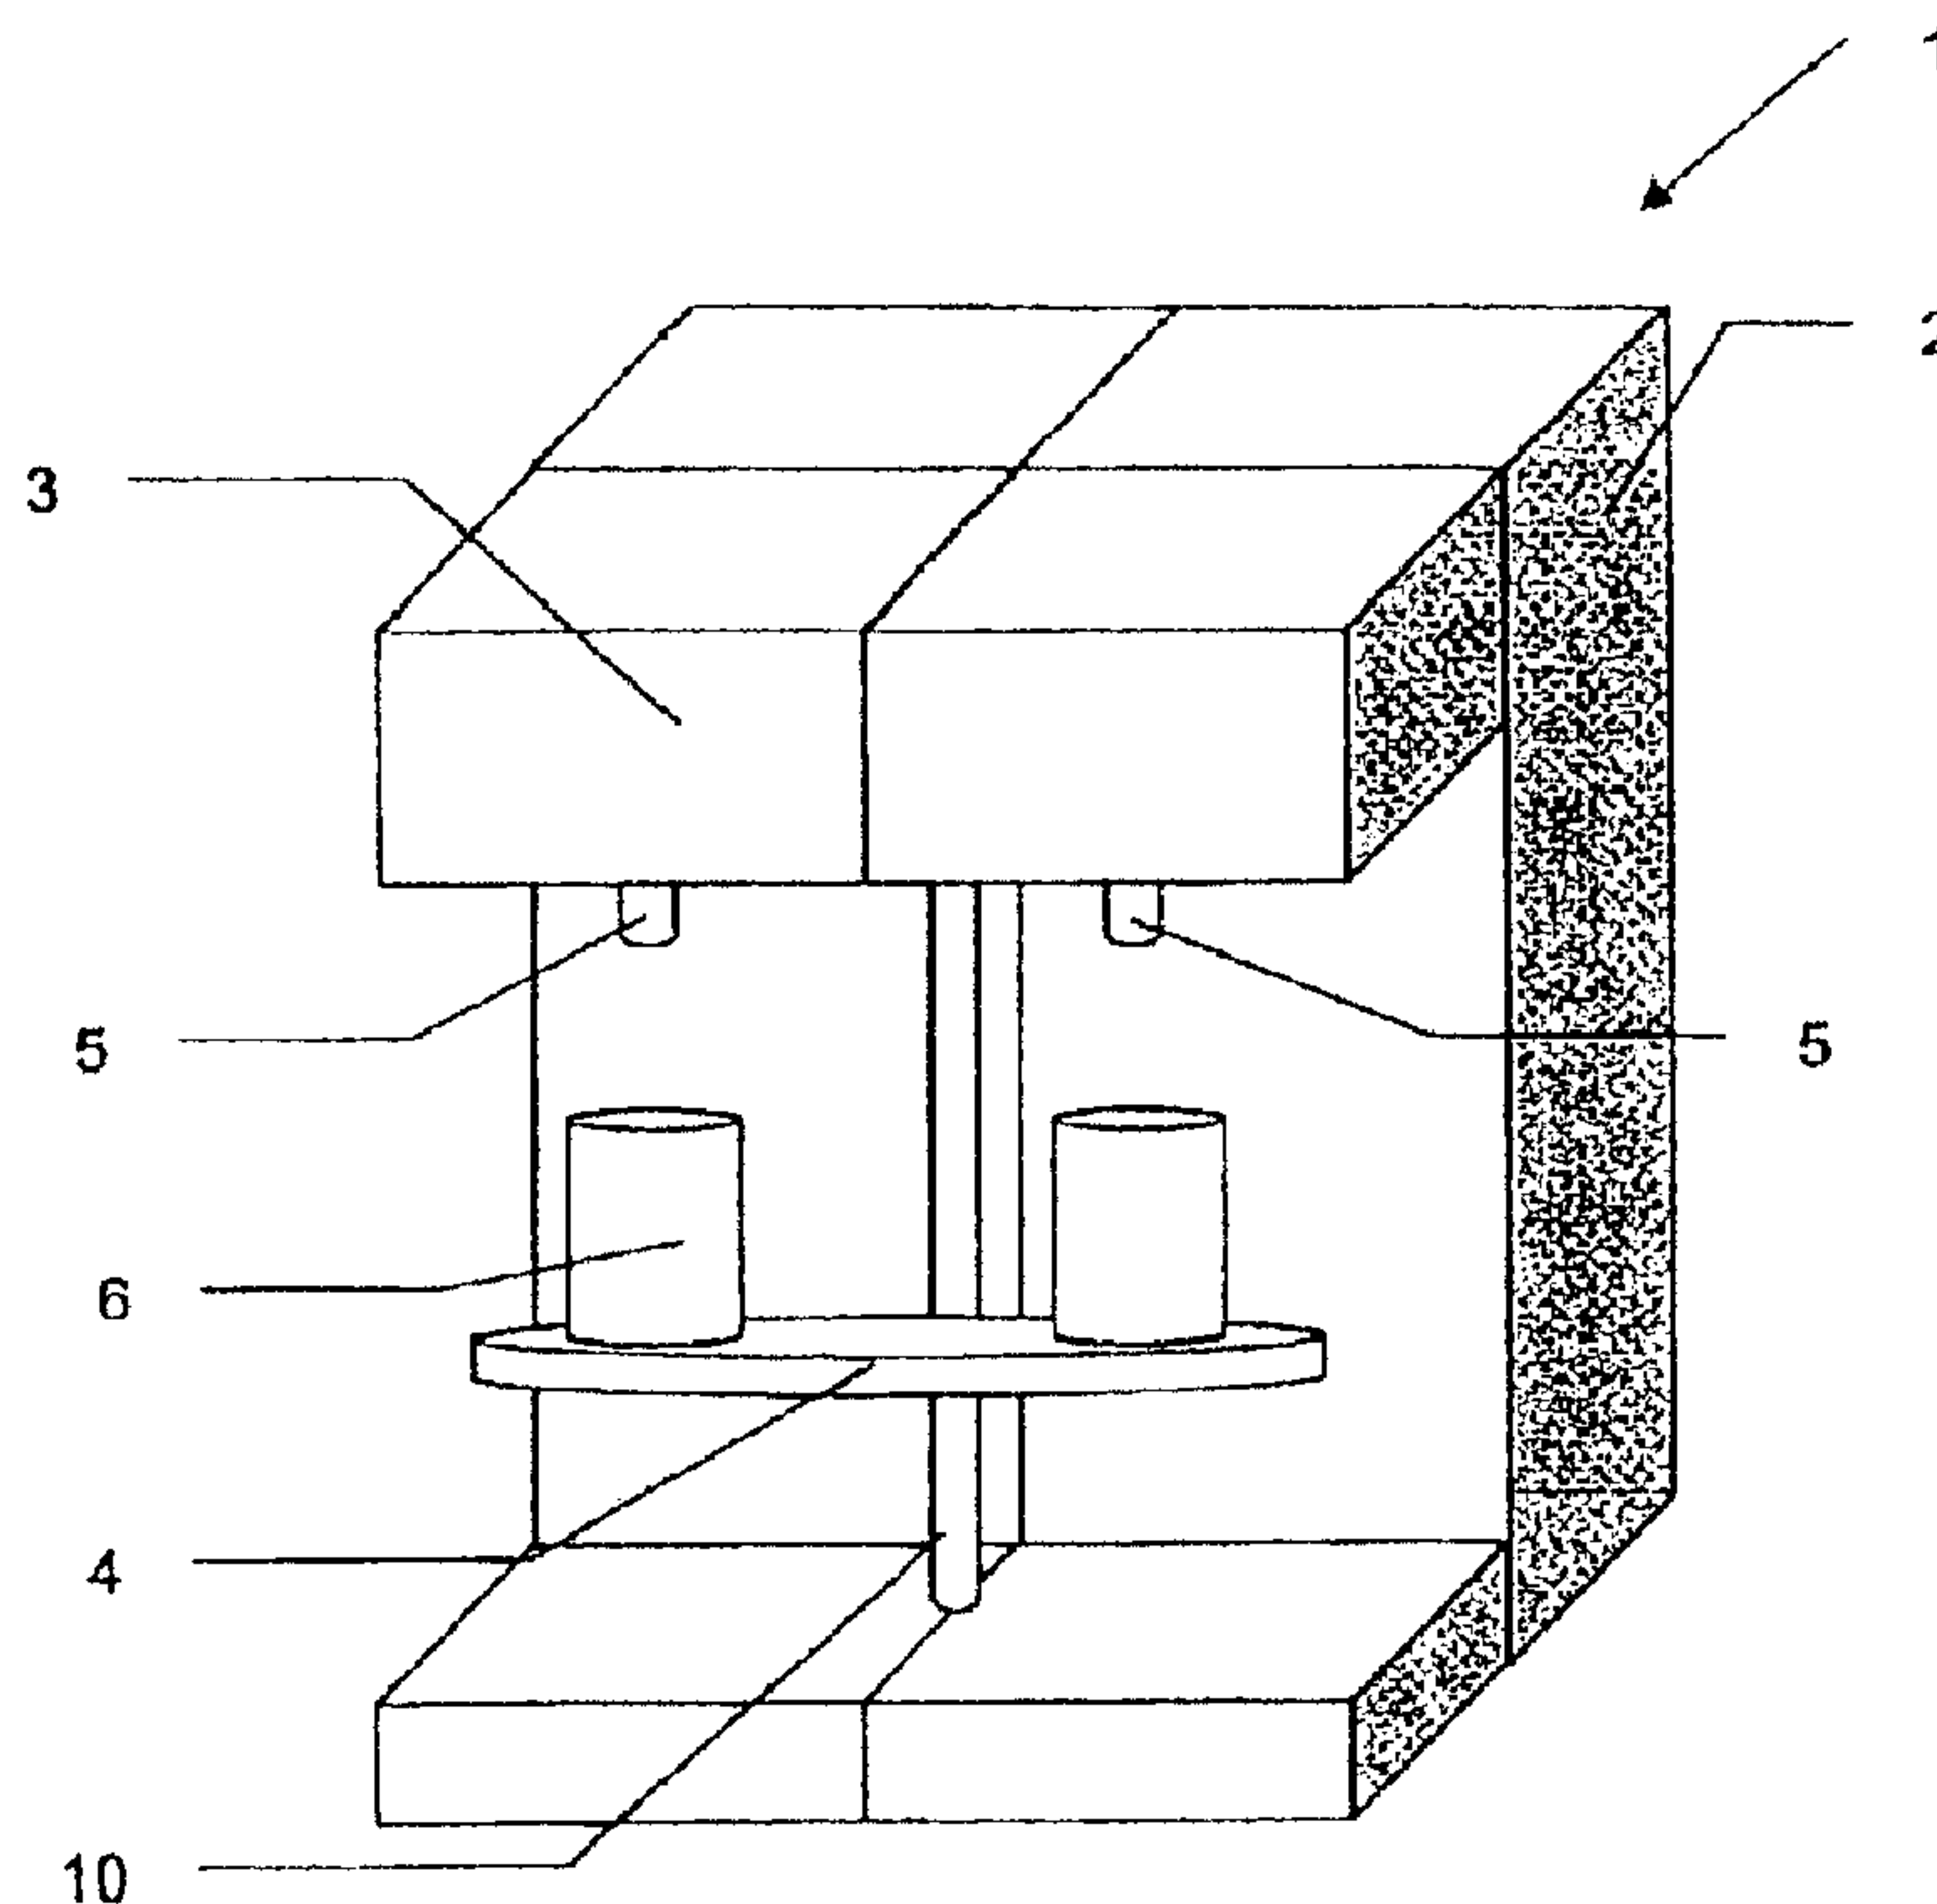

(57) Abrégé/Abstract:

A method of operating a beverage preparation machine, the beverage preparation machine being of the type comprising a first brewer and a second brewer, each of the first and second brewers comprising: a reservoir containing water; a delivery head for receiving in use a cartridge containing one or more beverage ingredients; a primary heater for heating the water contained in the reservoir; wherein the beverage preparation machine further comprises: at least one pump for pumping water from the reservoirs to the delivery heads; a controller for controlling energisation of the primary heater of each of the first brewer and the second brewer, the method of operation comprising operating the controller to prevent simultaneous energisation of the primary heaters of both the first brewer and the second brewer.

**ABSTRACT**

A method of operating a beverage preparation machine, the beverage preparation machine being of the type comprising a first brewer and a second brewer, each of the first and second brewers comprising: a reservoir containing water; a delivery head for receiving in use a cartridge containing one or more beverage ingredients; a primary heater for heating the water contained in the reservoir; wherein the beverage preparation machine further comprises: at least one pump for pumping water from the reservoirs to the delivery heads; a controller for controlling energisation of the primary heater of each of the first brewer and the second brewer, the method of operation comprising operating the controller to prevent simultaneous energisation of the primary heaters of both the first brewer and the second brewer.

Beverage preparation machines and methods for operating  
beverage preparation machines

This application is a division of Canadian 2,684,130 filed May 16, 2008.

The present invention relates to beverage preparation machines and methods of operating beverage preparation machines. In particular, it relates to improvements in heating systems and the power management of such systems.

Beverage preparation machines such as coffee or tea brewing machines are well known. It is known to provide beverage preparation machines which dispense individual servings of beverage directly into a receptacle such as a cup. Such machines may derive the beverage from a bulk supply of beverage ingredients or from packages of beverage ingredients such as pods, pads or cartridges. An example of one type of such packages is shown in EP1440903. In the following specification such packages will be referenced by the general term cartridges. However, the invention is not limited to use with one particular type of pod, pad or cartridge. The beverages are formed from brewing, mixing, dissolving or suspending the beverage ingredients in water. For example, for coffee beverages, heated water is passed through the cartridges to form the extracted solution.

It is known to provide machines with a reservoir in which to store water. The reservoir may be manually refillable or, alternatively, it is known for machines to be plumbed into a mains supply of water which allows for semi-automatic or automatic refilling of the reservoir.

It is also known to provide beverage preparation machines comprising first and second brewers coupled together within a single housing or installation.

A problem with beverage preparation machines is that high demand on the machine - that is the need to dispense a

- 2 -

number of beverages in quick succession - can lead to delays since the water in the reservoir must be heated to a particular temperature in order to allow for good quality beverages to be produced. One solution that has been  
5 suggested is to provide the machine with a more powerful heater. However, this solution can cause problems where the machine is to be used where there is a limited power supply available. In addition, limited power supply has been found to be a particular problem for beverage preparation machines  
10 comprising first and second brewers in a coupled arrangement.

It is therefore an object of the present invention to provide a beverage preparation machine and method which helps to overcome at least some of these problems.

15 Accordingly, the present invention provides a method of operating a beverage preparation machine, the beverage preparation machine being of the type comprising a brewer comprising:

- 20 a reservoir containing water;
- a delivery head for receiving in use a cartridge containing one or more beverage ingredients;
- a pump for pumping water from said reservoir to said delivery head;
- 25 a primary heater for heating the water contained in said reservoir;
- a secondary heater in between the reservoir and the delivery head;
- a controller for controlling energisation of the  
30 primary heater and the secondary heater; and

- 3 -

wherein the controller operates to prevent energisation of the primary heater simultaneous with energisation of the secondary heater.

In this embodiment the machine comprises a single  
5 brewer with primary and secondary heaters. The controller ensures that the primary and secondary heaters are not energised at the same time thereby the total energy requirement of the machine can be reduced. In this way it is possible to use a more powerful primary heater and secondary  
10 heater than would be the case if both heaters were required to be energised simultaneously.

Preferably the beverage preparation machine is operated to dispense a beverage during a dispense cycle from the brewer, wherein the controller operates to energise the  
15 primary heater during a portion of the dispense cycle when the pump of said brewer is inactive.

Preferably the dispense cycle comprises one or more pauses where water is not pumped to said delivery head and wherein the controller operates to energise the primary  
20 heater during said one or more pauses.

For example, the one or more pauses may be for steeping the one or more beverage ingredients of a pod or cartridge.

During a dispense cycle the primary and secondary heaters may be energised alternately. Alternatively during a  
25 dispense cycle the secondary heater may be always energised and the primary heater may be always de-energised.

Preferably the water in the reservoir is heated to a temperature of between 70 and 95 degrees Celsius.

More preferably the water in the reservoir is heated to  
30 a temperature of approximately 85 degrees Celsius.

- 4 -

Preferably the temperature of the water pumped to the delivery head is boosted by use of the secondary heater by between 0 and 30 degrees Celsius.

5 Preferably the temperature of the water pumped to the delivery head is boosted by use of the secondary heater such that the temperature of the water on reaching the delivery head is between 85 and 94 degrees Celsius.

The method may further comprise passing steam through the delivery head after dispensation of a beverage from the  
10 brewer.

The steam may be generated by the secondary heater.

The present invention also provides a beverage preparation machine comprising a brewer comprising:

- a reservoir for water;
- 15 a delivery head for receiving in use a cartridge containing one or more beverage ingredients;
- a pump for pumping water from said reservoir to said delivery head;
- a primary heater for heating water contained in said  
20 reservoir;
- a secondary heater in between the reservoir and the delivery head;
- a controller for controlling energisation of the primary heater and the secondary heater; and
- 25 wherein the controller is operable to prevent energisation of the primary heater simultaneous with energisation of the secondary heater.

Preferably the controller is operable to prevent energisation of the primary heater during pumping of water  
30 by the pump.

Preferably the primary heater is located in the reservoir.

- 5 -

Preferably the primary heater comprises an electrical power heating source.

Preferably the secondary heater is located in the flow path extending from the reservoir to the delivery head.

5        Preferably the secondary heater comprises an instantaneous heater.

In another aspect, the present invention further provides a method of operating a beverage preparation machine, the beverage preparation machine being of the type  
10        comprising a first brewer and a second brewer, each of the first and second brewers comprising:

          a reservoir containing water;  
          a delivery head for receiving in use a cartridge  
15        containing one or more beverage ingredients;  
          a primary heater for heating the water contained in said reservoir;

          wherein the beverage preparation machine further  
20        comprises:

          at least one pump for pumping water from said reservoirs to said delivery heads;

          a controller for controlling energisation of the primary heater of each of the first brewer and the second  
25        brewer,

          the method of operation comprising operating the controller to prevent simultaneous energisation of the primary heaters of both the first brewer and the second brewer.

30        By controlling energisation of the primary heaters to ensure that they are not both energised at the same time the total energy requirement of the machine can be reduced. In

- 6 -

this way it is possible to use a more powerful primary heater in each brewer.

Preferably the method further comprises operating the controller to prevent energisation of the primary heater of either of the first brewer or the second brewer during  
5 pumping of water by the at least one pump.

Preferably the method further comprises operating the controller to prevent energisation of the primary heater of either of the first brewer or the second brewer during  
10 delivery of a beverage into a receptacle from either the first brewer or the second brewer.

In this way the brewers do not use power for pumping water, or delivering beverages at the same time as either of the primary heaters are energised. Again, this allows for a  
15 more powerful primary heater to be utilised in each brewer without the total power requirement of the machine exceeding the available power supply.

Preferably the method further comprises energising the primary heater of one of the first brewer and the second  
20 brewer on a first demand from the controller and operating the controller to prevent energisation of the primary heater of the other of the first brewer and the second brewer until after the energised primary heater has been de-energised.

In this way the controller operates the primary heaters  
25 of the two brewers on a first come-first served basis. In other words once the primary heater of one brewer is switched on it remains on until the water in the reservoir of that heater reaches the required temperature or until some other action - such as a demand to dispense a beverage  
30 from the other brewer - interrupts heating. This minimises the time delay until at least one of the brewers is available and ready to dispense a beverage.

- 7 -

Preferably the method further comprises heating the water in the reservoir of the first and or second brewer to a temperature of between 70 and 95 degrees Celsius.

More preferably the water in the reservoir of the first  
5 and or second brewer is heated to a temperature of approximately 85 degrees Celsius.

Preferably each of the first and second brewers comprises a pump. Using a separate pump in each brewer rather than a single pump for both brewers reduces the  
10 complexity of the hydraulic circuit of the brewers and removes the need for complicated valving to divert flow between the brewers.

Preferably each of the first brewer and the second brewer further comprises a secondary heater in the flow path  
15 between the reservoir and an outlet of the delivery head and wherein the controller is operable to prevent energisation of either of the primary heaters simultaneous with energisation of either of the secondary heaters.

The use of secondary heaters is advantageous in order  
20 to provide accurate control of the water temperature when it reaches the beverage ingredients and also to speed up the speed of response of the machine when required to dispense successive beverages at different temperatures. By using the controller to prevent energisation of either of the  
25 secondary heaters with either of the primary heaters the total power draw of the machine can be limited within the available power supply whilst utilising a high power primary heater in each brewer.

Preferably the controller is operable to allow  
30 energisation of the secondary heaters of both the first brewer and the second brewer simultaneously.

- 8 -

Advantageously, the ability to operate both secondary heaters at the same time allows the machine to dispense beverages from both brewers simultaneously.

Preferably the beverage preparation machine is operated to dispense a beverage during a dispense cycle from the first or second brewer, wherein the controller operates to energise the primary heater of said first or second brewer during a portion of the dispense cycle when the at least one pump is inactive.

Preferably the beverage preparation machine is operated to dispense one or simultaneously two beverages during a dispense cycle from the first and second brewer, wherein the controller operates to energise the primary heater of the first or second brewer during a portion of the dispense cycle when the at least one pump is inactive.

In this way the machine can flexibly dispense one beverage from one or both brewers or two beverages using both brewers in sequential order or simultaneously. In addition, the primary heater of one or other of the brewers can be switched on whenever the secondary heaters of the machine are not being used and or when the pumps are inactive.

The dispense cycle may comprise one or more pauses where water is not pumped to said delivery head and wherein the controller operates to energise the primary heater of said first or second brewer during said one or more pauses.

For example, the one or more pauses may be for steeping the one or more beverage ingredients of a pod or cartridge or during purging of a pod or cartridge at the end of the dispense cycle.

Thus, advantageously even during relatively short periods when the pumps and secondary heaters are inactive

- 9 -

one of the primary heaters may be switched on to help to ready the water in the reservoirs to be able to quickly dispense a subsequent beverage. For example, the pauses may be of a duration of a few seconds, such as a 10 second pause  
5 for steeping a ground coffee beverage ingredient.

Preferably the method further comprises boosting the temperature of the water pumped to the delivery head of the first and or second brewer by use of the secondary heater by between 0 and 30 degrees Celsius.

10 For example, the temperature of the water pumped to the delivery head of the first and or second brewer may be boosted by use of the secondary heater such that the temperature of the water on reaching the delivery head is between 85 and 94 degrees Celsius.

15 Dependant on the actual water temperature in the reservoir and the target dispense temperature of the beverage the temperature of the water may or may not need boosting by the secondary heater. If no temperature boost is required then the water simply passes the heater with the  
20 secondary heater switched off. If a temperature boost is required the secondary heater is switched on.

The method may further comprise passing steam through the delivery head of the first and or second brewer after dispensation of a beverage from the first and or second  
25 brewer.

Preferably the steam is generated by the secondary heater of the first and or second brewer.

The steam can be used both to clean the delivery head after some or each dispense cycle and can also be used to  
30 drive out most or all liquid remaining in the single serve package in the delivery head. This reduces the amount of soiling of the delivery head on ejection of the package and

- 10 -

also helps to ensure consistency in the volume of liquid dispensed during each dispense cycle.

The method may comprise operating the first brewer and the second brewer simultaneously to dispense a single  
5 beverage, the single beverage comprising a first portion dispensed from the delivery head of the first brewer and a second portion dispensed from the delivery head of the second brewer.

Alternatively the method can comprise operating the  
10 first brewer and the second brewer simultaneously to dispense a first beverage and a second beverage, the first beverage being dispensed from the delivery head of the first brewer and the second beverage being dispensed from the delivery head of the second brewer.

15 The total power drawn by the beverage preparation machine in use may be less than 3120 Watts. This is particularly advantageous for machines to be used in European locations in order to match the available power supply.

20 The total power drawn by the beverage preparation machine in use may be less than 1800 Watts. This is particularly advantageous for machines to be used in the United States in order to match the available power supply.

The present invention also provides a beverage  
25 preparation machine comprising a first brewer and a second brewer, each of the first and second brewers comprising:

- a reservoir for water;
- a delivery head for receiving in use a cartridge
- 30 containing one or more beverage ingredients;
- a primary heater for heating water contained in said reservoir;

- 11 -

wherein the beverage preparation machine further comprises:

at least one pump for pumping water from said  
5 reservoirs to said delivery heads;

a controller for controlling energisation of the primary heater of each of the first brewer and the second brewer, wherein the controller is operable to prevent simultaneous energisation of the primary heaters of both the  
10 first brewer and the second brewer.

Preferably the controller is operable to prevent energisation of the primary heater of either of the first brewer or the second brewer during pumping of water by the pump of either the first brewer or the second brewer.

15 Preferably the controller is operable to prevent energisation of the primary heater of either of the first brewer or the second brewer during delivery of a beverage into a receptacle from either the first brewer or the second brewer.

20 Preferably the primary heater of the first brewer is located in the reservoir of the first brewer and the primary heater of the second brewer is located in the reservoir of the second brewer.

Each primary heater may have a power rating of less  
25 than or equal to 3120 Watts.

Each primary heater may have a power rating of less than or equal to 1800 Watts.

Each primary heater preferably comprises an electrical power heating source.

30 The controller may comprise a first controller device for controlling operation of the first brewer and a second

- 12 -

controller device for controlling operation of the second brewer.

Preferably the first controller device is located in the first brewer and the second controller device is located  
5 in the second brewer.

The first controller device and the second controller device are preferably operatively interconnected.

Preferably each of the first brewer and the second brewer further comprises a secondary heater in between the  
10 reservoir and an outlet of the delivery head and wherein the controller is operable to prevent energisation of either of the primary heaters simultaneous with energisation of either of the secondary heaters.

Preferably the controller is operable to allow  
15 energisation of the secondary heaters of both the first brewer and the second brewer simultaneously.

Preferably each secondary heater is located in the flow path extending from the reservoir to the delivery head.

Each secondary heater may have a power rating of less  
20 than or equal to 1500 Watts.

Each secondary heater may have a power rating of less than or equal to 900 Watts.

Preferably each secondary heater comprises an instantaneous heater. For example the secondary heaters may  
25 be in-line electrical flash heaters.

Advantageously, the machine may comprise only a single power inlet connection. This allows the machine to be installed in a wide variety of locations without the need to take up a number of power sockets or to be supplied with a  
30 specialised form of power supply.

The present invention also provides a beverage preparation system comprising a beverage preparation machine

- 13 -

as described above and one or more cartridges containing one or more beverage ingredients.

The present invention further provides a beverage preparation machine comprising:

- 5       a reservoir for water;
- a delivery head for receiving in use a cartridge containing one or more beverage ingredients;
- a pump for pumping water from said reservoir to said delivery head;
- 10       a primary heater for heating water contained in said reservoir;
- a temperature sensor for sensing the temperature of water in the reservoir;
- an inlet valve communicating with the reservoir and
- 15   connectable to an external source of water and operable to control inflow of water into the reservoir;
- a controller for controlling operation of the inlet valve, said controller being operatively connected to the temperature sensor to receive temperature signals indicative
- 20   of the temperature of water in the reservoir and operatively connected to the inlet valve to control opening and closing of the inlet valve;
- wherein the controller is operable to open the inlet valve to allow inflow of water into the reservoir in
- 25   response to temperature signals from the temperature sensor;
- wherein the controller is operable to open the inlet valve to allow inflow of water when the temperature of the water in the reservoir is within a fill differential of a target water temperature;
- 30       further, wherein the controller is operable to allow actuation of the pump in order to dispense a beverage only

- 14 -

when the temperature of the water within the reservoir is within a vend differential of the target water temperature.

In this way, filling of the reservoir is controlled in order to limit the impact on the machine's ability to be  
5 ready to dispense beverages on demand.

Preferably the target temperature is between 70 and 95 degrees Celsius.

Preferably the target temperature is approximately 85 degrees Celsius.

10 Advantageously the fill differential is smaller than the vend differential. Thus, filling of the reservoir is only permitted when there is some capacity for water to be added without dropping the temperature of the reservoir below the point where the machine is able to dispense  
15 beverages.

Preferably the fill differential is approximately 5 degrees Celsius.

Preferably the vend differential is approximately 10 degrees Celsius.

20 Preferably the controller is operable to execute a time delay between closing of the inlet valve and re-opening of the inlet valve. This allows for slopping of the water in the reservoir to subside to ensure accurate readings by any volume sensors installed in the reservoir and also to allow  
25 for the cooling effect of the added water to be sensed by the temperature sensor of the reservoir.

The beverage preparation machine may comprise a first brewer and a second brewer, each of the first and second brewers comprising a beverage preparation machine as  
30 described above.

- 15 -

The present invention also provide a method of operating a beverage preparation machine of the type comprising:

- a reservoir for water;
- 5 a delivery head for receiving in use a cartridge containing one or more beverage ingredients;
- a pump for pumping water from said reservoir to said delivery head;
- a primary heater for heating water contained in said
- 10 reservoir;
- a temperature sensor for sensing the temperature of water in the reservoir;
- an inlet valve communicating with the reservoir and connectable to an external source of water and operable to
- 15 control inflow of water into the reservoir;
- a controller for controlling operation of the inlet valve, said controller being operatively connected to the temperature sensor to receive temperature signals indicative of the temperature of water in the reservoir and operatively
- 20 connected to the inlet valve to control opening and closing of the inlet valve;
- the method comprising the steps of operating the controller to open the inlet valve to allow inflow of water into the reservoir in response to temperature signals from
- 25 the temperature sensor;
- operating the controller to open the inlet valve to allow inflow of water when the temperature of the water in the reservoir is within a fill differential of a target water temperature;
- 30 further, operating the controller to allow actuation of the pump in order to dispense a beverage only when the

- 16 -

temperature of the water within the reservoir is within a  
vend differential of the target water temperature.

Preferably the controller is operated to execute a time  
delay between closing of the inlet valve and re-opening of  
5 the inlet valve.

Embodiments of the present invention will now be  
described, by way of example only, with reference to the  
accompanying drawings in which:

10 Figure 1 is perspective view of a first embodiment of  
beverage preparation machine according to the present  
invention which includes first and second brewers;

Figure 2 is a perspective view of a second embodiment  
of beverage preparation machine according to the present  
15 invention which includes a single brewer;

Figure 3 is a schematic diagram of the beverage  
preparation machine of Figure 1;

Figure 4 is a schematic diagram of a water flow path  
within the beverage preparation machines of Figures 1 and 2;

20 Figure 5 is a flow diagram illustrating aspects of the  
operation of a controller of the beverage preparation  
machine of Figure 1; and

Figure 6 is a diagram illustrating operation of the  
beverage preparation machine of Figure 1 when first switched  
25 on.

The beverage preparation machines 1 of Figures 1 and 2  
each comprise a housing 2 containing the internal mechanisms  
of the machine such as a water reservoir, a pump and a  
30 heating means.

- 17 -

The machine 1 of Figure 2 comprises a single brewer.  
The machine 1 of Figure 1 comprises a first brewer and a second brewer coupled together.

Each brewer of the machines 1 comprises a delivery head  
5 3 provided towards an upper part of the housing 2 in which,  
in use, is received a cartridge containing one or more  
beverage ingredients. Beverage is dispensed from the brewer  
through an outlet spout 5 by pumping water from the  
reservoir of the brewer through the cartridge to form the  
10 beverage which is then directed through the outlet spout 5  
into a cup 6. As can be seen in Figure 1, two outlet spouts  
5 are provided for a machine with two brewers.

As shown in Figure 3, the first and second brewers of  
the beverage machine of Figure 1 are of the same  
15 configuration internally and functionally. The components of  
the first brewer are shown in Figure 3 with the suffix 'a'  
and the components of the second brewer are shown with the  
suffix 'b'. Each brewer comprises a reservoir 30, a power  
supply unit (PSU) 45, a controller 47, a pump 50, a  
20 secondary heater 51, a delivery head (shown in Figure 3 by  
the collective numeral 55) and a user interface 61, 62.

The machine 1 further comprises a common flow diverter  
63 which channels the output from the delivery heads 55 into  
one or more receptacles 6 positioned on a drip tray 64 or  
25 cup stand assembly 4. The drip tray 64 may be provided with  
a sensor 66 connected to one or both of the controllers 47  
to indicate when the drip tray 64 is full. There is also  
provided a waste bin 60 for ejected cartridges. The waste  
bin 60 is provided with a sensor 65 connected to one or both  
30 of the controllers 47 to detect when the waste bin 60 is  
full. The cup stand assembly may comprise a cup stand 6  
mounted on a shaft 10.

- 18 -

Each reservoir 30 comprises a primary heater 31 in the form of an immersion heater element, a water temperature sensor 32, an overheat sensor 33, water level sensors 34, a boil sensor 35, an overflow outlet 36 and a drain point 37.

5 In addition the reservoir 30 is provided with a filling point where a manual fill 38 may be carried out - for example by accessing the reservoir through a removable lid, or an automatic fill may be carried out using an inlet valve 41 plumbed into a mains supply 40 of water.

10 Each PSU 45 provides electrical power to its respective brewer. The PSUs 45 are connected to an external mains supply 46. A single external connection to the mains power supply 46 is utilised. For example a single power flex terminating in a two or three pin plug is provided.

15 Each controller 47 comprises a printed circuit board (PCB) having mounted thereon a processor and memory as well as an input/output interface for transmitting and receiving signals from the primary heater 31, temperature sensor 32, overheat sensor 33, water level sensors 34, boil sensor 35, 20 inlet valve 41, PSU 45, pump 50, secondary heater 51, delivery head 55 and user interface 61, 62 of its respective brewer. In addition, the controllers 47 of the two brewers transmit and receive signals from each other using interconnect 48 in order to co-ordinate operation of the two 25 brewers as described below. The interconnect 48 may be a collection of wire connects or a dedicated data bus with onboard controller.

The memory stores operational code which is used to control the operational behaviour of the machine under 30 various operational scenarios as will be described below. The memory may be a read-only memory or a writable memory such as an EPROM.

- 19 -

Each pump 50 has an input connected to its respective reservoir 30 and an output connected to its respective secondary heater 51. The pumps 50 may be a peristaltic type of pump wherein a known volume of water is throughput on each cycle or revolution of the pumping member. Alternatively, a pulse counter encoder may be utilised connected to the controller for determining volume throughput. The flow rate produced by the pumps 50 may be varied under the control of the controller 47 between dispense cycles and within an individual dispense cycle. Typically flow rates of between 0 and 13 mls<sup>-1</sup> are utilised. Advantageously a very slow flow rate is used at the start of the dispense cycle to maximise heat transfer from the secondary heaters 51.

Preferably, an electromechanical check valve is located between the pump 50 and the secondary heater 51. In addition a 2.5 bar overpressure device is fitted to the flow line.

Each secondary heater 51 comprises an instantaneous flash heater having a through-flow tube in which water to be heated passes and an electrical heating element 52 thermally connected to an exterior of the tube. A temperature sensor 53 is located at the exit of the secondary heater 51 to monitor the temperature of the water exiting the secondary heater. This measurement is fed to the controller 47.

The output from the secondary heater 51 is delivered to the delivery head 55.

The delivery head 55 comprises a piercing element 56 and a clamping element 58 which can receive in use a cartridge 70 which is to be dispensed. A barcode reader 57 is provided for reading an identifying barcode located on the cartridge 70. The delivery head 55 can be moved in between an open configuration in which the cartridge 70 can

- 20 -

be inserted into the delivery head 55 and a closed configuration in which the cartridge 70 is clamped by the clamping member 58 and an inlet and outlet are formed by the piercing element 56.

5       An ejection mechanism 59 may be provided for ejecting the cartridges 70 from the delivery head 55 after dispensation. However, for the purposes of the present invention the ejection mechanism and the detailed operation of the delivery head 55 will not be described in detail.

10       Each user interface comprises a start/stop button 61 and a LCD display panel 62 for displaying information to a user.

      In use, assuming that the water in one of the reservoirs 30 is at the required temperature the LCD display  
15   62 for that brewer will indicate that a cartridge should be inserted into the delivery head 55. The cartridge 70 is then inserted by a user and the delivery head 55 closed to pierce the cartridge 55. The start/stop button 61 is then pressed to commence the dispense cycle. During dispense water  
20   follows a flow path as shown schematically in Figure 4. A portion of the water in the reservoir 30 that has been heated to a holding temperature by the primary heater 31 is pumped by the pump 50 through the secondary heater 51 to the delivery head 55. On passing through the secondary heater 51  
25   the temperature of the water is raised, if required, by energisation of the secondary heater element 52. On reaching the delivery head 55 the water is directed through the cartridge 70 to form the beverage. The beverage exits the outlet of the cartridge and is directed via the flow  
30   diverter 63 out of one of the outlets 5 of the machine 1 into a receptacle 6.

- 21 -

The holding temperature of the reservoir is between 70 and 95 degrees Celsius and preferably is 85 degrees Celsius.

The temperature of the water on exiting the secondary heater 53 is set by the controller 47 and a positive  
5 feedback control is utilised using the temperature sensor 53 with the controller 47 adjusting the power of the heating element 52 as necessary to achieve the desired temperature for the water at the point the water reaches the delivery head. The temperature of the water reaching the delivery  
10 head is desired to be between 85 and 94 degrees Celsius depending on the type of beverage being dispensed. Thus, the desired temperature of the water directly exiting the secondary heater will be greater than this to allow for heat losses during transport of the water from the secondary  
15 heater to the delivery head. In practice the required temperature levels at the exit of the secondary heater for the water would be determined by experiment but may, for example, be in the range of 90 to 103 degrees Celsius.

According to the present invention, the control of the  
20 machine as determined by operation of the controllers 47 is programmed to limit the maximum power requirement of the machine 1.

Firstly, each controller 47 operates to prevent simultaneous energisation of the primary heater 31 and  
25 secondary heater 51 of its own brewer. Secondly, the controllers 47 of both brewers communicate using the interconnect 48 to prevent energisation of the primary heater 31 of one brewer at the same time as energisation of the primary heater 31 or secondary heater 51 of the other  
30 brewer. In other words, the two primary heaters 31 cannot be energised simultaneously and neither can either primary heater 31 be energised simultaneously with either secondary

- 22 -

heater 51. An advantage of the present machine is that both secondary heaters 51 may be energised simultaneously. This allows both brewers to dispense at the same time.

The control logic applied by both controllers 47 is shown schematically in the flow chart of Figure 5. The 'start' box represents the start point of the control loop and the machine would initially be in this position on first switching on. The primary heaters 31 of the brewers operate on a first come-first served basis such that the controller 47 that first requests to switch on its primary heater 31 will be successful and this primary heater 31 will remain energised until either the water in the reservoir 30 reaches the holding temperature or a dispense cycle is initiated.

Both controllers 47 can set or release a 'heat inhibit' condition which prevents energisation of the primary heater 31 of the other brewer.

An example of the control logic in operation is shown in Figure 6 which illustrates the initial operation of the machine on switching on. At first the reservoirs 30 of the first and second brewers are below the holding temperature therefore on switching on both LCD displays show a 'Heating Please Wait' message. On switching on the first brewer, in this example, is first to request energisation of its primary heater 31a and thus its primary heater 31a switches on. Because of this the primary heater 31b of the second brewer remains off. Once the temperature of the reservoir 30a is up to the holding temperature a 'Please Insert Cartridge' message is displayed on the display 62a of the first brewer. At this point the controller 47a of the first brewer de-energises its primary heater 31a and clears the 'heat inhibit' condition allowing the controller 47b of the second brewer to energise its primary heater 31b.

- 23 -

Figure 6 illustrates that if during heating of the water in reservoir 30b a user commences a dispense cycle using the first brewer by pressing the start/stop button 61a this takes precedence and the primary heater 31b of the second brewer is de-energised to allow the secondary heater 51a of the first brewer to be switched on.

Figure 6 further illustrates that if dispensing the beverage from the first brewer causes its reservoir 30a to fall below the holding temperature (in reality this would require dispensation of a number of beverages) then the primary heater 31a will want to switch on at the end of the dispense cycle. However, in this example, using the first come-first served principle, the controller 47b of the second brewer is first to request energisation of its primary heater 31b. Thus the reservoir 30b of the second brewer heats up to the holding temperature first at which point the primary heater 31b switches off allowing the primary heater 31a of the first brewer to switch back on.

An advantage of this method of control is that one of the brewers will heat up quickly on initial start up to allow quick dispensation to take place.

The intercommunication between the controllers 47 allows for energisation of the primary heater 31 of one of the brewers even during relatively short pauses in use of the pumps or secondary heaters 51 of the brewers. For example, the primary heater 31 of one of the brewers may be energised during a steeping pause in a dispense cycle.

Optionally, the brewers may use a steam purge for cleaning the delivery heads 55 and also to help drive out liquid or beverage from the cartridges 70. The steam is generated by the secondary heater 51. The steam may be producing from water fed to the secondary heater 51

- 24 -

specifically for this purpose but is preferably generated from residual water remaining in the secondary heater 51 and associated pipework at the end of the beverage dispensation phase of the delivery cycle. The steam may be generated by  
5 specific energisation the secondary heater 51 for a period or relying on the residual heat energy contained in the secondary heater 51 and associated pipework from heating the liquid water.

Aspects of the present invention also apply to a  
10 beverage preparation machine comprising a single brewer as shown in Figure 2. The operation, construction and temperature control of the single brewer is as explained above with regard to the beverage preparation machine comprising first and second brewers *mutatis mutandis*. In  
15 particular operation of the single brewer is controlled by controller 47. In this case the controller 47 acts to ensure that the primary heater 31 and secondary heater 51 are not energised simultaneously in the same manner as described above.

20 As described in the above embodiments the temperature of the water exiting the secondary heater 51 can be controlled by positive feedback control using the controller 47 and the temperature sensor 53. It has been found that positive feedback control of the water temperature is  
25 somewhat ineffective for the first few seconds of the water flow. In other words, it requires a few seconds for the feedback loop to be established before accurate temperature control is obtained. In order to provide more effective temperature control, especially for the initial period of  
30 water flow, feed-forward temperature control is implemented. The controller 47 is pre-programmed with a number of operational scenarios and adjusts the operation of the

- 25 -

secondary heater 51 accordingly. The controller 47 selects the operational behaviour based on the time since the last dispense cycle and the temperature of the secondary heater 51.

5       For example, where a relatively long period has elapsed since the last dispense cycle (e.g. over 10 minutes) a 'cold start' program is initiated wherein a small volume (around 10ml) of water is pumped through the pipework into the secondary heater 51 and then held there whilst the secondary  
10 heater 51 is energised to heat the water to the required pre-wet temperature before passing the water to the brew head. The length of this 'stabilisation time' will be longer for a 'cold start' than for an 'intermediate start' where a beverage has been dispensed within, say, the last five  
15 minutes. For a 'hot start' where a beverage is dispensed immediately or very shortly after a preceding beverage the stabilisation time will be shorter still - or indeed no stabilisation time may be required at all.

Feed-forward control of the secondary heater 51 applies  
20 equally to all of the embodiments described above.

In the above embodiments, a beverage dispense cycle may be operated using energisation of only the secondary heater(s) 51. In other words, the primary heater(s) may be off during the entire time that a beverage is being  
25 dispensed. Thereafter the primary heater(s) may be energised if required to maintain or raise the temperature in the reservoir(s) 30.

The controllers 47 of the machines 1 of Figure 1 and 2 can also be used to control automatic refilling of each  
30 reservoir 30. Operation of the inlet valve 41 is under the control of the controller 47. The controller 47 operates to limit the temperature drop of the reservoir 30 caused by

- 26 -

injecting cold water into the heated water already in the reservoir 30. This is achieved by monitoring the actual temperature of the water using the temperatures sensor 32 and only allowing the inlet valve 41 to be opened when the  
5 actual temperature is within a fill differential of the target holding temperature. For example, when the target holding temperature is 85 degrees Celsius a fill differential of 5 degrees may be used meaning that the inlet valve 41 cannot be opened to admit water to the reservoir  
10 until the actual temperature is at least 80 degrees Celsius. In addition, the controller 47 utilises a vend differential parameter to control when the water in the reservoir is sufficiently close to the target holding temperature to allow a dispense cycle to take place. For example, the vend  
15 differential may be set at 10 degrees meaning that dispensation can take place as long as the actual water temperature is at least 75 degrees Celsius (in this case the secondary heater 51 is used to make up the initial temperature deficit to ensure the water is at the target  
20 delivery temperature when it reaches the delivery head 55).

As a result a reservoir 30 that is sitting at the target temperature may be refilled when water is pumped out of the reservoir until the temperature in the reservoir falls by 5 degrees. Thus top-up filling of the reservoir in  
25 these circumstances does not prevent the immediate use of further water if demanded. Under very heavy usage conditions (or on the first filling of the reservoir after plumbing in or emptying for servicing) the water level in the reservoir 30 may reach the low level sensor 34 at which point the  
30 controller 47 will open the inlet valve 41 to allow refilling and dispensation of beverages will not be possible until the reservoir reaches at least 75 degrees Celsius.

-27-

The embodiments of the present invention for which an exclusive property or privilege is claimed are defined as follows:

1. A method of operating a beverage preparation machine, the beverage preparation machine comprising a first brewer and a second brewer, each of the first and second brewers comprising:

a reservoir containing water;

a delivery head for receiving in use a cartridge containing one or more beverage ingredients;

a primary heater for heating the water contained in said reservoir;

a secondary heater in a flow path between the reservoir and an outlet of the delivery head;

wherein the beverage preparation machine further comprises:

at least one pump for pumping water from said reservoirs to said delivery heads;

a controller for controlling energisation of the primary heater of each of the first brewer and the second brewer and operable to prevent energisation of either of the primary heaters simultaneous with energisation of either of the secondary heaters;

the method of operation comprising operating the controller to prevent simultaneous energisation of the primary heaters of both the first brewer and the second brewer.

2. The method of claim 1 further comprising operating the controller to prevent energisation of the primary heater of either of the first brewer or the second brewer during pumping of water by the at least one pump.

3. The method of claim 1 or 2 further comprising operating the controller to prevent energisation of the primary heater of either of the first brewer or the second brewer during delivery of a beverage into a receptacle from either the first brewer or the second brewer.

-28-

4. The method of any one of claims 1 to 3 further comprising energising the primary heater of one of the first brewer and the second brewer on a first demand from the controller and operating the controller to prevent energisation of the primary heater of the other of the first brewer and the second brewer until after the energised primary heater has been de-energised.
5. The method of any one of claims 1 to 4 further comprising heating the water in the reservoir of at least one of the first and the second brewer to a temperature of between 70 to 95 degrees Celsius.
6. The method of claim 5 comprising heating the water in the reservoir of at least one of the first and the second brewer to a temperature of approximately 85 degrees Celsius.
7. The method of any one of claims 1 to 6 wherein each of the first and second brewers comprises a pump.
8. The method of claim 1 wherein the controller is operable to allow energisation of the secondary heaters of both the first brewer and the second brewer simultaneously.
9. The method of claim 1 or claim 8 wherein the beverage preparation machine is operated to dispense a beverage during a dispense cycle from the first or second brewer, wherein the controller operates to energise the primary heater of said first or second brewer during a portion of the dispense cycle when the at least one pump is inactive.
10. The method of claim 1 or claim 8 wherein the beverage preparation machine is operated to dispense one or simultaneously two beverages during a dispense cycle from the first and second brewer, wherein the controller operates to energise the primary heater of the first or second brewer during a portion of the dispense cycle when the at least one pump is inactive.

-29-

11. The method of claim 9 or claim 10 wherein the dispense cycle comprises one or more pauses where water is not pumped to said delivery head and wherein the controller operates to energise the primary heater of said first or second brewer during said one or more pauses.
12. The method of claim 11 wherein the one or more pauses are for steeping the one or more beverage ingredients of a pod or cartridge.
13. The method of any one of claims 1 to 12 further comprising boosting the temperature of the water pumped to the delivery head of at least one of the first and the second brewer by use of the secondary heater by between 0 and 30 degrees Celsius.
14. The method of claim 13 comprising boosting the temperature of the water pumped to the delivery head of at least one of the first and the second brewer by use of the secondary heater such that the temperature of the water on reaching the delivery head is between 85 and 94 degrees Celsius.
15. The method of any one of claims 1 to 14 further comprising passing steam through the delivery head of at least one of the first and the second brewer after dispensation of a beverage from the first and or second brewer.
16. The method of claim 15 wherein the steam is generated by the secondary heater of at least one of the first and the second brewer.
17. The method of any one of claims 1 to 16 comprising operating the first brewer and the second brewer simultaneously to dispense a single beverage, the single beverage comprising a first portion dispensed from the delivery head of the first brewer and a second portion dispensed from the delivery head of the second brewer.

-30-

18. The method of any one of claims 1 to 16 comprising operating the first brewer and the second brewer simultaneously to dispense a first beverage and a second beverage, the first beverage being dispensed from the delivery head of the first brewer and the second beverage being dispensed from the delivery head of the second brewer.

19. The method of any one of claims 1 to 18 wherein the total power drawn by the beverage preparation machine in use is less than 3120 Watts.

20. The method of claim 19 wherein the total power drawn by the beverage preparation machine in use is less than 1800 Watts.

21. A beverage preparation machine comprising a first brewer and a second brewer, each of the first and second brewers comprising:

a reservoir for water;

a delivery head for receiving in use a cartridge containing one or more beverage ingredients;

a primary heater for heating water contained in said reservoir;

a secondary heater in between the reservoir and an outlet of the delivery head;

wherein the beverage preparation machine further comprises:

at least one pump for pumping water from said reservoirs to said delivery heads;

a controller for controlling energisation of the primary heater of each of the first brewer and the second brewer, wherein the controller is operable to prevent simultaneous energisation of the primary heaters of both the first brewer and the second brewer and to prevent energisation of either of the primary heaters simultaneous with energisation of either of the secondary heaters.

-31-

22. The beverage preparation machine of claim 21 wherein the controller is operable to prevent energisation of the primary heater of either of the first brewer or the second brewer during pumping of water by the pump of either the first brewer or the second brewer.
23. The beverage preparation machine of claim 21 or claim 22 wherein the controller is operable to prevent energisation of the primary heater of either of the first brewer or the second brewer during delivery of a beverage into a receptacle from either the first brewer or the second brewer.
24. The beverage preparation machine of any one of claims 21 to 23 wherein the primary heater of the first brewer is located in the reservoir of the first brewer and the primary heater of the second brewer is located in the reservoir of the second brewer.
25. The beverage preparation machine of any one of claims 21 to 24 wherein each primary heater has a power rating of less than or equal to 3120 Watts.
26. The beverage preparation machine of claim 25 wherein each primary heater has a power rating of less than or equal to 1800 Watts.
27. The beverage preparation machine of any one of claims 21 to 26 wherein each primary heater comprises an electrical power heating source.
28. The beverage preparation machine of any one of claims 21 to 27 wherein the controller comprises a first controller device for controlling operation of the first brewer and a second controller device for controlling operation of the second brewer.

-32-

29. The beverage preparation machine of claim 28 wherein the first controller device is located in the first brewer and the second controller device is located in the second brewer.
30. The beverage preparation machine of claim 28 or claim 29 wherein the first controller device and the second controller device are operatively interconnected.
31. The beverage preparation machine of claim 21 wherein the controller is operable to allow energisation of the secondary heaters of both the first brewer and the second brewer simultaneously.
32. The beverage preparation machine of claim 21 or claim 31 wherein each secondary heater is located in the flow path extending from the reservoir to the delivery head.
33. The beverage preparation machine of any one of claims 21 to 32 wherein each secondary heater has a power rating of less than or equal to 1500 Watts.
34. The beverage preparation machine of claim 33 wherein each secondary heater has a power rating of less than or equal to 900 Watts.
35. The beverage preparation machine of any one of claims 21 to 34 wherein each secondary heater comprises an instantaneous heater.
36. The beverage preparation machine of any one of claims 21 to 35 wherein the machine comprises only a single power inlet connection.

-33-

37. A beverage preparation system comprising a beverage preparation machine as claimed in any one of claims 21 to 36 and one or more cartridges containing one or more beverage ingredients.

Application number / numéro de demande: 2778119

Figures: 3

---

---

---

---

---

Pages: \_\_\_\_\_

---

---

---

---

---

Unscannable items  
received with this application  
(Request original documents in File Prep. Section on the 10<sup>th</sup> floor)

Documents reçu avec cette demande ne pouvant être balayés  
(Commander les documents originaux dans la section de préparation des dossiers au  
10ème étage)

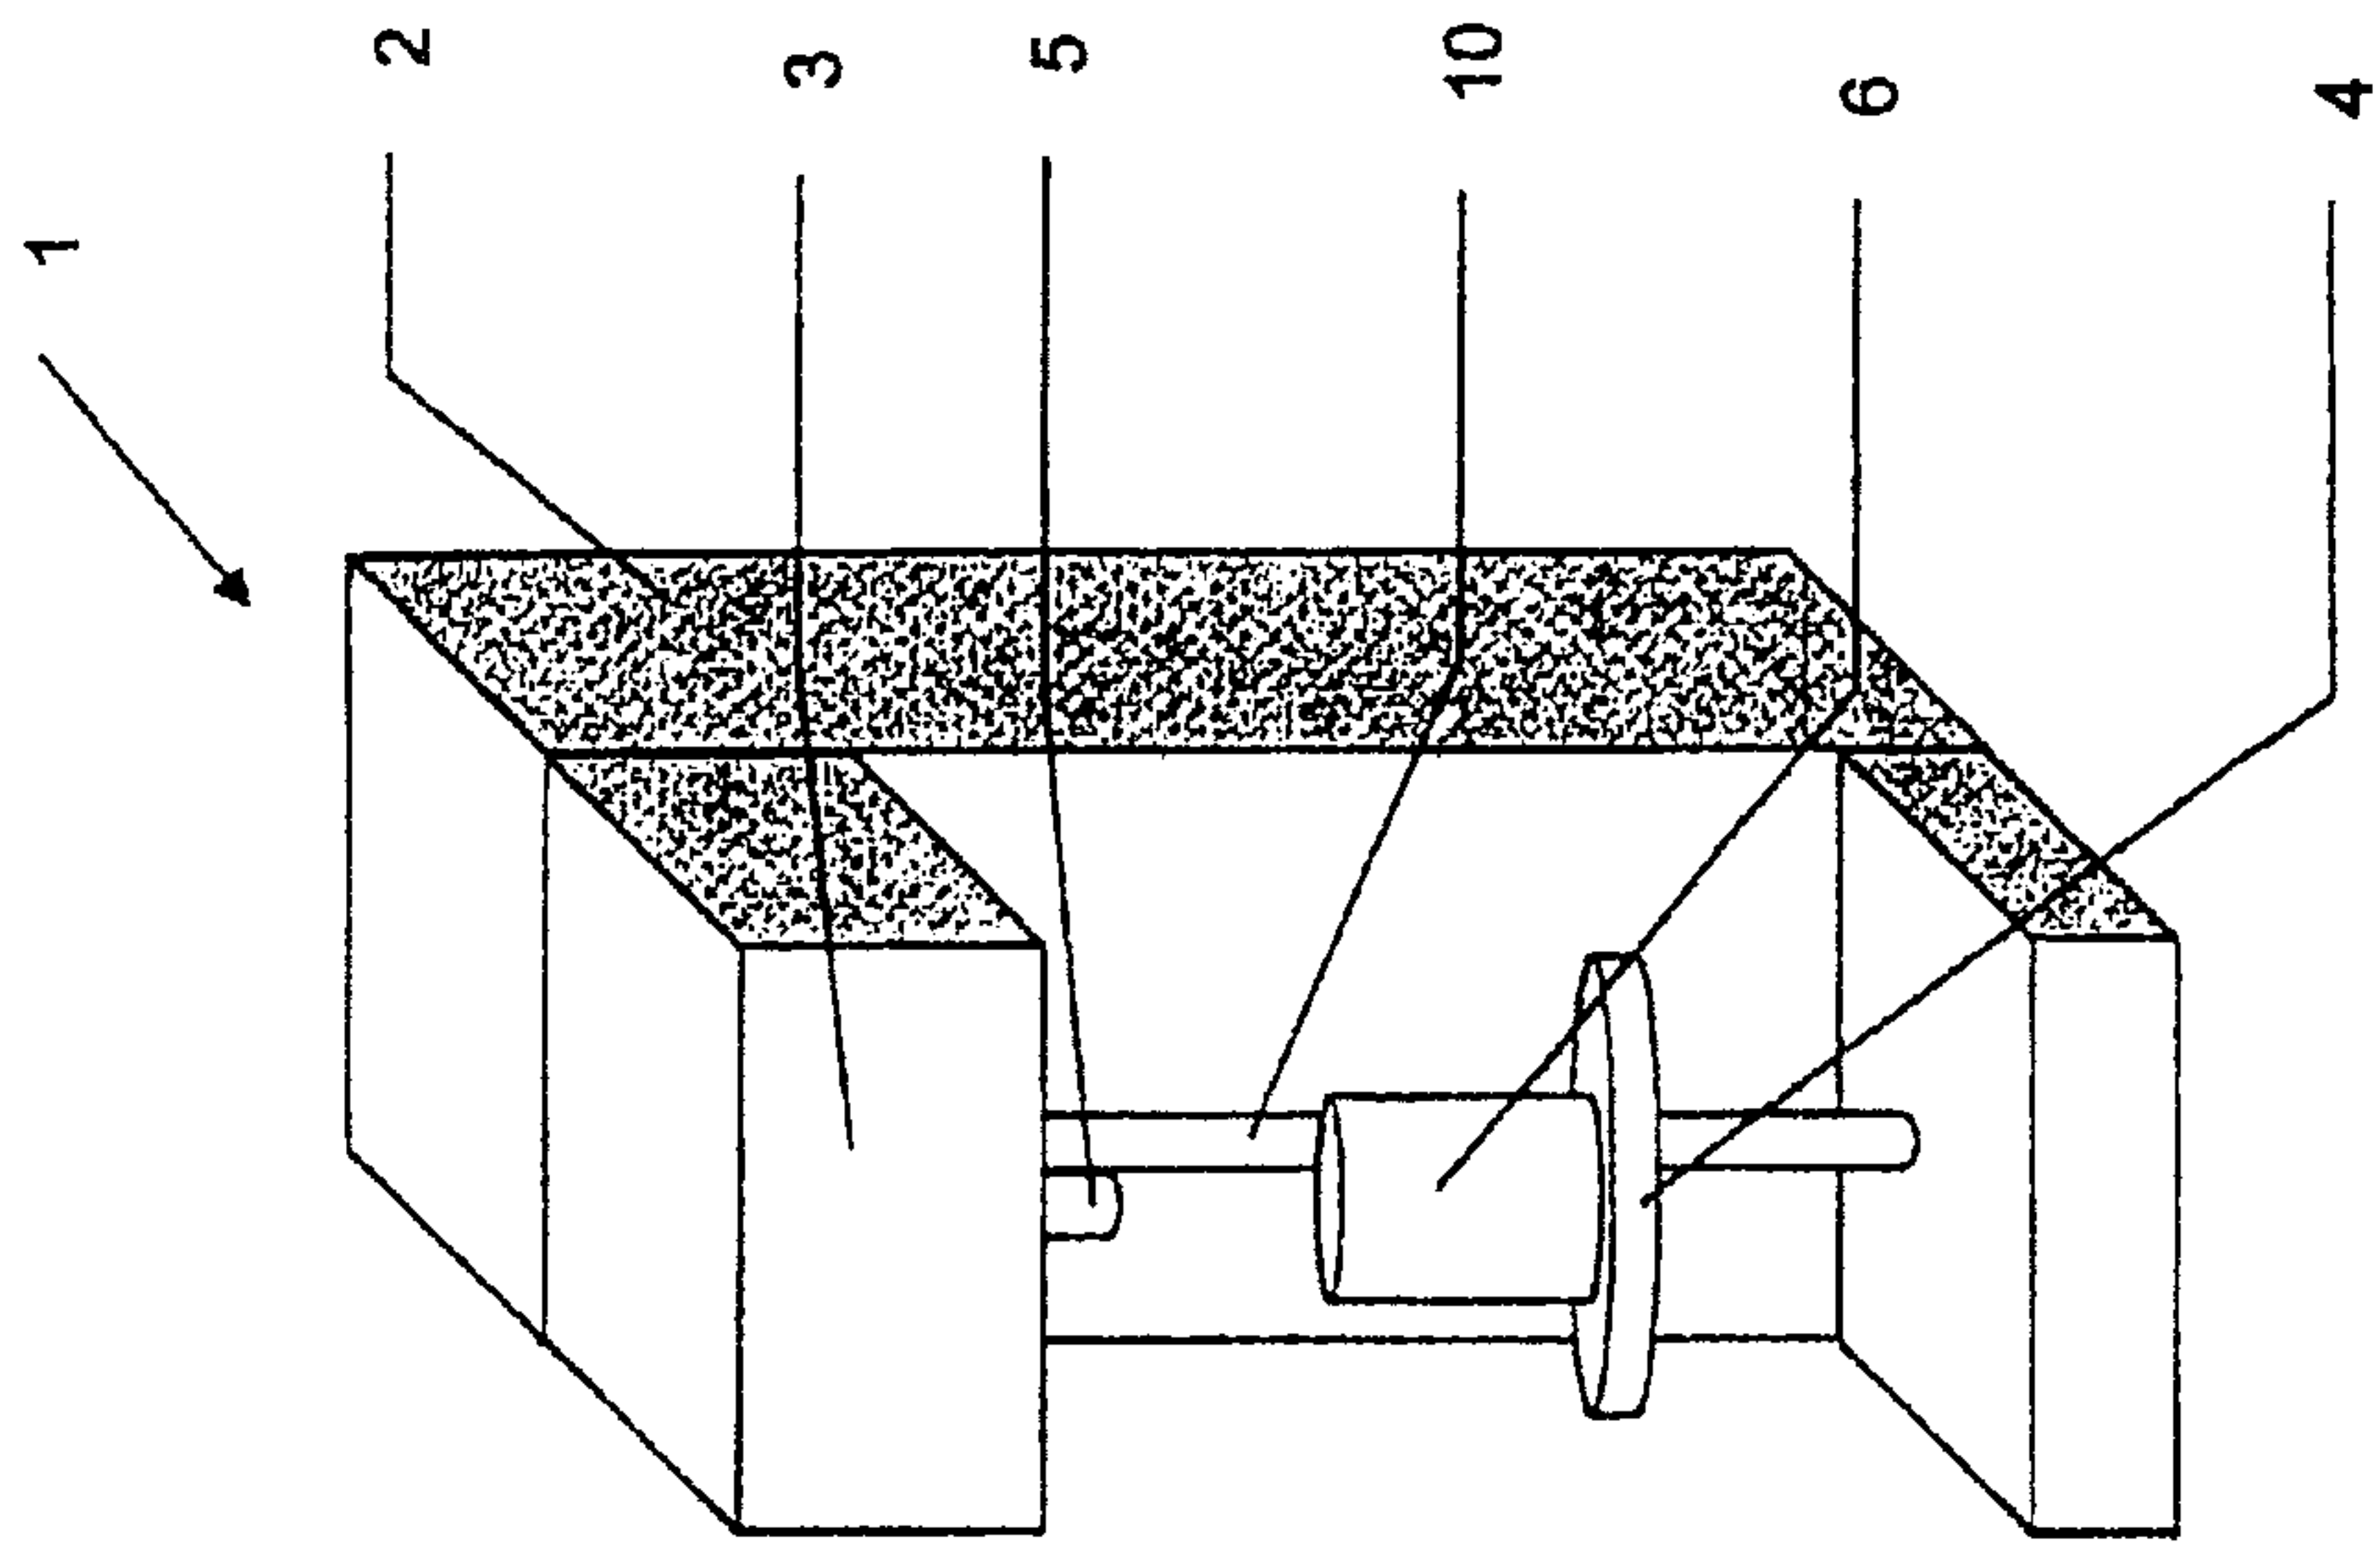


Fig. 2

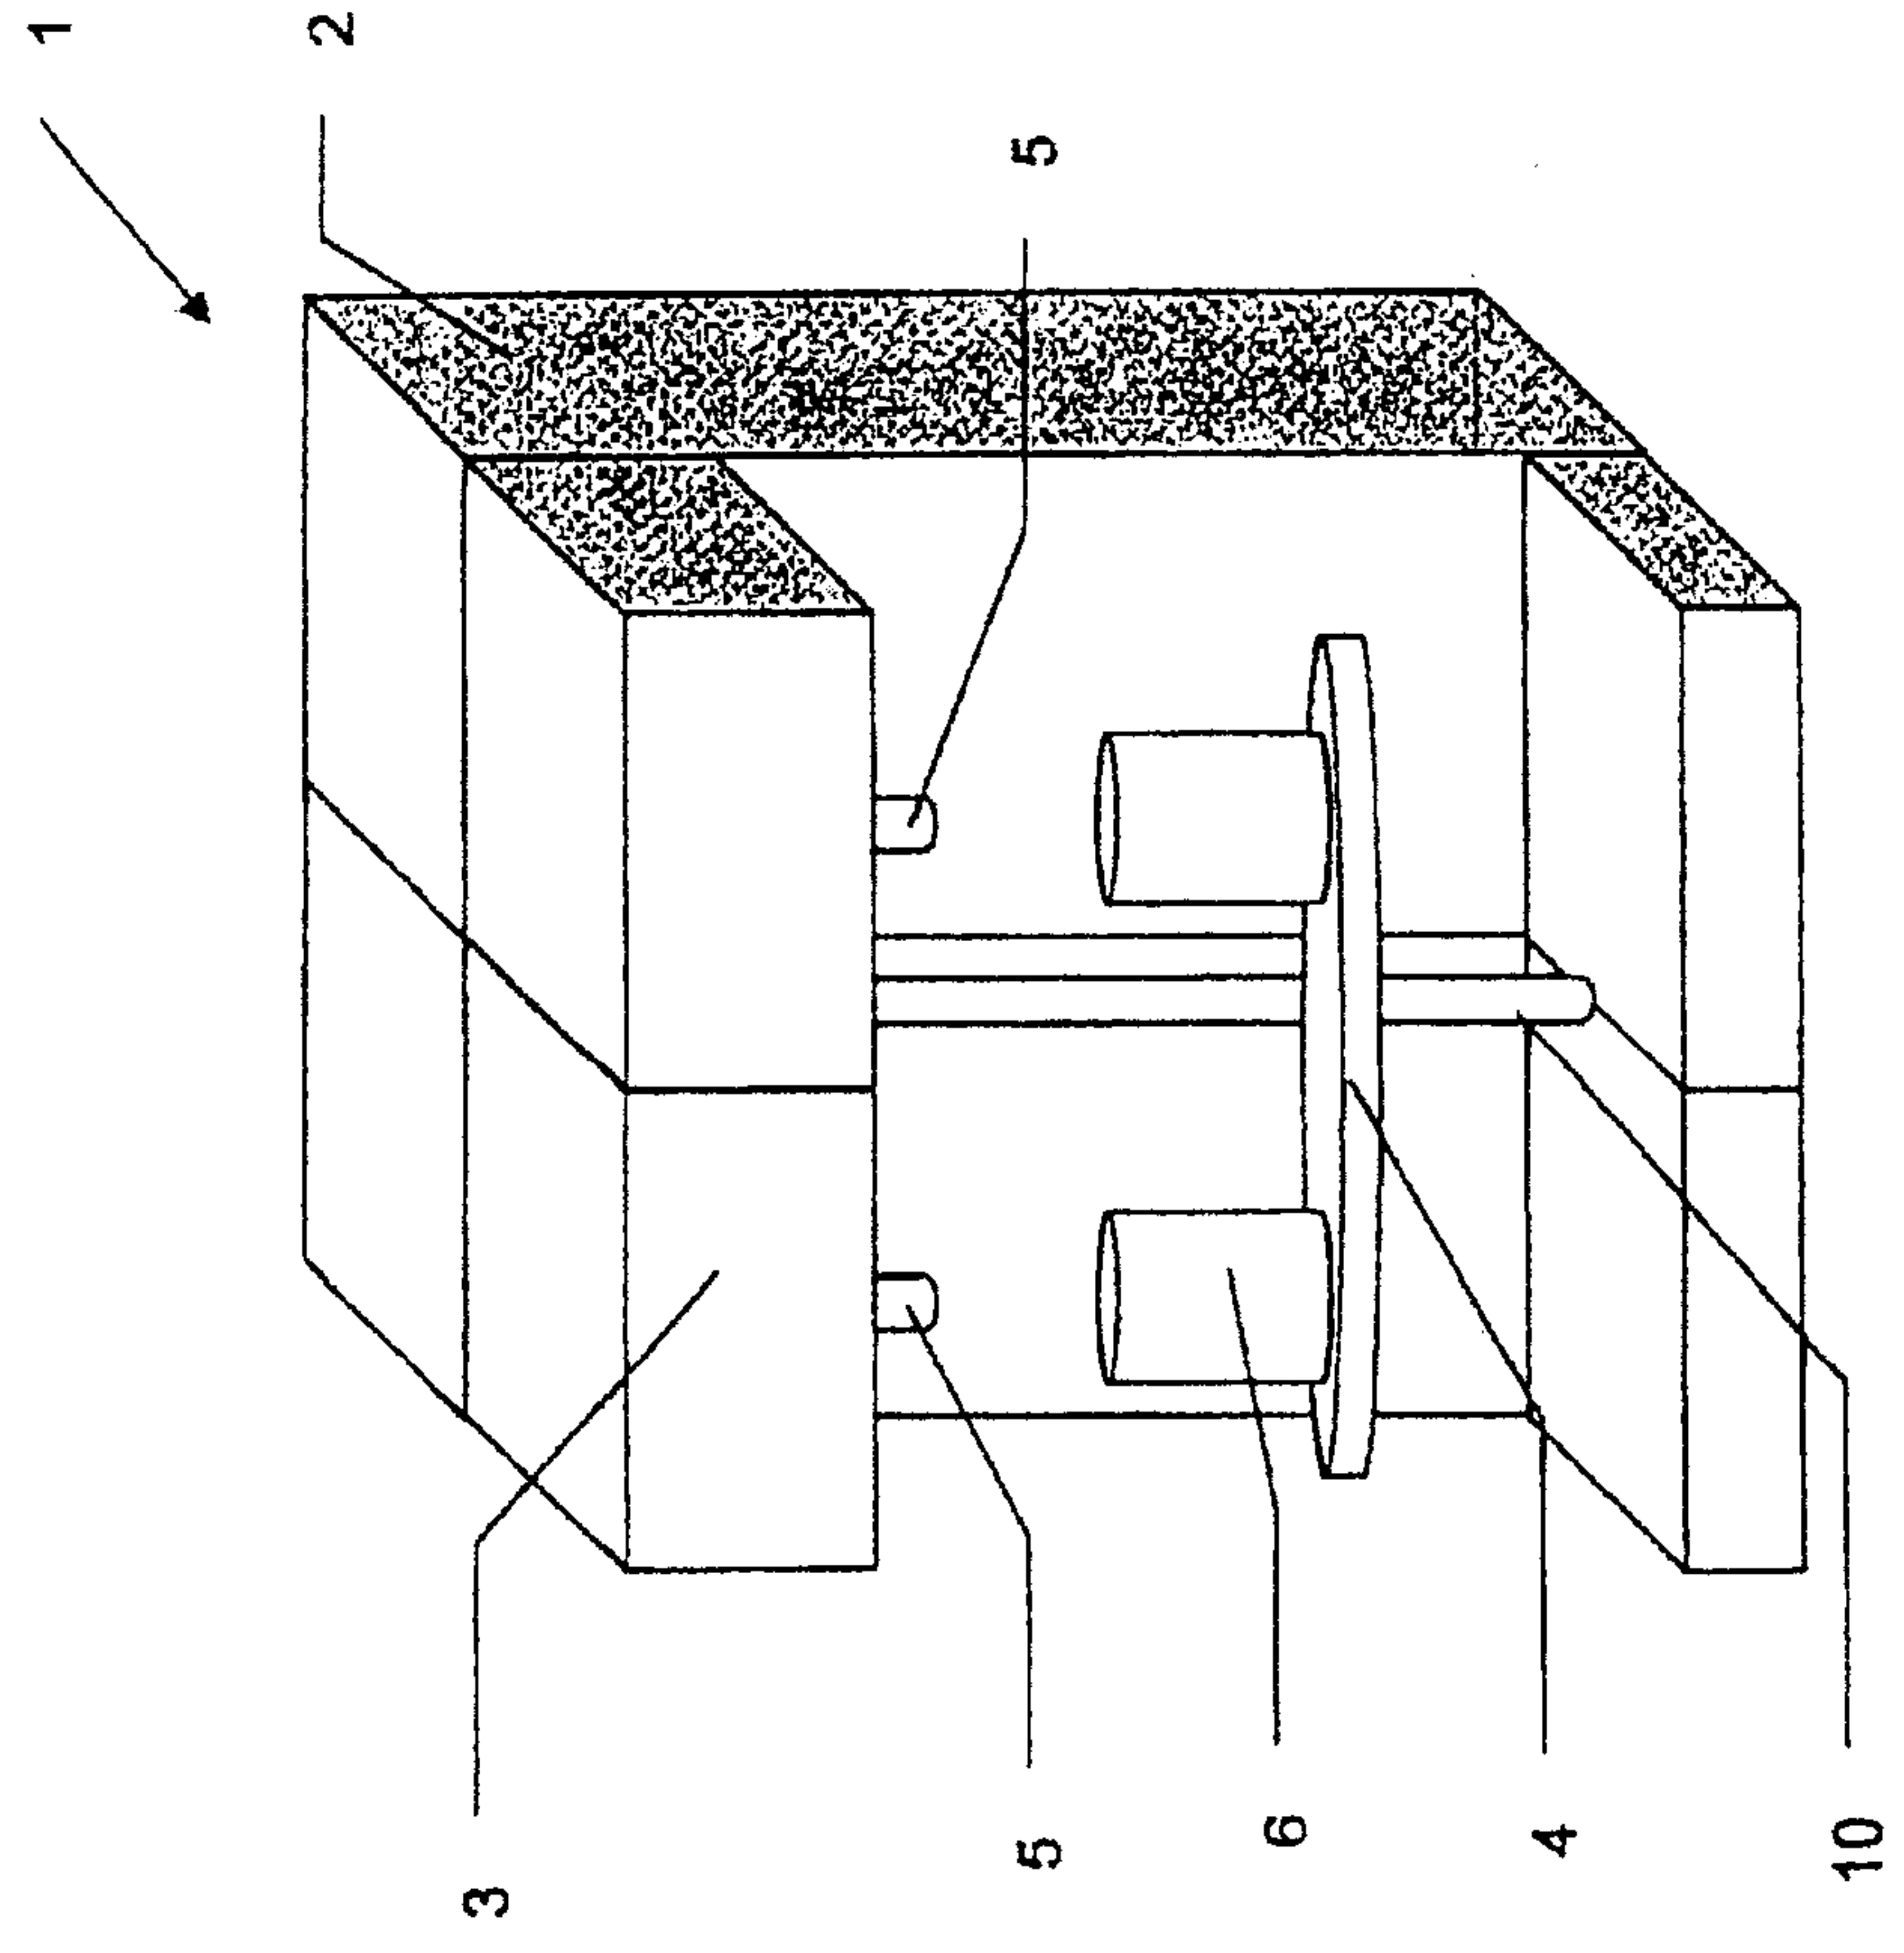


Fig. 1

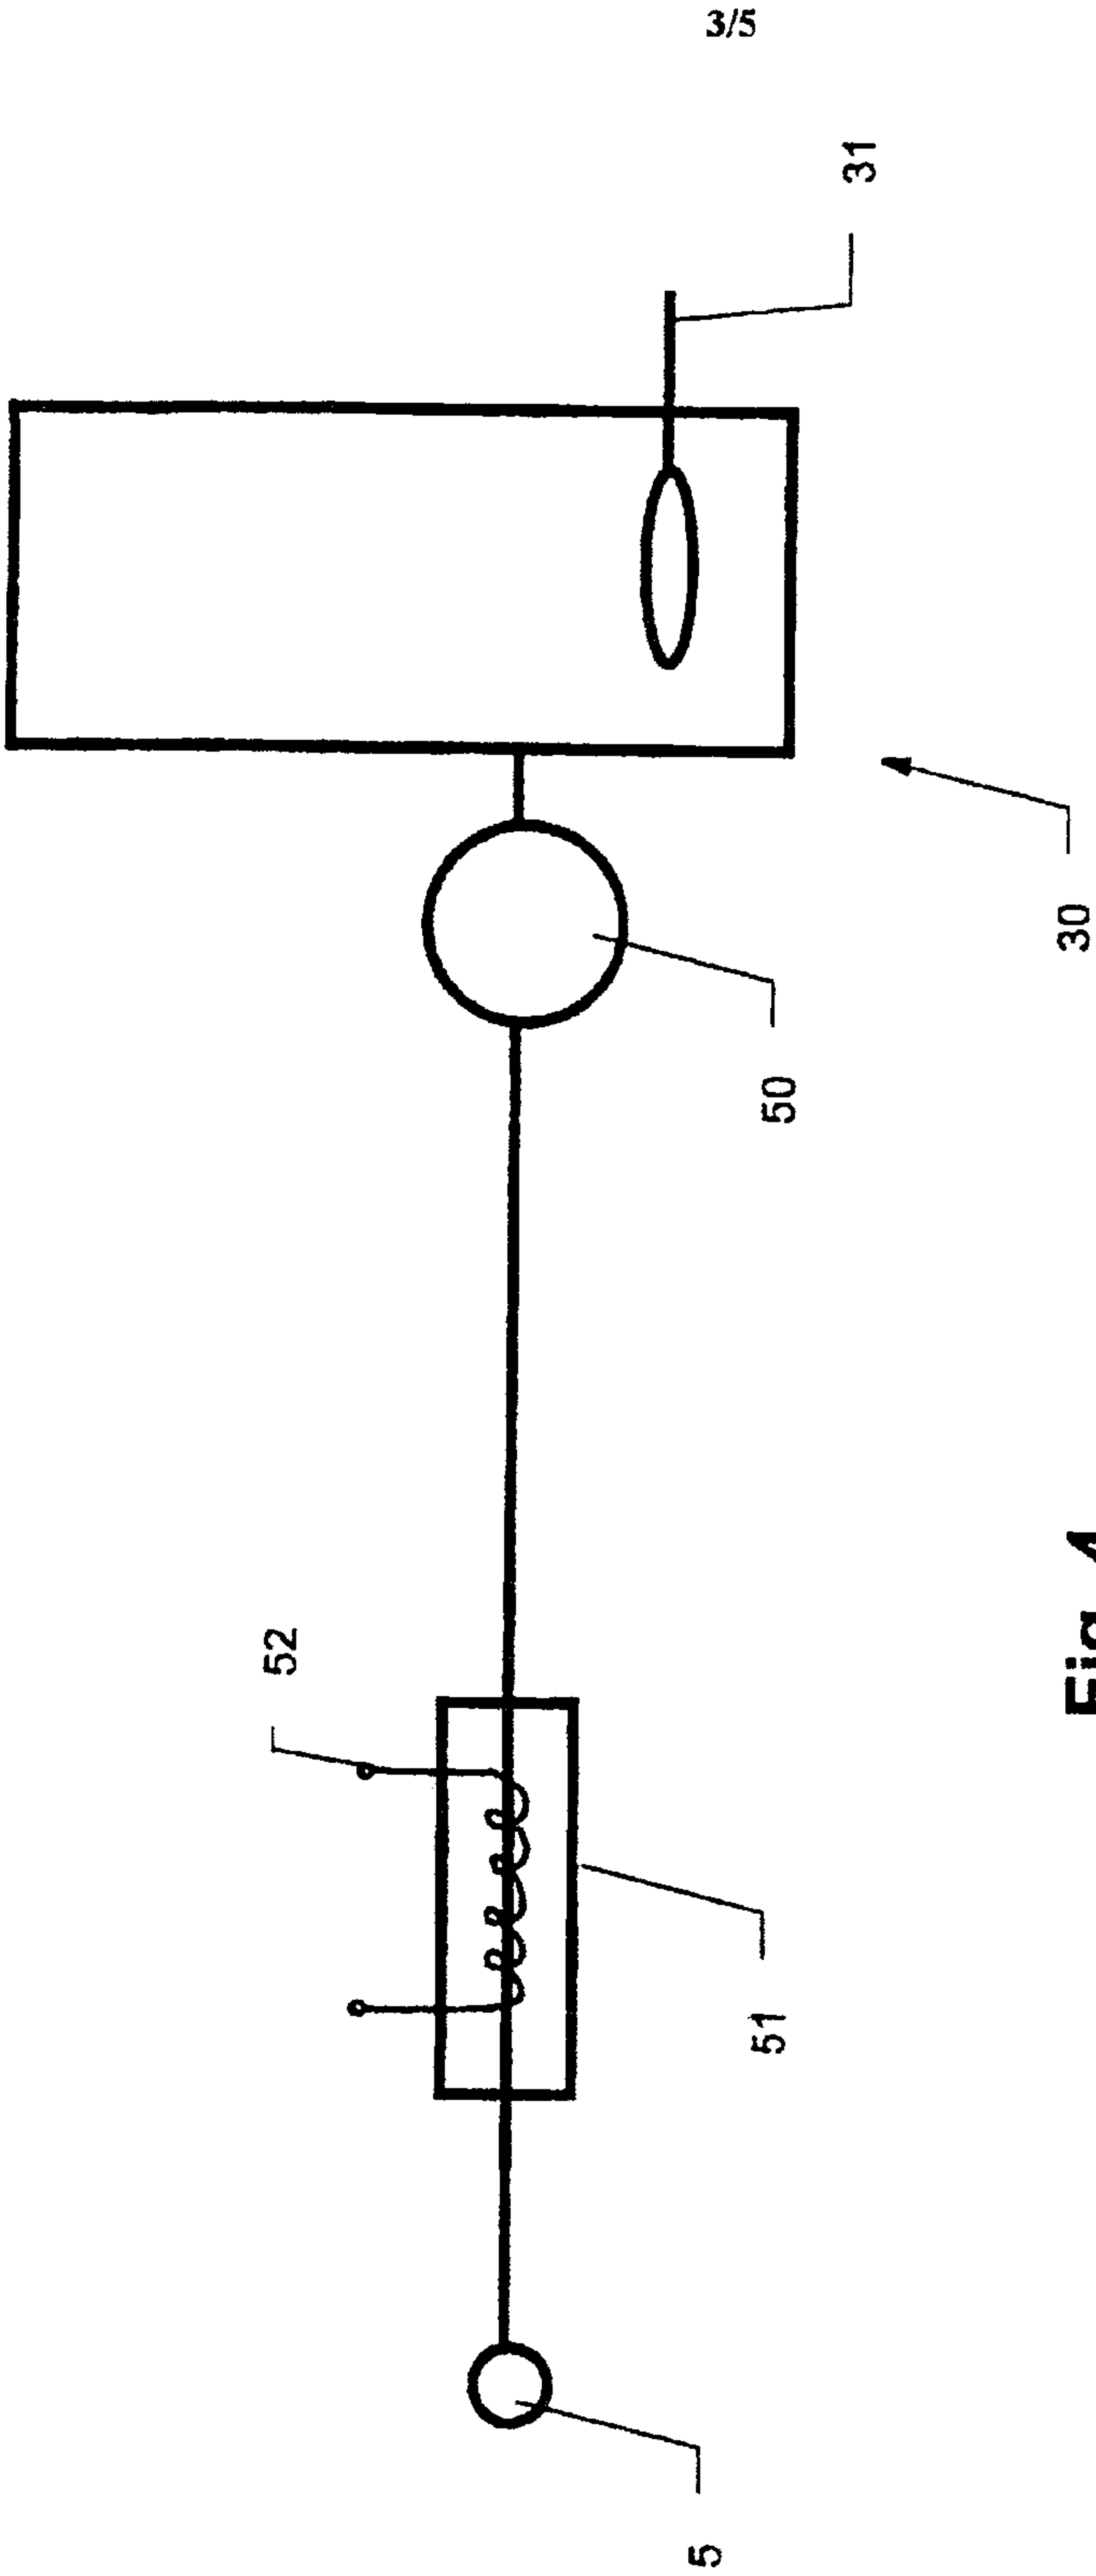


Fig. 4

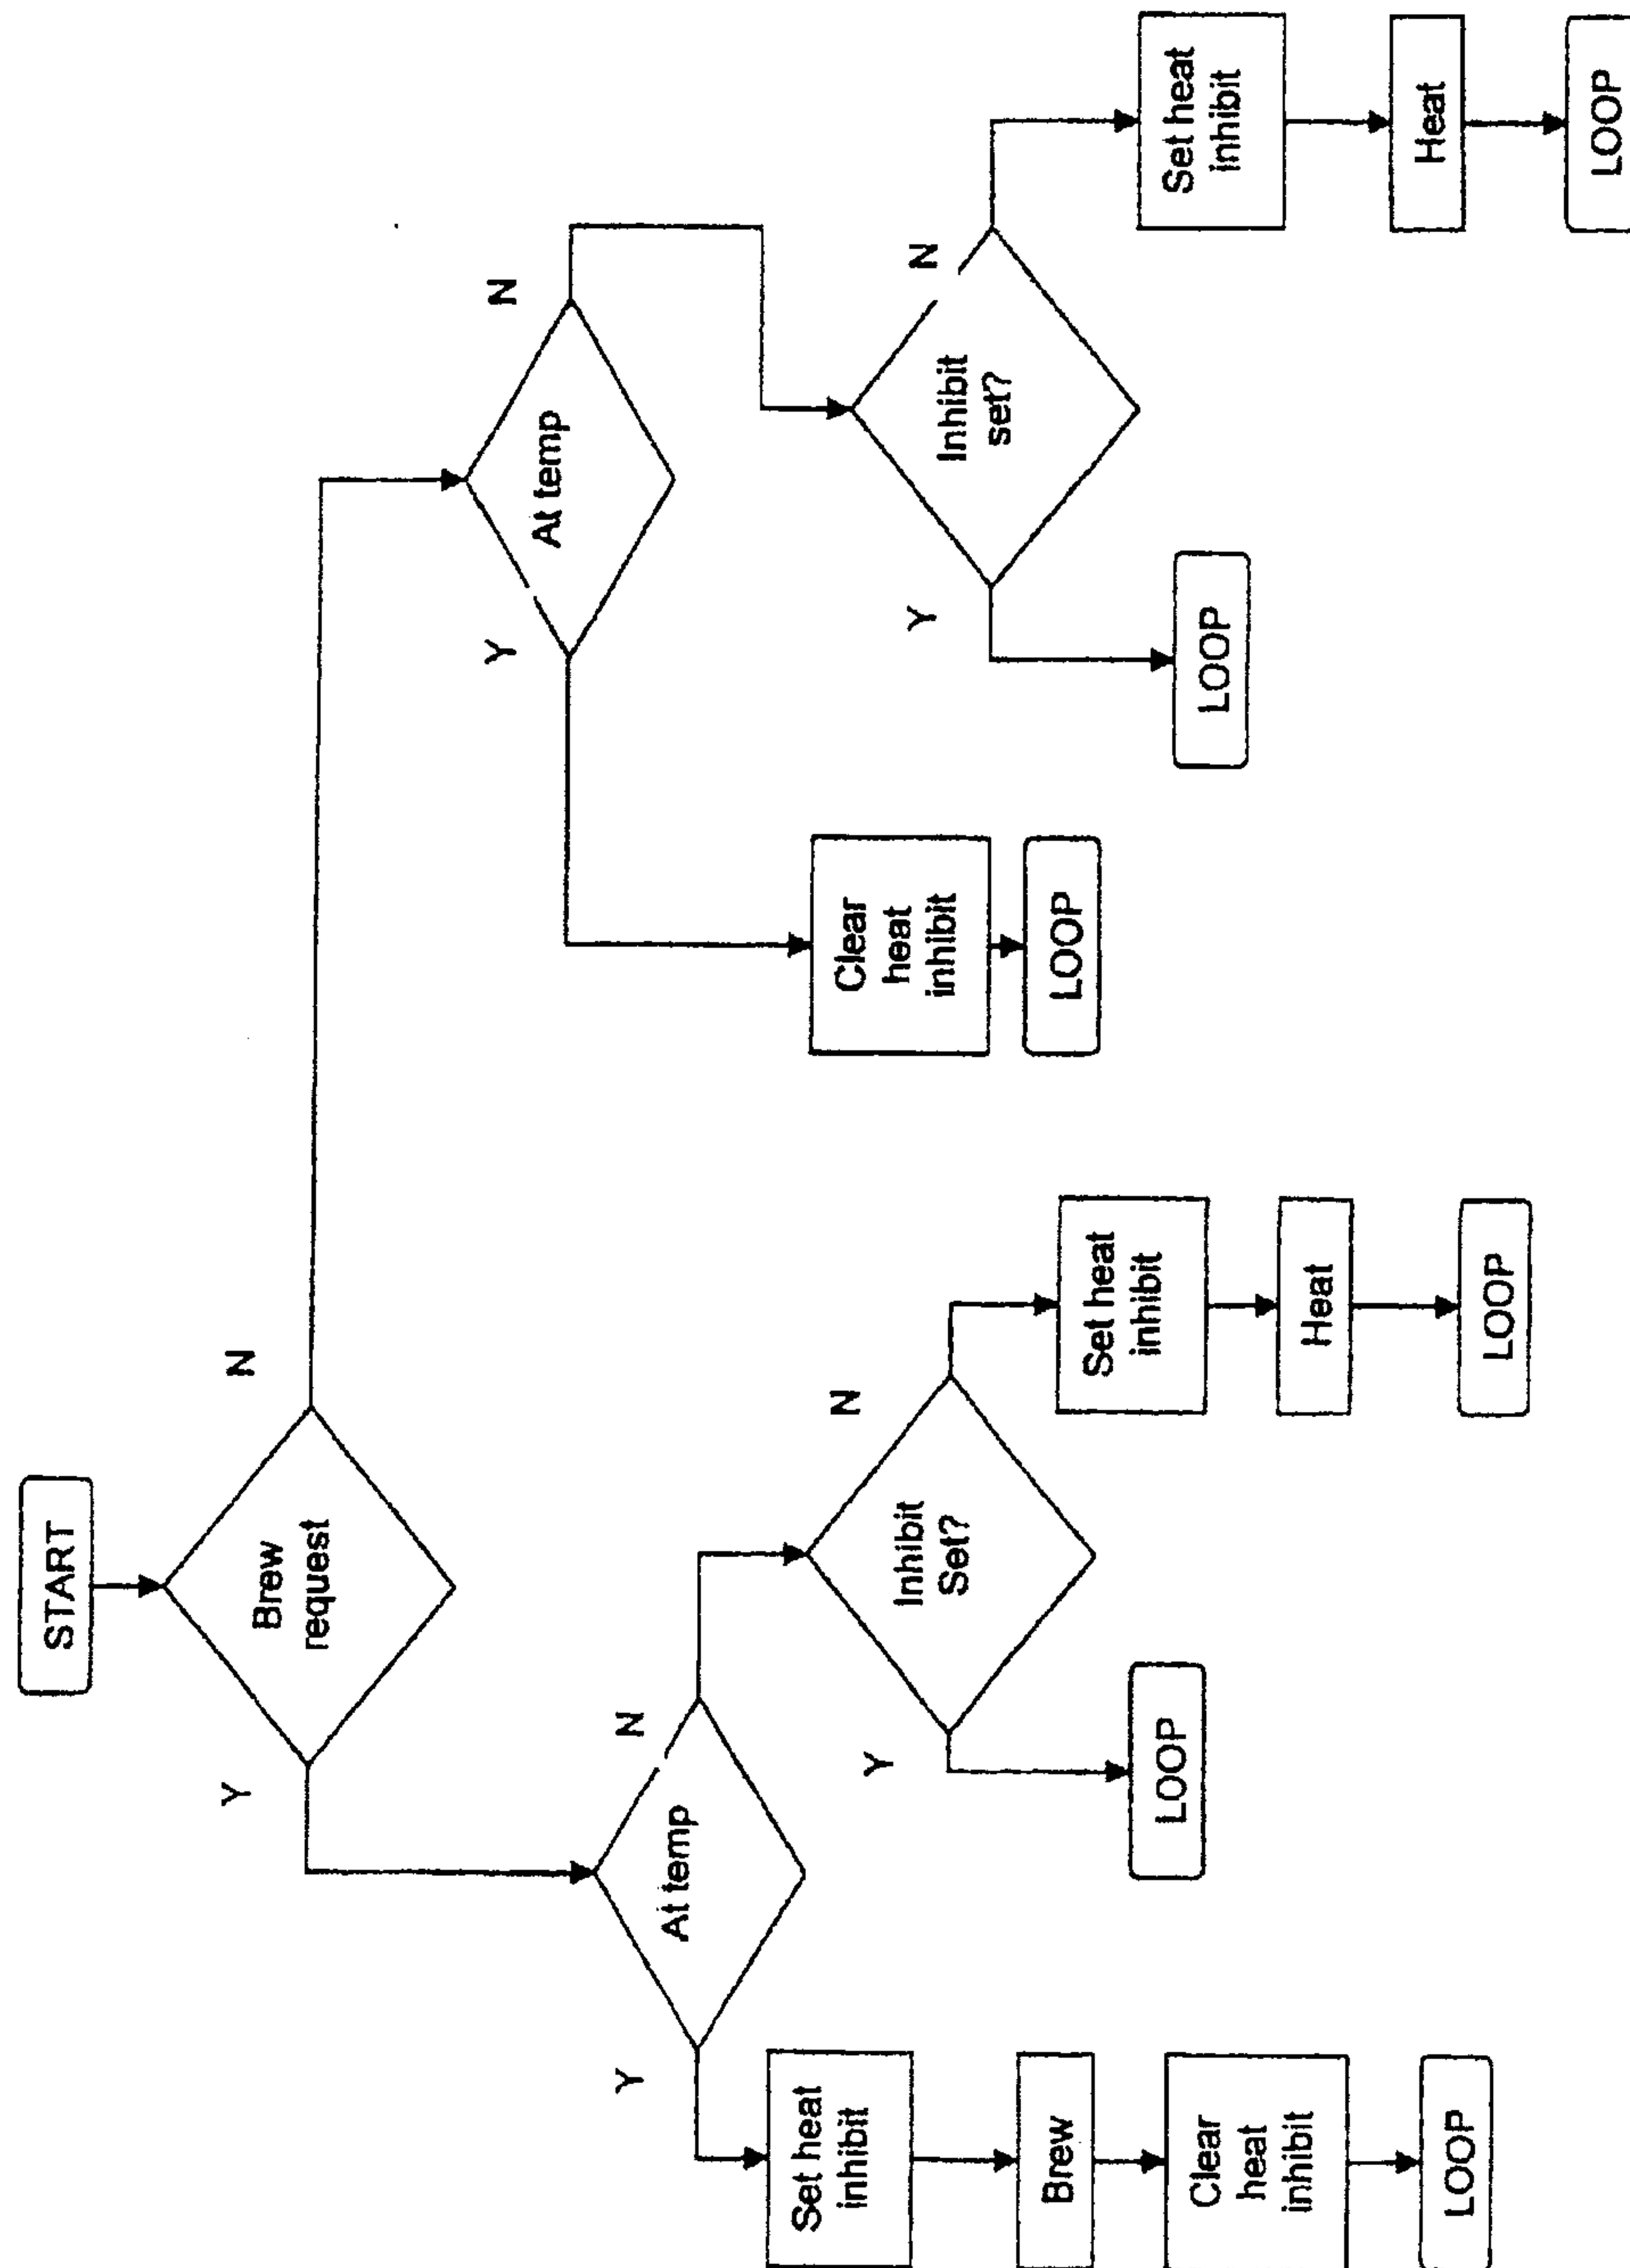


Fig. 5

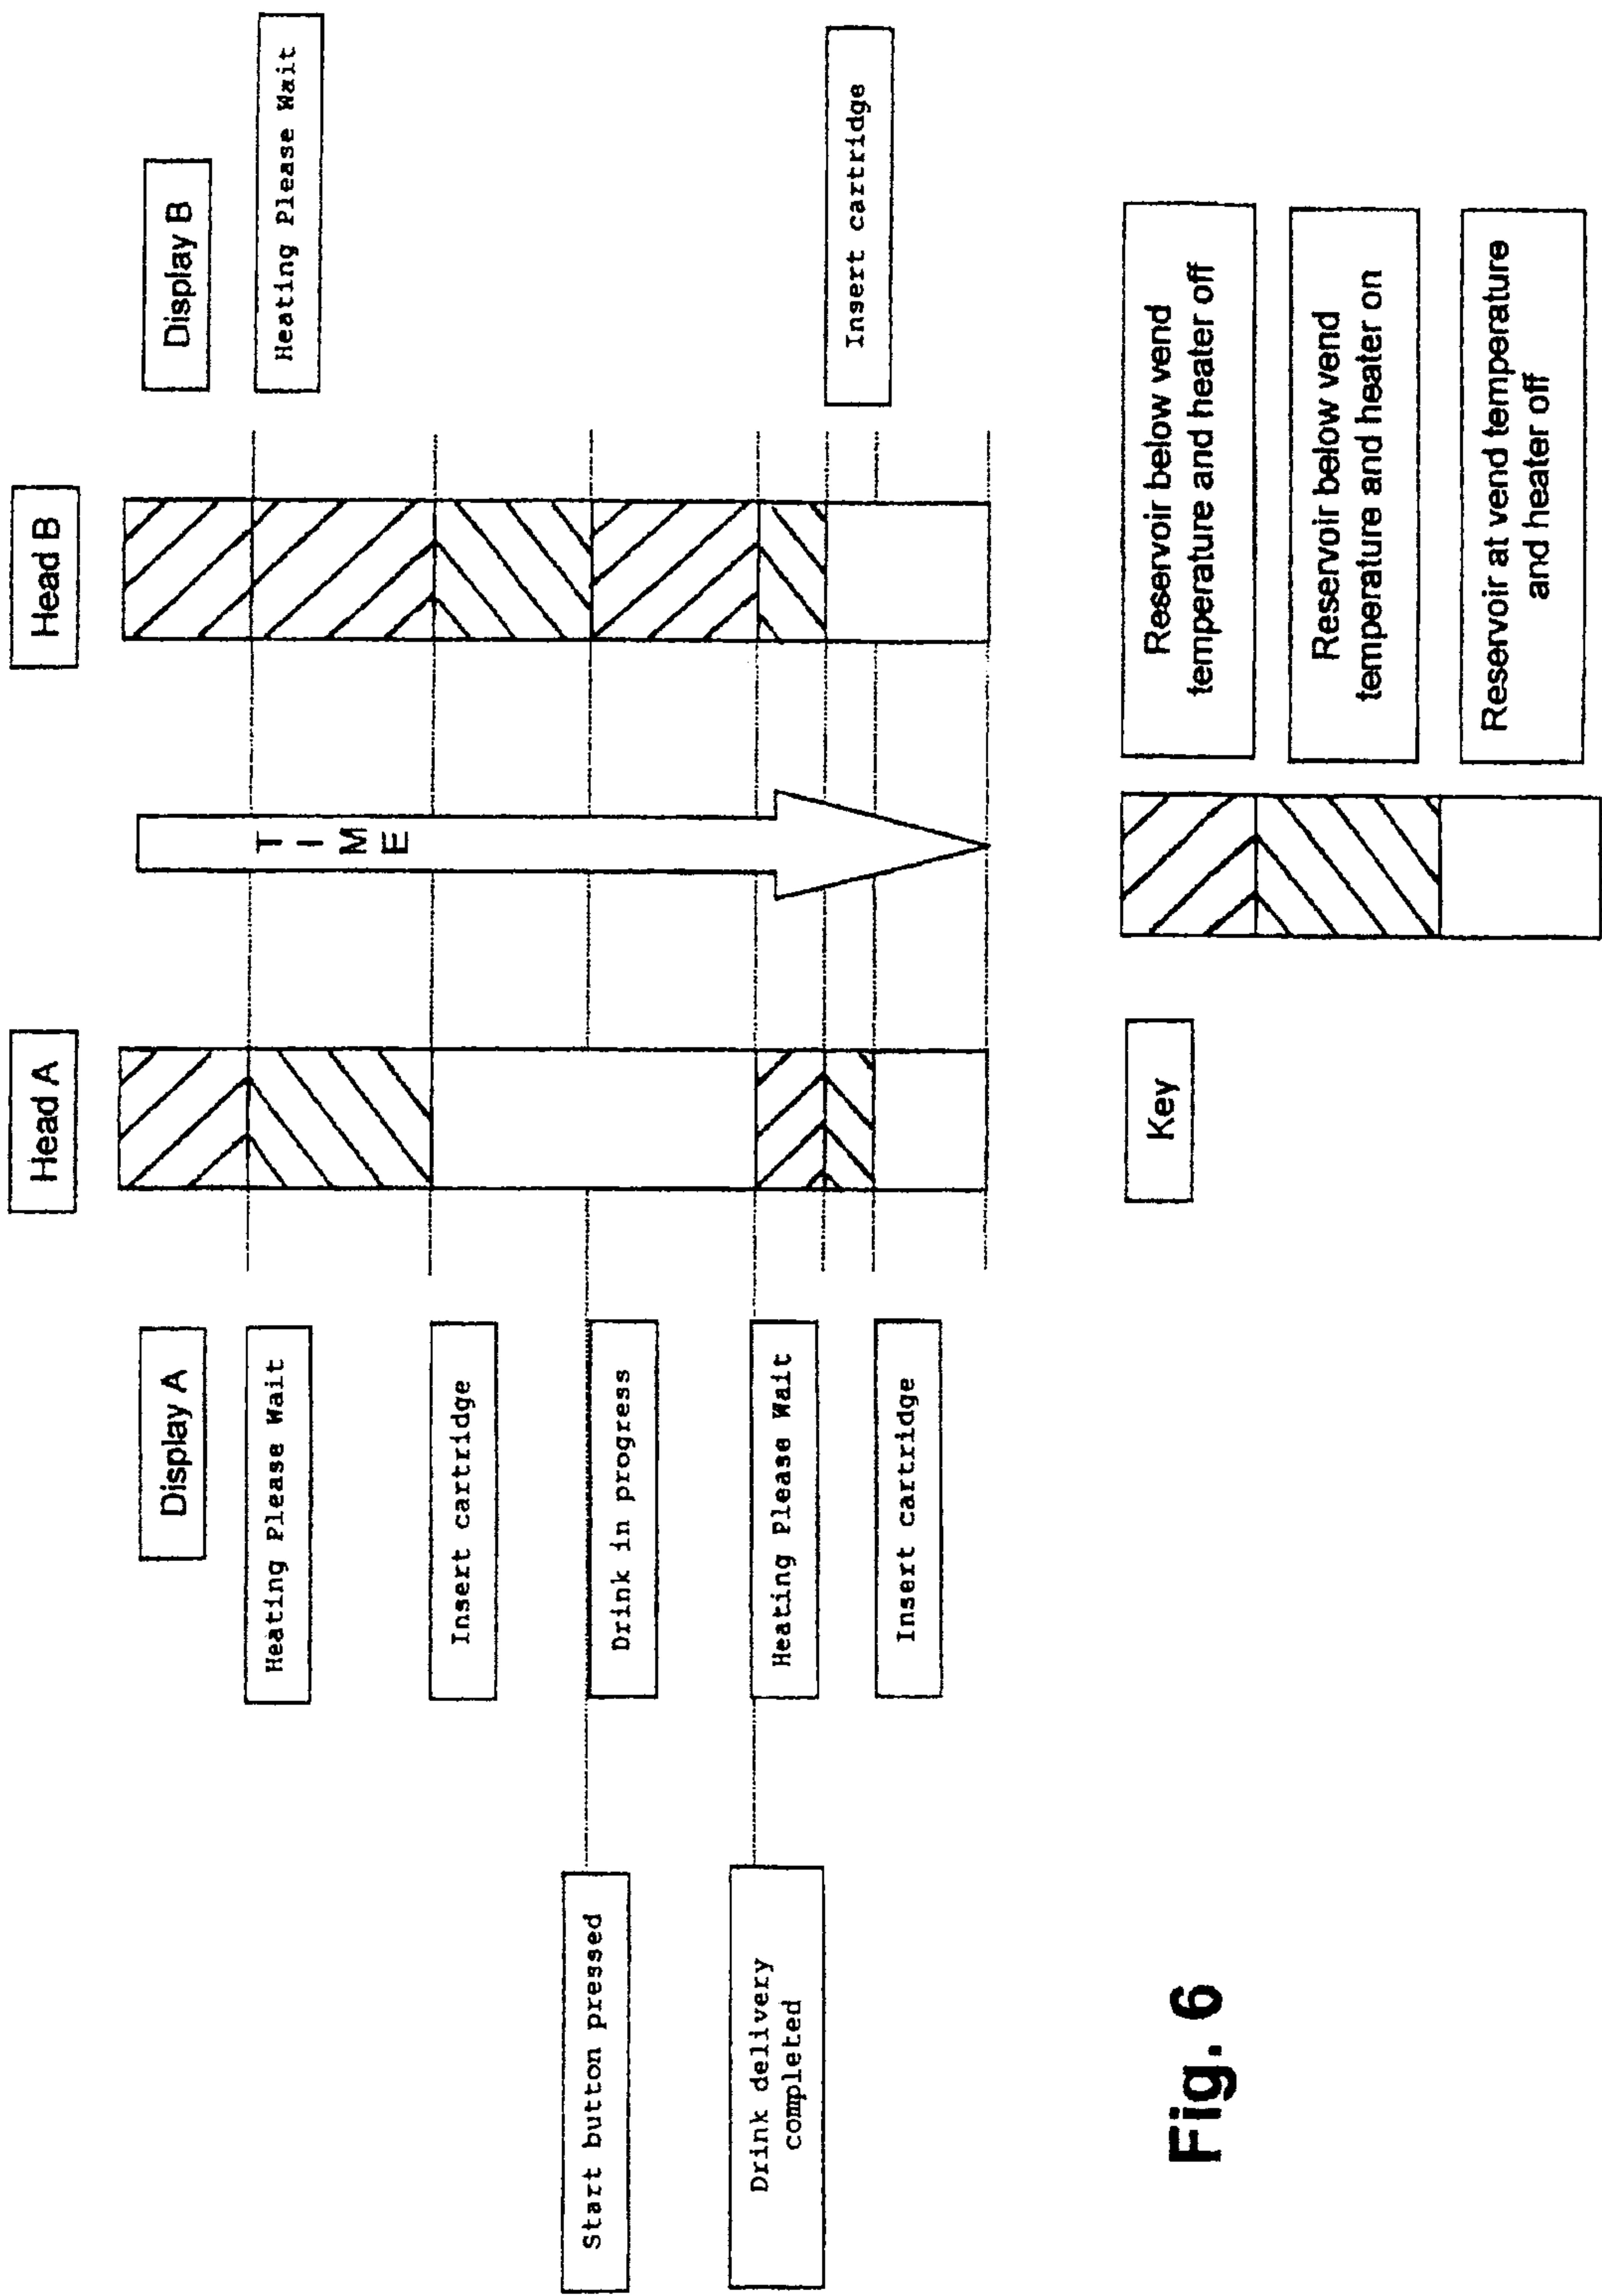


Fig. 6

