

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2005318231 B2**

(54) Title
Film container

(51) International Patent Classification(s)
B65D 75/36 (2006.01)

(21) Application No: **2005318231** (22) Date of Filing: **2005.12.16**

(87) WIPO No: **WO06/067096**

(30) Priority Data

(31) Number (32) Date (33) Country
102004062864.5 **2004.12.21** **DE**

(43) Publication Date: **2006.06.29**

(44) Accepted Journal Date: **2011.08.25**

(71) Applicant(s)
Boehringer Ingelheim International GmbH

(72) Inventor(s)
Geser, Johannes;Beyer, Sebastian

(74) Agent / Attorney
Davies Collison Cave, 1 Nicholson Street, Melbourne, VIC, 3000

(56) Related Art
US 6422391 B1
US 3 941 248 A
US 4 243 144 A
US 5088603 A
US 3 921 805 A
US 3 924 746 A
US 2001/0009231 A
US 3 811 564 A

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
29. Juni 2006 (29.06.2006)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2006/067096 A1

(51) Internationale Patentklassifikation:
B65D 75/36 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2005/056870

(22) Internationales Anmeldedatum:
16. Dezember 2005 (16.12.2005)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
102004062864.5
21. Dezember 2004 (21.12.2004) DE

(71) Anmelder (nur für AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BF, BG, BJ, BR, BW, BY, BZ, CA, CF, CG, CH, CI, CM, CN, CO, CR, CU, CY, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, FR, GA, GB, GD, GE, GH, GM, GN, GQ, GR, GW, HR, HU, ID, IE, IL, IN, IS, IT, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MC, MD, MG, MK, ML, MN, MR, MW, MX, MZ, NA, NE, NG, NI, NL,

NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG):
BOEHRINGER INGELHEIM INTERNATIONAL GMBH [DE/DE]; Binger Strasse 173, 55216 Ingelheim (DE).

(71) Anmelder (nur für DE): **BOEHRINGER INGELHEIM PHARMA GMBH & CO. KG** [DE/DE]; Binger Strasse 173, 55216 Ingelheim (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **BEYER, Sebastian** [DE/DE]; Hochheimer Strasse 5, 65343 Eltville (DE).
GESER, Johannes [DE/DE]; Vorderer Boehl 23, 55218 Ingelheim (DE).


(74) Anwalt: **HAMMANN ET AL., Heinz**; Binger Strasse 173, 55216 Ingelheim (DE).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare nationale Schutzrechtsart): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,

[Fortsetzung auf der nächsten Seite]

(54) Title: FILM CONTAINER

(54) Bezeichnung: FOLIENBEHÄLTER

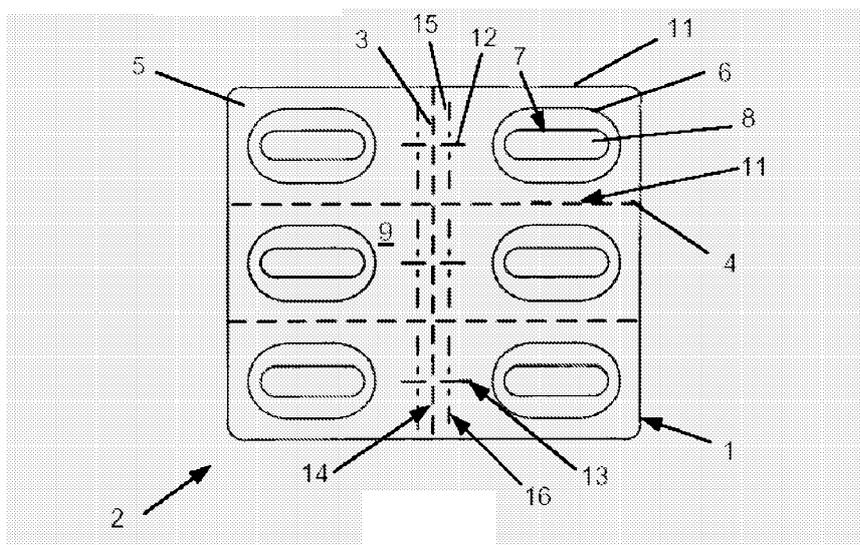

(57) Abstract: A film container comprises two particularly rectangular films (5) for formation of a housing chamber (6) for a filling material (7), in particular, a pharmaceutical agent formulation, which are bonded together around the circumference thereof, at least one film (5) of which is provided with a marking (13) for tearing within the connection region which is released after kinking the films (5). The marking (13) runs between two opposing outer edges (11) of the film container (1).

[Fortsetzung auf der nächsten Seite]

WO 2006/067096 A1



FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

— mit internationalem Recherchenbericht

(84) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK,

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

(57) Zusammenfassung: Ein Folienbehälter umfasst zwei zur Ausbildung einer Aufnahmekammer (6) für ein Füllgut (7), insbesondere eine pharmazeutische Wirkstoffformulierung, umlaufend miteinander verbundene, insbesondere viereckförmige Folien (5), von denen mindestens eine Folie (5) zum Aufreißen mit einer innerhalb des Verbindungsbereichs ausgebildeten Markierung (13) versehen ist, die nach einem Knicken der Folien (5) freigegeben ist. Die Markierung (13) verläuft mittig zwischen zwei gegenüberliegenden Außenkanten (11) des Folienbehälters (1).

89744pct

Film Container

Description

The invention relates to a film container having two in particular rectangular films joined together around their periphery to form a receiving chamber for a filling, particularly a pharmaceutical formulation of an active substance, at least one of said films being provided, for the purpose of tearing it open, with a marking formed within the connecting region, which is exposed when the films are bent over.

The film containers are used, among other things, to protect pharmaceutical formulations of active substances from environmental influences from the outside which might in some cases degrade the pharmaceutical quality of the formulation.

In some countries, regulations for childproof packaging of medical products are being considered or are already in existence in order to make it difficult for children to access, in particular, medicaments which have a toxic effect or which present a relatively serious health risk when used inappropriately.

DE 20 2004 003 781 U1 discloses a childproof rectangular package consisting of two films of foils joined together, the flat connecting area of which encloses at least one receiving chamber for a filling. In order to open the film container physical marking in the form of a modification, particularly a weakened area or the removal of a section of the edge, is provided, which is totally surrounded by the closure region. The first marking provided is a cut or a line in the closure region of the packaging formed from the films, this closure region being in the form of a sealed edge portion, this first marking not extending as far as the edge of the packaging, while the second marking provided is a line which intersects the first marking and which when creased exposes the first

2005318231 05 Aug 2011

- 2 -

marking towards the outer contour for the purpose of tearing. The closure region is broadened out, in the region of an unsealed removal portion, to form a tab which is creased so that the cut becomes part of the outer contour. The package is opened by tearing off one end of the packaging at the location of the cut. Moreover, a rectangular bag is shown having a sealed

5 edge which is broadened out in a corner region, while extending through this is a bending line extending diagonally of the outer contour, and from this there proceeds, at right angles, a cut or a perforated section for tearing open the packaging.

The present invention advantageously provides a film container of the type described above

10 which is sealed so as to be childproof while opening over a large area and at the same time being easy to manufacture, by extending the marking centrally between two opposing outer edges of the film container.

In another aspect, the present invention provides a blister card comprising a plurality of film

15 containers, each of the plurality of film containers comprising two films joined together at their periphery to form a receiving chamber for a filling, at least one of said films being provided, for the purpose of tearing it open, with a marking formed within the connecting region of the two films, which is exposed after the films have been bent, wherein the marking extends centrally between two opposing outer edges of the film container, and wherein a further

20 marking for the controlled bending of the films is provided parallel to and at a spacing from an associated outer edge of the film container, and wherein the further marking extends at a spacing from a perforation which divides the blister card in its centre.

The film container according to the invention has no additional tab or connecting area which is

25 modified in relation to the receiving chamber, as in the prior art constructions, and for this reason it is relatively easy and therefore inexpensive to produce. After the deliberate folding or creasing of the films, in accordance with the instructions on an information sheet, for example, the film container is torn open centrally along the marking in order to remove a primary package, a powder, a liquid or other filling, while the marking, e.g. a partial

30 weakening of the films, ensures at least that the films are torn open by a tearing action into the receiving chamber and after creasing is present at least at the outer edge of the film container.

To make the creasing of the films easier in order to expose the marking, another marking is expediently provided for controlled creasing of the films parallel to and at a spacing from an outer edge of the film container. The further marking may for example extend over the full width of the film container and be printed as a line on one of the films. In order to protect the

filling the distance of the further marking from the associated outer edge is less than the distance from the receiving chamber.

Preferably, the further marking divides the marking asymmetrically. In other words the marking is of a different length on one side of the further marking from the other side. Preferably the length of the marking between the receiving chamber and the further marking is longer than between the further marking and the corresponding outer edge. Thus, on the one hand, it is relatively easy to tear open the films in order to remove the filling and on the other hand the filling is protected from environmental influences by a relatively large-area connecting region. In order to make it easier to remove the filling the marking advantageously extends centrally with respect to the receiving chamber. Expediently, the marking and the further marking run at right angles to one another.

In a second preferred embodiment the further marking divides the marking symmetrically, i.e. the marking has the same length on both sides of the further marking. This variant is particularly preferred when reasons of tolerance argue against the asymmetric shape, particularly in connection with a marking which is short in length, e.g. 1 mm. In this embodiment, too, the tearing of the films in order to remove the filling is relatively easy to carry out, on the one hand, and, on the other hand, the filling is protected from environmental influences on account of a relatively large-area connecting region. In order to make it easier to remove the filling the marking advantageously extends centrally with respect to the receiving chamber. Expediently, the marking and the further marking run at right angles to one another.

According to one feature the marking is in the form of a notch or cut. Preferably the further marking is a perforation. Thanks to these measures the film container can be opened without the use of tools and the processes needed to open it can be grasped intuitively by an adult.

In order to protect the filling from moisture penetrating through the connecting region the two films are joined together by a heat-sealing lacquer.

Expediently, one film is constructed as the carrier film bearing the receiving chamber and the other film is constructed as the cover film. The carrier film of the so called blister is formed by thermoforming, for example. Preferably, the films are constructed as metal and/or plastics and/or paper films. These materials may be present in several layers. The carrier film consists for example, on the side facing the filling, of an approximately 60 μm thick layer of polyvinylchloride (PVC) followed by an approximately 45 μm thick aluminium foil which is in turn attached to an approximately 25 μm thick film of an oriented polyamide (oPA). The cover film may for example consist, on the side facing the filling, of an approximately 5 μm (3 to 7 μm) thick layer of heat sealing lacquer, for example a commercially obtainable acrylate-based polymer mixture, an approximately 20 μm thick aluminium film and connected thereto an approximately 23 μm thick film of a polyethyleneterephthalate (PET). Naturally, the two films may also be identical or made from other materials, while PET and a PVC/aluminium laminate per se being difficult to tear.

Aluminium foil also has the advantage that it protects light- or UV-sensitive filling from visible light and UV radiation.

According to a further feature, a plurality of film containers are combined to form a blister card and can be separated by means of intersecting perforations. A blister card may for example comprise six film containers, each film container being separated from adjacent film containers by means of the intersecting perforations.

To make it more difficult for a child to open a film container in the blister card as a whole, the further marking preferably runs parallel to and at a spacing from a perforation which divides the blister card along its centre. Accordingly, it is necessary either to separate a film container from the blister card first of all, with subsequent creasing along the further marking in order to tear it open

along the marking or, optionally after separating the blister card into two halves, to crease all the film containers on one side of the perforation which divides the blister card and then to tear a foil container open along this marking, in which case it is substantially more difficult to tear through the uninterrupted edge configuration of the opposite film container.

It would be understood that the features mentioned above and those which will be described in more detail hereinafter may be used not only in the combination specified but also in other combinations. The scope of the invention is defined solely by the claims.

The film container according to the invention is suitable for example for packaging pharmaceutical formulation containing dabigatran etexilate, as described for example in WO 03/074056.

The invention is hereinafter described in more detail by means of an exemplifying embodiment with reference to the associated drawings, wherein:

Fig. 1 is a plan view of a film container according to the invention,

Fig. 2 is a perspective view of the film container according to Fig. 1,

Fig. 3 is another perspective view of the film container according to Fig. 1 and

Fig. 4 is a diagrammatic view of a blister card made up of a plurality of film containers according to Fig. 1.

The film container 1 in the form of a blister is part of a blister card 2 provided with intersecting perforations 3, 4 for separating the film containers 1. Each of the film containers essentially comprises two films 5, one of which is constructed as a carrier film 9 comprising a receiving chamber 6 for a filling 7, namely a capsule 8 filled with a pharmaceutical active substance, while the other is constructed as a cover film 10 attached to the carrier film 9 by means

of a heat sealing lacquer, the connecting region between the two films 5 extending over the entire surface thereof, apart from the receiving chamber 6.

Between two parallel longitudinal outer edges 11 of the rectangular film container 1 is provided, centrally with respect to the receiving chamber 6, in the connecting region of the two films 5, a marking 13 in the form of a cut 12 which is spaced from both the associated outer edge 14 at the end face and from the receiving chamber 6. The cut 12 acts as an aid to tearing and after the film container 1 has been creased, is present along a further marking 16 on the corresponding outer edge 14, in the form of a perforation 15, extending parallel to and at a spacing from the corresponding outer edge 14 at the end face. The further marking 16 extending over the entire width of the film container 1 runs at right angles to the cut 12 and divides it asymmetrically so that the path of the cut 12 between the receiving chamber 6 and the further marking 16 is longer than the part between the further marking 16 and the adjacent outer edge 14 at the end face. The outer edge 14 associated with the further marking 16 opens into the centrally extending perforation 3 in the blister card 2, and this is why the film container 1 can only be torn open to remove the capsule 8 after it has been separated off.

In another embodiment of the invention, there is provided a blister card 2 comprising a plurality of film containers 1, each of the plurality of film containers 1 comprising two in particular rectangular films 5 joined together at their periphery to form a receiving chamber 6 for a filling 7, particularly a pharmaceutical formulation of an active substance, at least one of said films 5 being provided, for the purpose of tearing it open, with a marking 13 formed within the connecting region of the two films 5, which is exposed after the films 5 have been bent, wherein the marking 13 extends centrally between two opposing outer edges 11 of the film container 1 and wherein a further marking 16 for the controlled bending of the films 5 is provided parallel to and at a spacing from an associated outer edge 14 of the film container 1 and wherein the further marking 16 extends at a spacing from a perforation 3 which divides the blister card 2 in its centre.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

2005318231 01 Aug 2011

The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. Blister card comprising a plurality of film containers, each of the plurality of film containers comprising two films joined together at their periphery to form a receiving chamber for a filling, at least one of said films being provided, for the purpose of tearing it open, with a marking formed within the connecting region of the two films, which is exposed after the films have been bent, wherein the marking extends centrally between two opposing outer edges of the film container, and wherein a further marking for the controlled bending of the films is provided parallel to and at a spacing from an associated outer edge of the film container, and wherein the further marking extends at a spacing from a perforation which divides the blister card in its centre.
2. Blister card according to claim 1, wherein the spacing of the further marking from the associated further outer edge is less than the spacing from the receiving chamber.
3. Blister card according to claim 1 or 2, wherein the further marking divides the marking asymmetrically.
4. Blister card according to any one of claims 1 to 3, wherein the marking between the receiving chamber and the further marking is longer than between the further marking and the associated outer edge.
5. Blister card according to claim 1 or 2, wherein the further marking divides the marking symmetrically.
6. Blister card according to any one of claims 1 to 5, wherein the receiving chamber extends centrally with respect to the marking.
7. Blister card according to any one of claims 1 to 6, wherein the marking is in the form of a notch or cut.
8. Blister card according to any one of claims 1 to 6, wherein the further marking is a perforation.

9. Blister card according to any one of claims 1 to 8, wherein the two films are joined together by a heat sealing lacquer.
10. Blister card according to any one of claims 1 to 9, wherein one film is constructed as a carrier film comprising the receiving chamber and the other film is constructed as a covering film.
11. Blister card according to any one of claims 1 to 10, wherein the films are constructed as metal and/or plastic and/or paper films.
12. Blister card according to any one of claims 1 to 11, wherein the plurality of film containers can be separated by means of intersecting perforations.
13. Blister card according to any one of claims 1 to 12, wherein the films are rectangular.
14. Blister card according to any one of claims 1 to 13, wherein the filling is a pharmaceutical formulation of an active substance.
15. Blister card according to one of claims 1 to 14, wherein the filling contains a pharmaceutical formulation containing dabigatran etexilate.
16. Blister card according to claim 1, substantially as hereinbefore described with reference to any one of the examples.

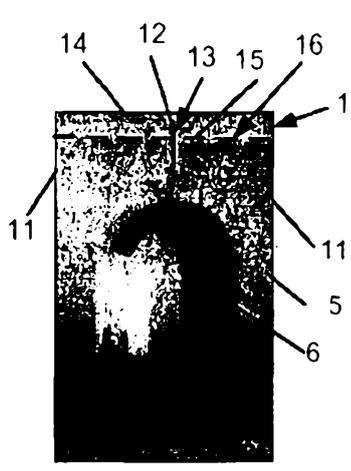


Fig. 1

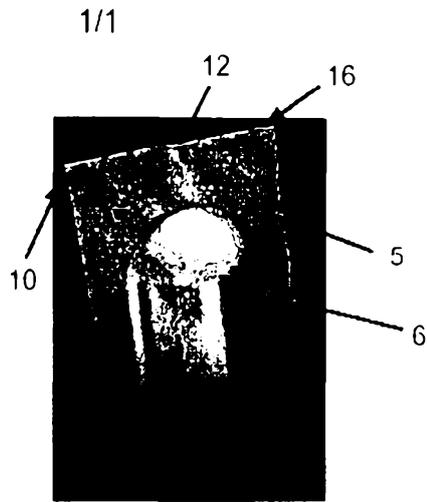


Fig. 2

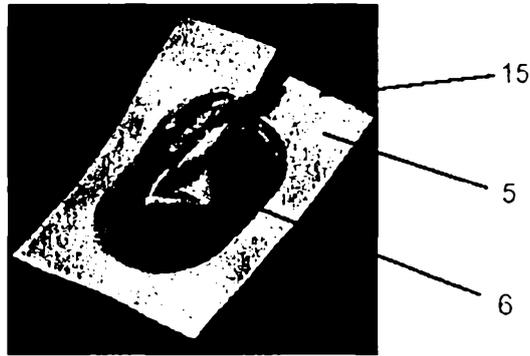


Fig. 3

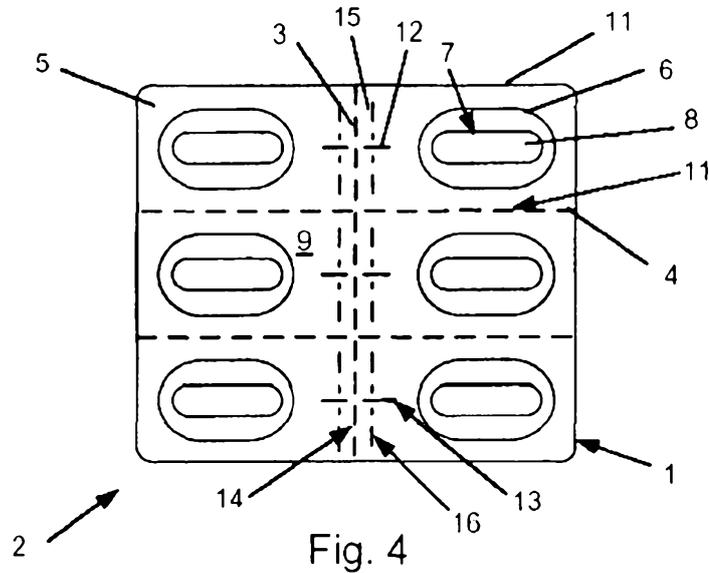


Fig. 4